

TEST REPORT



DANAK

Reg. no. 19

DELTA

DELTA
Danish Electronics,
Light & Acoustics

Venlighedsvej 4
DK-2970 Hørsholm
Denmark

Tel. (+45) 45 86 77 22
Fax (+45) 45 86 58 98
www.delta.dk

*This report is issued
under the rules of
DANAK (The Danish
Accreditation Scheme)
– see overleaf.*

*The report must not
be reproduced,
except in full,
without the written
approval of DELTA.*

**Measurements of radio frequency interference from
Fingerprint Reader Precise 100 A USB Infineon
Performed for Precise Biometrics AB**

**Project no.: K221128-8
Date: 2000-09-26**

LIABILITY

The following provisions shall apply in respect of accredited testing and calibration tasks conducted by DELTA Danish Electronics, Light & Acoustics (herein- after DELTA) and of test reports and calibration certificates issued by DELTA.

1. DELTA shall not be liable for any loss or damage unless it is established that such loss or damage results from negligence or breach of duty on the part of DELTA.

2. The procedures used for testing/calibration and the preparation of the present test report/calibration certificate are based on the knowledge and techniques available to DELTA at the time of testing/calibration. DELTA shall not be held liable should subsequent technical developments indicate that such knowledge or techniques were inadequate or incorrect.

3. DELTA shall not be liable for loss or damage

- in cases where the product causing such loss or damage has not been tested by DELTA, except where it is established that such product is identical to one tested or examined by DELTA, or

- in cases where such loss or damage results from a property of a product or of a use, to which such product is put, which either has not been tested or examined and described in the present report or differs from DELTA's description in that report of the properties of the product or of uses to which it might be put.

4. DELTA will in no event be liable for consequential losses such as, but not limited to, loss of profit.

5. Should a third party enter a claim for compensation which exceeds the limits for DELTA's liability as set out in § 1-4 above, then defence against any such claim shall be the responsibility of the Client if DELTA so requires, and all costs of such defence and of any litigation in connection therewith shall be borne by the Client. Should DELTA be held liable or otherwise be ordered to make payments in excess of the limits set out in § 1-4, then the Client shall be obliged to indemnify and hold DELTA harmless in respect of such excess.

6. Any dispute arising out of or relating to this Test Report shall be referred to Copenhagen Arbitration. The interpretation and performance of this Test Report shall be governed by and construed in accordance with the laws of Denmark.

DANAK (DANISH ACCREDITATION)

DANAK was established in 1991 in pursuance of the Industry and Trade Promotion Act No. 394 of 13 June 1990. The scheme is a continuation of the accreditation scheme established in 1973 under the auspices of the former Danish National Testing Board (STP).

The requirements to the accredited testing laboratories are laid down in the Danish Agency for Development of Trade and Industry Statutory Order No. 258 of 11 April 1994 on accreditation of laboratories to perform technical testing etc.

The standards DS/EN 45001 „General criteria for the operation of testing laboratories“ and DS/EN 45002 „General criteria for the assessment of testing laboratories“ are integrated parts of the statutory order.

In order to obtain accreditation to perform technical testing it is, among other things, required:

- that the testing laboratory and its personnel are free from any commercial, financial and other pressures which might influence their technical judgement.

- that the testing laboratory operates a quality system which is documented.

- that the testing laboratory is furnished with items of

- equipment required for correct performance of the tests and measurements which the laboratory is accredited to perform.

- that the testing laboratory has sufficient personnel, having the necessary education, training, technical knowledge and experience for their assigned functions.

- that the testing laboratory has procedures for traceable calibration of equipment used for accredited testing.

- that accredited testing is performed after fully documented methods.

- that the testing laboratory has records which contain sufficient information to permit repetition of the test.

- that the testing laboratory is assessed and surveyed by DANAK on a regular basis.

- that the accredited laboratory shall take out an insurance which will cover liability in connection with accredited testing

Test reports carrying the logo of DANAK are used to report accredited testing and the logo shows that the testing has been performed in accordance with the rules of accreditation.

Title Measurements of radio frequency interference from
Fingerprint Reader Precise 100 A USB Infineon

Test object Precise 100 A USB Infineon

Report no. DANAK-195237

Project no. K221128-8

Dates of test 2000-08-30

Client Precise Biometrics AB
Dag Hamerskjölds väg 2
S – 224 64 Lund
Sweden

Telephone: +46 46 311100
Telefax: +46 46 311101

Contact person Mr. Håkan Lohmander

Manufacturer Precise Biometrics AB

Specifications EN 55022:1994 (CISPR 22:1993 + A1:1995 + A2:1996)
class B + A1:1995 + A2:1997
FCC part 15 Subpart B class B demonstrated by
compliance with EN 55022:1994, class B.

Results The emission from the test object was below the limit of
the above specifications.

Test personnel Henrik Egeberg Nielsen

Date 2000-09-26

Project manager 
Per Hansen,
Facility Manager, EMC
DELTA

Responsible 
Jørgen Duvald Christensen,
Department Manager, EMC
DELTA

The client has received this report in electronic form. DELTA keeps a paper copy of the report.

Table of contents	Page
1. Summary of test results	4
2. Test specimen	5
3. General test conditions	6
3.1 Test set-up	6
4. Tests and results	8
4.1 Conducted emission, AC mains (EN 55022, class B)	8
4.2 Radiated electromagnetic field (EN 55022, class B)	9
4.3 Conducted emission, AC mains (FCC, class B / EN 55022, class B)	10
4.4 Radiated electromagnetic field (FCC, class B / EN 55022, class B)	11
Annex 1 List of instruments (1 page)	
Annex 2 Test record sheets and photos regarding conducted emission, AC mains (EN 55022, class B) (3 pages)	
Annex 3 Test record sheets and photos regarding radiated electromagnetic field (EN 55022, class B) (3 pages)	
Annex 4 Test record sheets and photos regarding conducted emission, AC mains (FCC class B / EN 55022 class B) (3 pages)	
Annex 5 Test record sheets and photos regarding radiated electromagnetic field (FCC, class B / EN 55022, class B) (3 pages)	
Annex 6 Photo of test object (1 page)	

1. **Summary of test results**

The results of the emission tests can be summarised as follows:

Emission tests	EN 55022:1994 (CISPR 22:1993 + A1:1995 + A2:1996) class B + A1:1995 + A2:1997	FCC part 15 Subpart B class B, demonstrated by compliance with EN 55022:1994, class B
Conducted emission, AC mains	Passed	Passed
Radiated electromagnetic field	Passed	Passed

Abbreviations : Passed : The emission was below the limit.
 Not done : No test was performed.
 N/A : Not applicable.
 Not relevant : The test was not relevant for the test object.

The test results relate only to the specimen tested.

2. Test specimen

Category	:	Electronic identification equipment
Manufacturer	:	Precise Biometrics AB
Model/Type	:	Precise 100 A USB Infineon
Part no.	:	MS010027
Serial no.	:	0001
Supply voltage	:	5.0 VDC supplied from the LapTop PC to the test object. 115 VAC and 230 VAC supplied to the LapTop PC power adapter.
Operational mode	:	Normal (a test programme was executing all functions).
Comments	:	PCB rev. C installed.

3. General test conditions

3.1 Test set-up

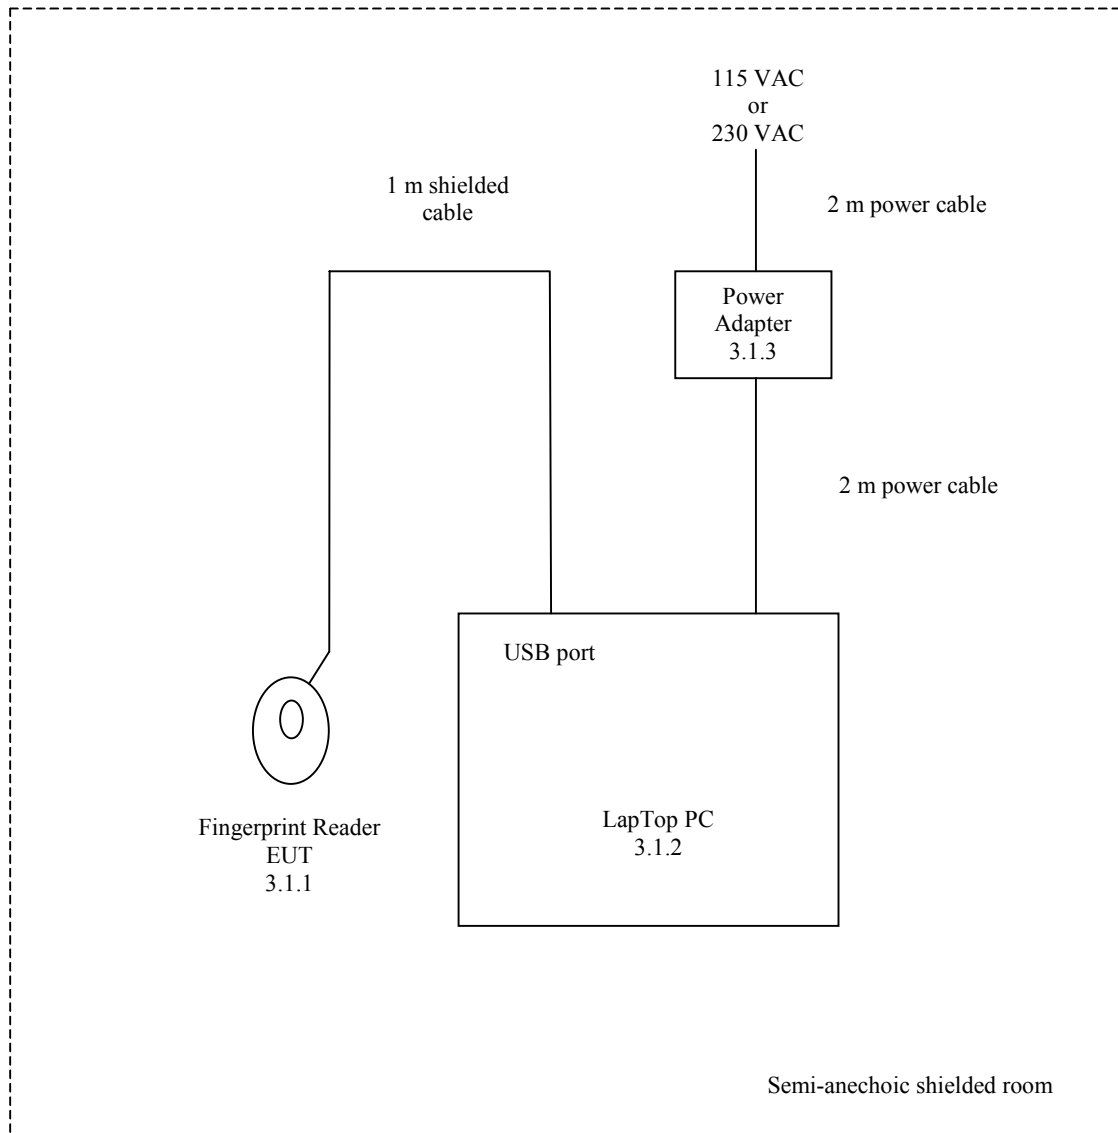


FIG. 1 Test configuration including test object and peripheral equipment

The complete system used during the tests consisted of the following units:

3.1.1 *Fingerprint Reader* *EUT*

Manufacturer	:	Precise Biometrics AB
Model/type	:	Precise 100 A USB Infineon
Part no.	:	MS010027
Serial no.	:	0001
FCC ID	:	-

3.1.2 *LapTop PC* *AUX*

Manufacturer	:	IBM
Model/type	:	ThinkPad 600E
Part no.	:	2645-3A0
Serial no.	:	5502ZP2
FCC ID	:	DOC

3.1.3 *Power adapter* *AUX*

Manufacturer	:	IBM
Model/type	:	Adapter 100 – 240 VAC / 16 VDC
Part no.	:	02K7006
Serial no.	:	J15JK580002
FCC ID	:	-

4. Tests and results

4.1 Conducted emission, AC mains (EN 55022, class B)

	Requirements
Specification	EN 50081-1:1992
Test method	EN 55022:1994 (CISPR 22:1993 + A1:1995 + A2:1996) class B + A1:1995 + A2:1997
Frequency range	0.15 - 30 MHz
Limit: (quasi-peak)	0.15-0.50 MHz: 66-56 dB μ V (decreasing lin. with the logarithm of freq.) 0.50-5 MHz: 56 dB μ V 5-30 MHz: 60 dB μ V
Limit: (average)	0.15-0.50 MHz: 56-46 dB μ V (decreasing lin. with the logarithm of freq.) 0.50-5 MHz: 46 dB μ V 5-30 MHz: 50 dB μ V
Test record sheets and photos	Annex 2

Results:

The emission was within the specified limits.

Climatic conditions:

22.0°C and 54.5 %RH

Comments:

The conducted emission was measured on the AC-mains to the LapTop PC power adapter. 230 VAC supply power to LapTop PC power adapter.

4.2 Radiated electromagnetic field (EN 55022, class B)

	Requirements	
Specification	EN 50081-1:1992	
Test method	EN 55022:1994 (CISPR 22:1993 + A1:1995 + A2:1996) class B + A1:1995 + A2:1997	
Measuring distance	10 m	
Frequency range	30 - 1000 MHz	
Limit: (quasi-peak)	30-230 MHz:	30 dB μ V/m
	230-1000 MHz:	37 dB μ V/m
Test record sheets and photos		<i>Annex 3</i>

Results:

The emission was within the specified limits.

Climatic conditions:

22.0°C and 54.5 %RH

Comments:

115 VAC supply power to LapTop PC power adapter.

4.3 Conducted emission, AC mains (FCC, class B / EN 55022, class B)

	Requirements
Specification	FCC Rules and Regulations:1997, part 15, subpart B class B, demonstrated by compliance with EN 55022:1994, class B
Test method	CISPR 22:1993 + A1:1995 + A2:1996
Frequency range	0.15 - 30 MHz
Test set-up	ANSI C63.4:1992
Limit: (quasi-peak)	0.15-0.50 MHz: 66-56 dB μ V (decreasing lin. with the logarithm of freq.) 0.50-5 MHz: 56 dB μ V 5-30 MHz: 60 dB μ V
Limit: (average)	0.15-0.50 MHz: 56-46 dB μ V (decreasing lin. with the logarithm of freq.) 0.50-5 MHz: 46 dB μ V 5-30 MHz: 50 dB μ V
Test record sheets and photos	<i>Annex 4</i>

Results:

The emission was within the specified limits.

Climatic conditions:

22.0°C and 54.5 %RH

Comments:

The conducted emission was measured on the AC-mains to the LapTop PC power adapter. 115 VAC supply power to LapTop PC power adapter.

4.4 Radiated electromagnetic field (FCC, class B / EN 55022, class B)

	Requirements	
Specification	FCC Rules and Regulations:1997, part 15, subpart B, class B, demonstrated by compliance with EN 55022:1994, class B	
Test method	CISPR 22:1993 + A1:1995 + A2:1996	
Test set-up	ANSI C63.4:1992	
Measuring distance	10 m	
Frequency range	30 – 1000 MHz	
Limit: (quasi-peak)	30-230 MHz:	30 dB μ V/m
	230-1000 MHz:	37 dB μ V/m
Test record sheets and photos	Annex 5	

Results:

The emission was within the specified limits.

Climatic conditions:

22.0°C and 54.5 %RH

Comments:

115 VAC supply power to LapTop PC power adapter.

Annex 1

List of instruments

(1 page)

List of instruments

EC NO. INSTRUMENT		MANUFACTURER	TYPE
29797	BILOG ANTENNA, 30-1000 MHz	CHASE	CBL 6111A
29301	ARTIFICIAL MAINS NETWORK	ROHDE & SCHWARZ	ESH2-Z5
29916	AUTOMATIC EMI RECEIVER	ROHDE & SCHWARZ	ESCS-30
29861	EMI-SOFTWARE Ver. 1.6	ROHDE & SCHWARZ	ES-K1

Annex 2


***Test record sheets and photos regarding
conducted emission, AC mains (EN 55022, class B)***

(3 pages)

DELTA Electronics Testing.

EUT: Aladdin 2 - USB Infineon sensor
Manufacturer: Precise Biometrics
Operating Condition: Line no.: Neutral, 230 VAC.
Test Site: EMC-5
Operator: HNE - k221128
Test Specification: EN 55022 class B, FCC class B.
Comment: Sheet 15
Start of Test: 2000-08-30

Level [dB μ V]

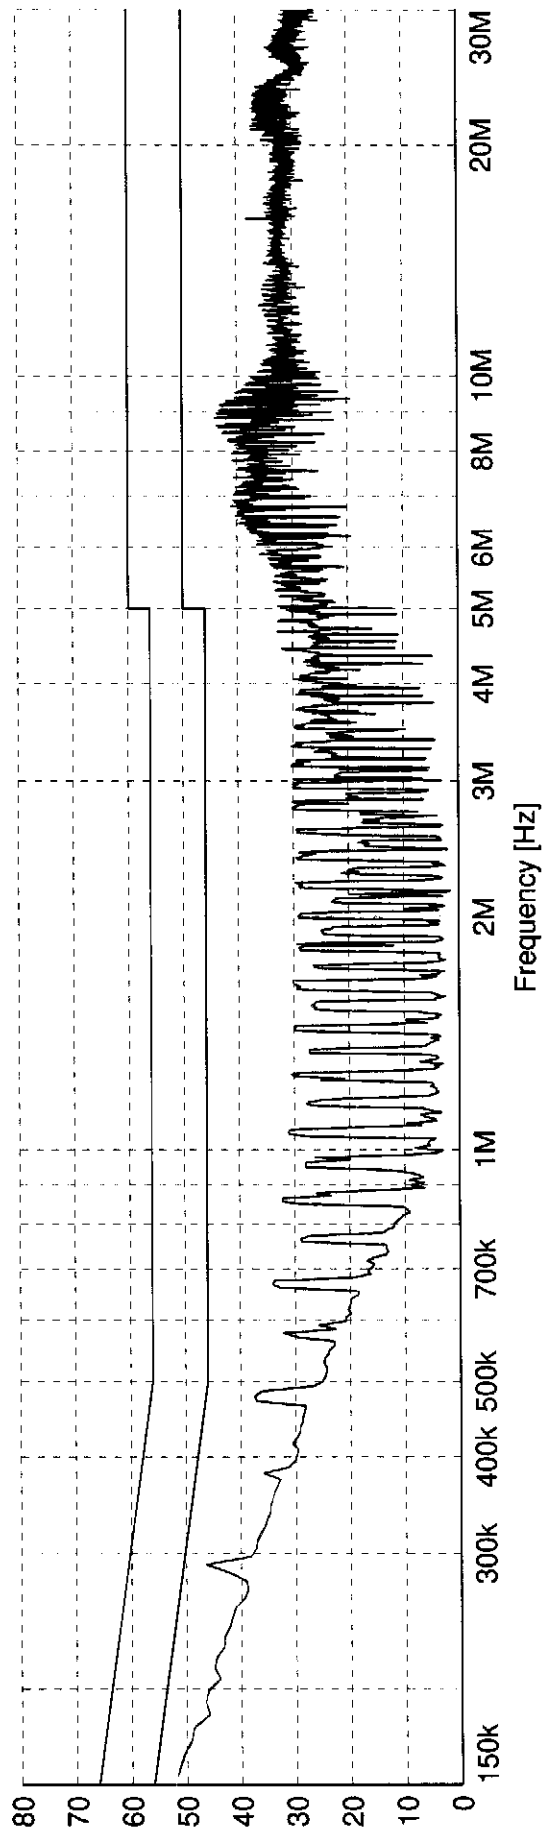


— MES CE 0.15-30 PK MaxPk
— LIM CE, EN 55022 B, QP Conducted Emission
— LIM CE, EN 55022 B, AV Conducted Emission

DELTA Electronics Testing.

EUT: Aladdin 2 - USB Infineon sensor
Manufacturer: Precise Biometrics
Operating Condition: Line no.: Line 1. 230 VAC.
Test Site: EMC-5
Operator: HNE - k221128
Test Specification: EN 55022 class B. FCC class B.
Comment: Sheet 14
Start of Test: 2000-08-30

Level [dB μ V]

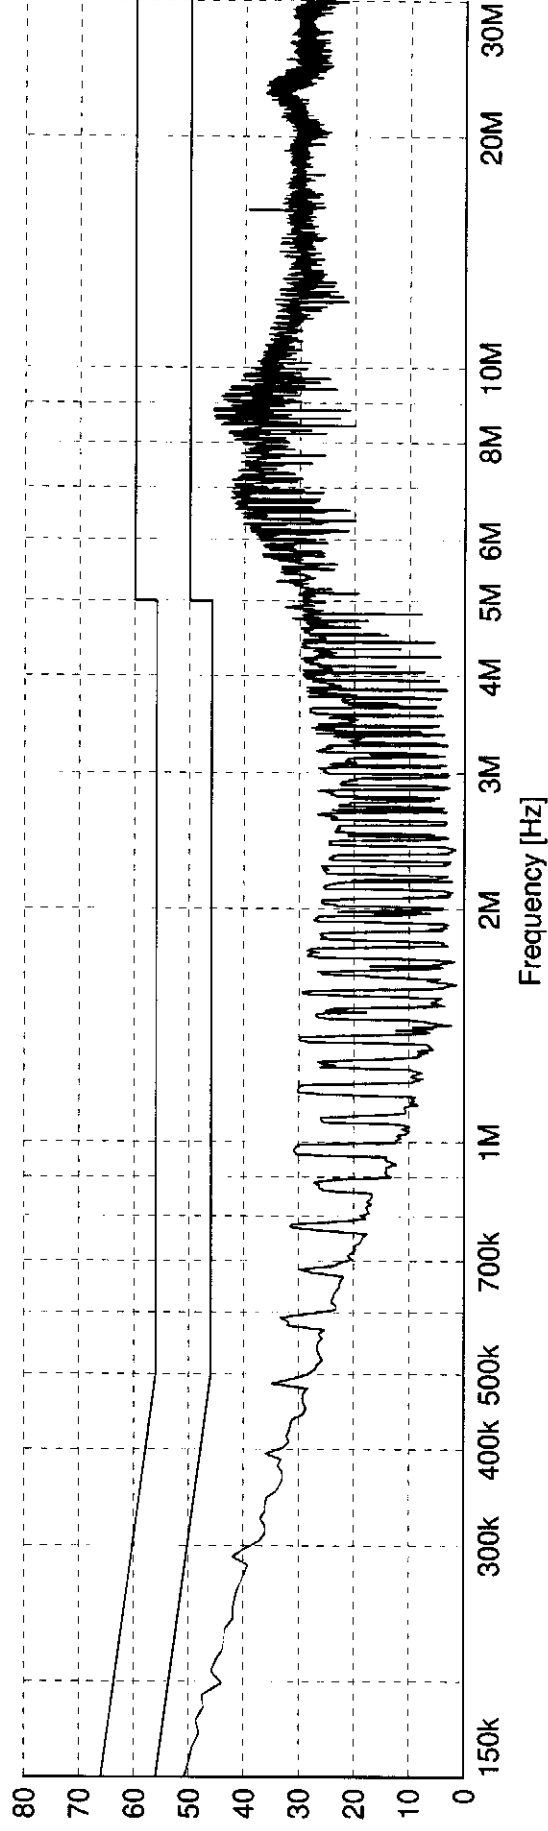

— MES CE 0.15-30 PK MaxPk
— LIM CE, EN 55022 B, QP
— LIM CE, EN 55022 B, AV

Conducted Emission
Conducted Emission



PHOTO A2.1

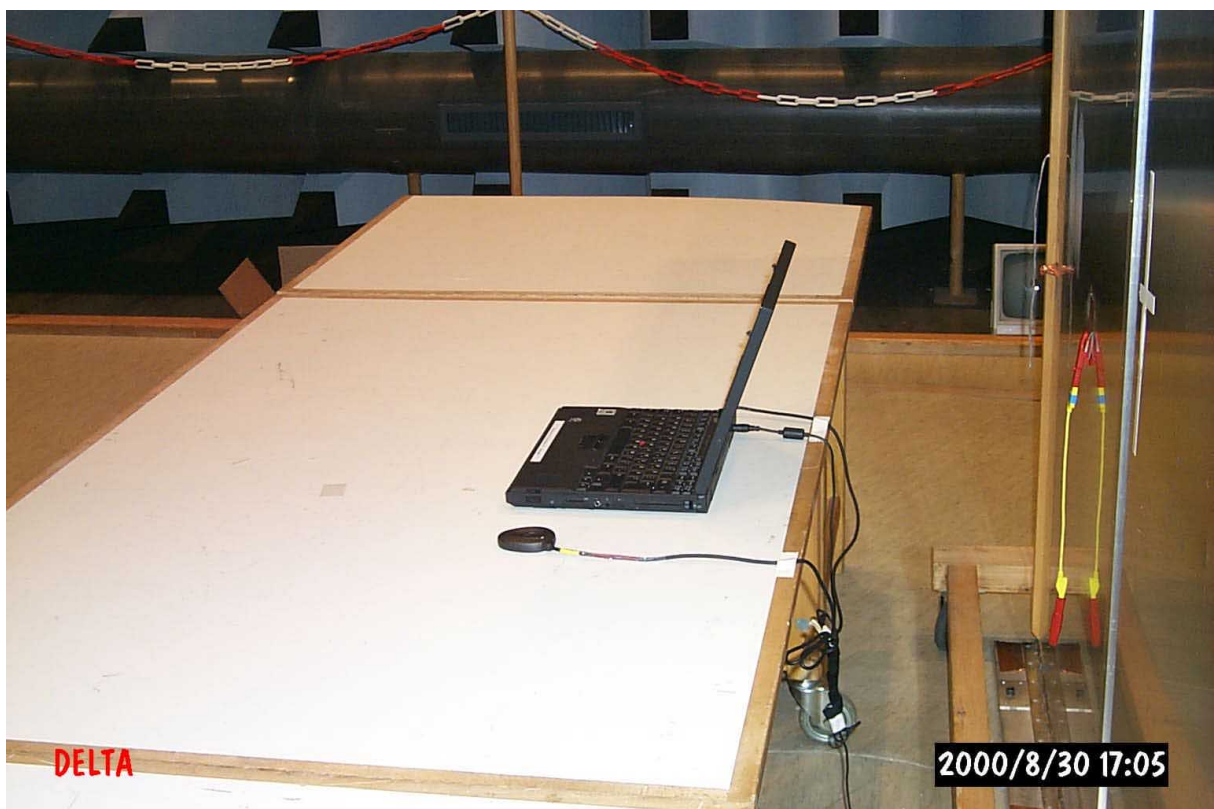


PHOTO A2.2


Annex 3

***Test record sheets and photos regarding
radiated electromagnetic field (EN 55022, class B)***

(3 pages)

DELTA Electronics Testing.

EUT: Aladdin 2 - USB Infineon sensor
 Manufacturer: Precise Biometrics
 Operating Condition: Ant 1 m vertical. 115 VAC.
 Test Site: EMC-5
 Operator: HNE - k221128
 Test Specification: EN 55022 class B. FCC class B.
 Comment: Sheet 10
 Start of Test: 2000-08-30

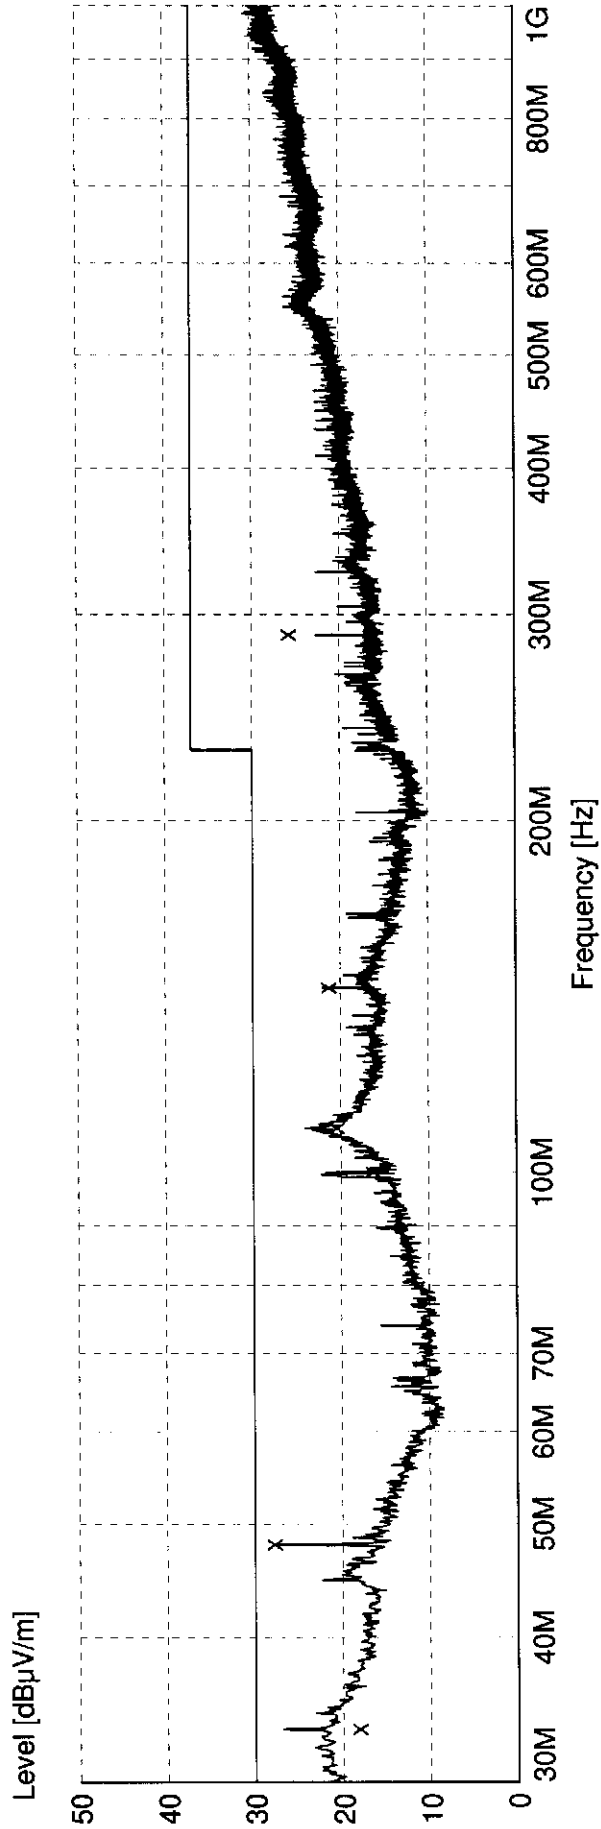

x x x MES Maximizing_fin QP
 — MES RE 1mv 30-1000 MaxPk
 — LIM RE, EN 55022 B, QP Radiated Emission

MEASUREMENT RESULT: "Maximering_fin QP"

8/30/00 15:36

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Height cm	Azimuth deg	Polarisation
33.300000	18.40	17.2	30.0	11.6	112.0	0.00	VERTICAL
48.000000	28.10	9.7	30.0	1.9	101.0	171.00	VERTICAL
100.000000	16.70	10.4	30.0	13.3	120.0	214.00	VERTICAL
109.100000	20.80	11.3	30.0	9.2	112.0	256.00	VERTICAL
144.000000	21.60	11.6	30.0	8.4	111.0	57.00	VERTICAL
288.000000	26.10	13.6	37.0	10.9	262.0	272.00	HORIZONTAL

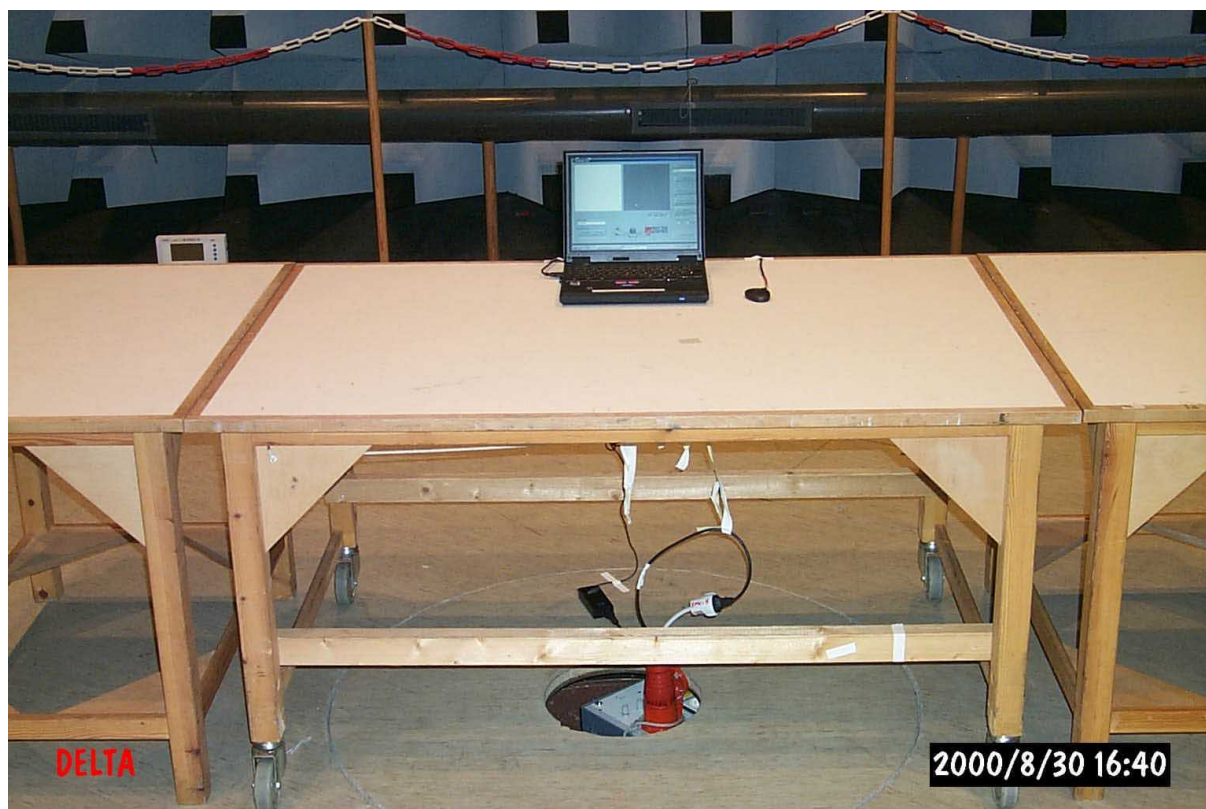


PHOTO A3.1



PHOTO A3.2


Annex 4

***Test record sheets and photos regarding
conducted emission, AC mains (FCC class B / EN 55022 class B)***

(3 pages)

DELTA Electronics Testing.

EUT: Aladdin 2 - USB Infineon sensor
Manufacturer: Precise Biometrics
Operating Condition: Line no.: Neutral. 115 VAC.
Test Site: EMC-5
Operator: HNE - k221128
Test Specification: EN 55022 class B. FCC class B.
Comment: Sheet 12
Start of Test: 2000-08-30

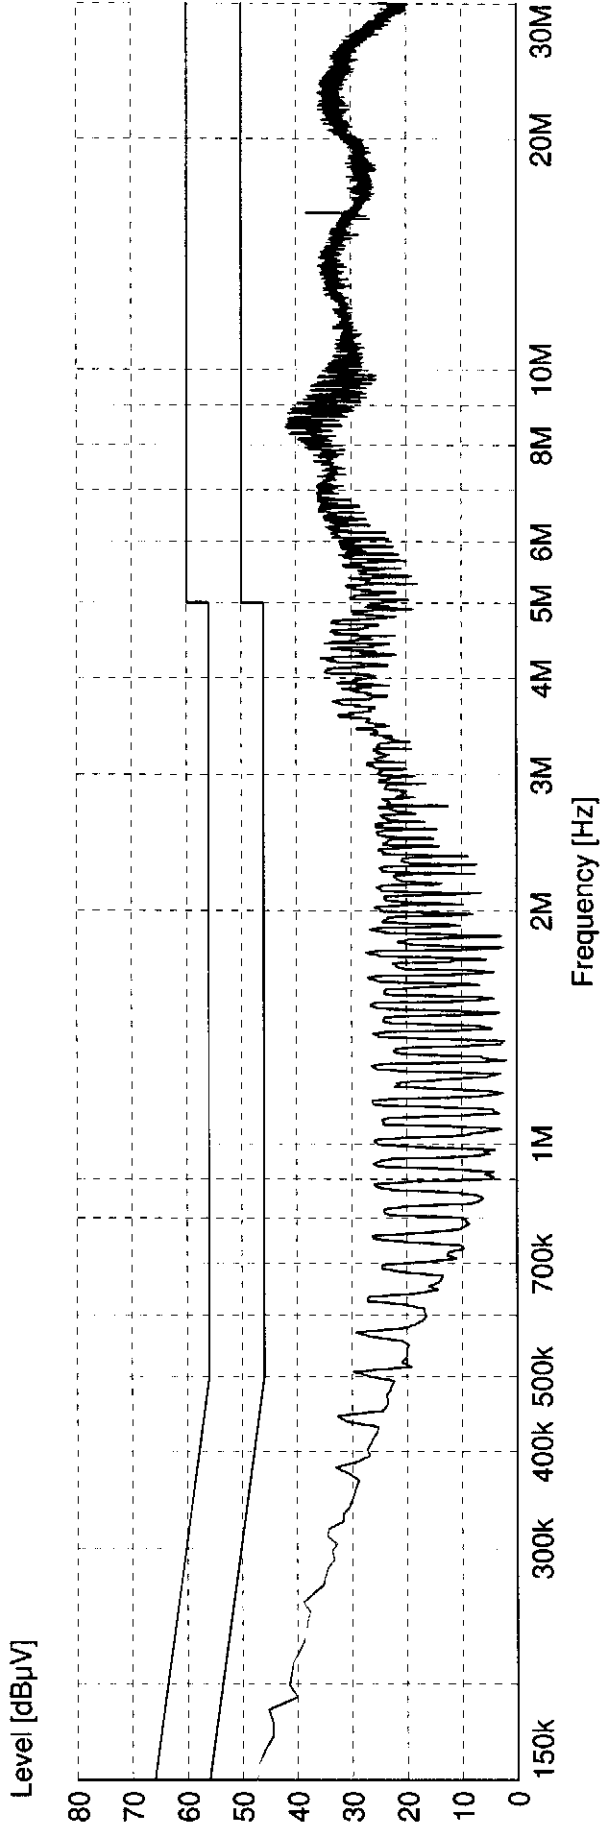


— MES CE 0.15-30 PK MaxPk
— LIM CE, EN 55022 B, QP
— LIM CE, EN 55022 B, AV

Conducted Emission
Conducted Emission

DELTA Electronics Testing.

EUT: Aladdin 2 - USB Infineon sensor
Manufacturer: Precise Biometrics
Operating Condition: Line no.: Line 1. 115 VAC.
Test Site: EMC-5
Operator: HNE - k221128
Test Specification: EN 55022 class B. FCC class B.
Comment: Sheet 13
Start of Test: 2000-08-30

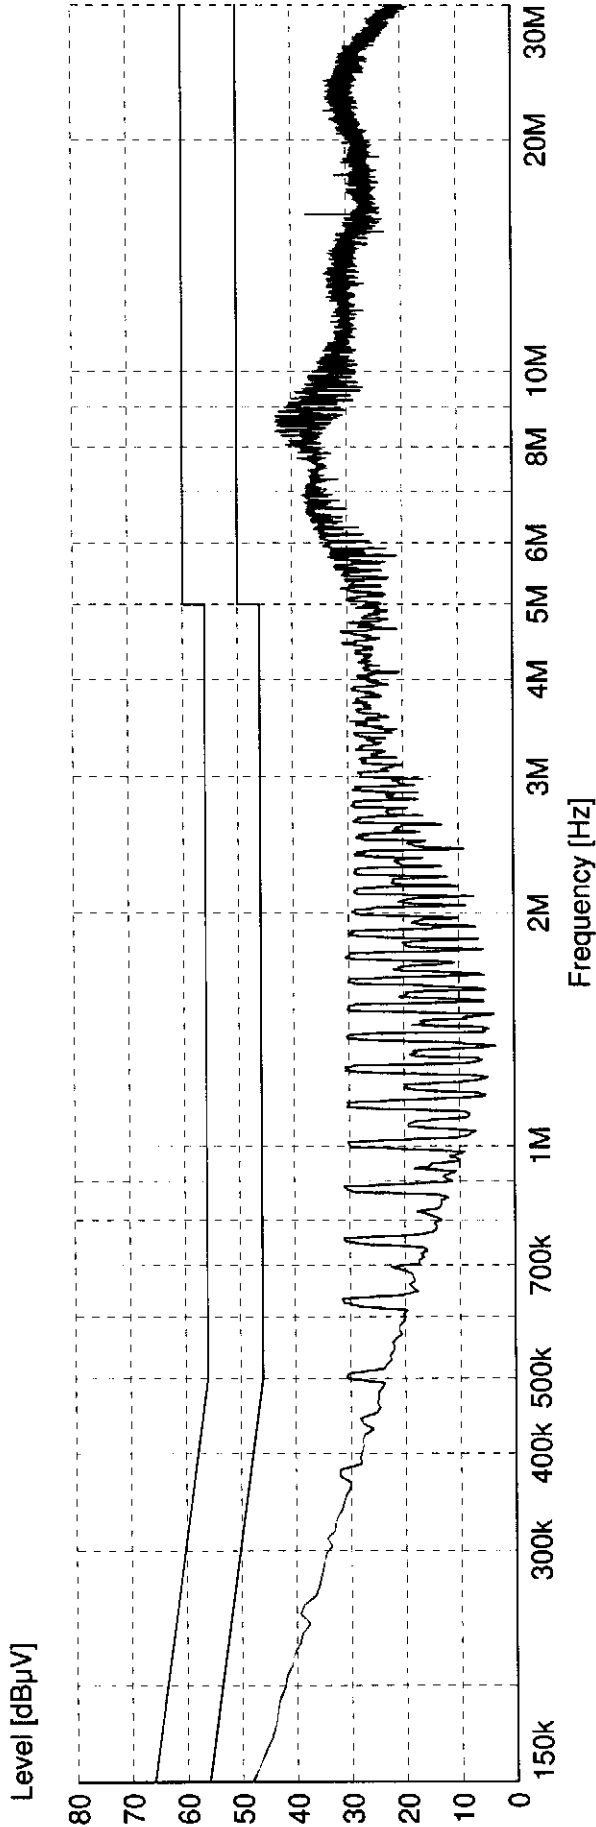

Line Style	Standard	Measurement Type	Limit Type
---	MES CE 0.15-30	PK MaxPk	
---	LIM CE, EN 55022	B, QP	Conducted Emission
---	LIM CE, EN 55022	B, AV	Conducted Emission



PHOTO A4.1

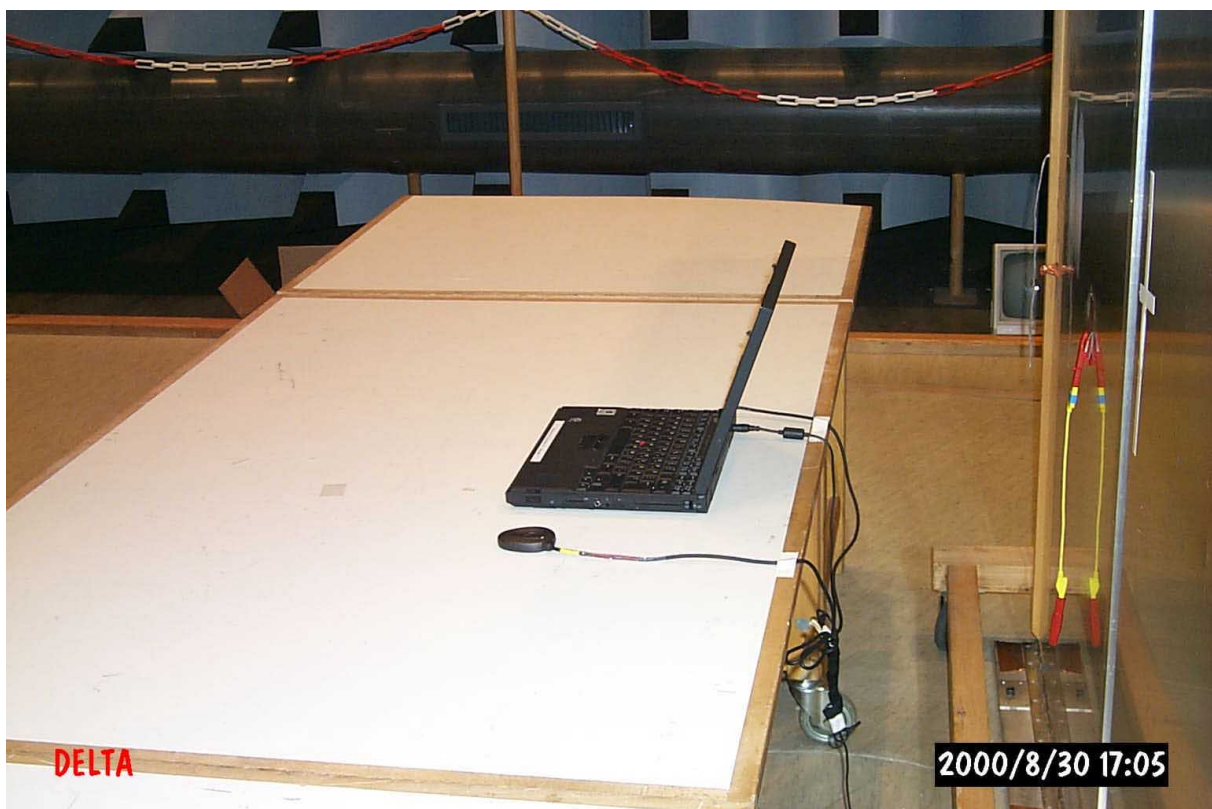


PHOTO A4.2


Annex 5

***Test record sheets and photos regarding
radiated electromagnetic field (FCC, class B / EN 55022, class B)***

(3 pages)

DELTA Electronics Testing.

EUT: Aladdin 2 - USB Infineon sensor
 Manufacturer: Precise Biometrics
 Operating Condition: Ant 1 m vertical. 115 VAC.
 Test Site: EMC-5
 Operator: HNE - k221128
 Test Specification: EN 55022 class B. FCC class B.
 Comment: Sheet 10
 Start of Test: 2000-08-30

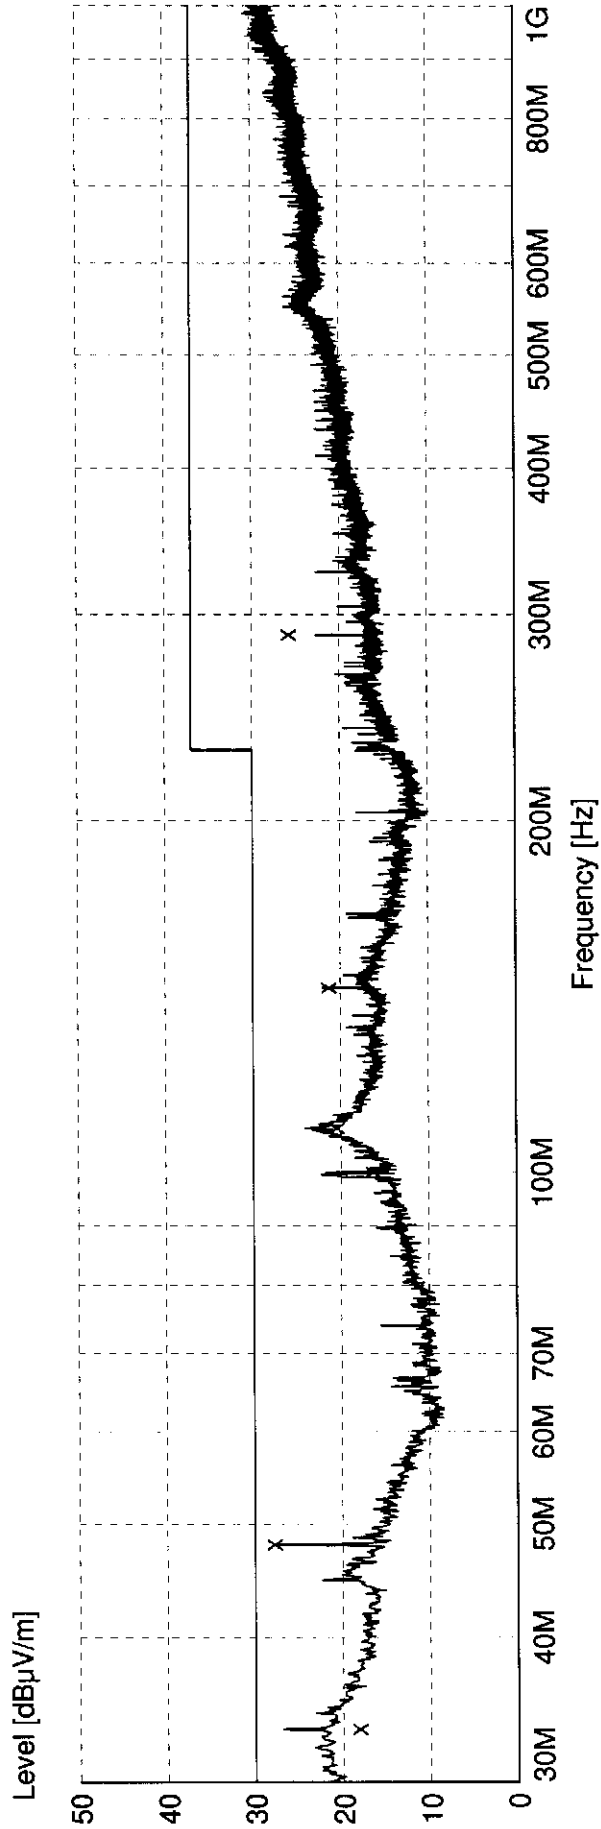

x x x MES Maximizing_fin QP
 — MES RE 1mv 30-1000 MaxPk
 — LIM RE, EN 55022 B, QP Radiated Emission

MEASUREMENT RESULT: "Maximering_fin QP"

8/30/00 15:36

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Height cm	Azimuth deg	Polarisation
33.300000	18.40	17.2	30.0	11.6	112.0	0.00	VERTICAL
48.000000	28.10	9.7	30.0	1.9	101.0	171.00	VERTICAL
100.000000	16.70	10.4	30.0	13.3	120.0	214.00	VERTICAL
109.100000	20.80	11.3	30.0	9.2	112.0	256.00	VERTICAL
144.000000	21.60	11.6	30.0	8.4	111.0	57.00	VERTICAL
288.000000	26.10	13.6	37.0	10.9	262.0	272.00	HORIZONTAL

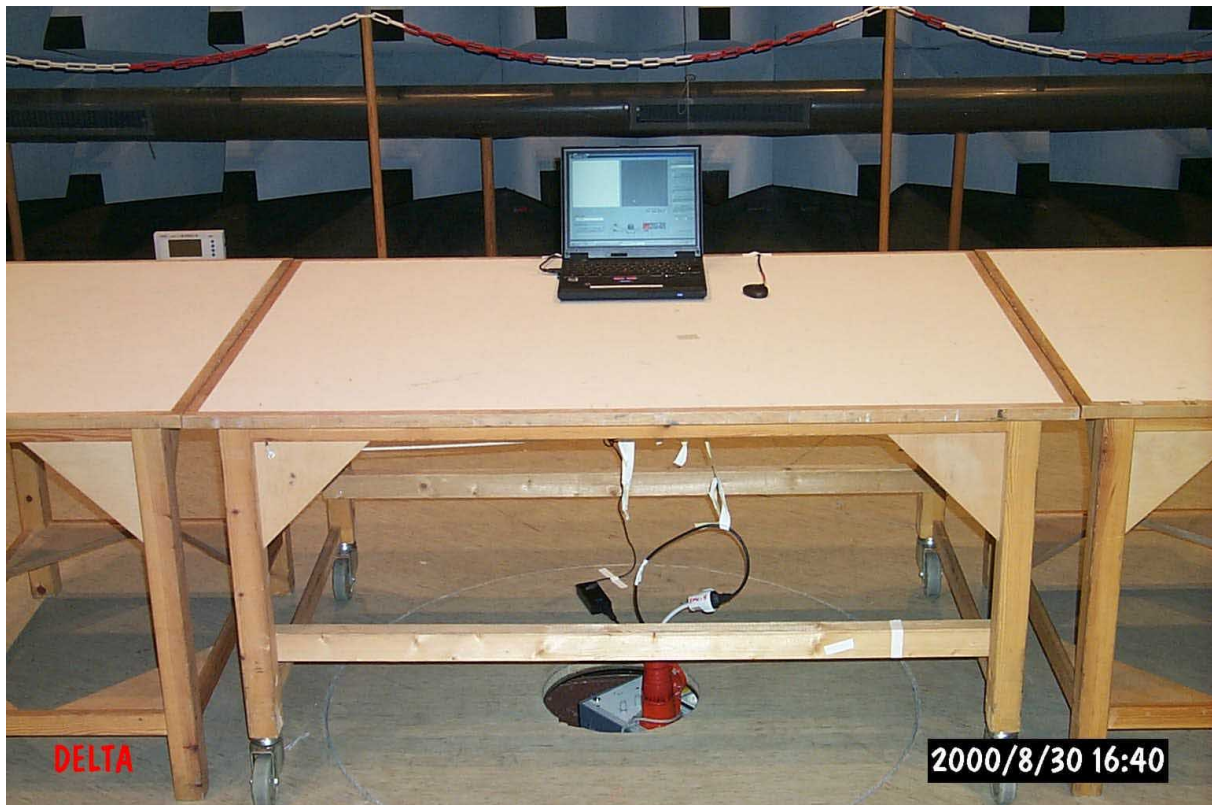


PHOTO A5.1



PHOTO A5.2

Annex 6

Photo of test object

(1 page)



PHOTO A6.1