



## ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CERTIFICATION

Test report file number : E024R-040

Applicant : ENTERTECH., LTD.

Address : 401-5, Hwagok-Dong, Kangseo-Gu, Seoul, 157-887, Korea

Manufacturer : ENTERTECH., LTD.

Address : 401-5, Hwagok-Dong, Kangseo-Gu, Seoul, 157-887, Korea

Type of Equipment : PERSONAL KARAOKE (Low Power Communication Device Transmitter)

FCC ID. : PBNHARMONY

Model / Type No. : ANY SING

Multiple Model/ Type No. : N/A

Serial number : N/A

Total page of Report : 20 pages (including this page)

Date of Incoming : December 07, 2001

Date of issuing : April 16, 2002

### SUMMARY

The equipment complies with the regulation; **FCC PART 15.239 SUBPART C.**

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: G. W. Lee  
G. W. Lee/ Assistant Chief Engineer

Reviewed by: Y. K. Kwon  
Y. K. Kwon/ Chief Engineer

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daeang-Ri, Chong-Myun-Kwangju-City, Kyunggi-Do, 464-860 Korea (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



# ONETECH

Testing & Evaluation Lab.

Page 2 of 20

FCC ID. : **Error! Unknown**

File No. : **Error! Unknown**

document property name.

EMC & Telecom Div.  
ONETECH Corp.

EMC & Telecom Div.  
ONETECH Corp.

## CONTENTS

|                                                                     | Page      |
|---------------------------------------------------------------------|-----------|
| <b>1. VERIFICATION OF COMPLIANCE.....</b>                           | <b>5</b>  |
| <b>2. GENERAL INFORMATION.....</b>                                  | <b>6</b>  |
| 2.1 PRODUCT DESCRIPTION .....                                       | 6         |
| 2.2 RELATED SUBMITTAL(S) / GRANT(S) .....                           | 6         |
| 2.3 TEST SYSTEM DETAILS.....                                        | 6         |
| 2.4 TEST METHODOLOGY .....                                          | 6         |
| 2.5 TEST FACILITY .....                                             | 7         |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>                            | <b>7</b>  |
| 3.1 JUSTIFICATION.....                                              | 7         |
| 3.2 EUT EXERCISE SOFTWARE .....                                     | 7         |
| 3.3 CABLE DESCRIPTION.....                                          | 7         |
| 3.4 NOISE SUPPRESSION PARTS ON CABLE.....                           | 7         |
| 3.5 EQUIPMENT MODIFICATIONS.....                                    | 8         |
| 3.6 CONFIGURATION OF TEST SYSTEM .....                              | 8         |
| 3.7 ANTENNA REQUIREMENT.....                                        | 8         |
| <b>4. PRELIMINARY TEST.....</b>                                     | <b>9</b>  |
| 4.1 AC POWER LINE CONDUCTED EMISSION TEST .....                     | 9         |
| 4.2 RADIATED EMISSION TEST .....                                    | 9         |
| <b>5. FINAL RESULT OF MEASUREMENT.....</b>                          | <b>10</b> |
| 5.1 CONDUCTED EMISSION TEST .....                                   | 10        |
| 5.2 RADIATED EMISSION TEST .....                                    | 12        |
| 5.2.1 WITHIN THE PERMITTED 200kHz BAND .....                        | 12        |
| 5.3 RADIATED EMISSION TEST .....                                    | 13        |
| 5.3.1 OUTSIDE OF THE SPECIFIED 200kHz BAND AT LOW CHANNEL.....      | 13        |
| 5.3.2 OUTSIDE OF THE SPECIFIED 200kHz BAND AT HIGH CHANNEL .....    | 14        |
| 5.3.3 OUTSIDE OF THE SPECIFIED 200kHz BAND FOR OTHER FREQUENCY..... | 15        |
| 5.4 BANDWIDTH OF THE OPERATING FREQUENCY.....                       | 17        |
| <b>6. FIELD STRENGTH CALCULATION .....</b>                          | <b>26</b> |
| <b>7. LIST OF TEST EQUIPMENT .....</b>                              | <b>27</b> |

document property name.

---

document property name.

## 1. VERIFICATION OF COMPLIANCE

-. APPLICANT : ENTERTECH., LTD.  
 -. ADDRESS : 401-5, Hwagok-Dong, Kangseo-Gu, Seoul, 157-887, Korea  
 -. CONTACT PERSON : Mr. Seung-Youn, Shin / Japan Branch Director, Export Div.  
 -. TELEPHONE NO : +82-2-2605-0884  
 -. FCC ID : PBNHARMONY  
 -. MODEL NO/NAME : ANY SING  
 -. SERIAL NUMBER : N/A  
 -. DATE : April 16, 2002

|                                                      |                                                                 |
|------------------------------------------------------|-----------------------------------------------------------------|
| DEVICE TYPE                                          | Low Power Communication Device Transmitter-Intentional Radiator |
| E.U.T. DESCRIPTION                                   | PERSONAL KARAOKE                                                |
| THIS REPORT CONCERNS                                 | ORIGINAL GRANT                                                  |
| MEASUREMENT PROCEDURES                               | Charter 13 of ANSI C63.4/1992                                   |
| TYPE OF EQUIPMENT TESTED                             | PRE-PRODUCTION                                                  |
| KIND OF EQUIPMENT AUTHORIZATION REQUESTED            | CERTIFICATION                                                   |
| EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)   | FCC PART 15.239 SUPART C                                        |
| MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE | No                                                              |
| FINAL TEST WAS CONDUCTED ON                          | 3 METER OPEN AREA TEST SITE                                     |

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

document property name.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The ENTERTECH., LTD., Model ANY SING (referred to as the EUT in this report) is a PERSONAL KARAOKE that can transmit 106.3MHz, 106.7MHz, 107.1MHz and 107.5MHz for audio signal of FM radio receiver. Product specification described herein was obtained from product data sheet or user's manual.

|                                              |                                           |
|----------------------------------------------|-------------------------------------------|
| CHASSIS TYPE                                 | Plastic                                   |
| LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz) | 24.000 MHz, 21.47727 MHz, 9.600 MHz       |
| POWER REQUIREMENT                            | DC 8V from AC/DC adapter or battery       |
| TRANSMITTING FREQUENCY                       | 106.3MHz, 106.7MHz, 107.1MHz and 107.5MHz |
| EXTERNAL TERMINALS                           | 6 hole DIN type, Headphone                |

#### Model Differences:

The difference(s) compared to the EUT is as follows: none

### 2.2 Related Submittal(s) / Grant(s)

Original submittal only

### 2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

| Model      | Manufacturer               | FCC ID     | Description           | Connected to |
|------------|----------------------------|------------|-----------------------|--------------|
| ANY SING   | ENTERTECH., LTD.           | PBNHARMONY | PERSONAL KARAOKE(EUT) | -            |
| DR-09500U  | DREAM ELECTRONIC CO., LTD. | N/A        | AC/DC ADAPTER         | EUT          |
| SH-627     | SAMICK                     | N/A        | HEADPHONE             | EUT          |
| CTV-1010XK | KEC                        | N/A        | TV                    | EUT          |

### 2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in chapter 13 of ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

document property name.

## 2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)

## 3. SYSTEM TEST CONFIGURATION

### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

| DEVICE TYPE      | MANUFACTURER     | MODEL/PART NUMBER | FCC ID |
|------------------|------------------|-------------------|--------|
| MAIN BOARD       | ENTERTECH., LTD. | ENTER ET-2000     | N/A    |
| KEY MATRIX BOARD | ENTERTECH., LTD. | N/A               | N/A    |
| FM TX BOARD      | ENTERTECH., LTD. | MAGIC-FM          | N/A    |

### 3.2 EUT exercise Software

The EUT continuously transmitted set RF signal for the purpose of the measurements.

### 3.3 Cable Description

| Product Name          | Power Cord Shielded (Y/N) | I/O cable Shielded (Y/N) | Length (M)     |
|-----------------------|---------------------------|--------------------------|----------------|
| PERSONAL KARAOKE(EUT) | N                         | N                        | 1.2(P), 5.0(D) |
| TV                    | N                         | N                        | 1.2(P), 5.0(D) |
| HEADPHONE             | N/A                       | N                        | 2.5(D)         |

\* The marked “(D)” means the Data Cable and “(P)” means the Power Cable.

### 3.4 Noise Suppression Parts on Cable

| Product Name          | Ferrite Bead (Y/N) | Location | Metal Hood (Y/N) | Location         |
|-----------------------|--------------------|----------|------------------|------------------|
| PERSONAL KARAOKE(EUT) | N                  | N/A      | Y                | BOTH END EUT END |
| TV                    | N                  | N/A      | Y                | BOTH END         |
| HEADPHONE             | N                  | N/A      | Y                | EUT END          |

document property name.

---

### 3.5 Equipment Modifications

To achieve compliance to FCC part 15 rules, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

### 3.6 Configuration of Test System

**Line Conducted Test:** EUT was connected to the AC/DC adapter and this adapter was connected to LISN, all supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.  
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

**Occupied Bandwidth Measurement:**

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 50kHz/division frequency span, 10kHz resolution bandwidth and 5dB/division logarithmic display from an 8568B spectrum analyzer.

### 3.7 Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The FM transmitter antenna of the EUT is built-in the EUT, no consideration of replacement by the user.

document property name.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

| Operation Mode | The Worse operating condition (Please check one only) |
|----------------|-------------------------------------------------------|
| Standby Mode   |                                                       |
| TX mode        | X                                                     |

### 4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

| Operation Mode | The Worse operating condition (Please check one only) |
|----------------|-------------------------------------------------------|
| Standby Mode   |                                                       |
| TX mode        | X                                                     |

document property name.

## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

### 5.1 Conducted Emission Test

Humidity Level : 48 % Temperature : 19 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C  
 Type of Test : Low Power Communication Device Transmitter  
 Result : PASSED BY – 8.20 dB at 0.49 MHz

EUT : PERSONAL KARAOKE Date: April 15, 2002  
 Operating Condition : FM TX MODE  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


| Power Line Conducted Emission |                     |           | FCC CLASS B     |                |
|-------------------------------|---------------------|-----------|-----------------|----------------|
| Frequency<br>(MHz)            | Amplitude<br>(dBuV) | Conductor | Limit<br>(dBuV) | Margin<br>(dB) |
| 0.49                          | 39.80               | HOT       | 48.00           | -8.20          |
| 0.52                          | 38.16               | HOT       | 48.00           | -9.84          |
| 0.87                          | 35.07               | HOT       | 48.00           | -12.93         |
| 18.39                         | 38.65               | HOT       | 48.00           | -9.35          |
| 20.96                         | 36.43               | HOT       | 48.00           | -11.57         |
| 24.59                         | 37.96               | HOT       | 48.00           | -10.04         |

Line Conducted Emission Tabulated Data


  
 Tested by: Young-Min Choi / Project Engineer



document property name.

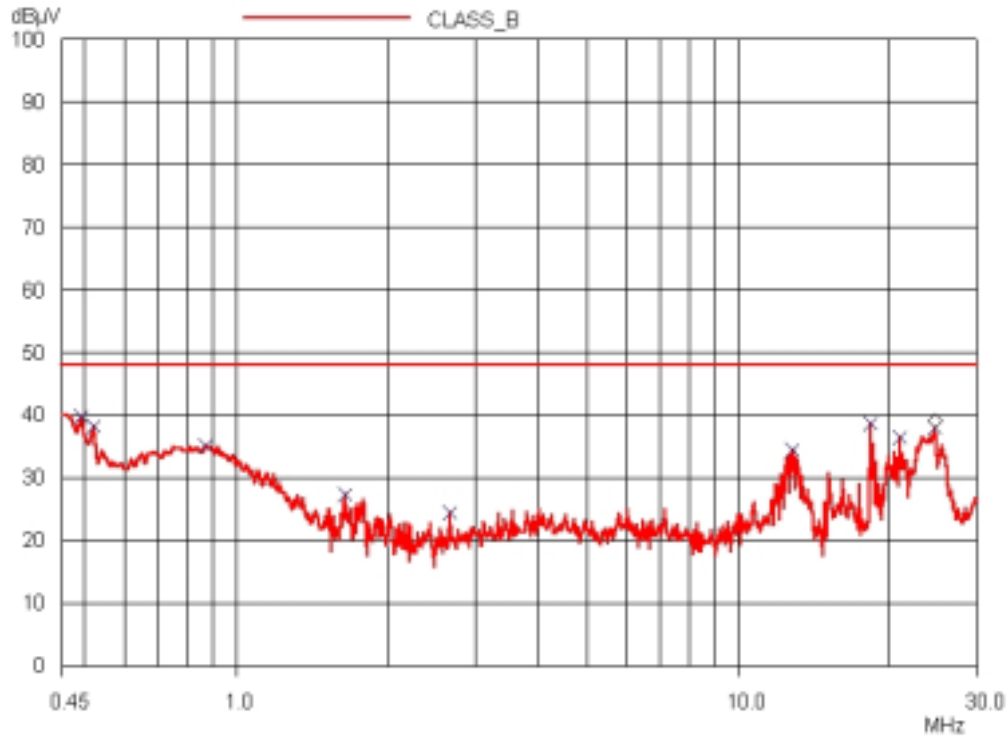

## HOT LINE

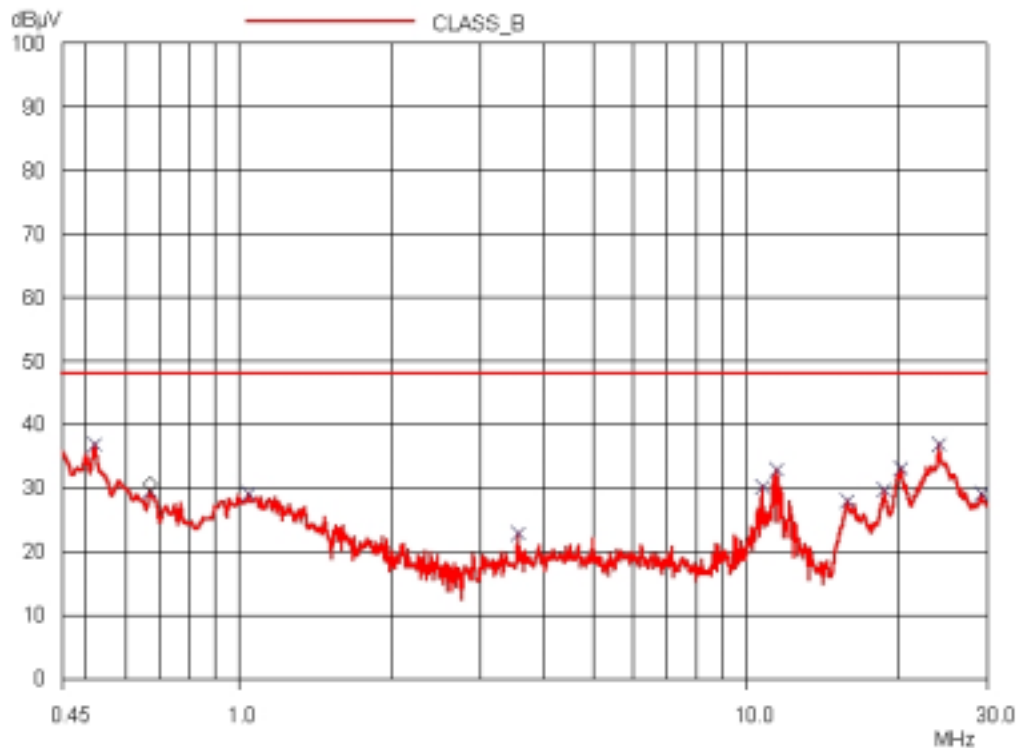

## NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

**EMC Testing Dept** : 426-1 Daeangryong-Ri, Chongmyun-Kwangju-City, Kyunggi-Do, 464-860 Korea (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

document property name.

## 5.2 Radiated Emission Test

### 5.2.1 Within the permitted 200kHz band

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 51 % Temperature : 16 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239  
 Type of Test : Low Power Communication Device Transmitter

EUT : PERSONAL KARAOKE Date: April 13, 2002  
 Operating Condition : FM TX MODE  
 Distance : 3 Meter

| Radiated Emission |                |                | Ant  | Correction Factors |               | Total            | Limit    | Margin |
|-------------------|----------------|----------------|------|--------------------|---------------|------------------|----------|--------|
| Freq.<br>(MHz)    | Amp.<br>(dBuV) | Detect<br>Mode | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) | (dBuV/m) | (dB)   |
| 106.3             | 37.90          | Peak           | H    | 13.15              | 1.18          | 52.13            | 68.00    | -15.87 |
|                   | 32.40          | Average        | H    | 13.15              | 1.18          | 46.73            | 48.00    | -1.27  |
| 107.5             | 37.70          | Peak           | H    | 13.42              | 1.19          | 52.31            | 68.00    | -15.69 |
|                   | 32.30          | Average        | H    | 13.42              | 1.19          | 46.91            | 48.00    | -1.09  |

Radiated Emission Tabulated Data

  
 Tested by: Young-Min Choi / Project Engineer

document property name.

### 5.3 Radiated Emission Test

#### 5.3.1 Outside of the specified 200kHz band at Low Channel

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 48 % Temperature : 16 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209  
 Type of Test : Low Power Communication Device Transmitter  
 Result : PASSED BY -7.85 dB at 956.70 MHz

EUT : PERSONAL KARAOKE Date: April 13, 2002  
 Operating Condition : FM TX MODE  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz) up to 1000 MHz  
                     Average Reading apply above 1000 MHz (1 MHz Bandwidth)  
 Distance : 3 Meter

| TX<br>Freq.<br>(MHz) | Radiated Emission |                | Ant  | Correction Factors |               | Total            | FCC               |                |
|----------------------|-------------------|----------------|------|--------------------|---------------|------------------|-------------------|----------------|
|                      | Freq.<br>(MHz)    | Amp.<br>(dBuV) | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
| 106.30               | 212.60            | 8.40           | H    | 10.99              | 1.64          | 21.03            | 43.50             | -22.47         |
|                      | 318.90            | 7.30           | H    | 14.32              | 2.11          | 23.73            | 46.00             | -22.27         |
|                      | 425.20            | 8.50           | H    | 15.93              | 2.48          | 26.91            | 46.00             | -19.09         |
|                      | 531.50            | -              | -    | -                  | -             | -                | -                 | -              |
|                      | 637.80            | 13.50          | V    | 19.56              | 3.04          | 36.10            | 46.00             | -9.90          |
|                      | 744.10            | 12.70          | H    | 20.87              | 3.50          | 37.07            | 46.00             | -8.93          |
|                      | 850.40            | 11.30          | H    | 22.41              | 3.85          | 37.56            | 46.00             | -8.44          |
|                      | 956.70            | 10.90          | H    | 23.14              | 4.11          | 38.15            | 46.00             | -7.85          |
|                      | 1063.00           | 10.10          | H    | 23.75              | 4.25          | 38.10            | 54.00             | -15.90         |



**EMC Testing Dept** : 426-1 Daesangyung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea (TEL:+82-31-765-8289, FAX:+82-31-766-2904)

document property name.

---

**Tested by: Young-Min Choi / Project Engineer**

document property name.

---

#### 5.4 Bandwidth of the operating frequency

Humidity Level : 49 % Temperature : 19 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239  
Result : PASSED

---

EUT : PERSONAL KARAOKE Date: April 15, 2002  
Operating Condition : FM TX MODE  
Minimum Resolution  
Bandwidth : 10 kHz

Remark: Please see following pages of plotted data marked the bandwidth of 200kHz points.

  
Tested by: Young-Min Choi / Project Engineer

document property name.

---