

Nemko Test Report: 2L0315RUS1

Applicant: Wavetronix
5314 North 250 West Suite # 110
Provo, Utah 84604

Equipment Under Test: SmartSensor 105
(E.U.T.)

In Accordance With: **FCC Part 15, Subpart C**
For Operation Within The Bands 902-928 MHz,
2435-2465 MHz, 5785-5815 MHz, 10500-10550 MHz,
24075-24175 MHz Intentional Radiators Used As
Field Disturbance Sensors Excluding Perimeter
Protection Systems

Tested By: Nemko Dallas Inc.
802 N. Kealy Ave
Lewisville, TX 75057

Authorized By:



ager

Date: 7/22/02

Total Number of Pages: 19

Table of Contents

Table of Contents	2
Section 1. Summary of Test Results	3
Section 2. Equipment Under Test (E.U.T.)	5
Section 3. Equipment Configuration	7
Section 4. Radiated Emissions	8
Section 5. Block Diagrams	12
Section 6. Test Equipment List	14
RESTRICTED BANDS	15
Section A Restricted Bands of Operation	16
RADIATED EMISSION LIMITS	17
Radiated Emission Limits	18

EQUIPMENT: SmartSensor 105**Section 1. Summary of Test Results**

Manufacturer: Wavetronics

Model No.: 105

Sample No.: S01

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.245. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

☐

New Submission

☒

Production Unit

☒

Class II Permissive Change

☐

Pre-Production Unit

F	D	S
---	---	---

Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".

**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

*EQUIPMENT: SmartSensor 105***Summary Of Test Data**

Name of Test	Paragraph Number	Results
Radiated Emissions	15.231(b)	Complies
Powerline Conducted Emissions	15.207	N/A

Footnotes:

The device is DC powered. The power is supplied by an external DC source, typically a battery.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Range: 10.525 GHz +/- 0.5 MHz

Supply Power Requirement: 9-36 Vdc

EQUIPMENT: SmartSensor 105

Description of E.U.T.

The SmartSensor 105 is designed as a Field Disturbance Sensor to operate in the 10.50 GHz to 10.55 GHz band. The end user has no control over the RF set up of the device, but may adjust mounting height and angle to achieve optimum performance.

Description of Changes for Class II Permissive Change

A change was made to the RF Mixer, and Frequency control circuitry. The waveform generator was also modified slightly.

Refer to separate exhibit for further details.

Modifications Incorporated in E.U.T.

Not Applicable

EQUIPMENT: SmartSensor 105

Section 3. Equipment Configuration

Equipment Configuration List:

Item	Description	Model No.	Serial.	Rev.
(A)	SmartSensor	105		
(B)				
(C)				
(D)				
(E)				
(F)				
(G)				

Inter-connection Cables:

Item	Description	Length (m)
(1)	Power cable	Approx 2m
(2)		
(3)		
(4)		
(5)		
(6)		
(7)		
(8)		

EQUIPMENT: SmartSensor 105

Section 4. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.245
TESTED BY: David Light	DATE: 7/10/2002

Minimum Standard: See Annex B

Test Results: Complies

EQUIPMENT: SmartSensor 105



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Page 1 of 1		Radiated Emissions	
Job No.:	2L0315R	Date:	7/10/02
Specification:	CFR 47, Part 15	Temperature(°C):	24
Tested By:	David Light	Relative Humidity(%):	50
E.U.T.:	10 GHz FDS		
Configuration:	Typical		
Sample Number:	1		
Location:	AC 3	RBW:	1 MHz
Detector Type:	Peak	VBW:	1 MHz
Measurement distance: See Below			
Test Equipment Used			
Antenna:	1304	Directional Coupler:	#N/A
Pre-Amp:	#N/A	Cable #1:	1484
Filter:	#N/A	Cable #2:	1485
Receiver:	1464	Cable #3:	1046
Attenuator #1:	#N/A	Cable #4:	1083
Attenuator #2:	#N/A	Mixer:	986
Additional equipment used: 0984, 0985, 0990, 0991, 0989, 0986, 0987, 0988, 0983, 1629, 1628			
Measurement Uncertainty: +/- 1.7 dB			

Frequency (GHz)	Peak Meter Reading (dBuV)	Average Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Peak Corrected Reading (dBuV/m)	Average Corrected Reading (dBuV/m)	Comment
								3 Meters Limit 148 dBuV/M PEAK 128 dBuV/M AVG
10.525 H	67.2	17.7	38.3	6.8	0.0	112.3	62.8	
10.525 V	42.2	29.1	38.3	6.8	0.0	87.3	74.2	
								20 cm Limit 121 dBuV/M PEAK 101 dBuV/M AVG
21.050 H	51.3	41.7	40.3	8.3	50.2	49.7	33.0	Noise floor
21.050 V	51.3	41.7	40.3	8.3	50.2	49.7	33.0	Noise floor
31.575 H	58.9	49.1	43.5	12	35.3	79.1	62.2	Noise floor
31.575 V	58.9	49.1	43.5	12	35.3	79.1	62.2	Noise floor
42.100 H	37.8	28.1	39.7	0	0.0	77.5	60.7	Noise floor
42.100 V	37.8	28.1	39.7	0	0.0	77.5	60.7	Noise floor
52.625 H	39	28	41.8	0	0.0	80.8	62.7	Noise floor
52.625 V	39	28	41.8	0	0.0	80.8	62.7	Noise floor
94.725 H	53.3	43.8	46.3	0	0.0	99.6	83.0	Noise floor
94.725 V	53.3	43.8	46.3	0	0.0	99.6	83.0	Noise floor

Notes: Average readings were taken using 10 Hz VBW
Spectrum was searched to the 10th harmonic of carrier. No emissions were detected above the noise floor which was at least 20 dB below the specification limit

Unit was tested at from 7.7-41 Vdc with no effect on carrier power.

EQUIPMENT: SmartSensor 105




Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		20 dB BW			
Page 1 of 1				Complete <u>X</u>	
Job No.:	2L0315R	Date:	7/10/2002	Preliminary: _____	
Specification:	FCC Part 15.247	Temperature(°C):	24		
Tested By:	David Light	Relative Humidity(%)	50		
E.U.T.:	10 GHz FDS				
Configuration:	Normal Transmit				
Sample Number:	S01				
Location:	AC 3	RBW:	100 kHz	Measurement	
Detector Type:	Peak	VBW:	100 kHz	Distance:	3 m
Test Equipment Used					
Antenna:	1304	Directional Coupler:			
Pre-Amp:		Cable #1:	1484		
Filter:		Cable #2:	1485		
Receiver:	1464	Cable #3:			
Attenuator #1		Cable #4:			
Attenuator #2:		Mixer:			
Additional equipment used:					
Measurement Uncertainty:		+/-1.7 dB			

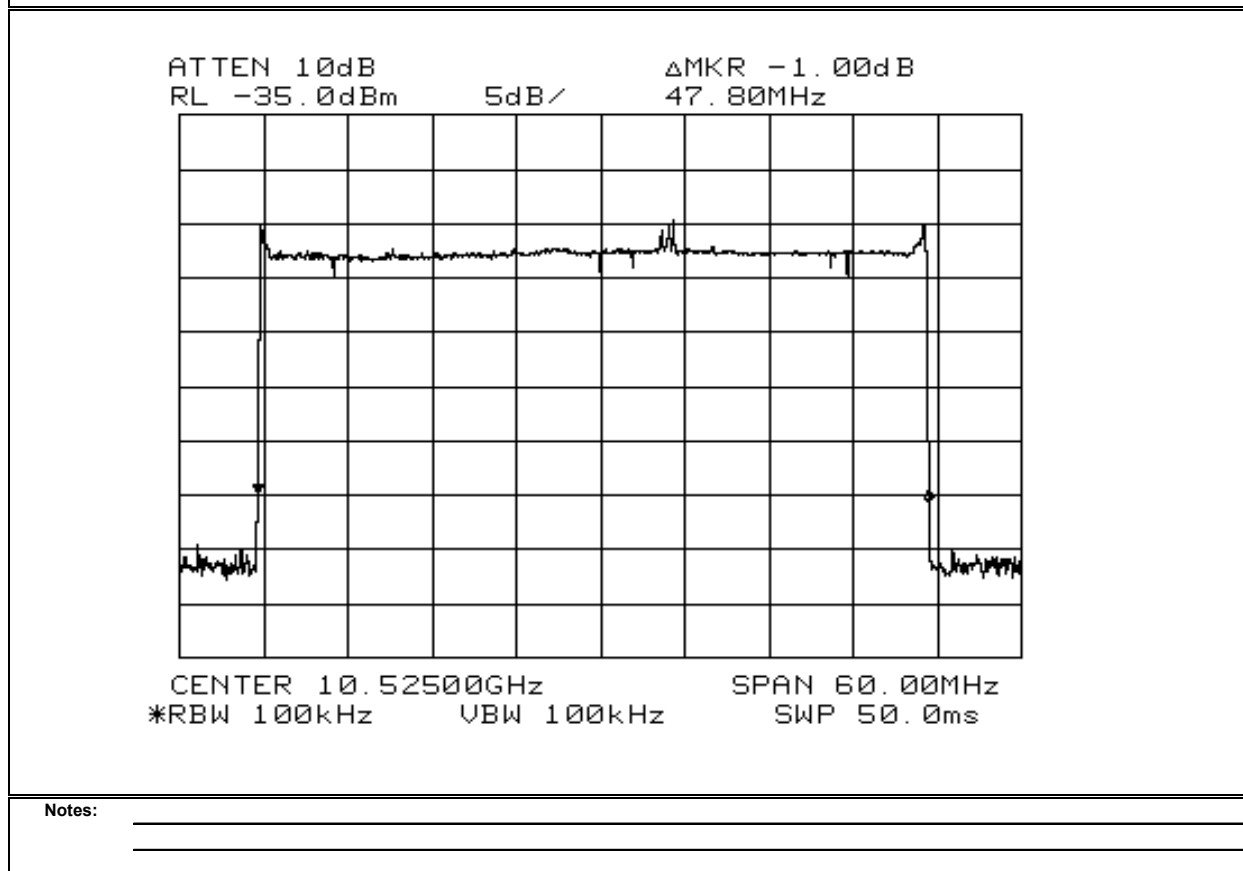

EQUIPMENT: SmartSensor 105

Radiated Photographs (Worst Case Configuration)

FRONT VIEW




REAR VIEW




Section 5. Block Diagrams

Radiated Fundamental measurement

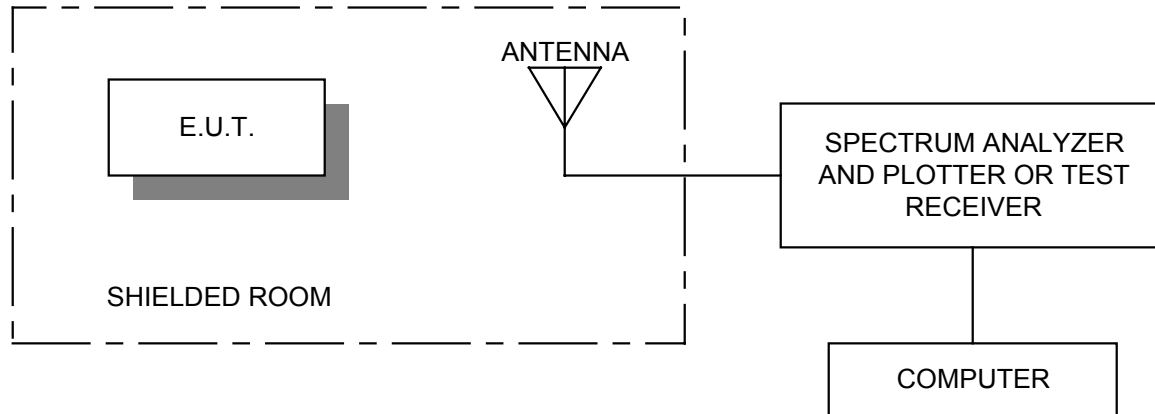

Measurement Setup for Harmonic Emissions

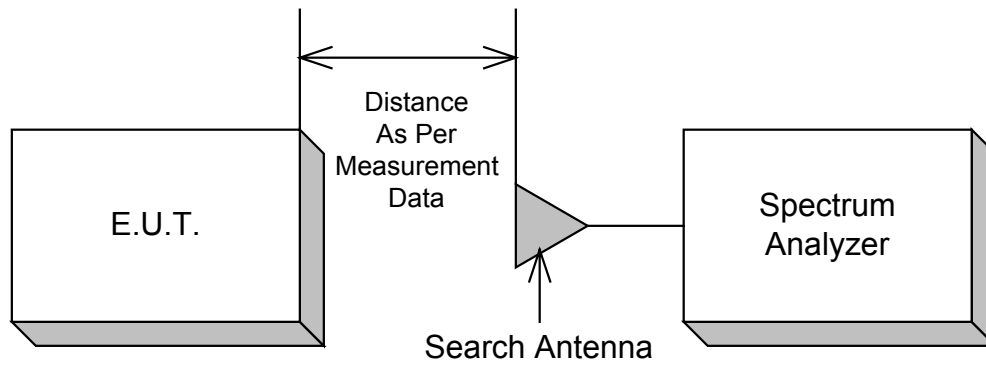

EQUIPMENT: SmartSensor 105**Section 6. Test Equipment List**

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	07/15/02	07/15/03
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	07/30/01	07/31/03
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/02/01	01/03/03
984	HORN ANTENNA	MILLITECH NONE	NONE	CNR	N/A
983	PRE-AMP, 18-40 GHz	KTL BB1	1	01/18/02	01/18/03
990	HORN ANTENNA	MILLITECH NONE	NONE	CNR	CNR
991	Horn antenna	EMCO 3160-10	9704-1049	CNR	CNR
989	HARMONIC MIXER	Hewlett Packard 11970U	2332A00116	01/00/00	01/00/03
986	HARMONIC MIXER	Hewlett Packard 11970V	2521A01222	01/00/00	01/00/03
987	HARMONIC MIXER	Hewlett Packard 5356D	2521A00583	01/00/00	01/00/03
988	HARMONIC MIXER	Hewlett Packard 11970A	2332A01929	01/00/00	01/00/03
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	07/15/02	07/15/03
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	07/15/02	07/15/03
1046	Flex cable 1m	Astrolab Inc. 32022-2-29094K-1M	N/A	01/18/02	01/18/03
986	HARMONIC MIXER	Hewlett Packard 11970V	2521A01222	01/00/00	01/00/03
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU	N/A
1628	CABLE, 6 ft	MEGAPHASE TM26 S1S5 72	N/A	CBU	N/A

Nemko Dallas

FCC PART 15, SUBPART C
INTENTIONAL RADIATORS USED AS
FIELD DISTURBANCE SENSORS
PROJECT NO.: 2L0315RUS1

EQUIPMENT: SmartSensor 105

RESTRICTED BANDS

Section A Restricted Bands of Operation

(a) Except as shown in paragraph (d) of this section , only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.49 - 0.51	16.69475-16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425-16.80475	960-1240	7.25-7.75
3.020 - 3.026	25.5-25.67	1300-1427	8.025-8.5
4.125 - 4.128	37.5-38.25	1435-1626.6	9.0-9.2
4.17725 - 4.17775	73-74.6	1645.5-1646.5	9.3-9.5
4.20725 - 4.20775	74.8-75.2	1660-1710	10.6-12.7
6.215 - 6.218	108-121.94	1718.8-1722.2	13.25-13.4
6.31175 - 6.31225	123-138	2220-2300	14.47-14.5
8.291 - 8.294	149.9-150.05	2310-2390	15.35-16.2
8.362 - 8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625 - 8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425 - 8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29 - 12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975 - 12.52025	240-285	3345.8-3358	36.43-36.5
12.57675 - 12.57725	322-335.4	3600-4400	Above 38.6
13.36 - 13.41			

RADIATED EMISSION LIMITS

Radiated Emission Limits

§15.245 Operation within the bands 902-928 MHz, 2435-2465 MHz, 5785-5815 MHz, 10500-10550 MHz and 24075-24175 MHz.

- (a) Operation under the provision of this section is limited to intentional radiators used as field disturbance sensors, excluding perimeter protection systems.
- (b) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength Of Fundamental (millivolts/meter)	Field Strength of Harmonics (millivolts/meter)
902-928	500	1.6
2435-2465	500	1.6
5785-5815	500	1.6
10500-10550	2500	25.0
24075-24175	2500	25.0

- (1) Regardless of the limits shown in the above table, harmonic emissions in the restricted bands below 17.7 GHz, as specified in §15.205, shall not exceed the field strength limits shown in §15.209. Harmonic emissions in the restricted bands at and above 17.7 GHz shall not exceed the following field strength limits:

- (i) For field disturbance sensors designed for use only within a building or to open building doors, 25 mV/m.
- (ii) For all other field disturbance sensors, 7.5 mV/m.
- (iii) Field disturbance sensors designed to be used in motor vehicles or aircraft must include features to prevent continuous operation unless their emissions in the restricted bands fully comply with the limits given in §15.209. Continuous operation of field disturbance sensors designed to be used in farm equipment; vehicles such as fork-lifts that are intended primarily for use indoors or for very specialized operations. Or railroad locomotives, railroad cars and other equipment which travel on fixed tracks is permitted. A field disturbance sensor will be considered not to be operating in a continuous mode if its operation is limited to specific activities of limited duration (e.g. putting a vehicle in reverse gear, activating a turn signal, etc.).

§15.245, continued

- (2) Field strength limits are specified at a distance of 3 meters.
- (3) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
- (4) The emission limits shown above are based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

§15.209 Radiated Emission Limits, General Requirements

- (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (millivolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	2400/F (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3