


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3m Radiated

EUT: Wireless remote handset M/N:JLDK.18.01.XX
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.
 Operating Condition: TX 2431.793833MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 4.5V
 Comment: Y
 Start of Test: 2016-04-05 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

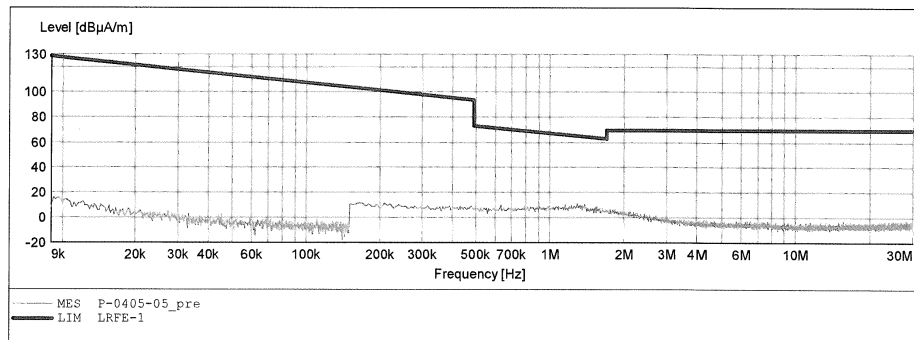


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3m Radiated

EUT: Wireless remote handset M/N:JLDK.18.01.XX
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.
 Operating Condition: TX 2431.793833MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 4.5V
 Comment: Z
 Start of Test: 2016-04-05 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

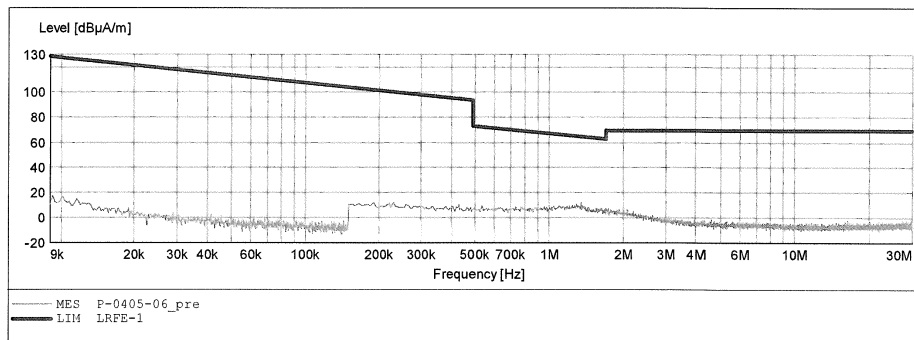


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3m Radiated

EUT: Wireless remote handset M/N:JLDK.18.01.XX
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.
 Operating Condition: TX 2457.387561MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 4.5V
 Comment: X
 Start of Test: 2016-04-05 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency 9.0 kHz	Frequency 150.0 kHz	Width 100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

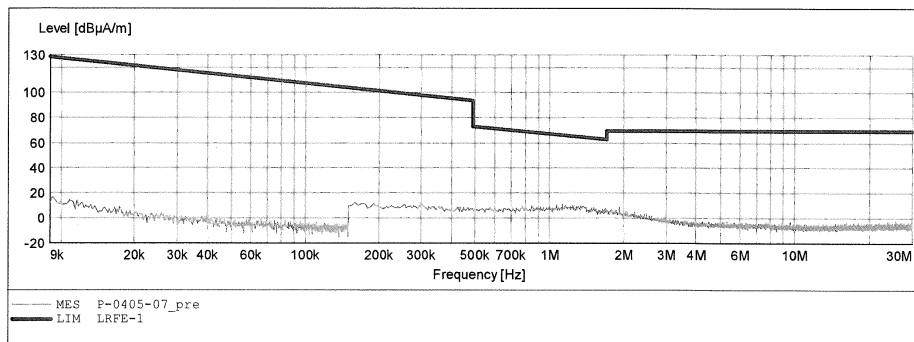


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3m Radiated

EUT: Wireless remote handset M/N:JLDK.18.01.XX
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.
 Operating Condition: TX 2457.387561MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 4.5V
 Comment: Y
 Start of Test: 2016-04-05 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

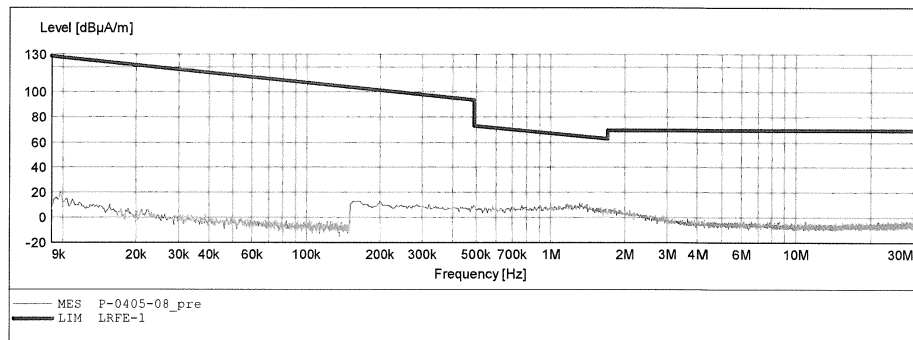


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3m Radiated

EUT: Wireless remote handset M/N:JLDK.18.01.XX
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.
 Operating Condition: TX 2457.387561MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 4.5V
 Comment: Z
 Start of Test: 2016-04-05 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

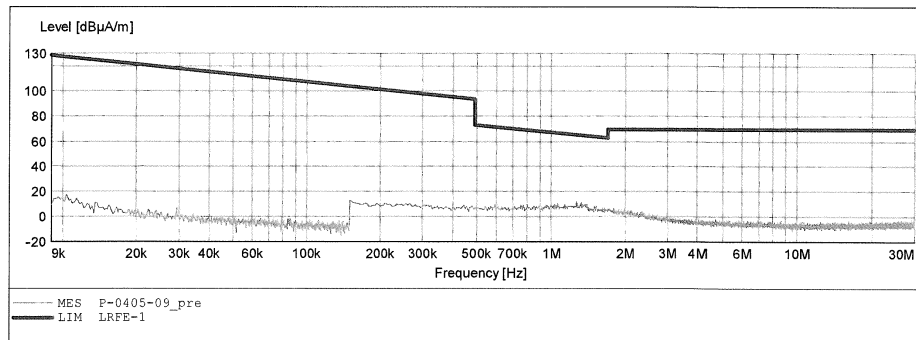


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1395

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2406.999080MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

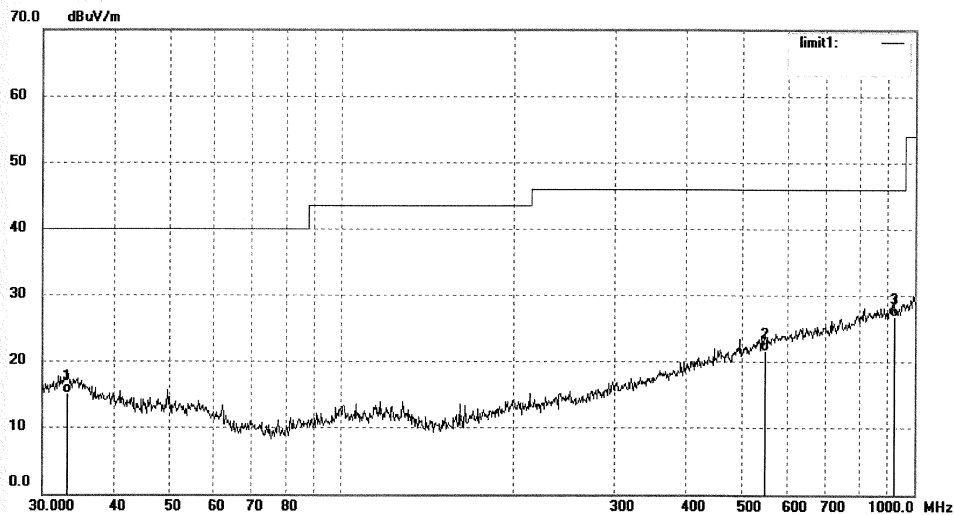

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	24.58	-9.39	15.19	40.00	-24.81	QP			
2	550.9479	25.19	-3.59	21.60	46.00	-24.40	QP			
3	919.2866	25.26	1.57	26.83	46.00	-19.17	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1396

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2406.999080MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

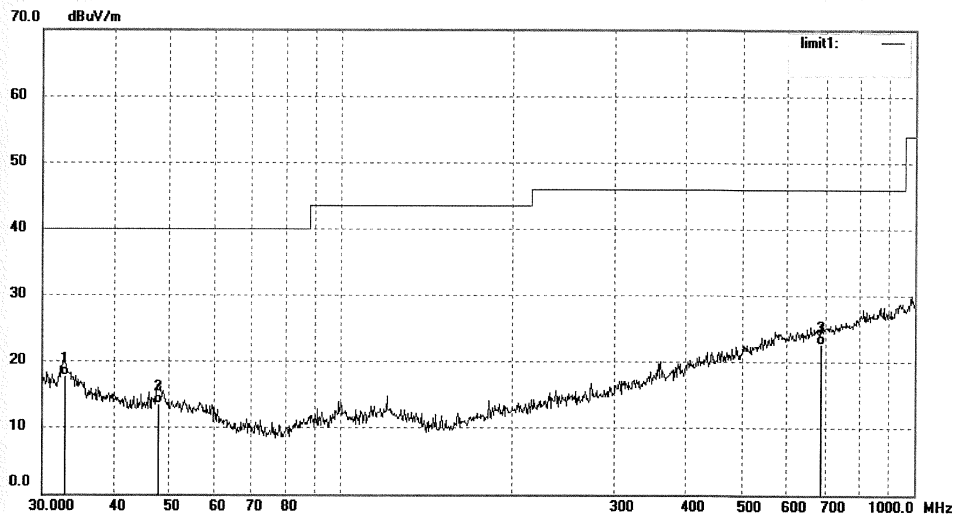

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.8637	26.63	-8.94	17.69	40.00	-22.31	QP			
2	47.8260	25.40	-11.87	13.53	40.00	-26.47	QP			
3	684.7454	24.71	-1.97	22.74	46.00	-23.26	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1398

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2431.793833MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

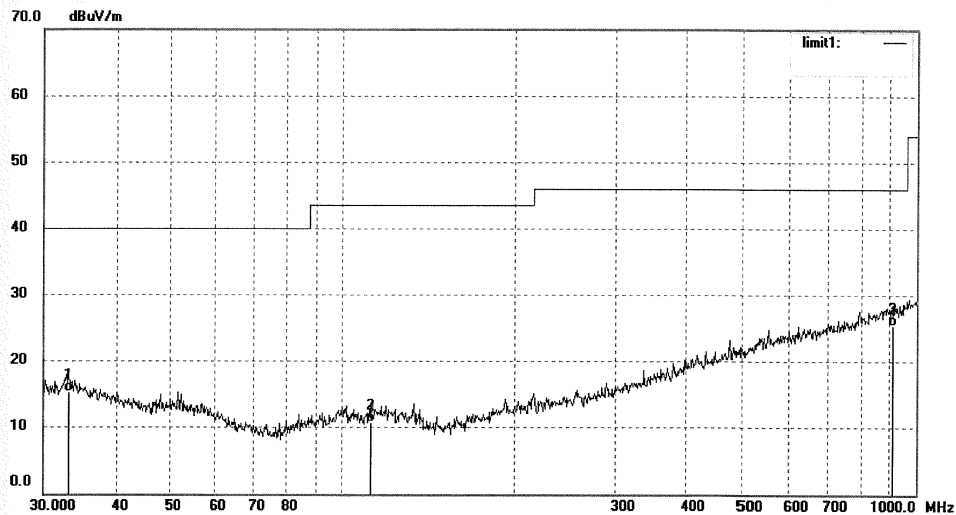

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	24.67	-9.39	15.28	40.00	-24.72	QP			
2	112.1303	23.93	-13.20	10.73	43.50	-32.77	QP			
3	909.6666	24.09	1.34	25.43	46.00	-20.57	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1397

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2431.793833MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

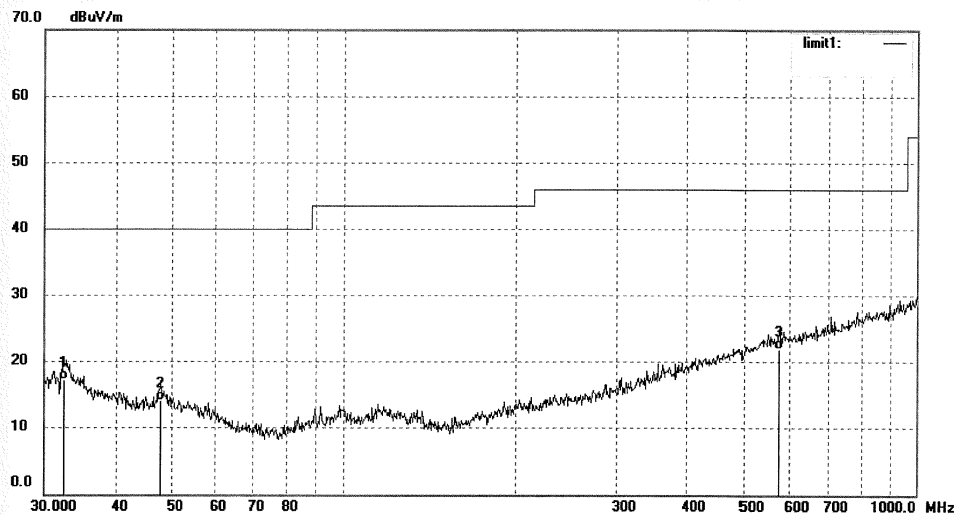

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.4059	26.02	-8.80	17.22	40.00	-22.78	QP			
2	47.8260	25.91	-11.87	14.04	40.00	-25.96	QP			
3	574.6258	25.08	-3.19	21.89	46.00	-24.11	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1399

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2457.387561MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

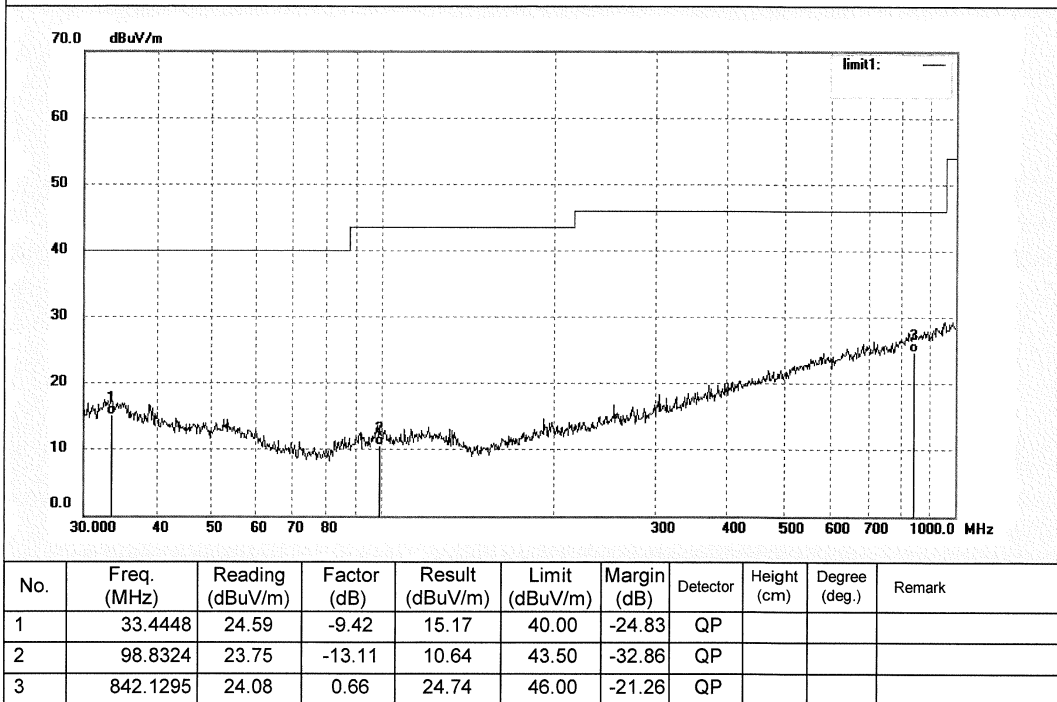


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1400

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2457.387561MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

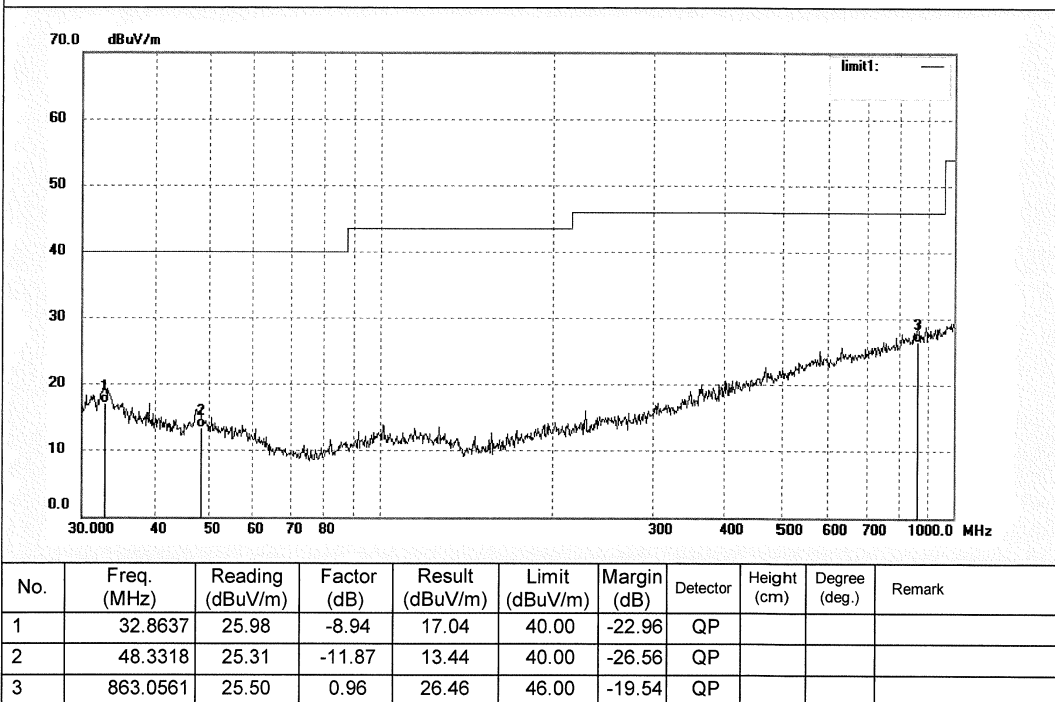


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1379

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2406.999080MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

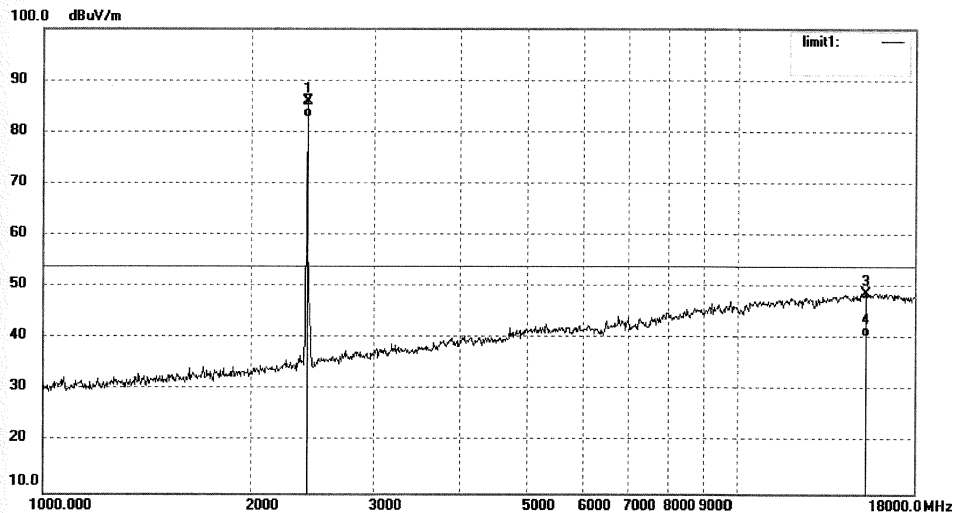

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.999	93.33	-7.44	85.89	114.00	-28.11	peak			
2	2406.999	90.22	-7.44	82.78	94.00	-11.22	AVG			
3	15265.885	8.33	40.57	48.90	74.00	-25.10	peak			
4	15265.885	-0.01	40.57	40.56	54.00	-13.44	AVG			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #1380	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

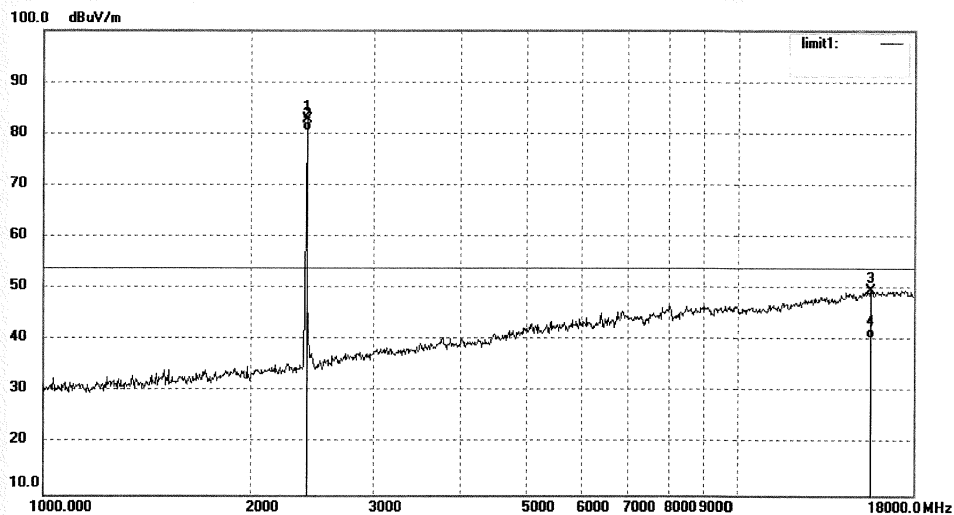

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.999	90.28	-7.44	82.84	114.00	-31.16	peak			
2	2406.999	87.89	-7.44	80.45	94.00	-13.55	AVG			
3	15577.899	9.53	40.08	49.61	74.00	-24.39	peak			
4	15577.899	0.50	40.08	40.58	54.00	-13.42	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1382

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2457.387561MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

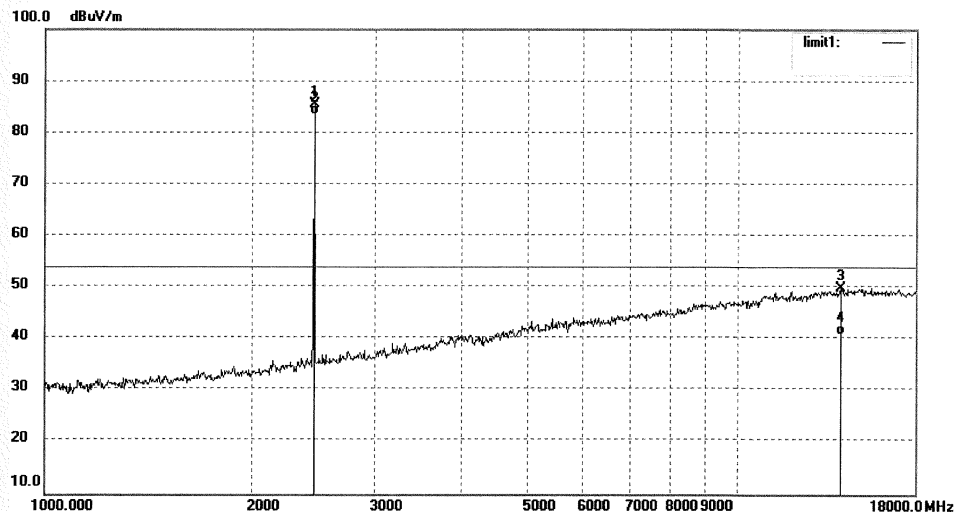

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.387	92.79	-7.34	85.45	114.00	-28.55	peak			
2	2457.387	90.90	-7.34	83.56	94.00	-10.44	AVG			
3	13957.529	9.51	40.33	49.84	74.00	-24.16	peak			
4	13957.529	0.63	40.33	40.96	54.00	-13.04	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1381

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2457.387561MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

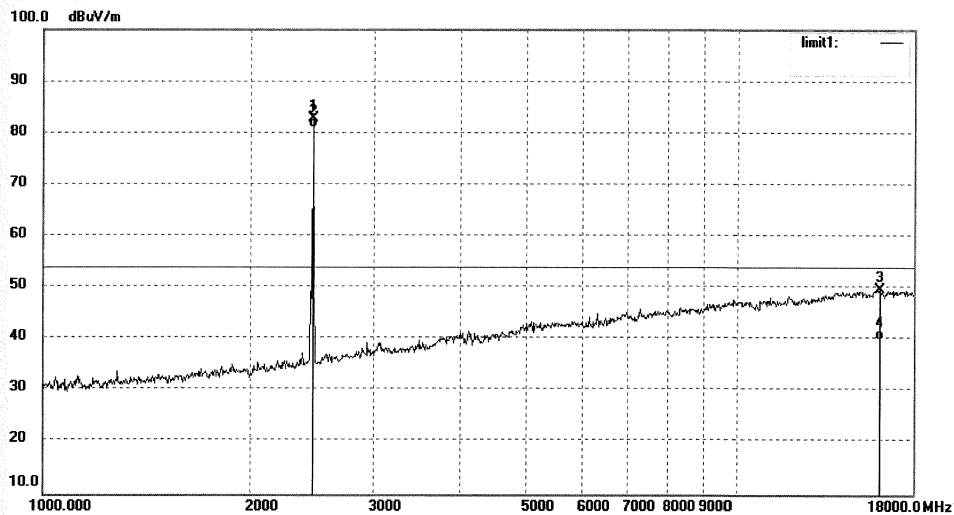

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.387	90.20	-7.34	82.86	114.00	-31.14	peak			
2	2457.387	88.31	-7.34	80.97	94.00	-13.03	AVG			
3	16081.142	9.71	40.05	49.76	74.00	-24.24	peak			
4	16081.142	0.07	40.05	40.12	54.00	-13.88	AVG			



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Igwade #1383	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

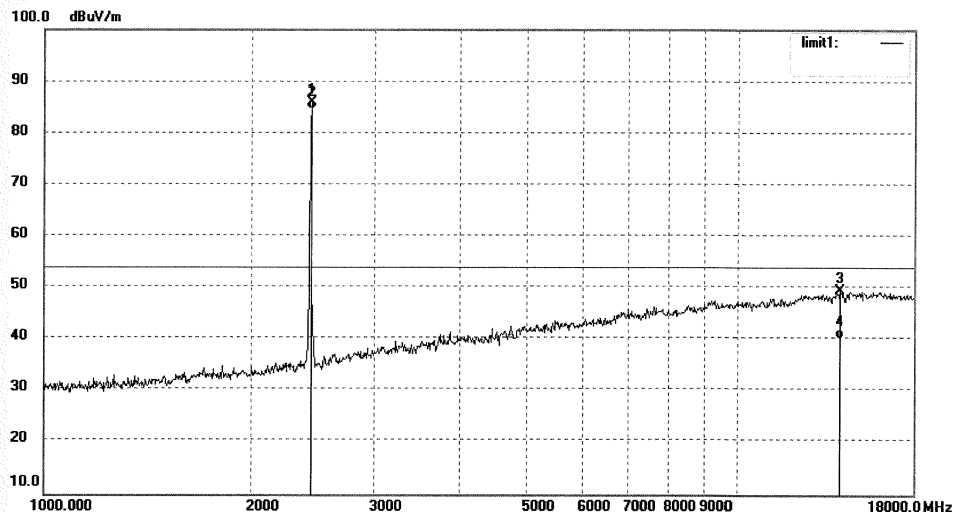

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2431.793	93.39	-7.38	86.01	114.00	-27.99	peak			
2	2431.793	92.03	-7.38	84.65	94.00	-9.35	AVG			
3	14038.447	8.87	40.57	49.44	74.00	-24.56	peak			
4	14038.447	-0.34	40.57	40.23	54.00	-13.77	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1384

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2431.793833MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

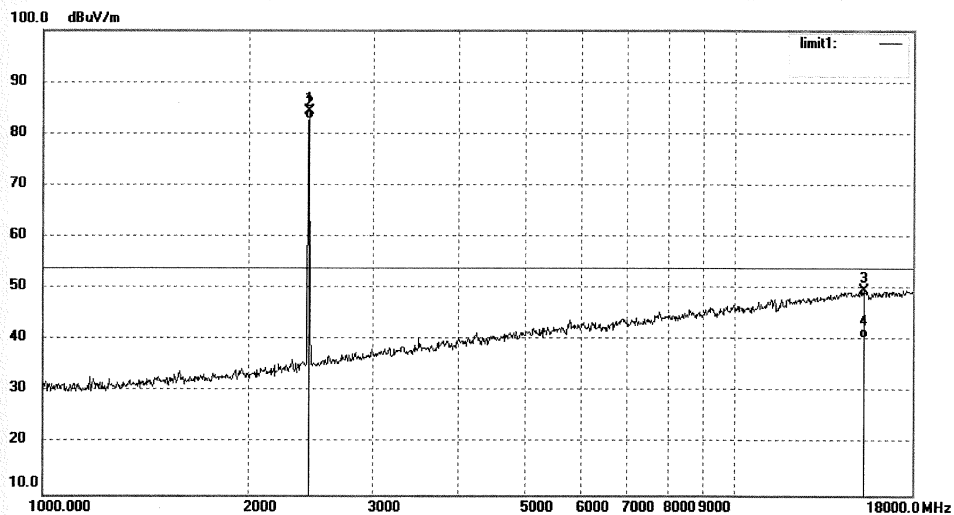

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2431.793	91.84	-7.38	84.46	114.00	-29.54	peak			
2	2431.793	90.24	-7.38	82.86	94.00	-11.14	AVG			
3	15265.885	9.19	40.57	49.76	74.00	-24.24	peak			
4	15265.885	0.01	40.57	40.58	54.00	-13.42	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #1390	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

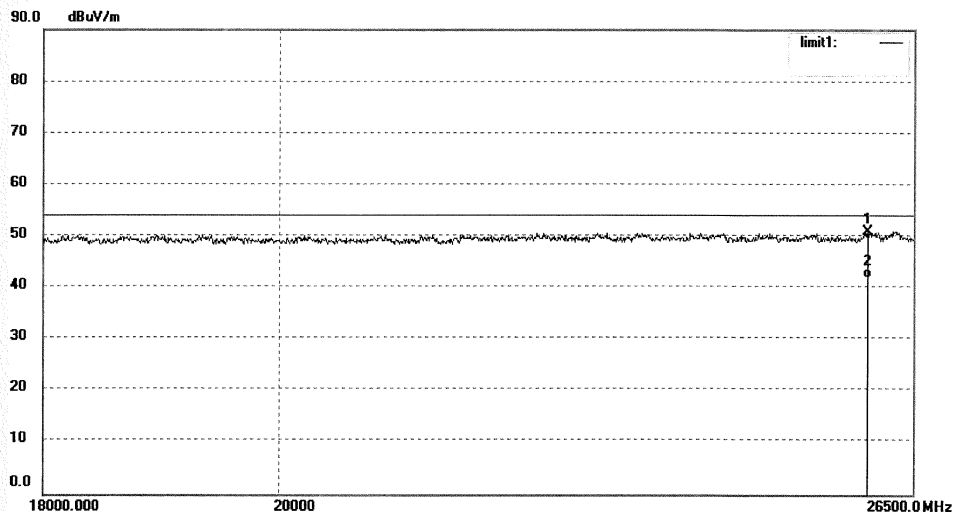

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25962.307	34.37	16.50	50.87	74.00	-23.13	peak			
2	25962.307	25.45	16.50	41.95	54.00	-12.05	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.
Seite 48 von 60
Page 48 of 60


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel: +86-0755-26503290
Fax: +86-0755-26503396

Job No.: Igwade #1389	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

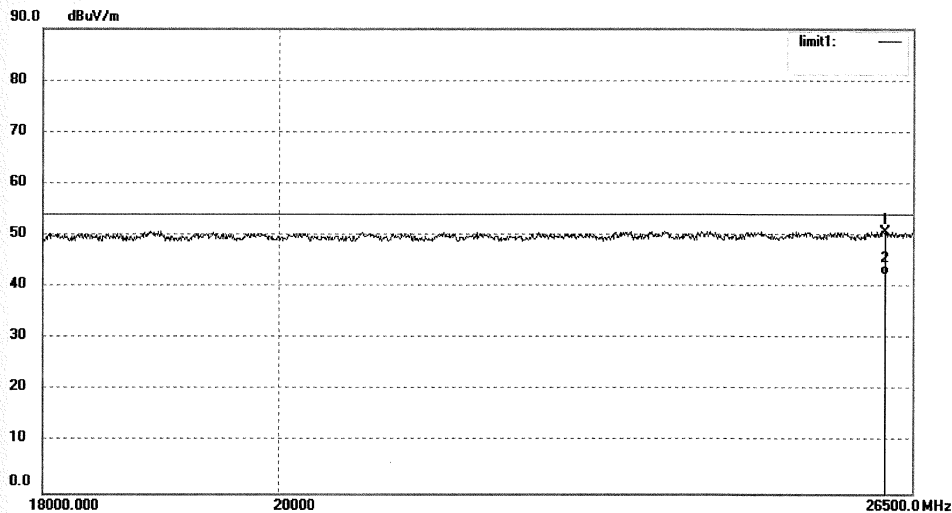

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26184.163	33.69	17.11	50.80	74.00	-23.20	peak			
2	26184.163	25.34	17.11	42.45	54.00	-11.55	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.
Seite 49 von 60
Page 49 of 60


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #1391	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

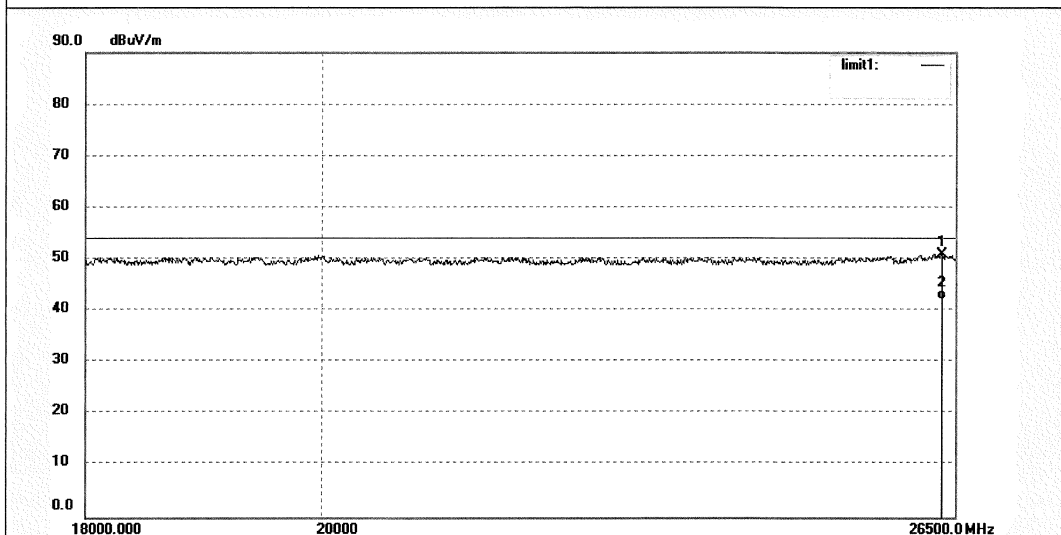

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26346.703	34.47	16.50	50.97	74.00	-23.03	peak			
2	26346.703	25.78	16.50	42.28	54.00	-11.72	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.
Seite 50 von 60
Page 50 of 60

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #1392	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

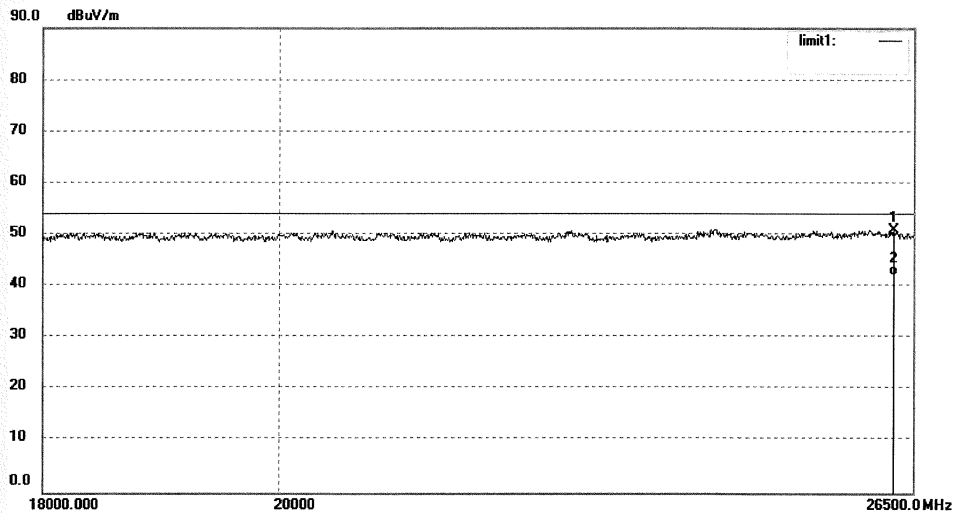

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26275.468	34.39	16.50	50.89	74.00	-23.11	peak			
2	26275.468	25.78	16.50	42.28	54.00	-11.72	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.
Seite 51 von 60
Page 51 of 60

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1394

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2457.387561MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

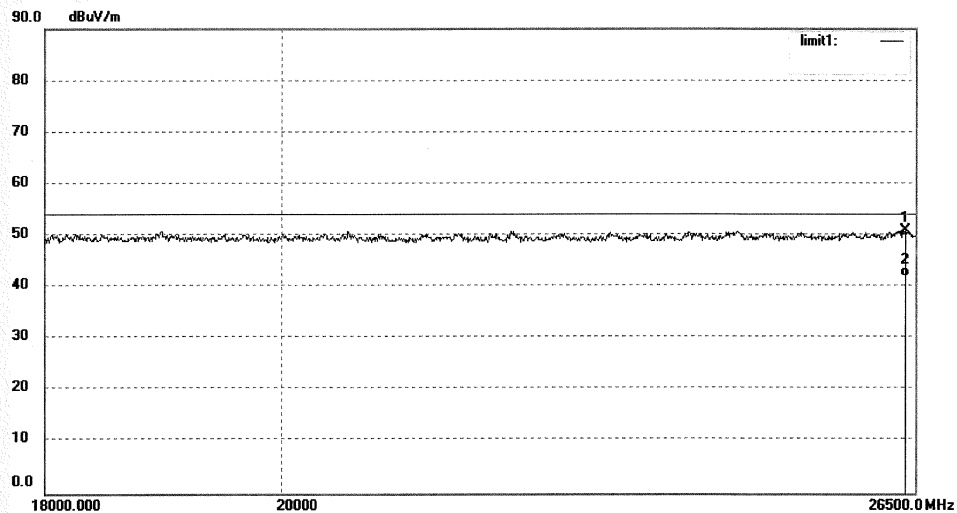

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.291	34.44	16.50	50.94	74.00	-23.06	peak			
2	26377.291	25.57	16.50	42.07	54.00	-11.93	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #1393	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

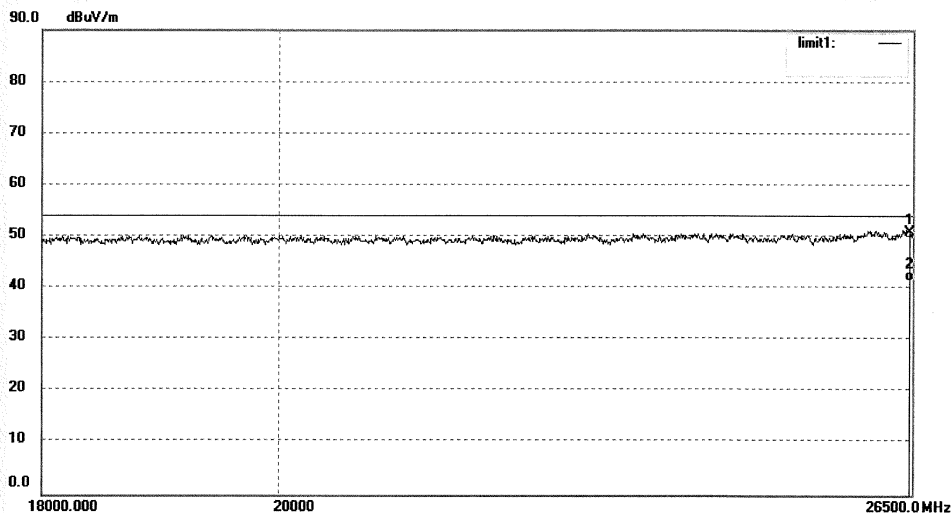

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26459.034	34.48	16.50	50.98	74.00	-23.02	peak			
2	26459.034	25.12	16.50	41.62	54.00	-12.38	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.
Seite 53 von 60
Page 53 of 60

Test Plot of Frequency Band Edge


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1387

Standard: FCC Part 15 (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wireless remote handset

Mode: TX 2406.999080MHz

Model: JLDK.18.01.XX

Manufacturer: OKIN Refined Electric Technology Co., Ltd.

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/03/30/

Time:

Engineer Signature: LGWADE

Distance:

Note:

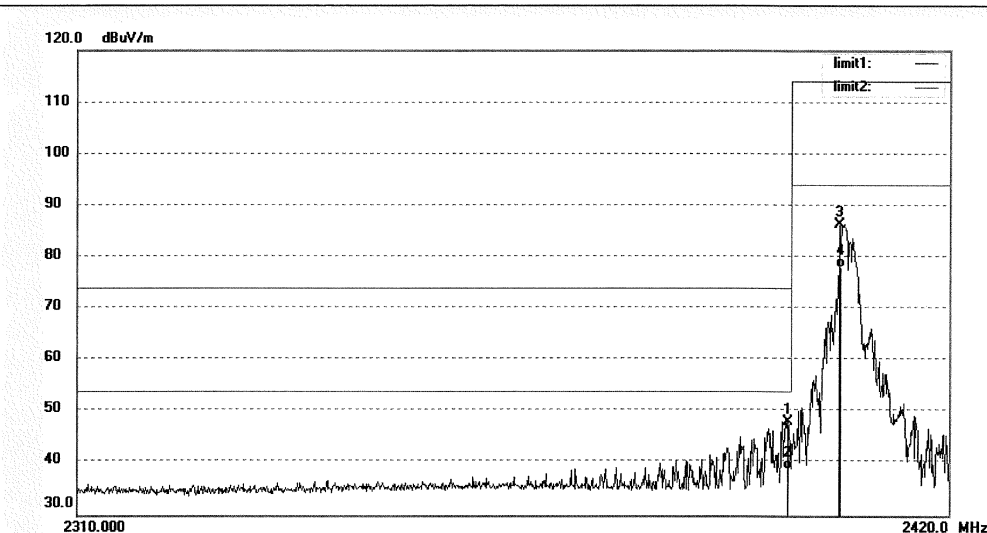

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2399.540	55.59	-7.46	48.13	74.00	-25.87	peak			
2	2399.540	46.24	-7.46	38.78	54.00	-15.22	AVG			
3	2406.000	93.90	-7.44	86.46	114.00	-27.54	peak			
4	2406.000	85.57	-7.44	78.13	94.00	-15.87	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.
Seite 54 von 60
Page 54 of 60

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1388	Polarization: Vertical
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

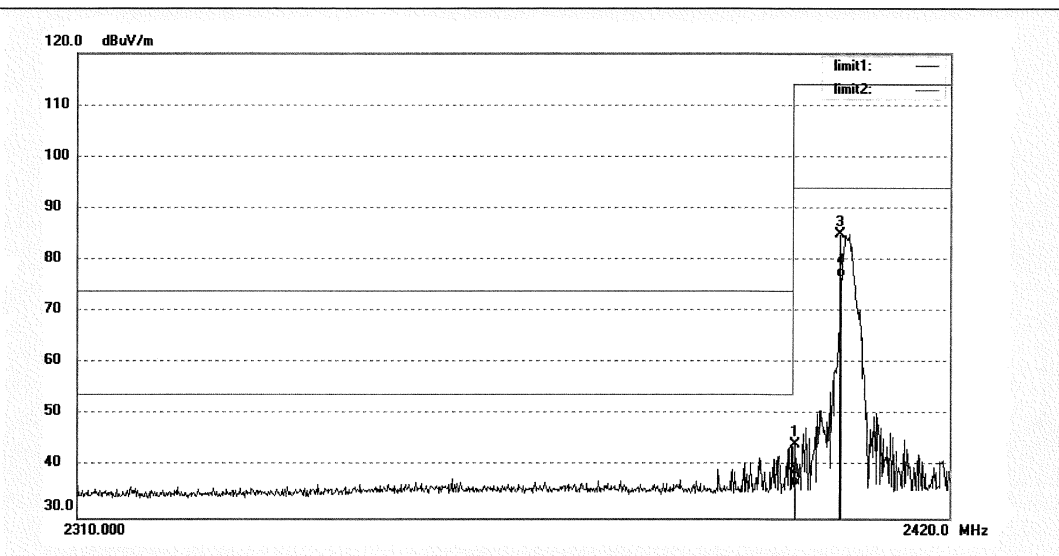

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.310	51.82	-7.46	44.36	114.00	-69.64	peak			
2	2400.310	43.57	-7.46	36.11	94.00	-57.89	AVG			
3	2406.000	92.38	-7.44	84.94	114.00	-29.06	peak			
4	2406.000	84.24	-7.44	76.80	94.00	-17.20	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1386	Polarization: Horizontal
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

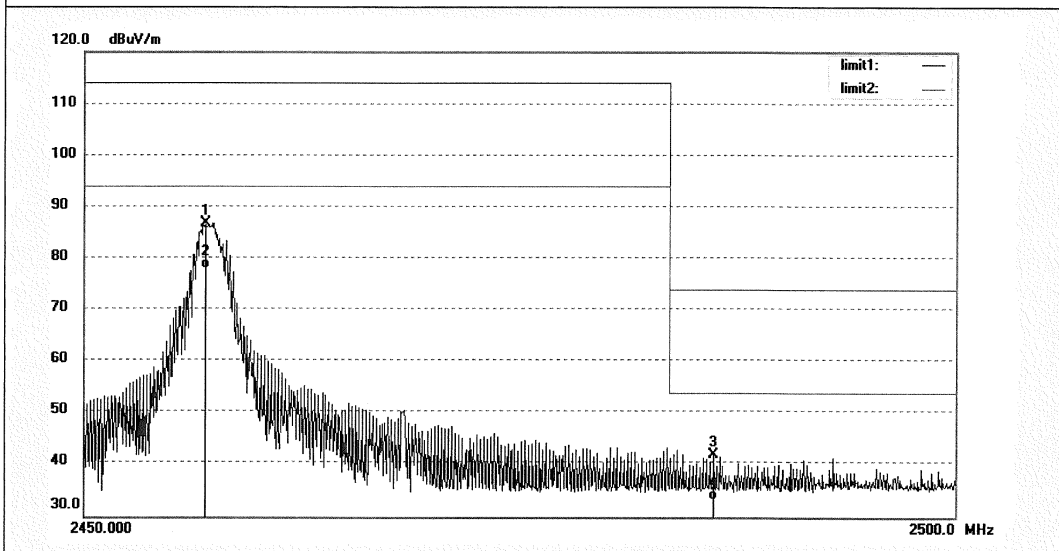

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.000	94.12	-7.34	86.78	114.00	-27.22	peak			
2	2457.000	85.35	-7.34	78.01	94.00	-15.99	AVG			
3	2486.150	49.34	-7.38	41.96	74.00	-32.04	peak			
4	2486.150	40.65	-7.38	33.27	54.00	-20.73	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1385	Polarization: Vertical
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

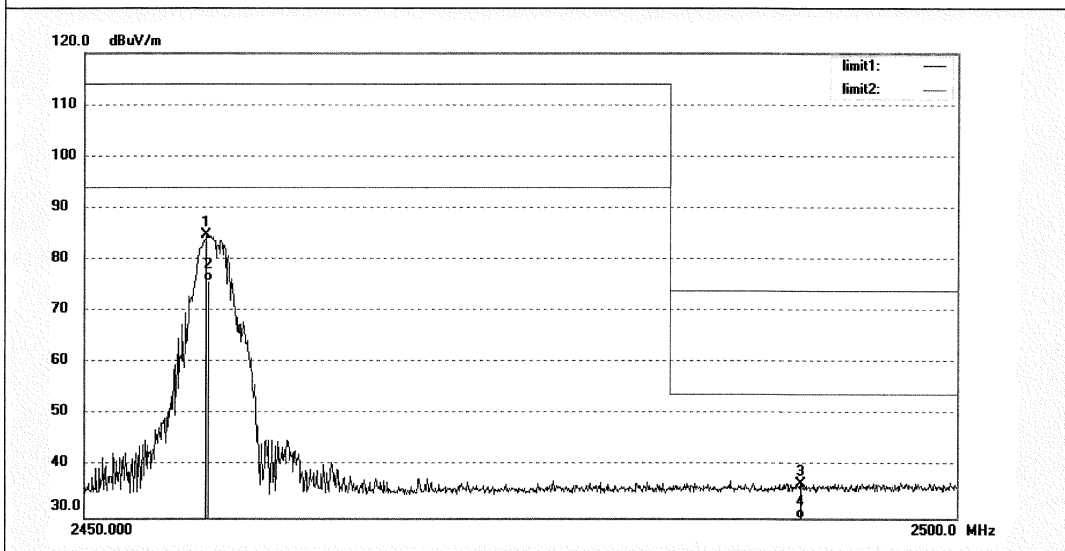

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.000	92.14	-7.34	84.80	114.00	-29.20	peak			
2	2457.000	83.23	-7.34	75.89	94.00	-18.11	AVG			
3	2491.050	44.05	-7.38	36.67	74.00	-37.33	peak			
4	2491.050	37.35	-7.38	29.97	54.00	-24.03	AVG			

Prüfbericht - Nr.: 50041388 001
Test Report No.**Seite 57 von 60**
Page 57 of 60

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass**

Test standard : FCC KDB Publication 447498 D01 v06

Since maximum radiated power of the transmitter is $0.25\text{mW} < 10\text{mW}$, and the distance from EUT to human is 5mm, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01 General RF Exposure Guidance v06.

8. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	7
Table 4: Test result of 20dB & 99% Bandwidth.....	13
Table 5: Polarization of the measurement for the larger power level channel 2431.794MHz: Horizontal.....	18

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions below 30MHz	58
Photograph 2: Set-up for Spurious Emissions of 30MHz – 1GHz.....	58
Photograph 3: Set-up for Spurious Emissions of 1 – 18GHz	59
Photograph 4: Set-up for Spurious Emissions of 18 – 26.5GHz	59