


Job No.: Ricky 2016 #740
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2457.387561MHz
Model: JLDK.37.18.02
Manufacturer: OKIN

Polarization: Vertical
Power Source: DC 4.5V
Date: 16/05/31/
Time: 10/20/39
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

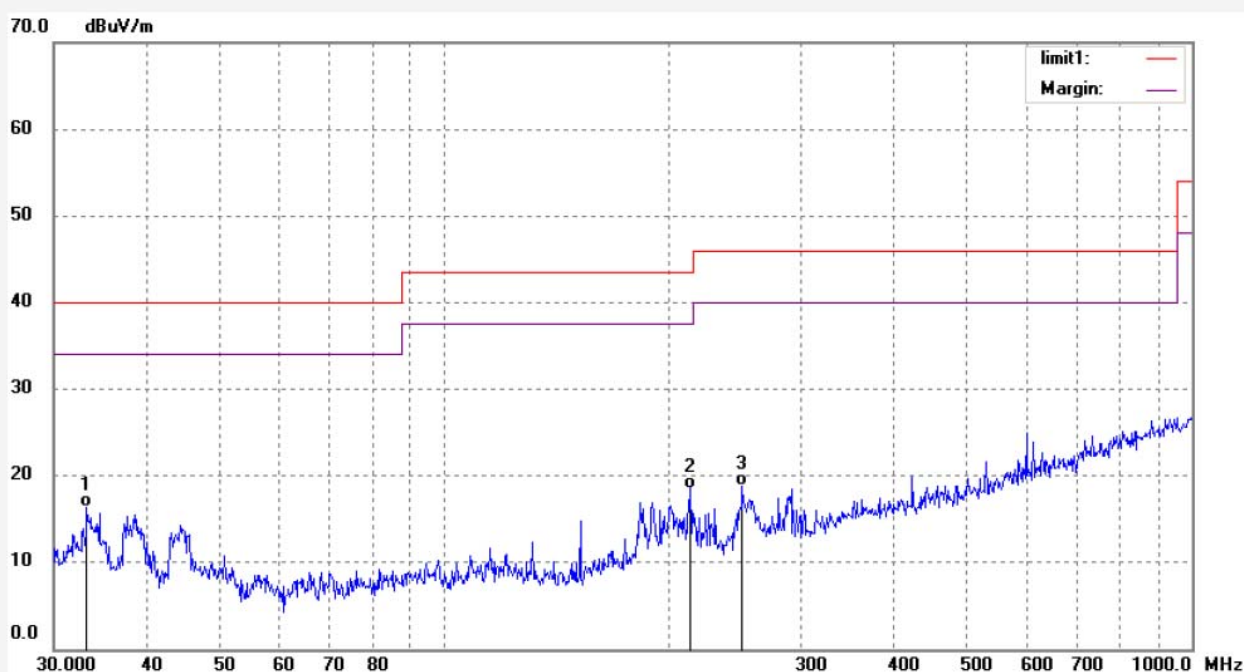

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2180	33.60	-17.25	16.35	40.00	-23.65	QP			
2	213.1031	38.53	-19.98	18.55	43.50	-24.95	QP			
3	250.4858	38.52	-19.71	18.81	46.00	-27.19	QP			

Below 1GHz(Model: JLDK.37.09.01)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky 2016 #756
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2406.999080MHz
Model: JLDK.37.09.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 10/53/31
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

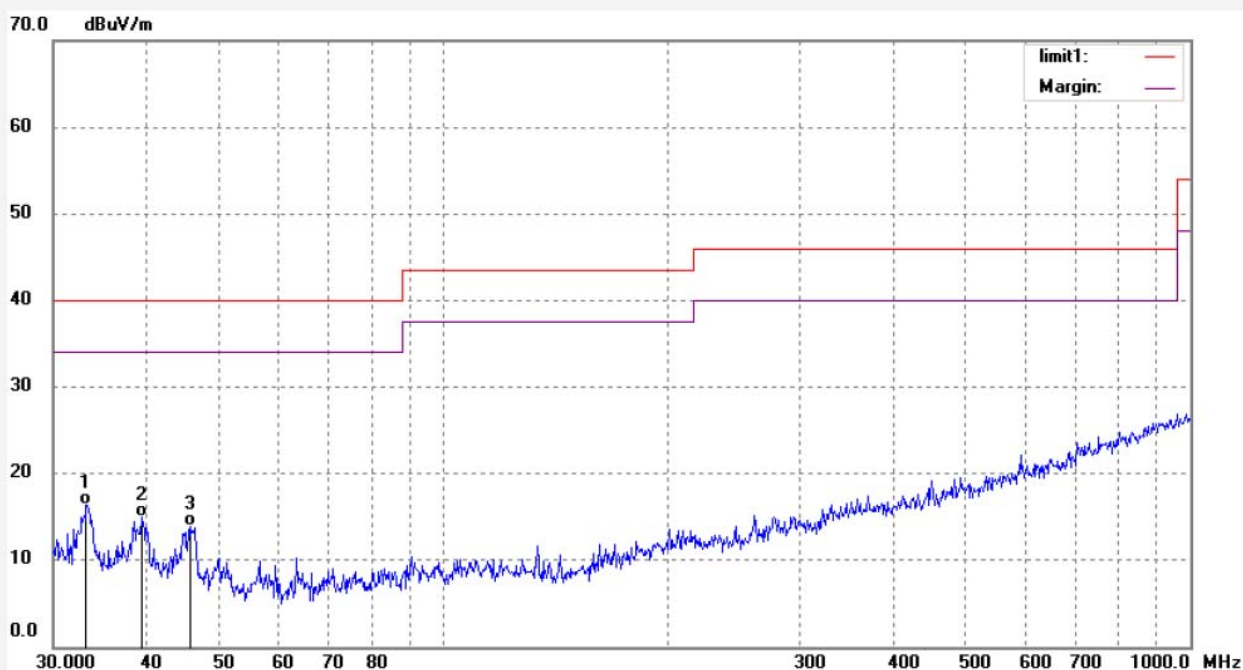


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2180	33.64	-17.25	16.39	40.00	-23.61	QP			
2	39.4587	33.83	-18.93	14.90	40.00	-25.10	QP			
3	45.7331	33.45	-19.58	13.87	40.00	-26.13	QP			

Job No.: Ricky 2016 #757
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2406.999080MHz
Model: JLDK.37.09.01
Manufacturer: OKIN

Polarization: Vertical
Power Source: DC 4.5V
Date: 16/05/31/
Time: 10/59/01
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

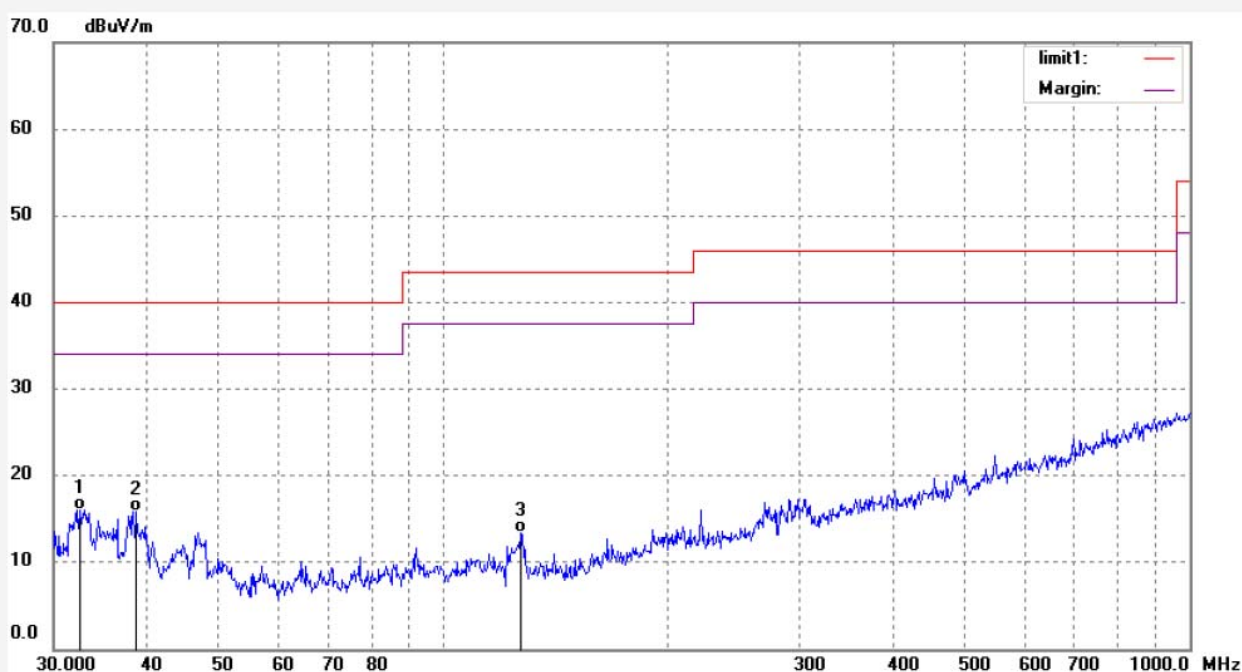

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.5248	33.22	-17.15	16.07	40.00	-23.93	QP			
2	38.7714	34.54	-18.71	15.83	40.00	-24.17	QP			
3	127.1389	36.33	-22.90	13.43	43.50	-30.07	QP			

Job No.: Ricky 2016 #755

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2431.793833MHz

Model: JLDK.37.09.01

Manufacturer: OKIN

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/50/55

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

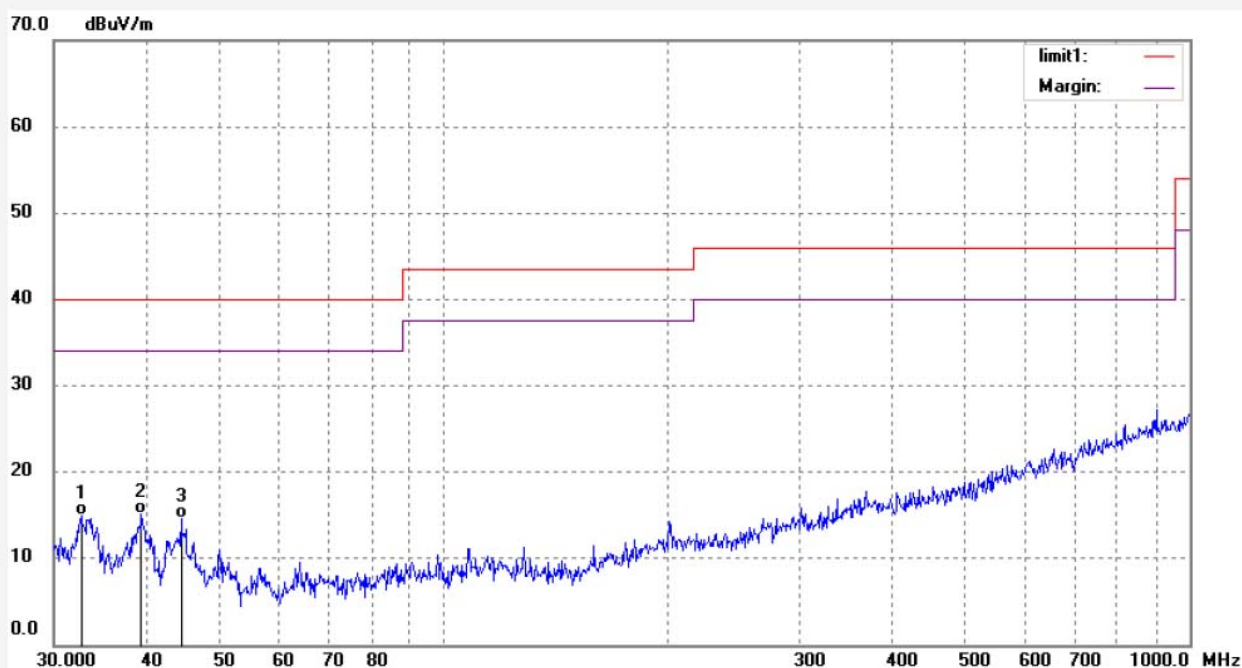

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.6394	32.19	-17.17	15.02	40.00	-24.98	QP			
2	39.3203	34.01	-18.88	15.13	40.00	-24.87	QP			
3	44.4656	33.94	-19.36	14.58	40.00	-25.42	QP			

Job No.: Ricky 2016 #754

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2431.793833MHz

Model: JLDK.37.09.01

Manufacturer: OKIN

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/48/28

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

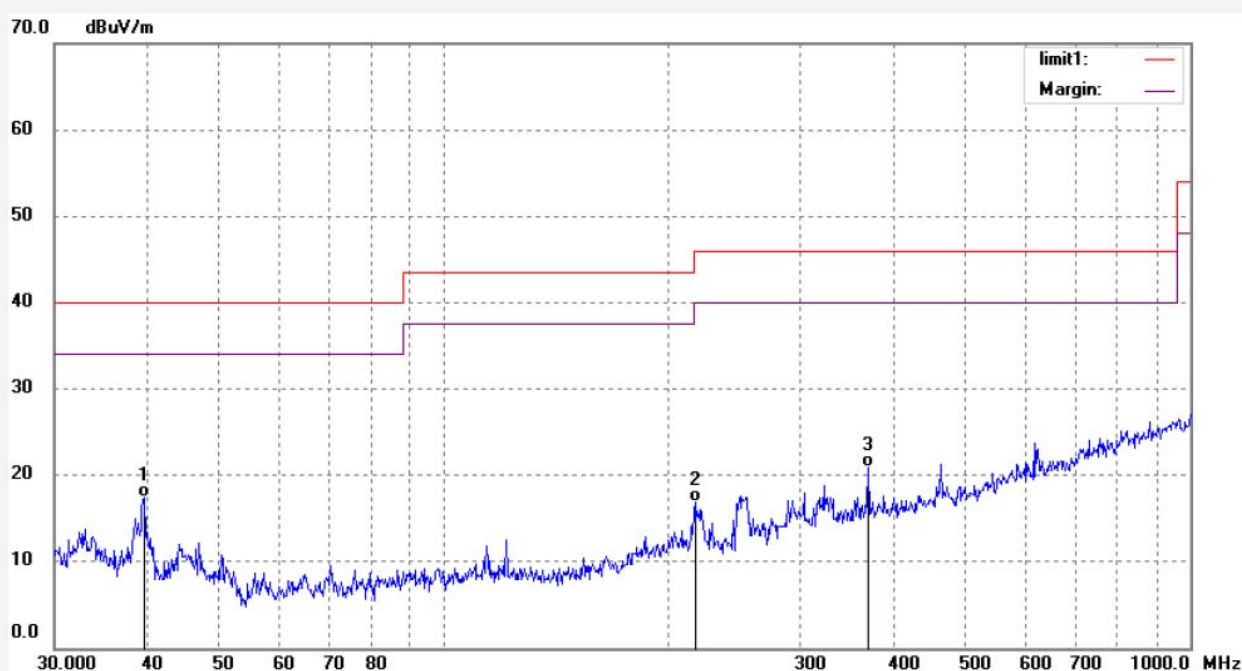


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.5977	36.36	-18.98	17.38	40.00	-22.62	QP			
2	216.8803	36.78	-19.96	16.82	46.00	-29.18	QP			
3	369.9658	36.76	-15.86	20.90	46.00	-25.10	QP			

Job No.: Ricky 2016 #752
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2457.387561MHz
Model: JLDK.37.09.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 10/44/15
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

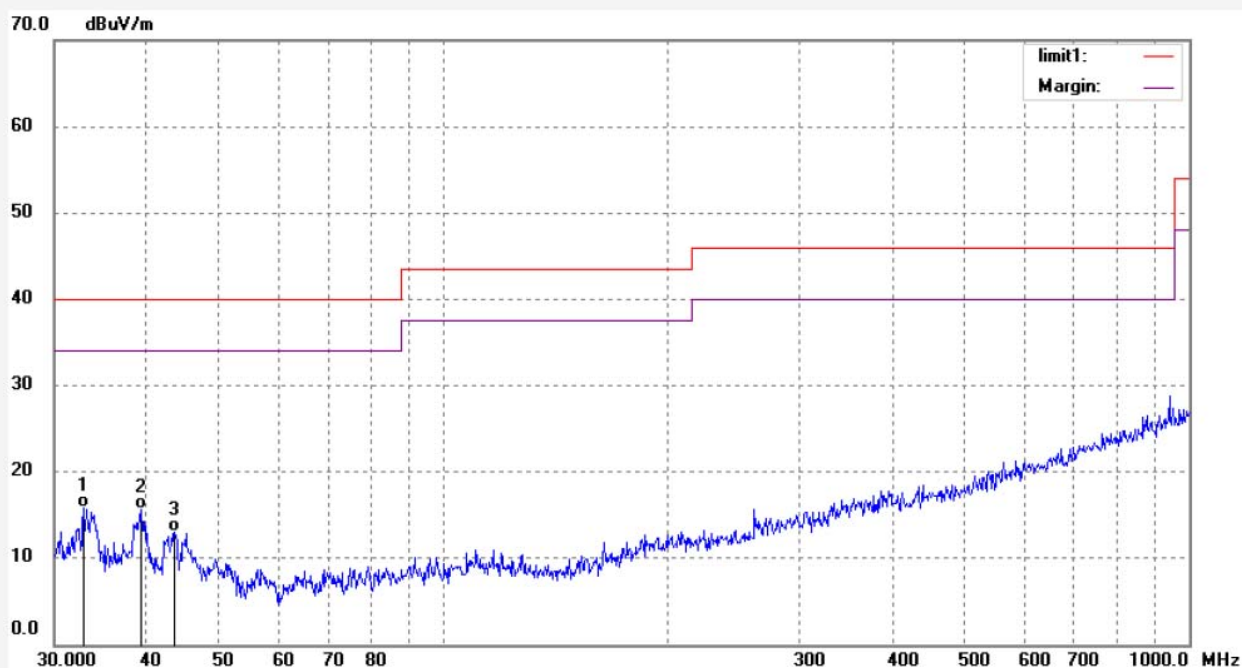

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.8697	33.01	-17.21	15.80	40.00	-24.20	QP			
2	39.1824	34.50	-18.85	15.65	40.00	-24.35	QP			
3	43.5380	32.41	-19.30	13.11	40.00	-26.89	QP			

Job No.: Ricky 2016 #753

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2457.387561MHz

Model: JLDK.37.09.01

Manufacturer: OKIN

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/46/20

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

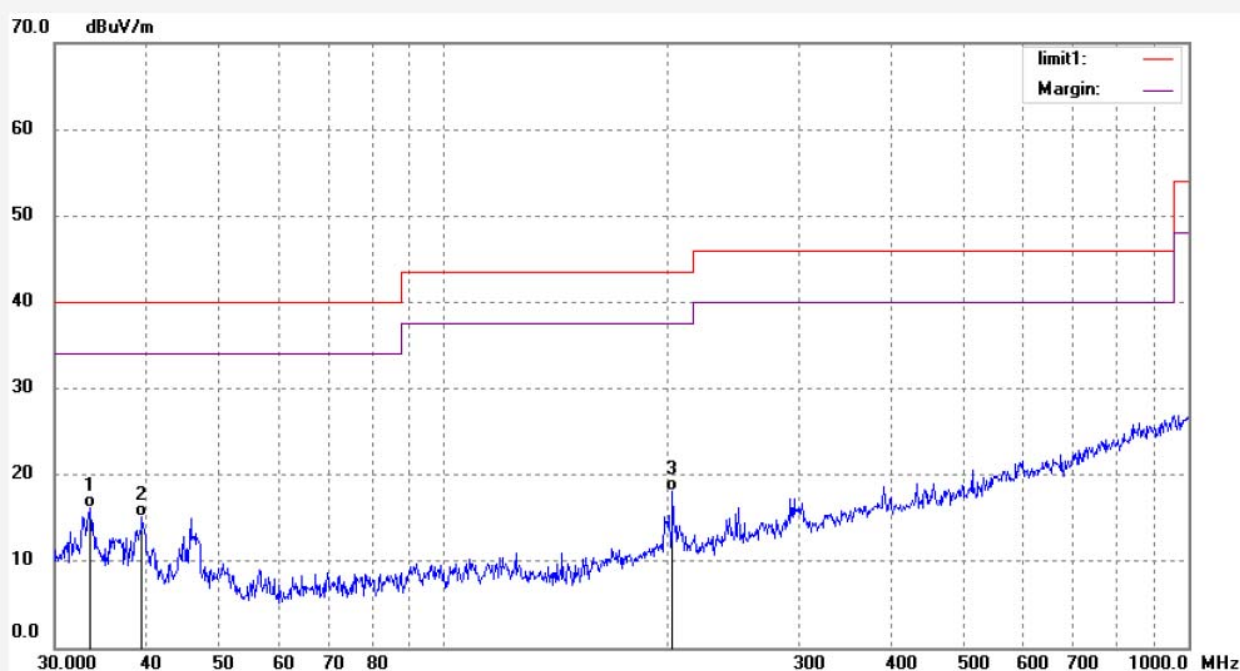

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4520	33.52	-17.28	16.24	40.00	-23.76	QP			
2	39.3203	34.05	-18.88	15.17	40.00	-24.83	QP			
3	202.8745	38.27	-20.13	18.14	43.50	-25.36	QP			

Below 1GHz(Model: JLDK.37.06.01)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky 2016 #759
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2406.999080MHz
Model: JLDK.37.06.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 11/03/52
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

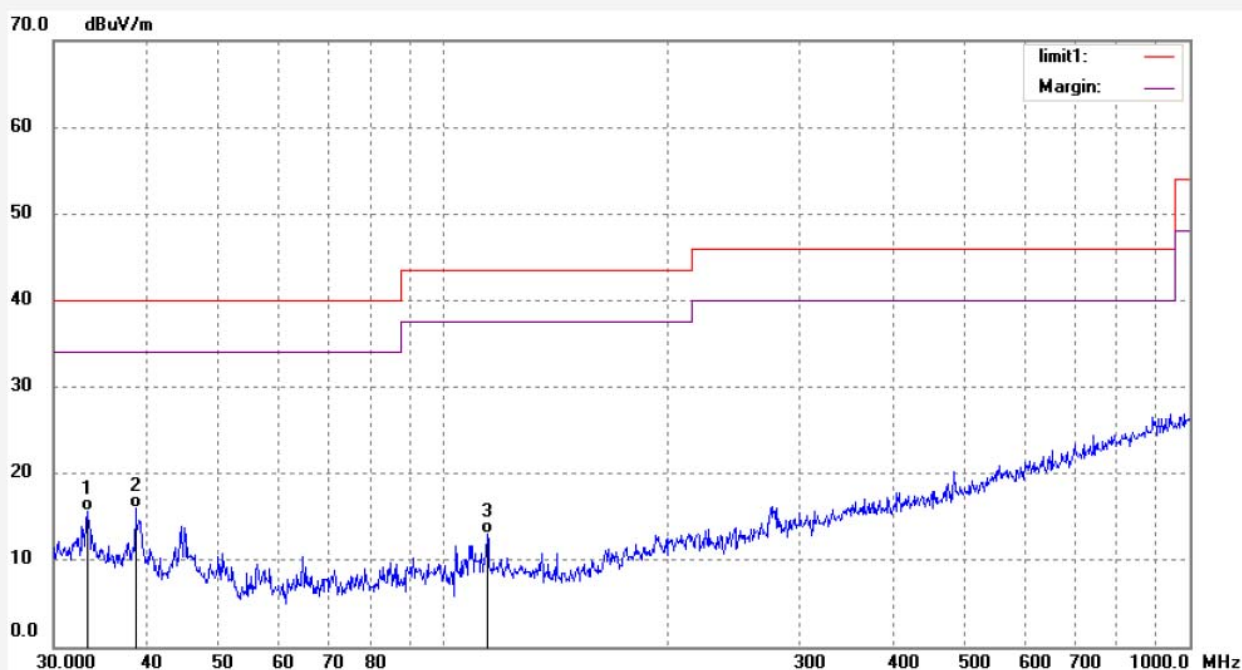


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.3348	32.93	-17.27	15.66	40.00	-24.34	QP			
2	38.6355	34.70	-18.67	16.03	40.00	-23.97	QP			
3	114.4197	35.39	-22.32	13.07	43.50	-30.43	QP			

Job No.: Ricky 2016 #758
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2406.999080MHz
Model: JLDK.37.06.01
Manufacturer: OKIN

Polarization: Vertical
Power Source: DC 4.5V
Date: 16/05/31/
Time: 11/01/44
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

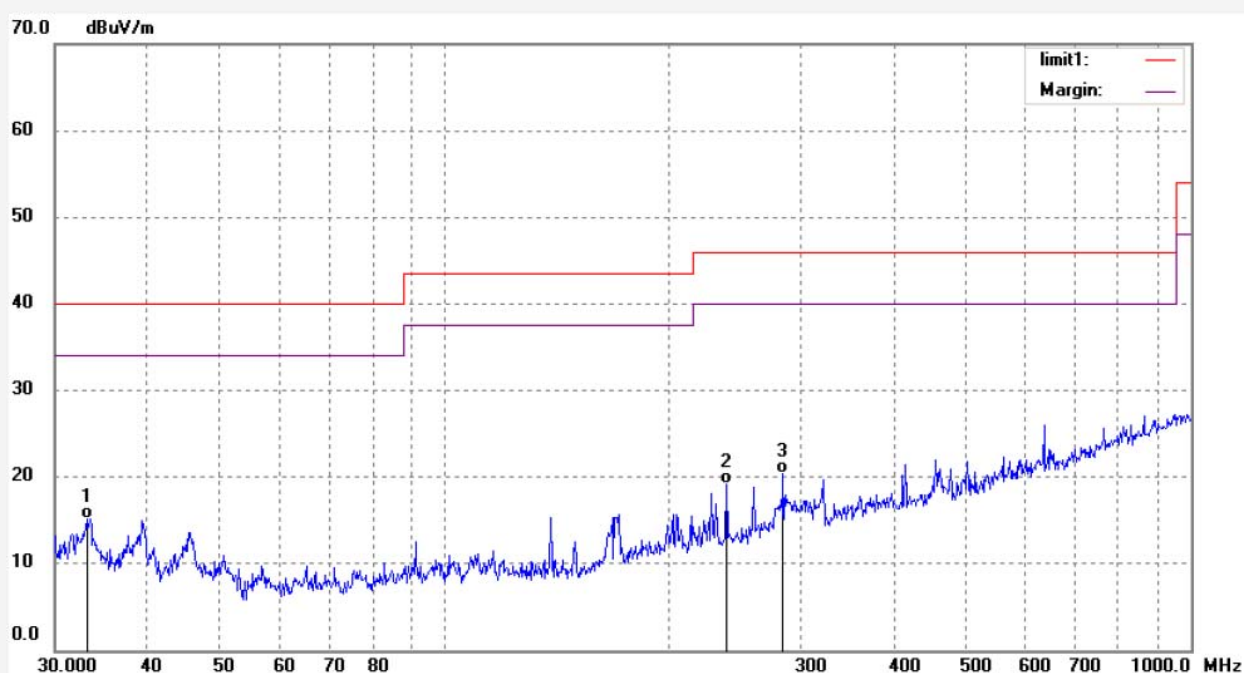

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.1015	32.42	-17.24	15.18	40.00	-24.82	QP			
2	238.4626	38.98	-19.82	19.16	46.00	-26.84	QP			
3	284.2606	38.54	-18.18	20.36	46.00	-25.64	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky 2016 #760
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2431.793833MHz
Model: JLDK.37.06.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 11/05/18
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

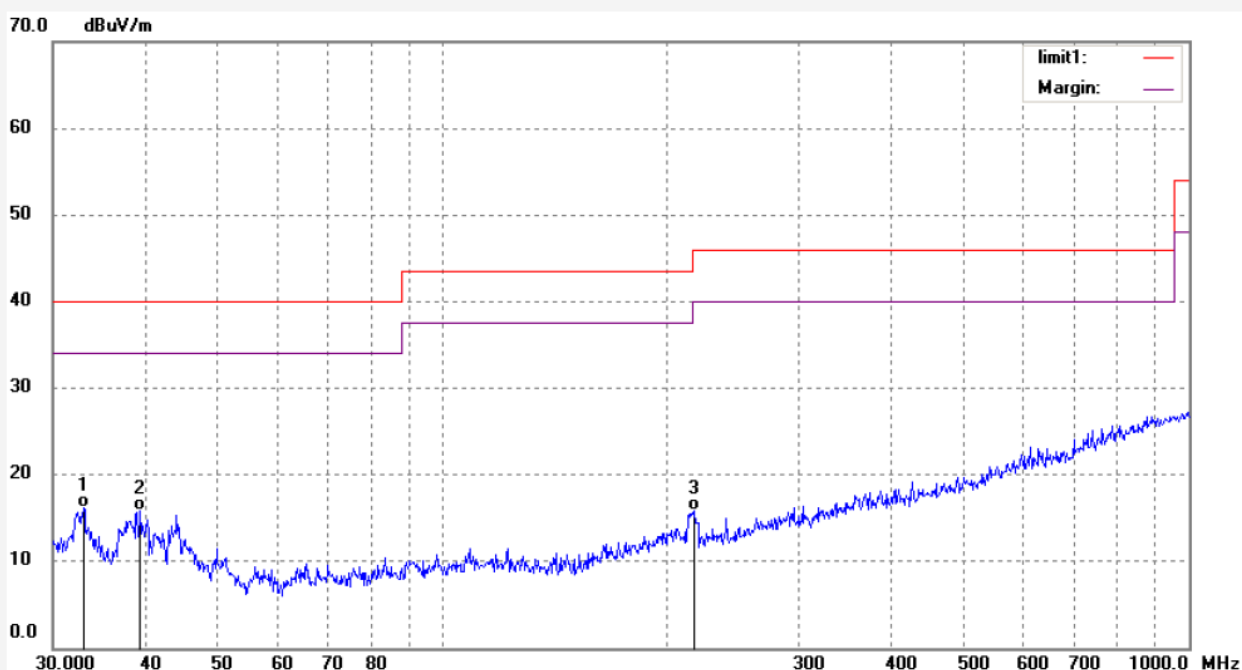


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.9853	33.33	-17.22	16.11	40.00	-23.89	QP			
2	39.3203	34.72	-18.88	15.84	40.00	-24.16	QP			
3	217.6434	35.72	-19.95	15.77	46.00	-30.23	QP			

Job No.: Ricky 2016 #761
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2431.793833MHz
Model: JLDK.37.06.01
Manufacturer: OKIN

Polarization: Vertical
Power Source: DC 4.5V
Date: 16/05/31/
Time: 11/10/00
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

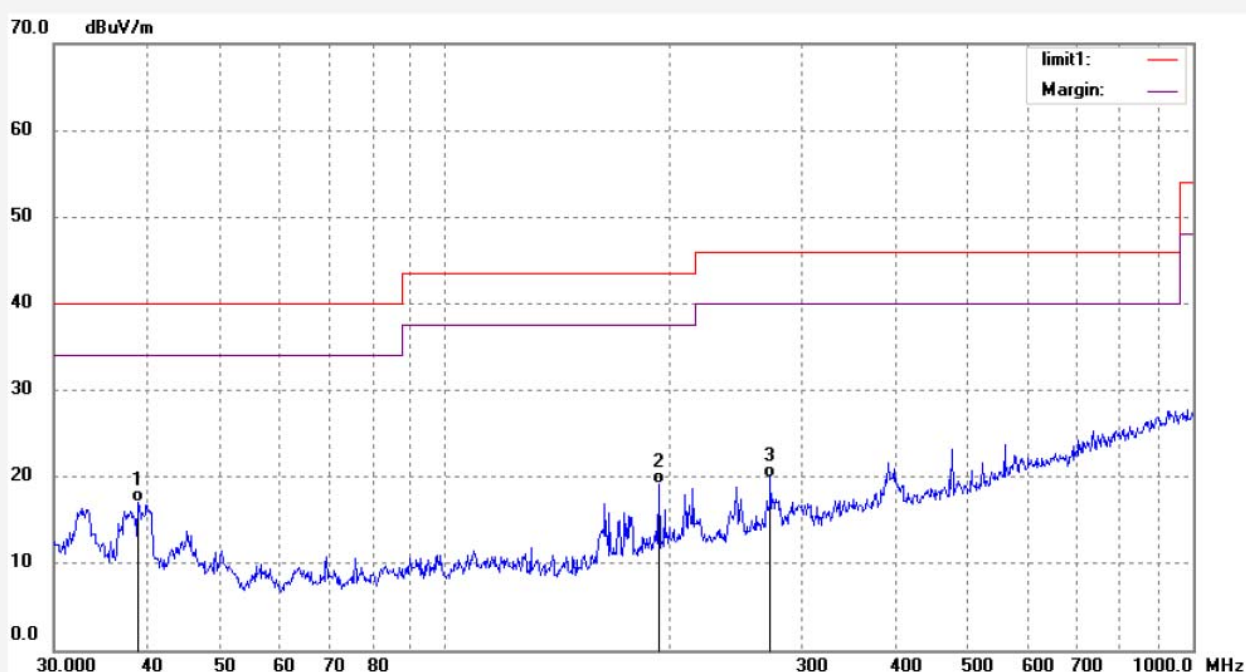


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.9080	35.78	-18.75	17.03	40.00	-22.97	QP			
2	193.1365	39.85	-20.68	19.17	43.50	-24.33	QP			
3	272.5246	38.57	-18.62	19.95	46.00	-26.05	QP			

Job No.: Ricky 2016 #763
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2457.387561MHz
Model: JLDK.37.06.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 11/16/22
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

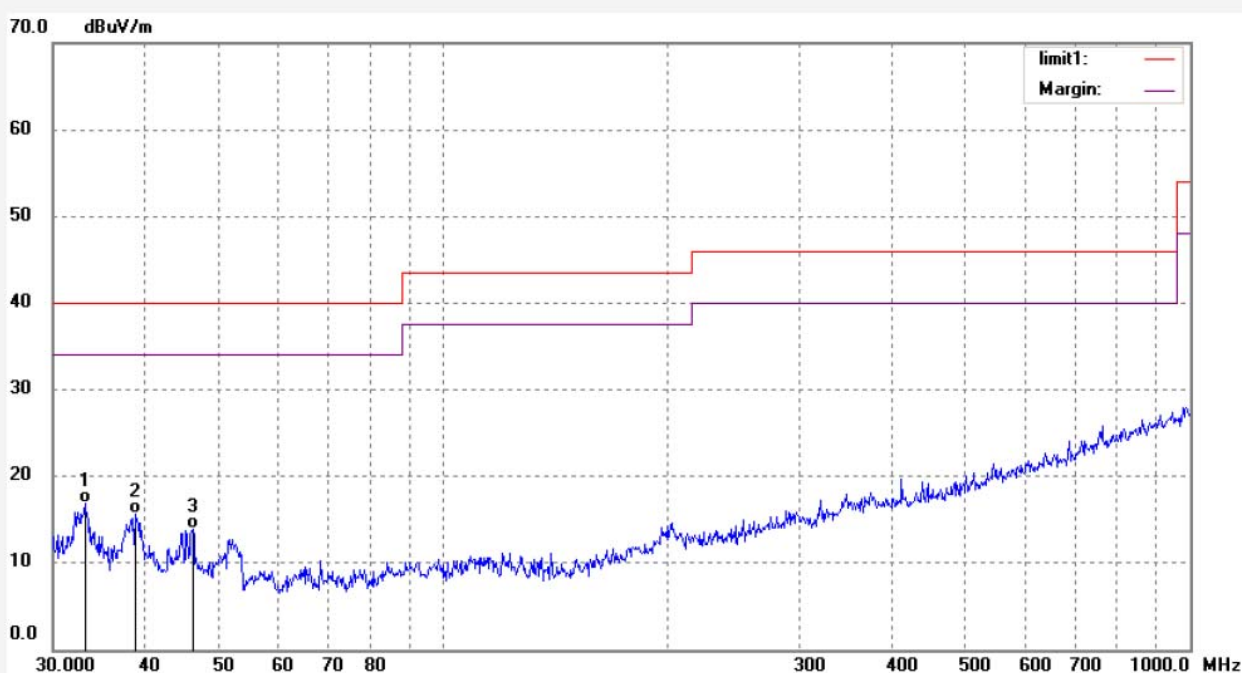


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.1015	34.06	-17.24	16.82	40.00	-23.18	QP			
2	38.6355	34.27	-18.67	15.60	40.00	-24.40	QP			
3	46.2180	33.63	-19.70	13.93	40.00	-26.07	QP			

Job No.: Ricky 2016 #762
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2457.387561MHz
Model: JLDK.37.06.01
Manufacturer: OKIN

Polarization: Vertical
Power Source: DC 4.5V
Date: 16/05/31/
Time: 11/13/45
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

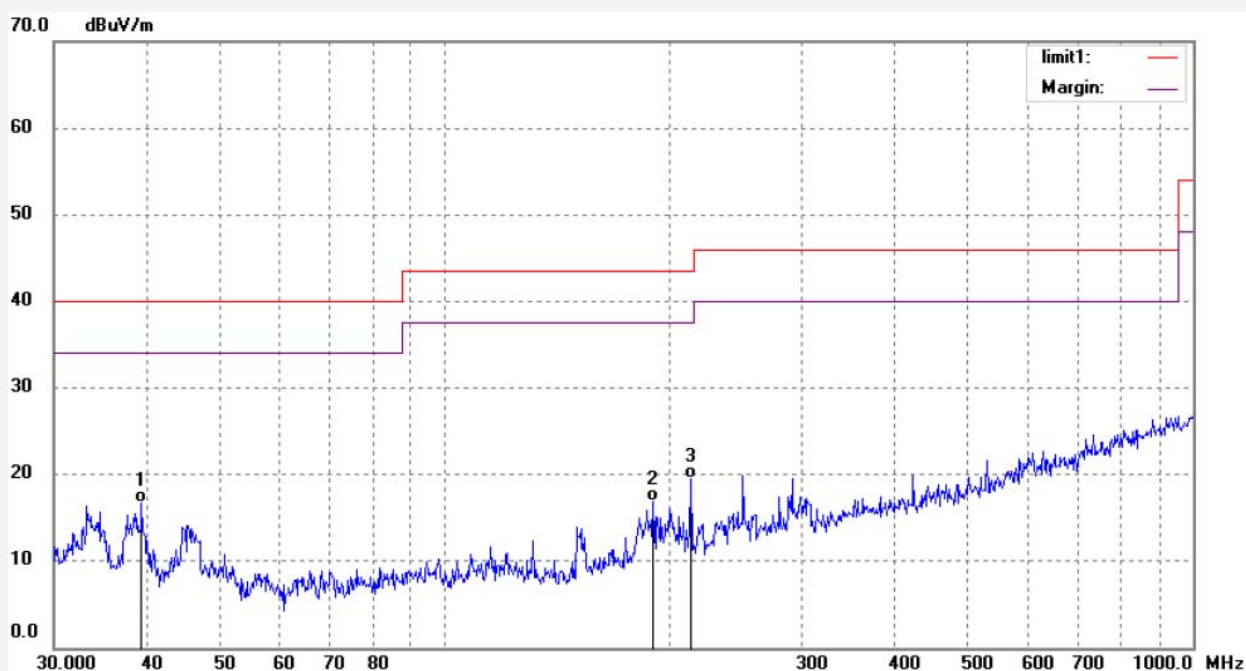

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.3203	35.59	-18.88	16.71	40.00	-23.29	QP			
2	189.7732	37.94	-20.99	16.95	43.50	-26.55	QP			
3	213.1031	39.53	-19.98	19.55	43.50	-23.95	QP			

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky 2016 #747
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2406.999080MHz
Model: JLDK.37.17.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 10/32/46
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

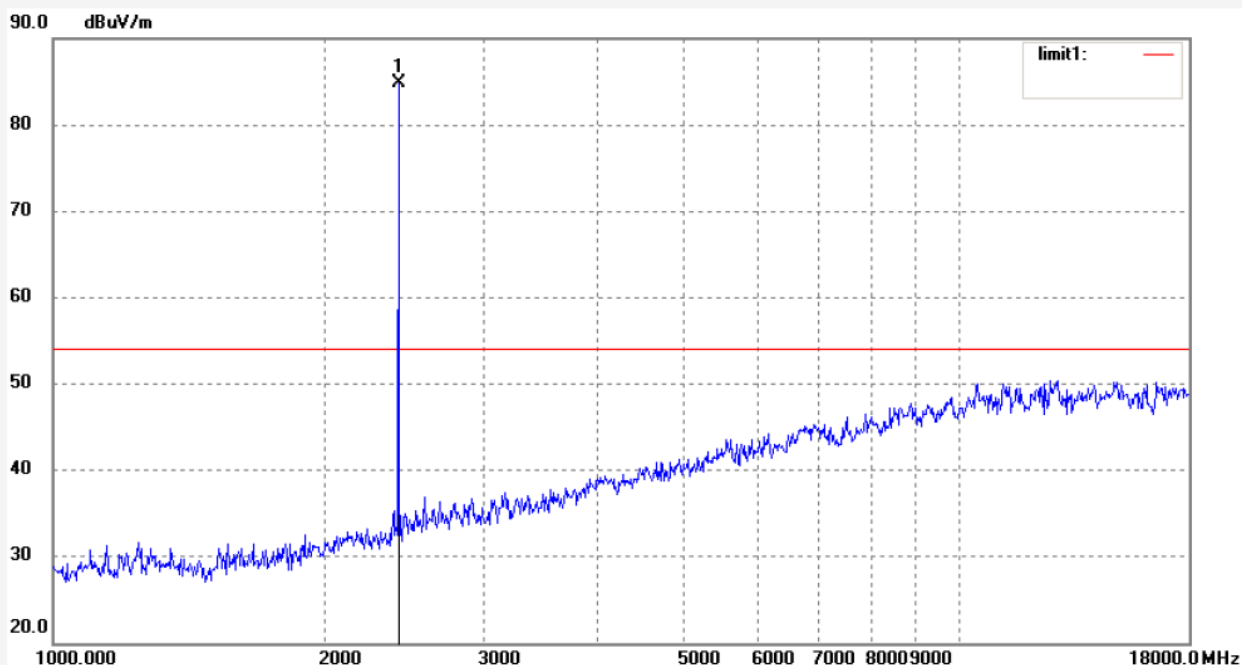

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.999	92.38	-7.48	84.90			peak			
2	2406.999	82.33	-7.48	74.85			AV			

Job No.: Ricky 2016 #746

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2406.999080MHz

Model: JLDK.37.17.01

Manufacturer: OKIN

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/30/37

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

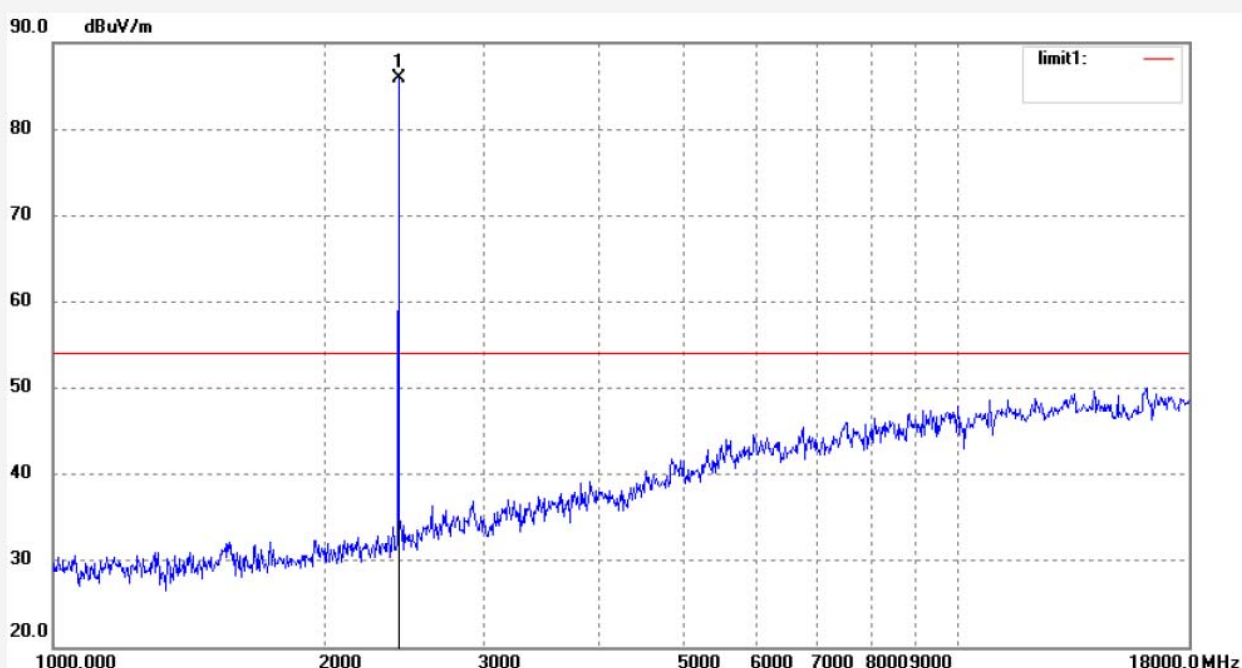

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.999	93.31	-7.48	85.83			peak			
2	2406.999	83.04	-7.48	75.56			AV			

Job No.: Ricky 2016 #748

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2431.793833MHz

Model: JLDK.37.17.01

Manufacturer: OKIN

Polarization: Horizontal

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/36/19

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

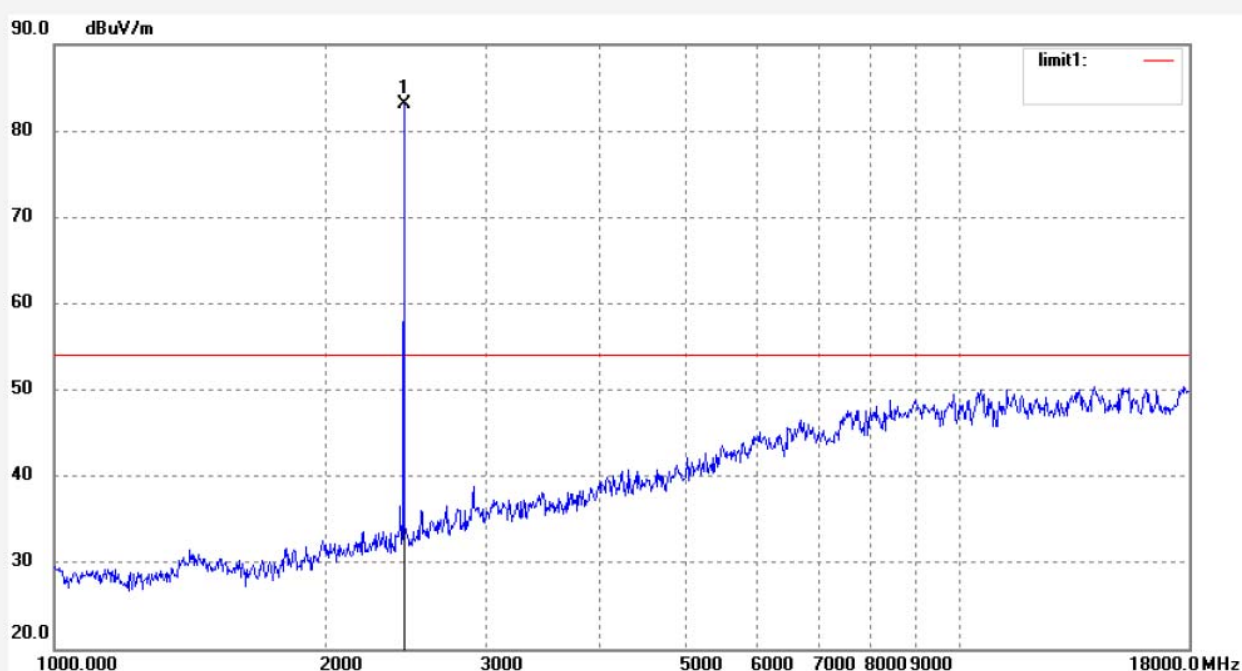

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2431.794	90.57	-7.41	83.16			peak			
2	2431.794	80.47	-7.41	73.06			AV			

Job No.: Ricky 2016 #749

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2431.793833MHz

Model: JLDK.37.17.01

Manufacturer: OKIN

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/38/23

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

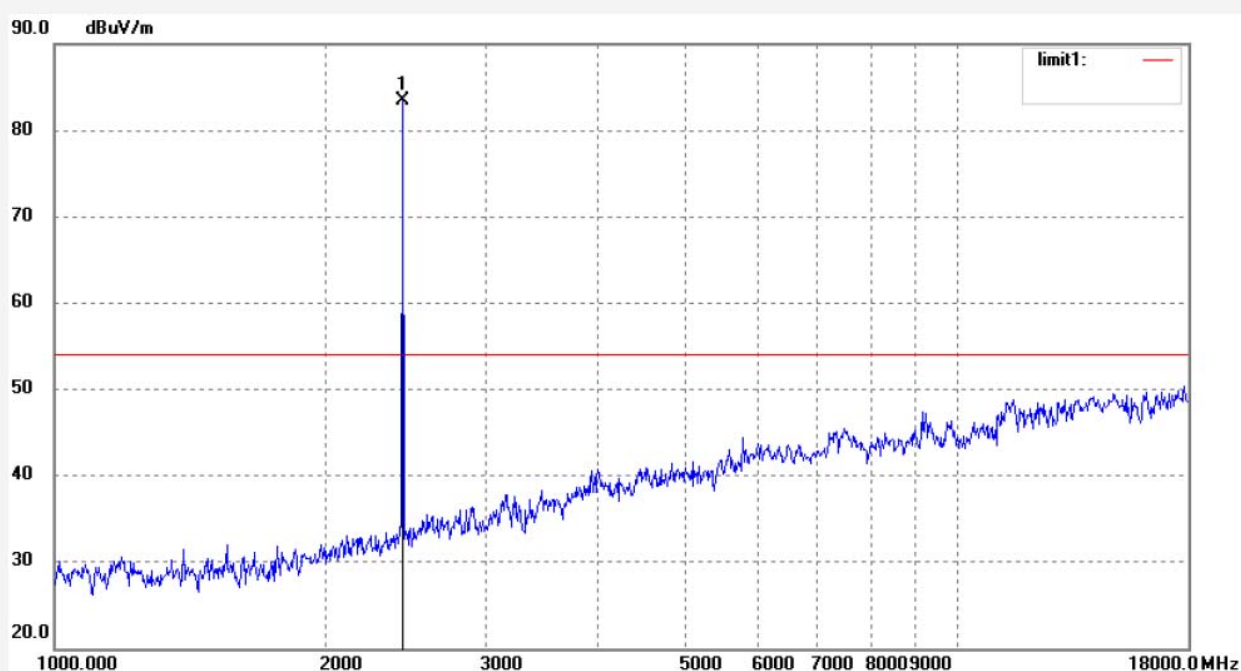

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2431.794	90.87	-7.41	83.46			peak			
2	2431.794	80.73	-7.41	73.32			AV			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky 2016 #751
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Remote Handset
Mode: TX 2457.387561MHz
Model: JLDK.37.17.01
Manufacturer: OKIN

Polarization: Horizontal
Power Source: DC 4.5V
Date: 16/05/31/
Time: 10/42/38
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20161015

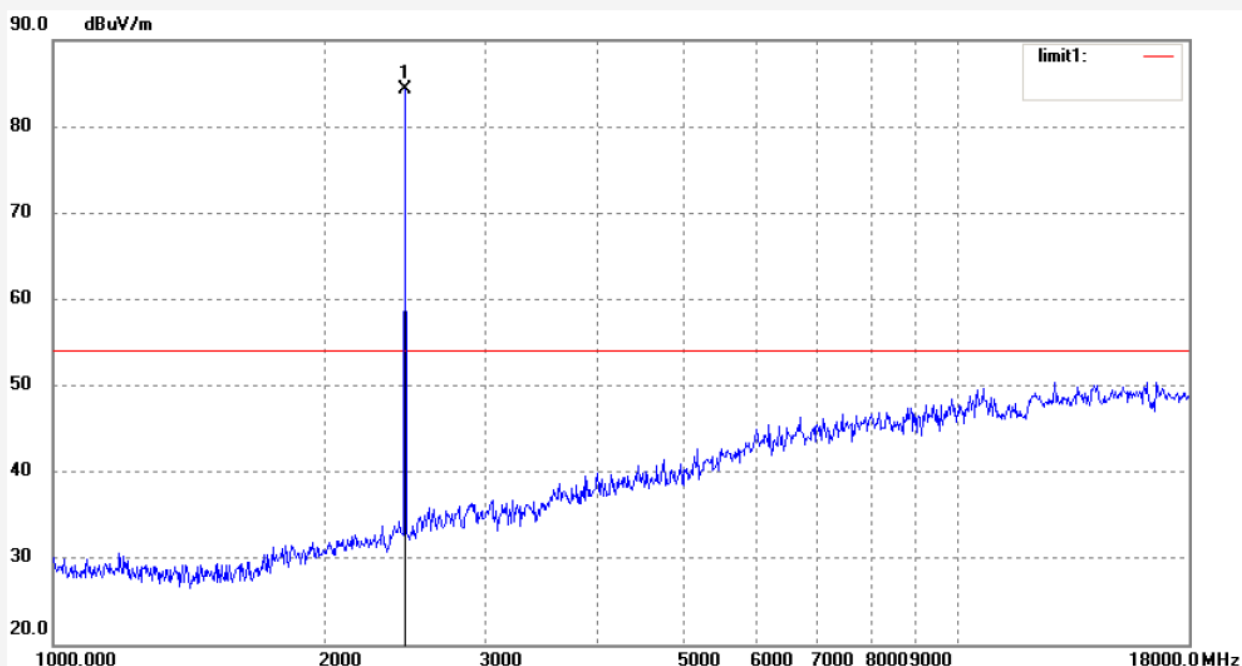

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.388	91.61	-7.36	84.25			peak			
2	2457.388	81.47	-7.36	74.11			AV			

Job No.: Ricky 2016 #750

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Remote Handset

Mode: TX 2457.387561MHz

Model: JLDK.37.17.01

Manufacturer: OKIN

Polarization: Vertical

Power Source: DC 4.5V


Date: 16/05/31/

Time: 10/40/40

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161015

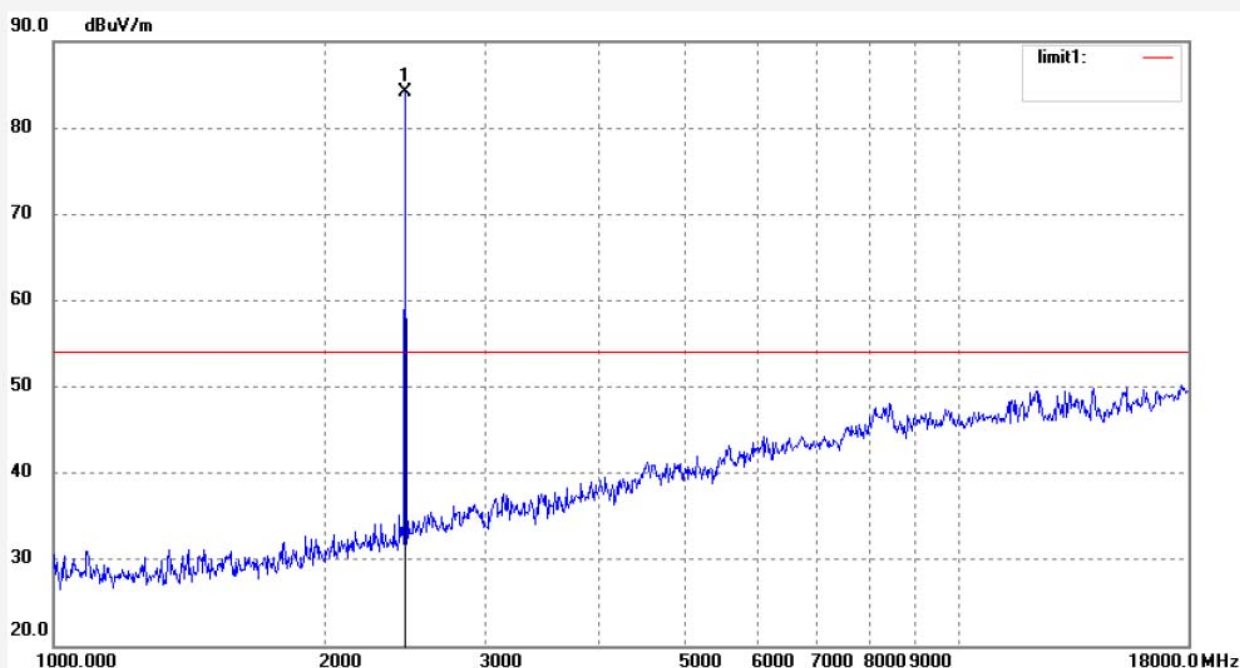

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.388	91.52	-7.36	84.16			peak			
2	2457.388	81.39	-7.36	74.03			AV			


8. ANTENNA REQUIREMENT

8.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

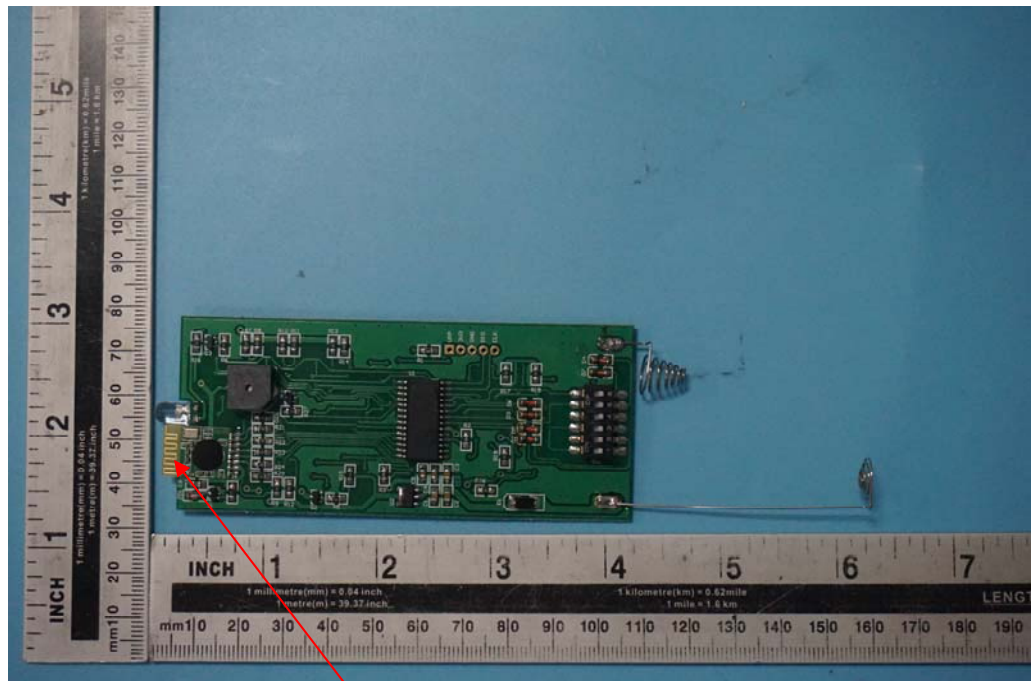

Antenna