



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6565 MHz		
Polarization:	Vertical		
Remark:			

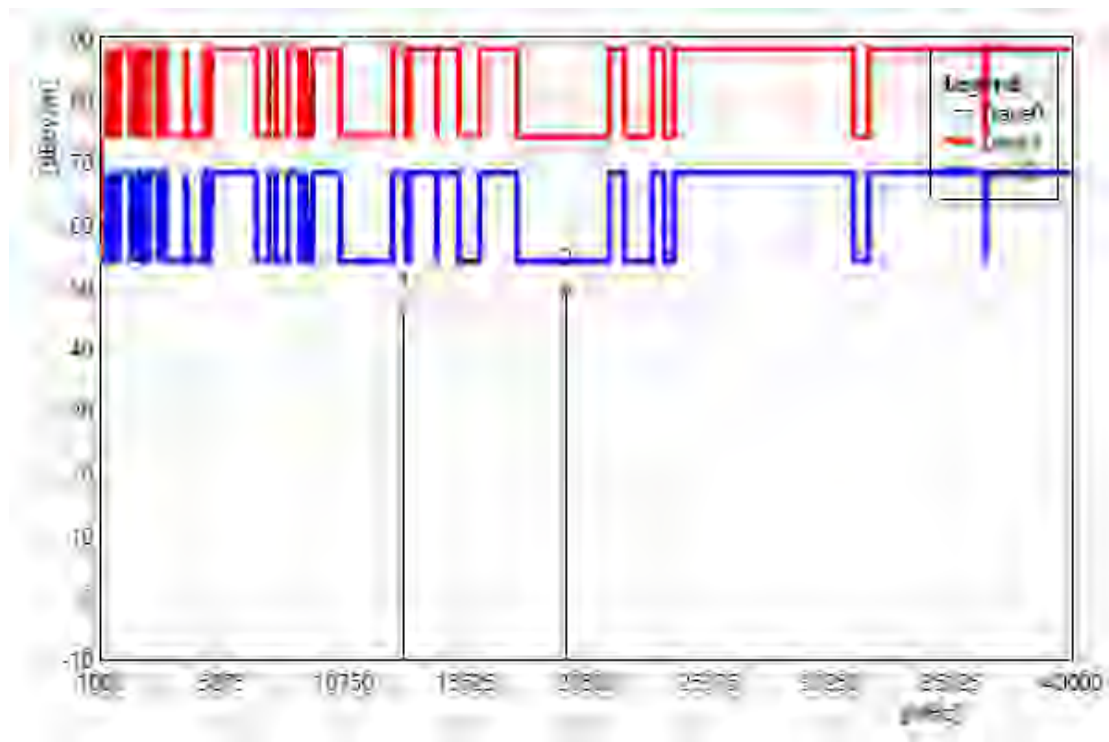


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	33.26	12.56	45.82	88.20	-42.38	PEAK
2	19695.00	32.96	16.09	49.05	74.00	-24.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6565 MHz		
Polarization:	Horizontal		
Remark:			

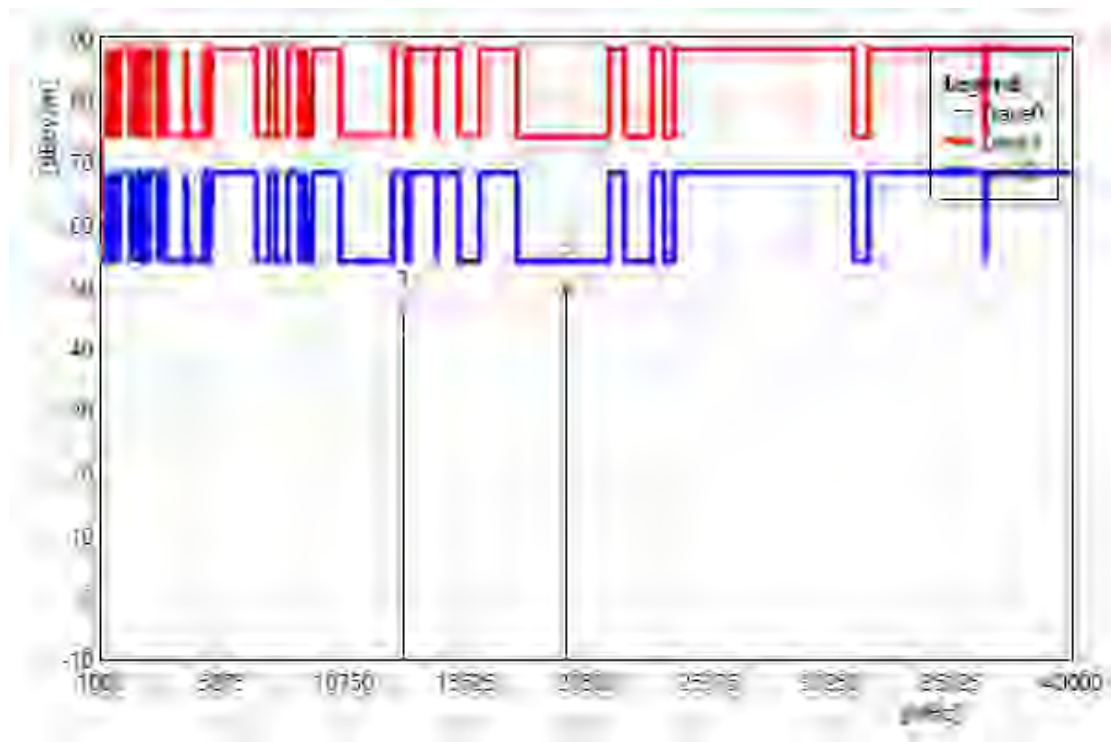


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	33.18	12.56	45.74	88.20	-42.46	PEAK
2	19695.00	33.69	16.09	49.78	74.00	-24.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6685 MHz		
Polarization:	Vertical		
Remark:			

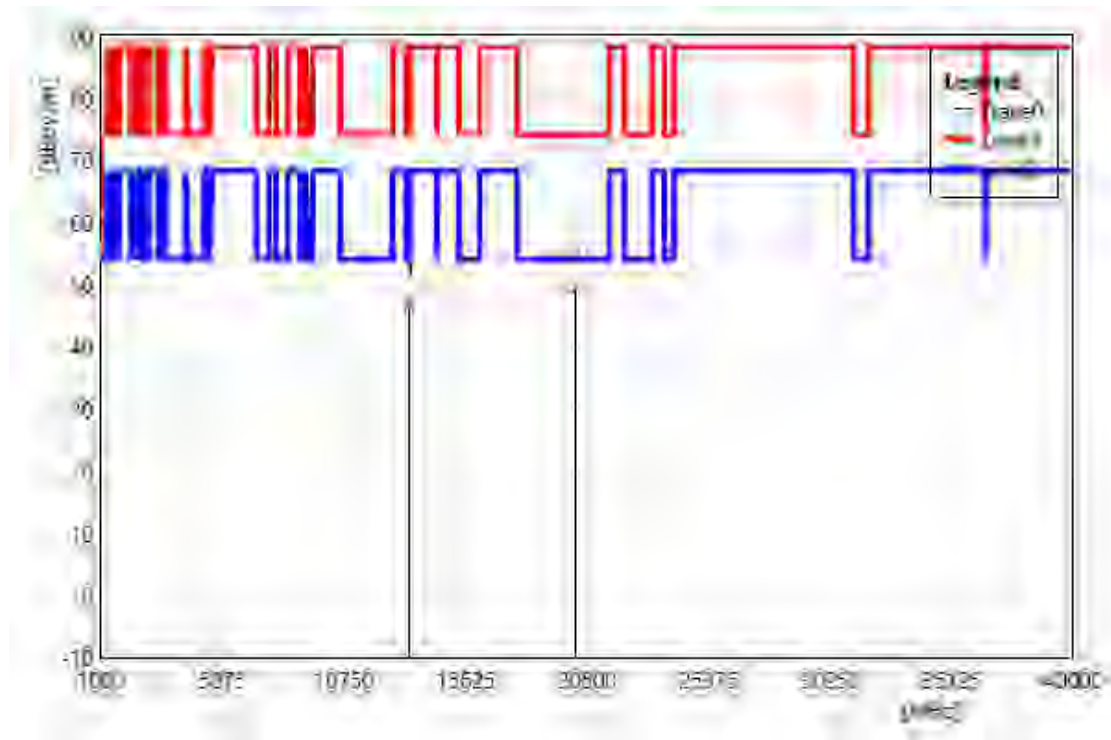


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	33.39	13.32	46.71	74.00	-27.29	PEAK
2	20055.00	33.51	15.96	49.47	74.00	-24.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6685 MHz		
Polarization:	Horizontal		
Remark:			

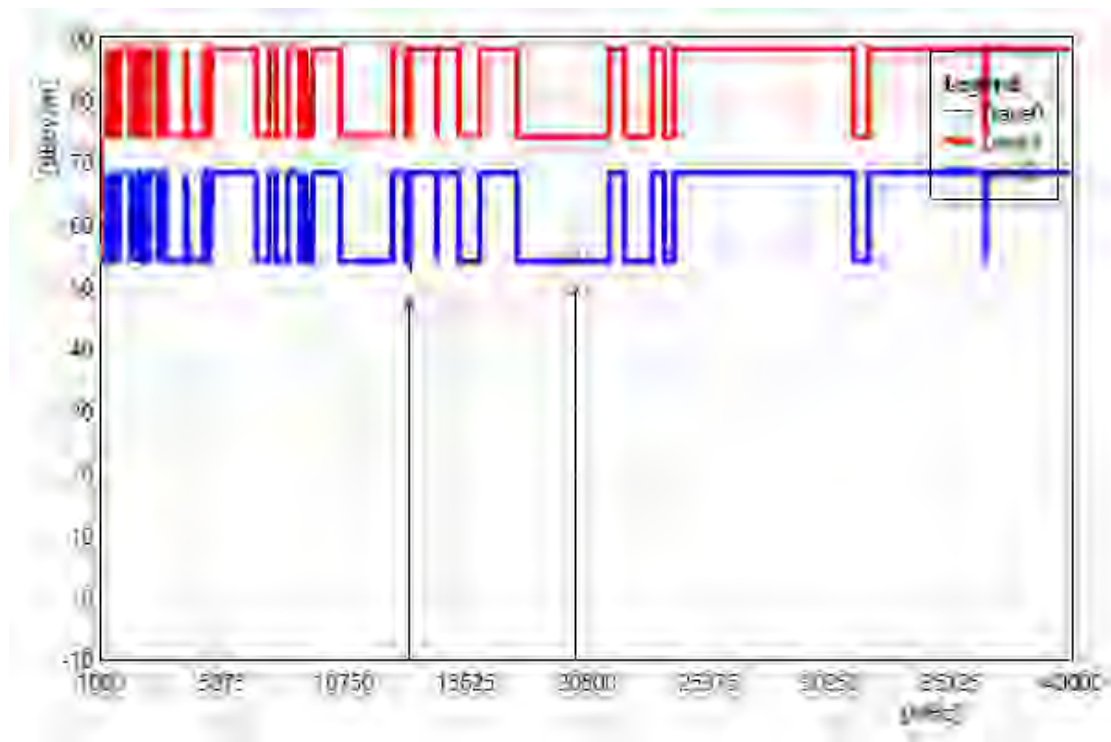


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	34.12	13.32	47.44	74.00	-26.56	PEAK
2	20055.00	33.46	15.96	49.42	74.00	-24.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6845 MHz		
Polarization:	Vertical		
Remark:			

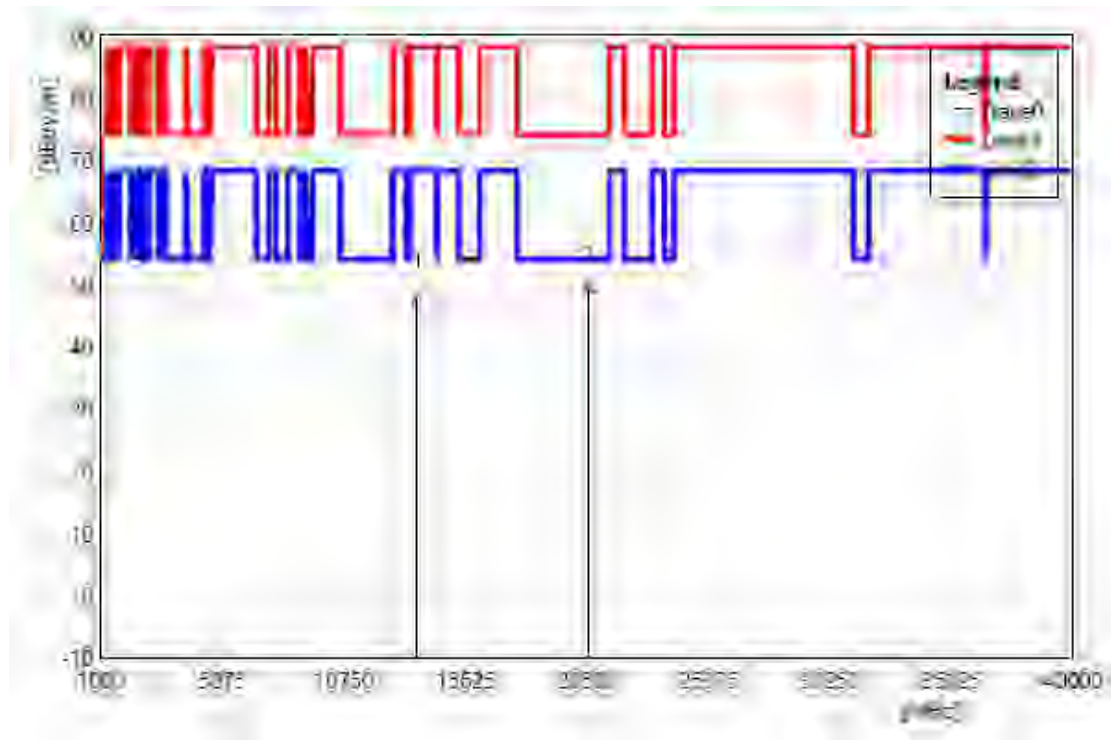


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	33.98	14.09	48.07	88.20	-40.13	PEAK
2	20535.00	32.90	16.57	49.47	74.00	-24.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6845 MHz		
Polarization:	Horizontal		
Remark:			

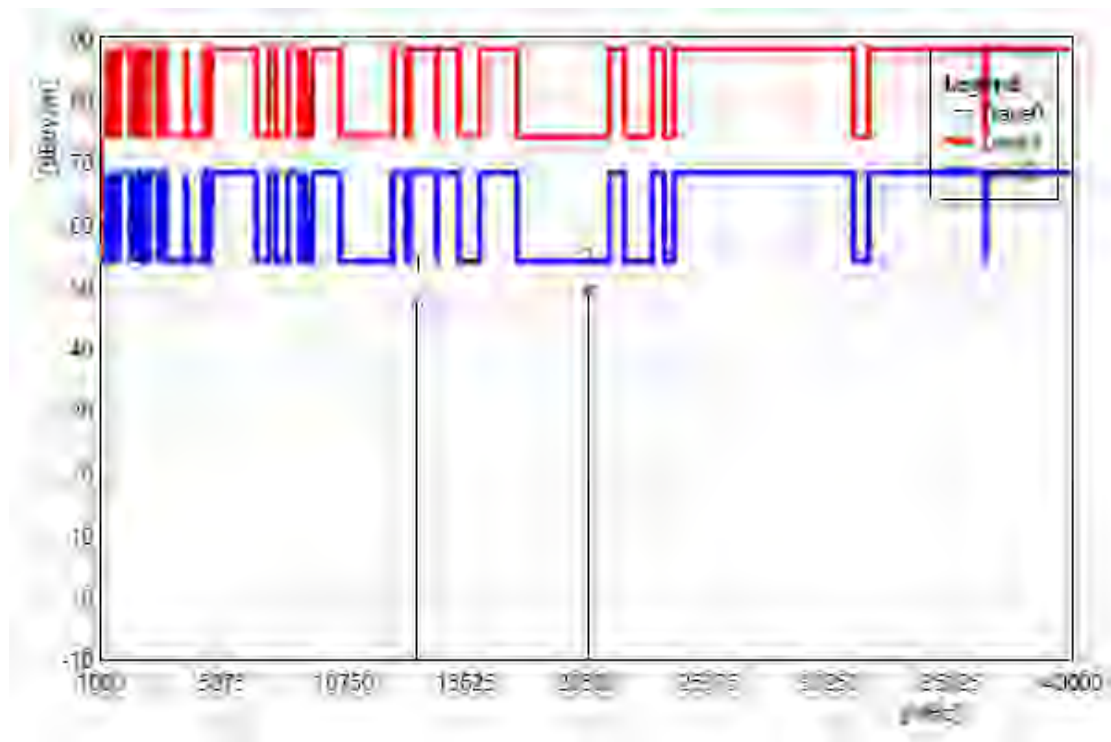


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	33.77	14.09	47.86	88.20	-40.34	PEAK
2	20535.00	32.69	16.57	49.26	74.00	-24.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6885 MHz		
Polarization:	Vertical		
Remark:			

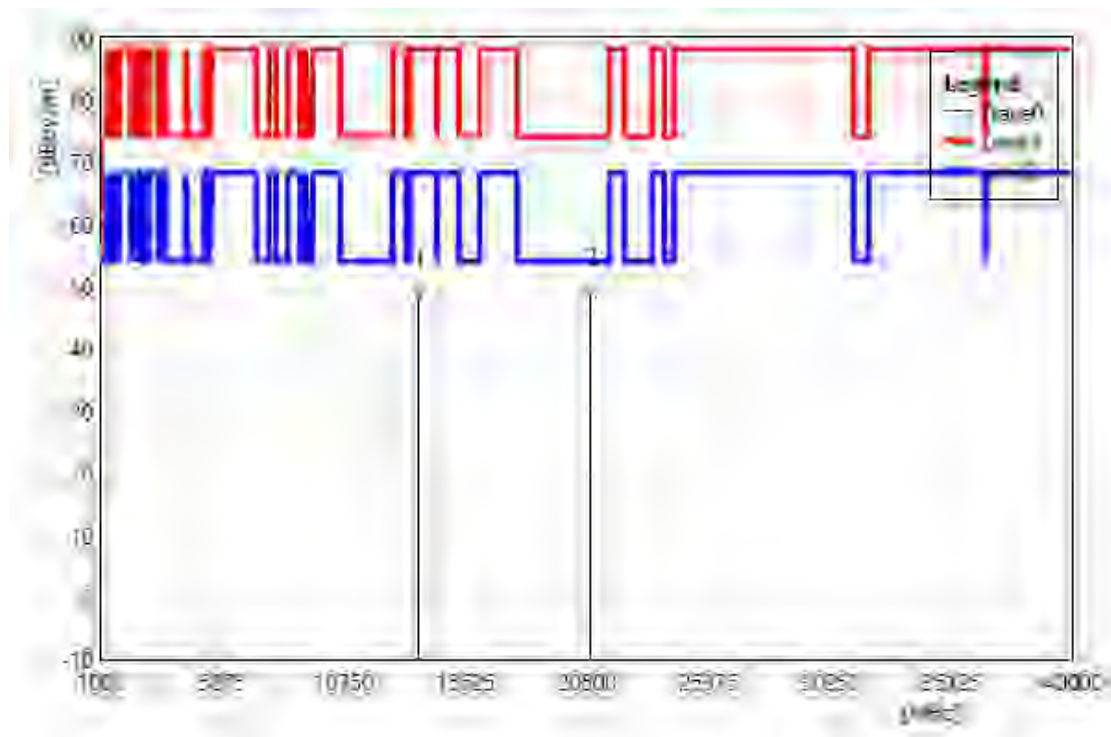


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	34.36	14.06	48.42	88.20	-39.78	PEAK
2	20655.00	32.37	16.72	49.09	74.00	-24.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6885 MHz		
Polarization:	Horizontal		
Remark:			

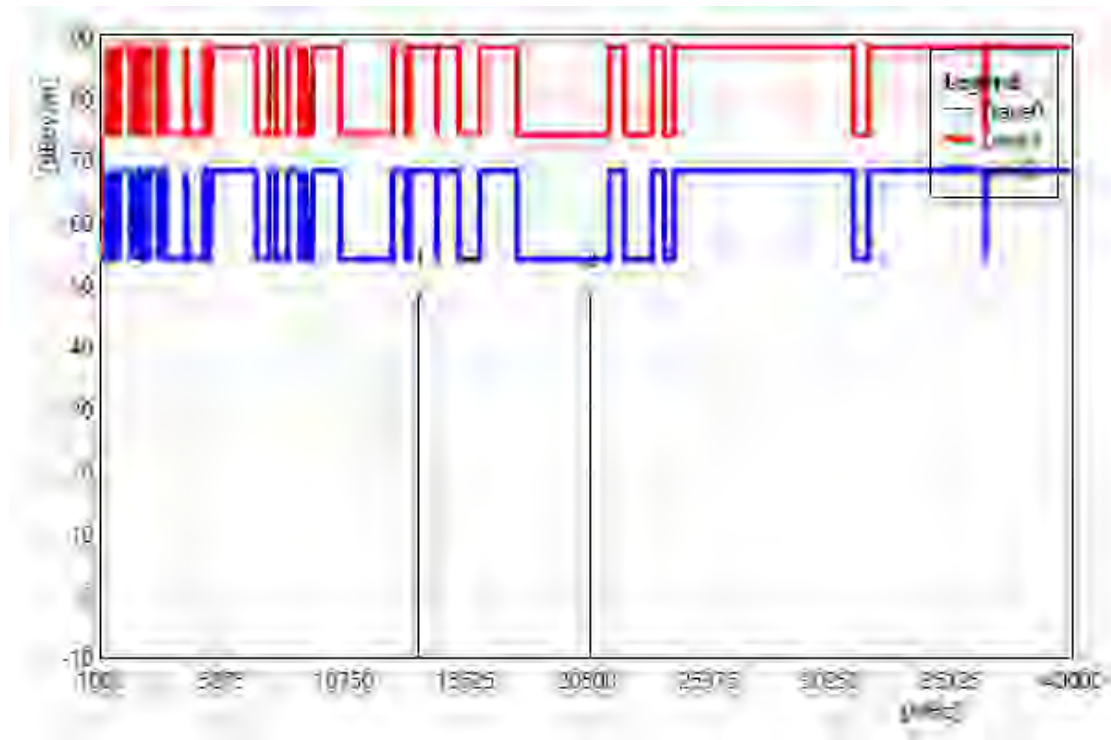


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	34.26	14.06	48.32	88.20	-39.88	PEAK
2	20655.00	31.60	16.72	48.32	74.00	-25.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6925 MHz		
Polarization:	Vertical		
Remark:			

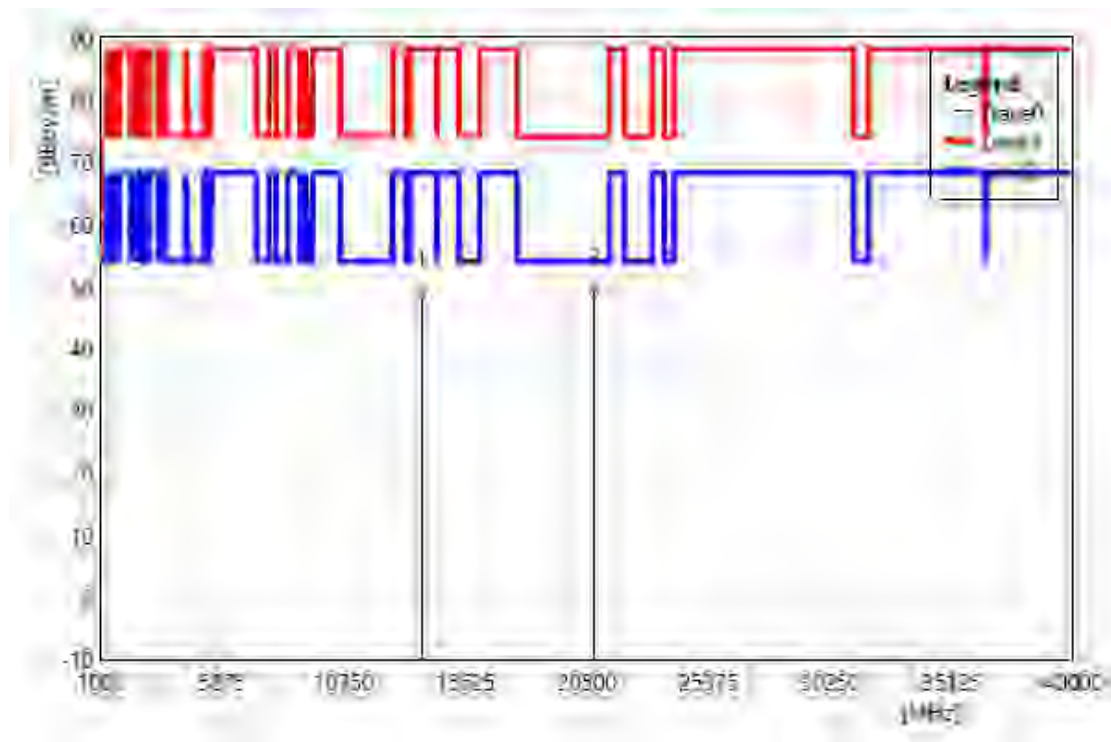


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	34.30	14.30	48.60	88.20	-39.60	PEAK
2	20775.00	32.59	16.87	49.46	74.00	-24.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 6925 MHz		
Polarization:	Horizontal		
Remark:			

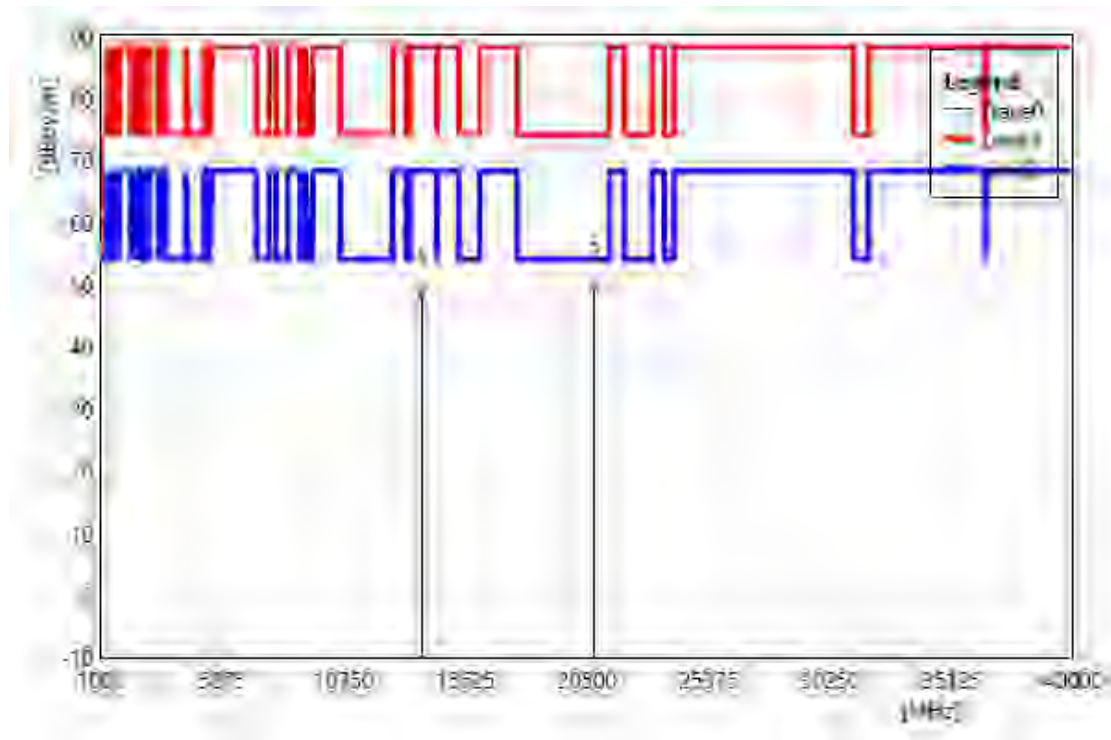


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	34.16	14.30	48.46	88.20	-39.74	PEAK
2	20775.00	32.90	16.87	49.77	74.00	-24.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7005 MHz		
Polarization:	Vertical		
Remark:			

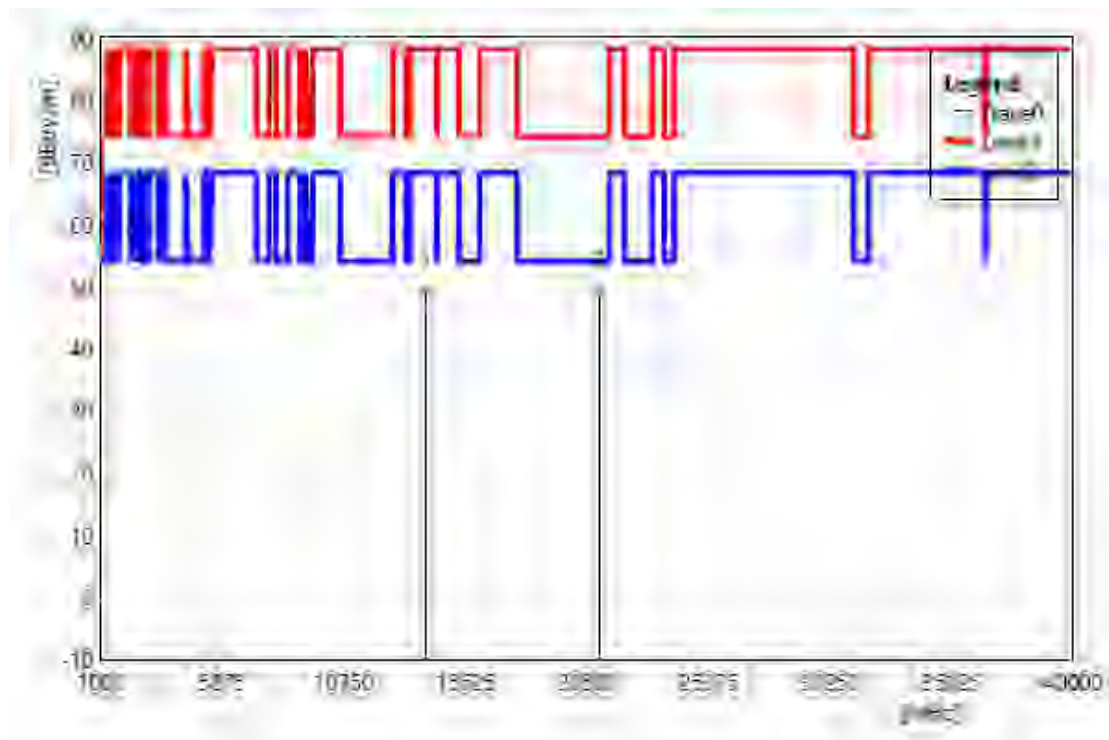


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	34.75	14.58	49.33	88.20	-38.87	PEAK
2	21015.00	32.31	16.42	48.73	74.00	-25.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7005 MHz		
Polarization:	Horizontal		
Remark:			

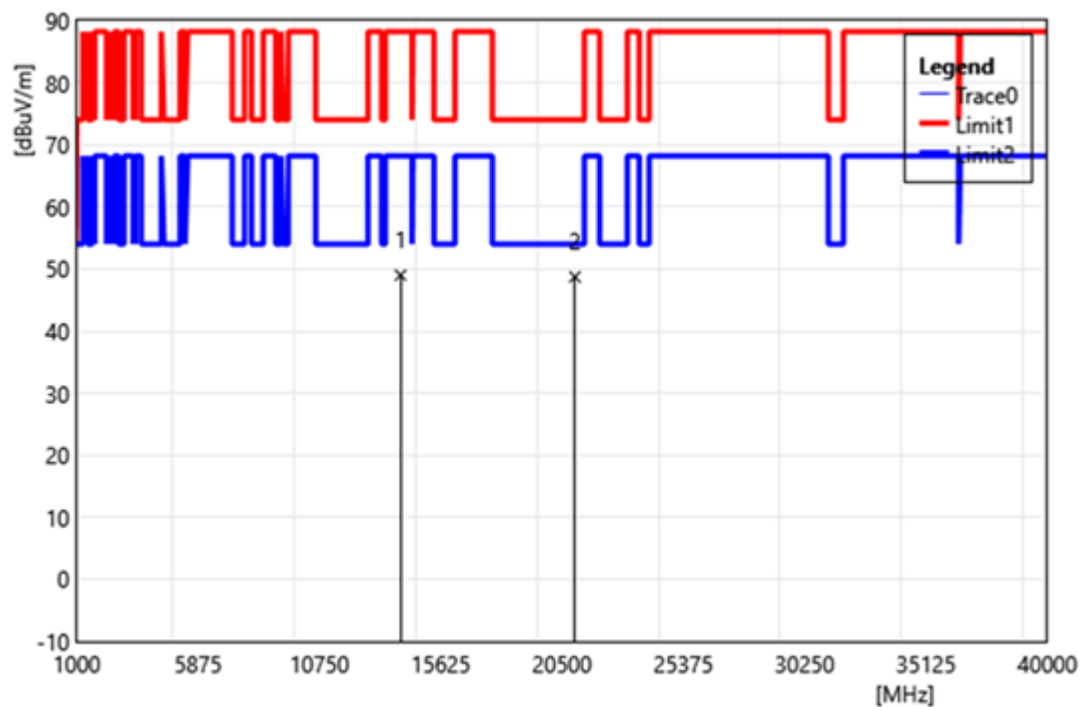


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	33.79	14.58	48.37	88.20	-39.83	PEAK
2	21015.00	32.37	16.42	48.79	74.00	-25.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

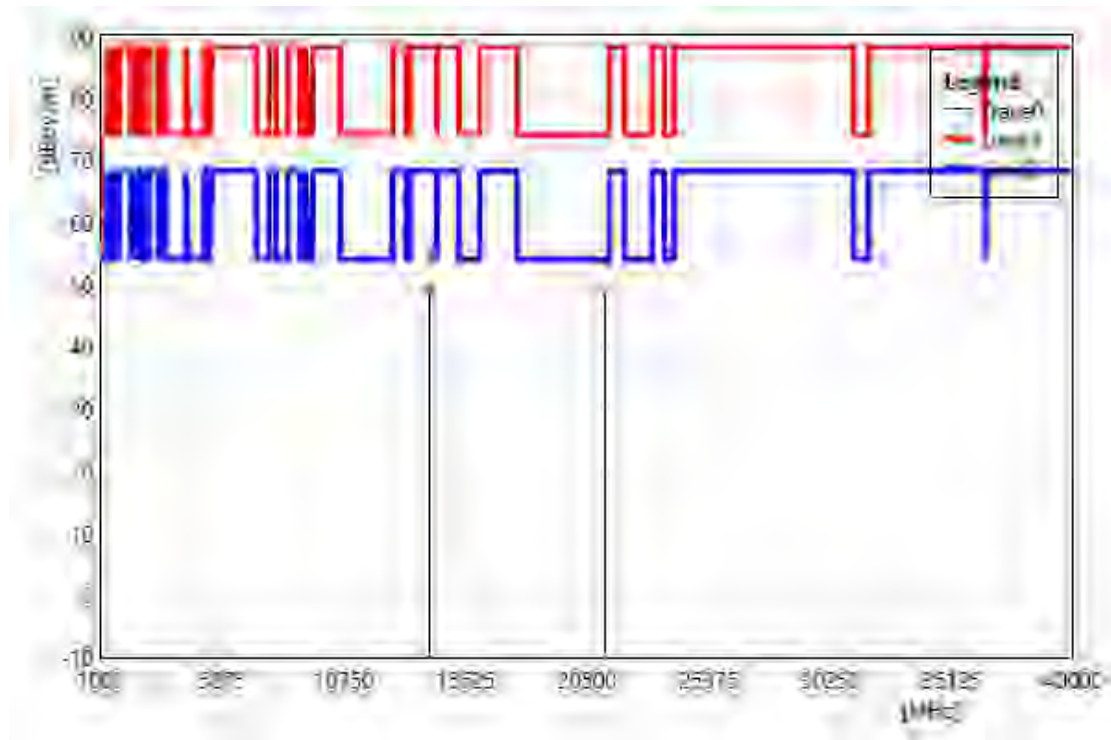


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	33.76	15.20	48.96	88.20	-39.24	PEAK
2	21255.00	32.22	16.66	48.88	74.00	-25.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

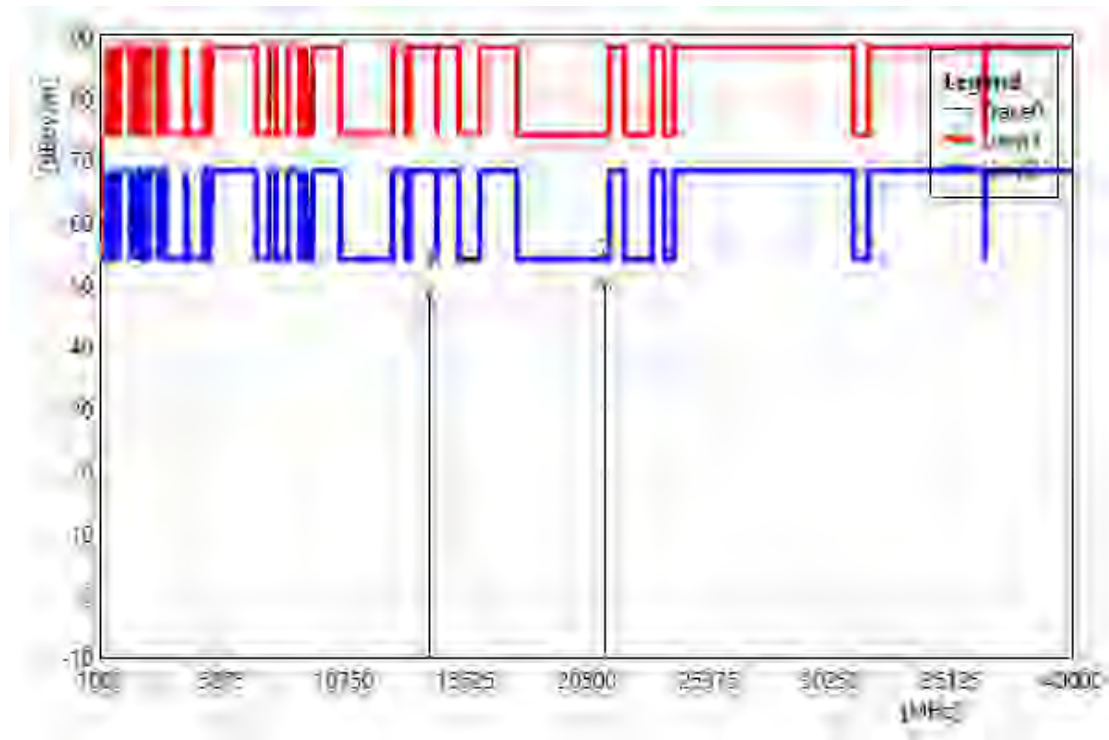


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	33.19	15.20	48.39	88.20	-39.81	PEAK
2	21255.00	33.45	16.66	50.11	74.00	-23.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

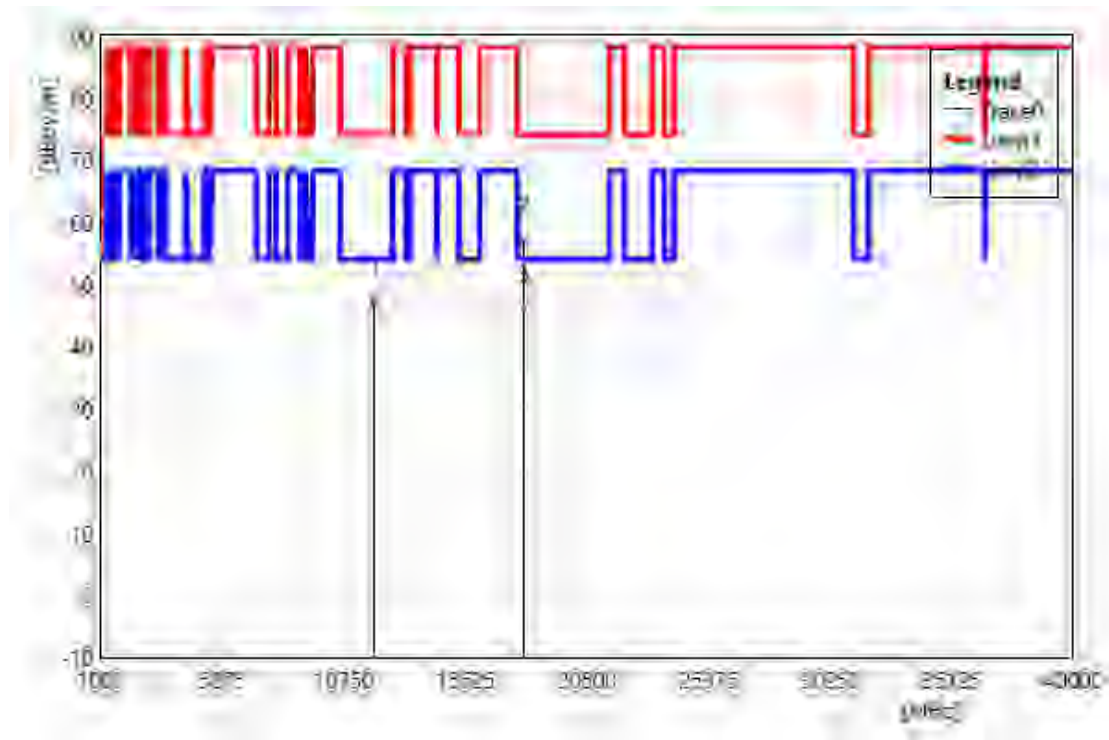


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	35.61	11.78	47.39	74.00	-26.61	PEAK
2	17955.00	32.92	24.24	57.16	74.00	-16.84	PEAK
3	17955.00	21.93	24.24	46.17	54.00	-7.83	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

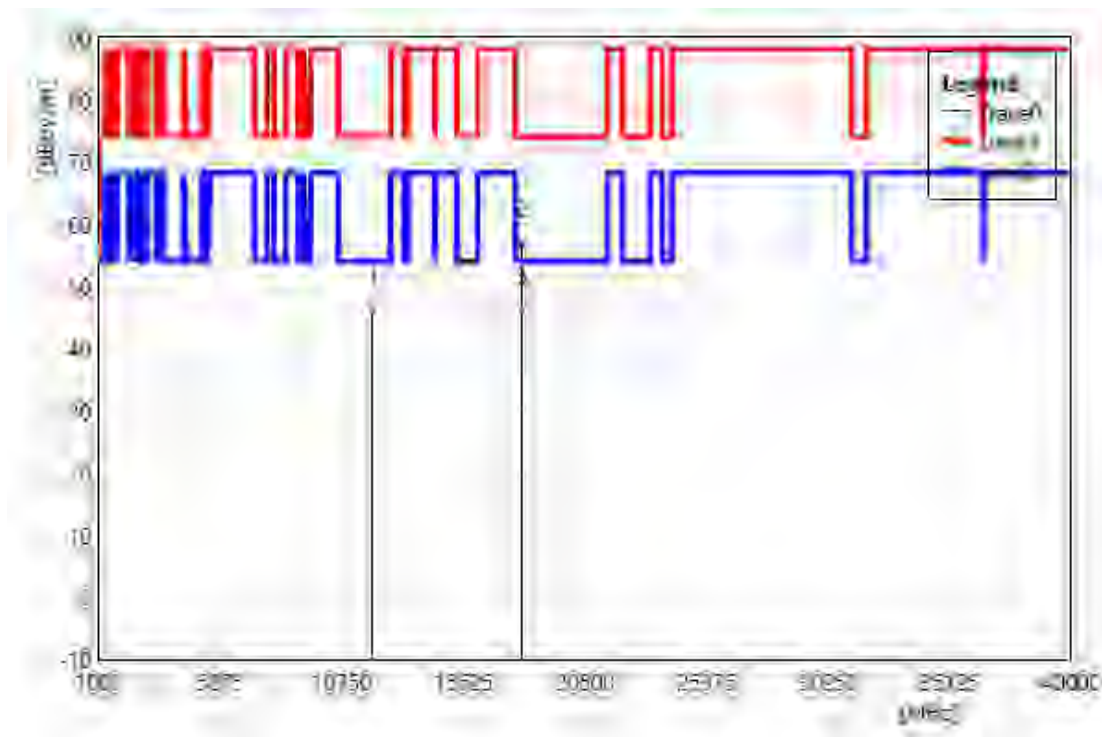


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	34.38	11.78	46.16	74.00	-27.84	PEAK
2	17955.00	32.63	24.24	56.87	74.00	-17.13	PEAK
3	17955.00	21.90	24.24	46.14	54.00	-7.86	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6145 MHz		
Polarization:	Vertical		
Remark:			

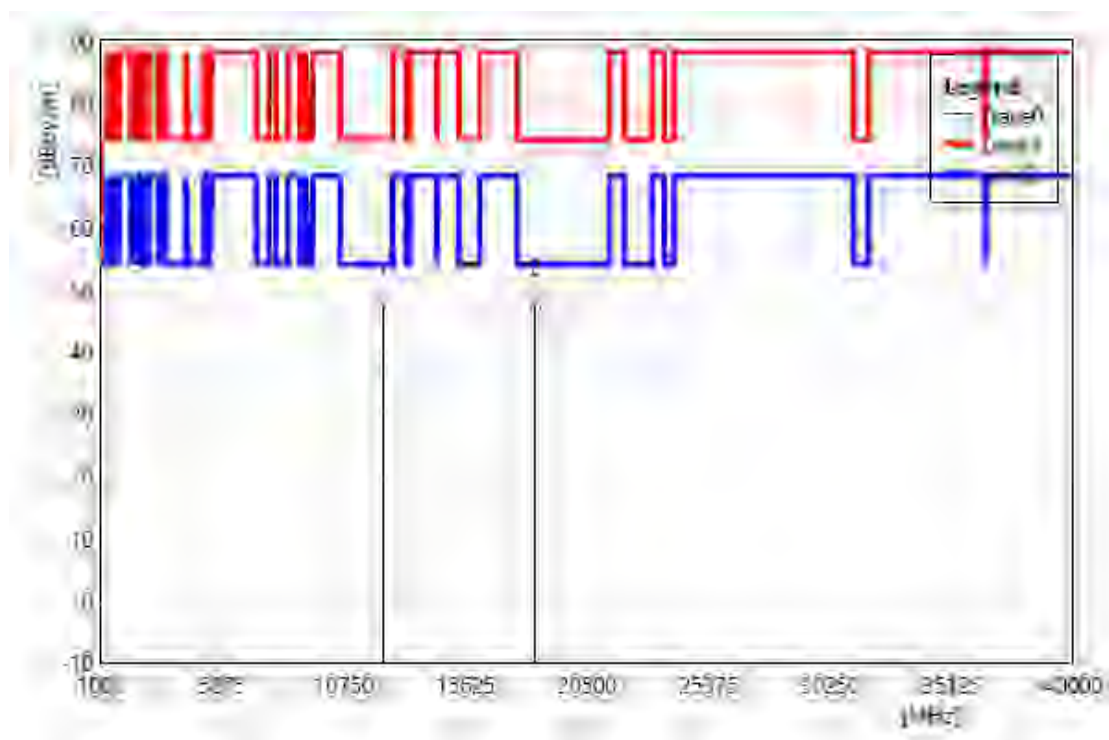


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	35.75	11.74	47.49	74.00	-26.51	PEAK
2	18435.00	32.88	14.98	47.86	74.00	-26.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6145 MHz		
Polarization:	Horizontal		
Remark:			

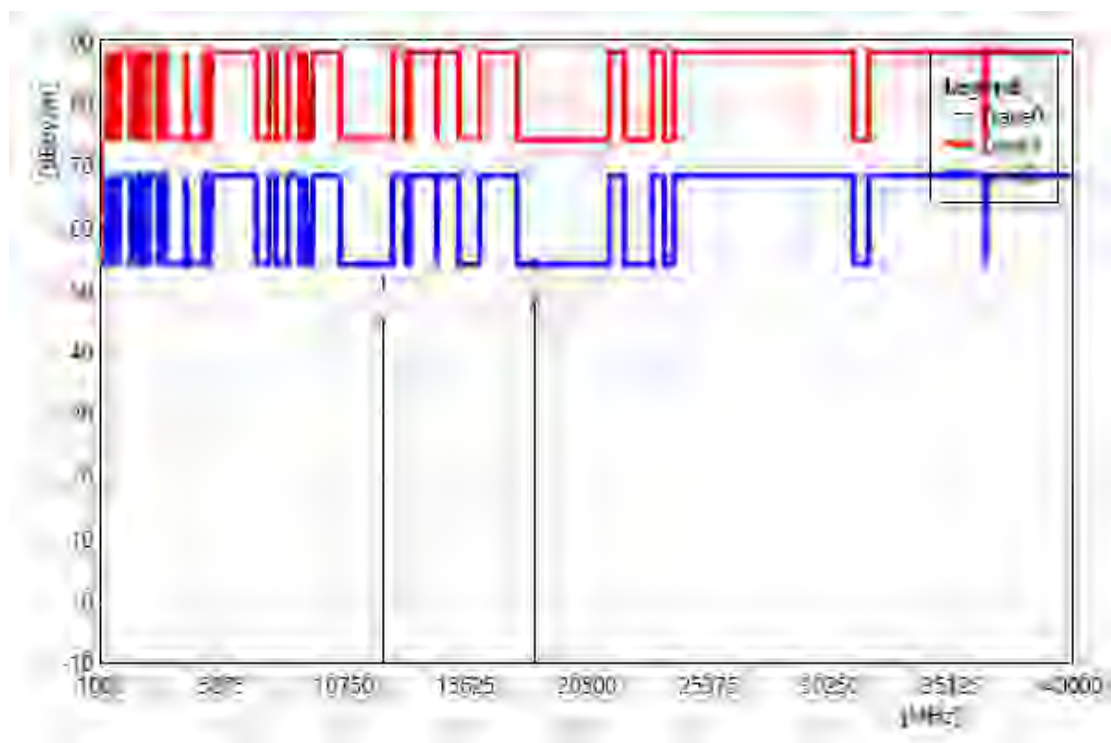


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	33.41	11.74	45.15	74.00	-28.85	PEAK
2	18435.00	33.20	14.98	48.18	74.00	-25.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6385 MHz		
Polarization:	Vertical		
Remark:			

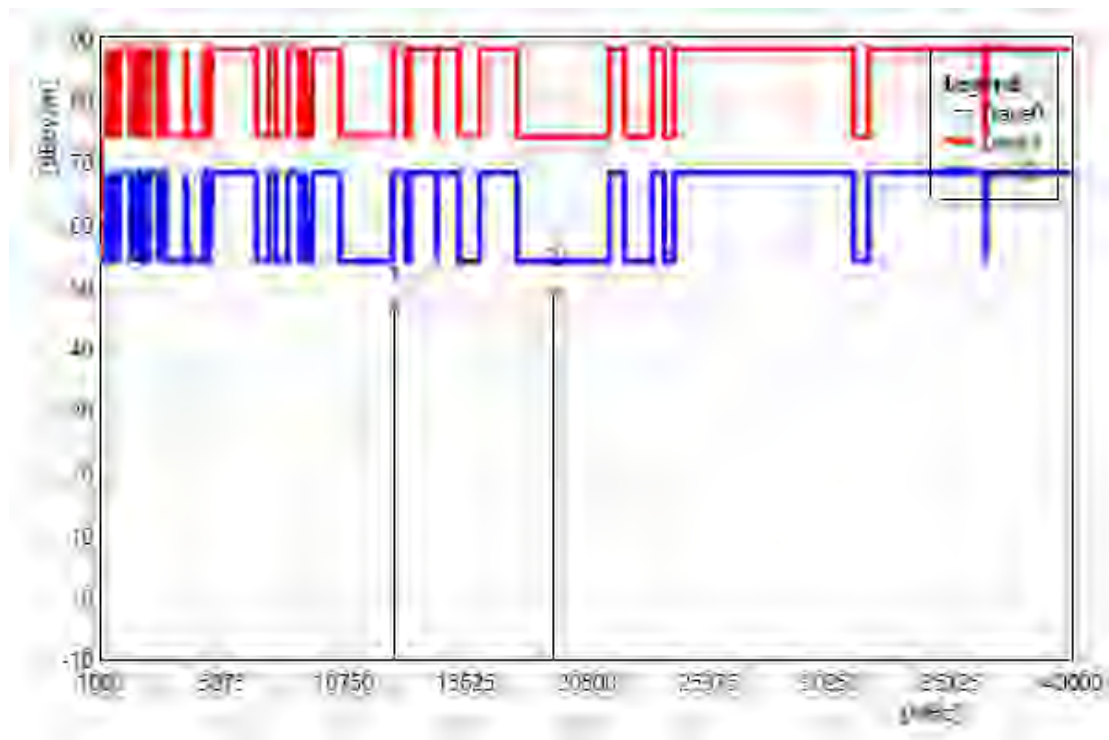


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.21	12.27	46.48	88.20	-41.72	PEAK
2	19155.00	33.00	16.09	49.09	74.00	-24.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6385 MHz		
Polarization:	Horizontal		
Remark:			

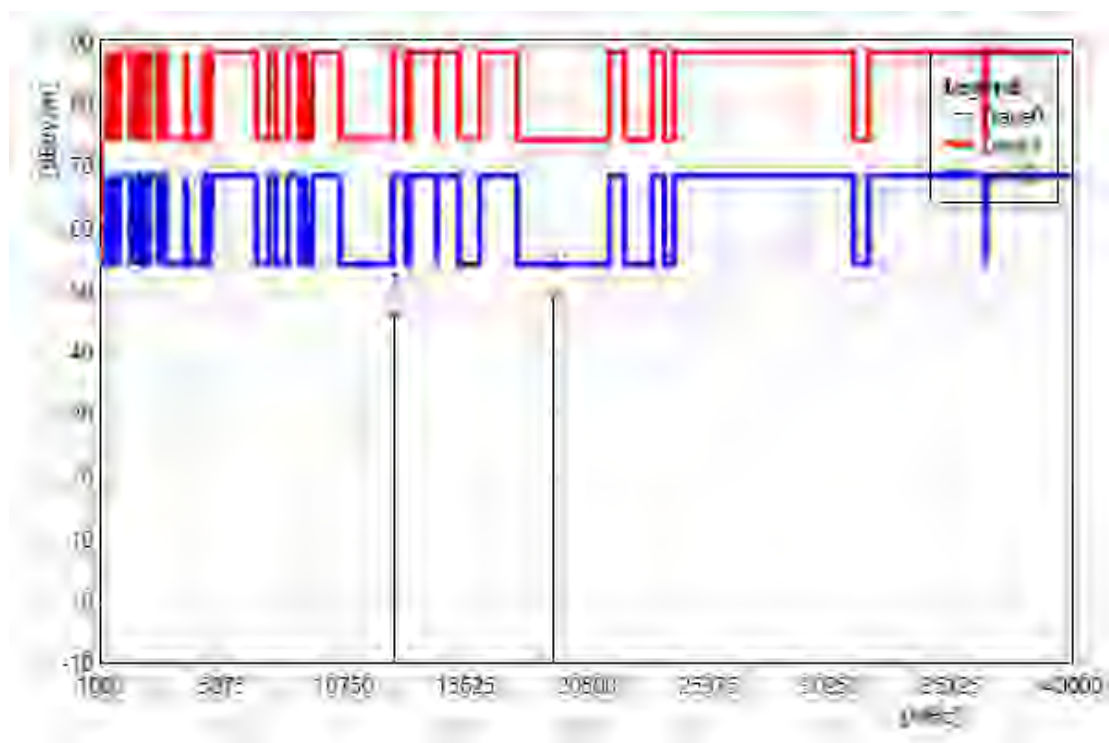


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	33.52	12.27	45.79	88.20	-42.41	PEAK
2	19155.00	32.61	16.09	48.70	74.00	-25.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6465 MHz		
Polarization:	Vertical		
Remark:			

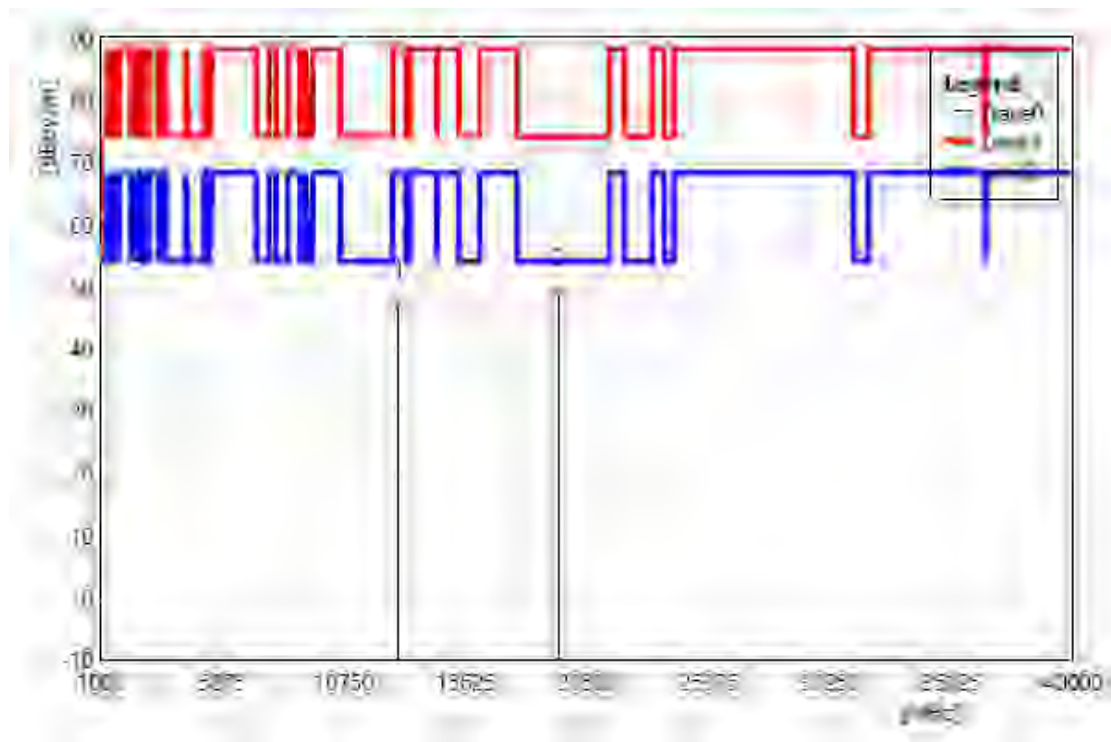


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	34.35	12.54	46.89	88.20	-41.31	PEAK
2	19395.00	32.51	16.56	49.07	74.00	-24.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6465 MHz		
Polarization:	Horizontal		
Remark:			

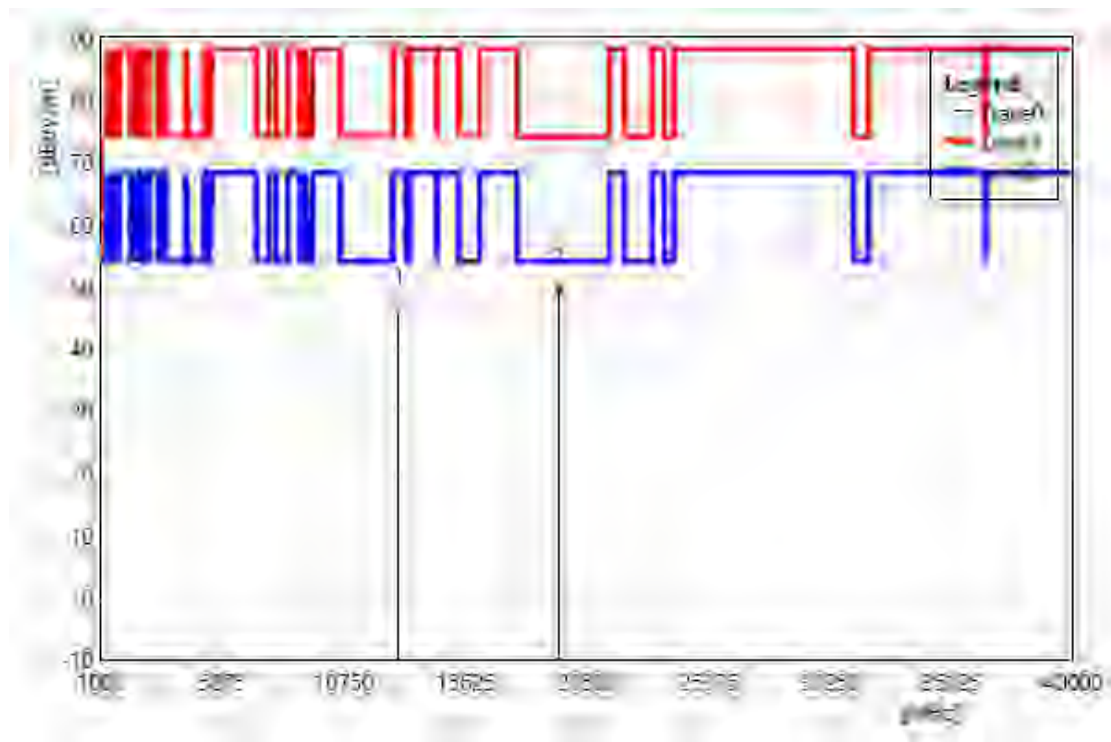


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	33.41	12.54	45.95	88.20	-42.25	PEAK
2	19395.00	32.82	16.56	49.38	74.00	-24.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6545 MHz		
Polarization:	Vertical		
Remark:			

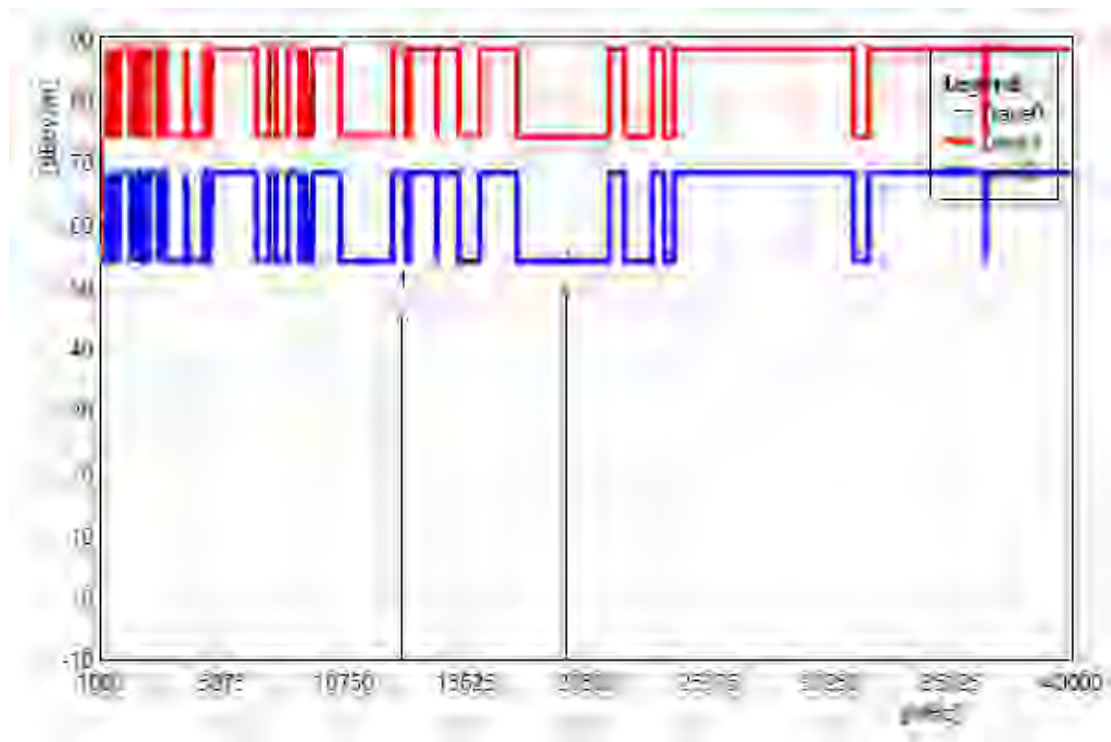


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	32.98	12.52	45.50	88.20	-42.70	PEAK
2	19635.00	32.70	16.00	48.70	74.00	-25.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6545 MHz		
Polarization:	Horizontal		
Remark:			

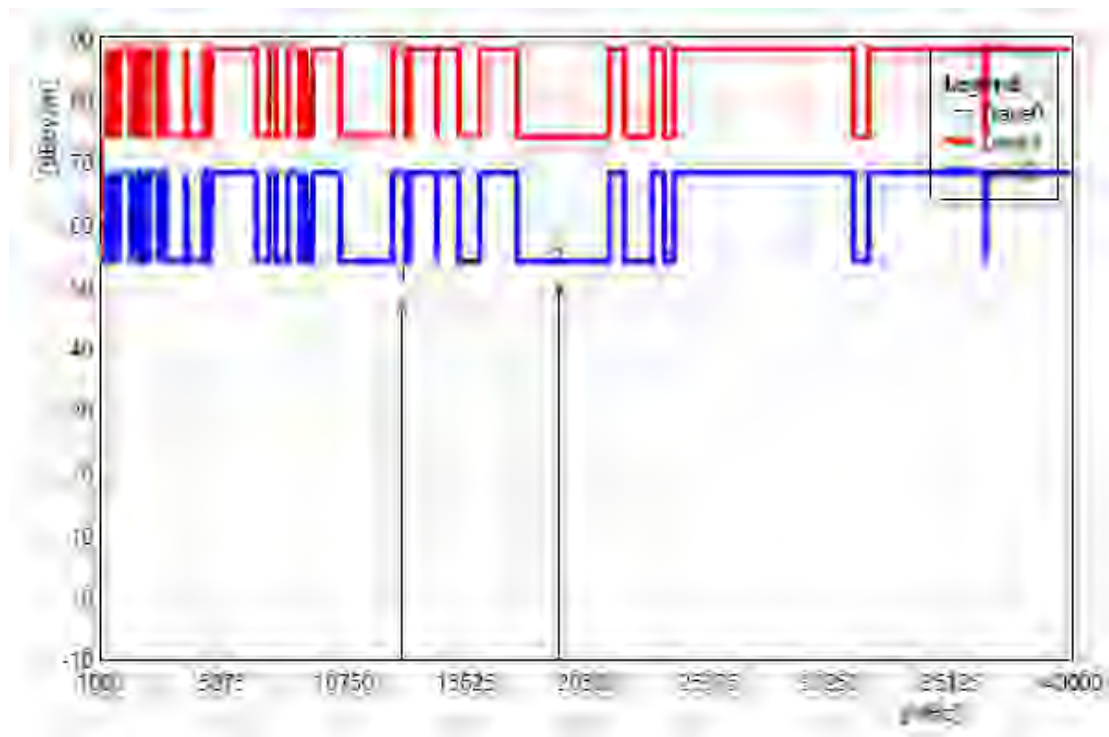


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	34.07	12.52	46.59	88.20	-41.61	PEAK
2	19395.00	32.73	16.56	49.29	74.00	-24.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6625 MHz		
Polarization:	Vertical		
Remark:			

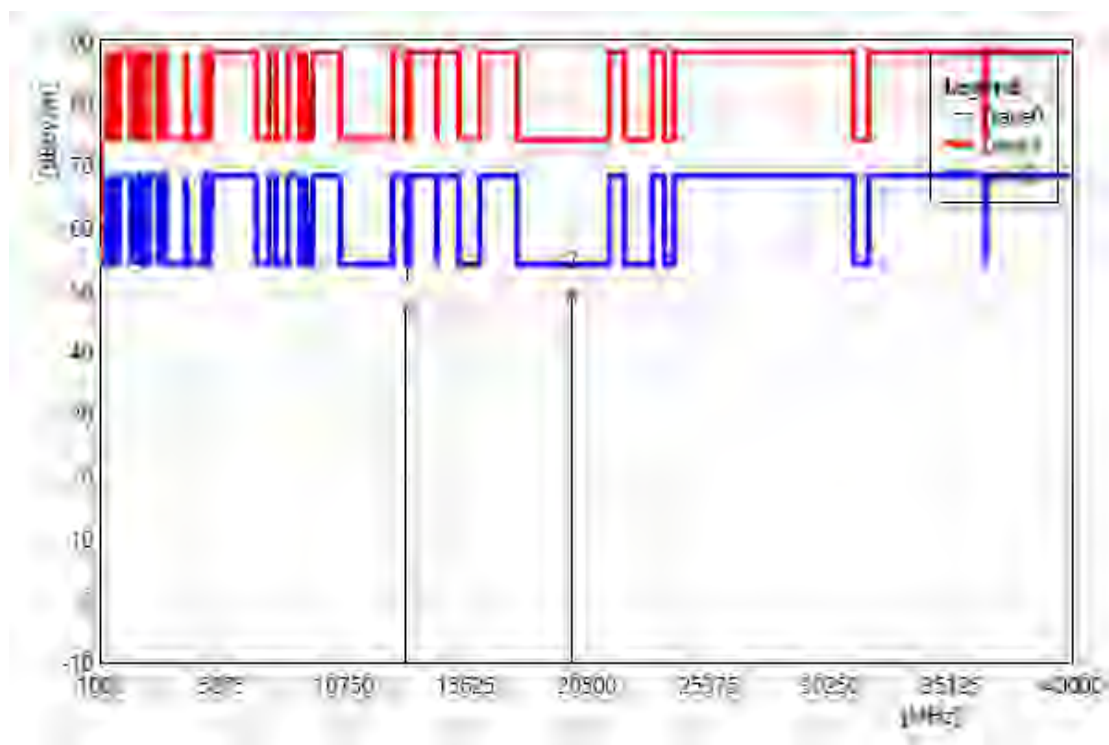


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	34.10	12.84	46.94	74.00	-27.06	PEAK
2	19875.00	32.69	16.35	49.04	74.00	-24.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6625 MHz		
Polarization:	Horizontal		
Remark:			

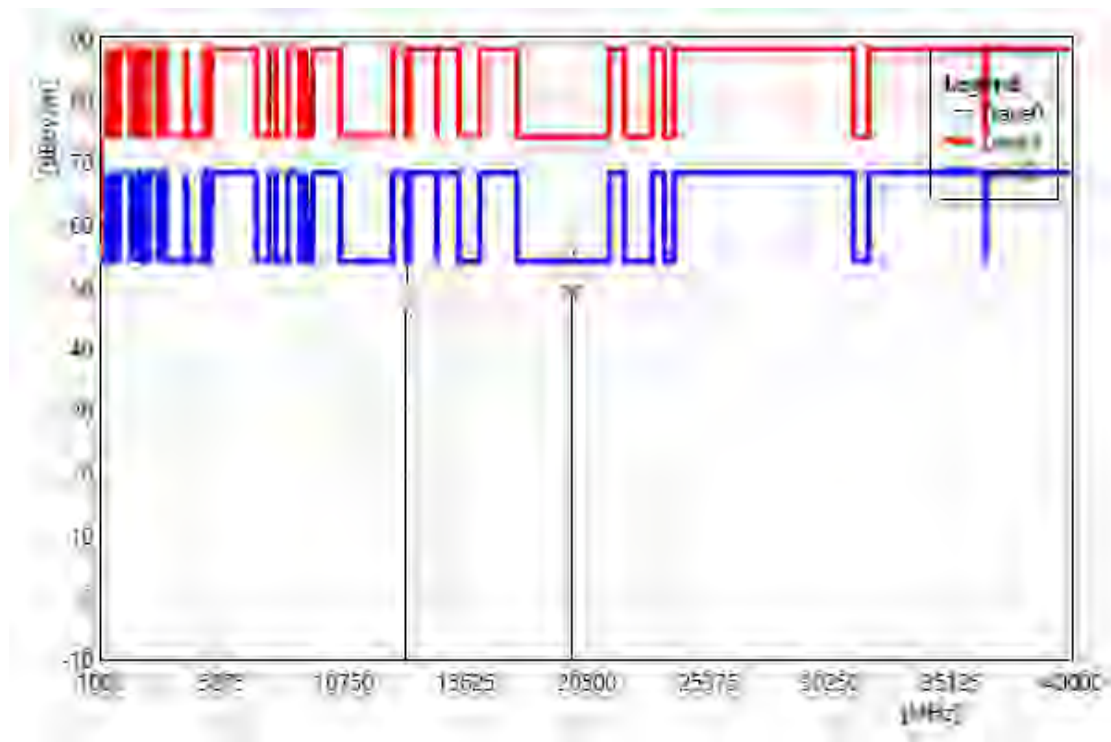


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	33.32	12.84	46.16	74.00	-27.84	PEAK
2	19875.00	32.94	16.35	49.29	74.00	-24.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6705 MHz		
Polarization:	Vertical		
Remark:			

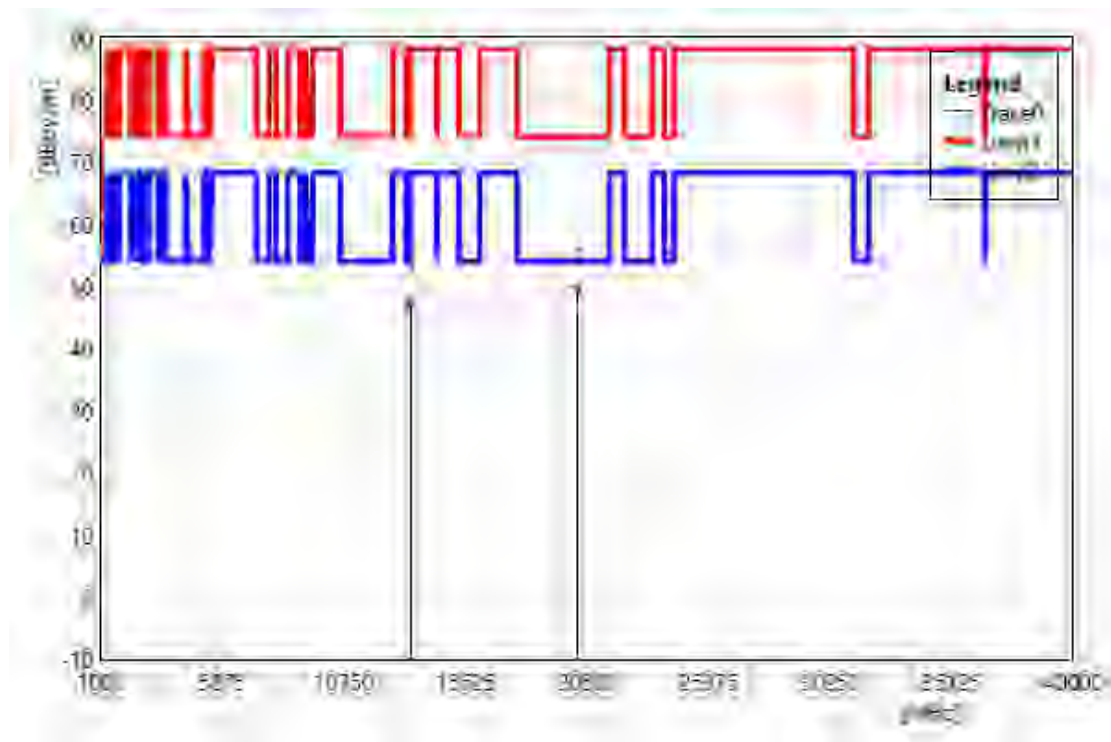


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	33.85	13.50	47.35	88.20	-40.85	PEAK
2	20115.00	33.28	16.04	49.32	74.00	-24.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6705 MHz		
Polarization:	Horizontal		
Remark:			

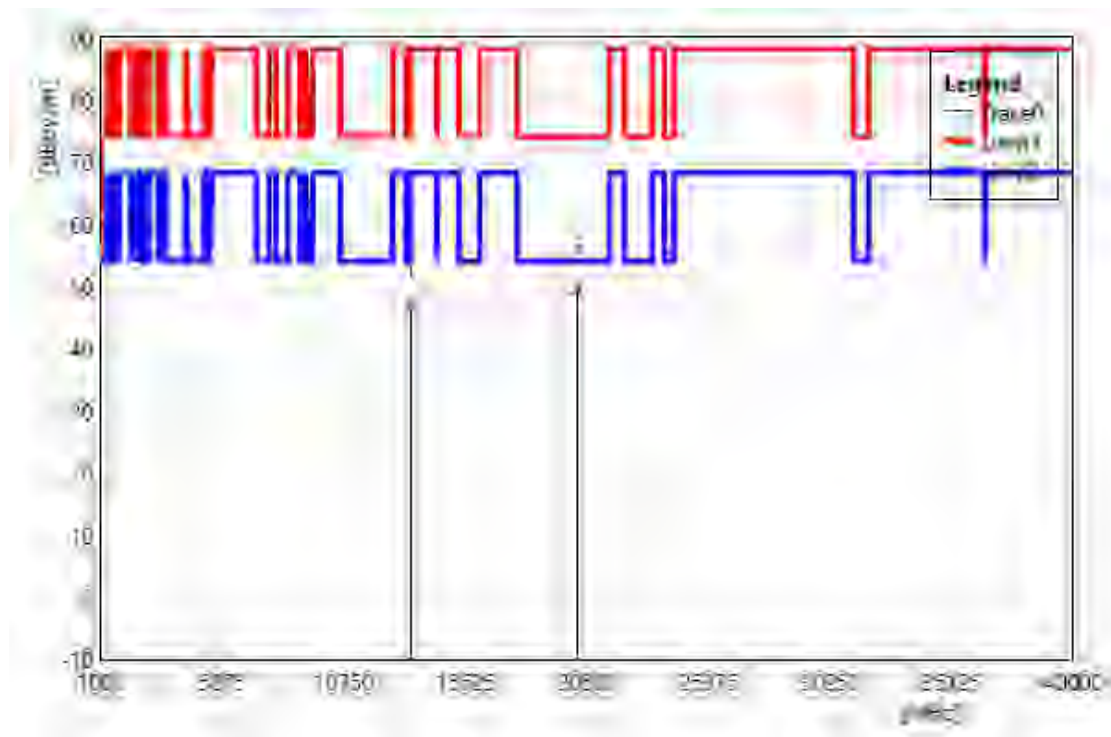


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	33.32	13.50	46.82	88.20	-41.38	PEAK
2	20115.00	33.45	16.04	49.49	74.00	-24.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6785 MHz		
Polarization:	Vertical		
Remark:			

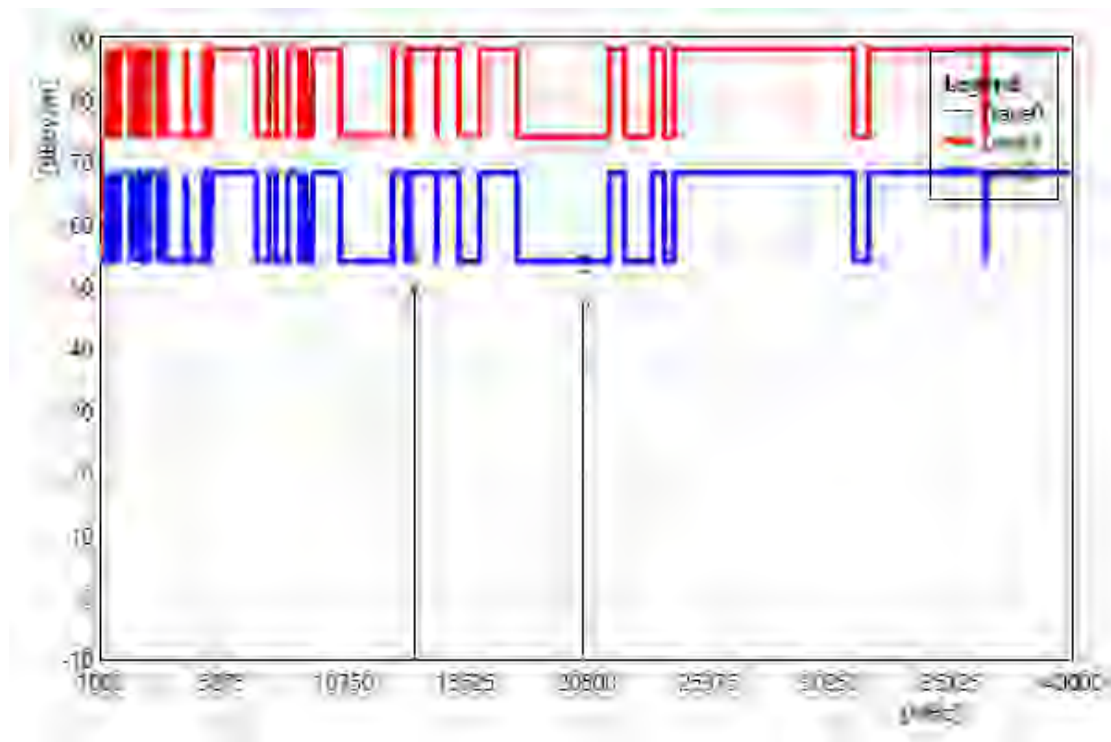


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	35.55	13.90	49.45	88.20	-38.75	PEAK
2	20355.00	31.45	16.33	47.78	74.00	-26.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6785 MHz		
Polarization:	Horizontal		
Remark:			

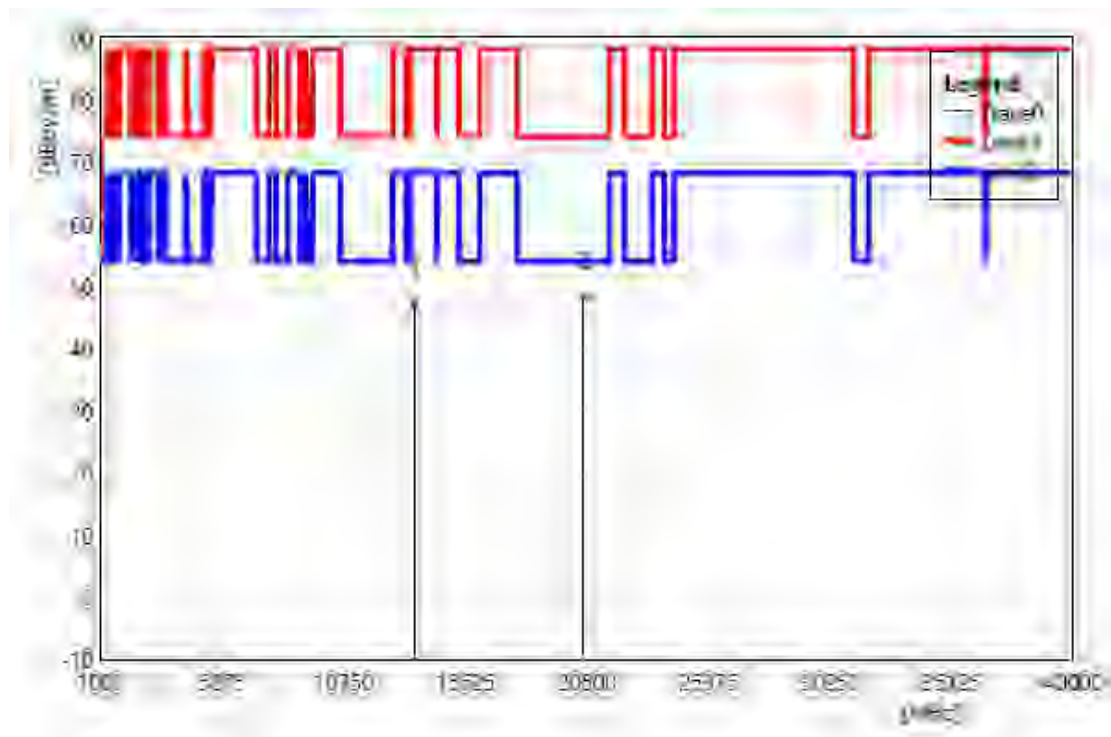


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	33.25	13.90	47.15	88.20	-41.05	PEAK
2	20355.00	32.02	16.33	48.35	74.00	-25.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6865 MHz		
Polarization:	Vertical		
Remark:			

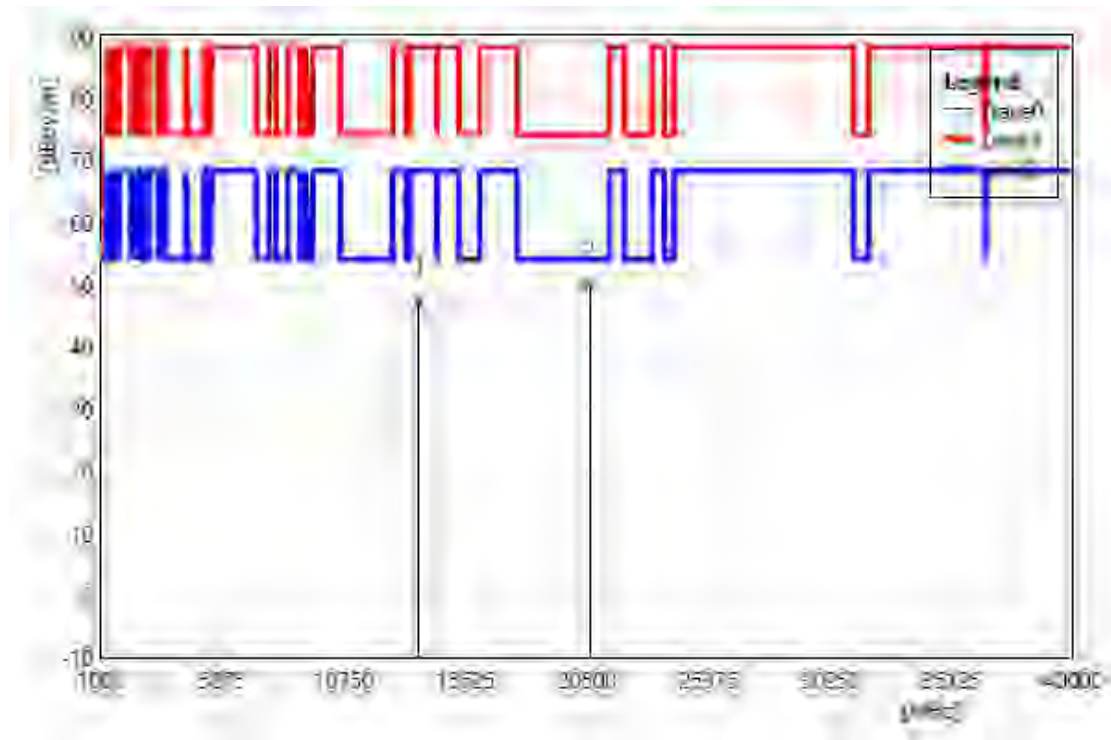


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	33.12	14.09	47.21	88.20	-40.99	PEAK
2	20595.00	33.35	16.65	50.00	74.00	-24.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6865 MHz		
Polarization:	Horizontal		
Remark:			

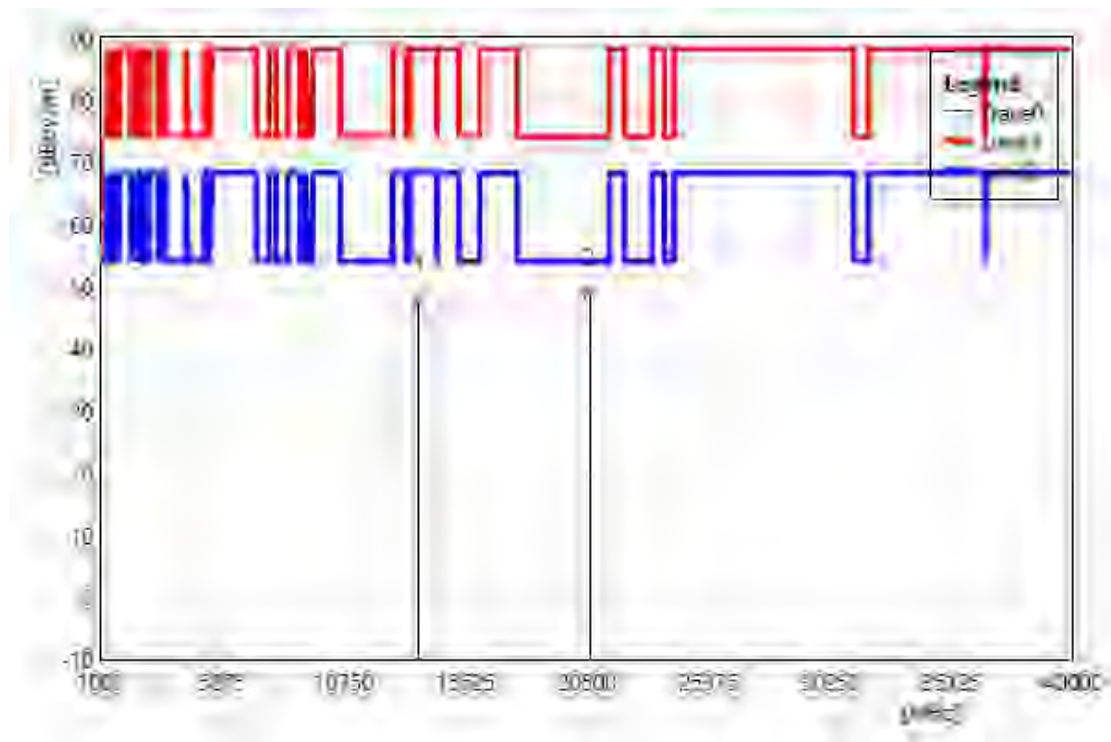


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	33.62	14.09	47.71	88.20	-40.49	PEAK
2	20595.00	32.38	16.65	49.03	74.00	-24.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6945 MHz		
Polarization:	Vertical		
Remark:			

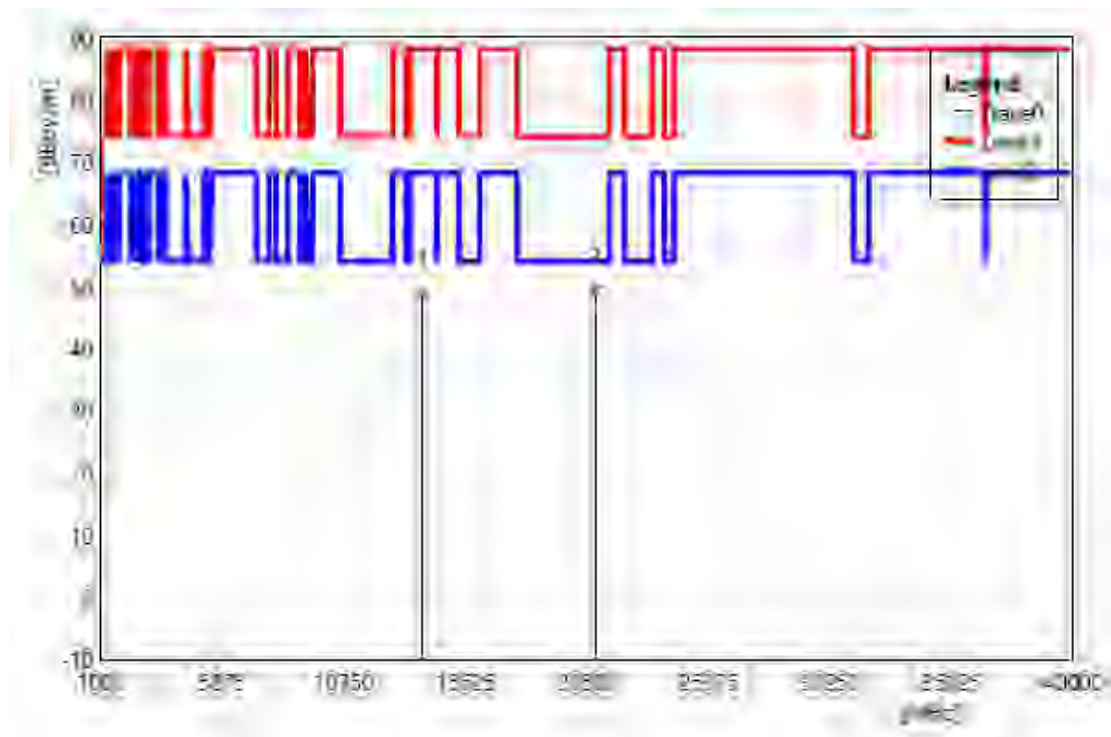


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	34.41	14.51	48.92	88.20	-39.28	PEAK
2	20835.00	32.35	16.94	49.29	74.00	-24.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 6945 MHz		
Polarization:	Horizontal		
Remark:			

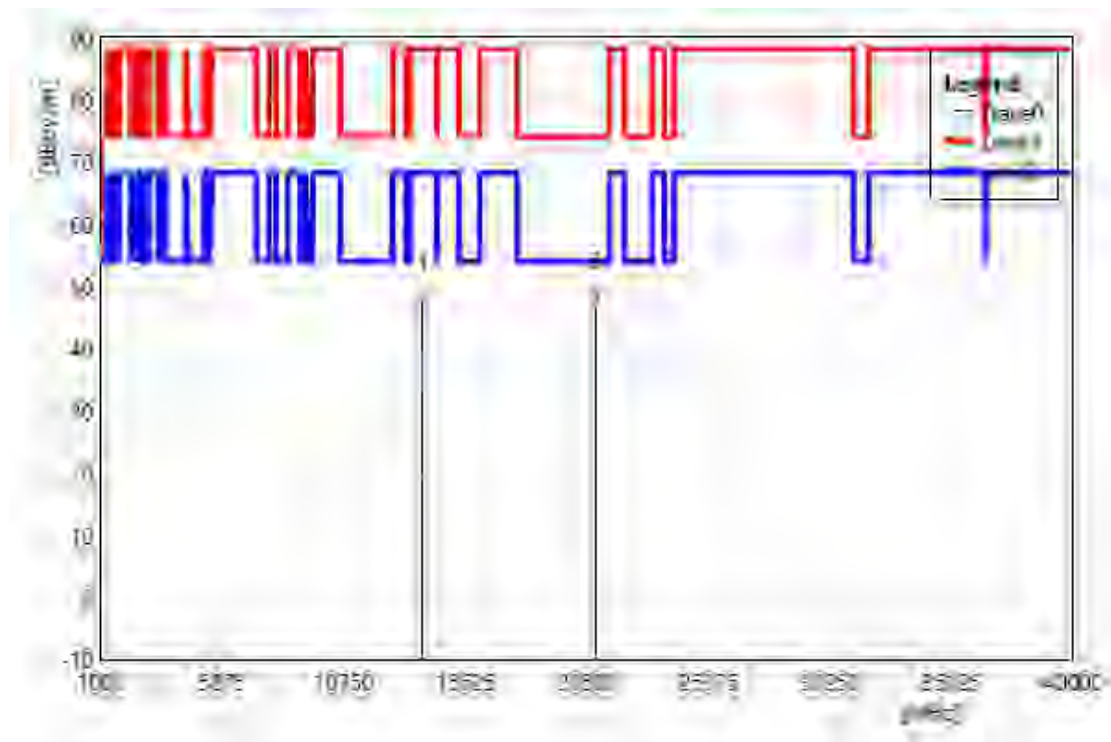


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	33.39	14.51	47.90	88.20	-40.30	PEAK
2	20835.00	31.49	16.94	48.43	74.00	-25.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Vertical		
Remark:			

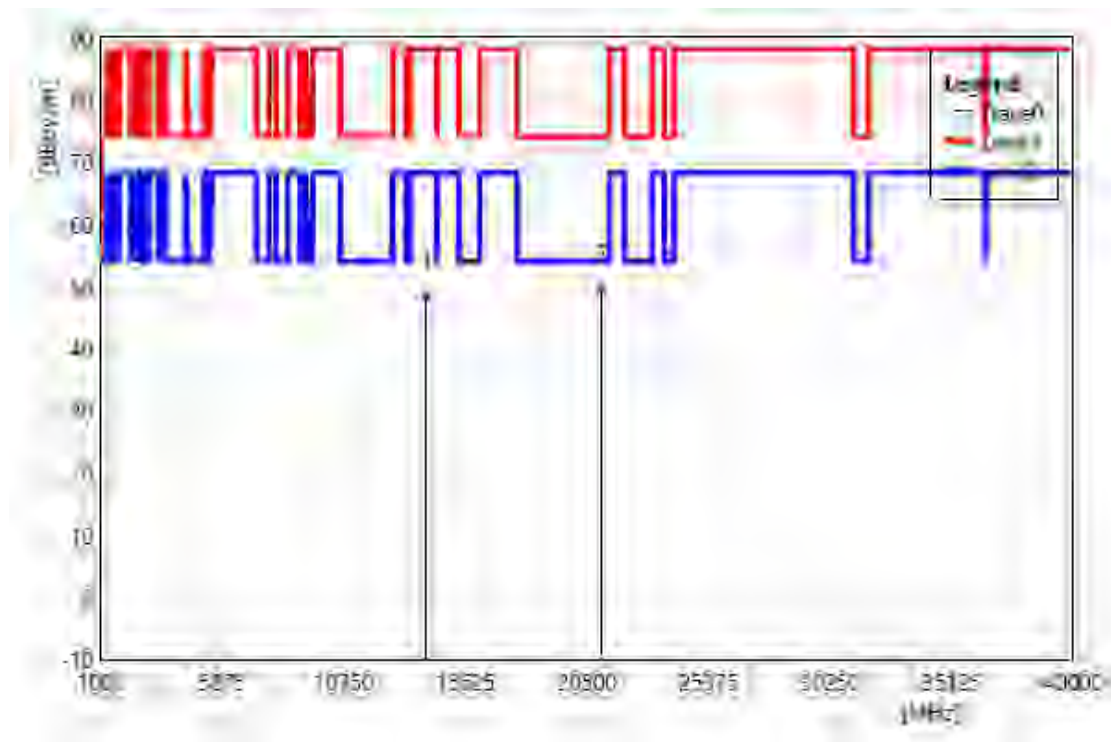


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	33.51	14.93	48.44	88.20	-39.76	PEAK
2	21075.00	33.07	16.48	49.55	74.00	-24.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Horizontal		
Remark:			

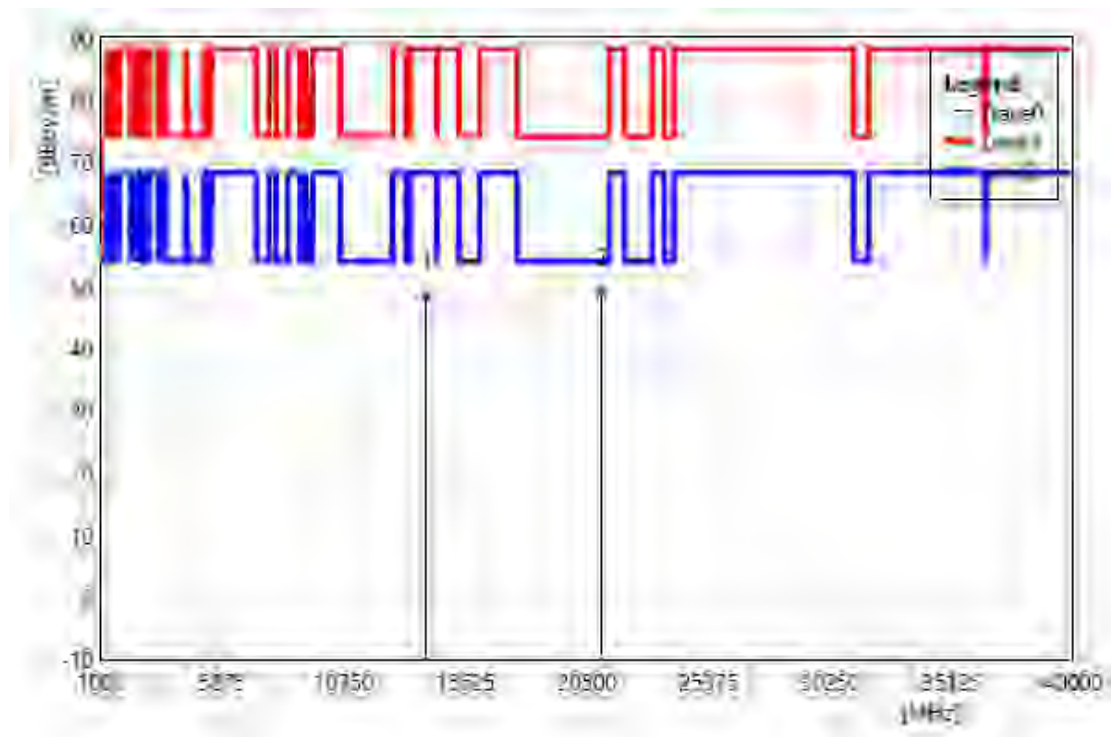


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	33.54	14.93	48.47	88.20	-39.73	PEAK
2	21075.00	32.70	16.48	49.18	74.00	-24.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Vertical		
Remark:			

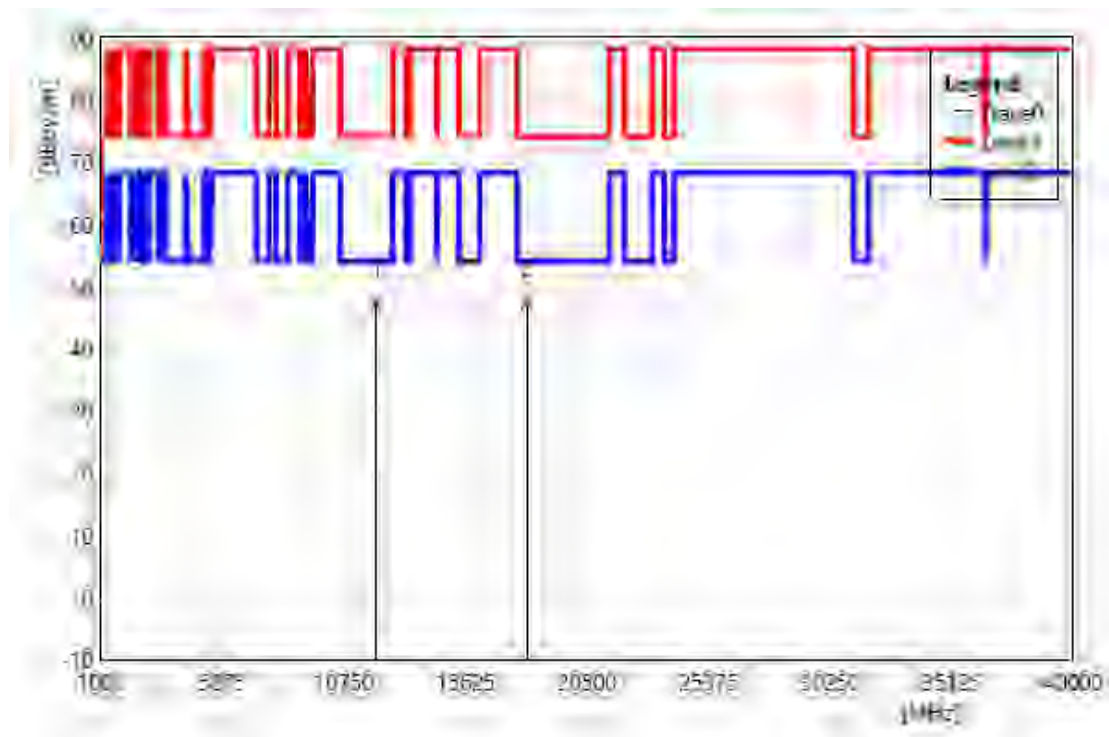


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.51	11.88	47.39	74.00	-26.61	PEAK
2	18075.00	33.22	14.16	47.38	74.00	-26.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Horizontal		
Remark:			

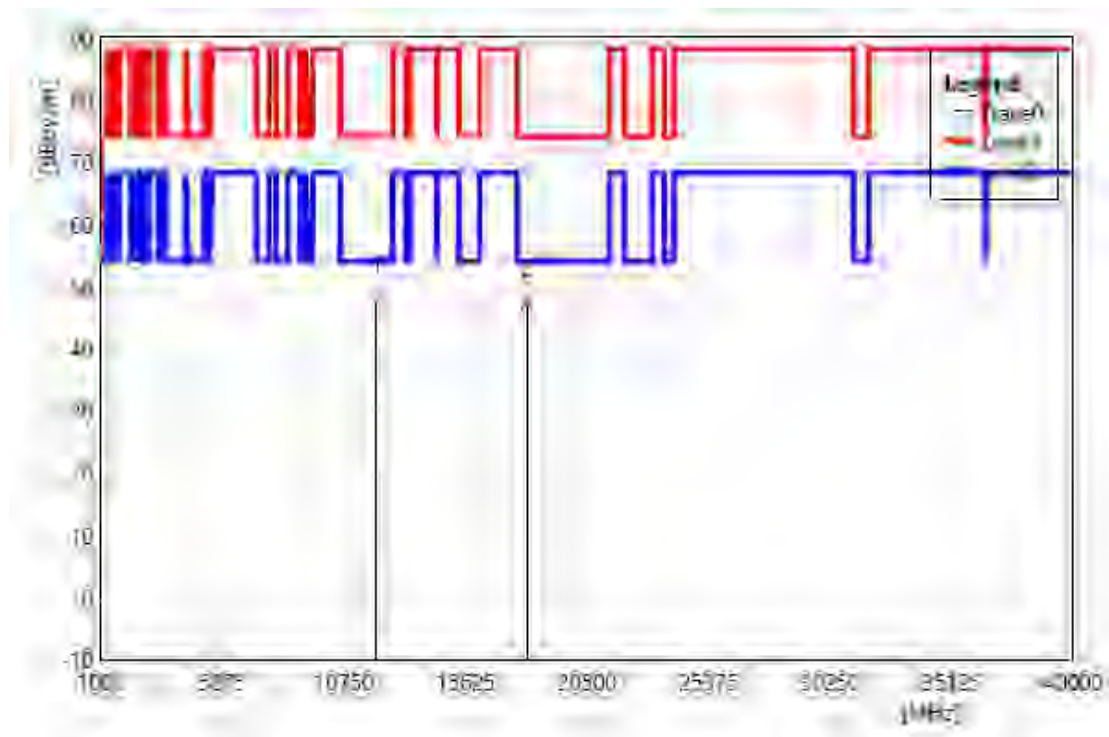


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.84	11.88	47.72	74.00	-26.28	PEAK
2	18075.00	33.07	14.16	47.23	74.00	-26.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Vertical		
Remark:			

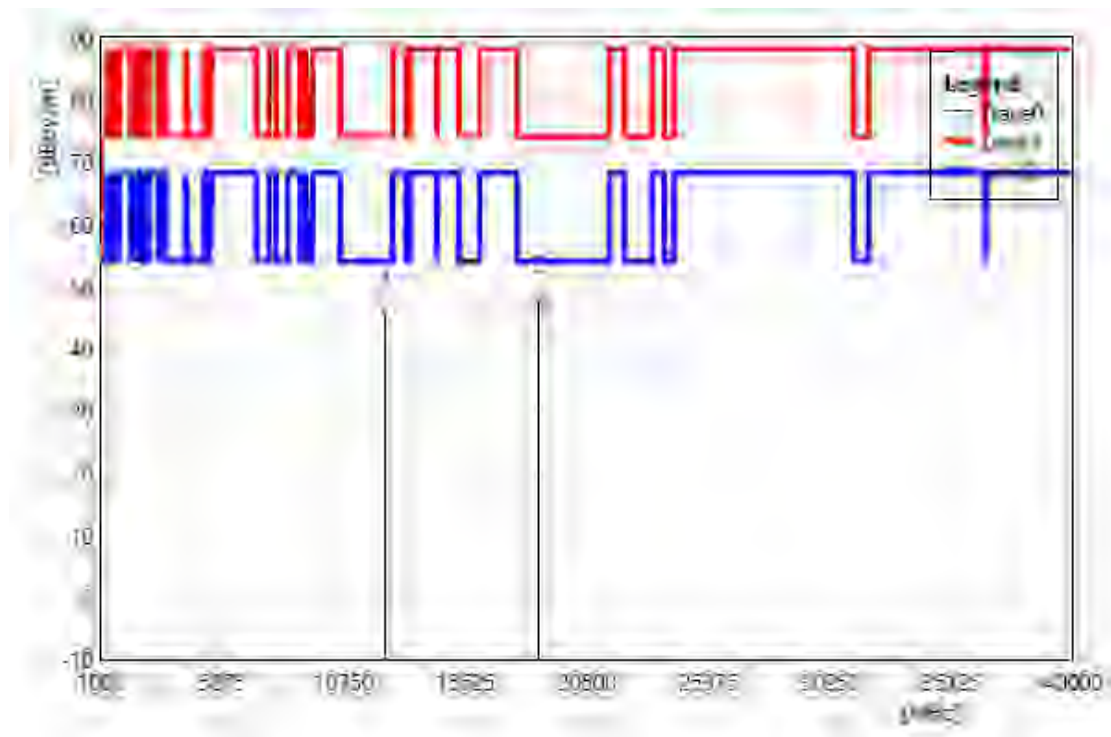


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	34.28	11.54	45.82	74.00	-28.18	PEAK
2	18555.00	32.84	14.94	47.78	74.00	-26.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Horizontal		
Remark:			

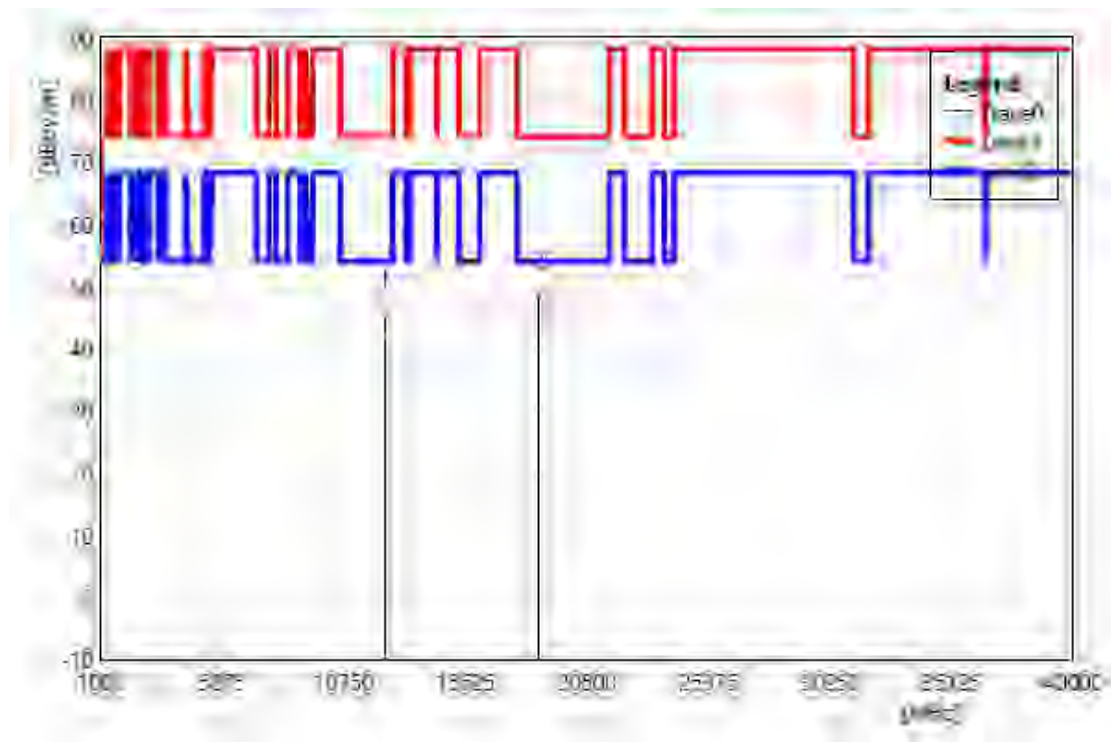


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	33.97	11.54	45.51	74.00	-28.49	PEAK
2	18555.00	33.59	14.94	48.53	74.00	-25.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6345 MHz		
Polarization:	Vertical		
Remark:			

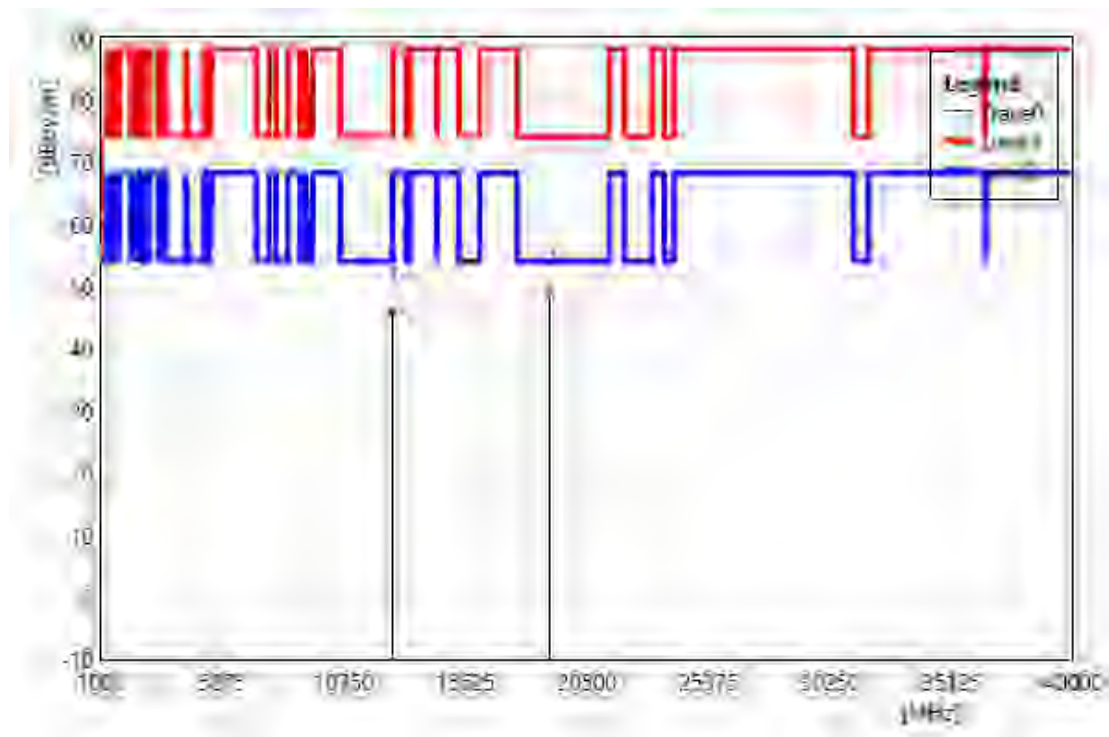


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	33.92	12.00	45.92	74.00	-28.08	PEAK
2	19035.00	32.84	15.86	48.70	74.00	-25.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6345 MHz		
Polarization:	Horizontal		
Remark:			

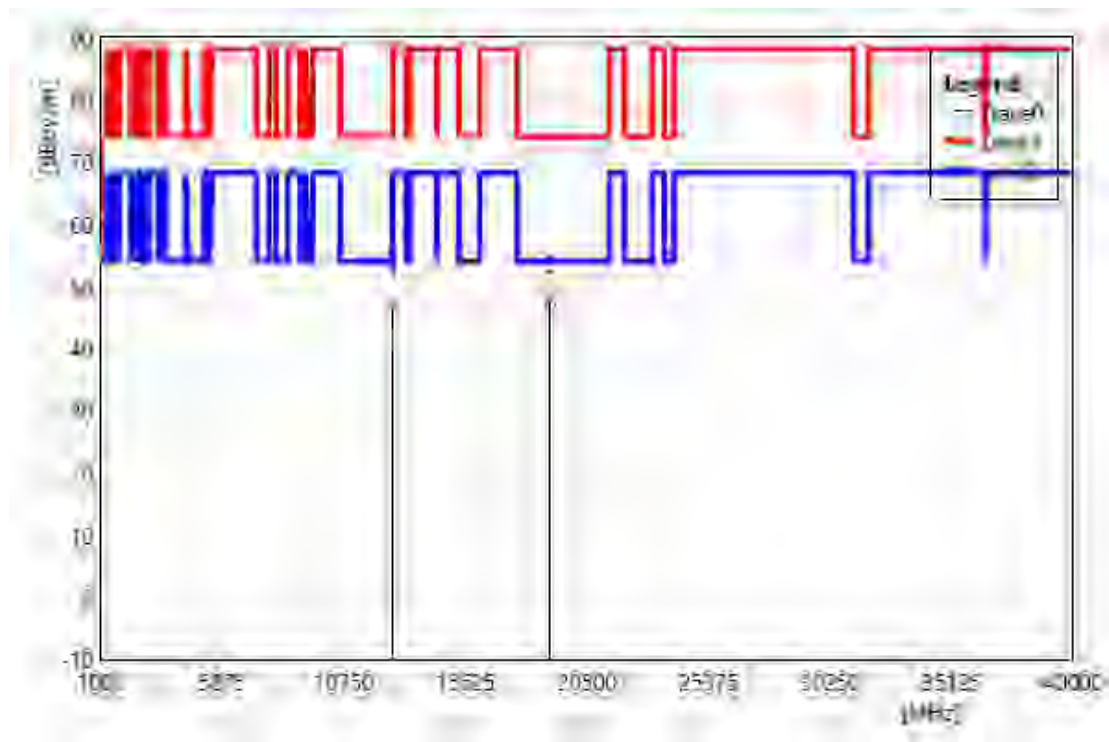


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.73	12.00	46.73	74.00	-27.27	PEAK
2	19035.00	32.04	15.86	47.90	74.00	-26.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6505 MHz		
Polarization:	Vertical		
Remark:			

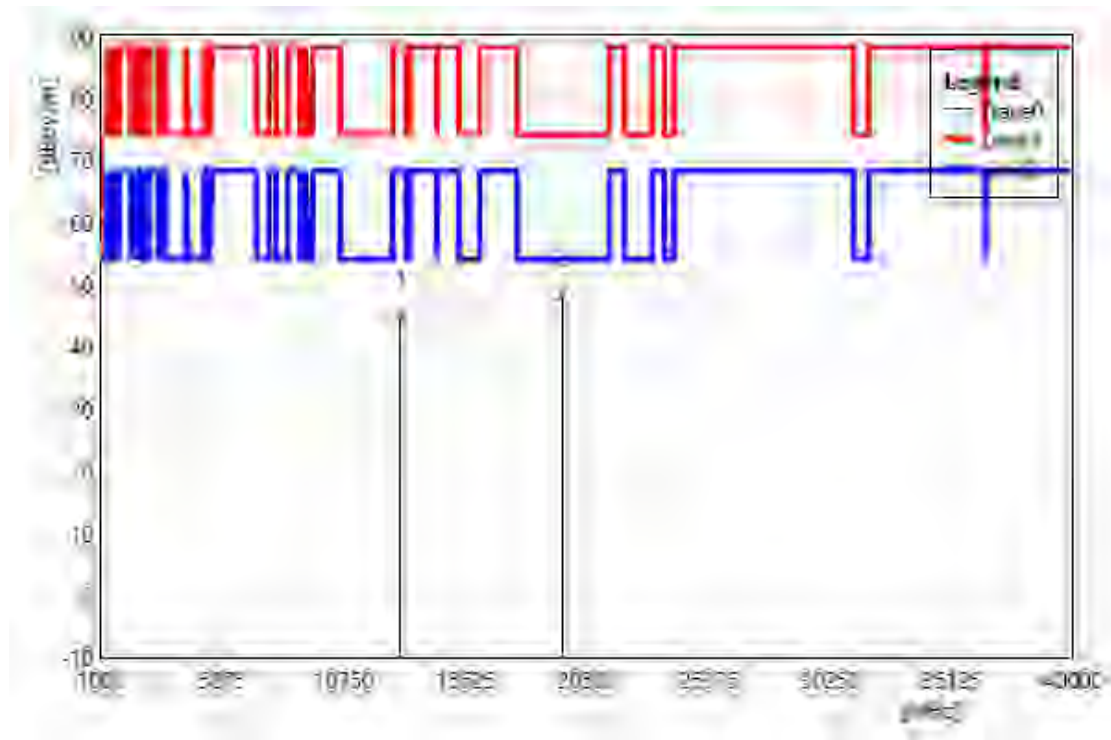


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	32.43	12.43	44.86	88.20	-43.34	PEAK
2	19515.00	32.49	15.82	48.31	74.00	-25.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6505 MHz		
Polarization:	Horizontal		
Remark:			

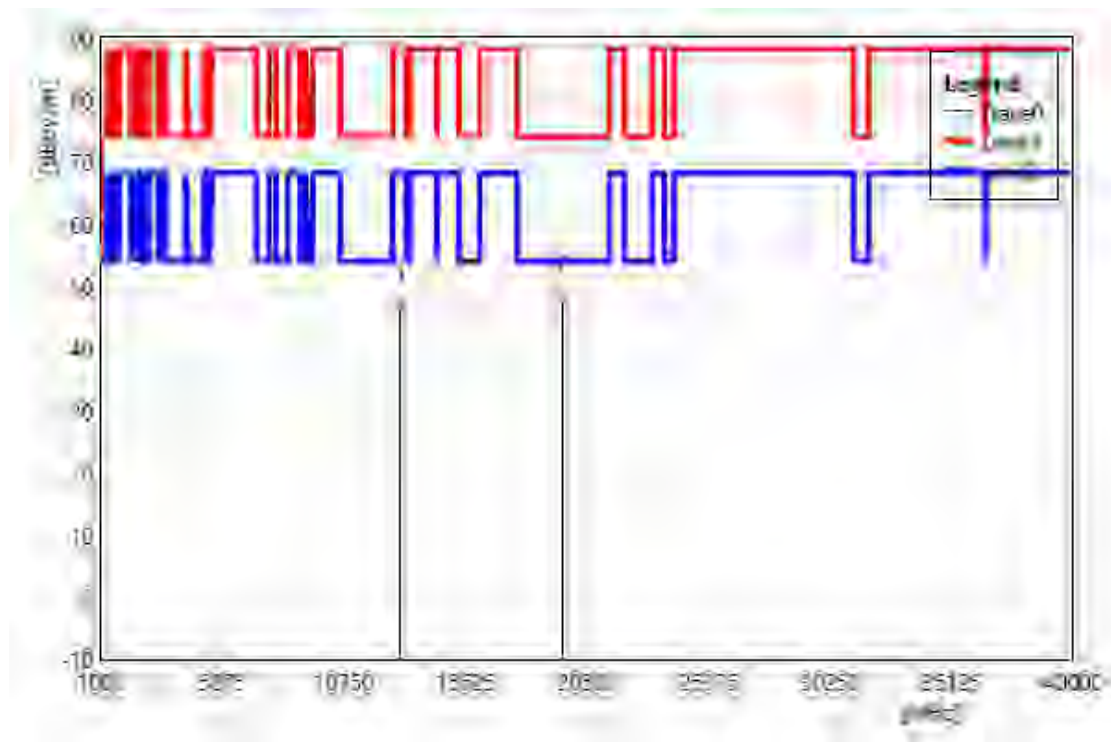


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.28	12.43	46.71	88.20	-41.49	PEAK
2	19515.00	32.18	15.82	48.00	74.00	-26.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Vertical		
Remark:			

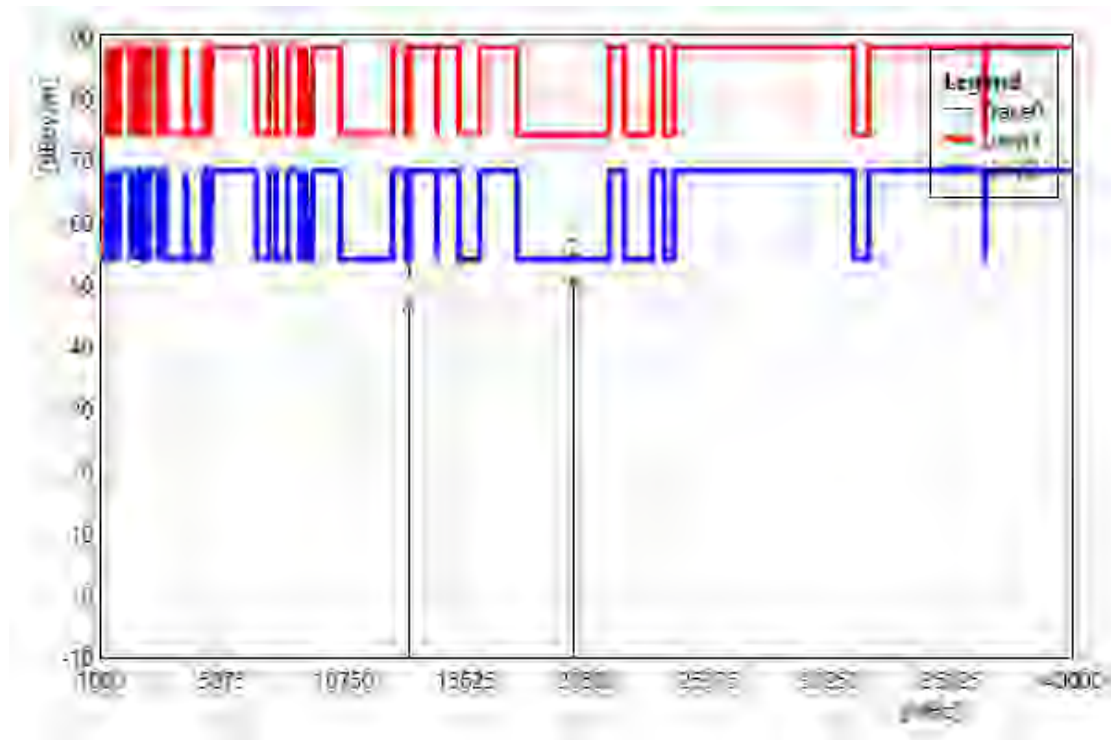


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	33.44	13.16	46.60	74.00	-27.40	PEAK
2	19995.00	33.74	16.53	50.27	74.00	-23.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Horizontal		
Remark:			

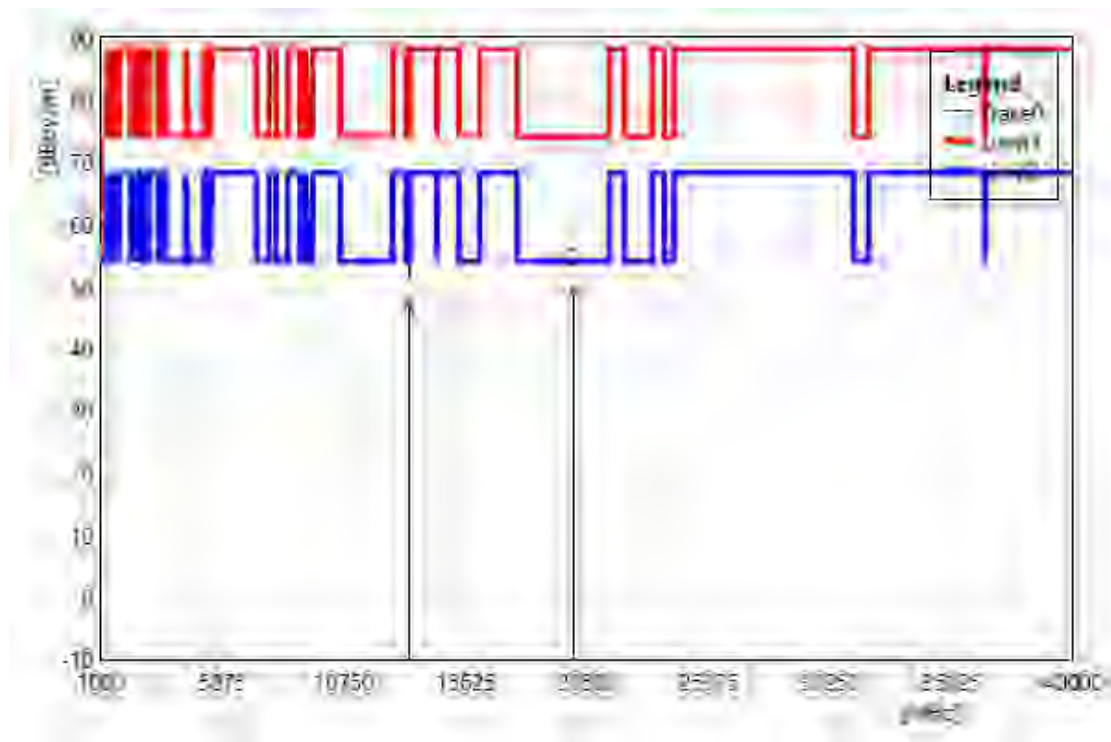


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	33.76	13.16	46.92	74.00	-27.08	PEAK
2	19995.00	32.56	16.53	49.09	74.00	-24.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6825 MHz		
Polarization:	Vertical		
Remark:			

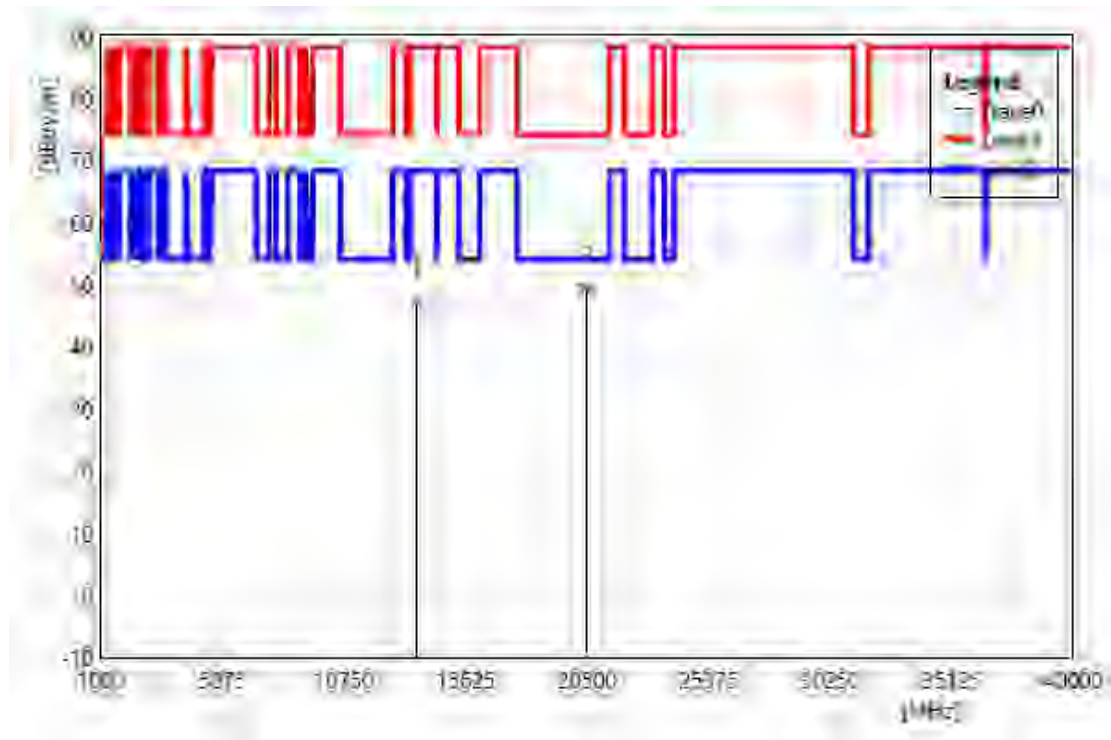


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	33.37	13.99	47.36	88.20	-40.84	PEAK
2	20475.00	32.85	16.48	49.33	74.00	-24.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6825 MHz		
Polarization:	Horizontal		
Remark:			

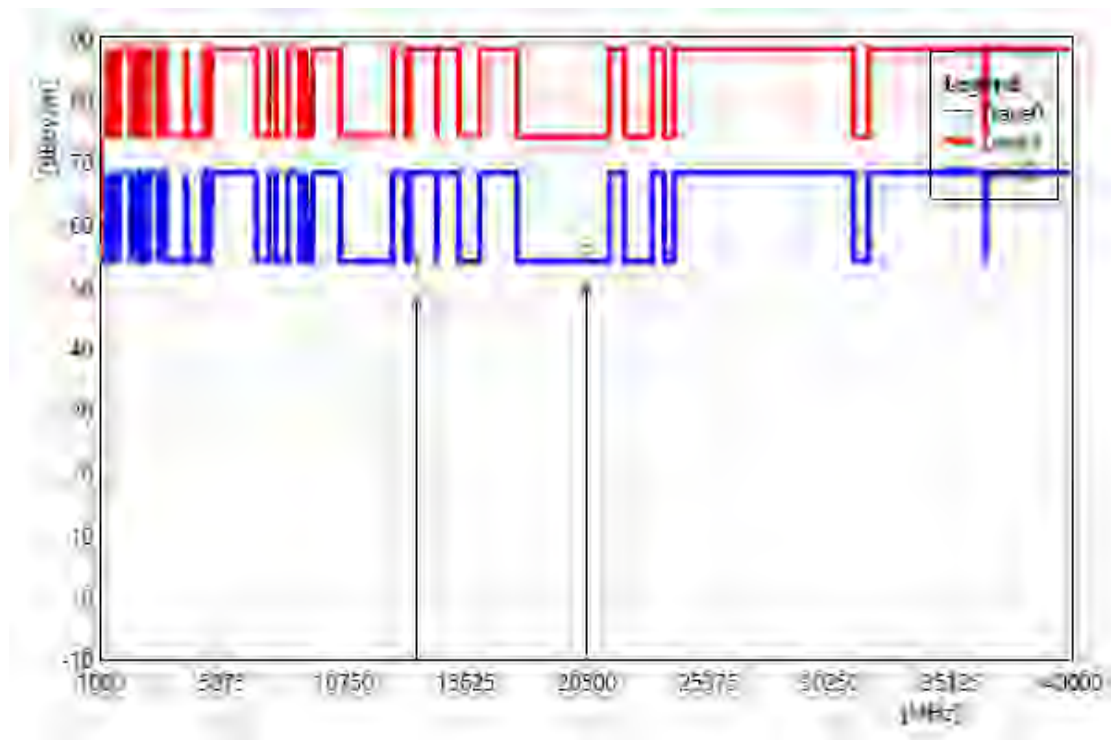


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	33.68	13.99	47.67	88.20	-40.53	PEAK
2	20475.00	33.01	16.48	49.49	74.00	-24.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

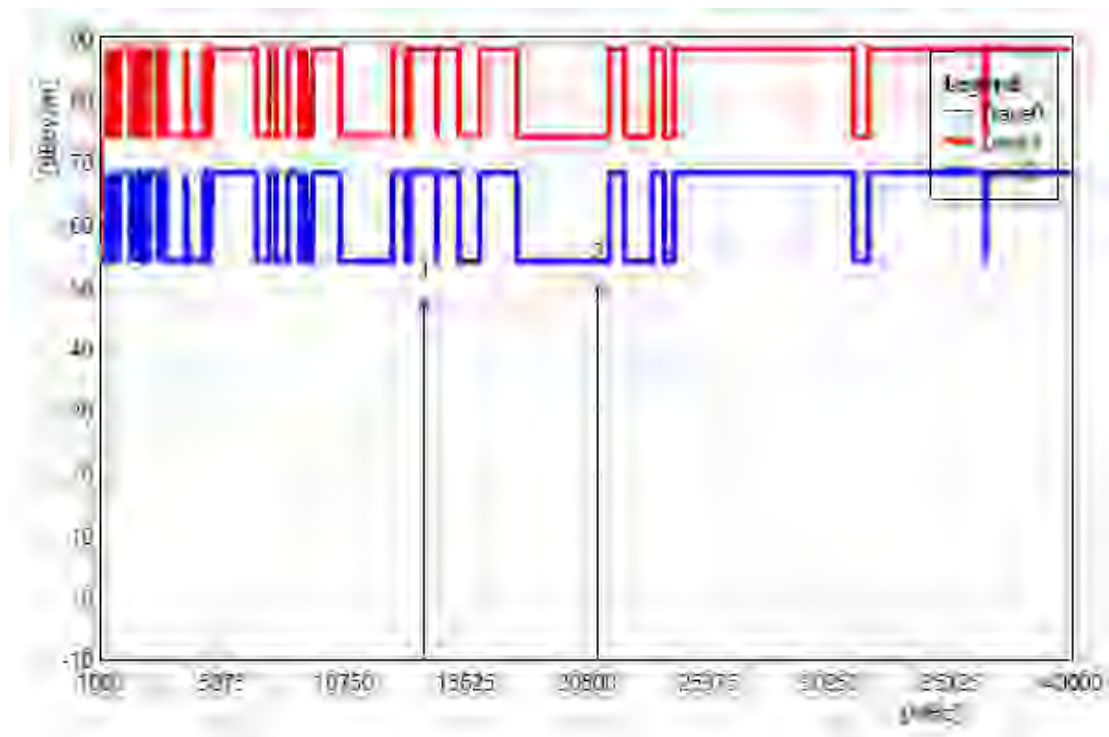


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	32.55	14.51	47.06	88.20	-41.14	PEAK
2	20955.00	32.76	17.09	49.85	74.00	-24.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

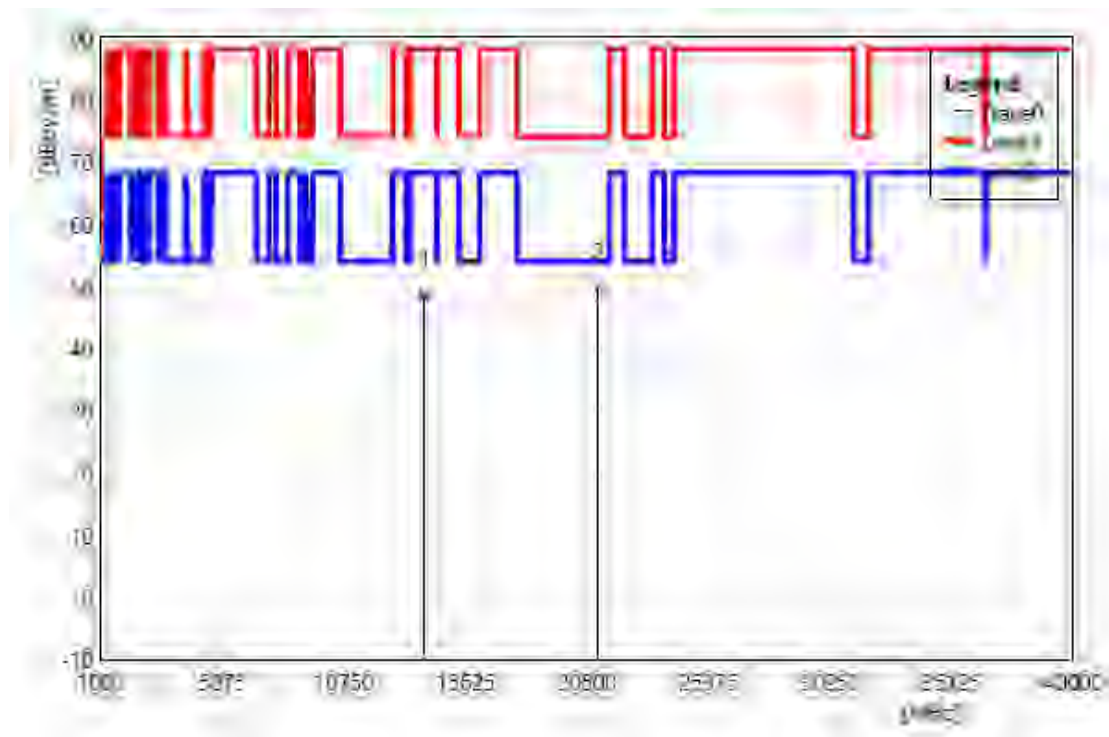


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	34.11	14.51	48.62	88.20	-39.58	PEAK
2	20955.00	32.80	17.09	49.89	74.00	-24.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

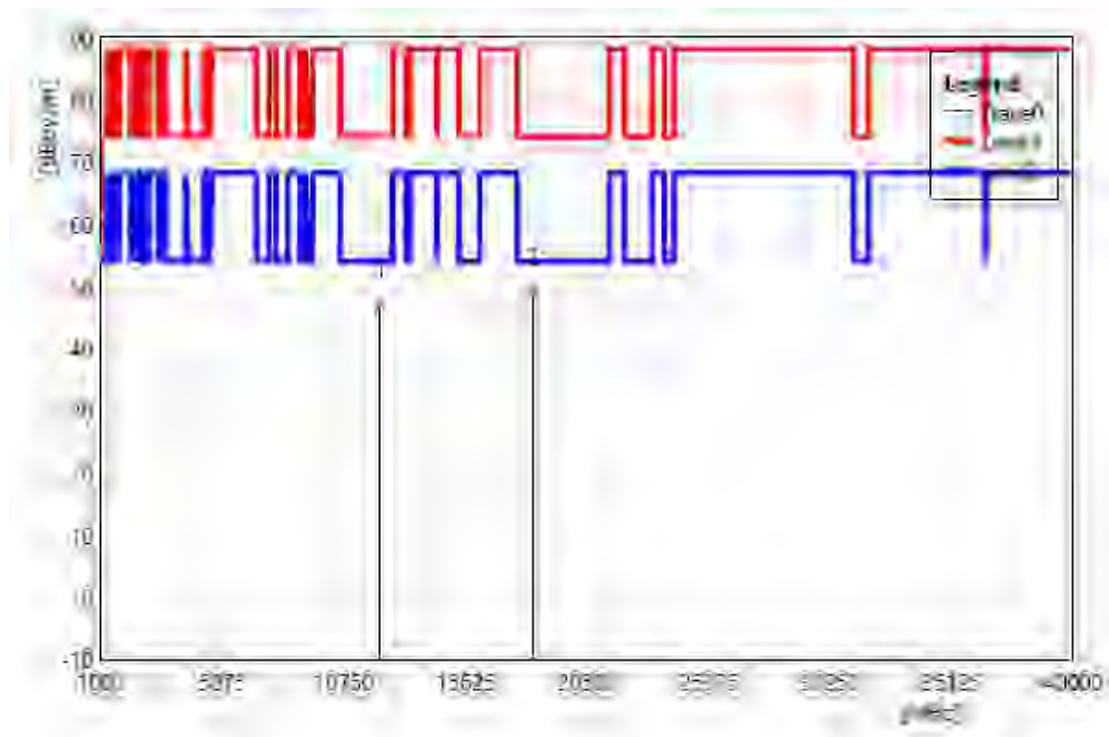


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	35.00	11.87	46.87	74.00	-27.13	PEAK
2	18315.00	34.23	14.70	48.93	74.00	-25.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Horizontal		
Remark:			

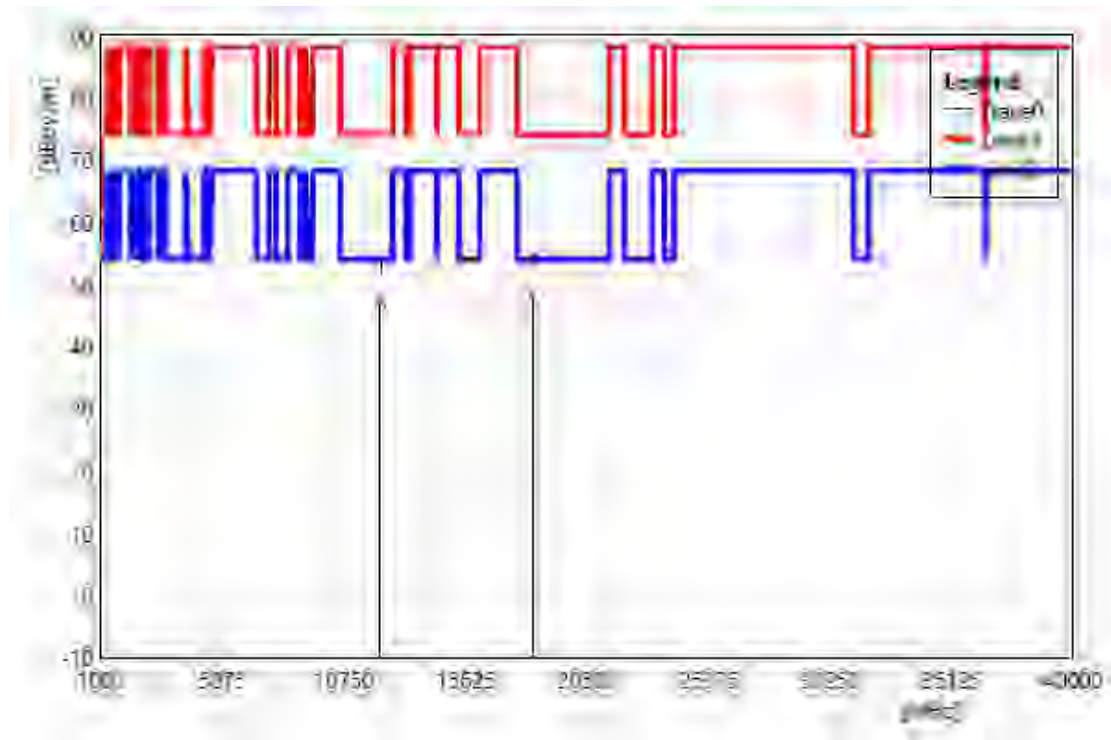


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	35.38	11.87	47.25	74.00	-26.75	PEAK
2	18315.00	33.42	14.70	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6265 MHz		
Polarization:	Vertical		
Remark:			

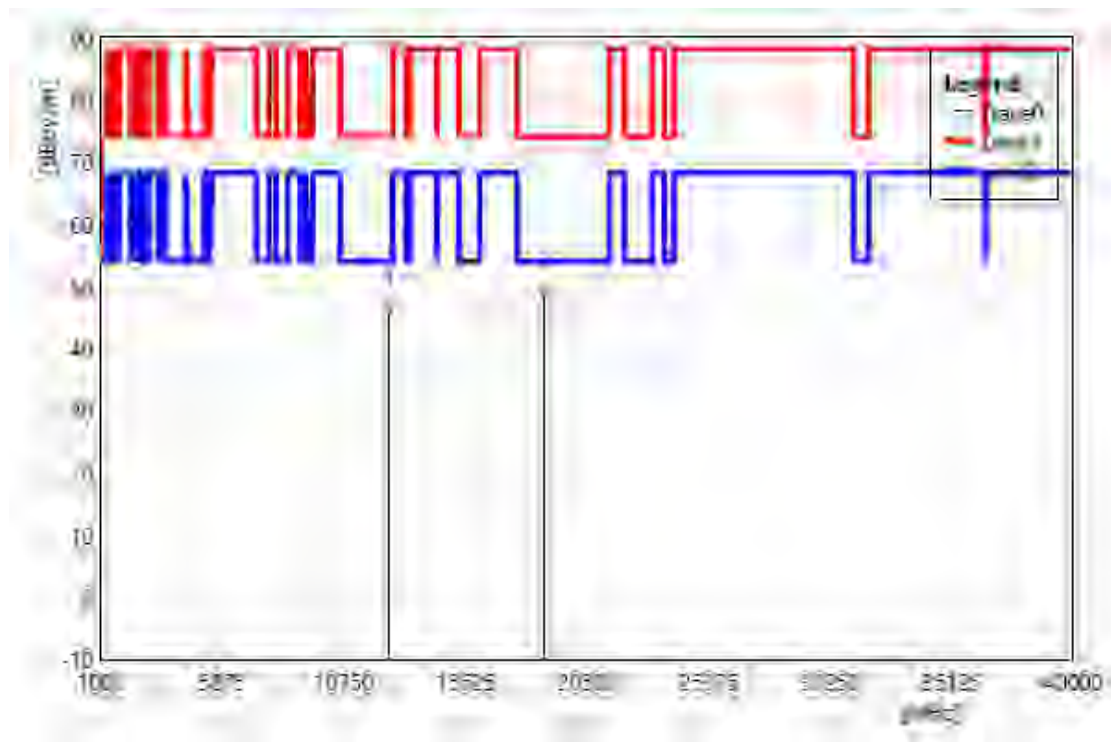


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	34.64	11.53	46.17	74.00	-27.83	PEAK
2	18795.00	33.29	15.41	48.70	74.00	-25.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6265 MHz		
Polarization:	Horizontal		
Remark:			

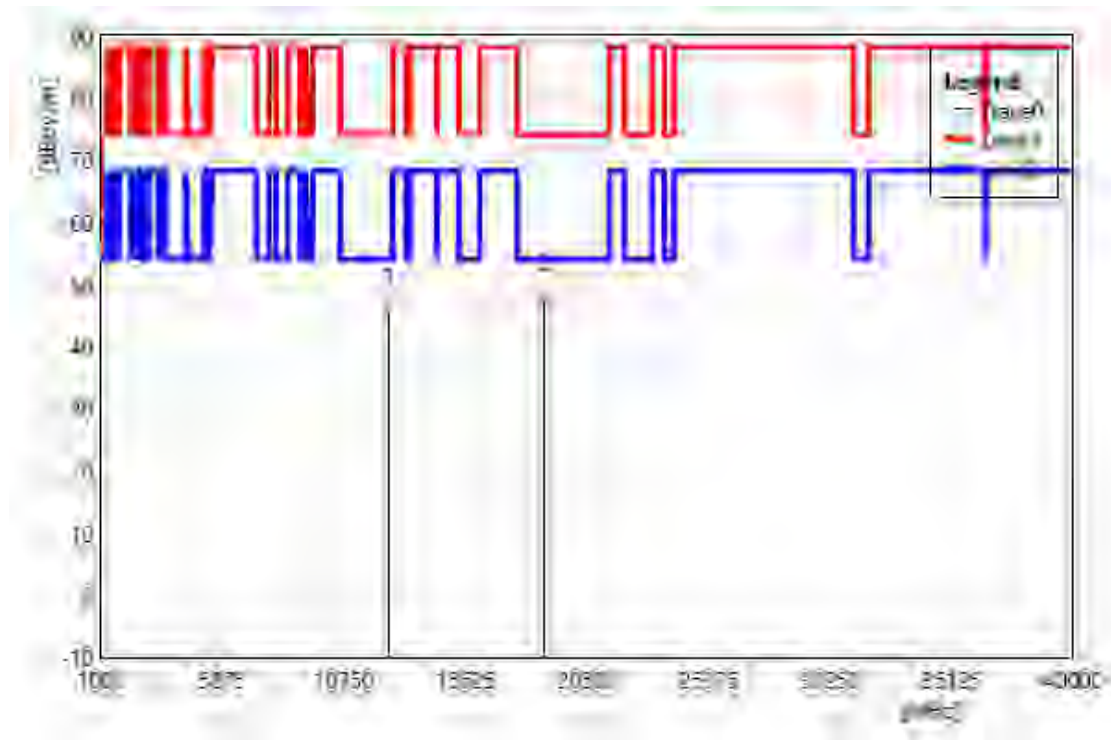


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	34.22	11.53	45.75	74.00	-28.25	PEAK
2	18795.00	32.37	15.41	47.78	74.00	-26.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6425 MHz		
Polarization:	Vertical		
Remark:			

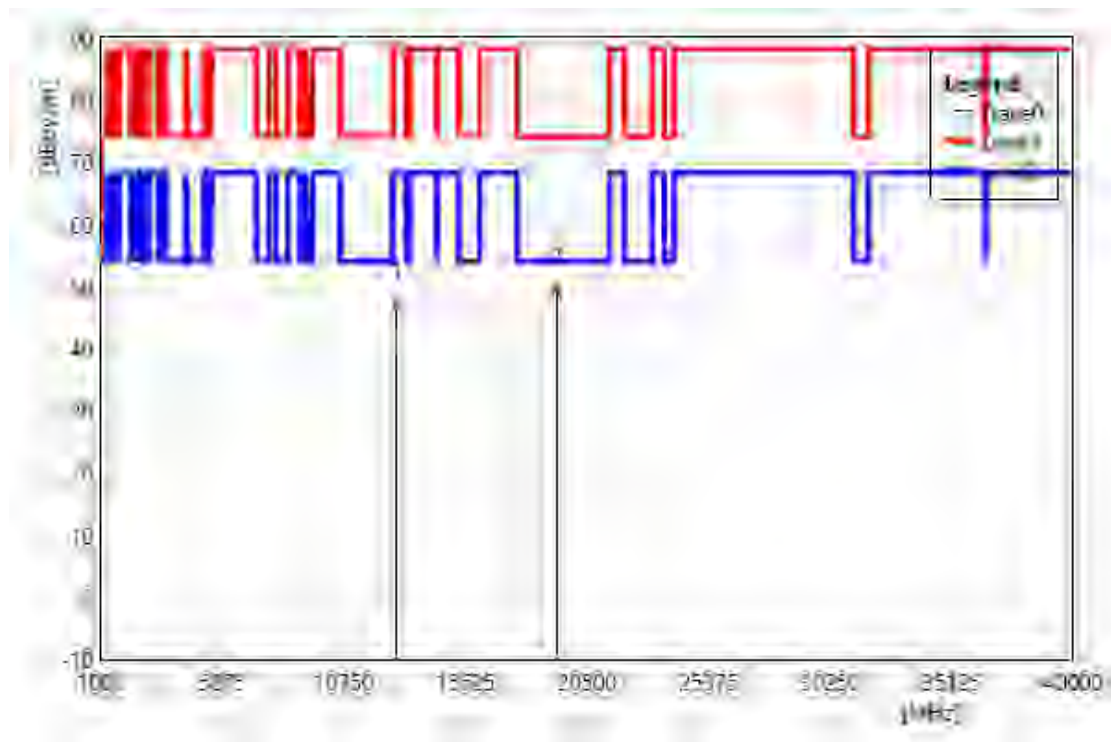


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.37	12.48	46.85	88.20	-41.35	PEAK
2	19275.00	33.13	16.33	49.46	74.00	-24.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6425 MHz		
Polarization:	Horizontal		
Remark:			

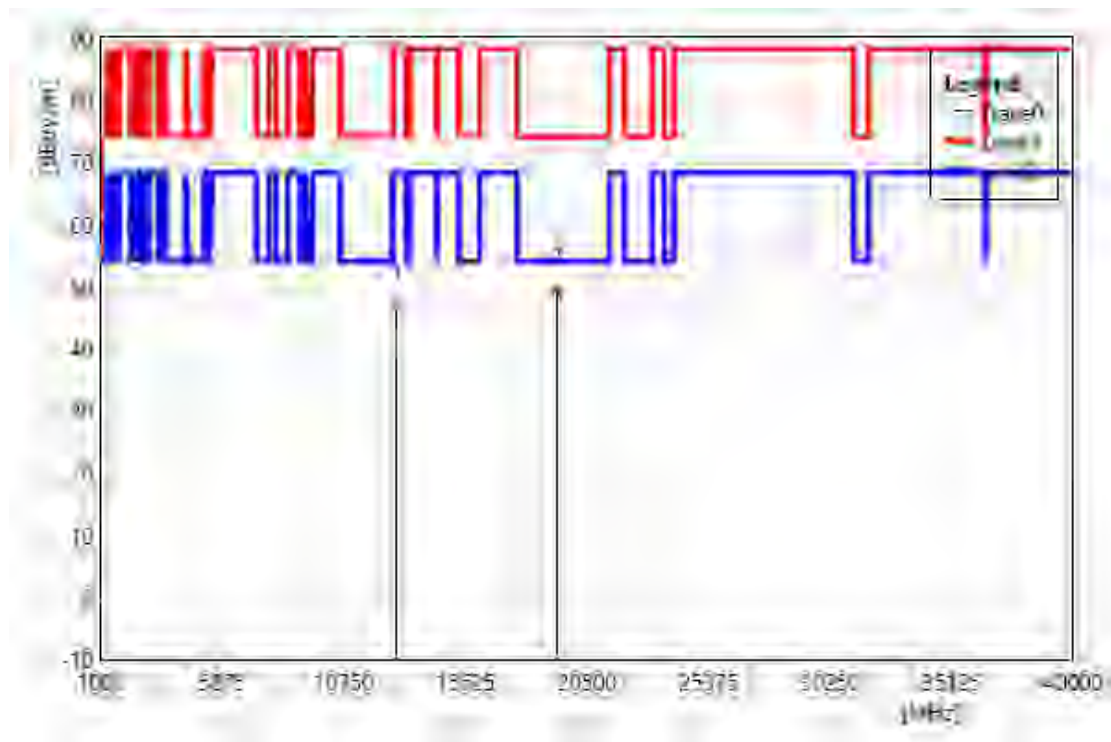


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.15	12.48	46.63	88.20	-41.57	PEAK
2	19275.00	33.00	16.33	49.33	74.00	-24.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6585 MHz		
Polarization:	Vertical		
Remark:			

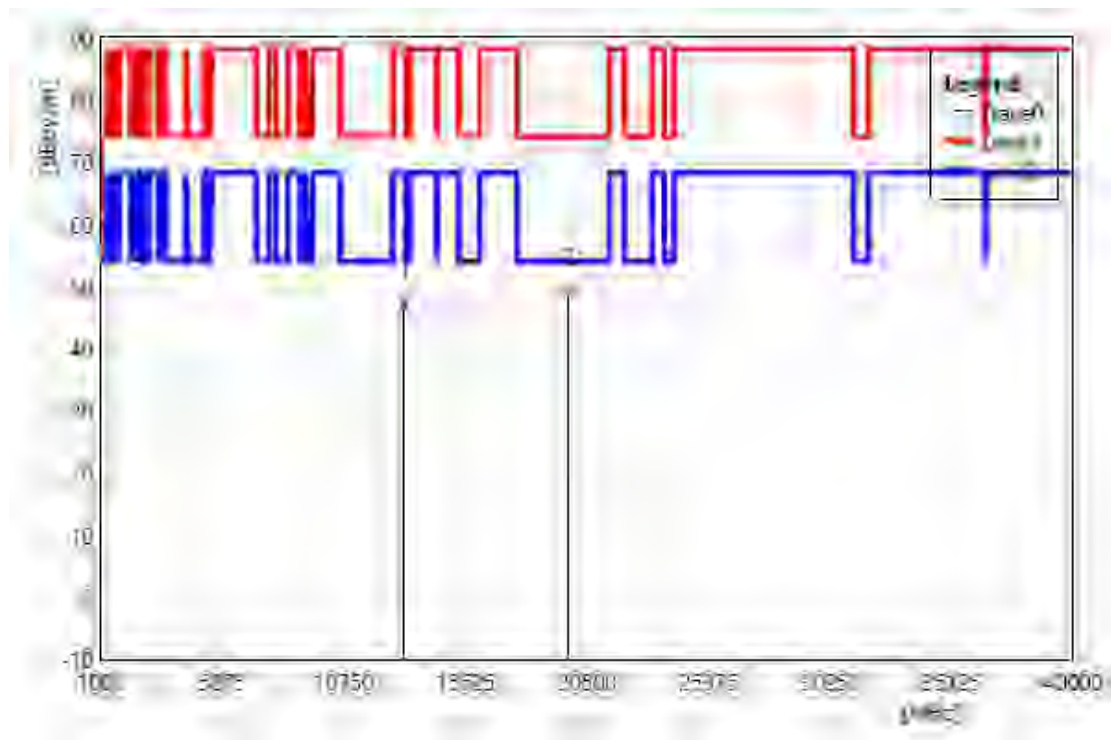


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	34.30	12.60	46.90	88.20	-41.30	PEAK
2	19755.00	32.78	16.18	48.96	74.00	-25.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6585 MHz		
Polarization:	Horizontal		
Remark:			

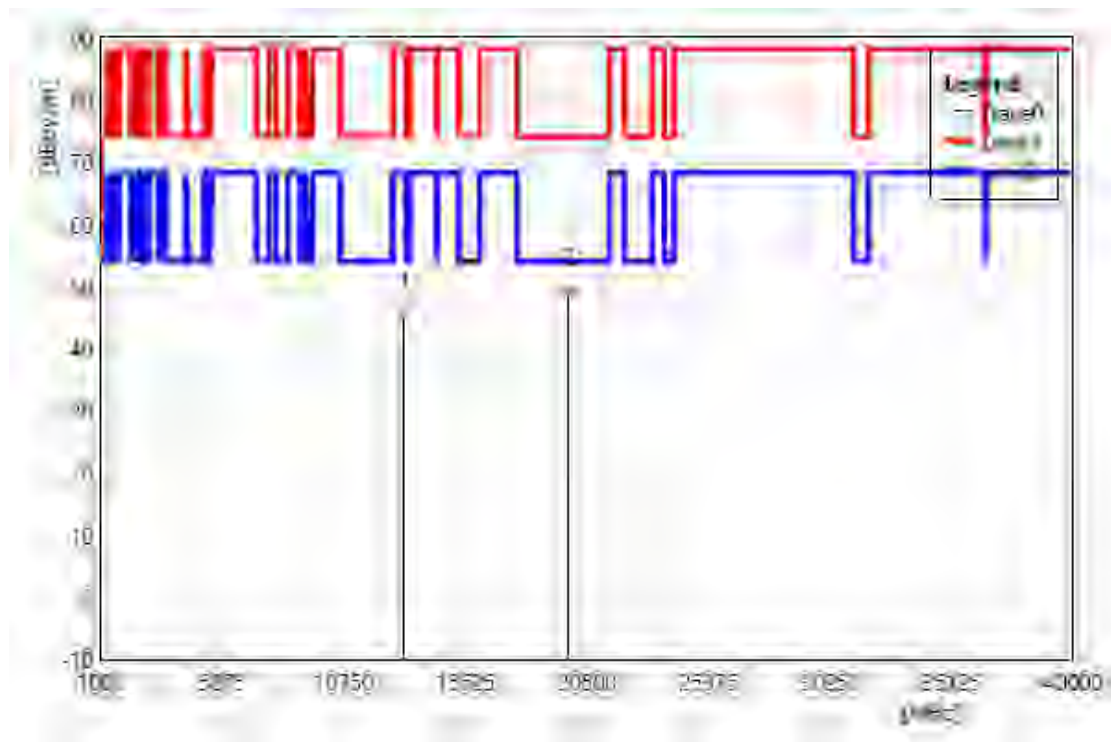


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	32.77	12.60	45.37	88.20	-42.83	PEAK
2	19755.00	32.83	16.18	49.01	74.00	-24.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6745 MHz		
Polarization:	Vertical		
Remark:			

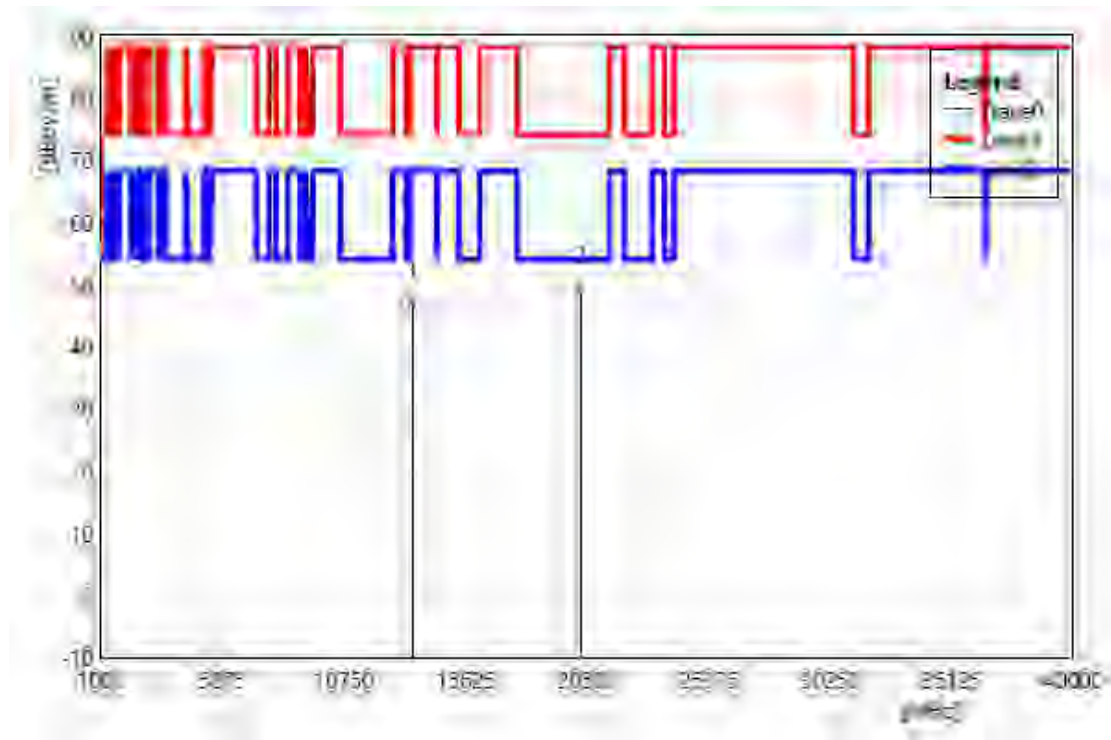


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	33.04	13.90	46.94	88.20	-41.26	PEAK
2	20235.00	32.87	16.18	49.05	74.00	-24.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6745 MHz		
Polarization:	Horizontal		
Remark:			

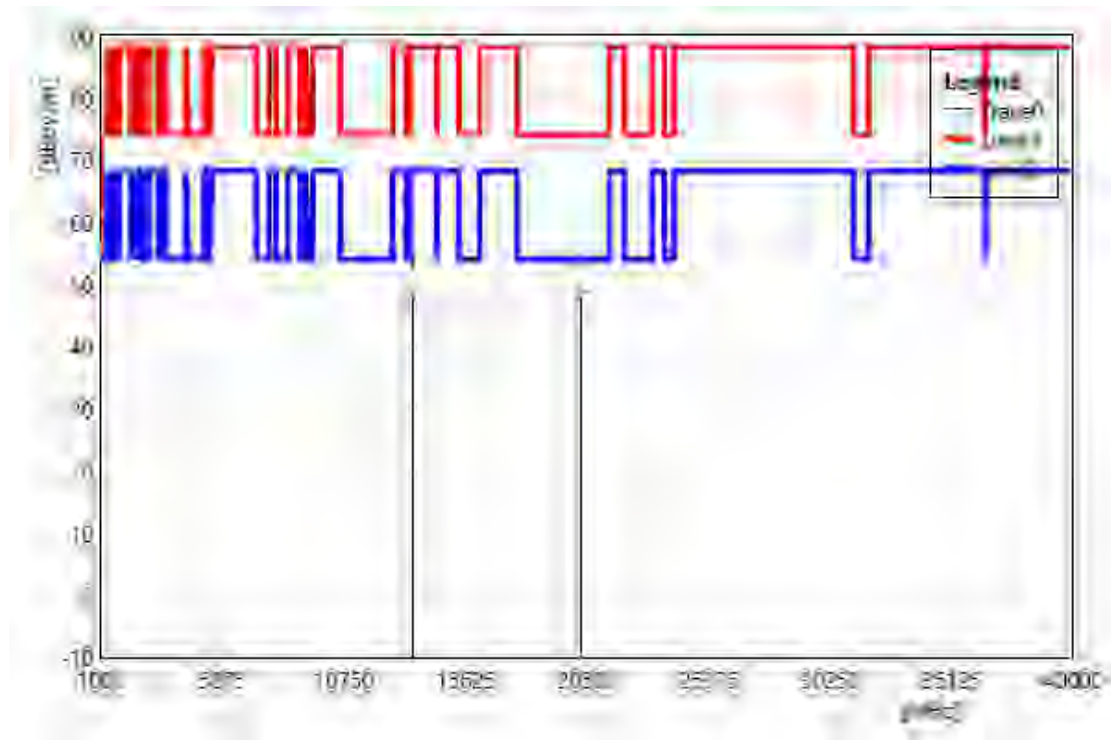


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	34.18	13.90	48.08	88.20	-40.12	PEAK
2	20235.00	31.96	16.18	48.14	74.00	-25.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

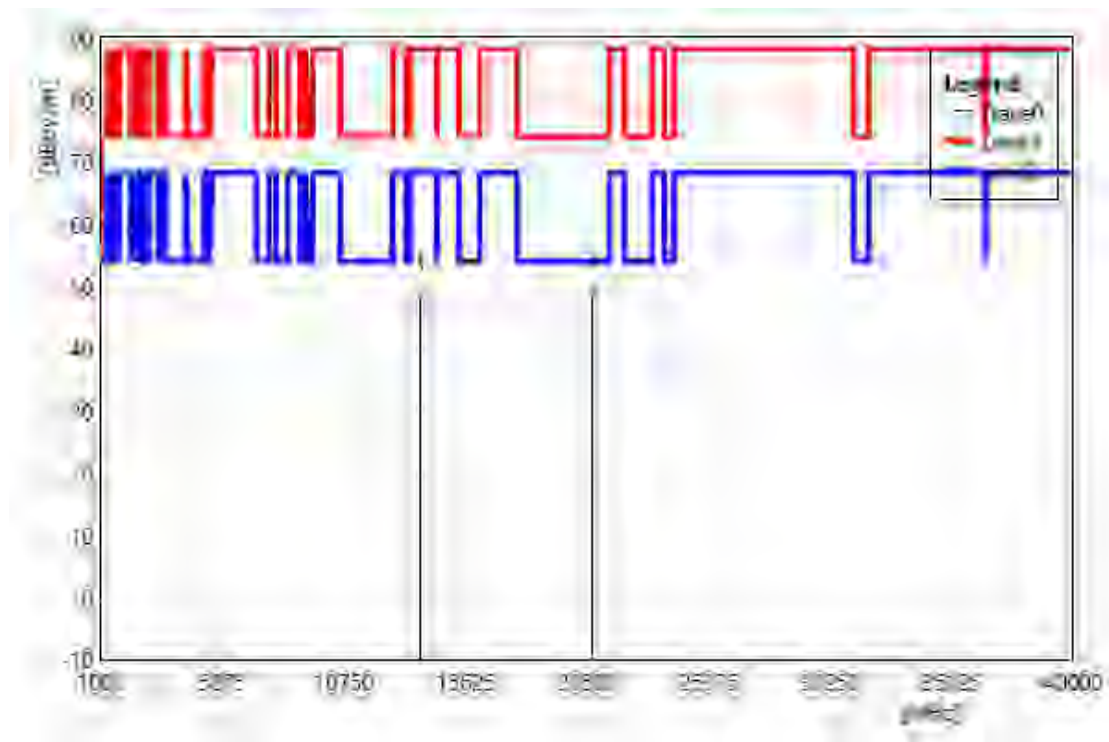

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	34.20	14.09	48.29	88.20	-39.91	PEAK
2	20715.00	32.09	16.79	48.88	74.00	-25.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

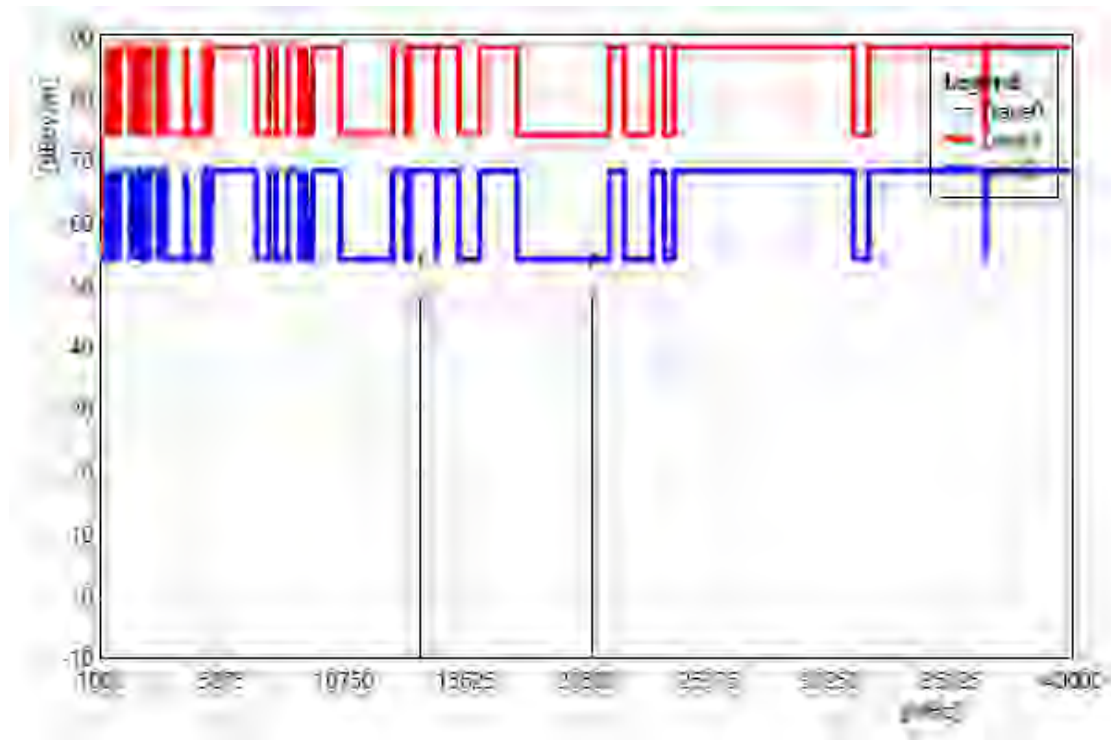


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	33.70	14.09	47.79	88.20	-40.41	PEAK
2	20715.00	31.48	16.79	48.27	74.00	-25.73	PEAK

Band Edge


Peak + Average

Test Site: 966 Chamber Standard: Part 15E
Test Mode: 802.11be EHT20 5955 MHz
Polarization: Vertical
Remark:

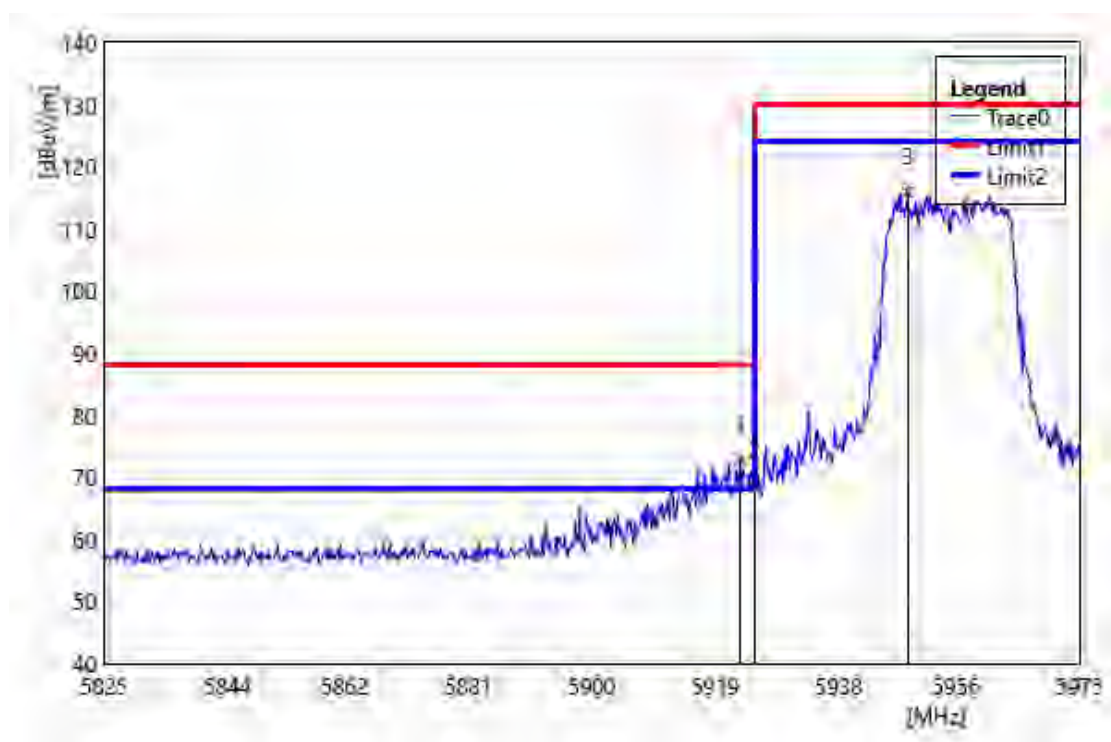


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.80	72.28	0.64	72.93	88.20	-15.28	PEAK
2	5925.00	67.95	0.63	68.58	88.20	-19.62	PEAK
3	5948.60	115.35	0.57	115.92	130.00	-14.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5955 MHz		
Polarization:	Horizontal		
Remark:			

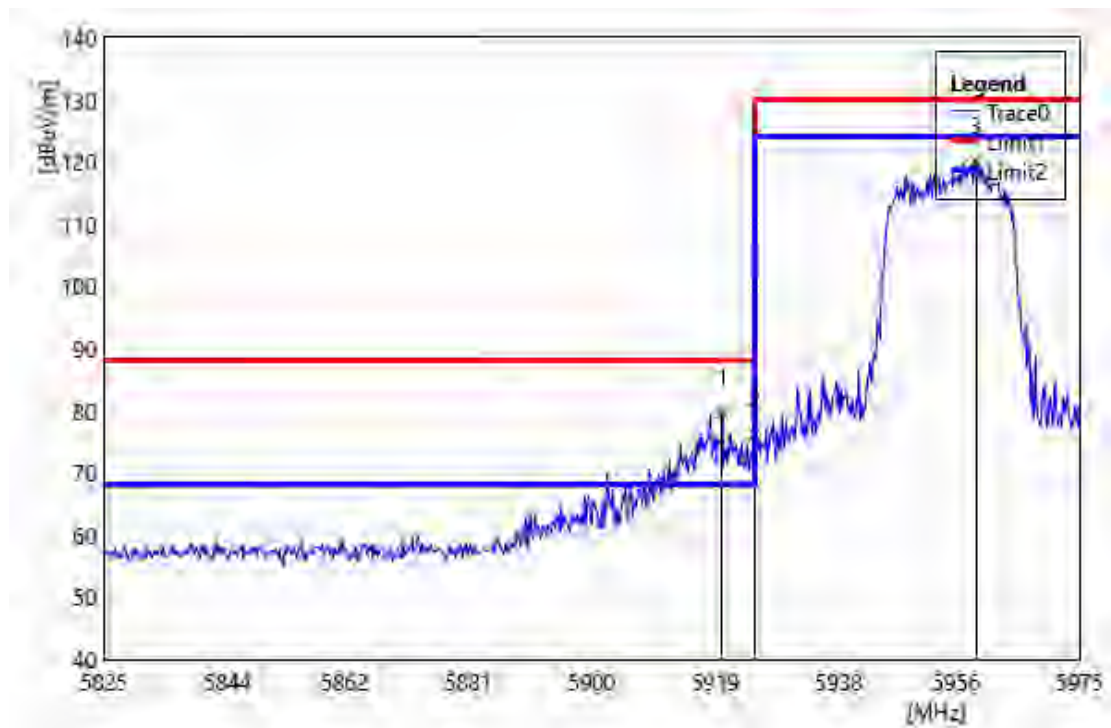


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.10	79.07	0.65	79.72	88.20	-8.48	PEAK
2	5925.00	75.62	0.63	76.25	88.20	-11.95	PEAK
3	5959.10	119.52	0.56	120.09	130.00	-9.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5955 MHz		
Polarization:	Vertical		
Remark:			

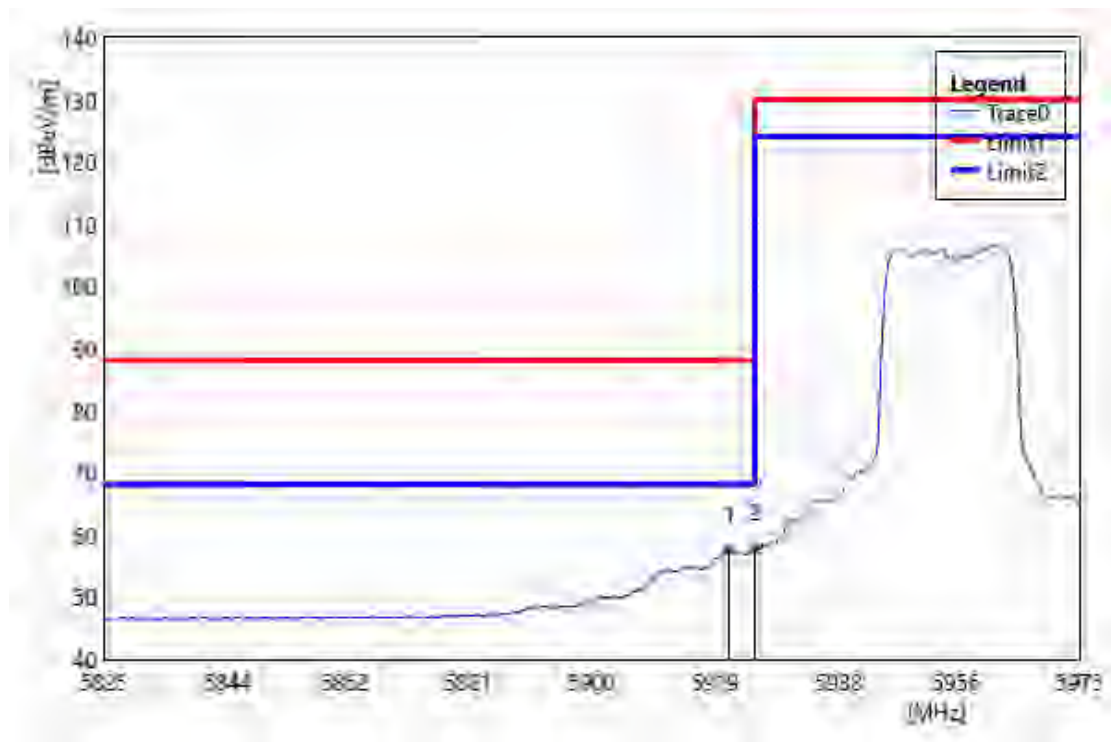


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.15	57.00	0.65	57.65	68.20	-10.55	AVG
2	5925.00	57.25	0.63	57.88	68.20	-10.32	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5955 MHz		
Polarization:	Horizontal		
Remark:			

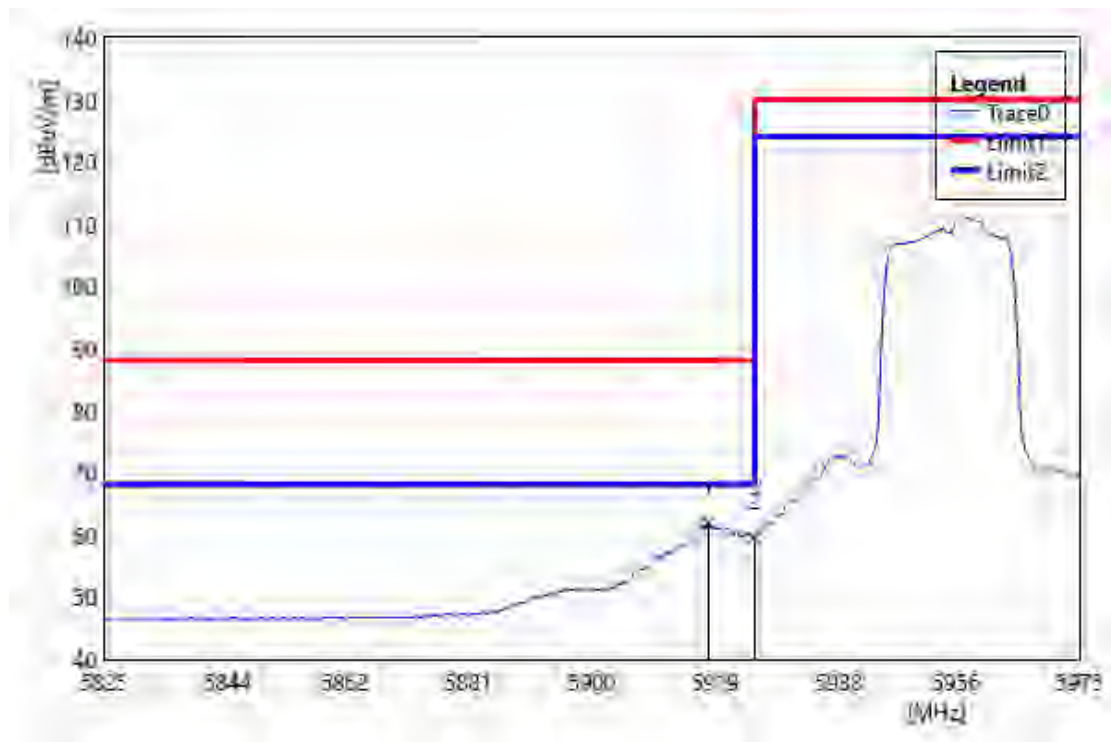


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5917.85	61.22	0.65	61.87	68.20	-6.33	AVG
2	5925.00	58.98	0.63	59.61	68.20	-8.59	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7095 MHz		
Polarization:	Vertical		
Remark:			

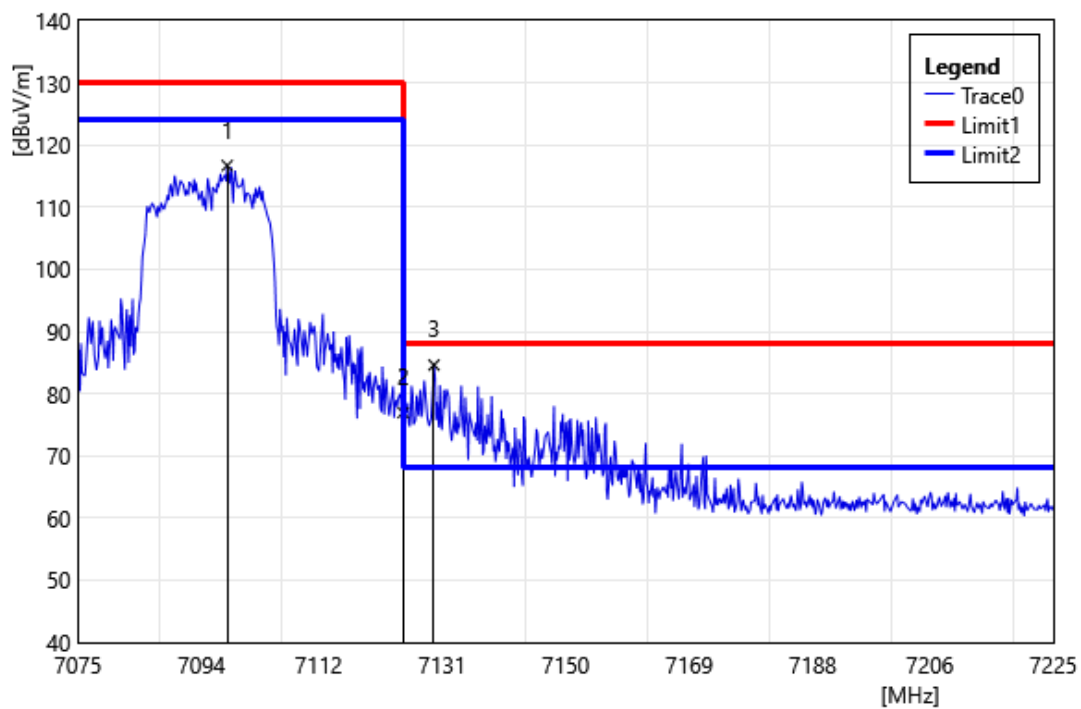


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7097.95	111.90	4.80	116.70	130.00	-13.30	PEAK
2	7125.00	72.06	4.88	76.94	88.20	-11.26	PEAK
3	7129.75	79.73	4.89	84.62	88.20	-3.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7095 MHz		
Polarization:	Horizontal		
Remark:			

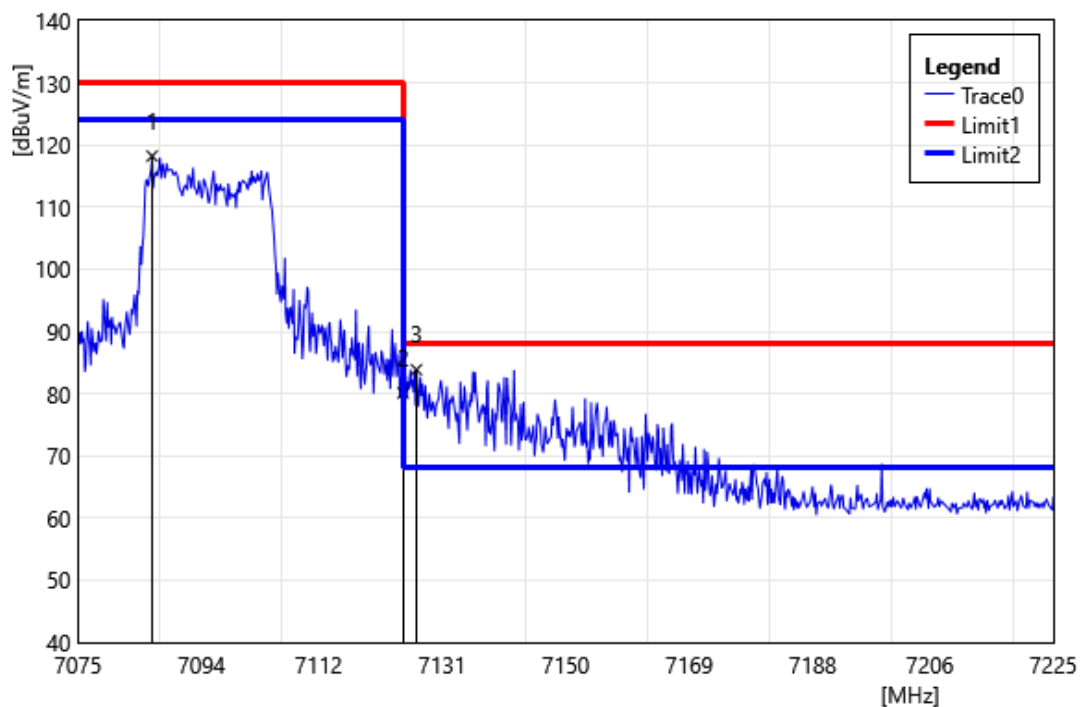


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7086.40	113.52	4.70	118.22	130.00	-11.79	PEAK
2	7125.00	75.22	4.88	80.10	88.20	-8.10	PEAK
3	7127.05	78.97	4.89	83.86	88.20	-4.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7095 MHz		
Polarization:	Vertical		
Remark:			

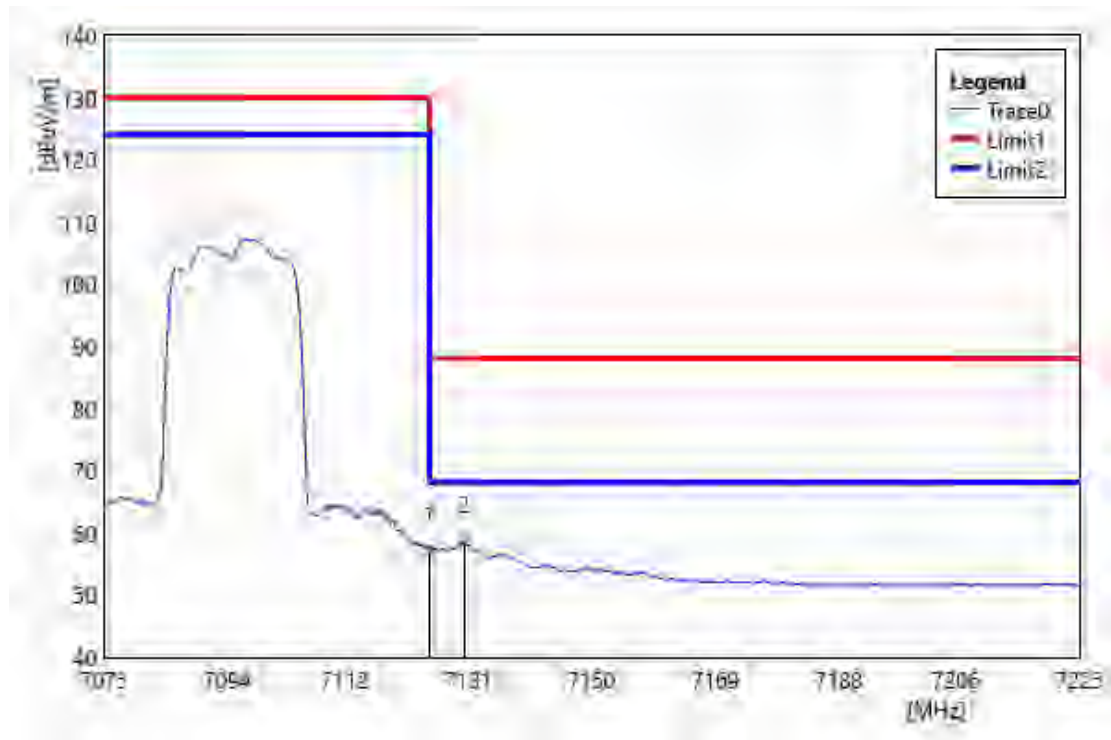


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	52.45	4.88	57.33	68.20	-10.87	AVG
2	7130.35	53.85	4.90	58.75	68.20	-9.45	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7095 MHz		
Polarization:	Horizontal		
Remark:			

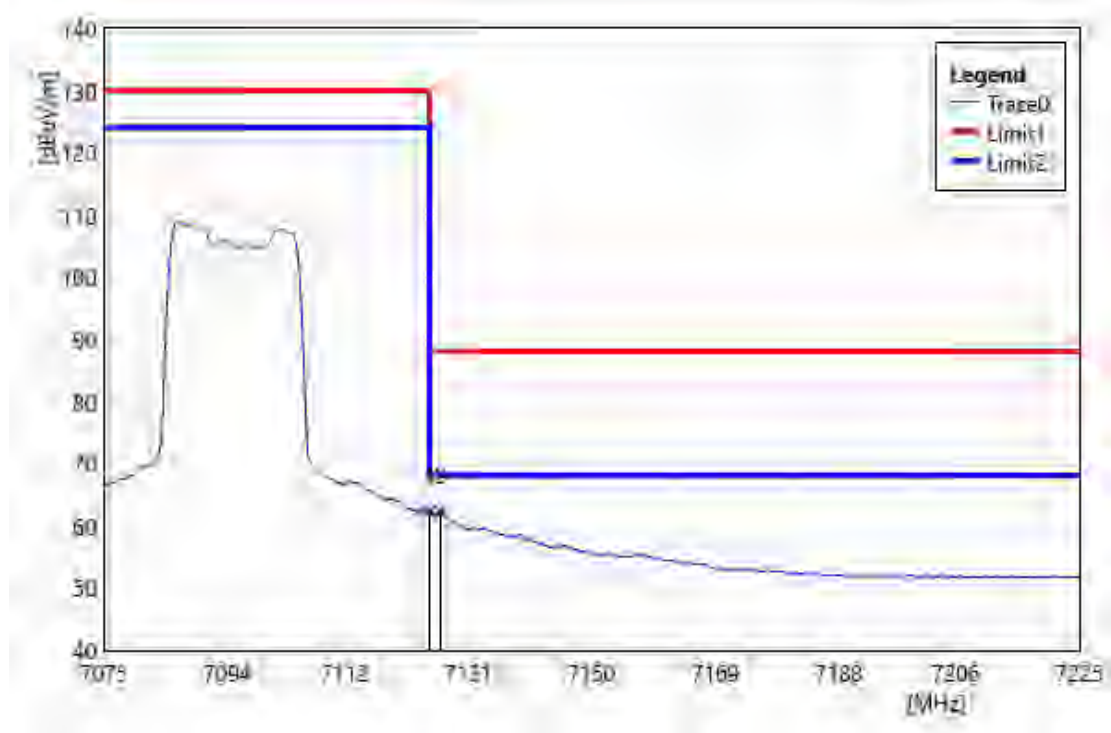


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	57.29	4.88	62.17	68.20	-6.03	AVG
2	7126.75	57.41	4.89	62.30	68.20	-5.90	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

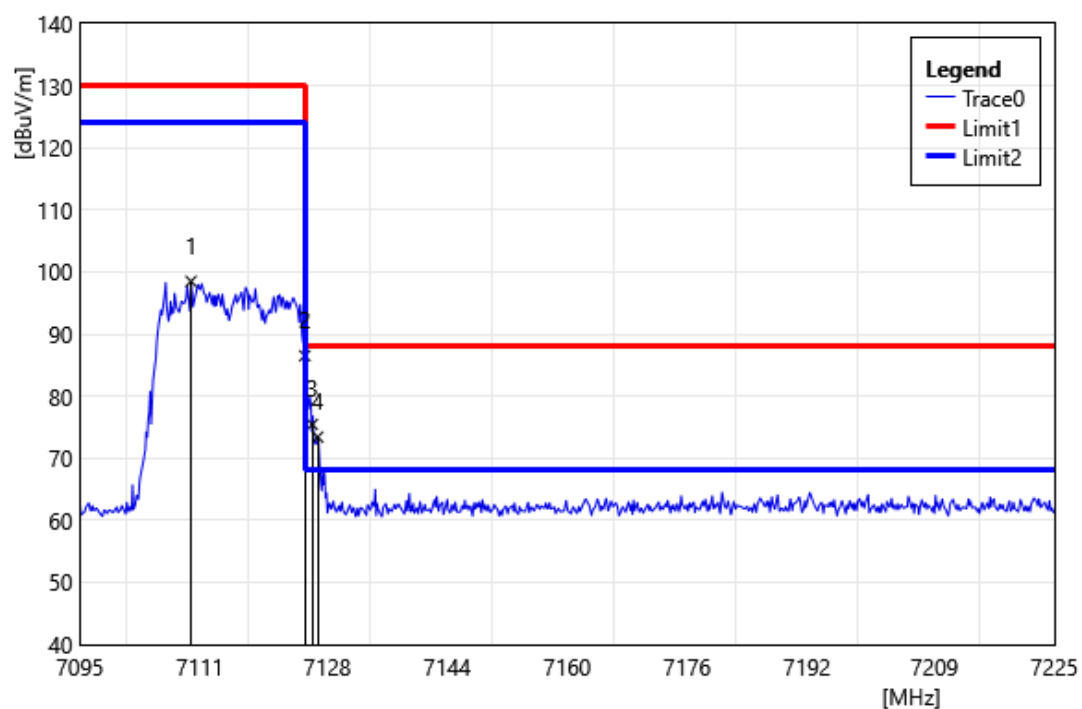


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7109.82	93.64	4.84	98.48	130.00	-31.52	PEAK
2	7125.00	81.62	4.88	86.50	88.20	-1.70	PEAK
3	7126.00	70.57	4.88	75.45	88.20	-12.75	PEAK
4	7126.72	68.53	4.89	73.42	88.20	-14.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Horizontal		
Remark:			

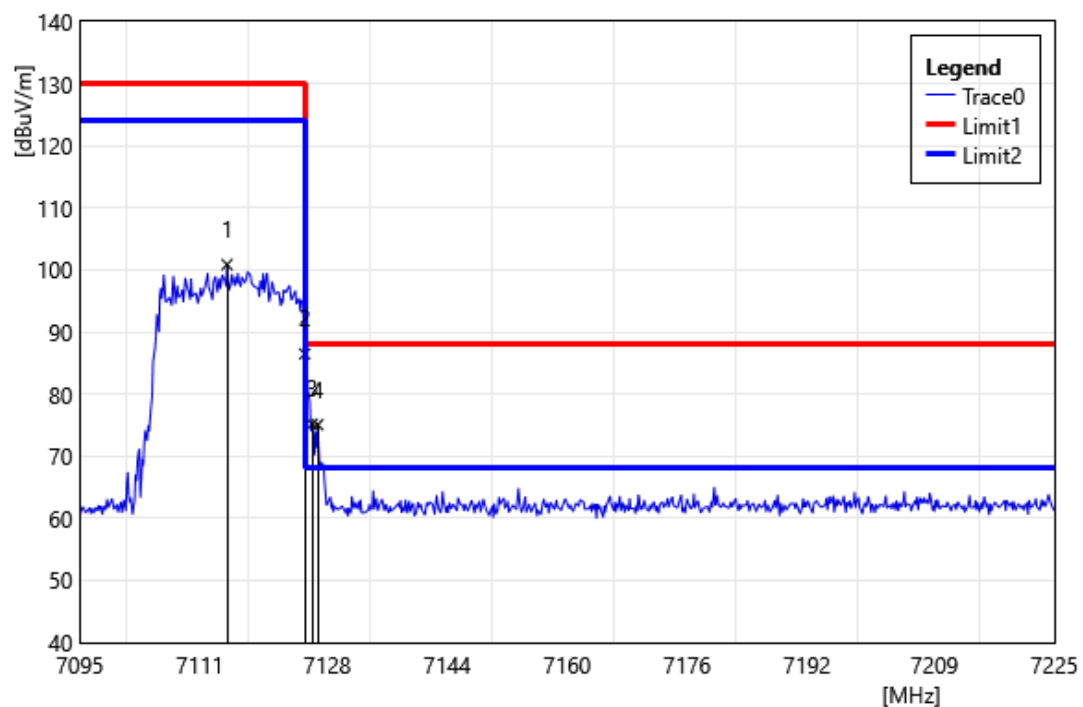


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7114.63	96.02	4.85	100.87	130.00	-29.13	PEAK
2	7125.00	81.61	4.88	86.49	88.20	-1.71	PEAK
3	7126.00	70.30	4.88	75.18	88.20	-13.02	PEAK
4	7126.72	70.19	4.89	75.08	88.20	-13.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

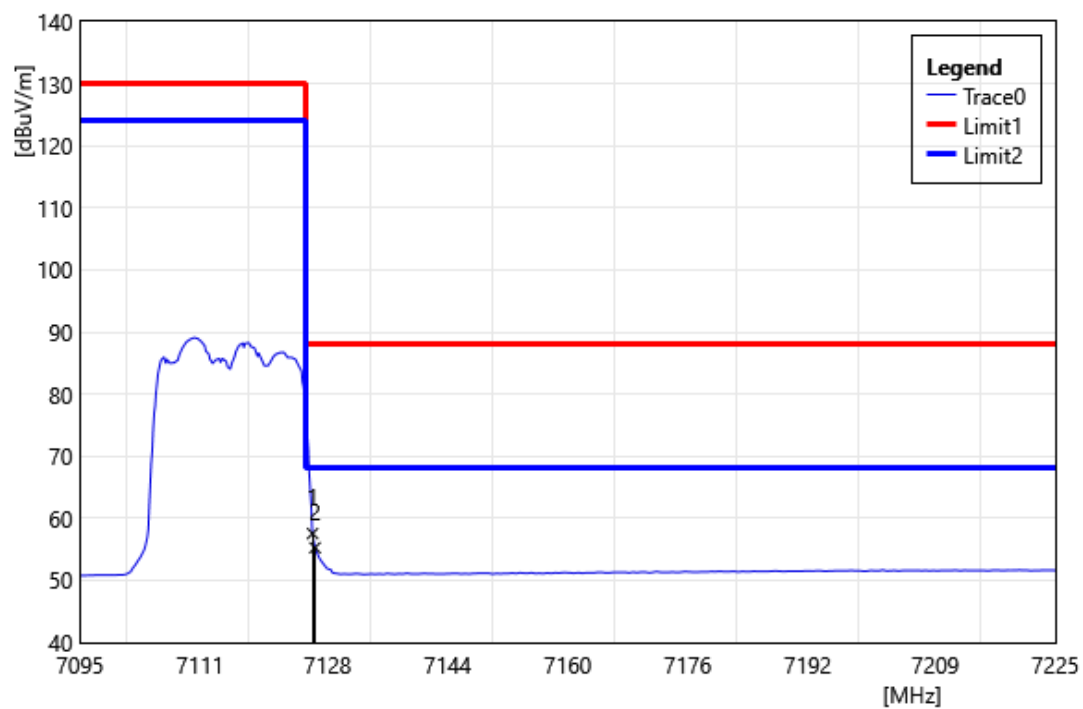


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7126.00	52.67	4.88	57.55	68.20	-10.65	AVG
2	7126.33	50.39	4.88	55.27	68.20	-12.93	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Horizontal		
Remark:			

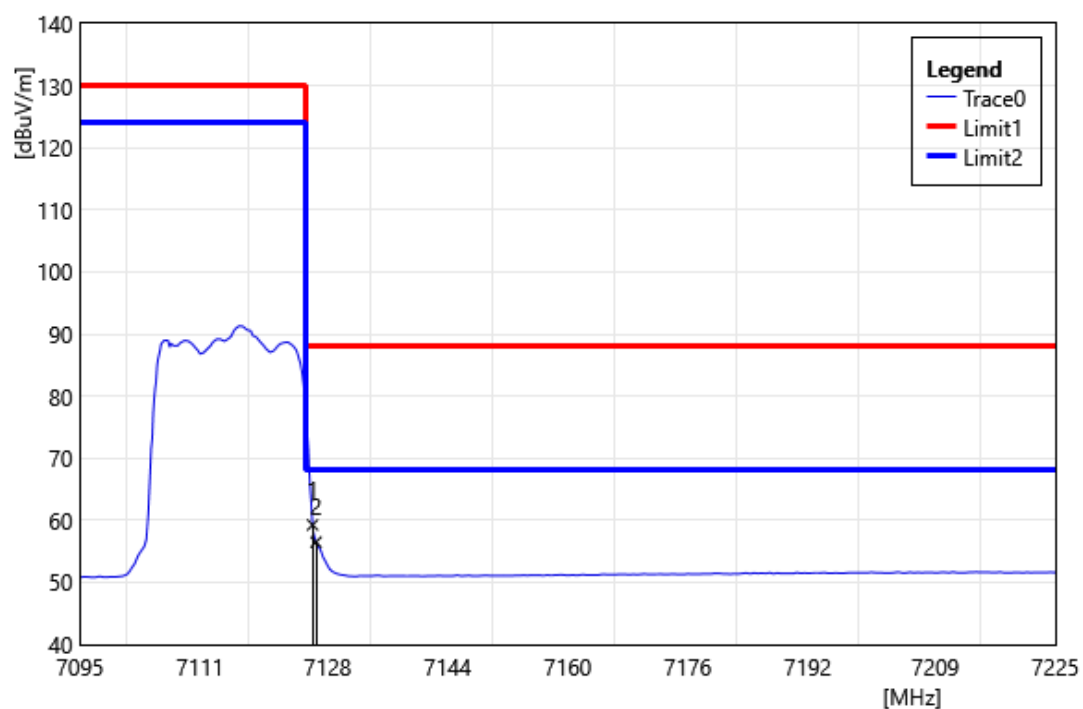

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7126.00	54.38	4.88	59.26	68.20	-8.94	AVG
2	7126.46	51.61	4.89	56.50	68.20	-11.70	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Vertical		
Remark:			

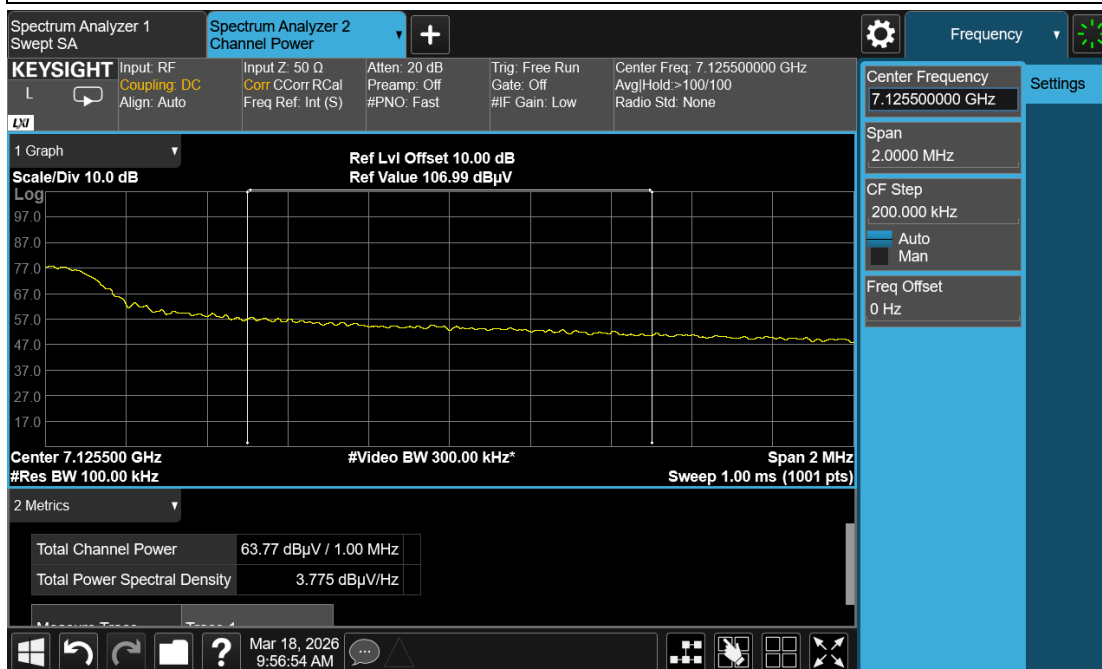


ID	Frequency MHz	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	*7125	63.77	68.20	-4.43	AVG

Remark:

1. "":The frequency is out of the restricted band.

2.Follow ANSI C63.10 section 12.7.4.4.1 and KDB789033 section II.G.3.d) Integration method.

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Horizontal		
Remark:			

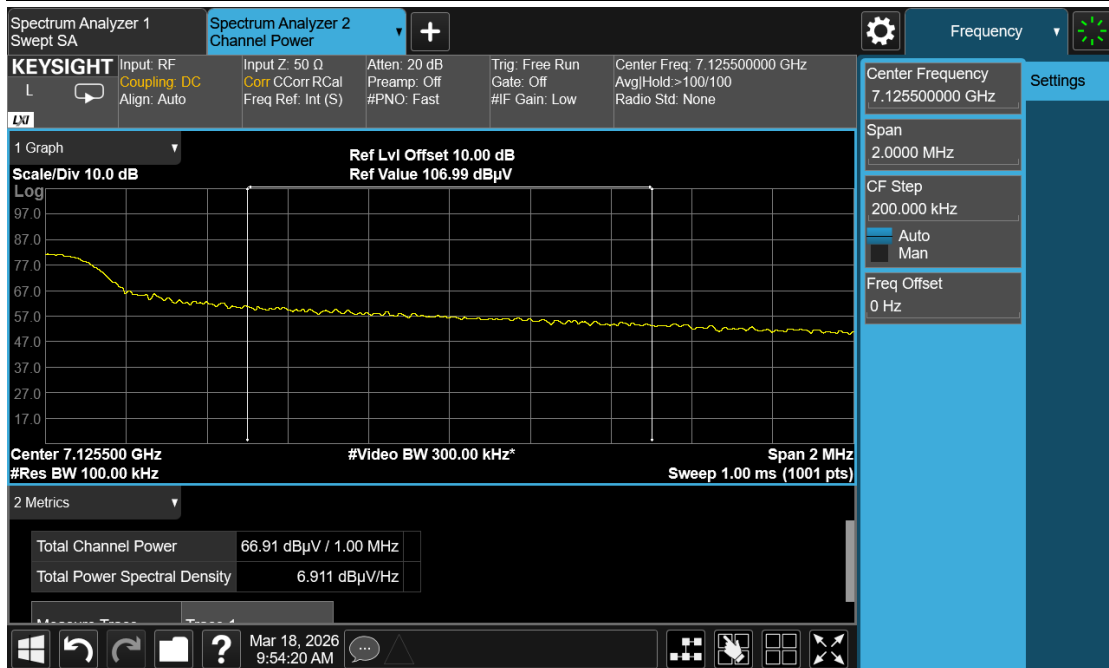


ID	Frequency MHz	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	*7125	66.91	68.20	-1.29	AVG

Remark:


1. "":The frequency is out of the restricted band.
2. Follow ANSI C63.10 section 12.7.4.4.1 and KDB789033 section II.G.3.d) Integration method.

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Vertical		
Remark:			

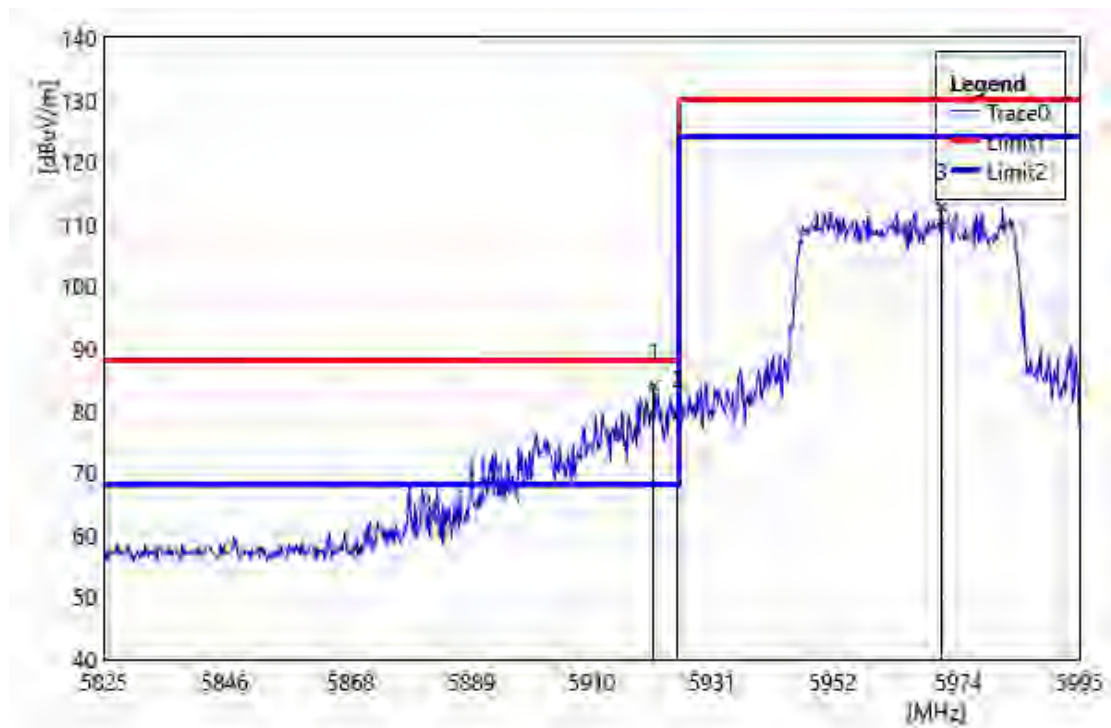


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.88	83.32	0.65	83.97	88.20	-4.23	PEAK
2	5925.00	78.84	0.63	79.47	88.20	-8.73	PEAK
3	5971.03	112.31	0.54	112.85	130.00	-17.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

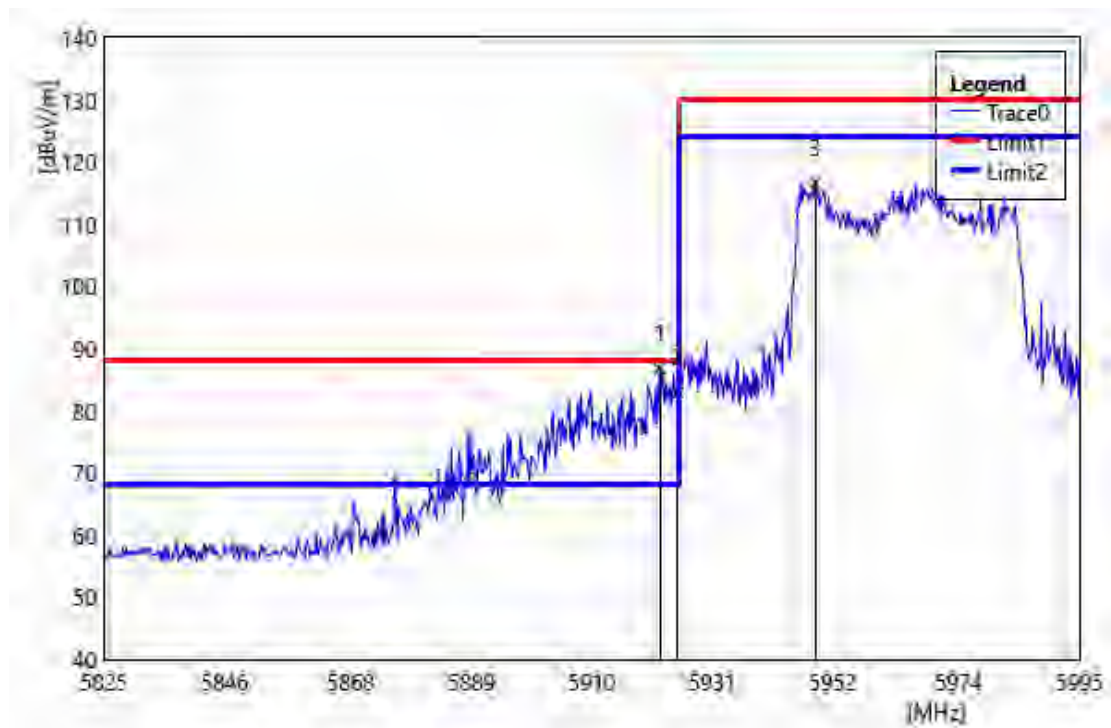


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.90	86.13	0.64	86.77	88.20	-1.43	PEAK
2	5925.00	82.29	0.63	82.92	88.20	-5.28	PEAK
3	5948.93	116.12	0.57	116.69	130.00	-13.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Vertical		
Remark:			

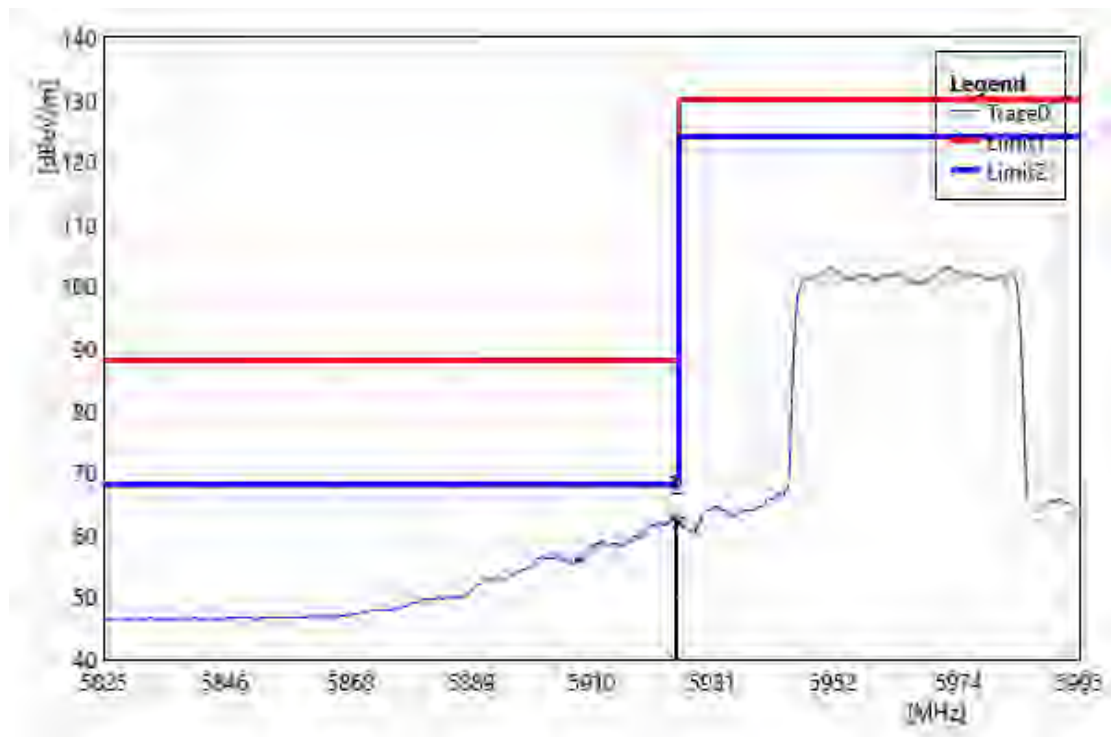


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	62.13	0.64	62.77	68.20	-5.43	AVG
2	5925.00	61.40	0.63	62.03	68.20	-6.17	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

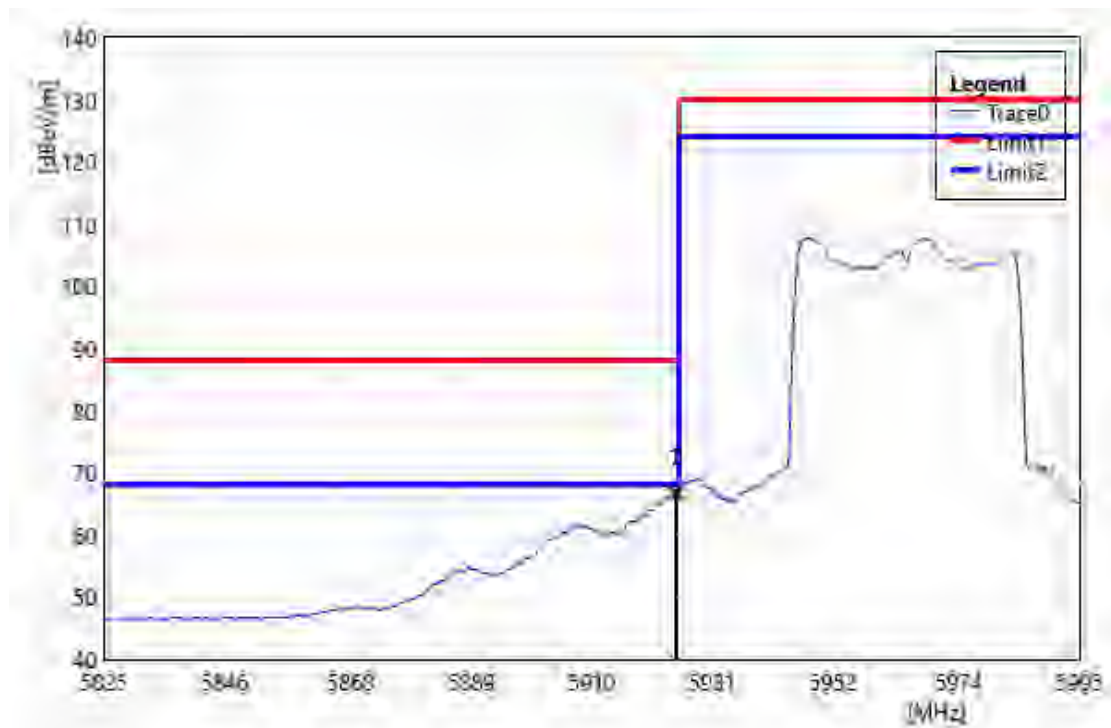


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	66.14	0.64	66.78	68.20	-1.42	AVG
2	5925.00	66.16	0.63	66.79	68.20	-1.41	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

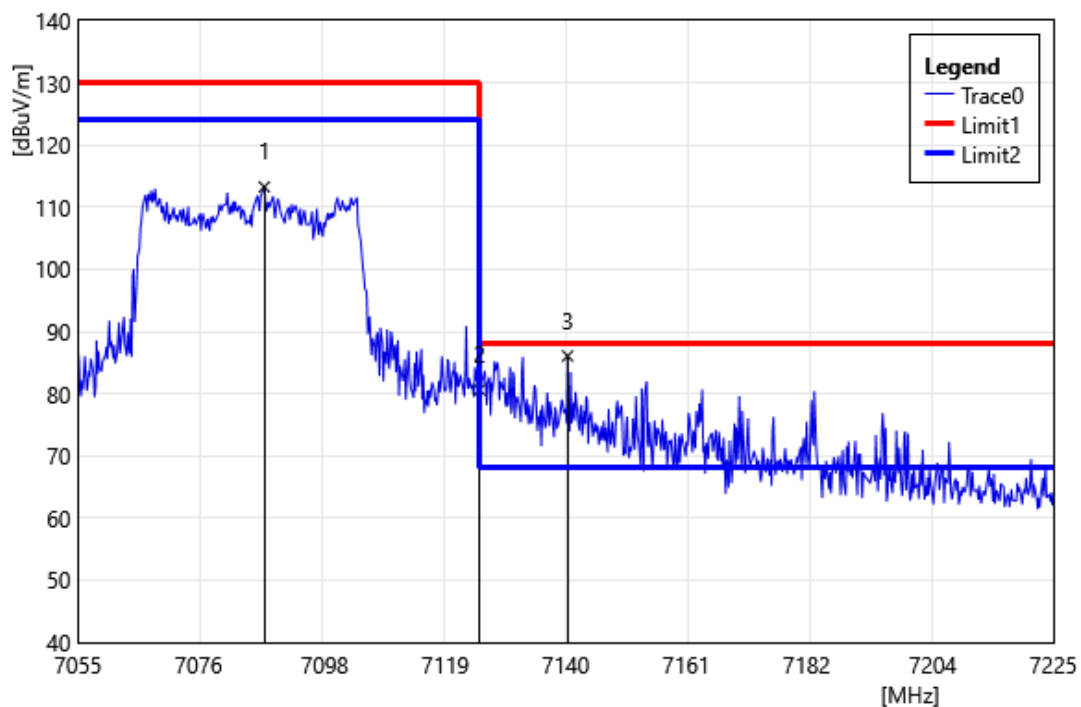


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7087.47	108.55	4.71	113.26	130.00	-16.74	PEAK
2	7125.00	75.75	4.88	80.63	88.20	-7.57	PEAK
3	7140.34	81.14	4.92	86.06	88.20	-2.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

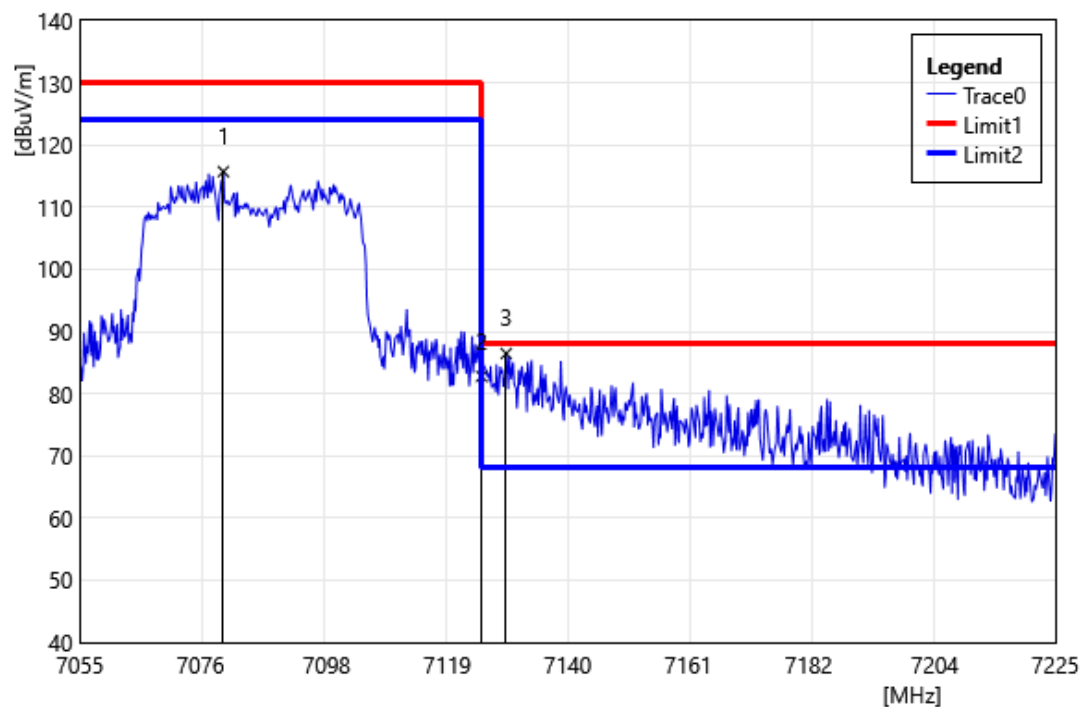


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7079.99	111.07	4.64	115.71	130.00	-14.29	PEAK
2	7125.00	77.91	4.88	82.79	88.20	-5.41	PEAK
3	7129.29	81.58	4.89	86.47	88.20	-1.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

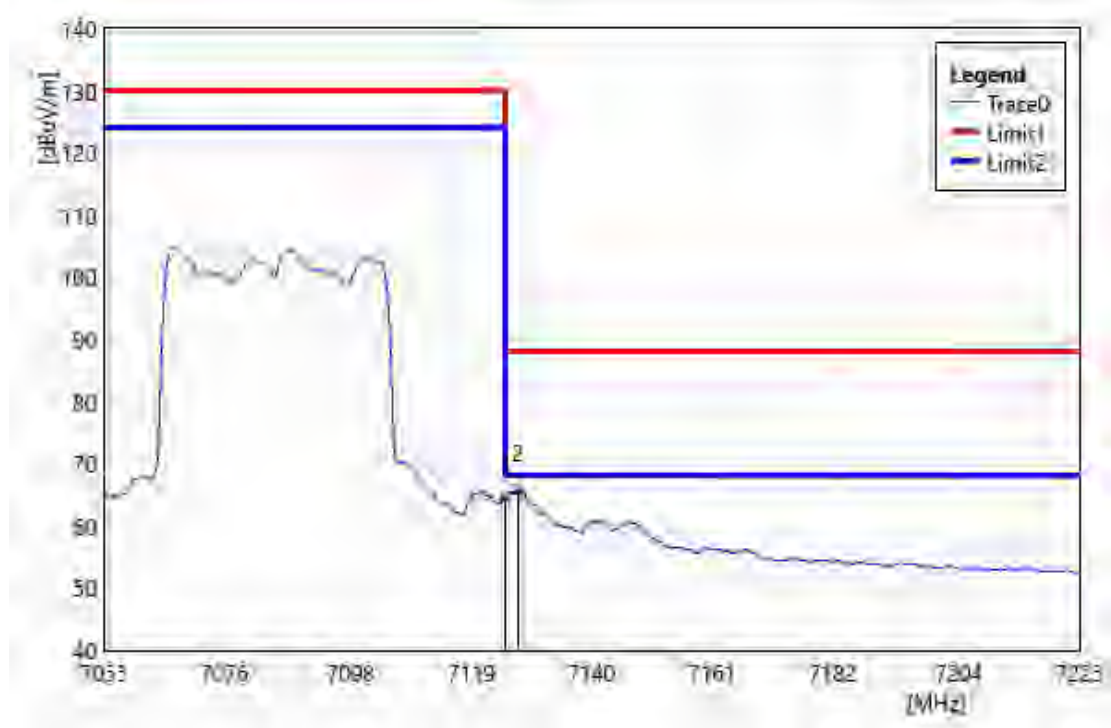


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.68	4.88	64.56	68.20	-3.65	AVG
2	7127.08	61.06	4.89	65.95	68.20	-2.25	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

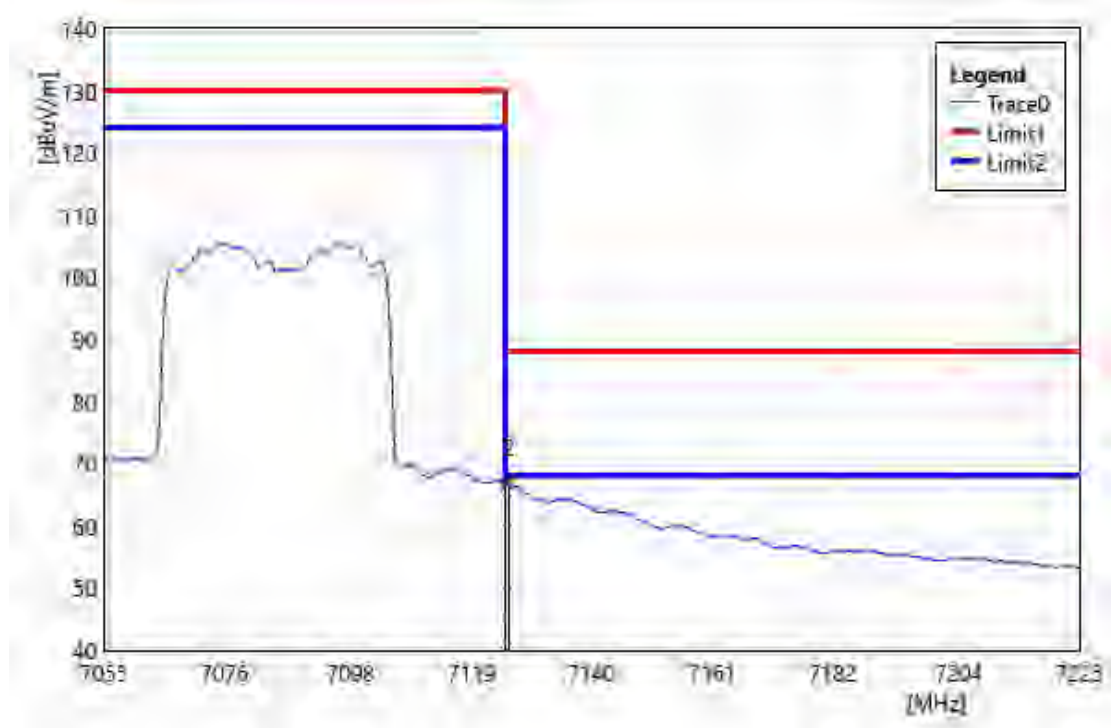


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	62.04	4.88	66.92	68.20	-1.28	AVG
2	7125.55	62.01	4.88	66.89	68.20	-1.31	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

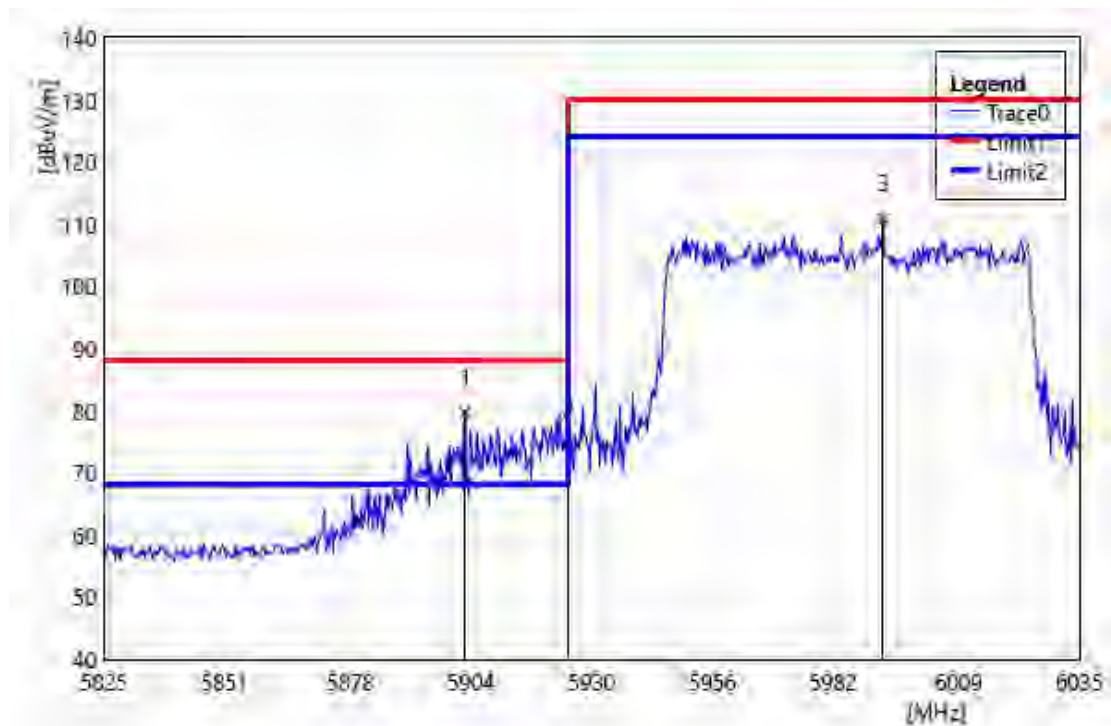


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5902.70	79.04	0.70	79.74	88.20	-8.46	PEAK
2	5925.00	73.94	0.63	74.57	88.20	-13.63	PEAK
3	5992.79	110.31	0.53	110.84	130.00	-19.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

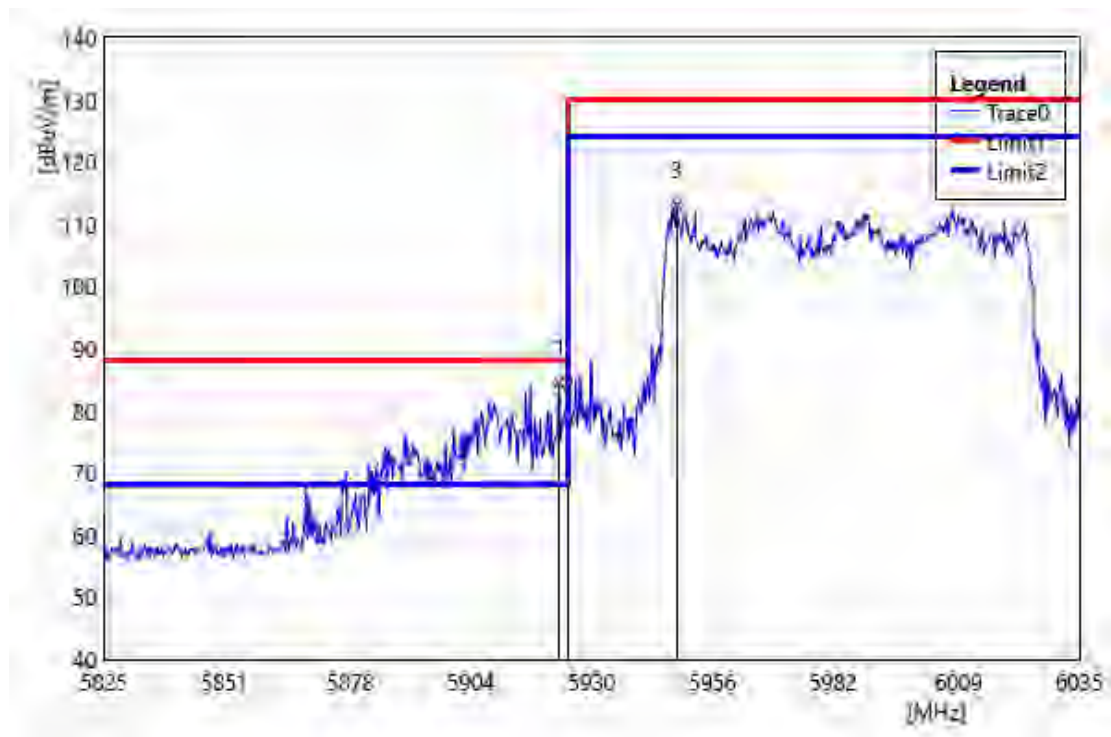


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.07	83.84	0.64	84.48	88.20	-3.72	PEAK
2	5925.00	78.02	0.63	78.65	88.20	-9.55	PEAK
3	5948.27	112.48	0.57	113.05	130.00	-16.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

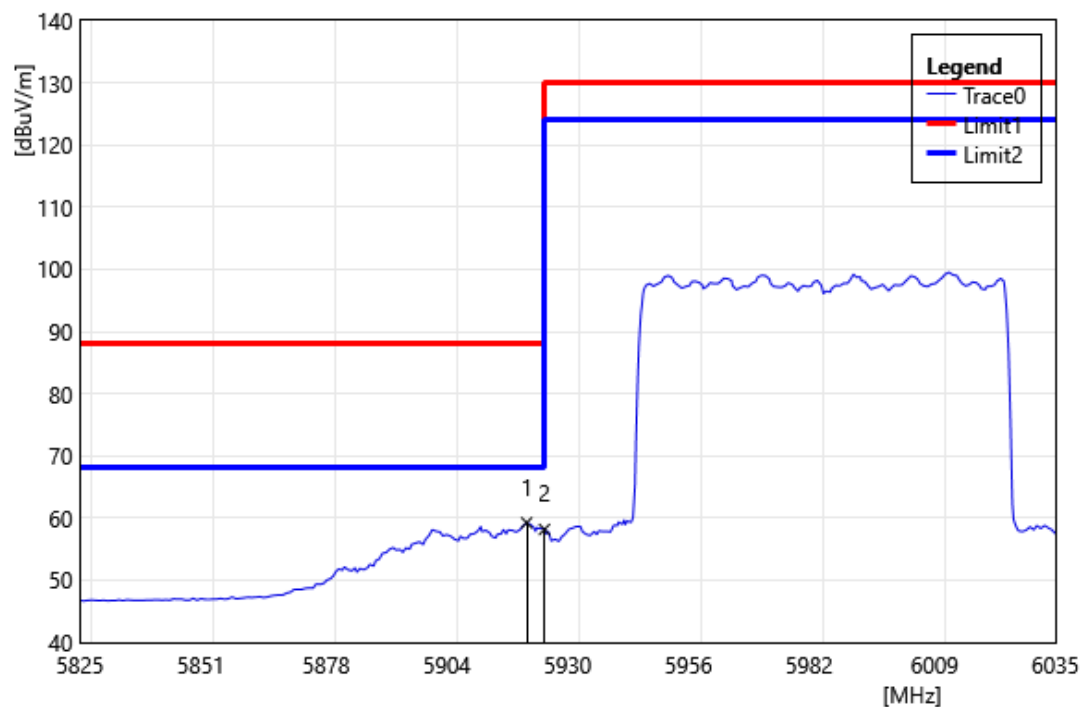


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.18	58.60	0.65	59.25	68.20	-8.95	AVG
2	5925.00	57.53	0.63	58.16	68.20	-10.04	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

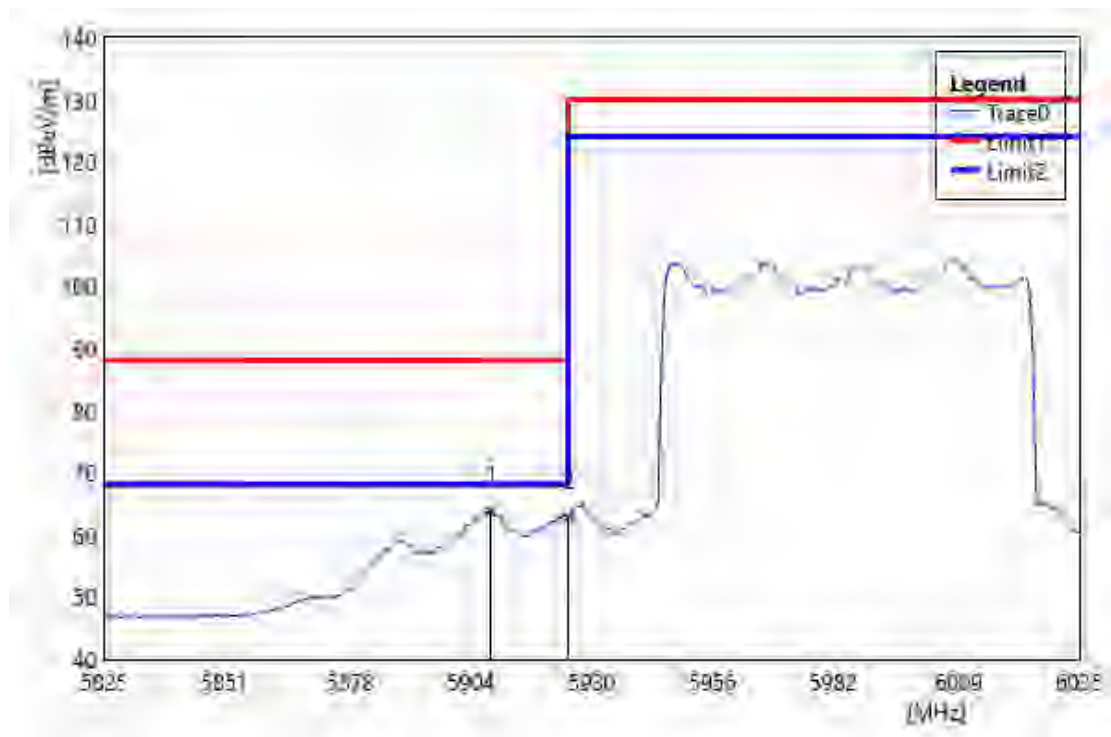


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5908.37	63.21	0.68	63.89	68.20	-4.31	AVG
2	5925.00	62.37	0.63	63.00	68.20	-5.20	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Vertical		
Remark:			

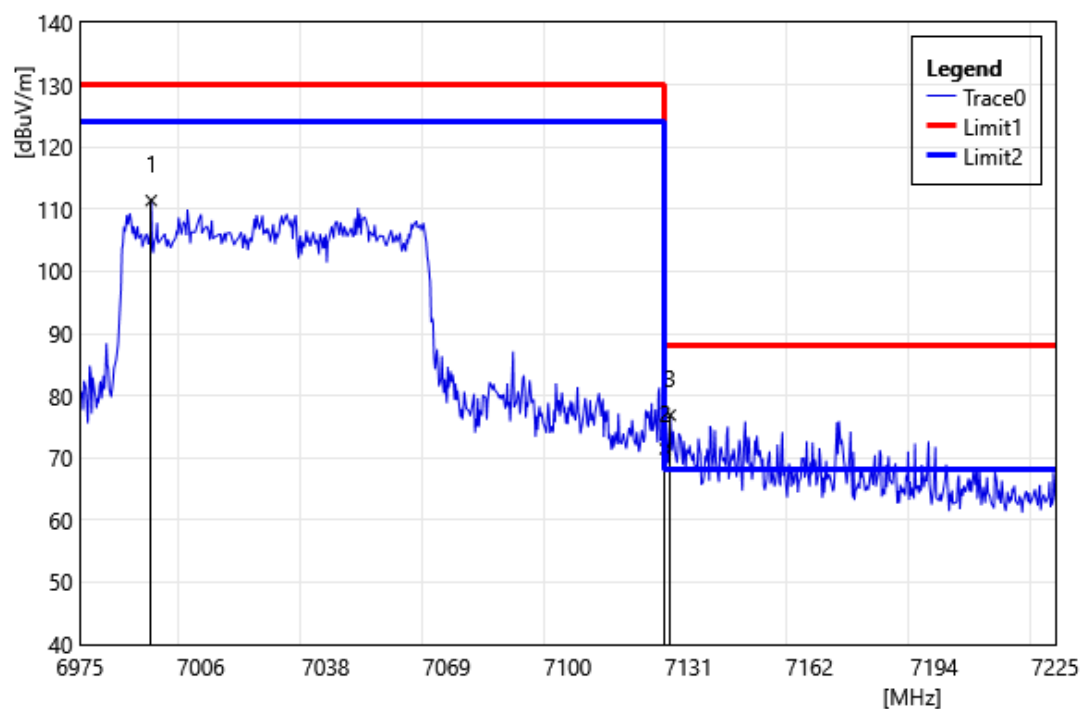


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6993.25	107.45	3.94	111.39	130.00	-18.61	PEAK
2	7125.00	66.55	4.88	71.43	88.20	-16.77	PEAK
3	7126.25	72.00	4.88	76.88	88.20	-11.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Horizontal		
Remark:			

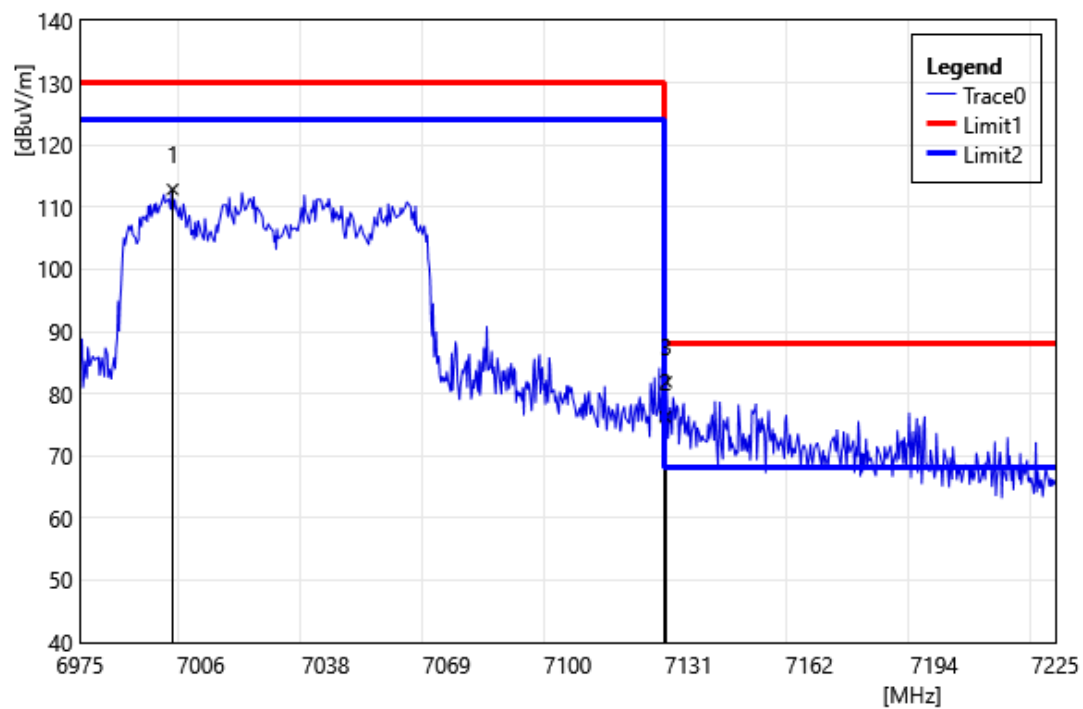


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6998.75	108.90	3.95	112.86	130.00	-17.15	PEAK
2	7125.00	71.37	4.88	76.25	88.20	-11.95	PEAK
3	7125.25	77.00	4.88	81.88	88.20	-6.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Vertical		
Remark:			

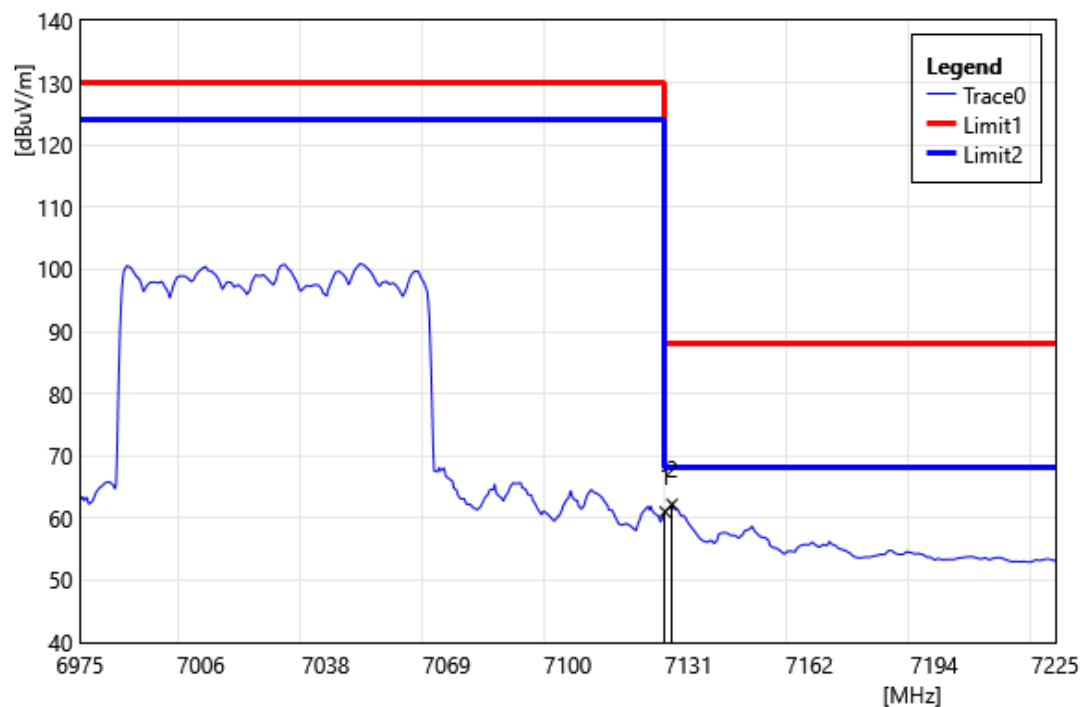


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	56.12	4.88	61.00	68.20	-7.20	AVG
2	7126.75	57.30	4.89	62.19	68.20	-6.01	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Horizontal		
Remark:			

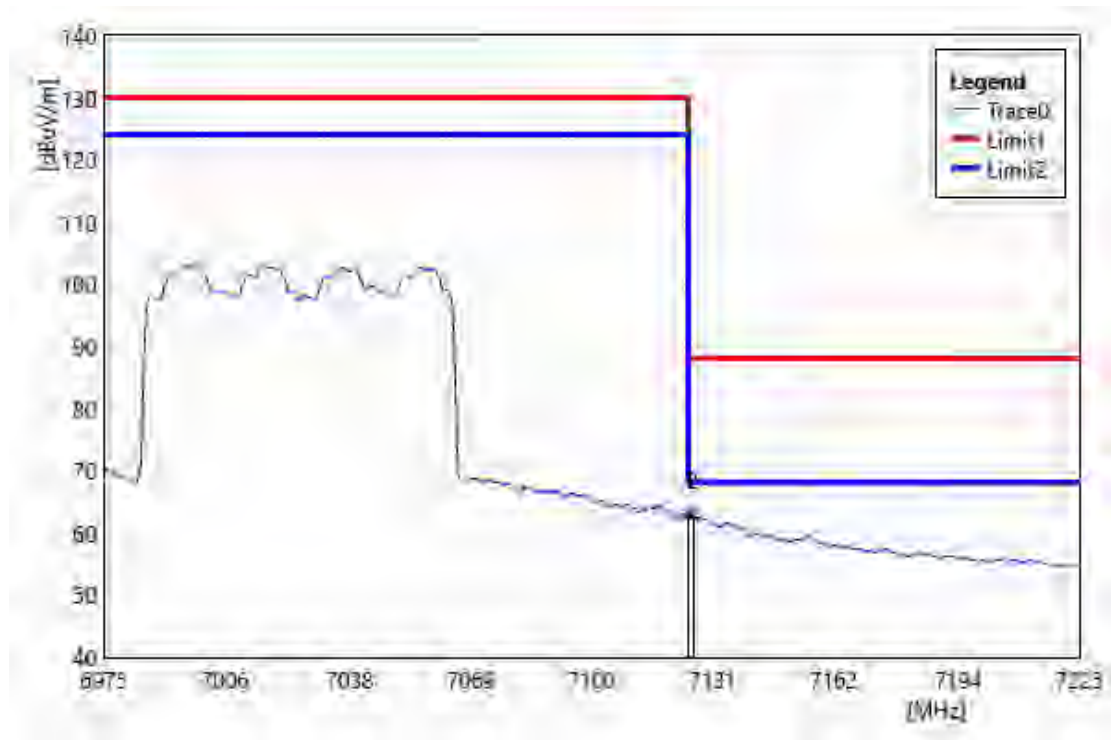


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	58.14	4.88	63.02	68.20	-5.18	AVG
2	7126.00	57.95	4.88	62.83	68.20	-5.37	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Vertical		
Remark:			

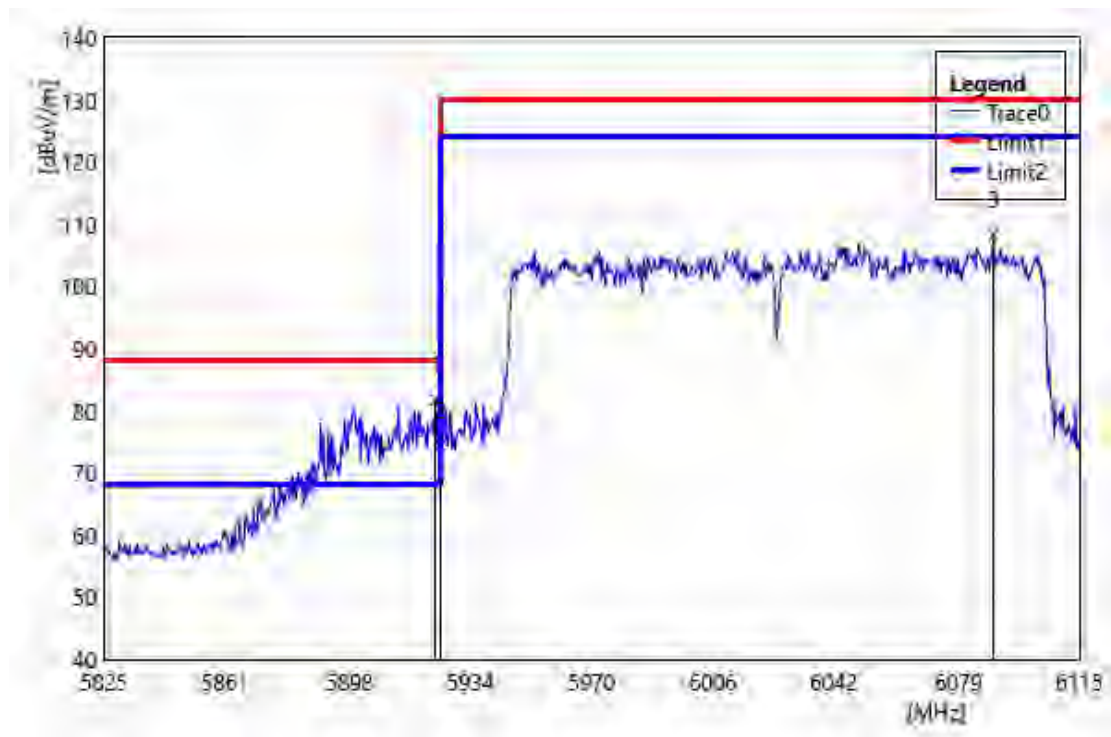


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.60	81.07	0.64	81.71	88.20	-6.49	PEAK
2	5925.00	73.80	0.63	74.43	88.20	-13.77	PEAK
3	6089.48	107.38	0.94	108.32	130.00	-21.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Horizontal		
Remark:			

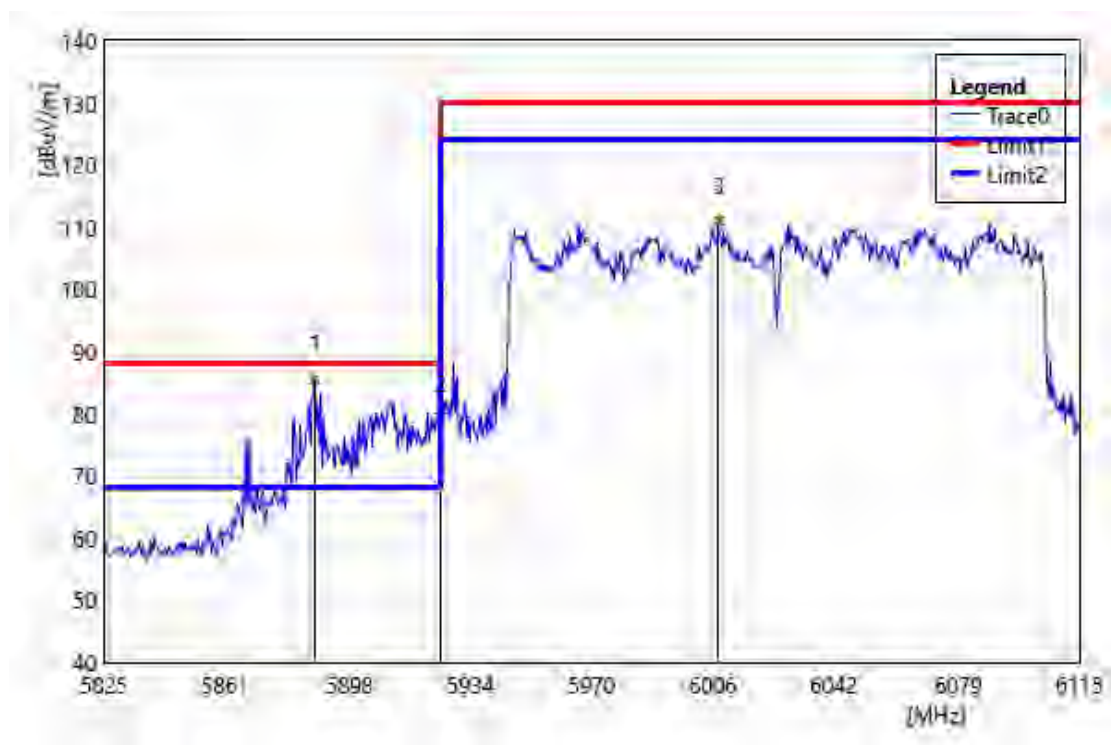


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5887.64	84.95	0.64	85.59	88.20	-2.61	PEAK
2	5925.00	78.60	0.63	79.23	88.20	-8.97	PEAK
3	6007.70	110.47	0.56	111.03	130.00	-18.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Vertical		
Remark:			

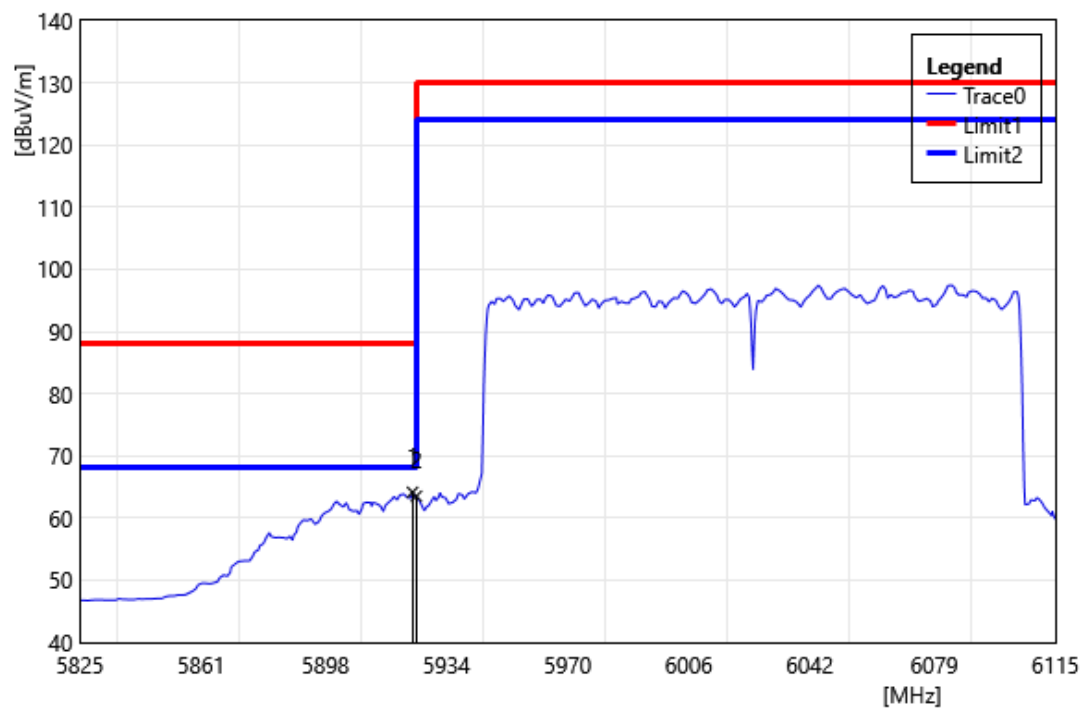


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.89	63.50	0.64	64.14	68.20	-4.06	AVG
2	5925.00	62.89	0.63	63.52	68.20	-4.68	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Horizontal		
Remark:			

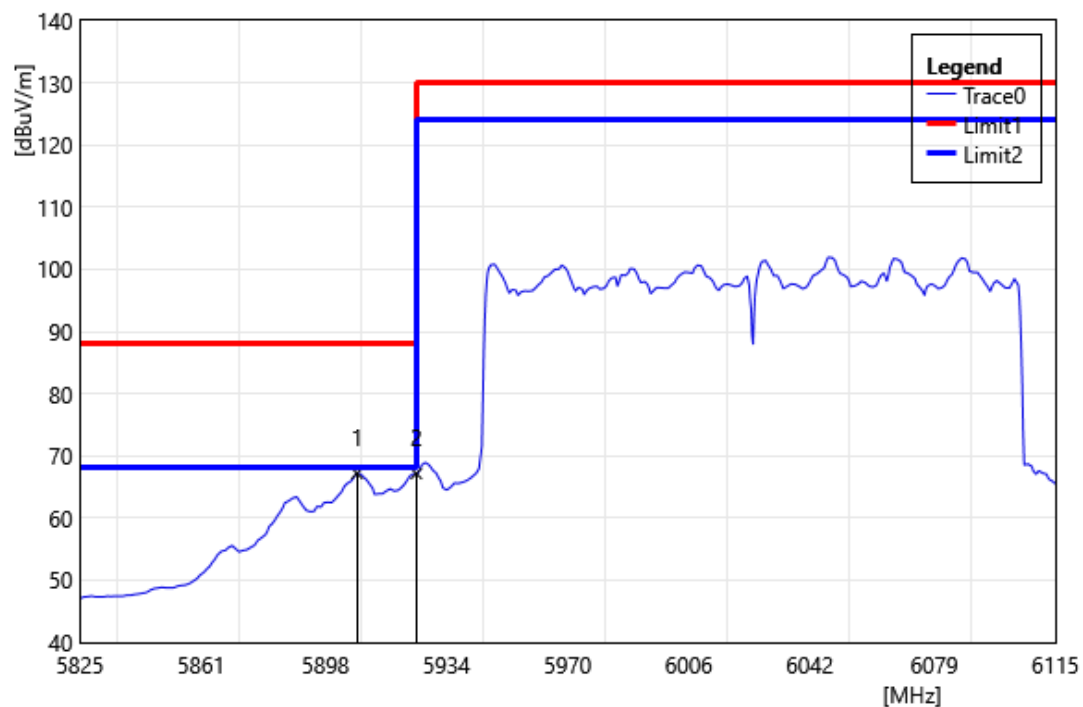


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5907.36	66.51	0.68	67.19	68.20	-1.01	AVG
2	5925.00	66.54	0.63	67.17	68.20	-1.03	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

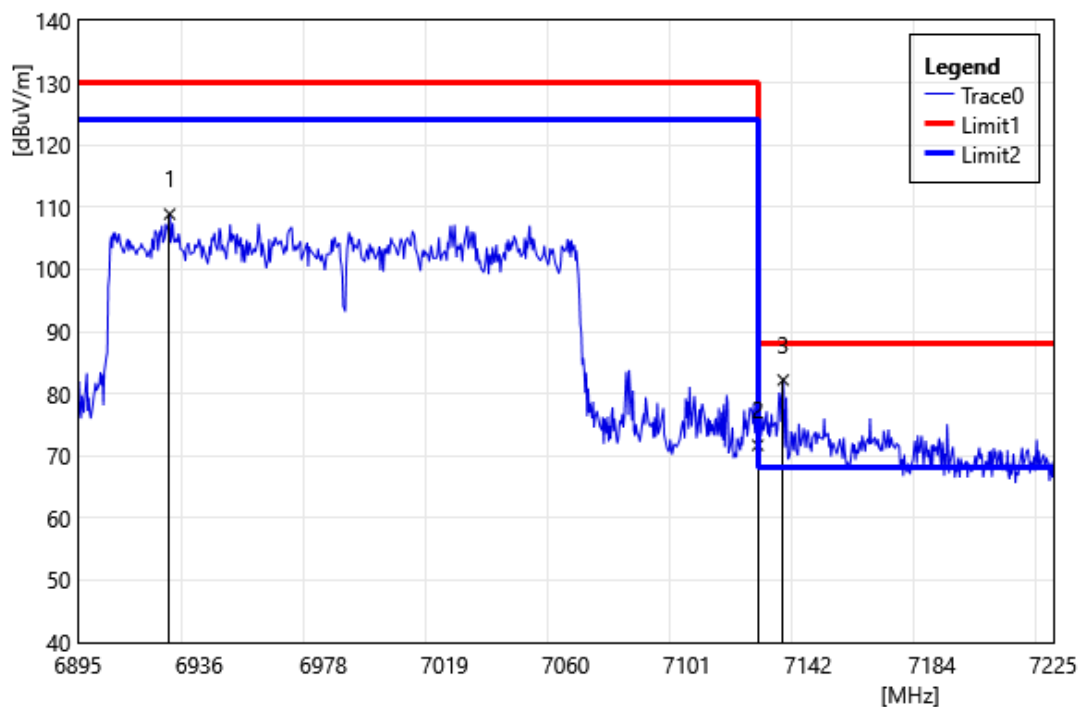


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6926.02	105.09	3.80	108.89	130.00	-21.11	PEAK
2	7125.00	66.83	4.88	71.71	88.20	-16.49	PEAK
3	7133.59	77.31	4.90	82.21	88.20	-5.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

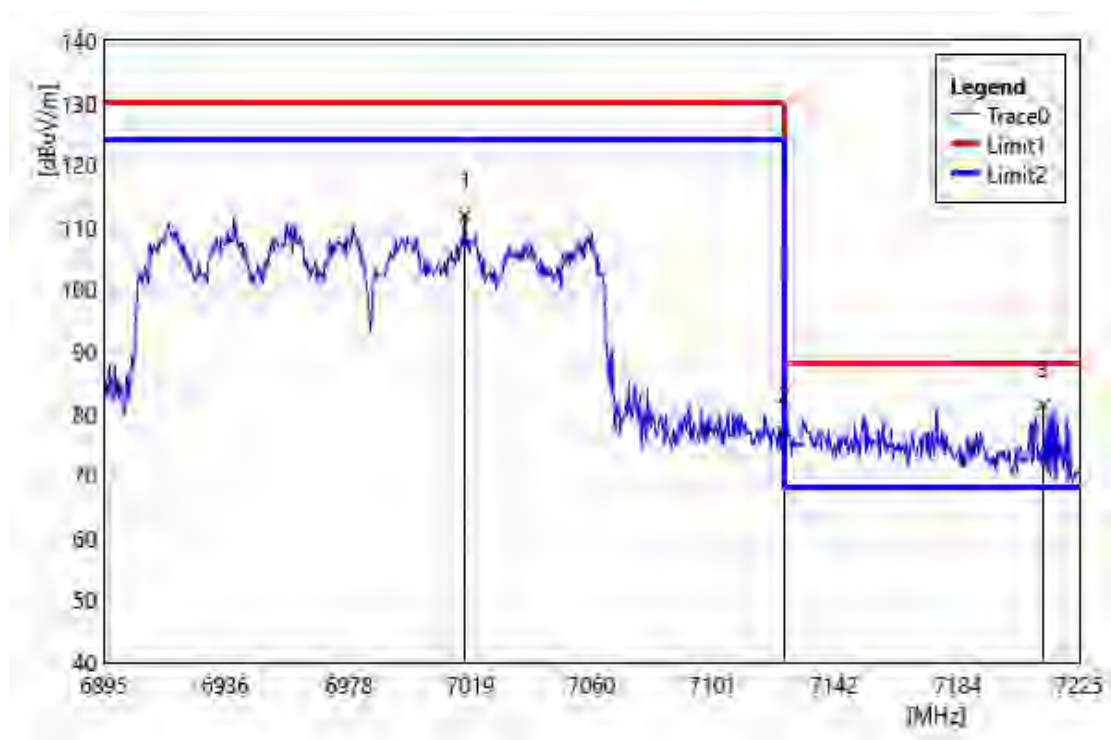


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7017.10	107.73	4.10	111.83	130.00	-18.17	PEAK
2	7125.00	72.29	4.88	77.17	88.20	-11.03	PEAK
3	7212.79	76.22	5.28	81.50	88.20	-6.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

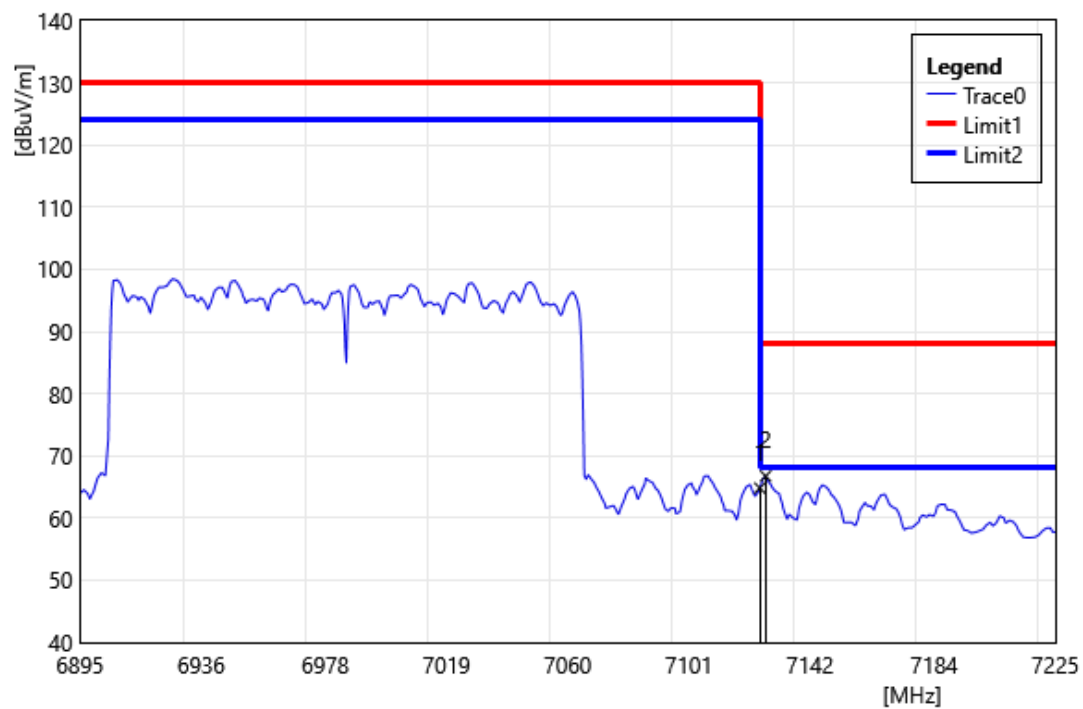


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.95	4.88	64.83	68.20	-3.37	AVG
2	7126.99	61.86	4.89	66.76	68.20	-1.45	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

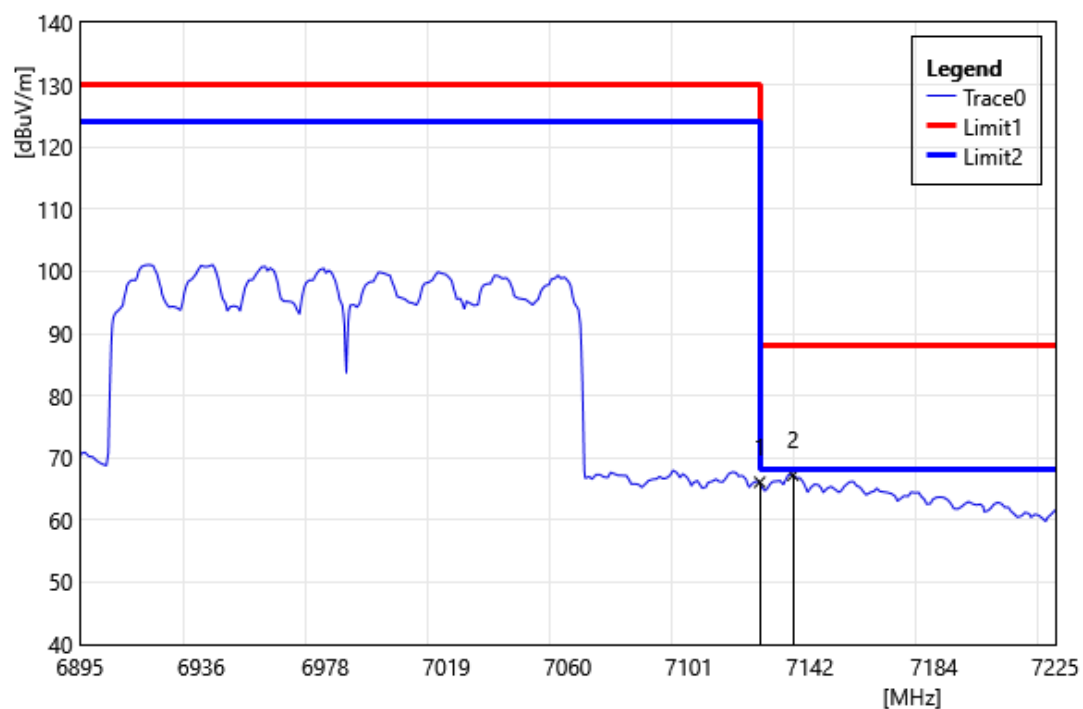


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.21	4.88	66.09	68.20	-2.11	AVG
2	7136.23	62.29	4.91	67.20	68.20	-1.00	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

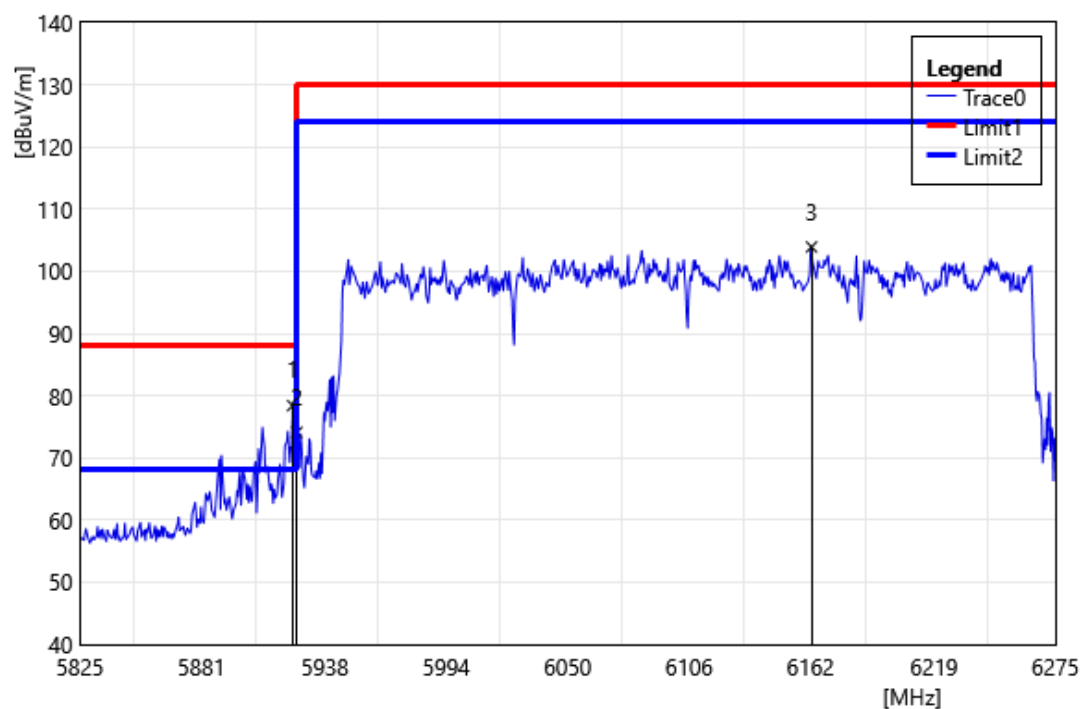


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.10	77.75	0.64	78.39	88.20	-9.81	PEAK
2	5925.00	73.46	0.63	74.09	88.20	-14.11	PEAK
3	6162.50	102.78	1.14	103.92	130.00	-26.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Horizontal		
Remark:			

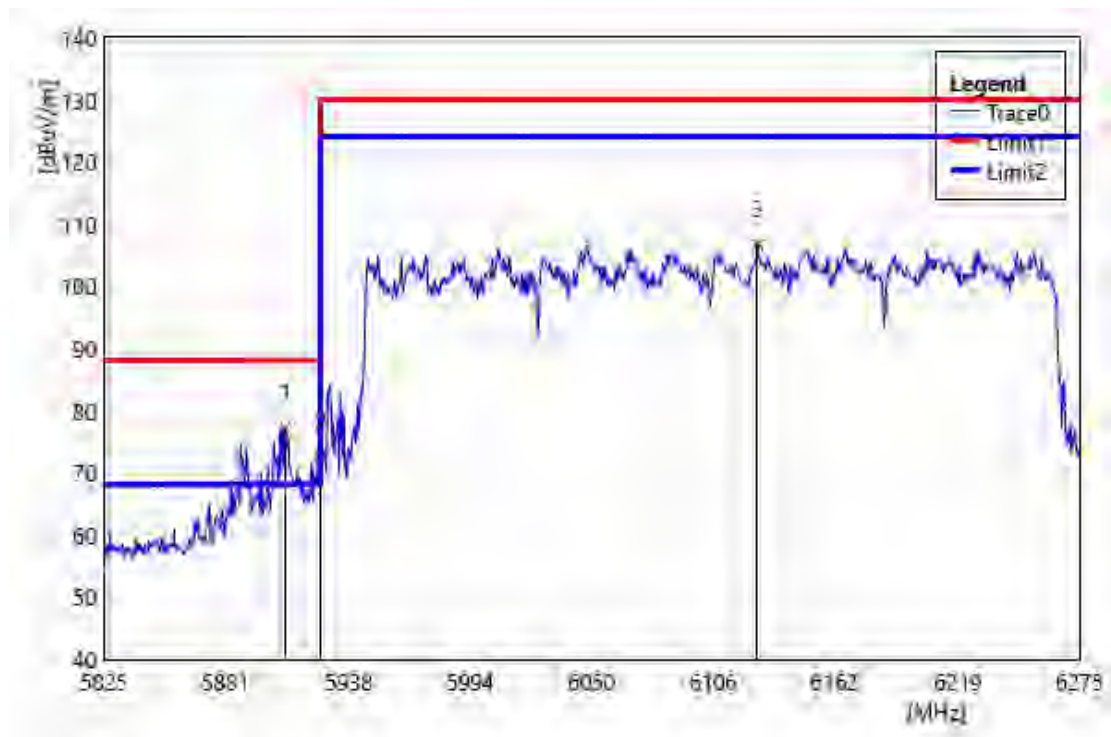


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5908.70	76.52	0.68	77.20	88.20	-11.00	PEAK
2	5925.00	71.85	0.63	72.48	88.20	-15.72	PEAK
3	6126.50	105.63	1.07	106.70	130.00	-23.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

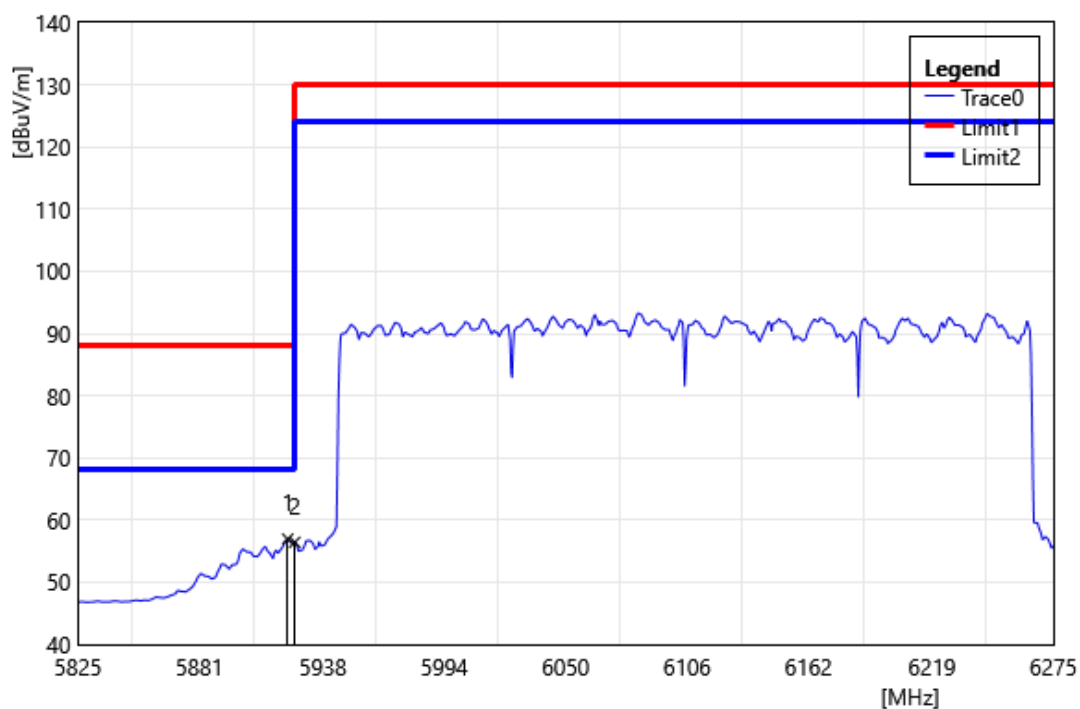


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.75	56.30	0.64	56.94	68.20	-11.26	AVG
2	5925.00	55.79	0.63	56.42	68.20	-11.78	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Horizontal		
Remark:			

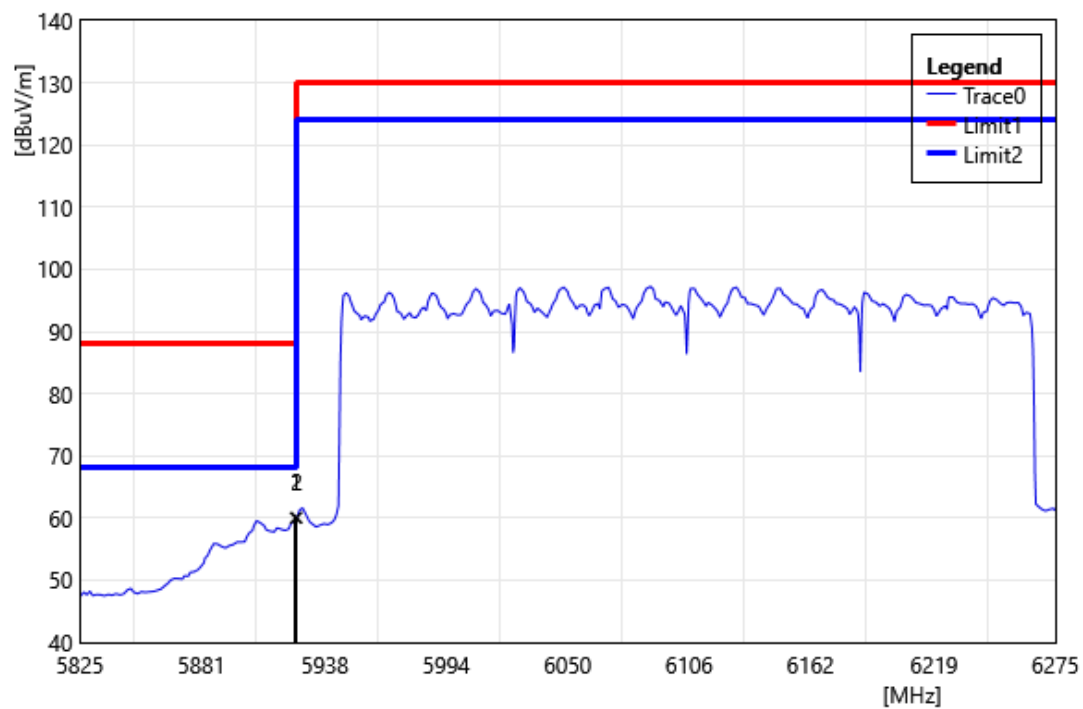


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	59.38	0.64	60.02	68.20	-8.18	AVG
2	5925.00	59.43	0.63	60.06	68.20	-8.14	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

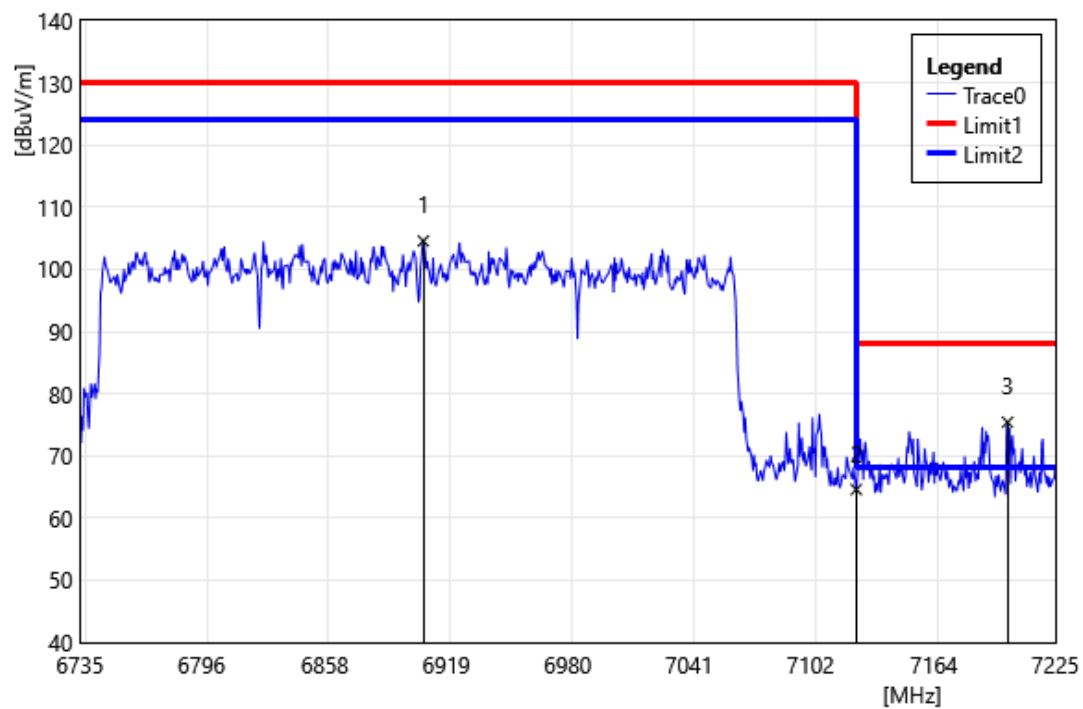


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6907.48	100.77	3.79	104.56	130.00	-25.44	PEAK
2	7125.00	59.72	4.88	64.60	88.20	-23.60	PEAK
3	7200.99	70.15	5.28	75.43	88.20	-12.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

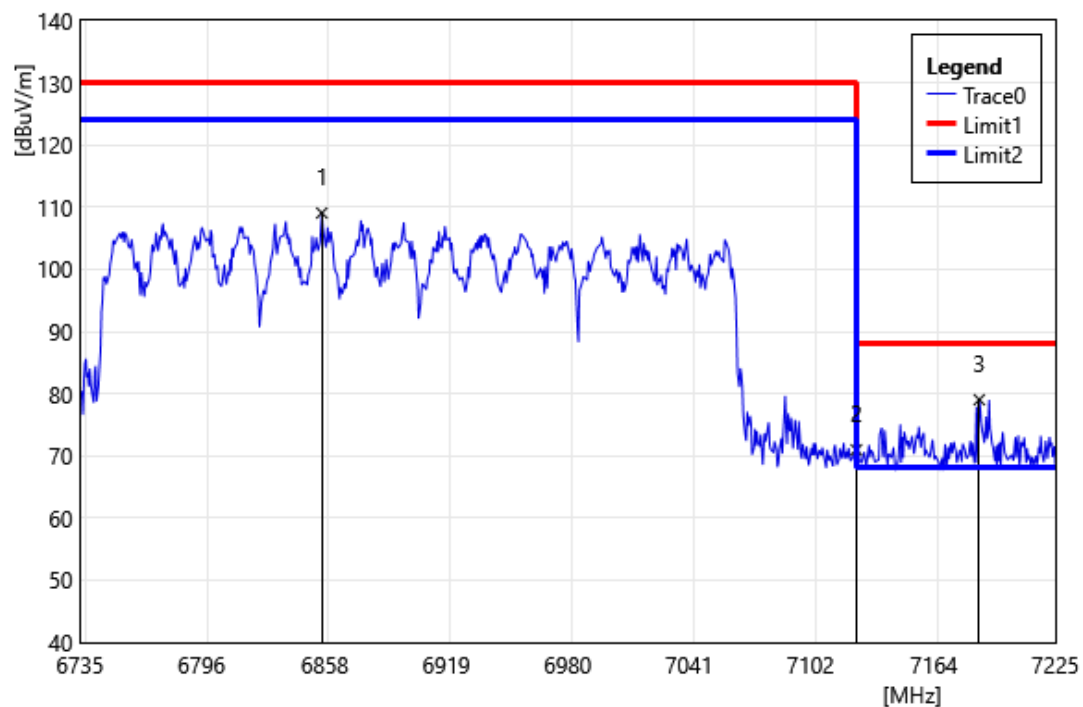


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6856.52	105.57	3.49	109.06	130.00	-20.94	PEAK
2	7125.00	66.09	4.88	70.97	88.20	-17.23	PEAK
3	7186.78	73.84	5.19	79.03	88.20	-9.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

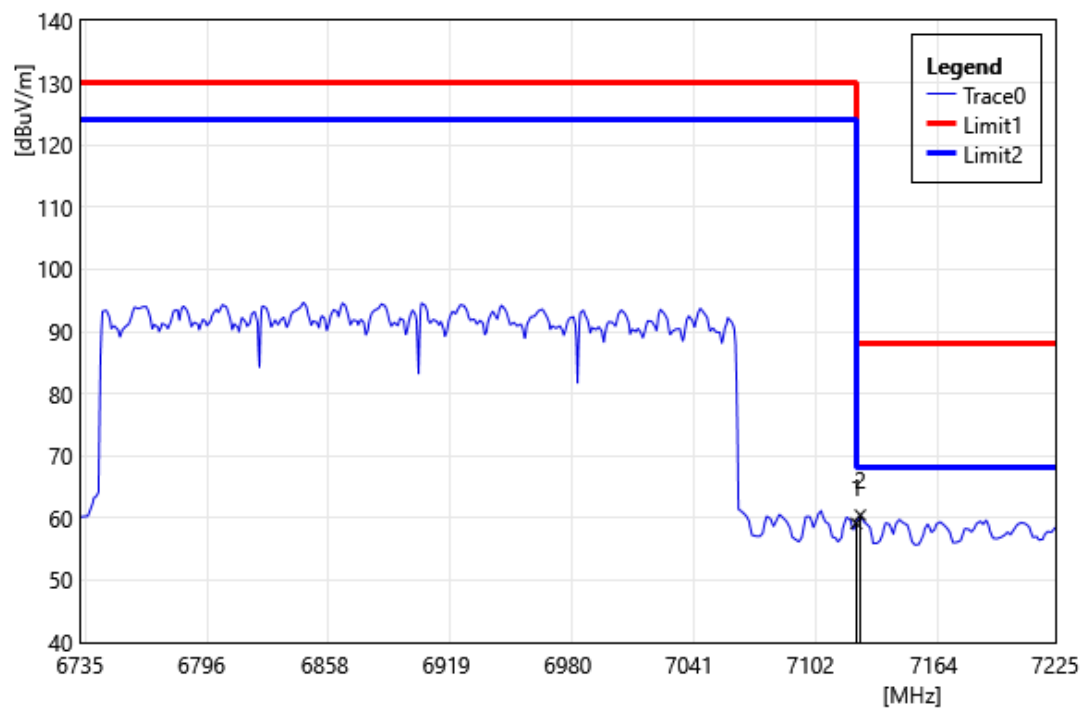

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	54.26	4.88	59.14	68.20	-9.06	AVG
2	7127.00	55.58	4.89	60.47	68.20	-7.73	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Horizontal		
Remark:			

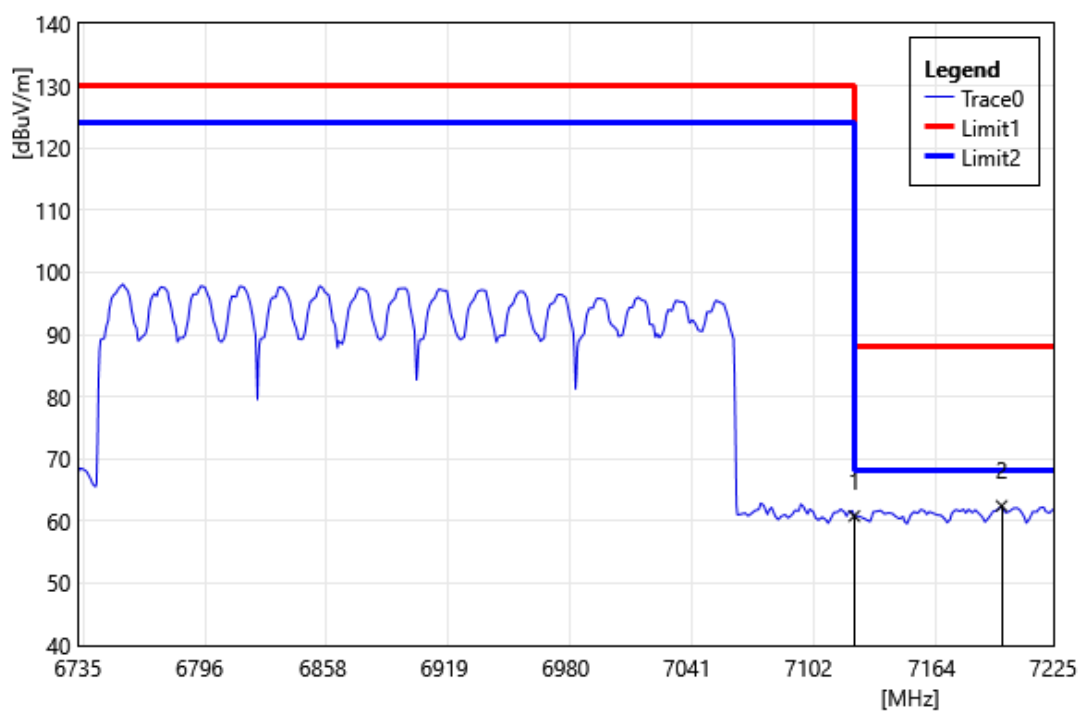

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	55.92	4.88	60.80	68.20	-7.40	AVG
2	7199.03	57.17	5.27	62.44	68.20	-5.76	AVG

5.3. Conducted Test Results

5.3.1. Duty cycle

Reference Appendix A & Appendix B

■ Test Graphs

Reference Appendix B

5.3.2. Maximum Output Power Measurement

Reference Appendix A

5.3.3. Emission Bandwidth Measurement

Reference Appendix A & Appendix B

5.3.4. Maximum Power Spectral Density Measurement

Reference Appendix A & Appendix B

■ Test Graphs

Reference Appendix B

5.3.5. In-Band Emission (Mask) Measurement

Reference Appendix A & Appendix B

5.3.6. Contention Based Protocol Measurement

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-5	20	37	6135	6135	-55.97	6.03	-62.00	-62.00	OFF
					-64.97	6.03	-71.00	-62.00	Minimal
					-74.97	6.03	-81.00	-62.00	ON
	320	31	6105	5950	-55.97	6.03	-62.00	-62.00	OFF
					-64.97	6.03	-71.00	-62.00	Minimal
					-70.97	6.03	-77.00	-62.00	ON
				6105	-55.97	6.03	-62.00	-62.00	OFF
					-60.97	6.03	-67.00	-62.00	Minimal
					-69.97	6.03	-76.00	-62.00	ON
				6260	-55.97	6.03	-62.00	-62.00	OFF
					-63.97	6.03	-70.00	-62.00	Minimal
					-72.97	6.03	-79.00	-62.00	ON
U-NII-6	20	101	6455	6455	-56.46	5.54	-62.00	-62.00	OFF
					-64.46	5.54	-70.00	-62.00	Minimal
					-79.46	5.54	-85.00	-62.00	ON
	320	127	6585	6430	-56.46	5.54	-62.00	-62.00	OFF
					-70.46	5.54	-76.00	-62.00	Minimal
					-77.46	5.54	-83.00	-62.00	ON
				6585	-56.46	5.54	-62.00	-62.00	OFF
					-61.46	5.54	-67.00	-62.00	Minimal
					-71.46	5.54	-77.00	-62.00	ON
				6740	-56.46	5.54	-62.00	-62.00	OFF
					-71.46	5.54	-77.00	-62.00	Minimal
					-73.46	5.54	-79.00	-62.00	ON
U-NII-7	20	149	6695	6695	-56.78	5.22	-62.00	-62.00	OFF
					-59.78	5.22	-65.00	-62.00	Minimal
					-76.78	5.22	-82.00	-62.00	ON
	320	191	6905	6750	-56.78	5.22	-62.00	-62.00	OFF
					-69.78	5.22	-75.00	-62.00	Minimal
					-73.78	5.22	-79.00	-62.00	ON
				6905	-56.78	5.22	-62.00	-62.00	OFF
					-60.78	5.22	-66.00	-62.00	Minimal
					-69.78	5.22	-75.00	-62.00	ON
				7060	-56.78	5.22	-62.00	-62.00	OFF
					-70.78	5.22	-76.00	-62.00	Minimal
					-73.78	5.22	-79.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
U-NII-8	20	213	7015	7015	-56.77	5.23	-62.00	-62.00	OFF
					-60.77	5.23	-66.00	-62.00	Minimal
					-77.77	5.23	-83.00	-62.00	ON
	320	191	6905	6750	-56.78	5.22	-62.00	-62.00	OFF
					-69.78	5.22	-75.00	-62.00	Minimal
					-73.78	5.22	-79.00	-62.00	ON
				6905	-56.78	5.22	-62.00	-62.00	OFF
					-60.78	5.22	-66.00	-62.00	Minimal
					-69.78	5.22	-75.00	-62.00	ON
				7060	-56.78	5.22	-62.00	-62.00	OFF
					-70.78	5.22	-76.00	-62.00	Minimal
					-73.78	5.22	-79.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.


Contention Based Protocol							
Band	Bandwidth (MHz)	AWGN Freq. (MHz)	Number of Times	Number of Detection	AWGN Detection Probability (%)	Limit Probability (%)	Result
U-NII-5	20	6135	10	10	100	90	PASS
	320	5950	10	10	100	90	PASS
		6105	10	10	100	90	PASS
		6260	10	10	100	90	PASS
U-NII-6	20	6455	10	10	100	90	PASS
	320	6430	10	10	100	90	PASS
		6585	10	10	100	90	PASS
		6740	10	10	100	90	PASS
U-NII-7	20	6695	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS
U-NII-8	20	7015	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS


Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).


Note 2 : Injected (AWGN) power Include Path Loss.

■ Test Graphs

Threshold level of AWGN interference Plot

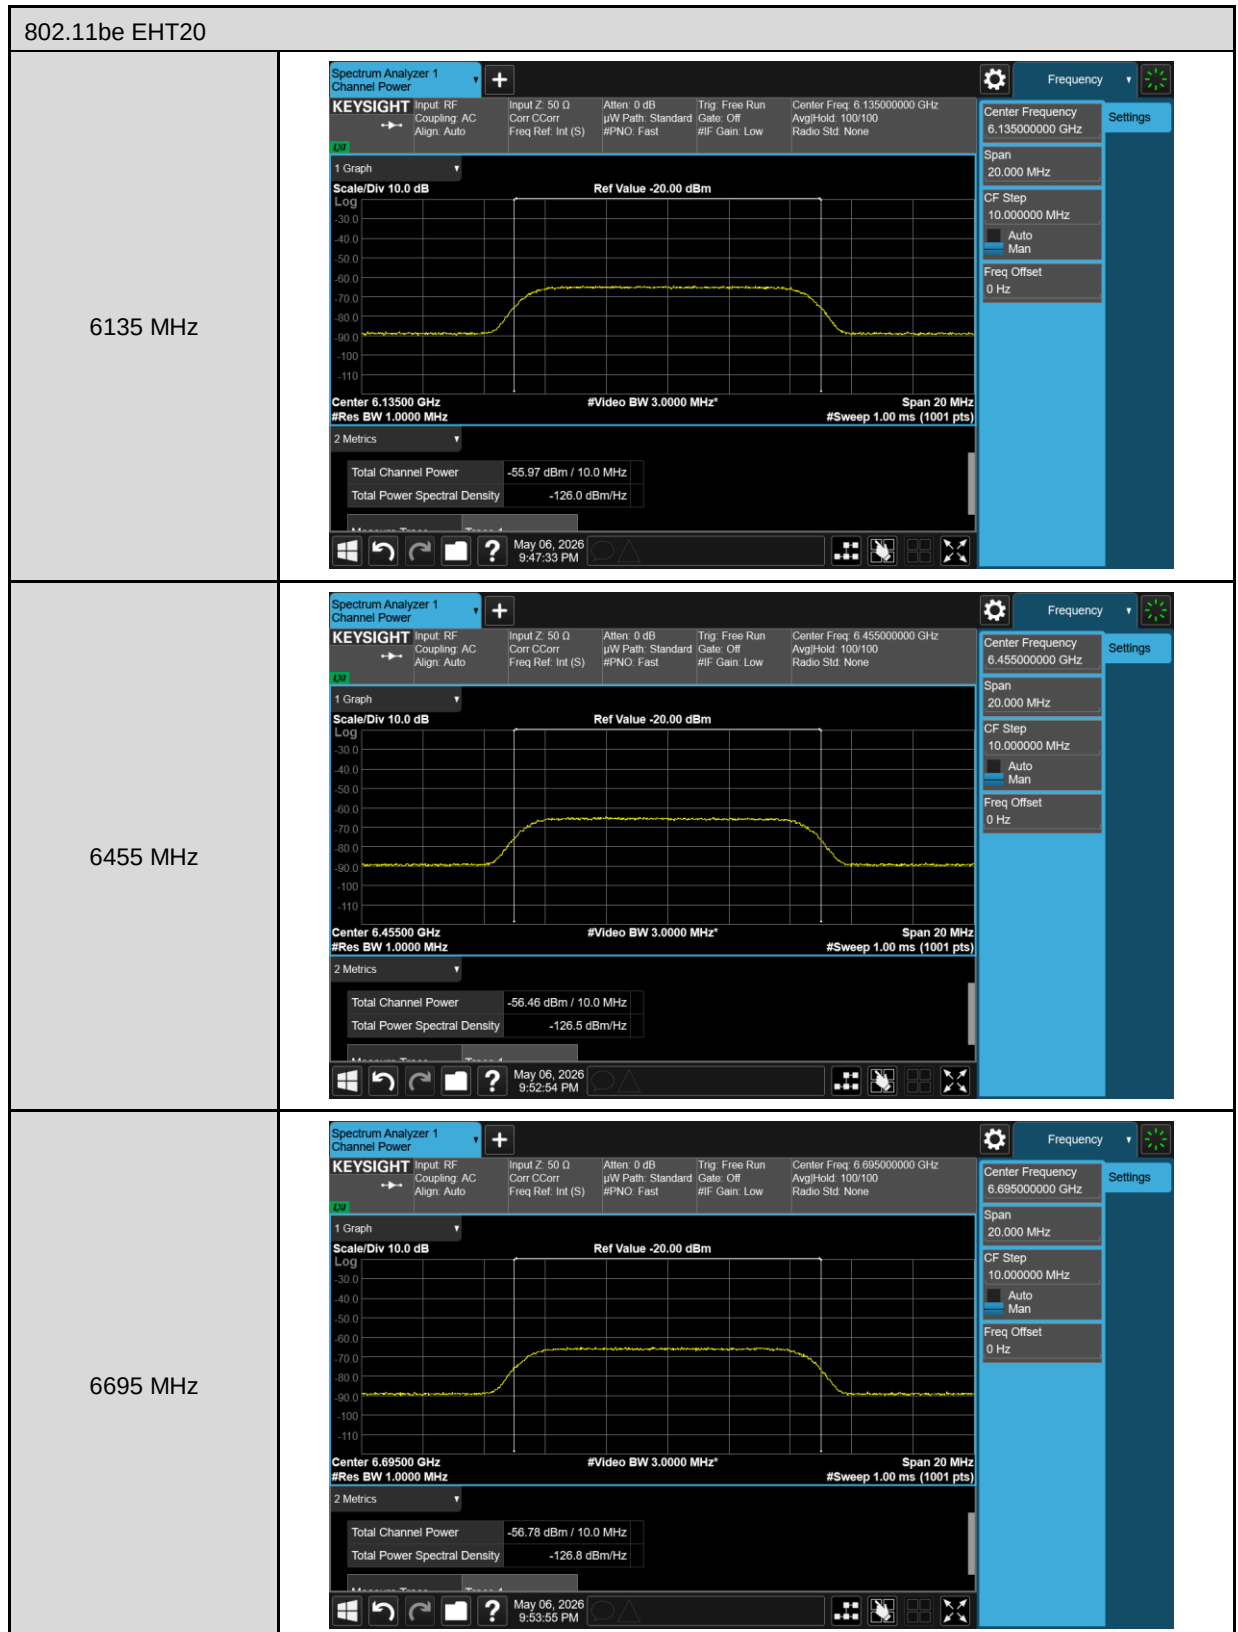

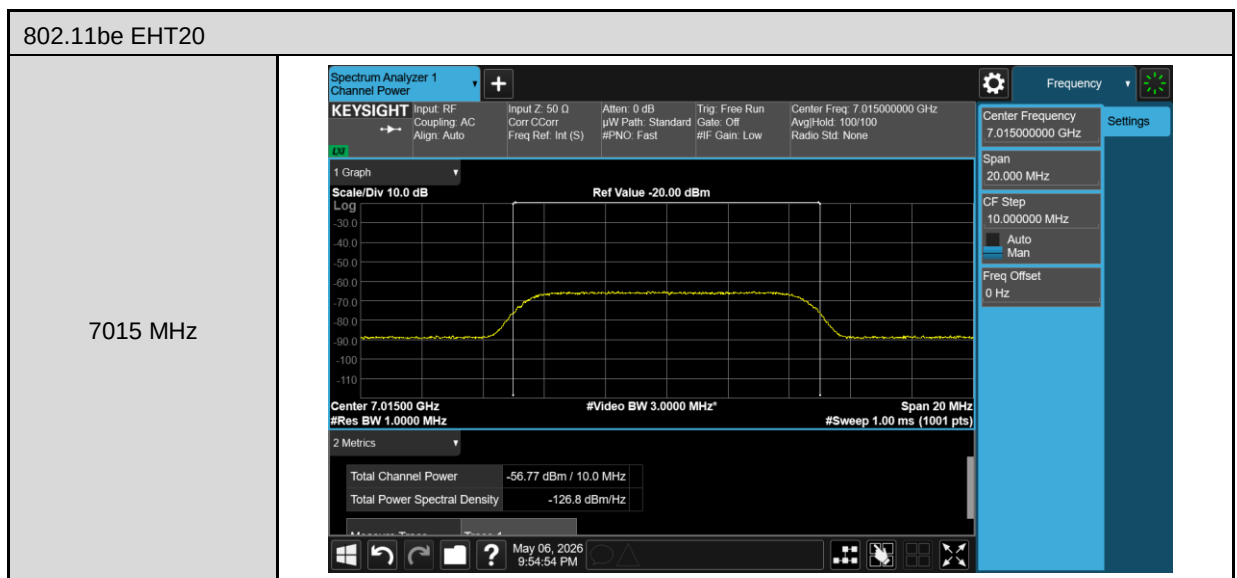

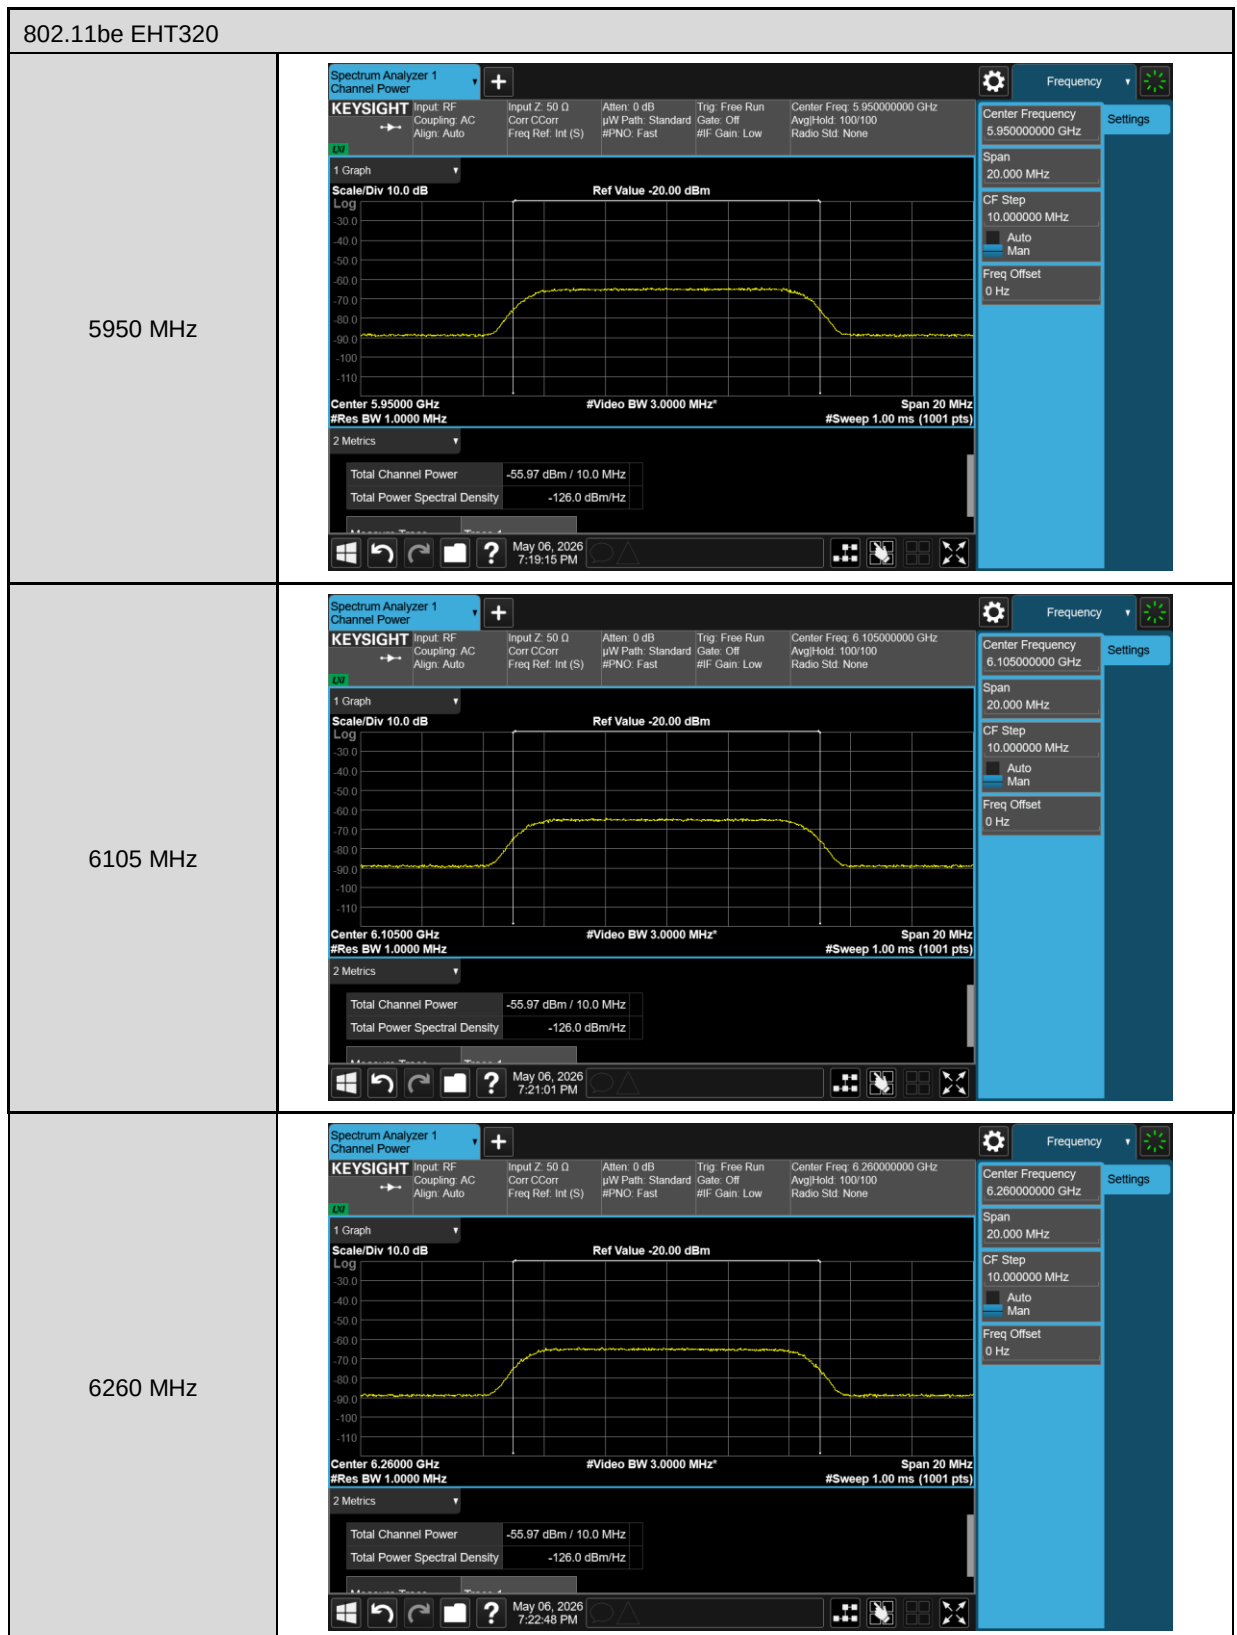

802.11be EHT320 6430 MHz	
6585 MHz	
6740 MHz	