



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Vertical		
Remark:			

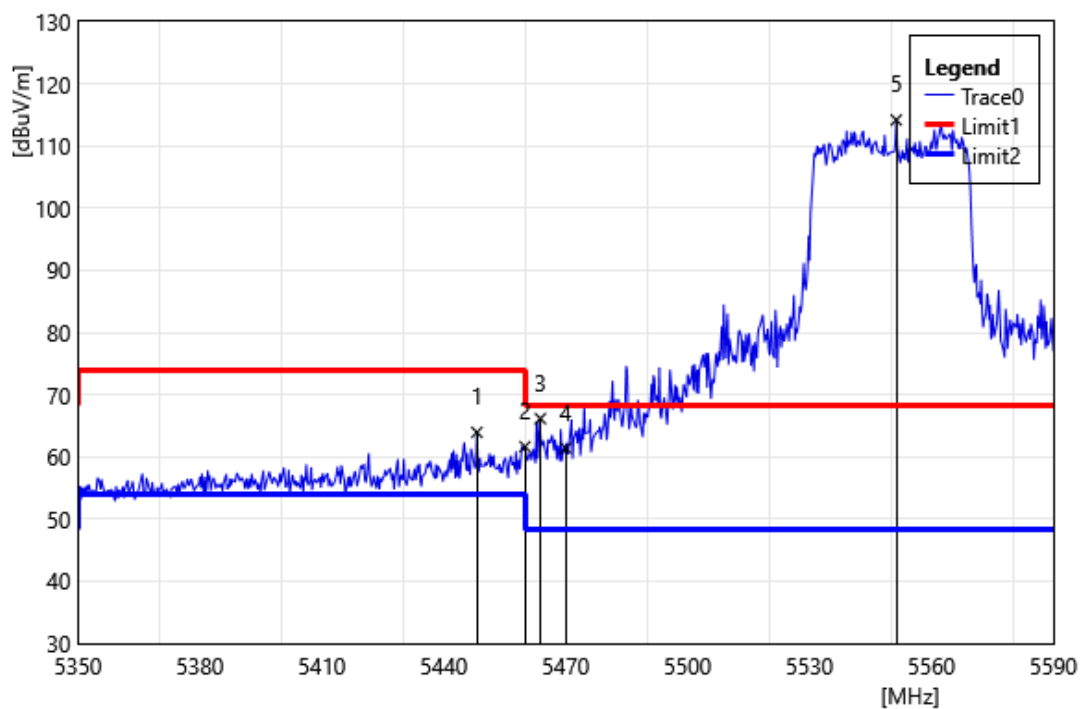


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.16	64.37	-0.42	63.95	74.00	-10.05	PEAK
2	5460.00	62.06	-0.41	61.65	74.00	-12.35	PEAK
3	5463.76	66.58	-0.42	66.16	68.20	-2.04	PEAK
4	5470.00	61.84	-0.42	61.42	68.20	-6.78	PEAK
5	5551.36	114.68	-0.49	114.19	68.20	45.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Horizontal		
Remark:			

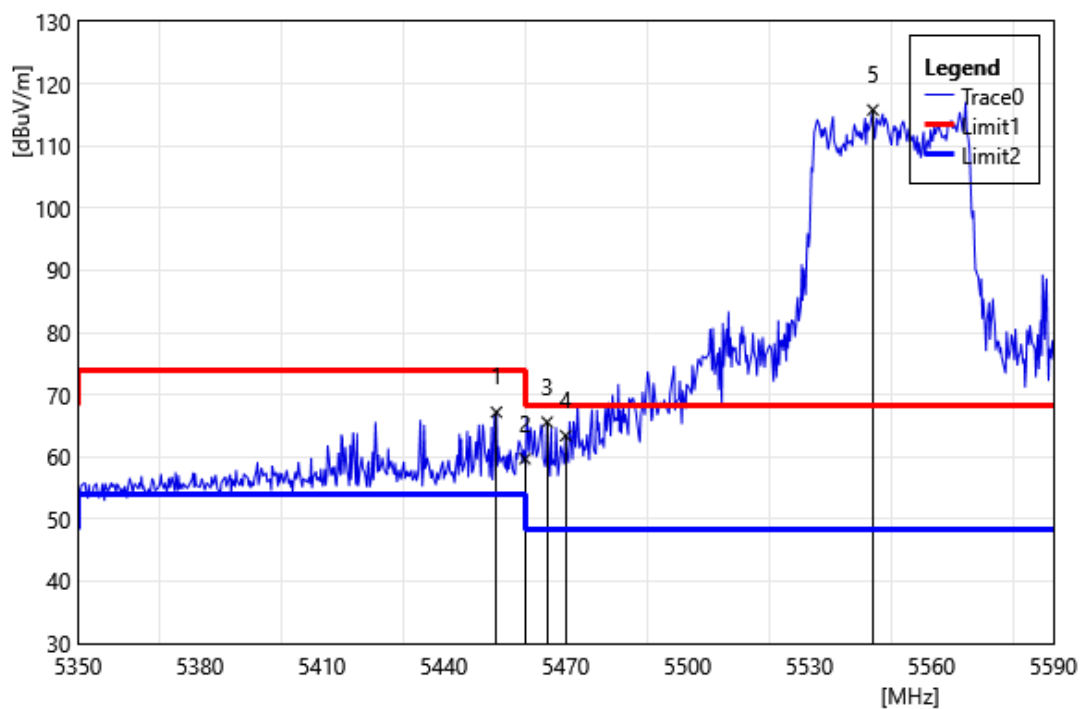


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.96	67.60	-0.41	67.19	74.00	-6.82	PEAK
2	5460.00	60.11	-0.41	59.70	74.00	-14.30	PEAK
3	5465.44	66.01	-0.42	65.59	68.20	-2.61	PEAK
4	5470.00	63.84	-0.42	63.42	68.20	-4.78	PEAK
5	5545.60	116.28	-0.49	115.79	68.20	47.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Vertical		
Remark:			

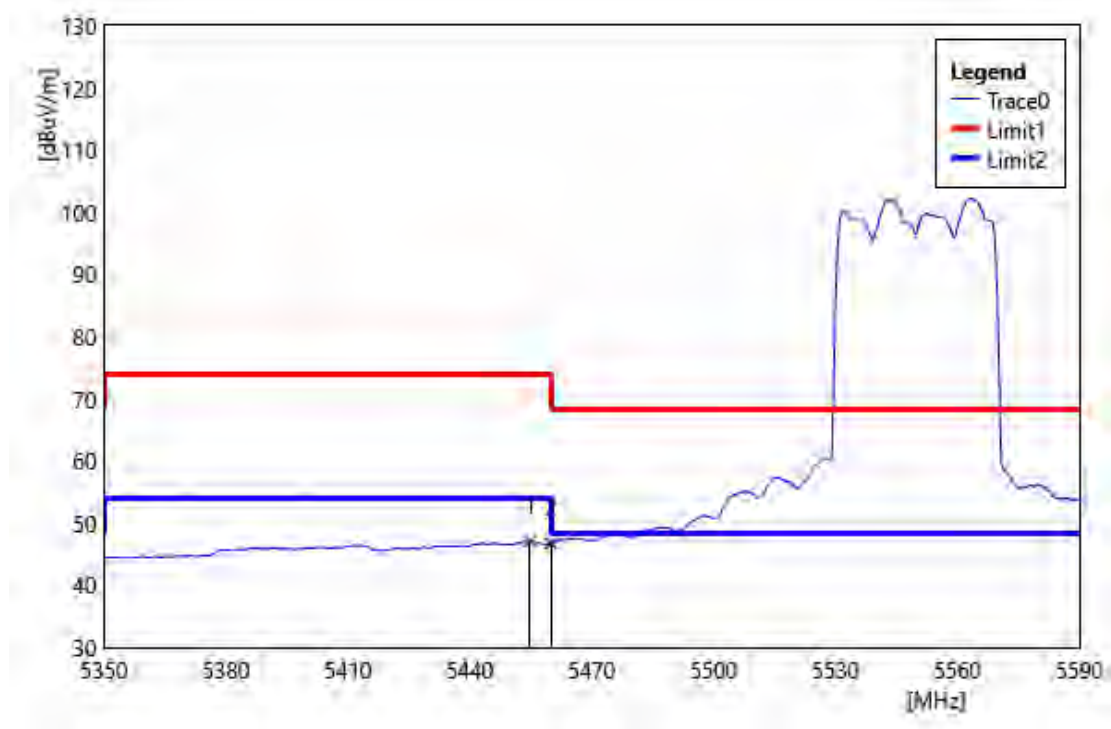


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.88	47.51	-0.41	47.10	54.00	-6.90	AVG
2	5460.00	47.17	-0.41	46.76	54.00	-7.24	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Horizontal		
Remark:			

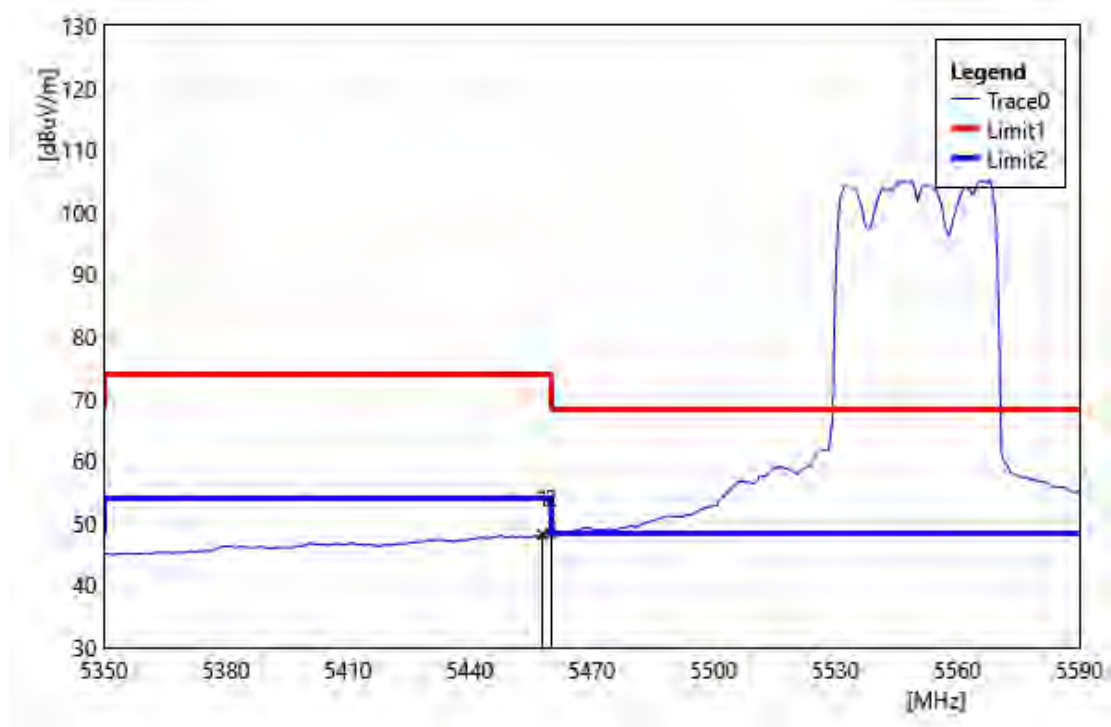


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	48.55	-0.41	48.14	54.00	-5.86	AVG
2	5460.00	48.77	-0.41	48.36	54.00	-5.64	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670 MHz		
Polarization:	Vertical		
Remark:			

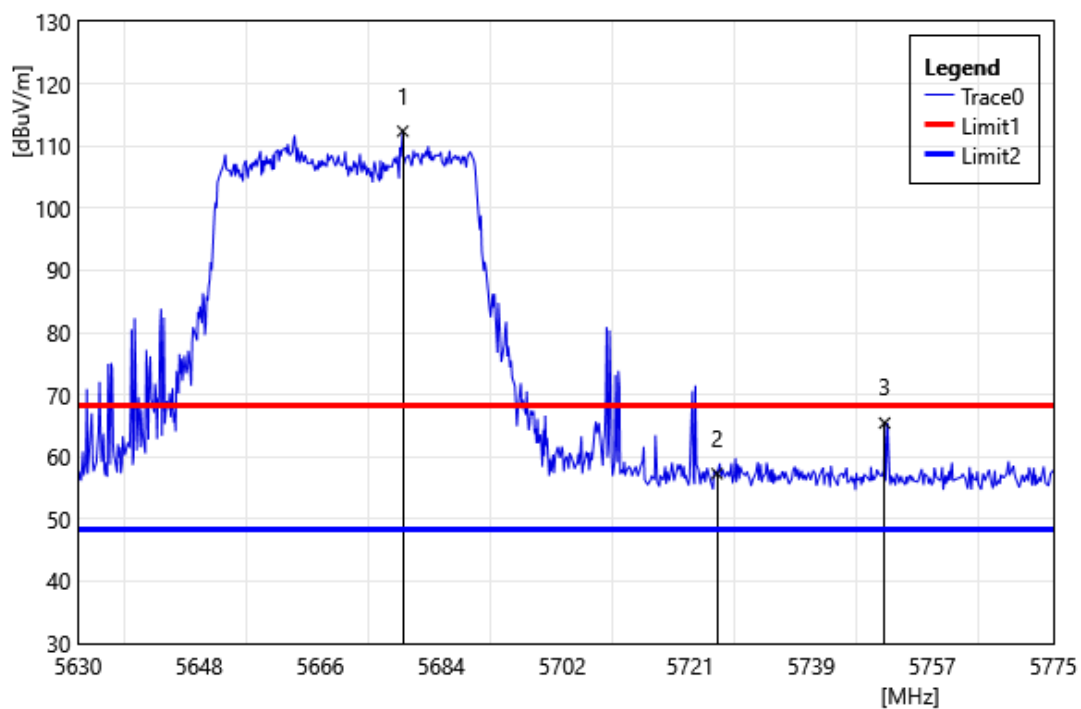


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5678.29	112.86	-0.49	112.37	68.20	44.17	PEAK
2	5725.00	57.43	-0.14	57.29	68.20	-10.91	PEAK
3	5749.92	65.32	0.13	65.45	68.20	-2.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670 MHz		
Polarization:	Horizontal		
Remark:			

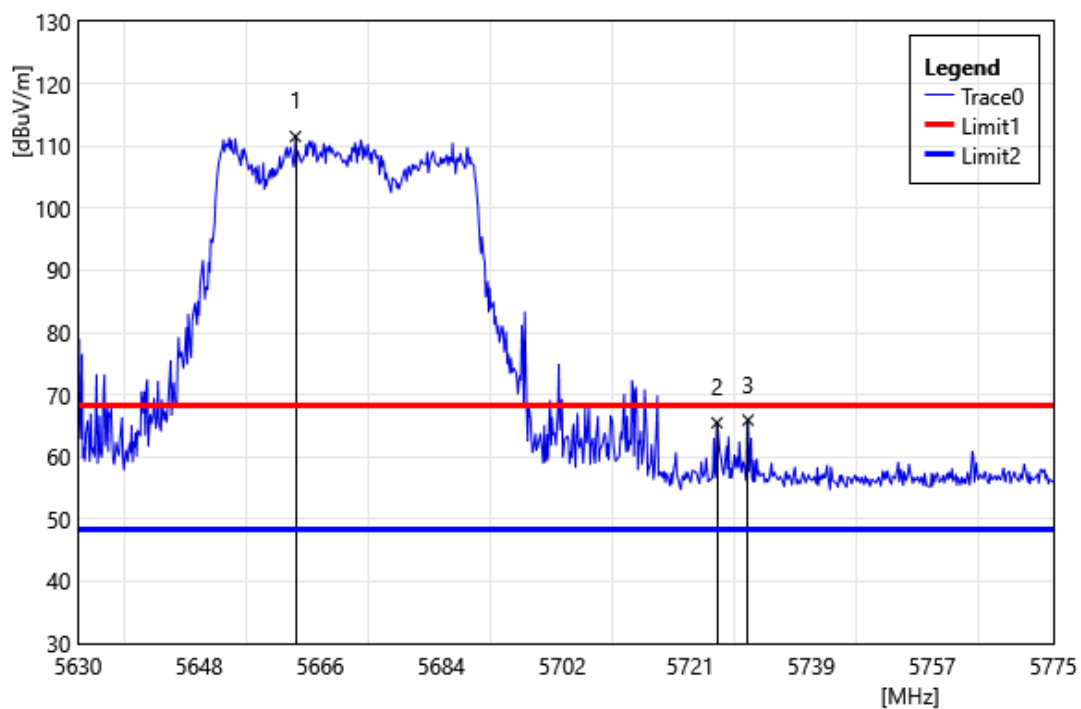


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5662.34	112.06	-0.54	111.52	68.20	43.32	PEAK
2	5725.00	65.63	-0.14	65.49	68.20	-2.71	PEAK
3	5729.62	66.02	-0.09	65.93	68.20	-2.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Vertical		
Remark:			

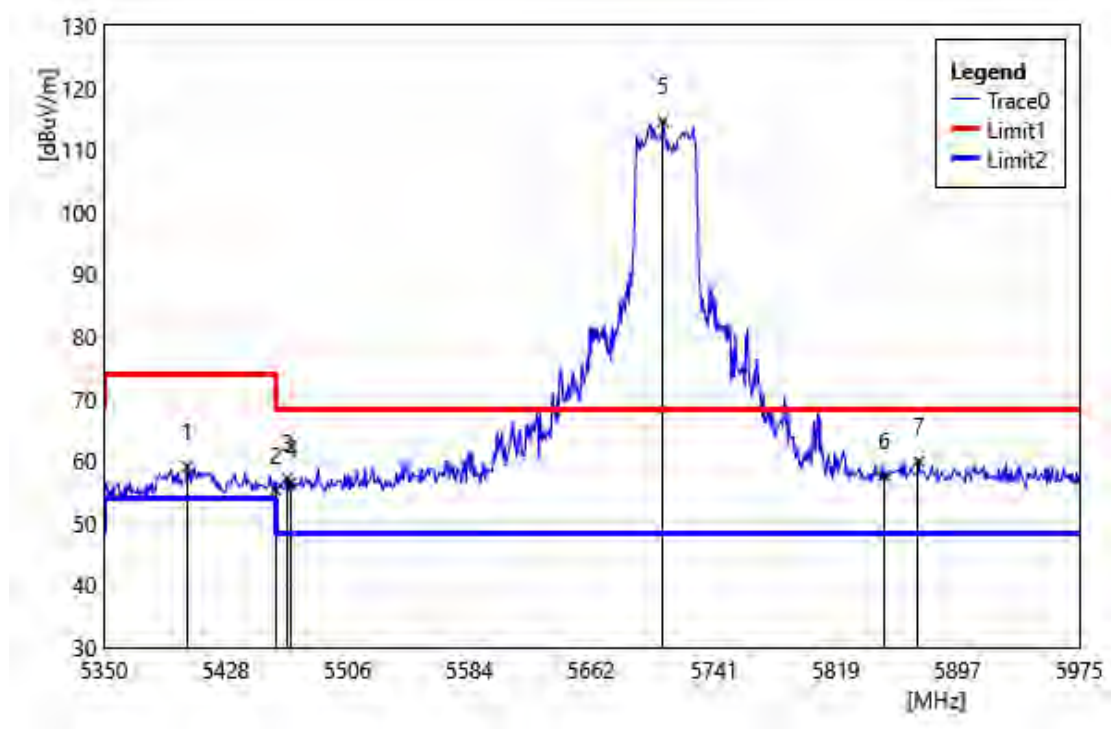


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5403.13	59.83	-0.73	59.10	74.00	-14.90	PEAK
2	5460.00	55.67	-0.41	55.26	74.00	-18.74	PEAK
3	5467.50	57.64	-0.42	57.23	68.20	-10.98	PEAK
4	5470.00	56.83	-0.42	56.41	68.20	-11.79	PEAK
5	5708.13	114.92	-0.33	114.59	68.20	46.39	PEAK
6	5850.00	57.15	0.45	57.60	68.20	-10.60	PEAK
7	5871.88	59.39	0.56	59.95	68.20	-8.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Horizontal		
Remark:			

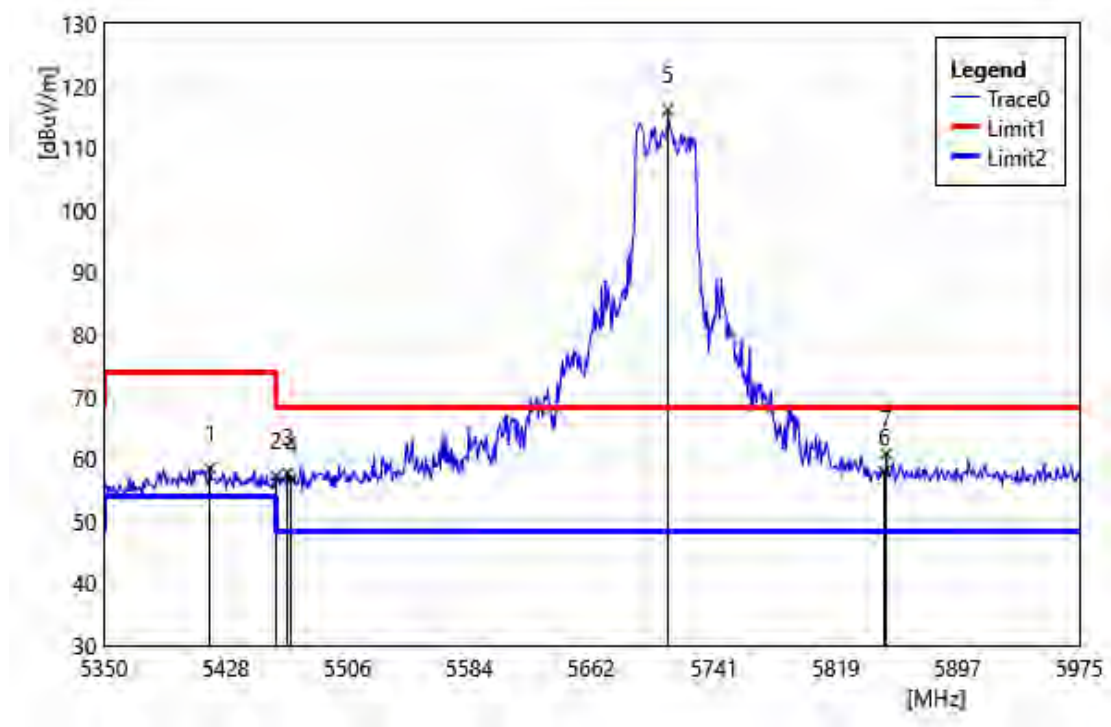


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5418.13	59.16	-0.63	58.53	74.00	-15.47	PEAK
2	5460.00	57.68	-0.41	57.27	74.00	-16.73	PEAK
3	5467.50	58.14	-0.42	57.72	68.20	-10.48	PEAK
4	5470.00	57.12	-0.42	56.70	68.20	-11.50	PEAK
5	5711.25	116.31	-0.30	116.01	68.20	47.81	PEAK
6	5850.00	57.48	0.45	57.93	68.20	-10.27	PEAK
7	5851.25	60.35	0.46	60.81	68.20	-7.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Vertical		
Remark:			

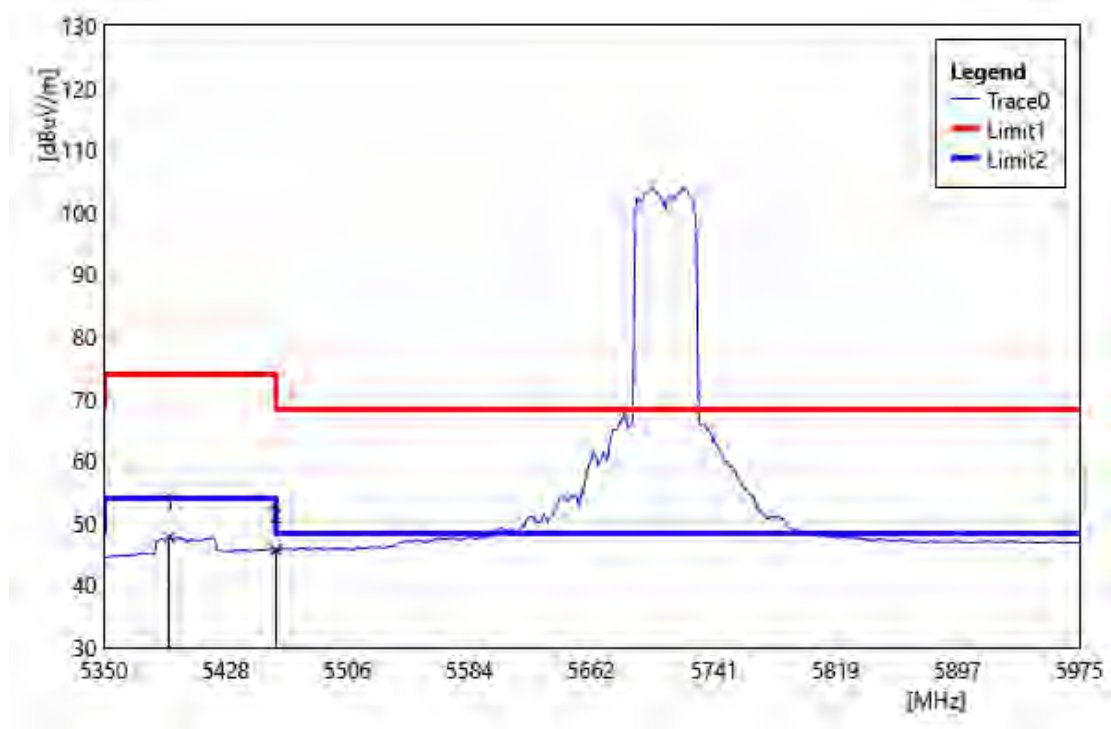


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5391.88	48.58	-0.85	47.73	54.00	-6.27	AVG
2	5460.00	46.13	-0.41	45.72	54.00	-8.28	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Horizontal		
Remark:			

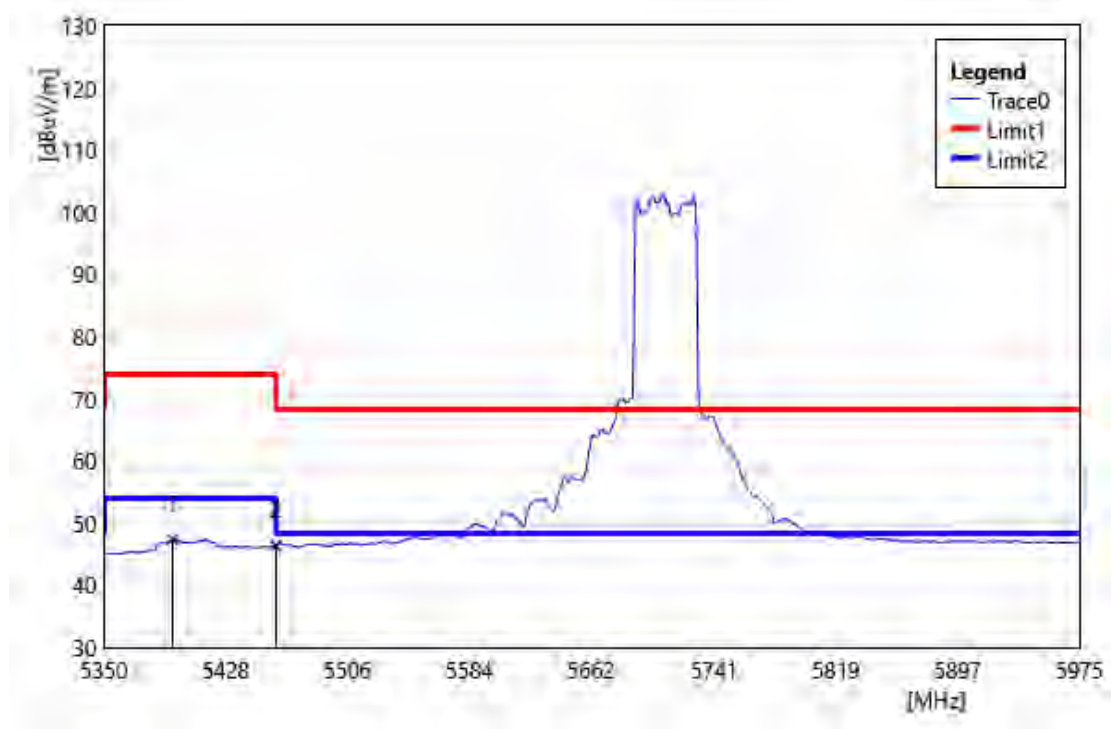


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5393.75	48.22	-0.83	47.39	54.00	-6.61	AVG
2	5460.00	46.77	-0.41	46.36	54.00	-7.64	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755 MHz		
Polarization:	Vertical		
Remark:			

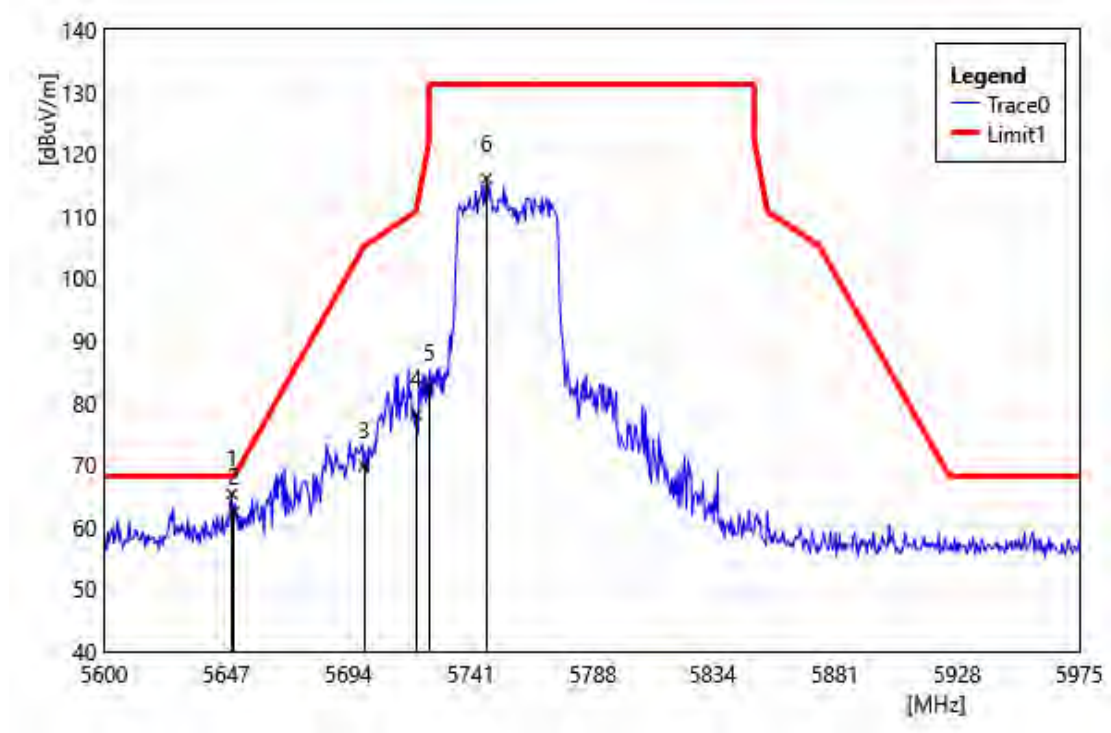


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5649.13	65.92	-0.58	65.34	68.20	-2.86	PEAK
2	5650.00	63.02	-0.58	62.45	68.20	-5.75	PEAK
3	5700.00	70.27	-0.42	69.85	105.20	-35.35	PEAK
4	5720.00	78.34	-0.20	78.14	110.80	-32.66	PEAK
5	5725.00	82.57	-0.14	82.43	122.20	-39.77	PEAK
6	5747.00	115.96	0.10	116.06	131.20	-15.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

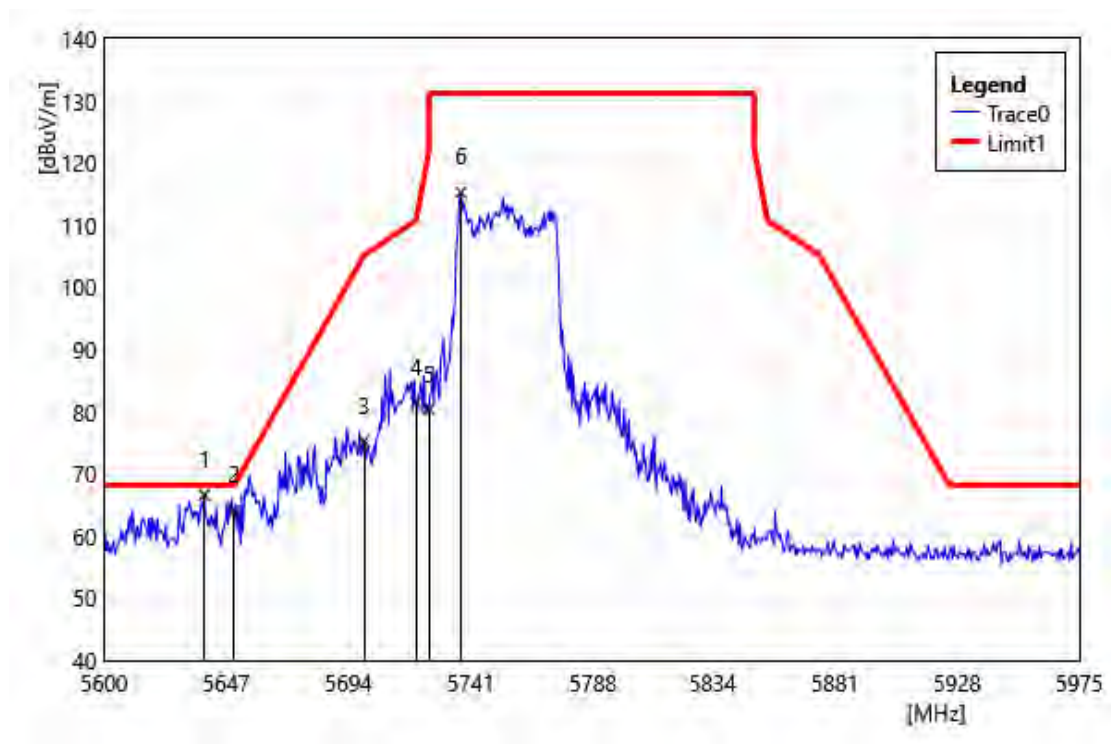


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5638.63	67.17	-0.57	66.60	68.20	-1.60	PEAK
2	5650.00	64.68	-0.58	64.10	68.20	-4.10	PEAK
3	5700.00	75.70	-0.42	75.28	105.20	-29.92	PEAK
4	5720.00	81.61	-0.20	81.41	110.80	-29.39	PEAK
5	5725.00	80.56	-0.14	80.42	122.20	-41.78	PEAK
6	5737.25	115.28	-0.01	115.27	131.20	-15.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Vertical		
Remark:			

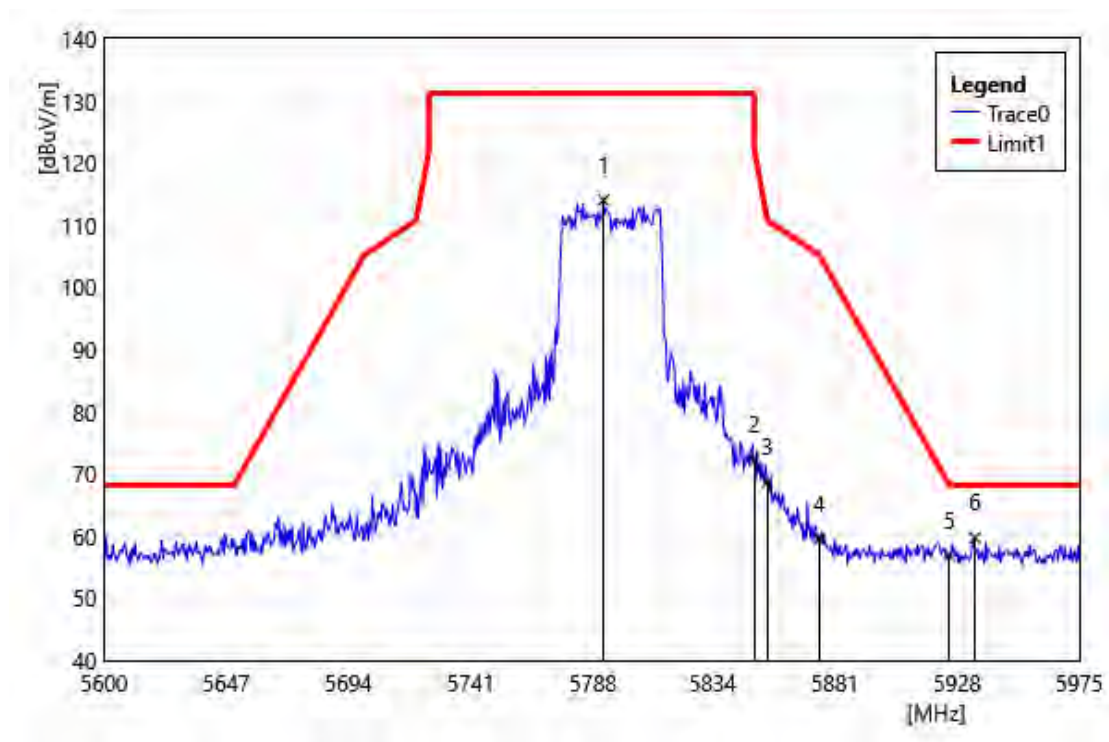


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5792.00	113.76	0.27	114.03	131.20	-17.17	PEAK
2	5850.00	71.83	0.45	72.28	122.20	-49.92	PEAK
3	5855.00	68.24	0.47	68.71	110.80	-42.09	PEAK
4	5875.00	58.93	0.58	59.51	105.20	-45.69	PEAK
5	5925.00	56.28	0.63	56.91	68.20	-11.29	PEAK
6	5934.88	59.12	0.61	59.73	68.20	-8.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

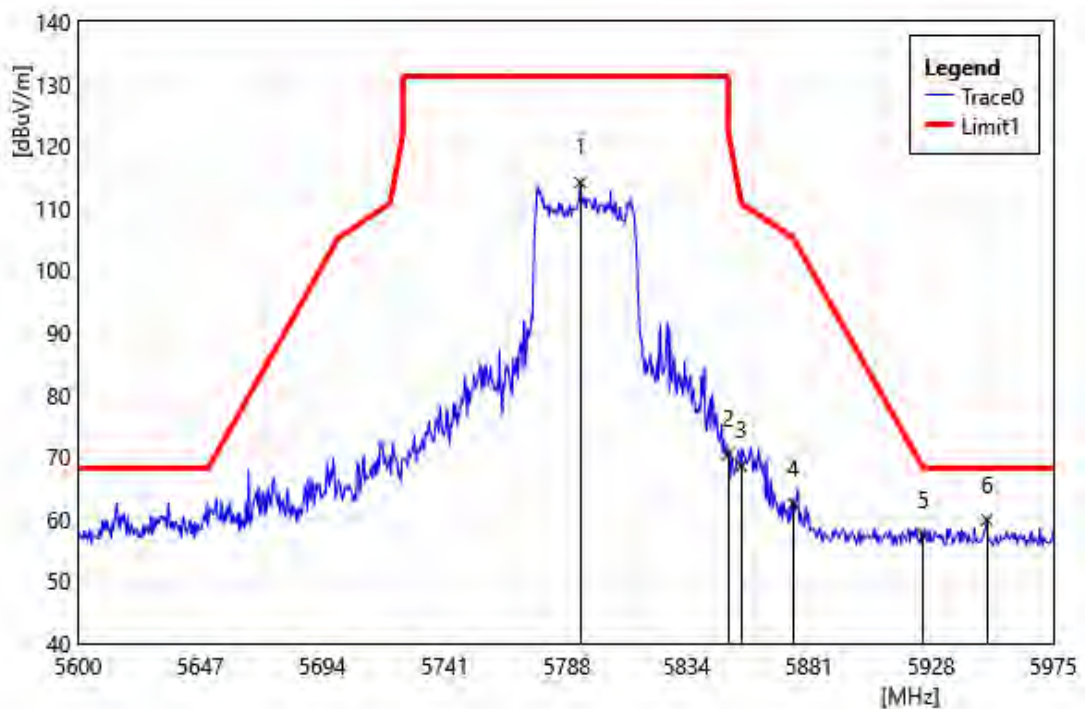


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5793.13	113.85	0.27	114.12	131.20	-17.08	PEAK
2	5850.00	70.06	0.45	70.51	122.20	-51.69	PEAK
3	5855.00	68.08	0.47	68.55	110.80	-42.25	PEAK
4	5875.00	61.93	0.58	62.51	105.20	-42.69	PEAK
5	5925.00	56.74	0.63	57.37	68.20	-10.83	PEAK
6	5949.50	59.28	0.56	59.84	68.20	-8.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210 MHz		
Polarization:	Vertical		
Remark:			

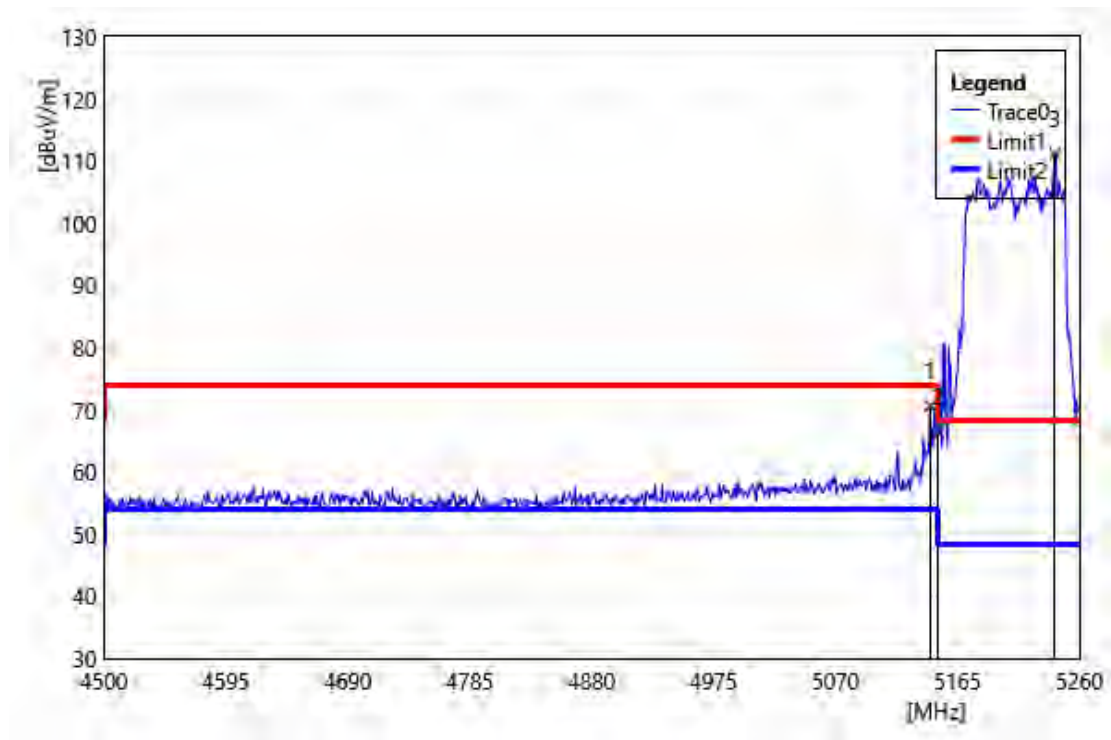


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	71.45	-0.91	70.54	74.00	-3.46	PEAK
2	5150.00	67.26	-0.92	66.33	74.00	-7.67	PEAK
3	5241.00	112.36	-1.21	111.16	68.20	42.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210 MHz		
Polarization:	Horizontal		
Remark:			

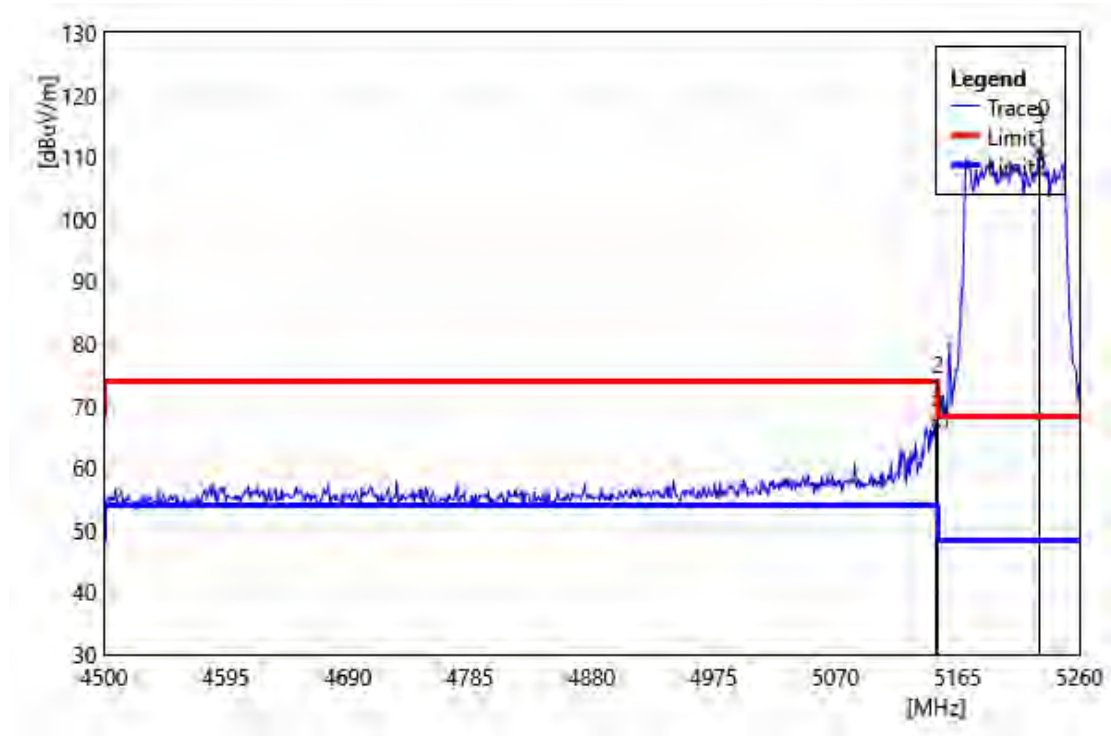


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	68.28	-0.92	67.36	74.00	-6.64	PEAK
2	5150.00	71.72	-0.92	70.79	74.00	-3.21	PEAK
3	5228.84	112.33	-1.20	111.13	68.20	42.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210 MHz		
Polarization:	Vertical		
Remark:			

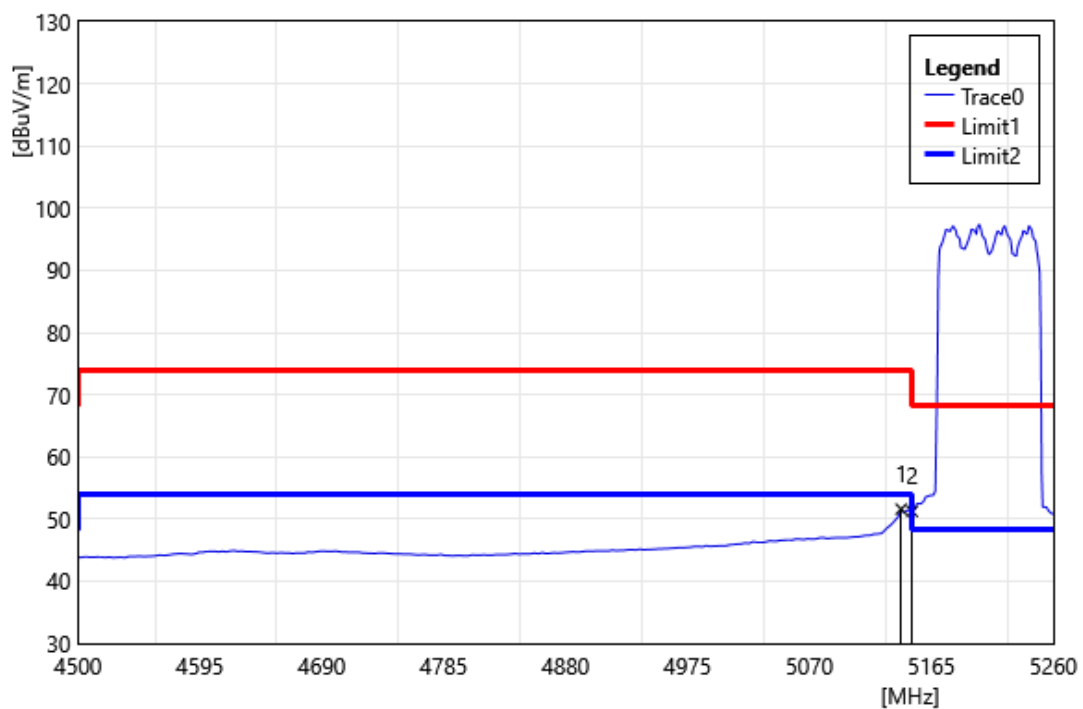


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	52.50	-0.90	51.60	54.00	-2.40	AVG
2	5150.00	52.17	-0.92	51.24	54.00	-2.76	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210 MHz		
Polarization:	Horizontal		
Remark:			

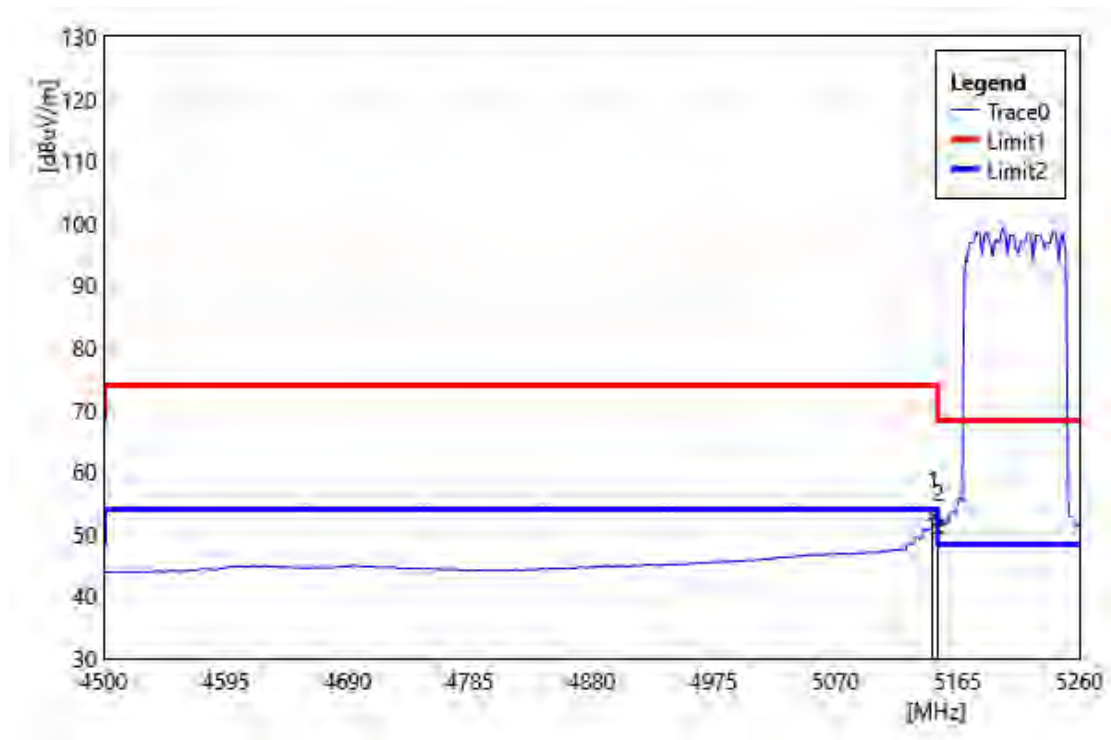


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	53.86	-0.91	52.96	54.00	-1.05	AVG
2	5150.00	51.78	-0.92	50.86	54.00	-3.14	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Vertical		
Remark:			

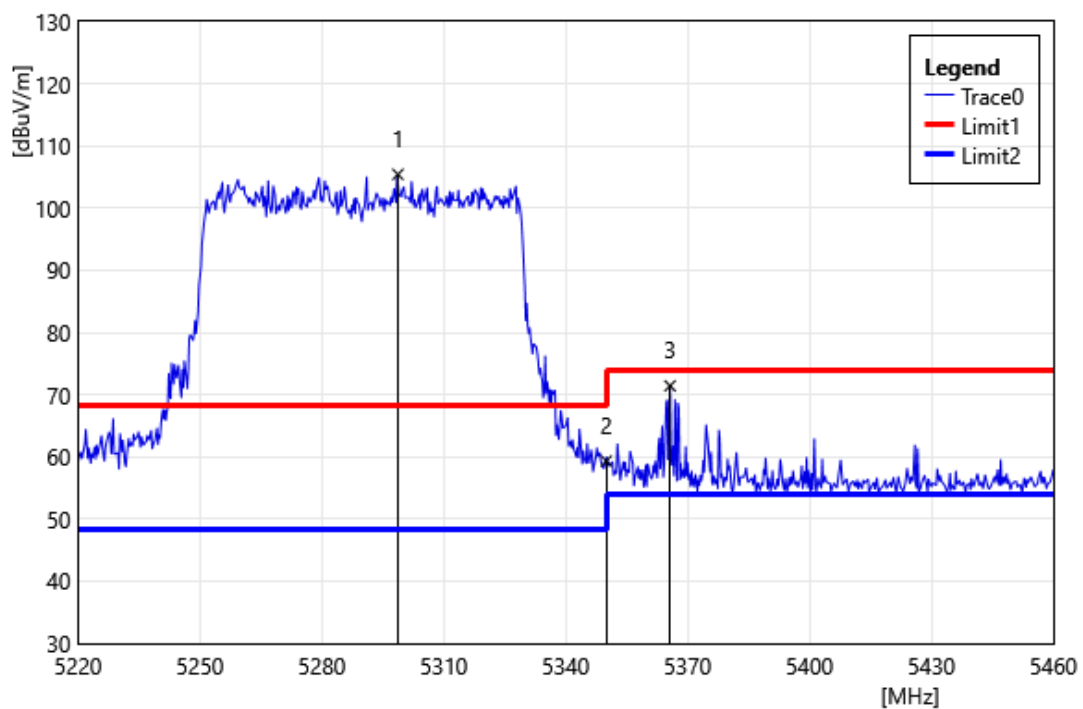


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5298.72	106.80	-1.36	105.44	68.20	37.24	PEAK
2	5350.00	60.65	-1.31	59.34	74.00	-14.66	PEAK
3	5365.68	72.57	-1.14	71.43	74.00	-2.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Horizontal		
Remark:			

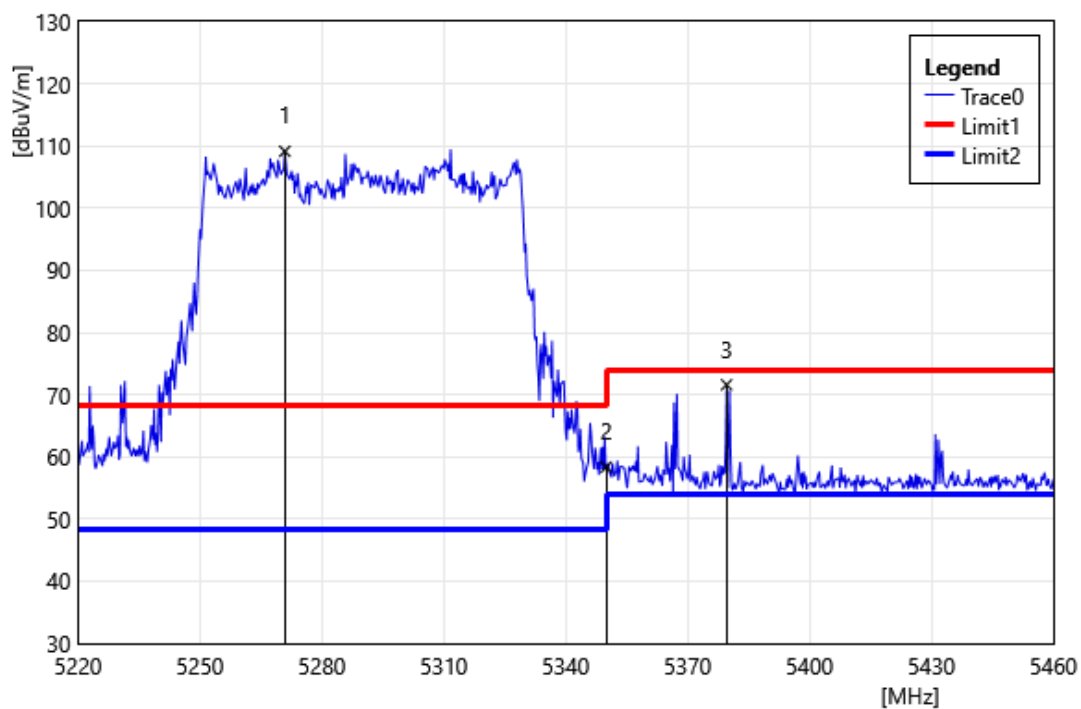


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5270.88	110.43	-1.28	109.15	68.20	40.95	PEAK
2	5350.00	59.67	-1.31	58.36	74.00	-15.64	PEAK
3	5379.60	72.57	-0.98	71.59	74.00	-2.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Vertical		
Remark:			

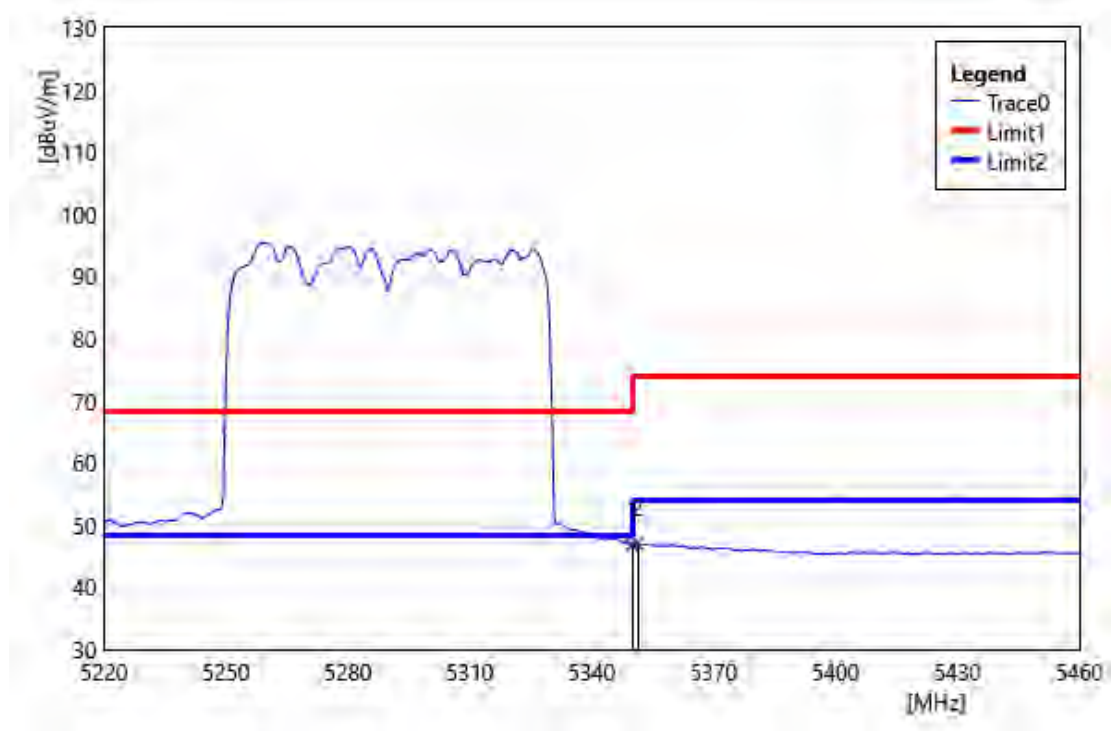


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.16	-1.31	46.85	54.00	-7.15	AVG
2	5351.28	48.37	-1.30	47.07	54.00	-6.93	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Horizontal		
Remark:			

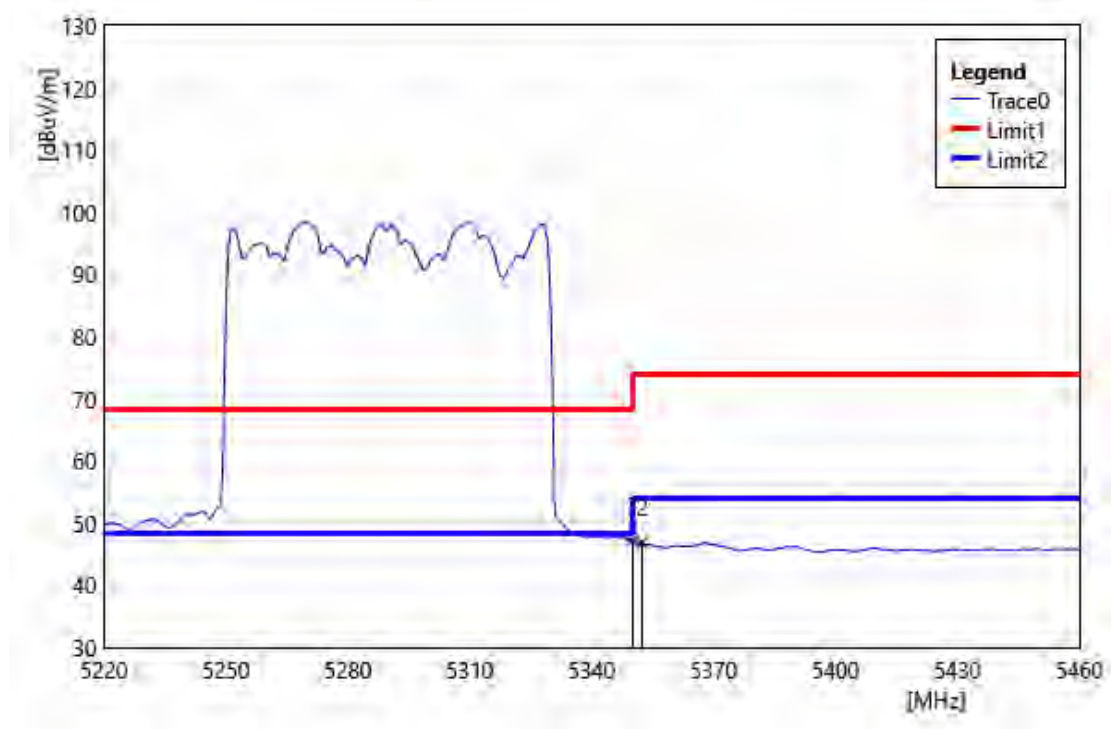


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.55	-1.31	47.23	54.00	-6.77	AVG
2	5352.48	48.15	-1.28	46.87	54.00	-7.13	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Vertical		
Remark:			

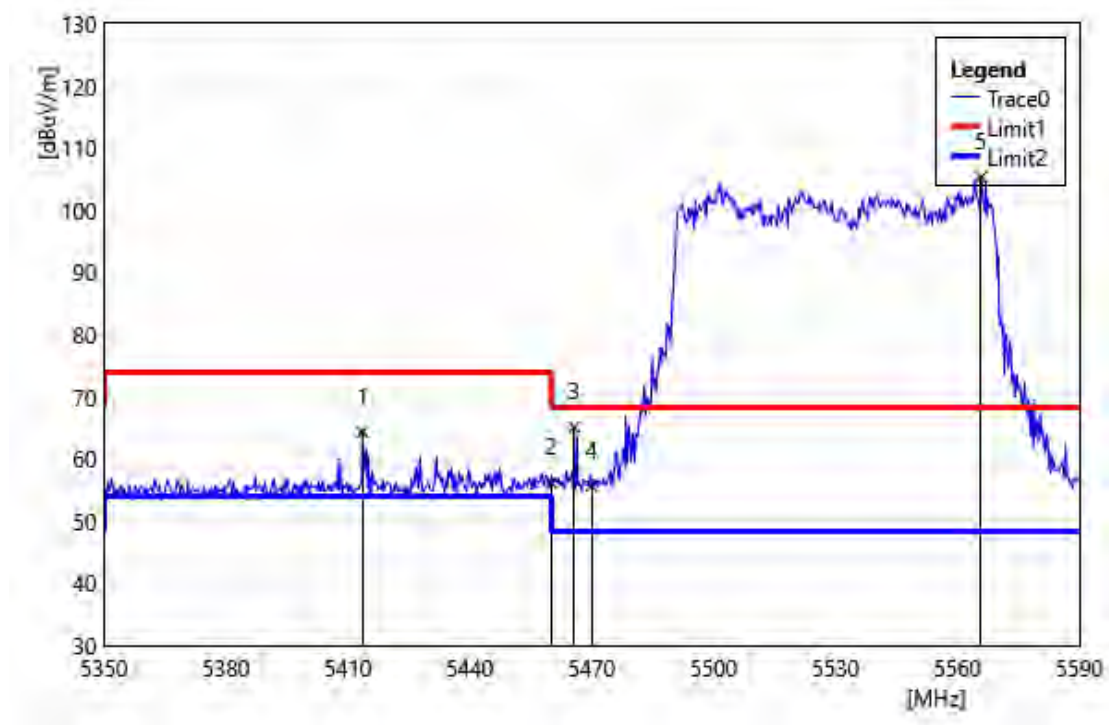


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5413.60	65.01	-0.66	64.35	74.00	-9.65	PEAK
2	5460.00	56.63	-0.41	56.22	74.00	-17.78	PEAK
3	5465.68	65.56	-0.42	65.14	68.20	-3.06	PEAK
4	5470.00	56.05	-0.42	55.63	68.20	-12.57	PEAK
5	5565.76	105.79	-0.51	105.28	68.20	37.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Horizontal		
Remark:			

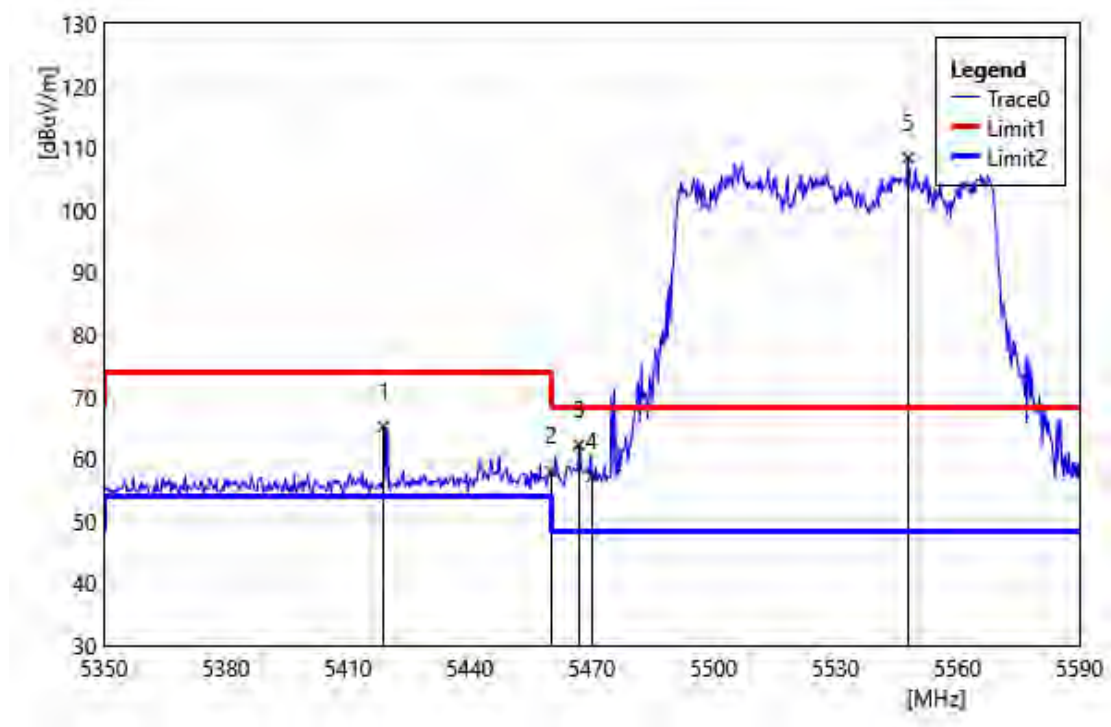


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5418.88	65.84	-0.62	65.22	74.00	-8.78	PEAK
2	5460.00	58.40	-0.41	57.99	74.00	-16.01	PEAK
3	5466.88	62.66	-0.42	62.24	68.20	-5.96	PEAK
4	5470.00	57.60	-0.42	57.18	68.20	-11.02	PEAK
5	5547.76	108.95	-0.49	108.46	68.20	40.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Vertical		
Remark:			

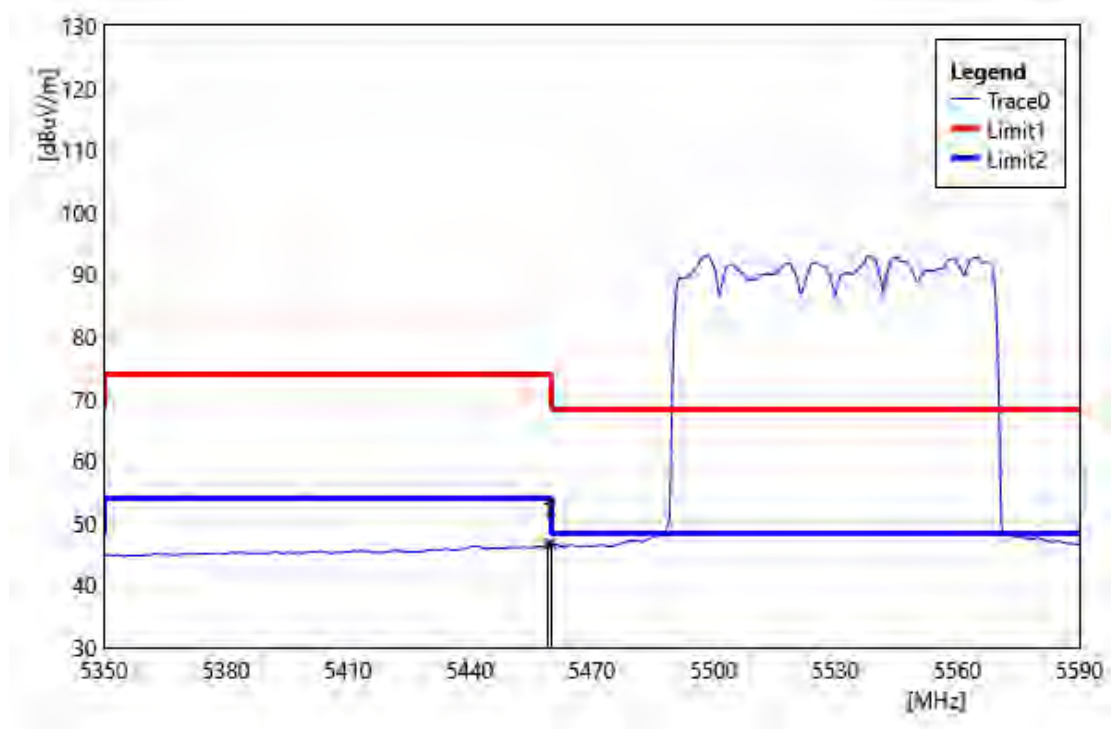


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	46.97	-0.41	46.56	54.00	-7.44	AVG
2	5460.00	47.11	-0.41	46.70	54.00	-7.30	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Horizontal		
Remark:			

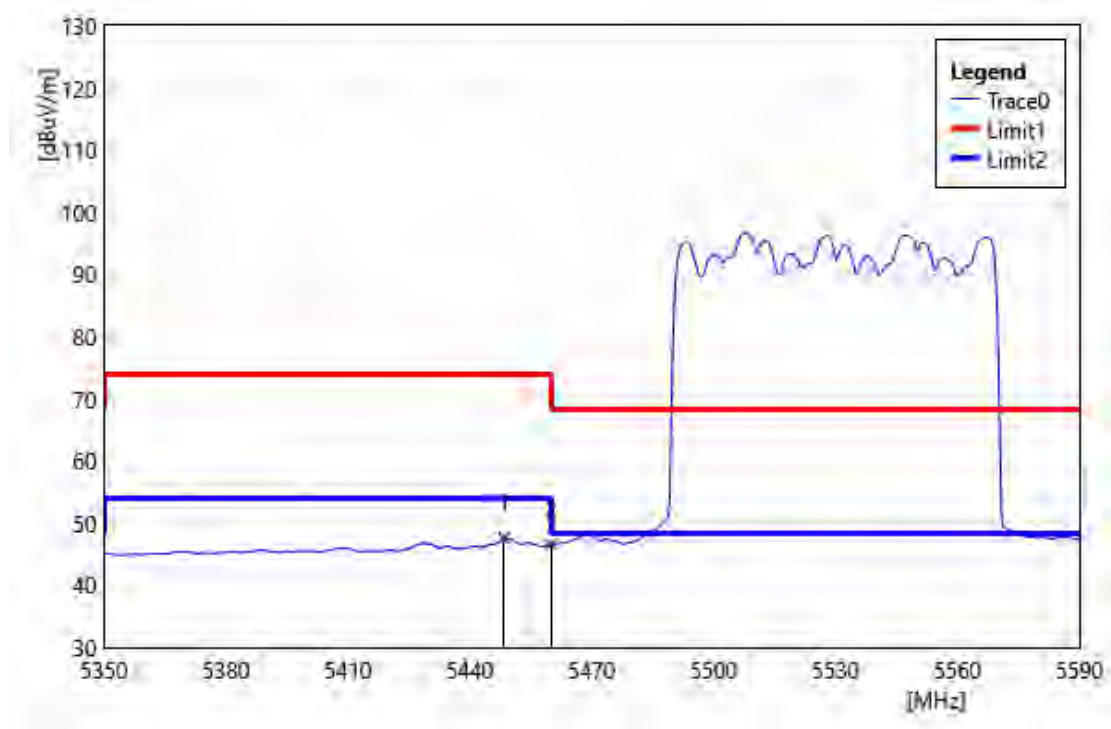


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.40	48.04	-0.42	47.62	54.00	-6.39	AVG
2	5460.00	47.01	-0.41	46.60	54.00	-7.40	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Vertical		
Remark:			

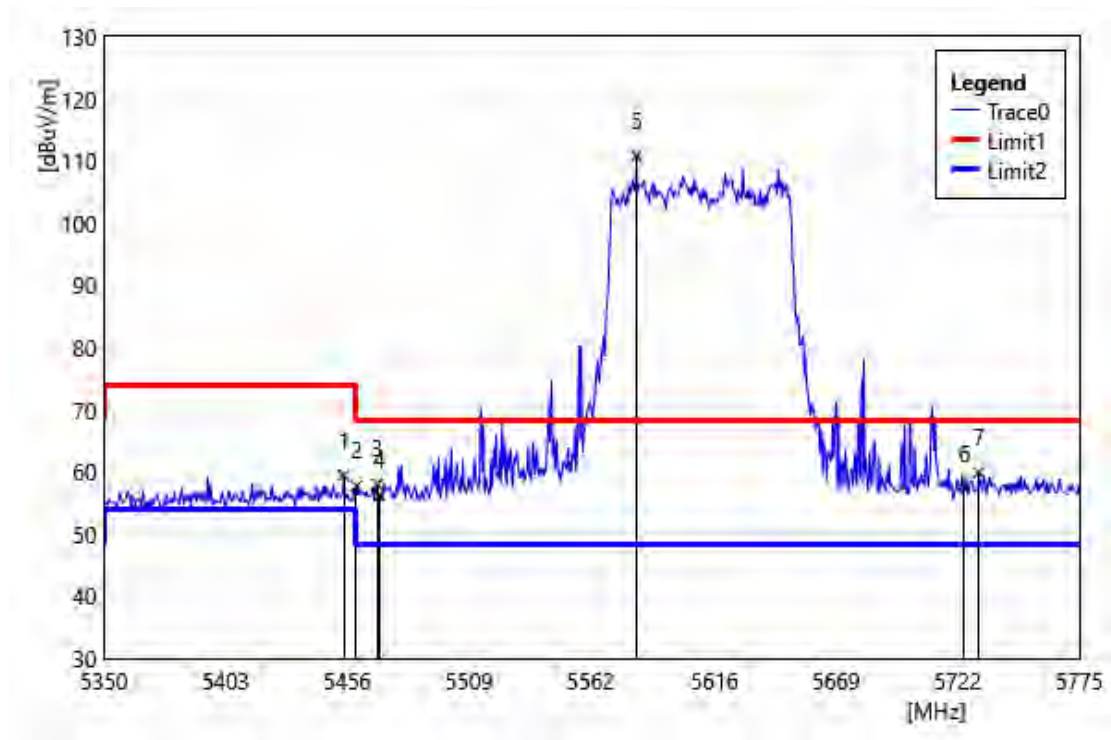


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.55	59.83	-0.41	59.42	74.00	-14.58	PEAK
2	5460.00	58.13	-0.41	57.72	74.00	-16.28	PEAK
3	5469.00	58.49	-0.42	58.07	68.20	-10.13	PEAK
4	5470.00	56.59	-0.42	56.17	68.20	-12.03	PEAK
5	5582.05	111.30	-0.52	110.78	68.20	42.58	PEAK
6	5725.00	57.40	-0.14	57.26	68.20	-10.94	PEAK
7	5731.23	60.00	-0.07	59.93	68.20	-8.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Horizontal		
Remark:			

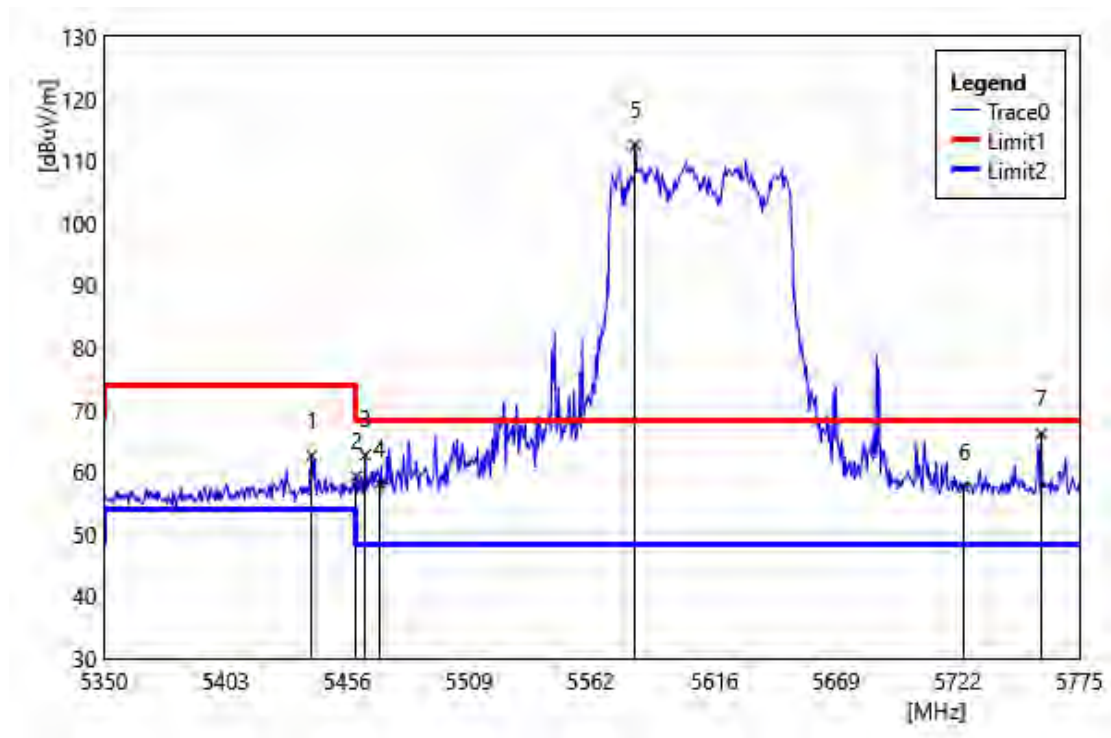


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5440.53	63.11	-0.47	62.64	74.00	-11.36	PEAK
2	5460.00	59.69	-0.41	59.28	74.00	-14.72	PEAK
3	5463.90	63.15	-0.42	62.73	68.20	-5.47	PEAK
4	5470.00	58.59	-0.42	58.17	68.20	-10.03	PEAK
5	5581.63	113.07	-0.52	112.55	68.20	44.35	PEAK
6	5725.00	57.68	-0.14	57.54	68.20	-10.66	PEAK
7	5758.43	65.98	0.16	66.14	68.20	-2.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Vertical		
Remark:			

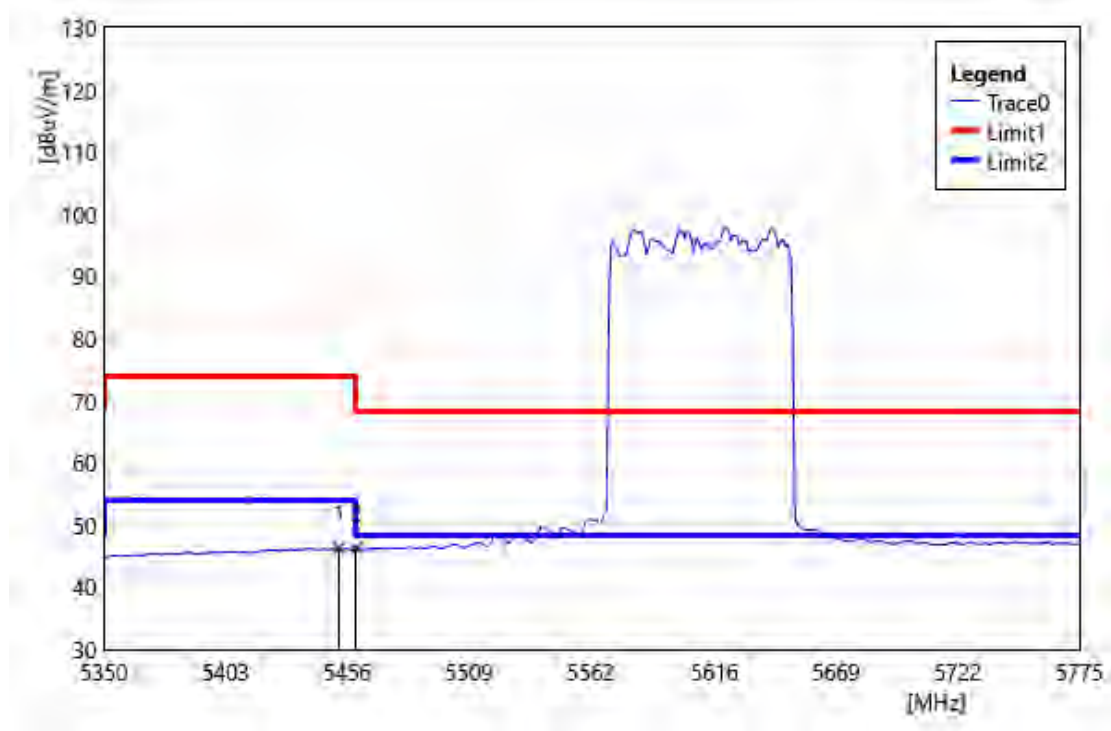


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.43	46.72	-0.41	46.31	54.00	-7.69	AVG
2	5460.00	46.65	-0.41	46.24	54.00	-7.76	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Horizontal		
Remark:			

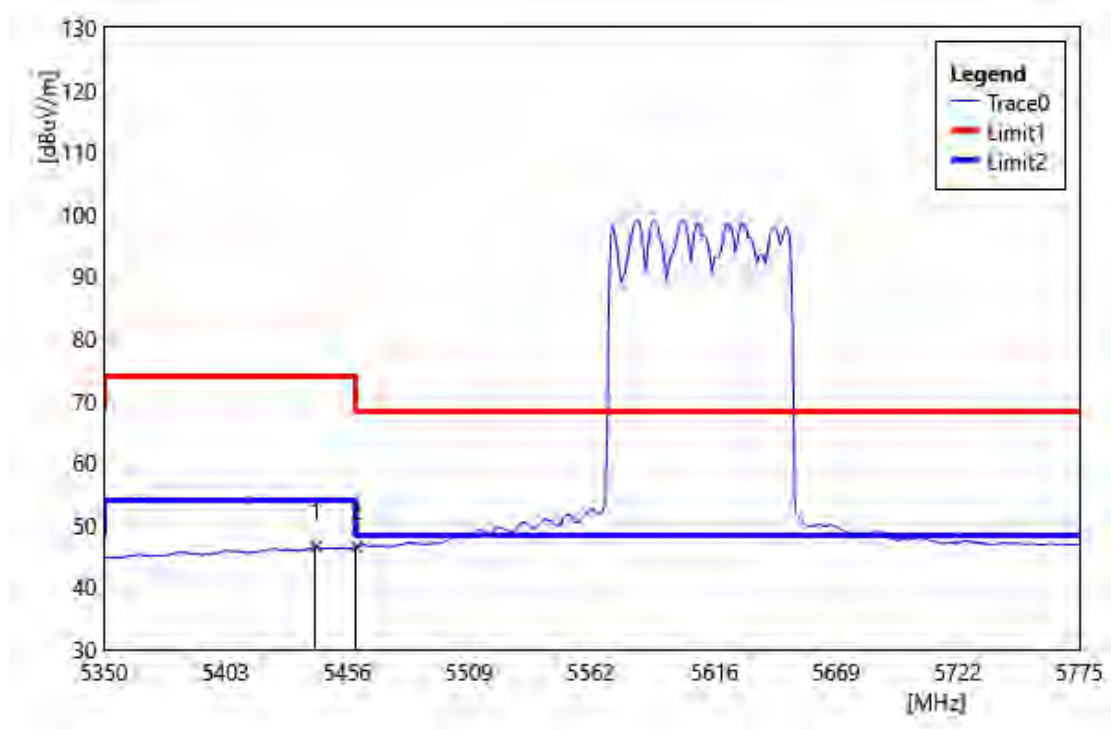


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.23	46.99	-0.46	46.53	54.00	-7.47	AVG
2	5460.00	46.89	-0.41	46.48	54.00	-7.52	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Vertical		
Remark:			

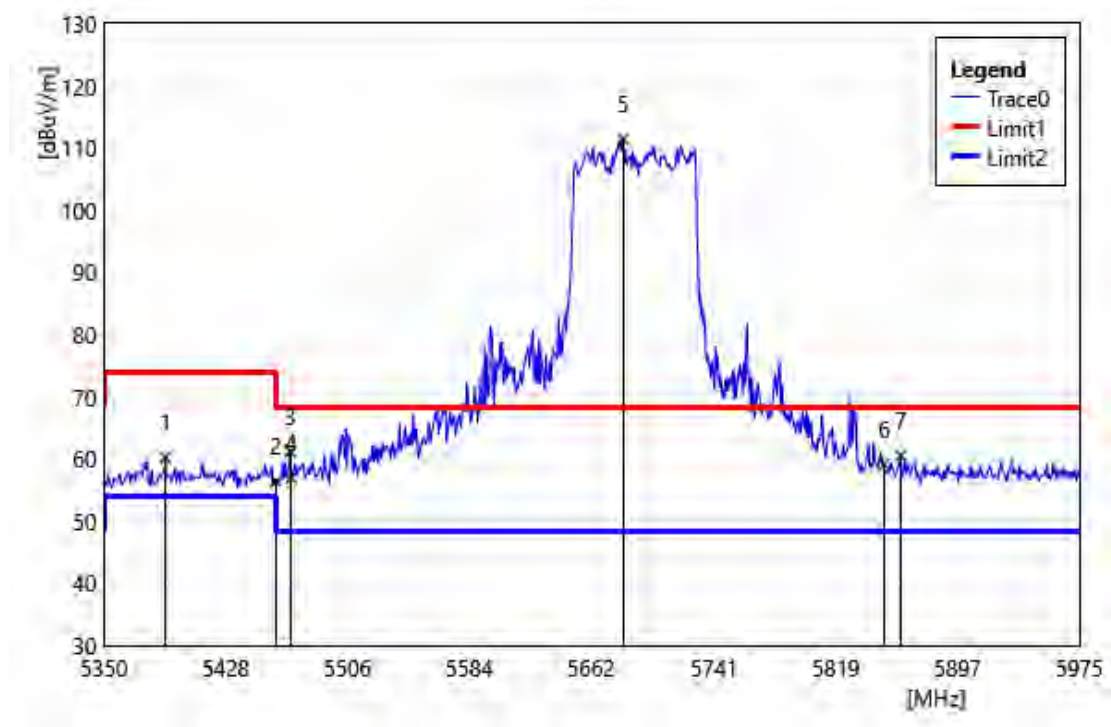


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5389.38	61.07	-0.87	60.20	74.00	-13.80	PEAK
2	5460.00	56.79	-0.41	56.38	74.00	-17.62	PEAK
3	5469.38	61.63	-0.42	61.21	68.20	-6.99	PEAK
4	5470.00	57.34	-0.42	56.92	68.20	-11.28	PEAK
5	5682.50	111.93	-0.48	111.45	68.20	43.25	PEAK
6	5850.00	58.65	0.45	59.10	68.20	-9.10	PEAK
7	5860.63	60.05	0.50	60.55	68.20	-7.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

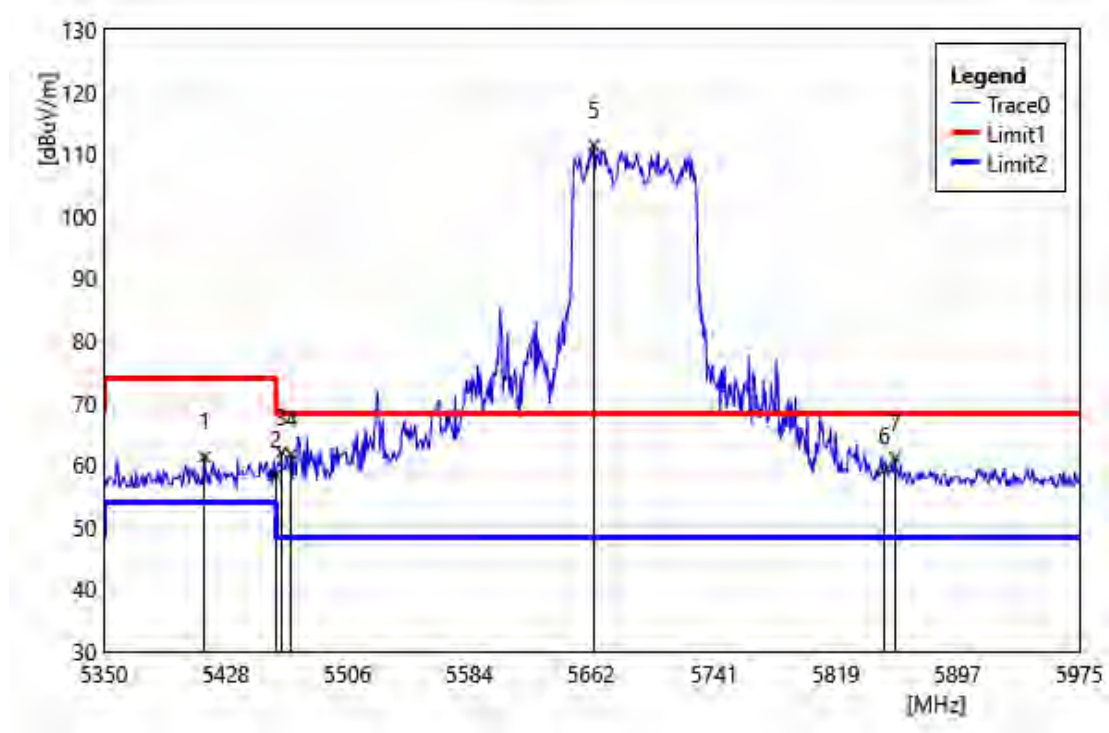


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5414.38	61.93	-0.66	61.27	74.00	-12.73	PEAK
2	5460.00	58.75	-0.41	58.34	74.00	-15.66	PEAK
3	5463.75	62.45	-0.42	62.03	68.20	-6.17	PEAK
4	5470.00	62.14	-0.42	61.72	68.20	-6.48	PEAK
5	5663.75	111.90	-0.54	111.36	68.20	43.16	PEAK
6	5850.00	58.62	0.45	59.07	68.20	-9.13	PEAK
7	5856.88	60.67	0.48	61.15	68.20	-7.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Vertical		
Remark:			

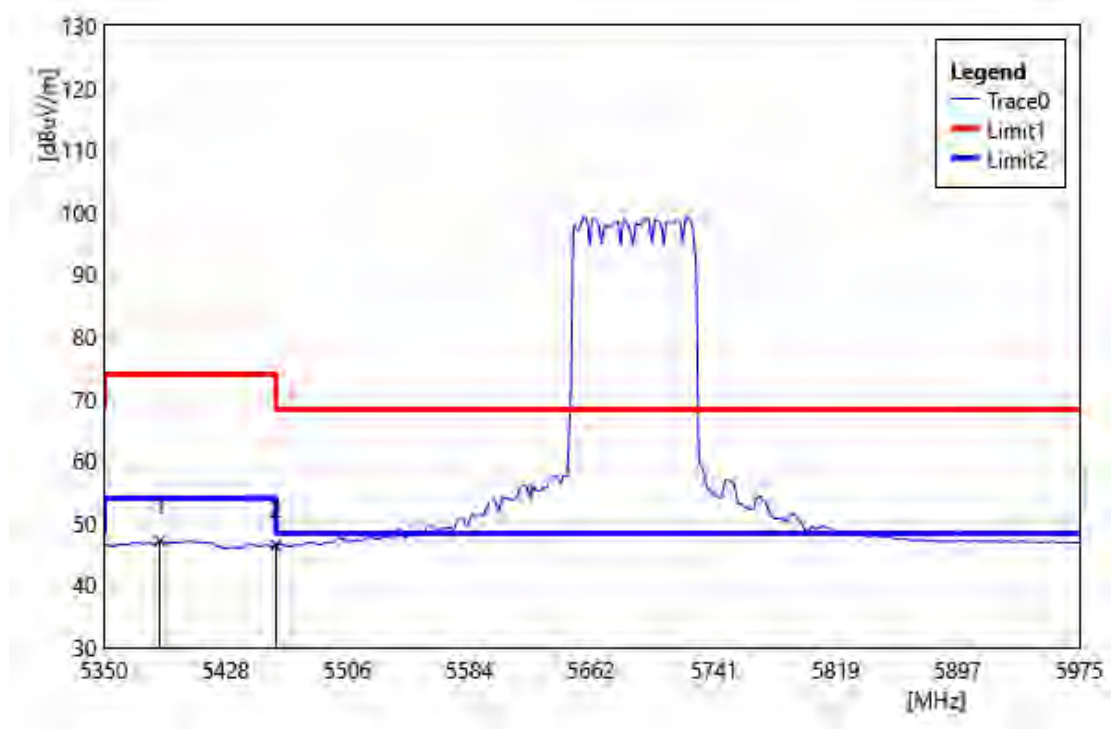


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5385.63	48.10	-0.92	47.18	54.00	-6.82	AVG
2	5460.00	46.86	-0.41	46.45	54.00	-7.55	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

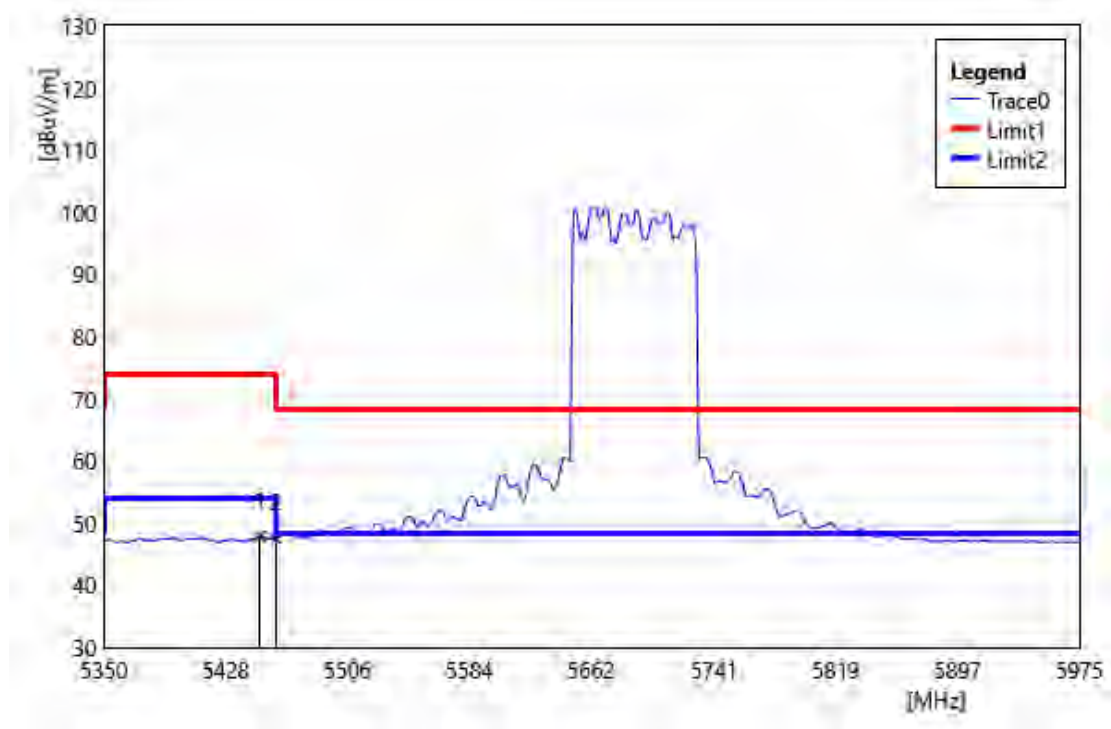

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.00	48.28	-0.40	47.88	54.00	-6.13	AVG
2	5460.00	47.95	-0.41	47.54	54.00	-6.46	AVG


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

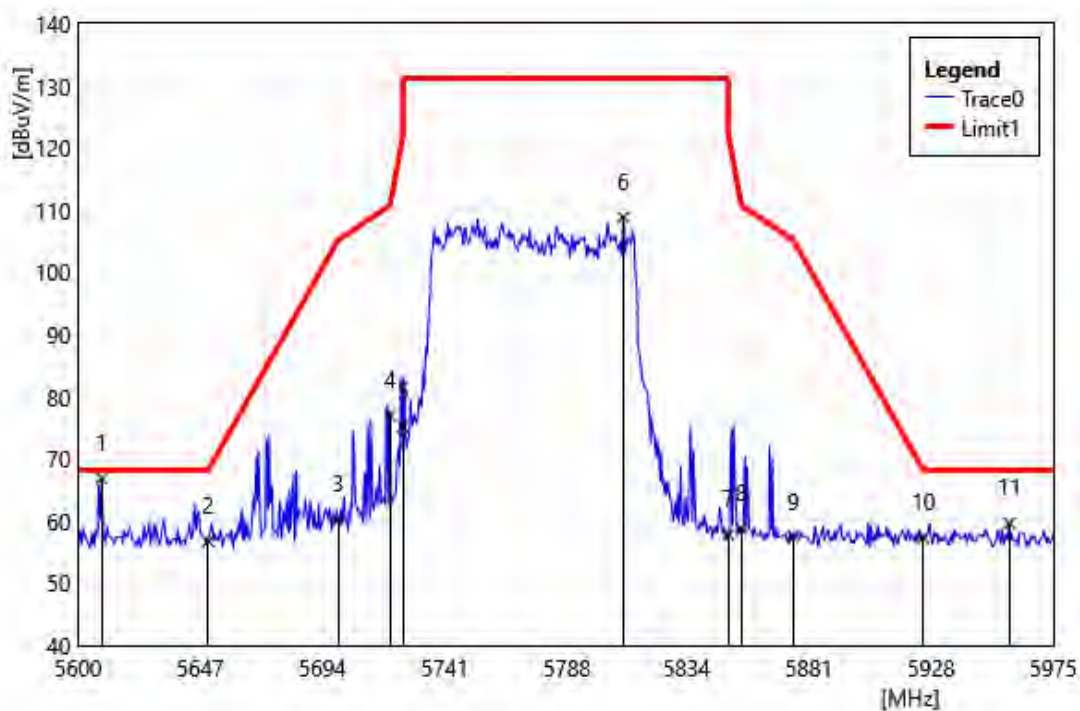

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5609.00	67.43	-0.54	66.89	68.20	-1.31	PEAK
2	5650.00	57.34	-0.58	56.76	68.20	-11.44	PEAK
3	5700.00	60.67	-0.42	60.25	105.20	-44.95	PEAK
4	5720.00	77.26	-0.20	77.06	110.80	-33.74	PEAK
5	5725.00	75.36	-0.14	75.22	122.20	-46.98	PEAK
6	5809.63	108.51	0.32	108.83	131.20	-22.37	PEAK
7	5850.00	57.44	0.45	57.89	122.20	-64.31	PEAK
8	5855.00	58.29	0.47	58.76	110.80	-52.04	PEAK
9	5875.00	56.94	0.58	57.52	105.20	-47.68	PEAK
10	5925.00	56.75	0.63	57.38	68.20	-10.82	PEAK
11	5958.13	59.14	0.56	59.70	68.20	-8.50	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

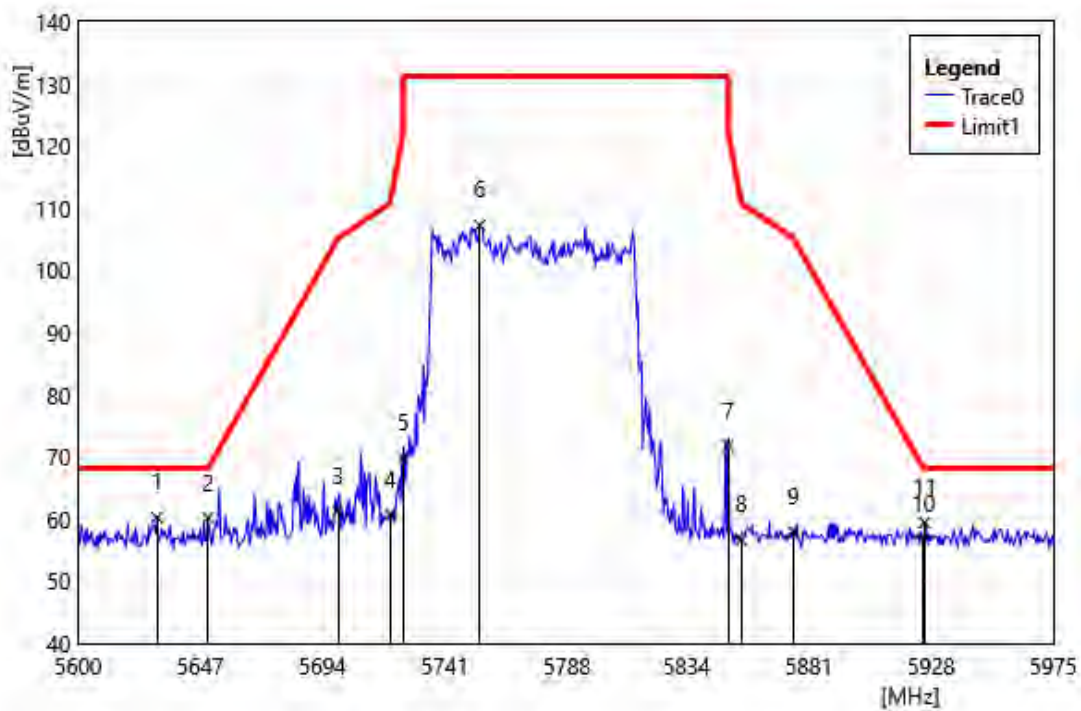

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5630.38	60.80	-0.56	60.24	68.20	-7.96	PEAK
2	5650.00	60.78	-0.58	60.20	68.20	-8.00	PEAK
3	5700.00	61.73	-0.42	61.30	105.20	-43.90	PEAK
4	5720.00	60.99	-0.20	60.79	110.80	-50.01	PEAK
5	5725.00	70.10	-0.14	69.96	122.20	-52.24	PEAK
6	5754.50	107.11	0.15	107.26	131.20	-23.94	PEAK
7	5850.00	71.35	0.45	71.80	122.20	-50.40	PEAK
8	5855.00	56.20	0.47	56.67	110.80	-54.13	PEAK
9	5875.00	57.34	0.58	57.92	105.20	-47.28	PEAK
10	5925.00	56.09	0.63	56.72	68.20	-11.48	PEAK
11	5925.50	58.76	0.63	59.39	68.20	-8.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

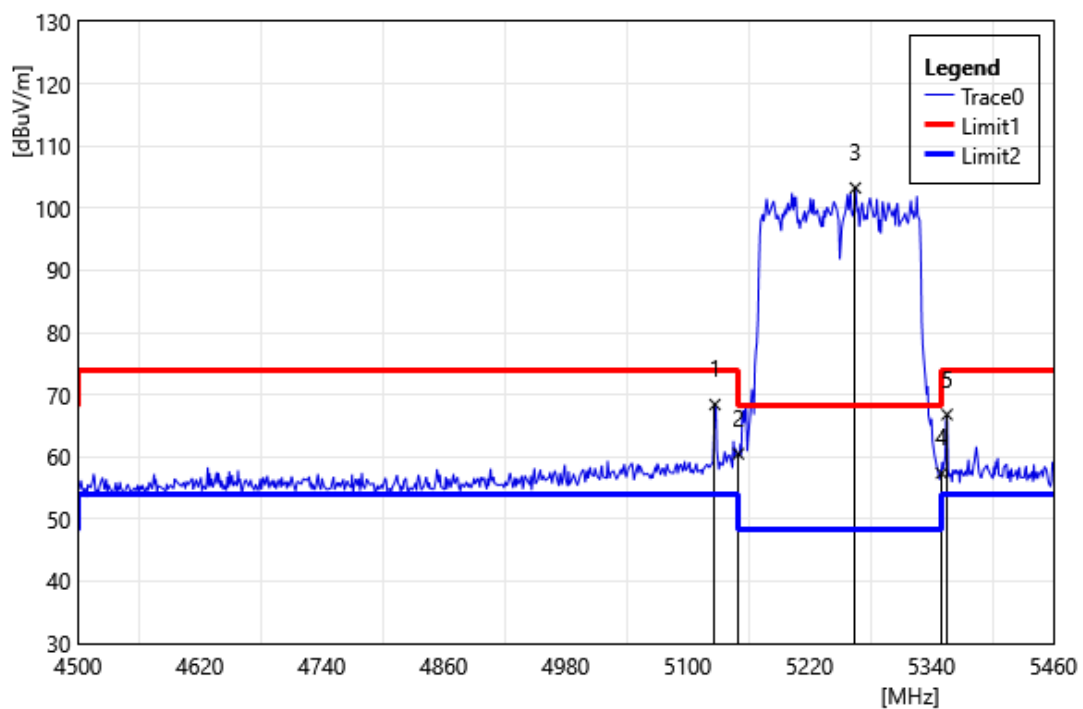


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5126.88	69.28	-0.86	68.42	74.00	-5.58	PEAK
2	5150.00	61.42	-0.92	60.50	74.00	-13.50	PEAK
3	5265.12	104.53	-1.26	103.27	68.20	35.07	PEAK
4	5350.00	58.70	-1.31	57.39	74.00	-16.61	PEAK
5	5355.36	68.06	-1.25	66.81	74.00	-7.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

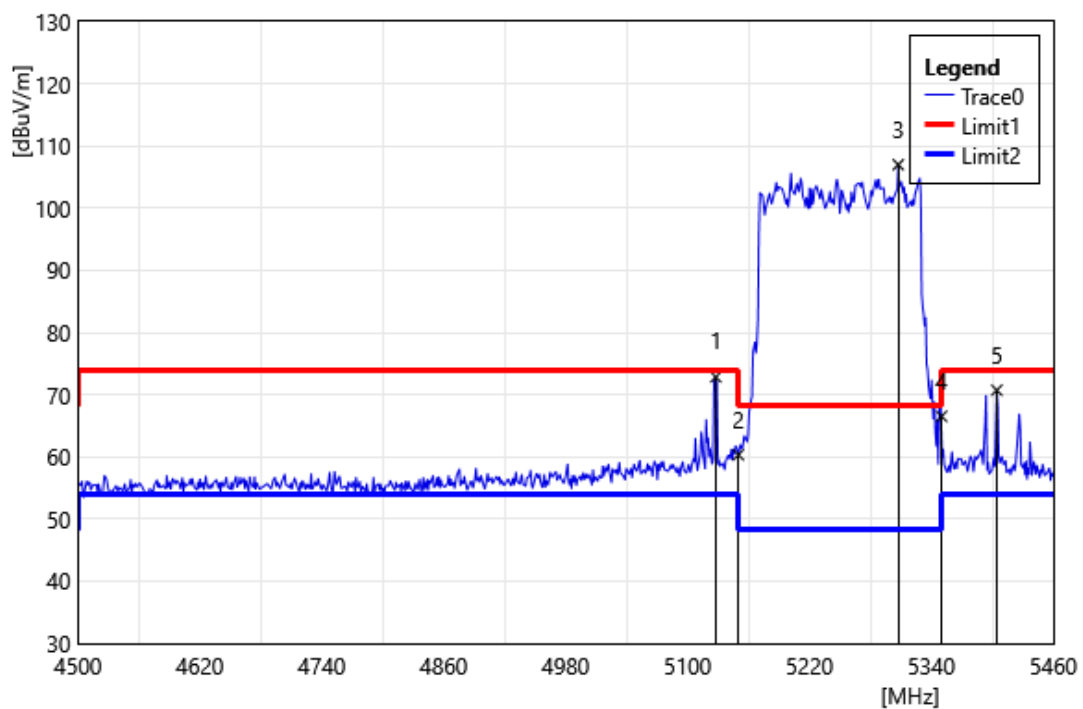


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5127.84	73.72	-0.86	72.86	74.00	-1.14	PEAK
2	5150.00	61.25	-0.92	60.32	74.00	-13.68	PEAK
3	5307.36	108.35	-1.36	106.99	68.20	38.79	PEAK
4	5350.00	67.84	-1.31	66.53	74.00	-7.47	PEAK
5	5404.32	71.46	-0.73	70.73	74.00	-3.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

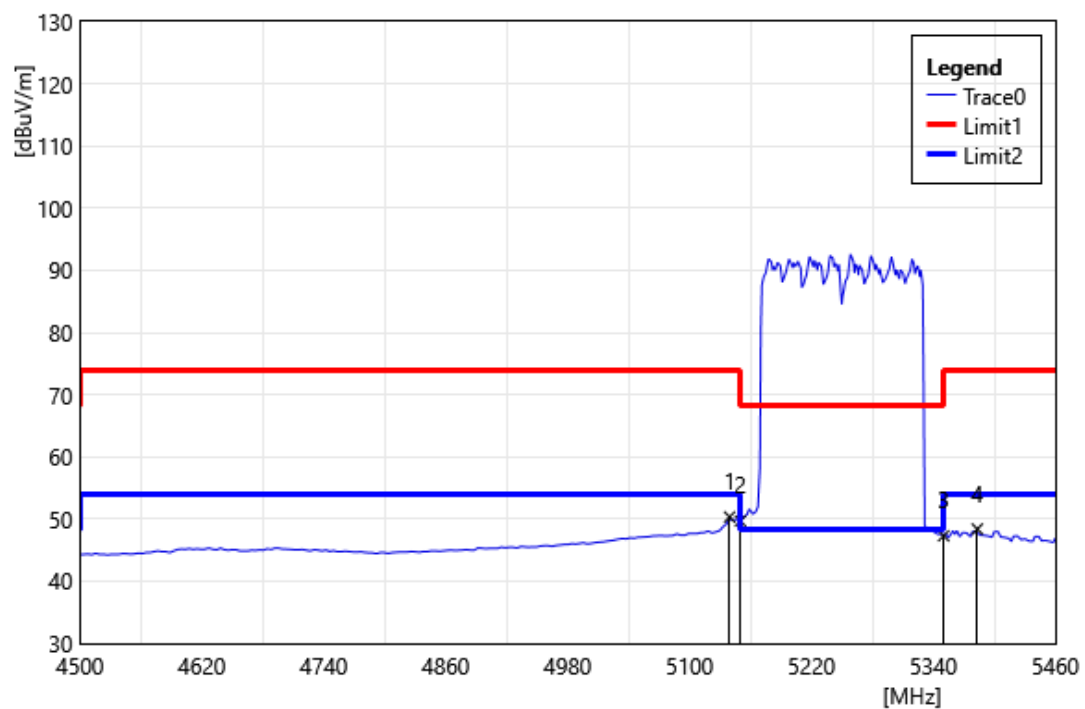


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.36	51.23	-0.89	50.34	54.00	-3.66	AVG
2	5150.00	50.62	-0.92	49.69	54.00	-4.31	AVG
3	5350.00	48.61	-1.31	47.30	54.00	-6.70	AVG
4	5383.20	49.34	-0.94	48.40	54.00	-5.60	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

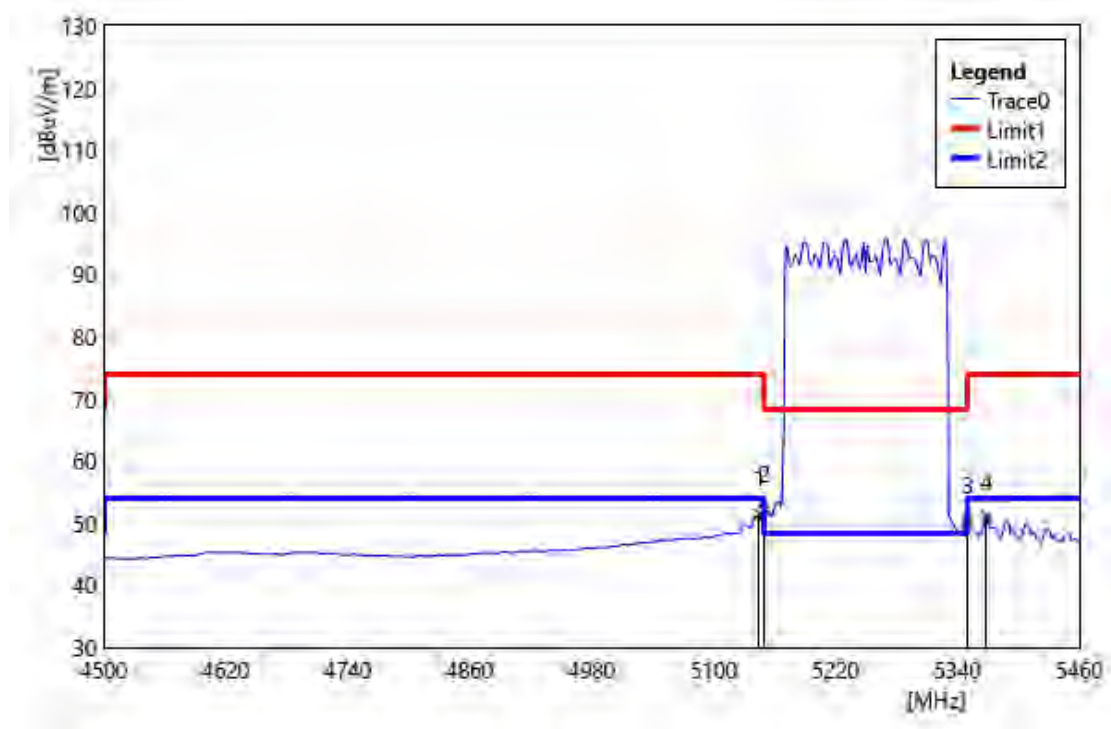


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.12	52.37	-0.91	51.46	54.00	-2.54	AVG
2	5150.00	52.94	-0.92	52.02	54.00	-1.98	AVG
3	5350.00	51.71	-1.31	50.40	54.00	-3.60	AVG
4	5368.80	52.13	-1.10	51.03	54.00	-2.97	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

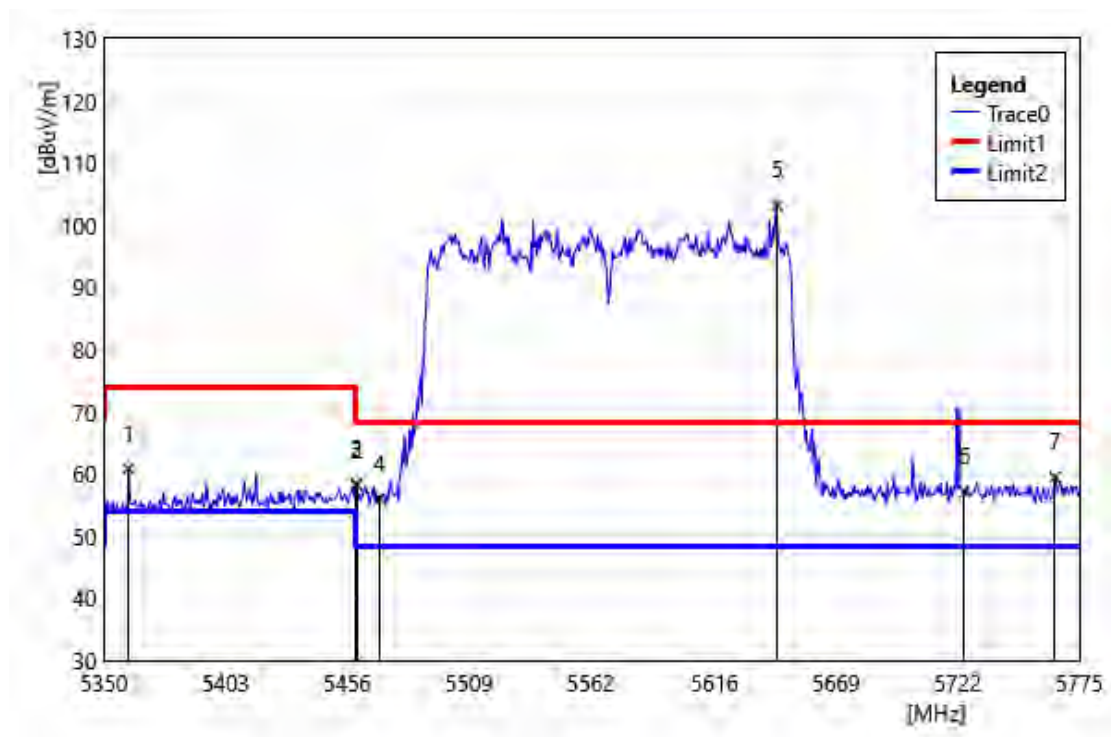


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5360.63	62.07	-1.19	60.88	74.00	-13.12	PEAK
2	5460.00	58.61	-0.41	58.20	74.00	-15.80	PEAK
3	5460.08	58.82	-0.41	58.41	68.20	-9.79	PEAK
4	5470.00	56.43	-0.42	56.01	68.20	-12.19	PEAK
5	5643.25	103.86	-0.57	103.29	68.20	35.09	PEAK
6	5725.00	57.24	-0.14	57.10	68.20	-11.10	PEAK
7	5764.38	59.29	0.18	59.47	68.20	-8.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

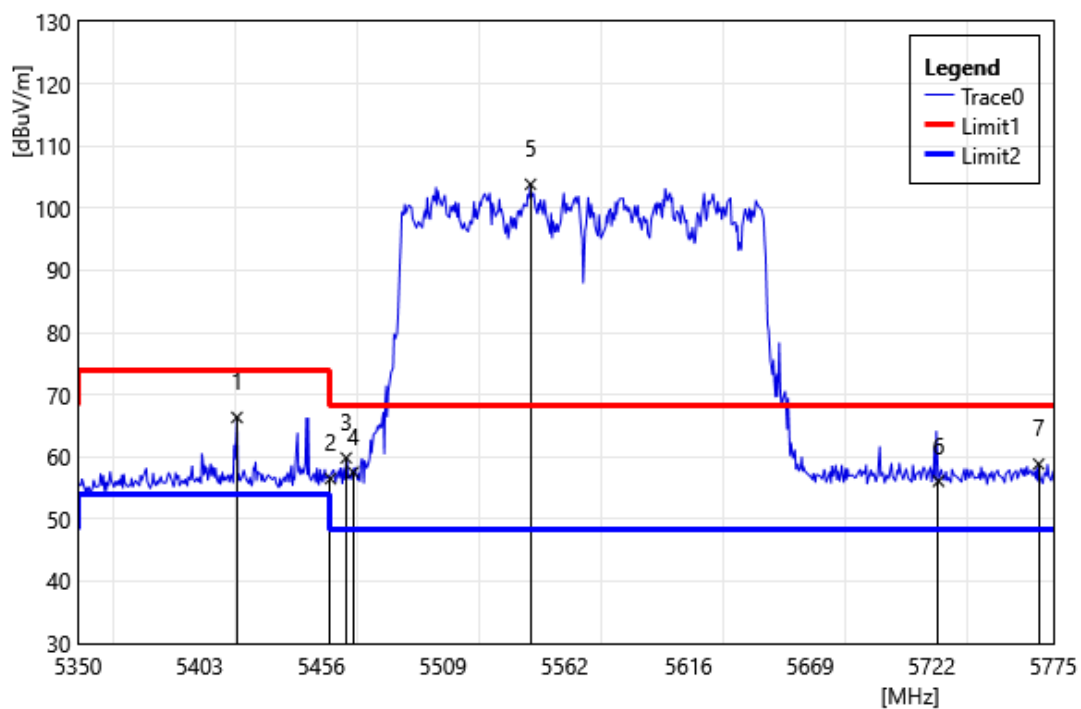


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5419.28	66.97	-0.62	66.35	74.00	-7.65	PEAK
2	5460.00	56.90	-0.41	56.49	74.00	-17.51	PEAK
3	5466.88	60.27	-0.42	59.85	68.20	-8.35	PEAK
4	5470.00	57.96	-0.42	57.54	68.20	-10.66	PEAK
5	5547.20	104.33	-0.49	103.84	68.20	35.64	PEAK
6	5725.00	56.23	-0.14	56.09	68.20	-12.11	PEAK
7	5768.63	58.65	0.19	58.84	68.20	-9.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

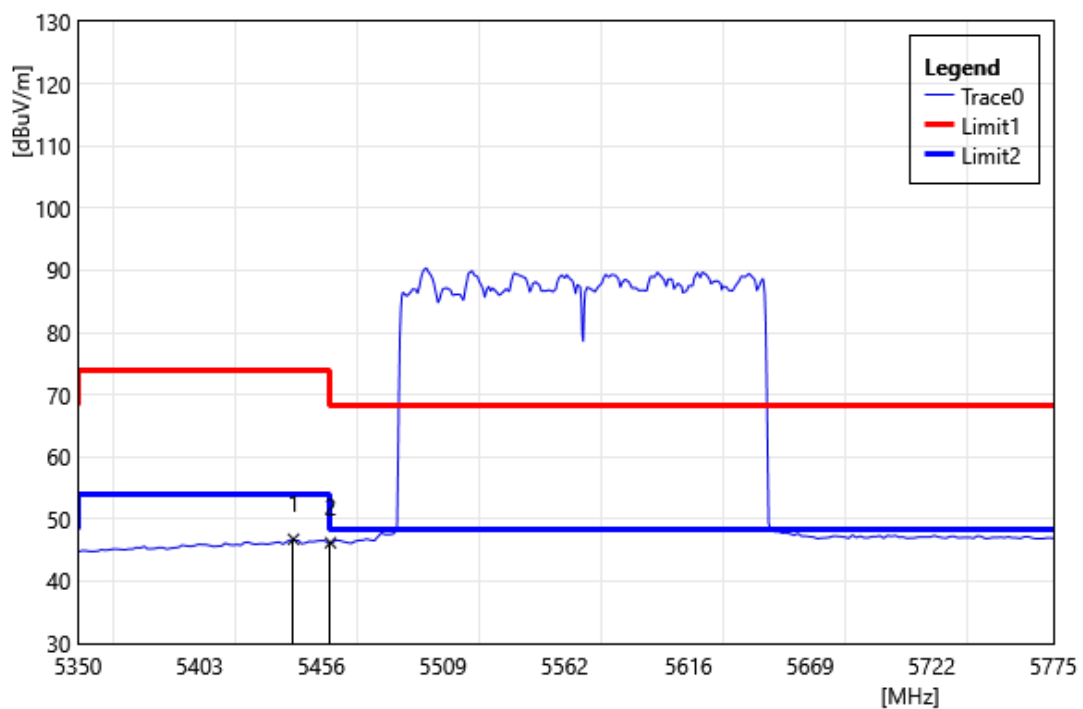

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.93	47.20	-0.45	46.75	54.00	-7.25	AVG
2	5460.00	46.60	-0.41	46.19	54.00	-7.81	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

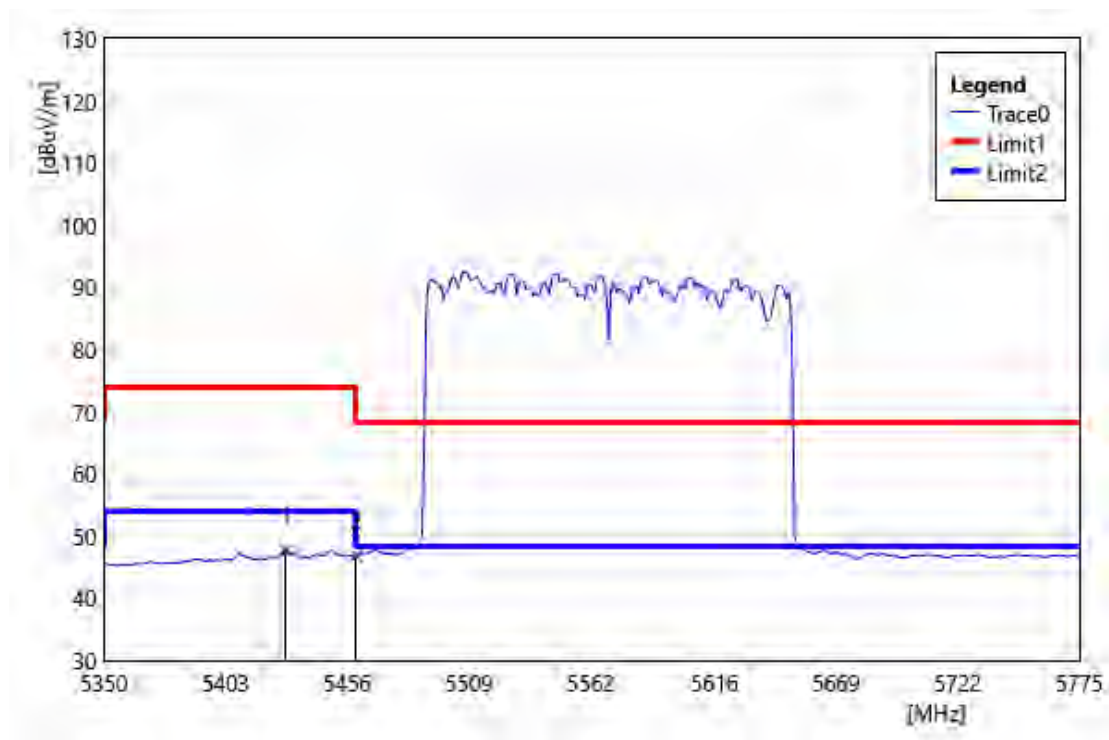


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.05	48.32	-0.55	47.77	54.00	-6.23	AVG
2	5460.00	47.22	-0.41	46.81	54.00	-7.19	AVG

Mode 2_High Band


Below 1 GHz

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

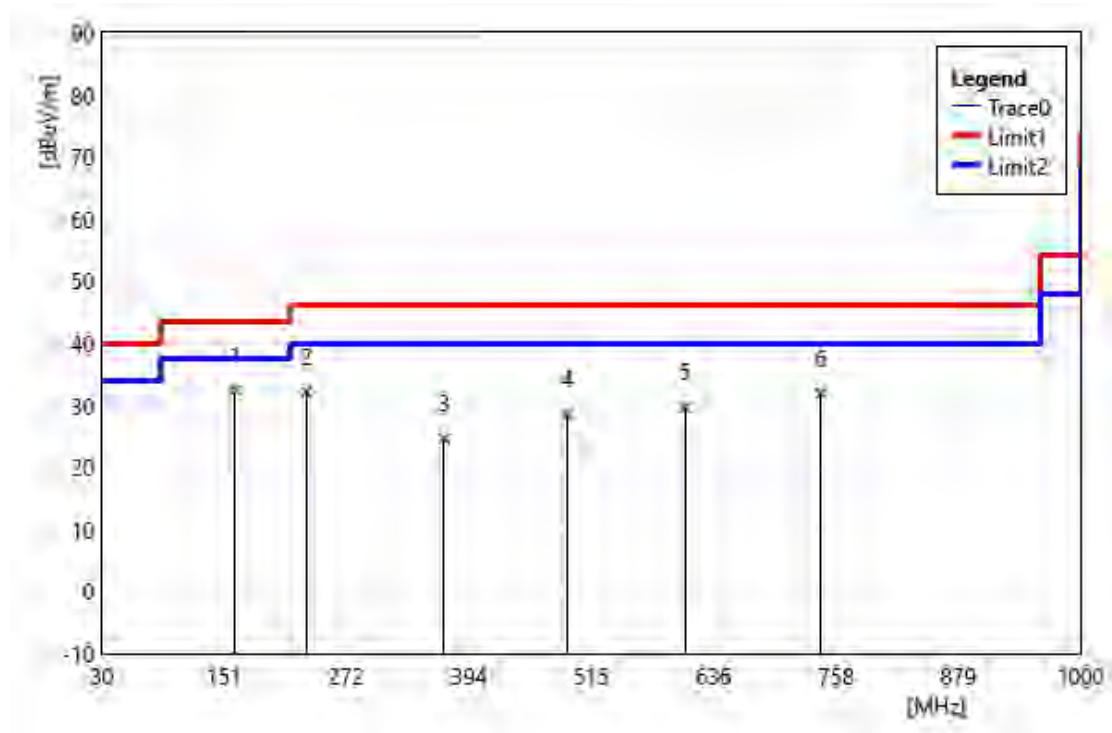

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	161.92	39.43	-7.01	32.42	43.50	-11.08	QP
2	232.73	40.05	-7.96	32.09	46.00	-13.91	QP
3	369.50	28.96	-4.35	24.61	46.00	-21.39	QP
4	491.72	30.89	-2.34	28.55	46.00	-17.45	QP
5	608.12	29.72	-0.03	29.69	46.00	-16.32	QP
6	742.95	28.71	3.21	31.92	46.00	-14.08	QP

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Horizontal		
Remark:			

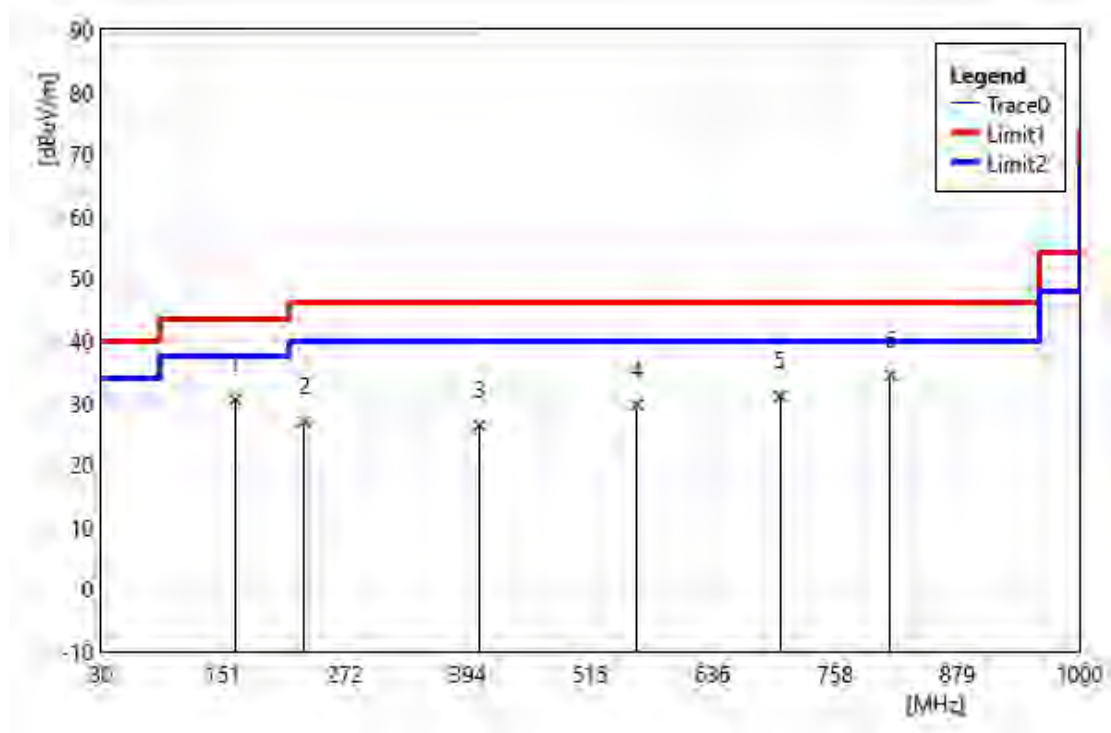


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	162.89	37.51	-7.01	30.50	43.50	-13.00	QP
2	231.76	34.87	-7.99	26.88	46.00	-19.12	QP
3	405.39	30.04	-3.68	26.36	46.00	-19.64	QP
4	561.56	30.18	-0.53	29.65	46.00	-16.35	QP
5	703.18	28.78	2.30	31.09	46.00	-14.92	QP
6	812.79	30.49	3.92	34.41	46.00	-11.59	QP

Harmonic


Above 1 GHz

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

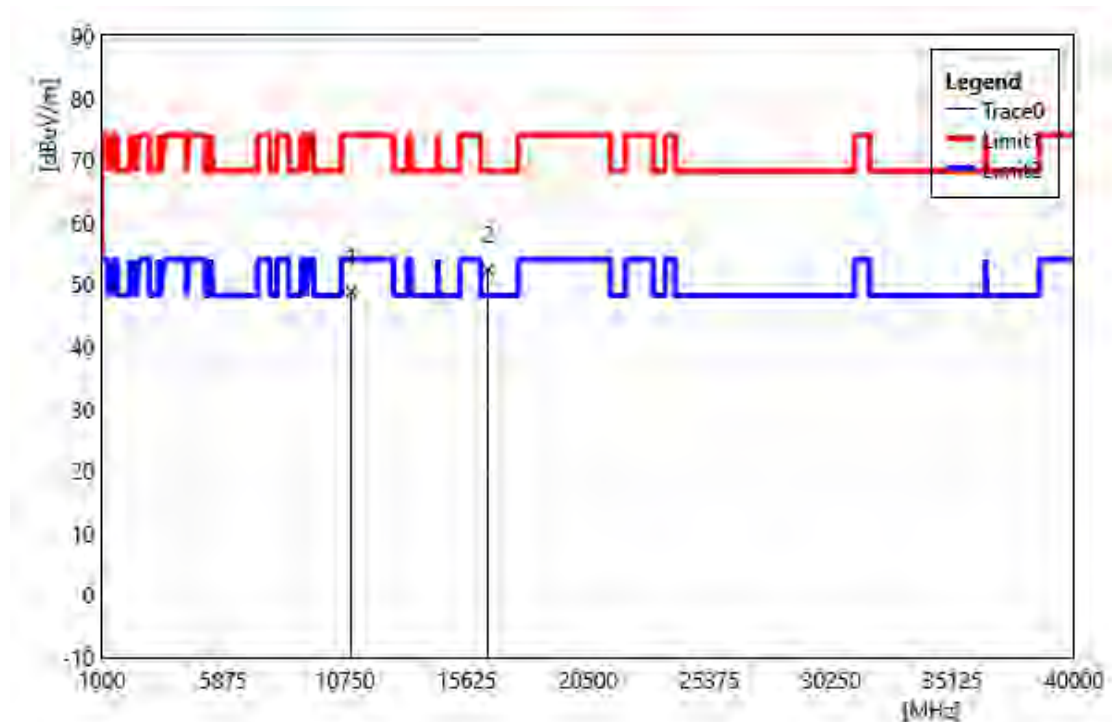


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.89	12.94	48.82	74.00	-25.18	PEAK
2	16500.00	36.65	15.66	52.31	68.20	-15.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

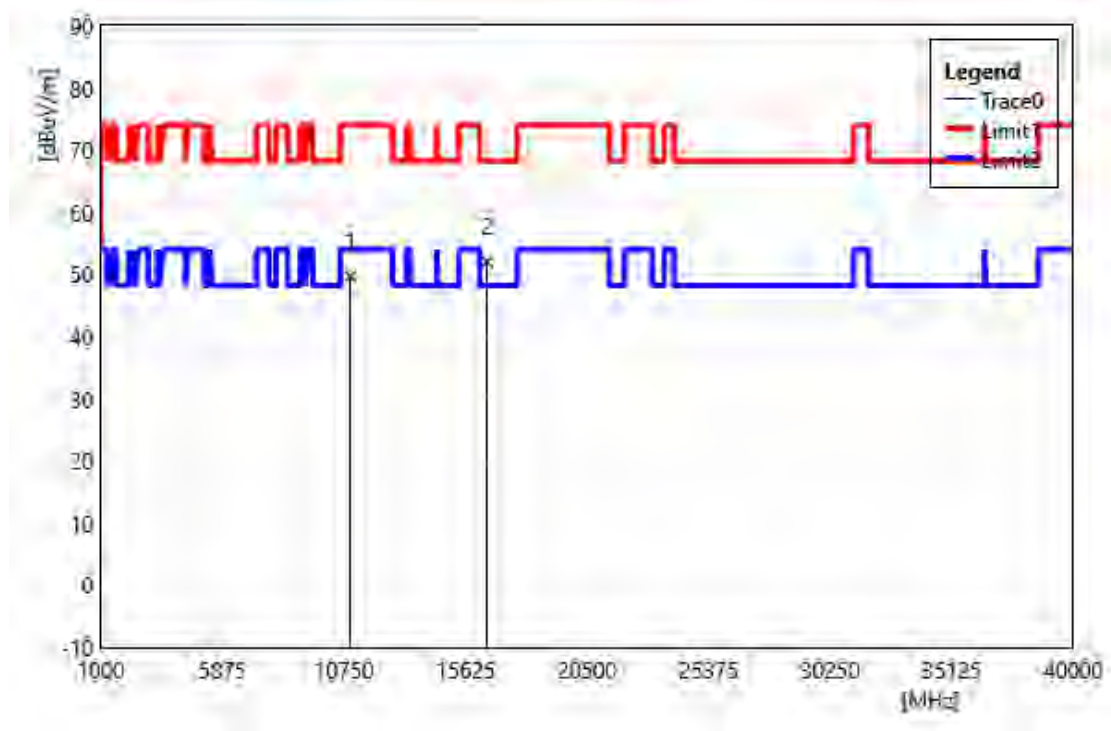


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	36.74	12.94	49.67	74.00	-24.33	PEAK
2	16500.00	36.31	15.66	51.97	68.20	-16.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

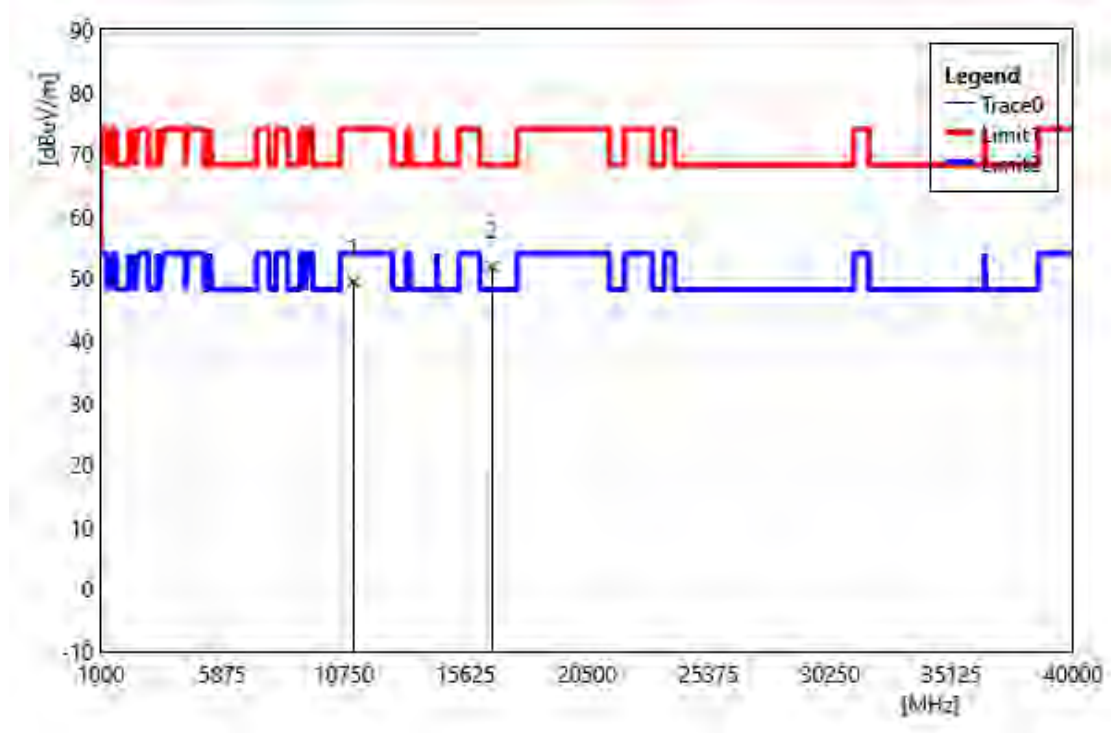


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	36.16	13.29	49.45	74.00	-24.55	PEAK
2	16680.00	35.48	16.39	51.87	68.20	-16.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

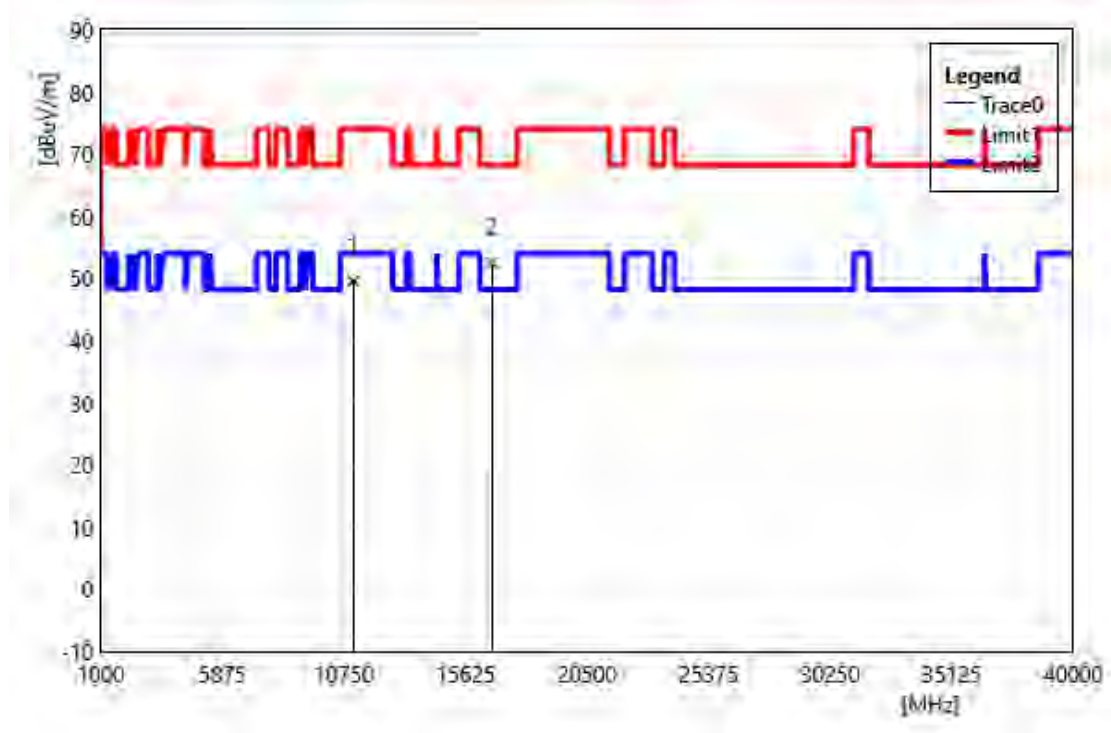


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	36.24	13.29	49.53	74.00	-24.47	PEAK
2	16680.00	36.10	16.39	52.49	68.20	-15.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

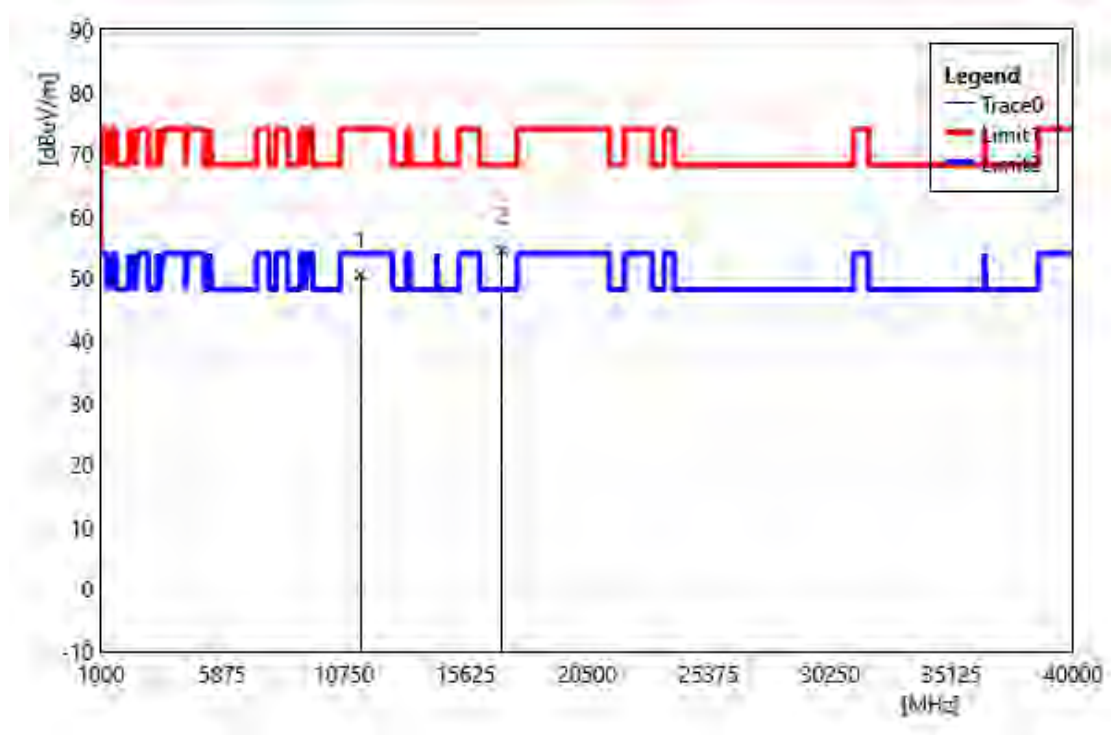


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	37.06	13.51	50.58	74.00	-23.42	PEAK
2	17100.00	36.54	17.98	54.51	68.20	-13.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

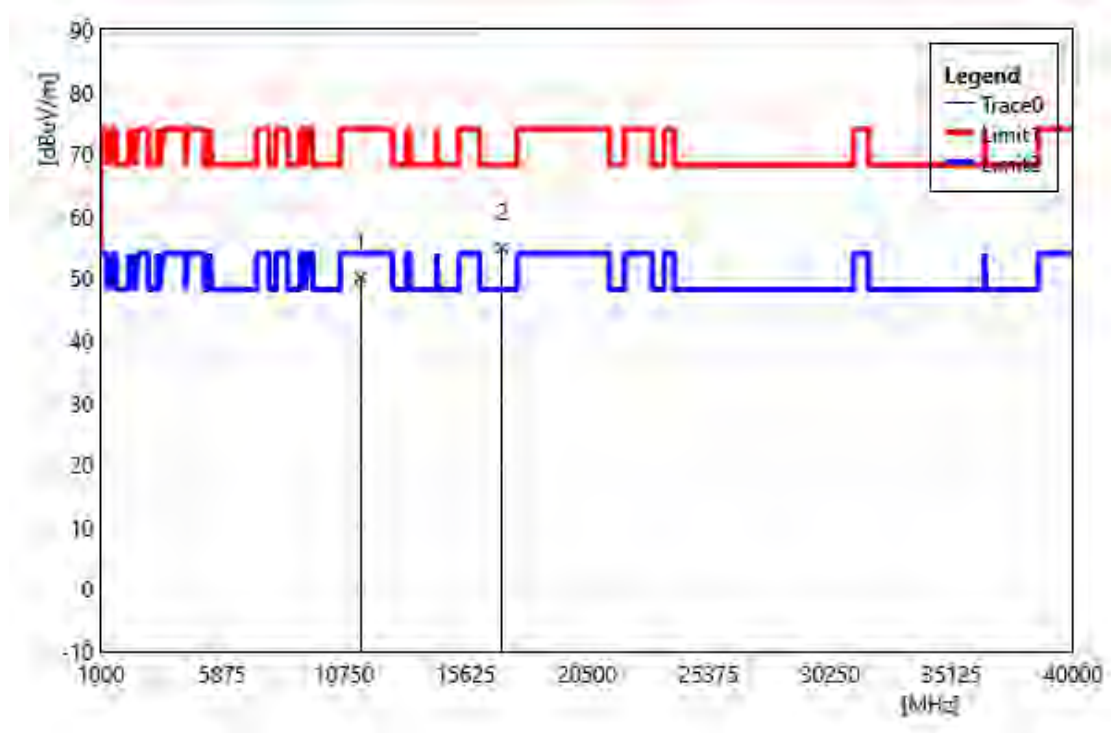


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	36.60	13.51	50.11	74.00	-23.89	PEAK
2	17100.00	36.93	17.98	54.91	68.20	-13.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

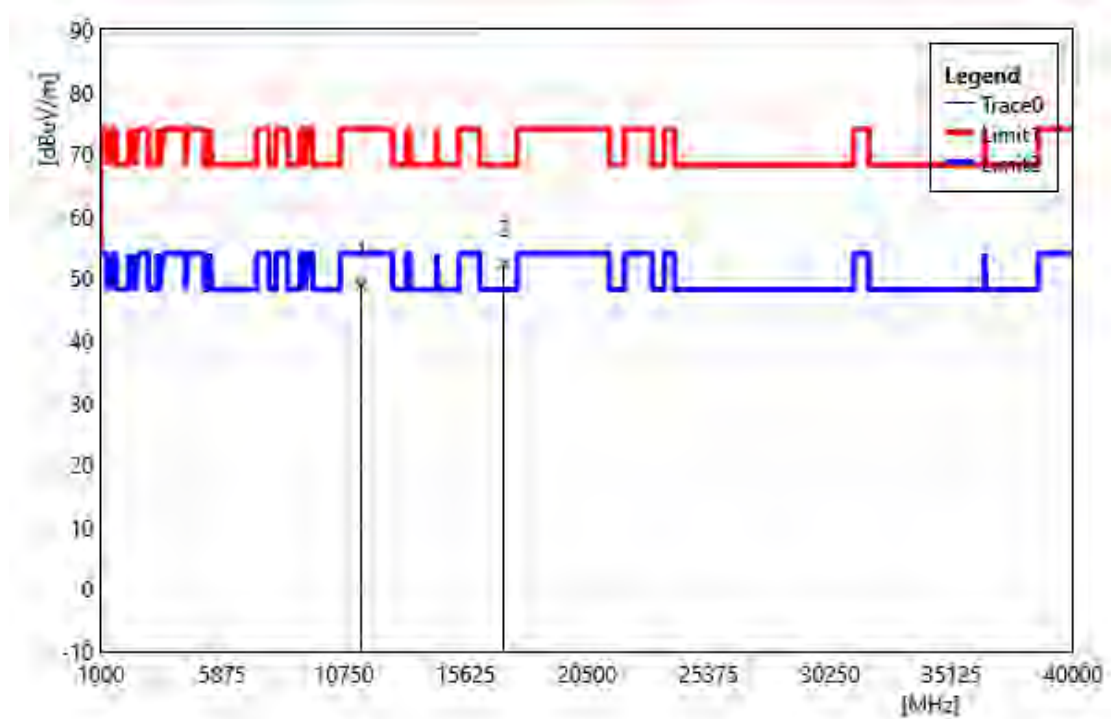


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	36.46	12.56	49.02	74.00	-24.99	PEAK
2	17160.00	34.68	17.69	52.37	68.20	-15.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

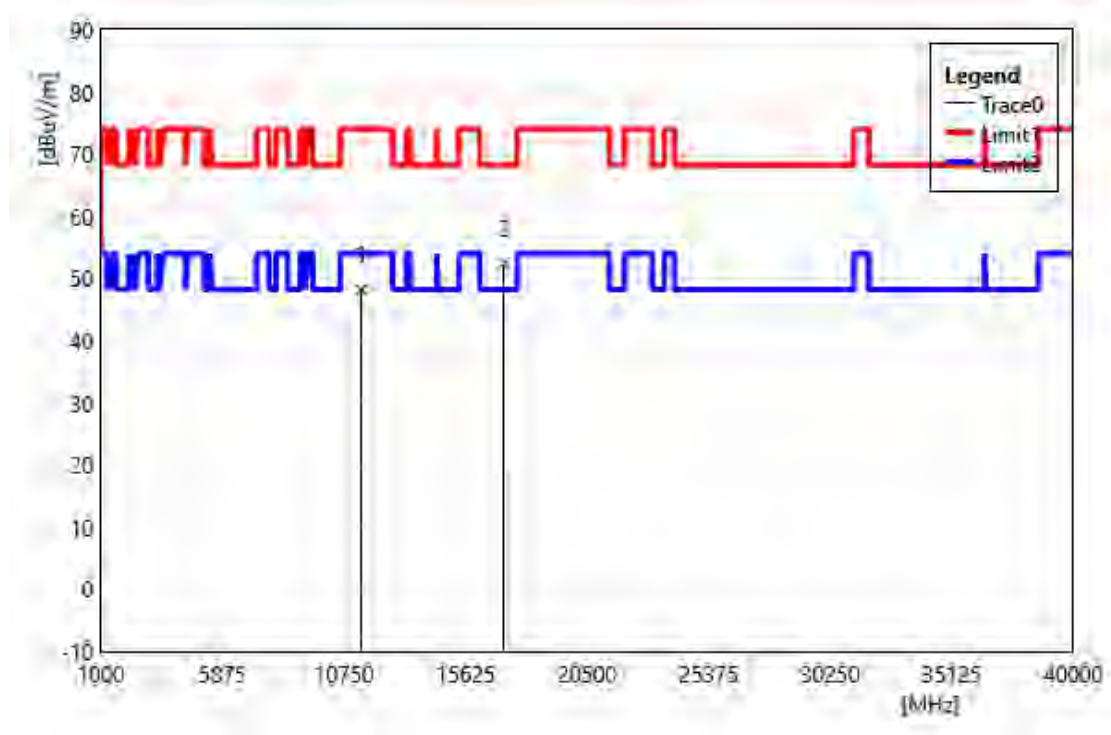


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	35.57	12.56	48.13	74.00	-25.87	PEAK
2	17160.00	34.72	17.69	52.41	68.20	-15.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

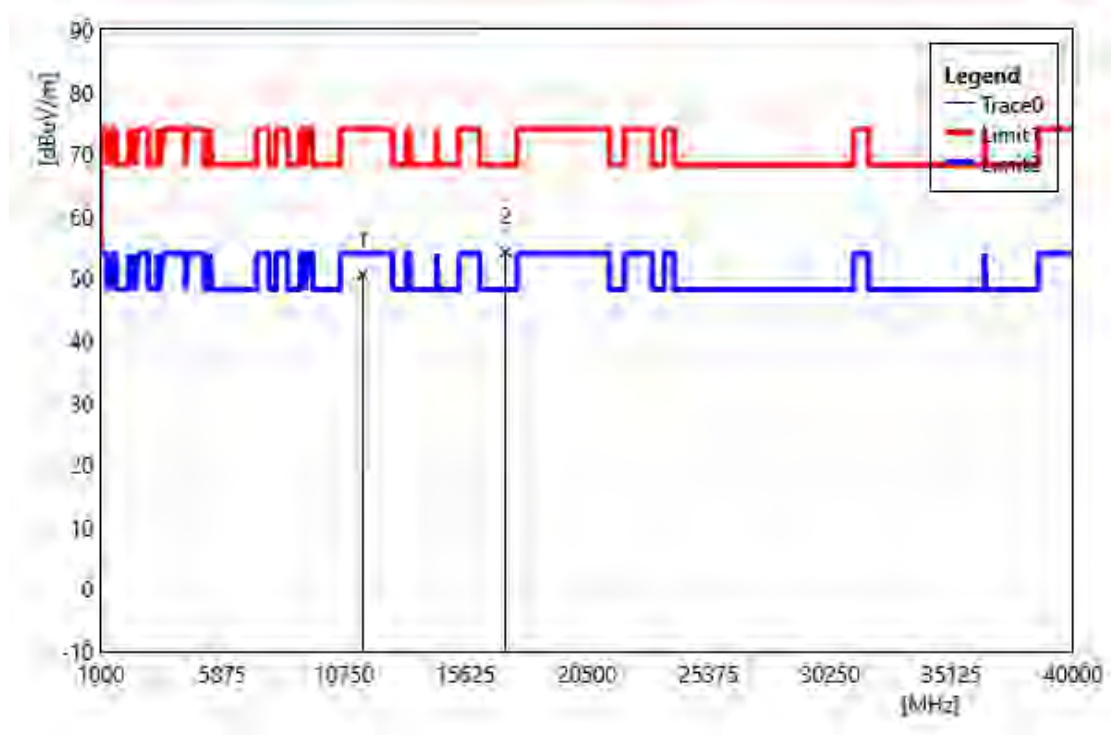


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	36.64	13.96	50.60	74.00	-23.40	PEAK
2	17235.00	35.40	18.88	54.28	68.20	-13.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

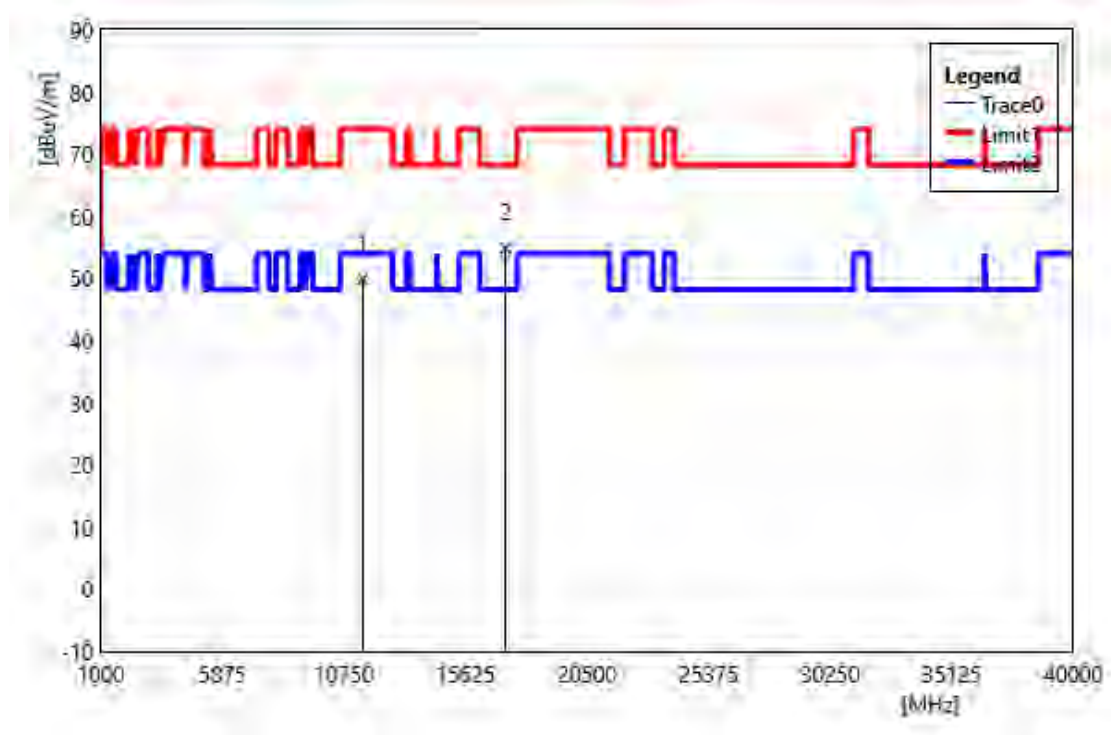


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	35.94	13.96	49.90	74.00	-24.10	PEAK
2	17235.00	36.00	18.88	54.88	68.20	-13.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

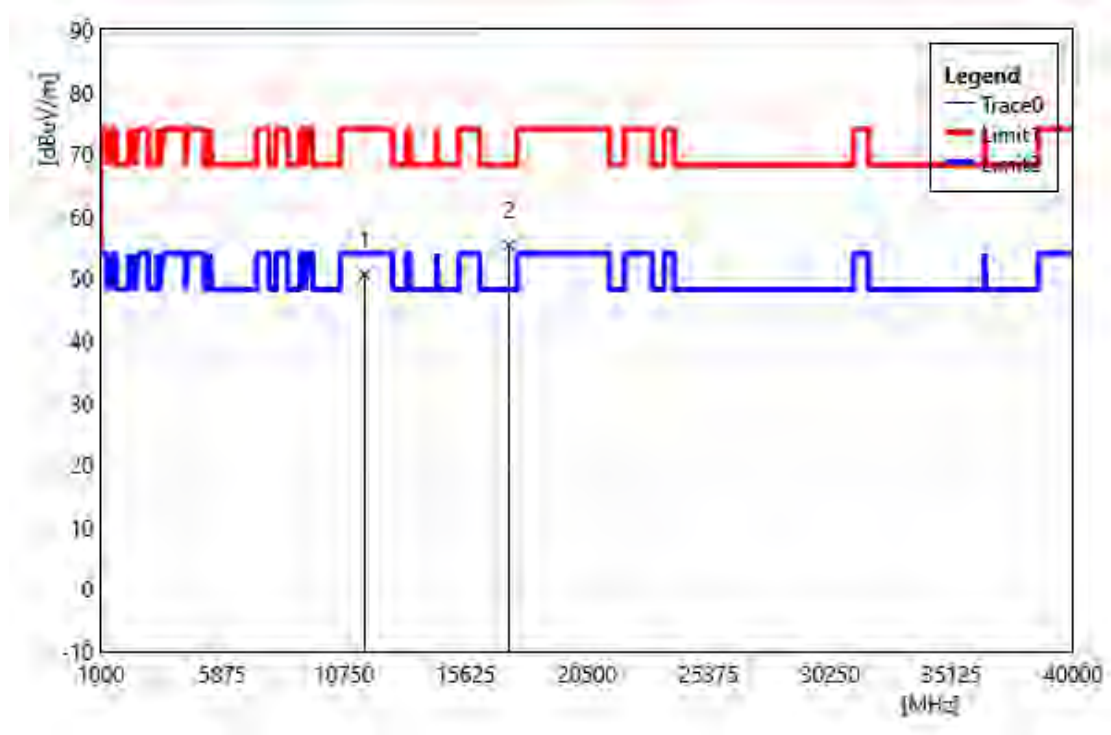


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	36.92	13.67	50.59	74.00	-23.41	PEAK
2	17355.00	35.93	19.45	55.38	68.20	-12.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			

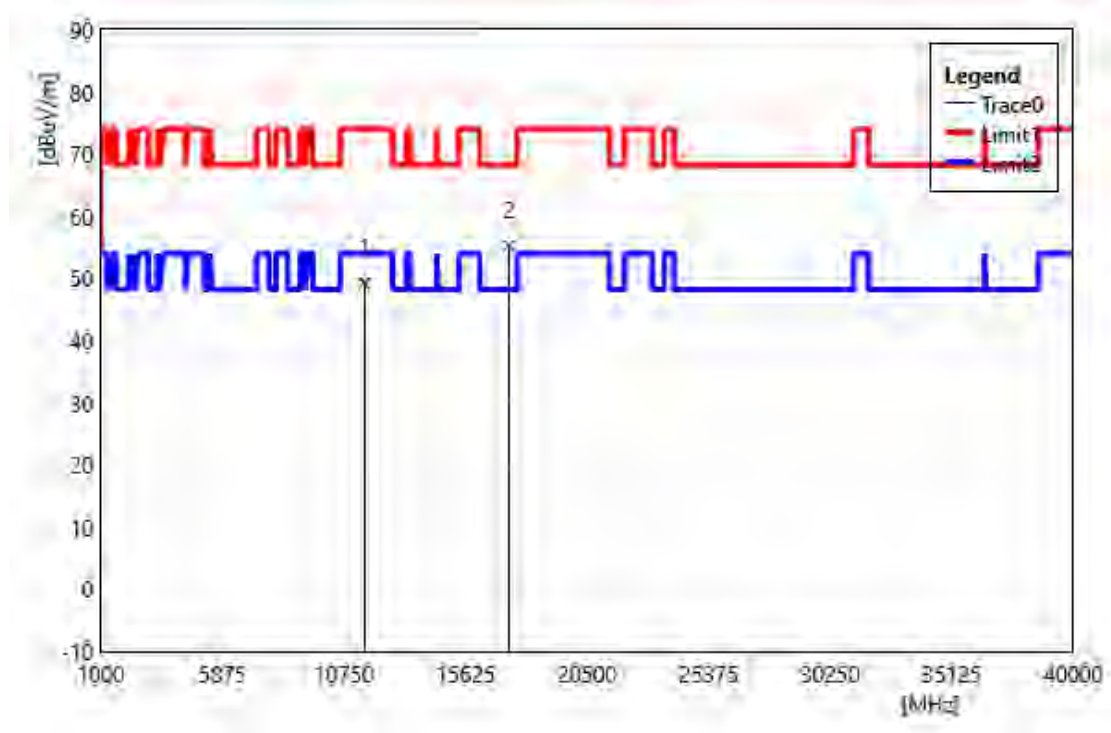


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	35.59	13.67	49.26	74.00	-24.74	PEAK
2	17355.00	35.82	19.45	55.27	68.20	-12.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

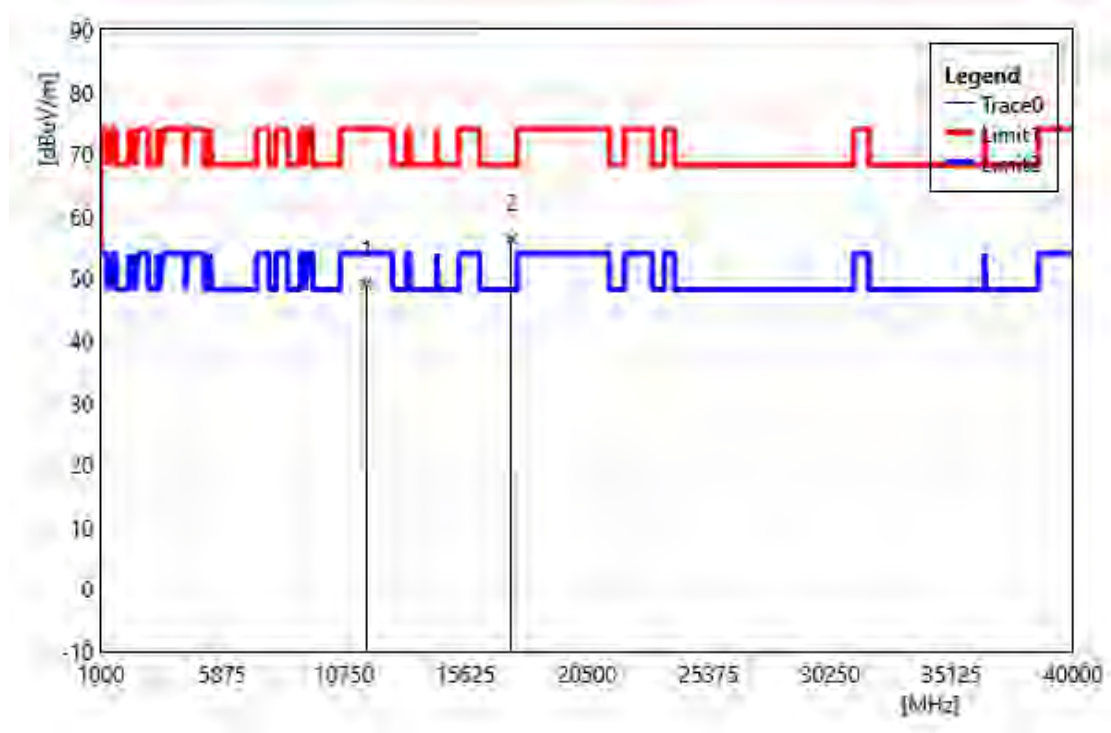


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.70	13.38	49.08	74.00	-24.92	PEAK
2	17475.00	36.26	20.07	56.33	68.20	-11.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

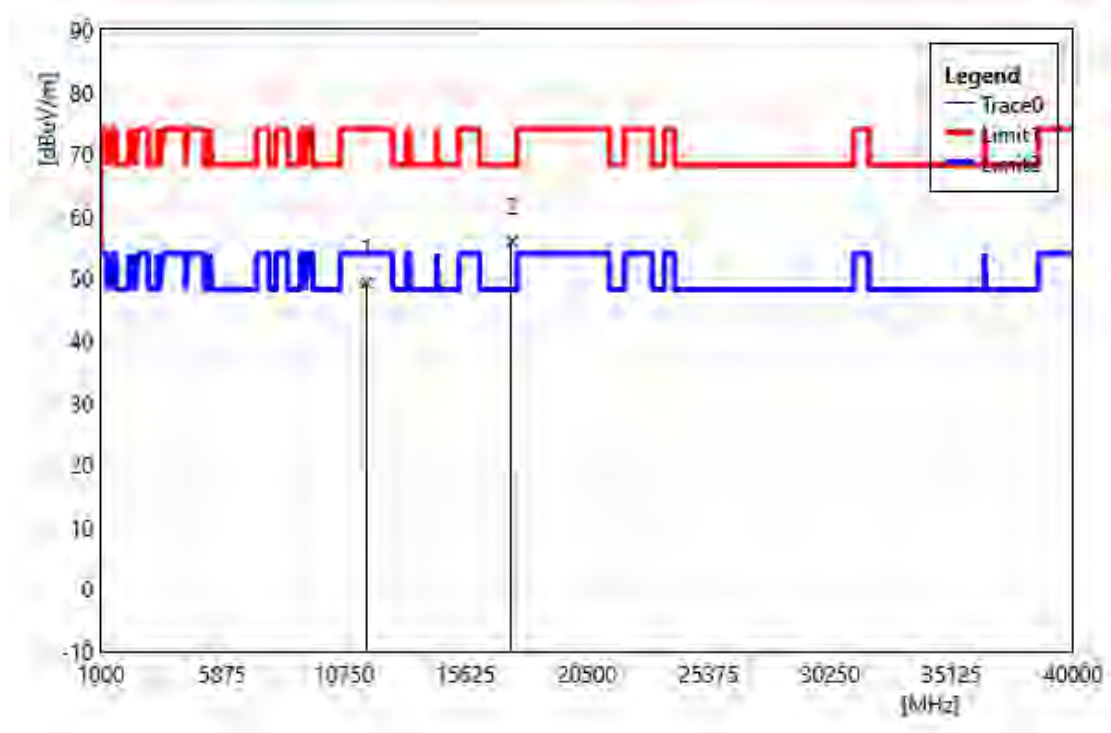


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.86	13.38	49.24	74.00	-24.76	PEAK
2	17475.00	35.88	20.07	55.95	68.20	-12.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

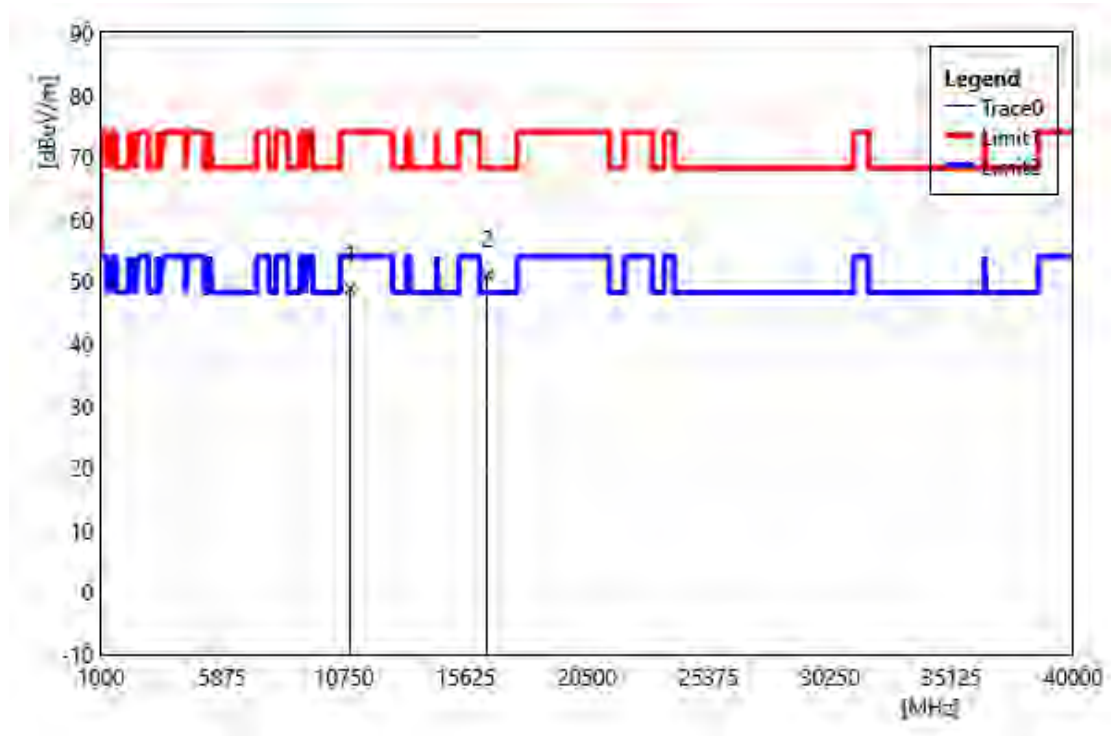


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.91	12.94	48.85	74.00	-25.15	PEAK
2	16500.00	35.35	15.66	51.02	68.20	-17.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Horizontal		
Remark:			

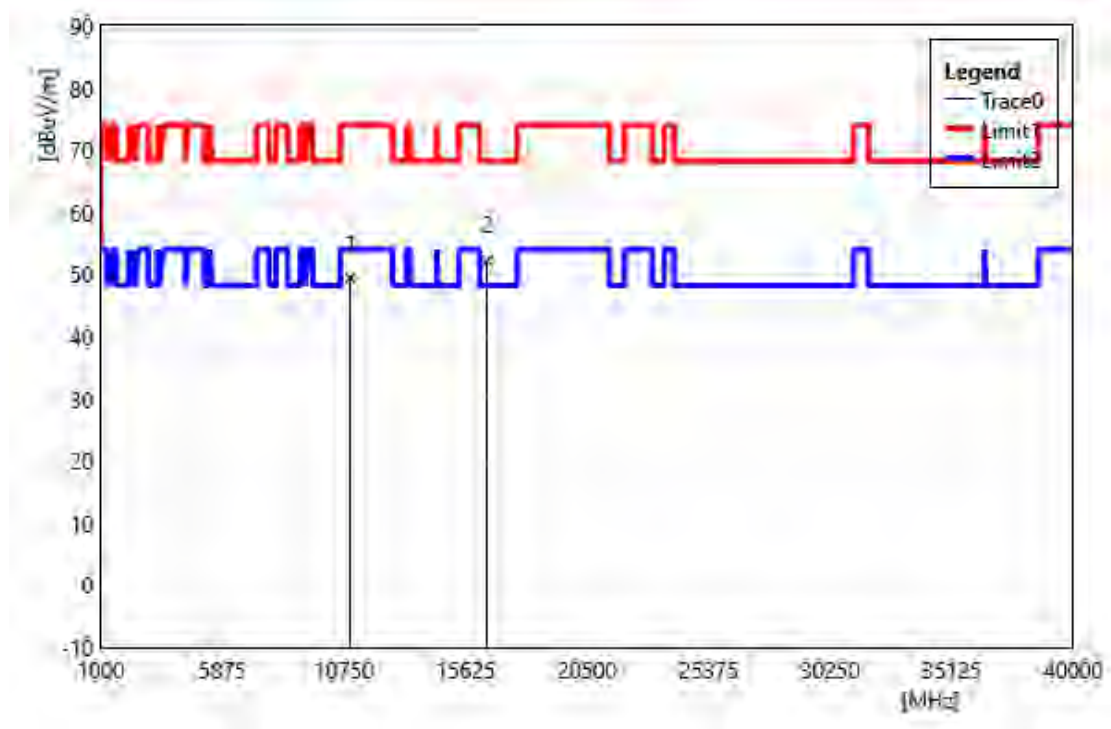


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	36.47	12.94	49.41	74.00	-24.59	PEAK
2	16500.00	36.53	15.66	52.20	68.20	-16.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560 MHz		
Polarization:	Vertical		
Remark:			

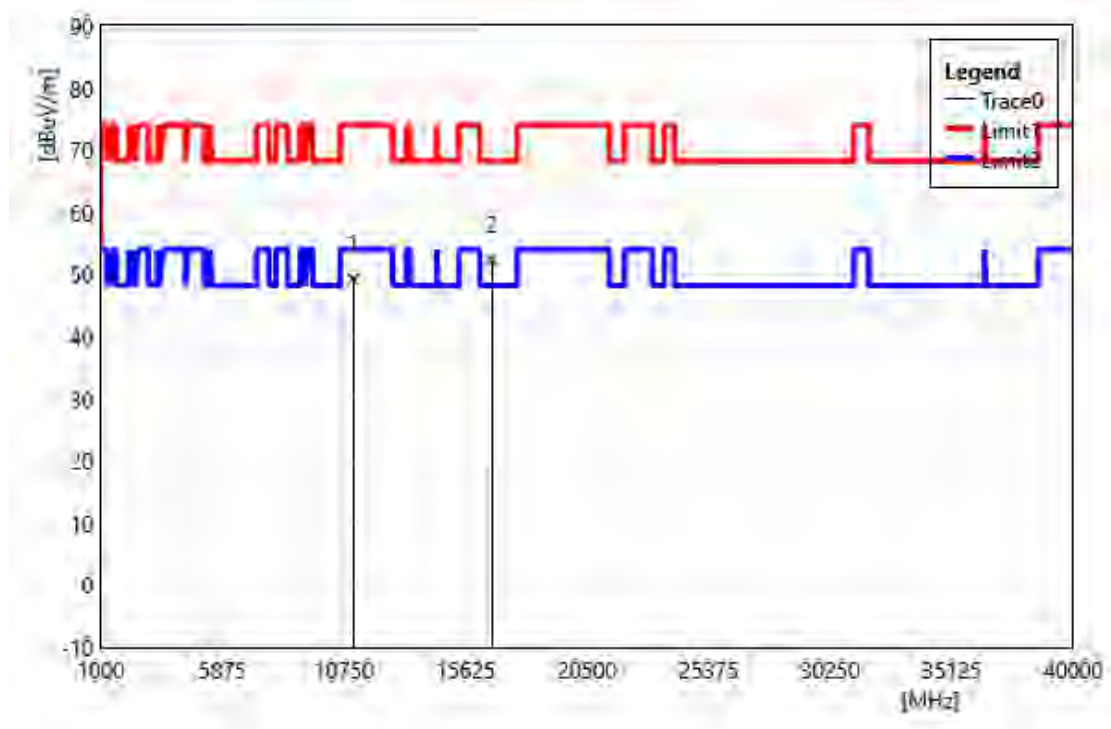


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	35.99	13.29	49.28	74.00	-24.72	PEAK
2	16680.00	35.97	16.39	52.36	68.20	-15.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560 MHz		
Polarization:	Horizontal		
Remark:			

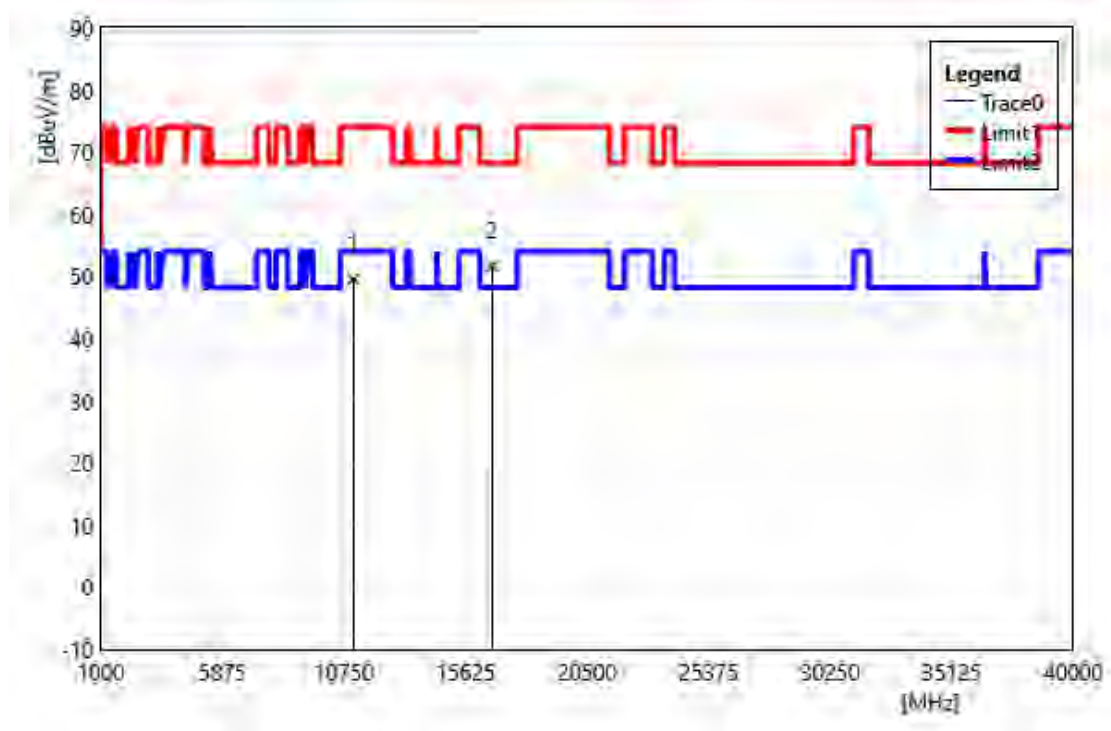


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	36.23	13.29	49.52	74.00	-24.48	PEAK
2	16680.00	35.31	16.39	51.70	68.20	-16.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Vertical		
Remark:			

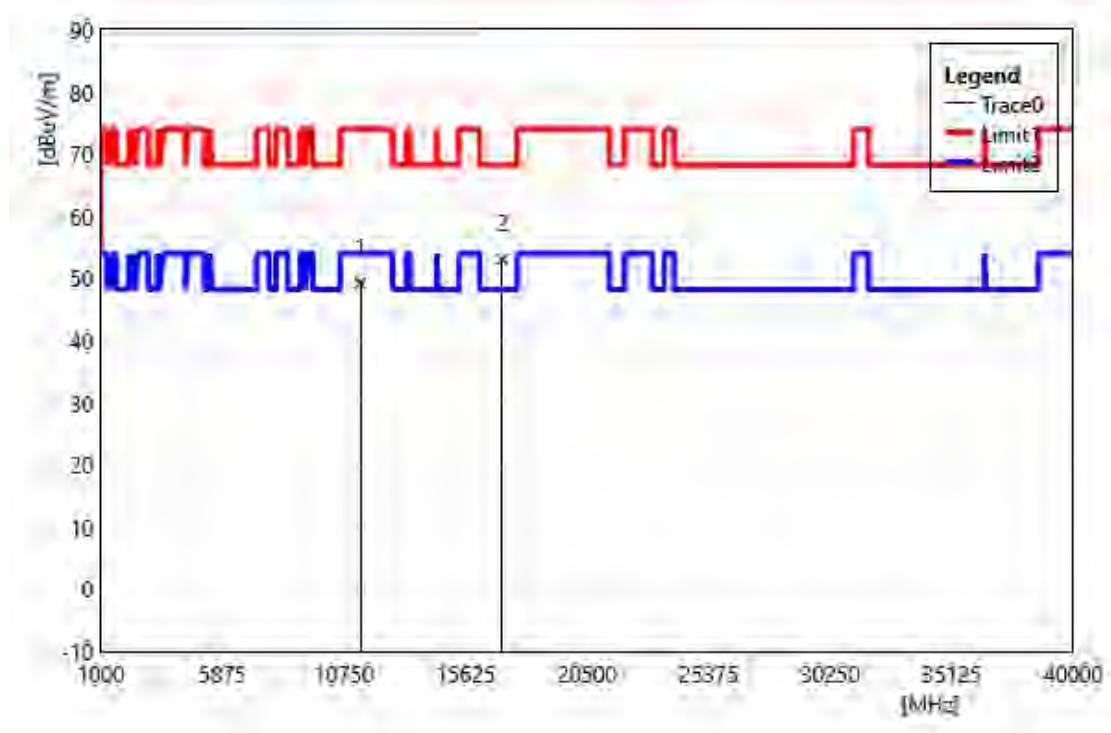


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	35.69	13.51	49.20	74.00	-24.80	PEAK
2	17100.00	35.09	17.98	53.06	68.20	-15.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

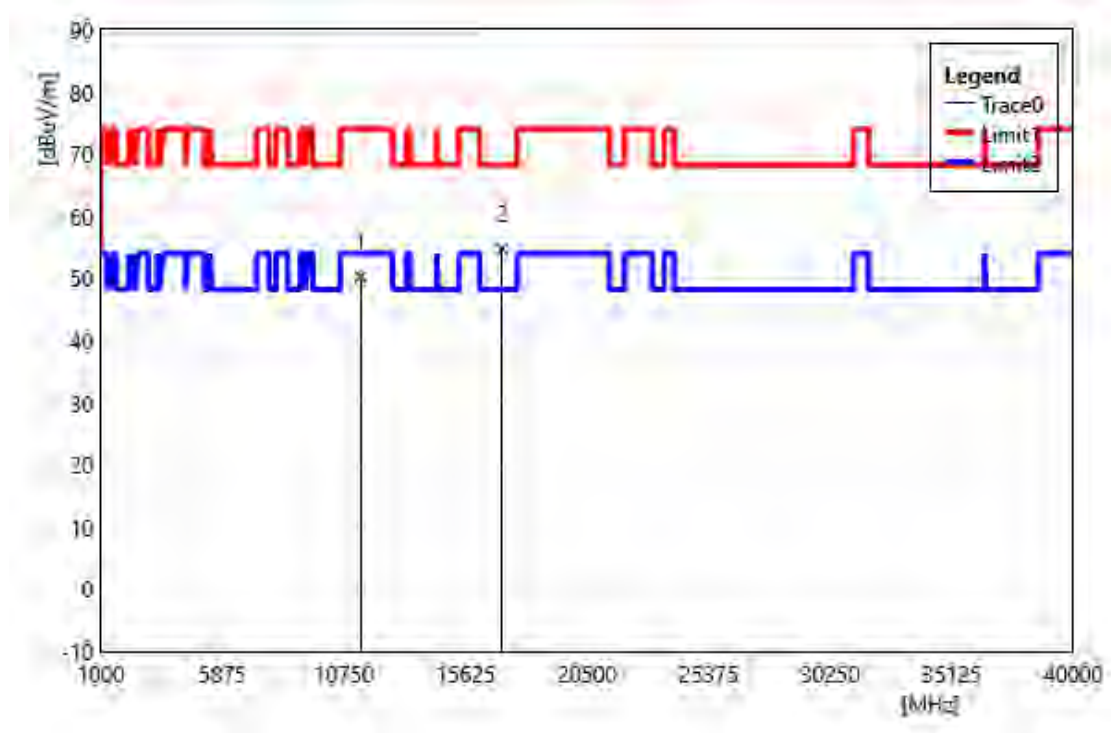


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	36.74	13.51	50.26	74.00	-23.74	PEAK
2	17100.00	36.78	17.98	54.75	68.20	-13.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

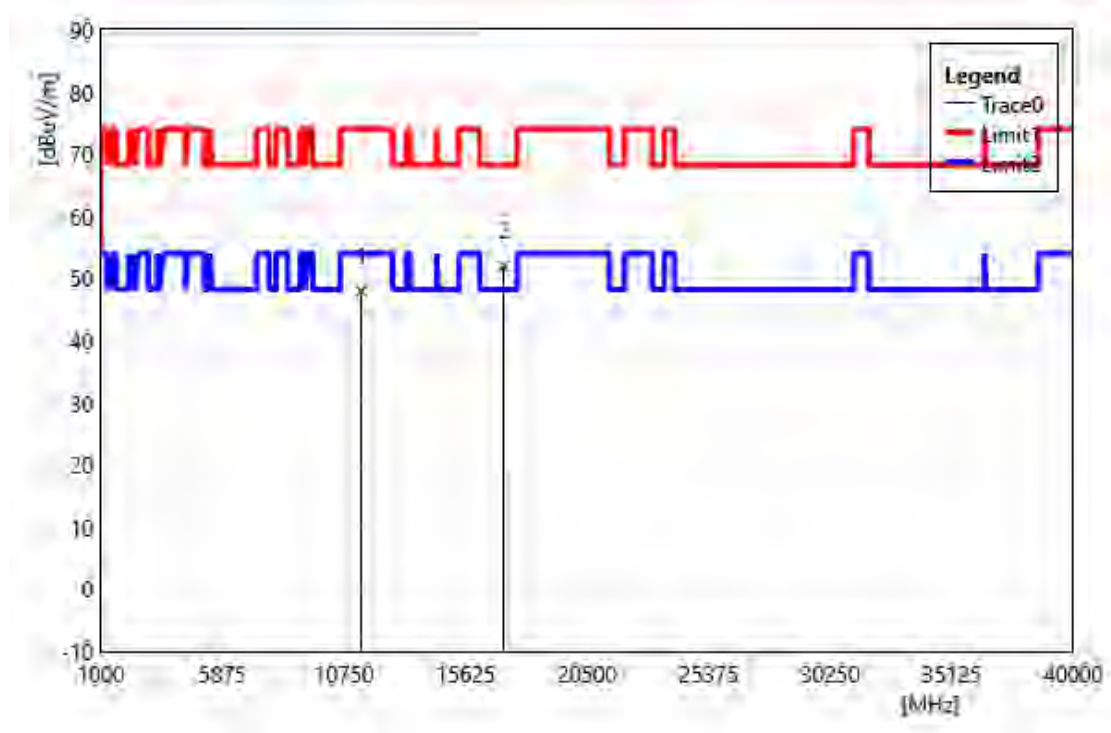


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	35.40	12.56	47.96	74.00	-26.04	PEAK
2	17160.00	34.28	17.69	51.97	68.20	-16.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

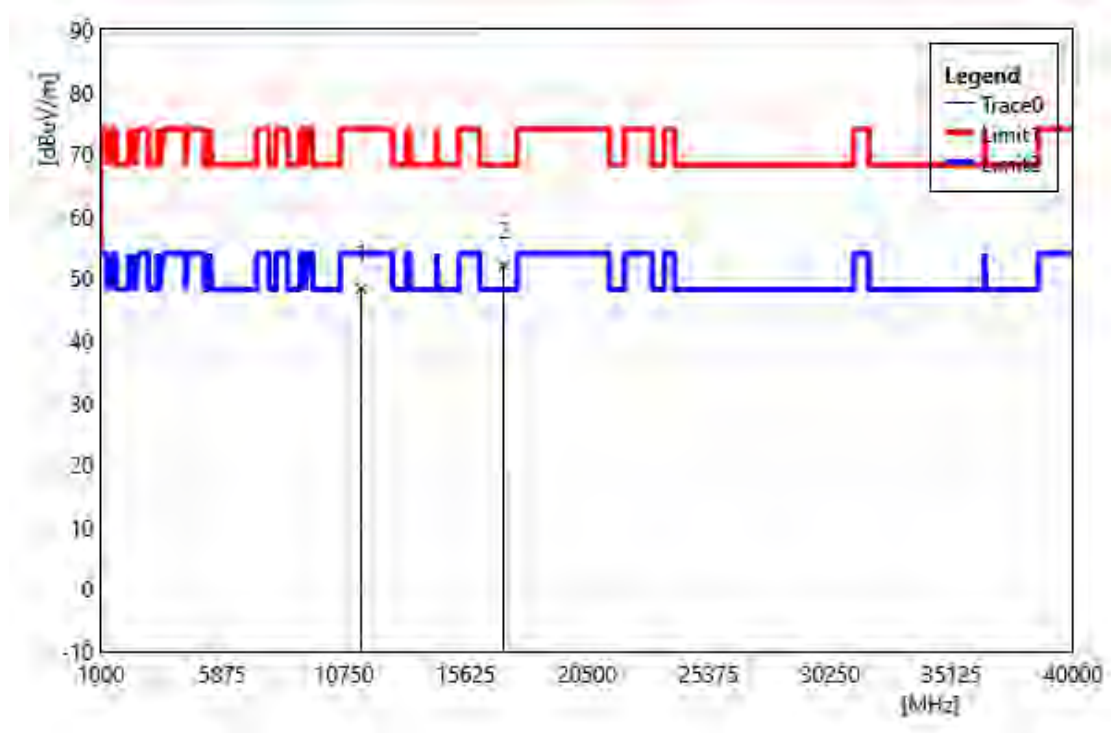


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	35.77	12.56	48.33	74.00	-25.67	PEAK
2	17160.00	34.41	17.69	52.10	68.20	-16.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745 MHz		
Polarization:	Vertical		
Remark:			

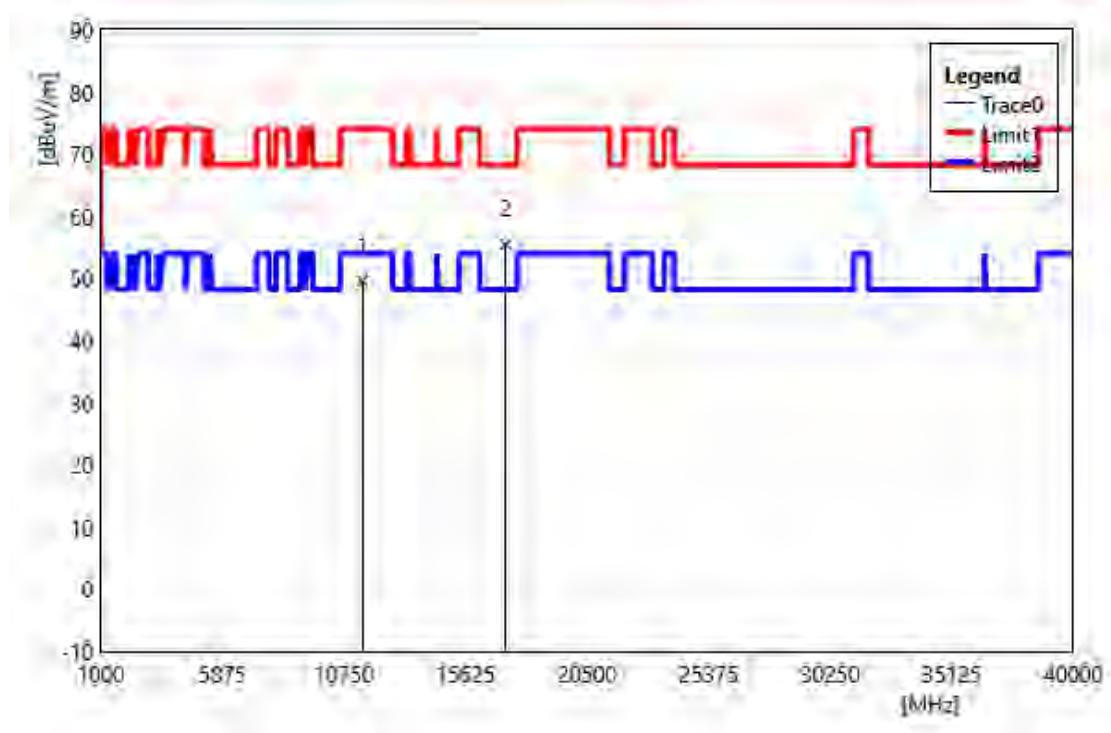


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	35.64	13.96	49.60	74.00	-24.40	PEAK
2	17235.00	36.58	18.88	55.46	68.20	-12.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

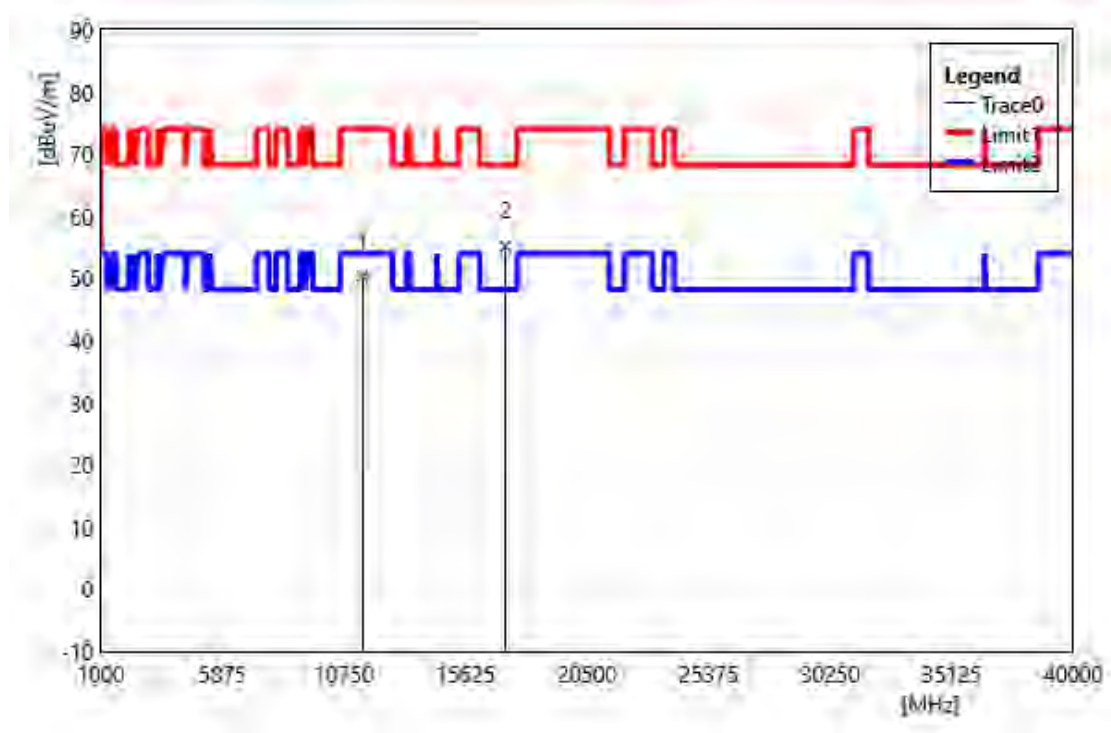


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	36.37	13.96	50.33	74.00	-23.67	PEAK
2	17235.00	36.28	18.88	55.16	68.20	-13.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

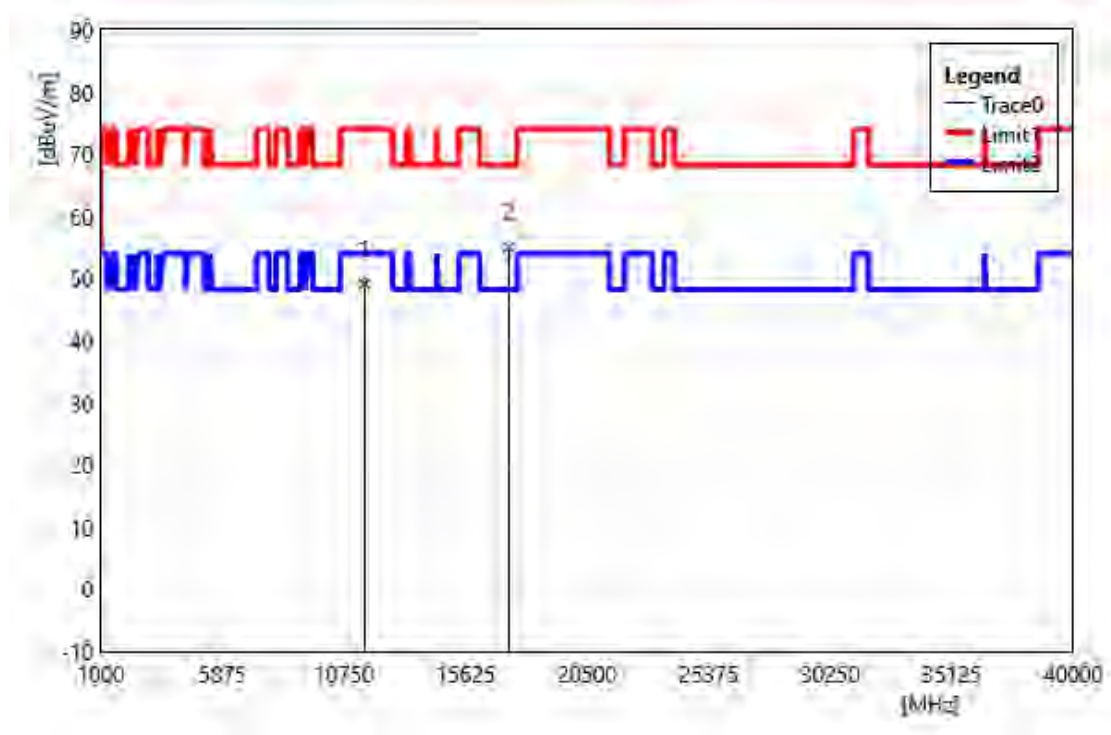


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	35.47	13.67	49.14	74.00	-24.86	PEAK
2	17355.00	35.58	19.45	55.03	68.20	-13.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

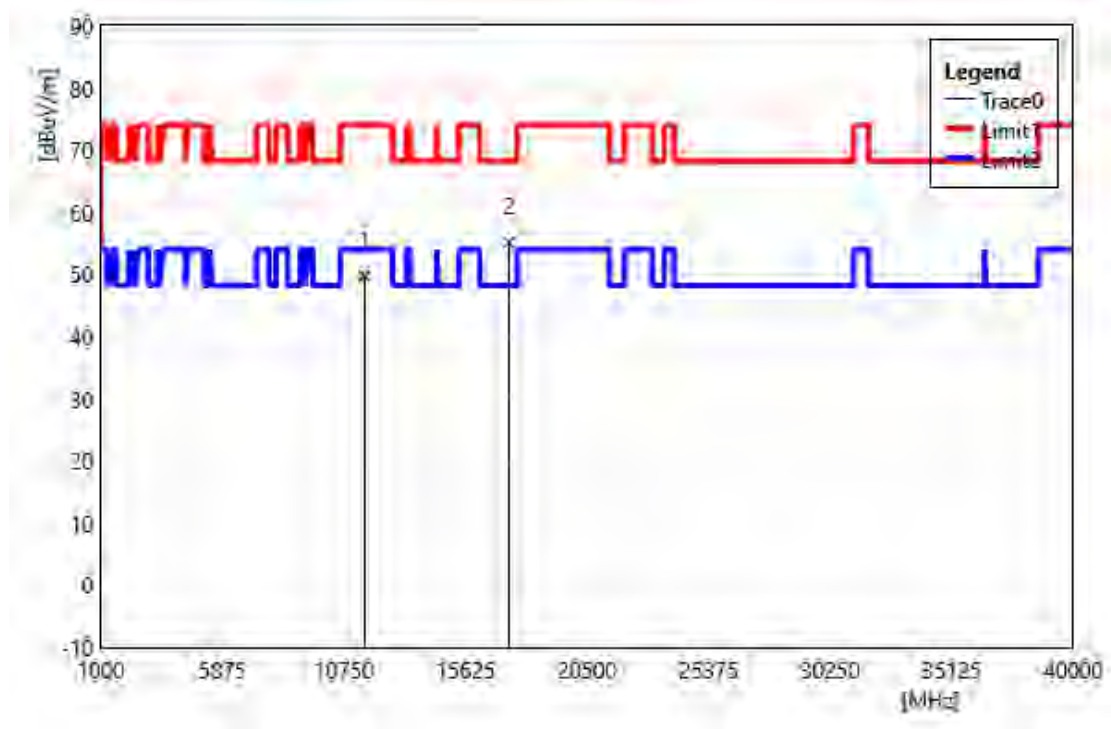


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	36.14	13.67	49.81	74.00	-24.19	PEAK
2	17355.00	35.72	19.45	55.17	68.20	-13.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825 MHz		
Polarization:	Vertical		
Remark:			

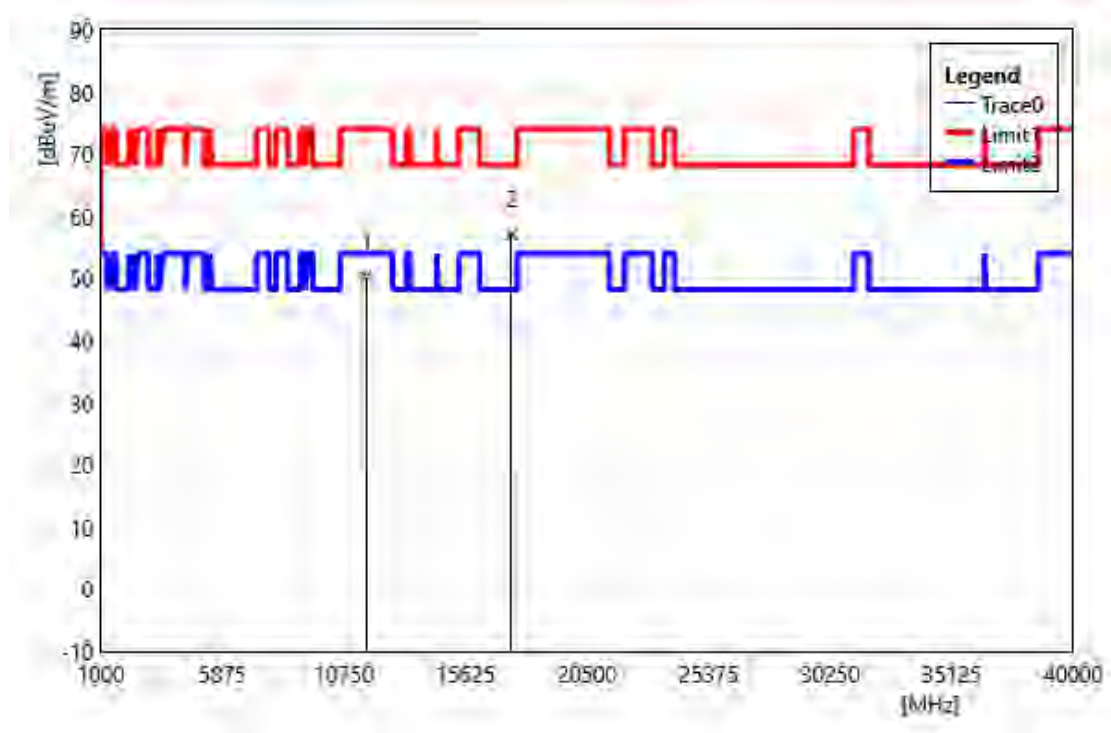


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	36.90	13.38	50.28	74.00	-23.72	PEAK
2	17475.00	36.91	20.07	56.98	68.20	-11.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

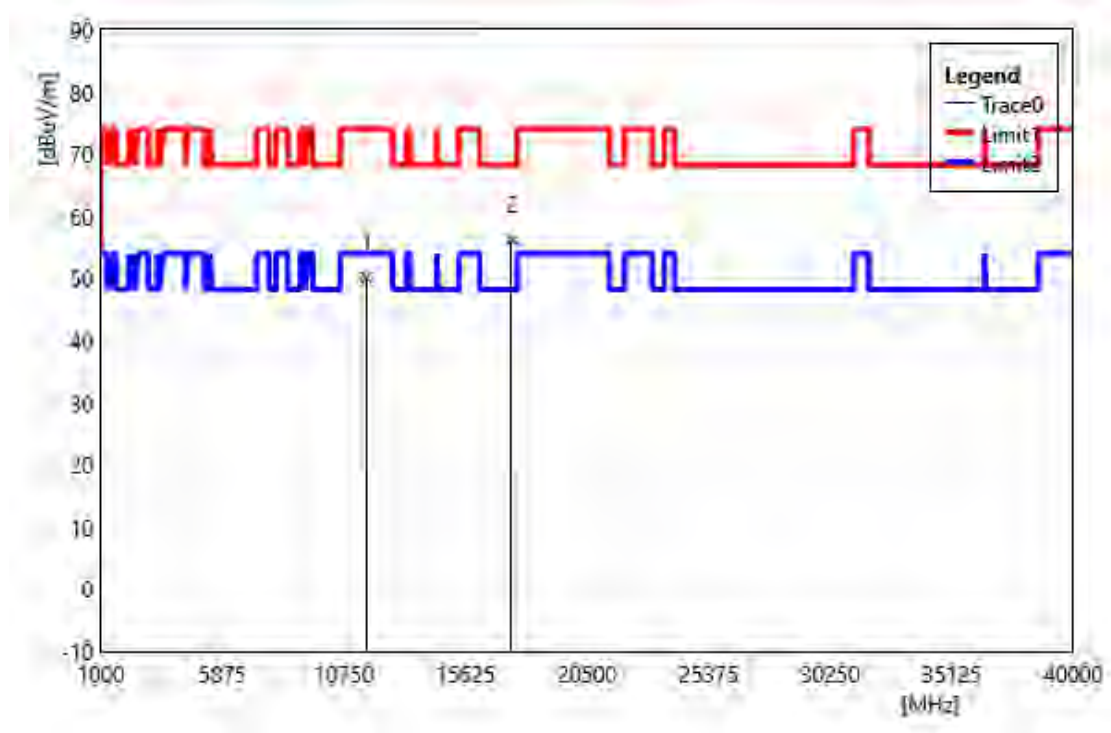


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	36.77	13.38	50.15	74.00	-23.85	PEAK
2	17475.00	36.16	20.07	56.23	68.20	-11.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510 MHz		
Polarization:	Vertical		
Remark:			

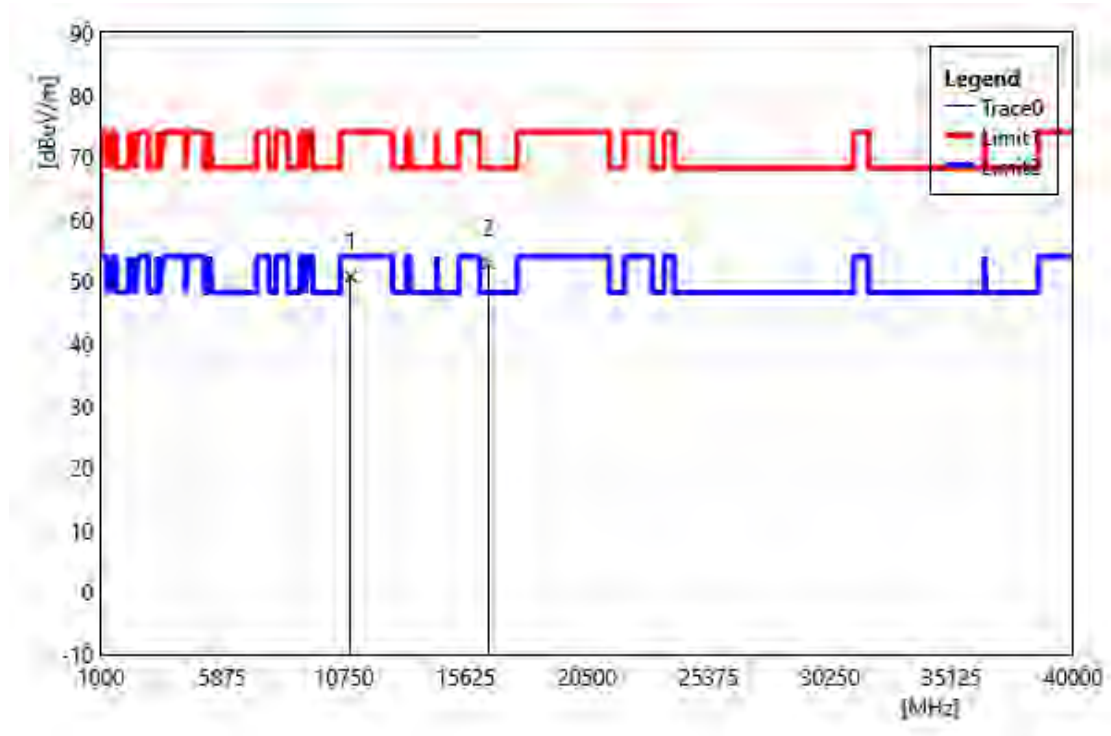


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	37.71	13.01	50.72	74.00	-23.28	PEAK
2	16530.00	37.07	15.81	52.88	68.20	-15.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510 MHz		
Polarization:	Horizontal		
Remark:			

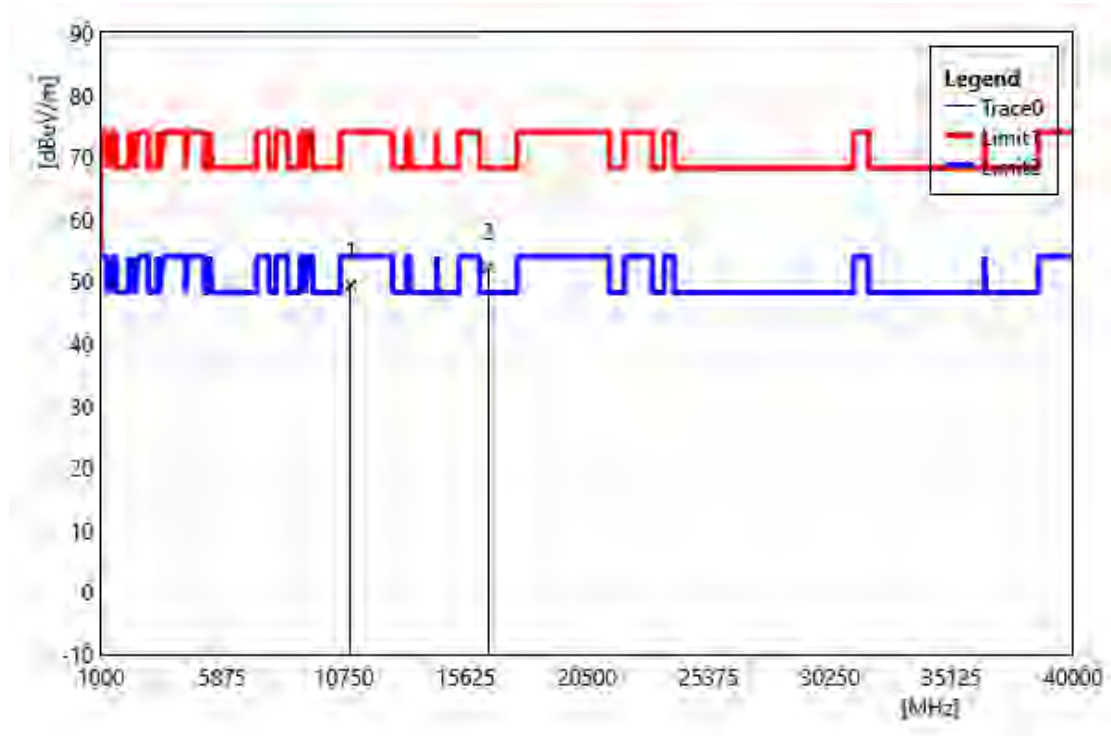


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	36.36	13.01	49.37	74.00	-24.63	PEAK
2	16530.00	36.44	15.81	52.25	68.20	-15.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Vertical		
Remark:			

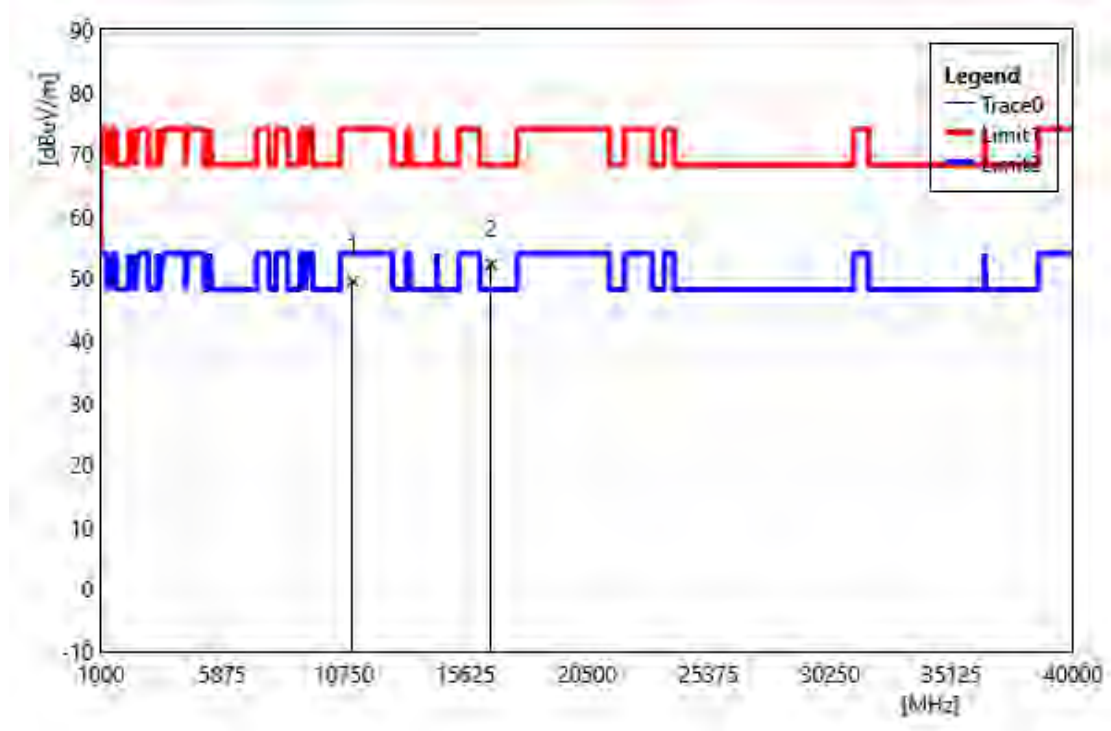


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	36.18	13.33	49.51	74.00	-24.49	PEAK
2	16650.00	35.95	16.30	52.25	68.20	-15.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Horizontal		
Remark:			

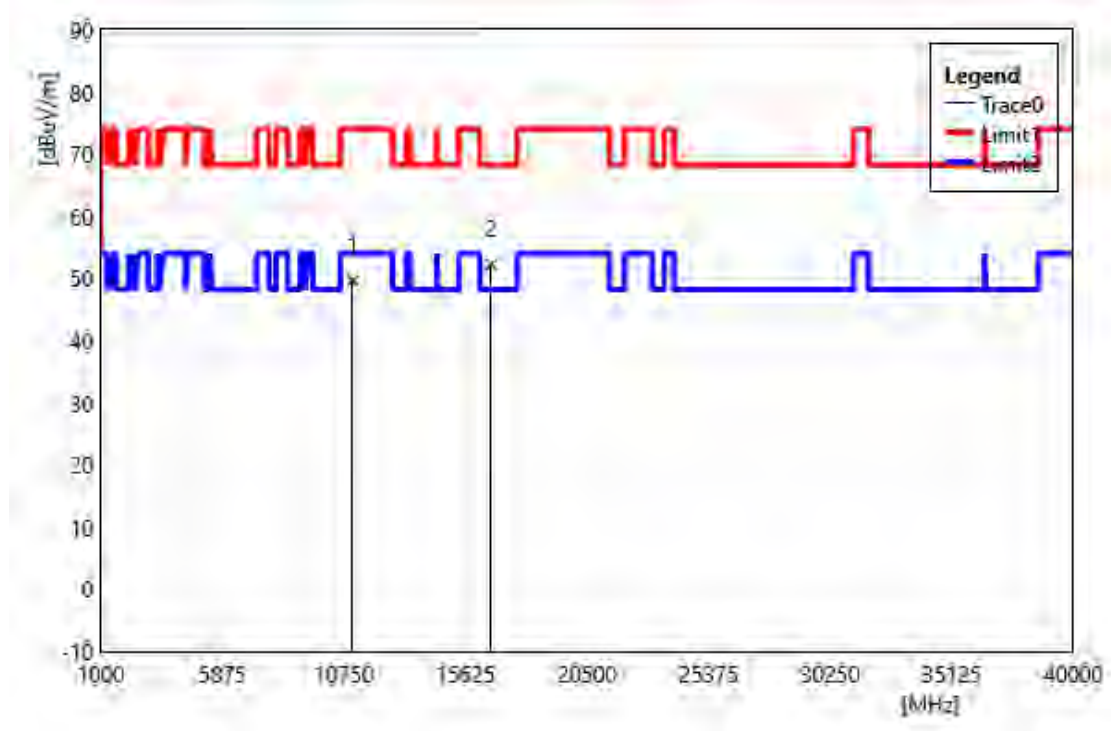


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	36.34	13.33	49.67	74.00	-24.33	PEAK
2	16650.00	35.92	16.30	52.22	68.20	-15.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670 MHz		
Polarization:	Vertical		
Remark:			

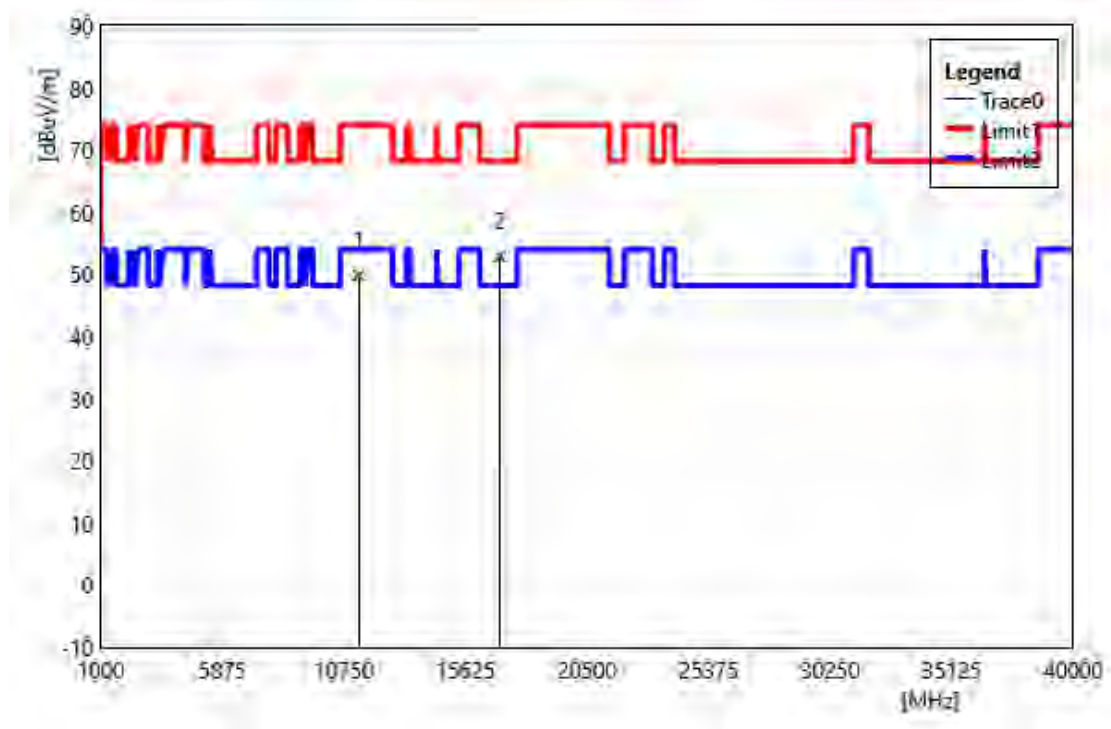


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	36.51	13.34	49.85	74.00	-24.15	PEAK
2	17010.00	35.20	17.67	52.87	68.20	-15.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670 MHz		
Polarization:	Horizontal		
Remark:			

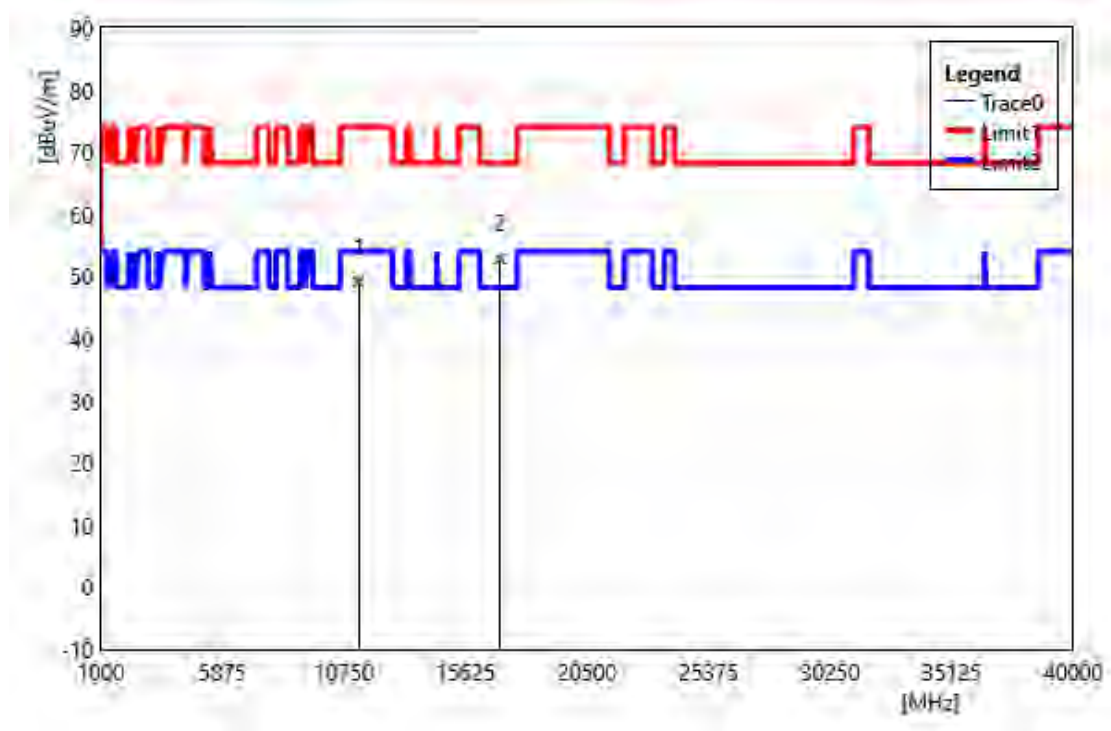


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.76	13.34	49.10	74.00	-24.90	PEAK
2	17010.00	35.14	17.67	52.81	68.20	-15.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Vertical		
Remark:			

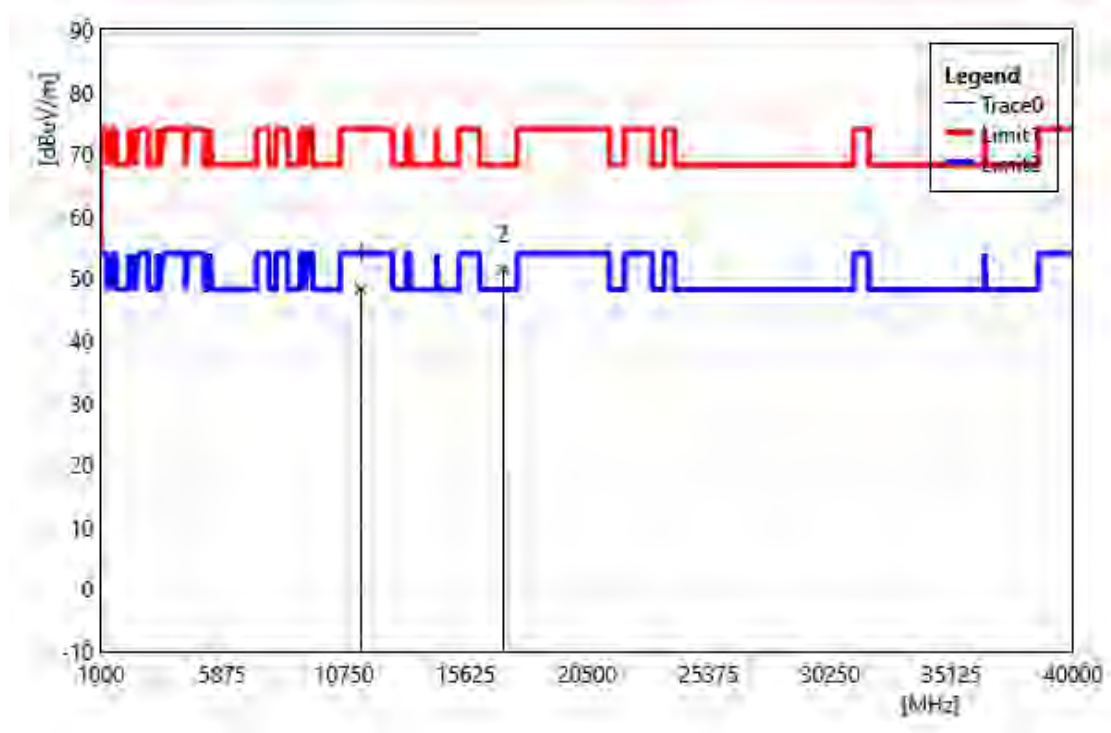


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.88	12.46	48.34	74.00	-25.66	PEAK
2	17130.00	33.99	17.46	51.45	68.20	-16.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Horizontal		
Remark:			

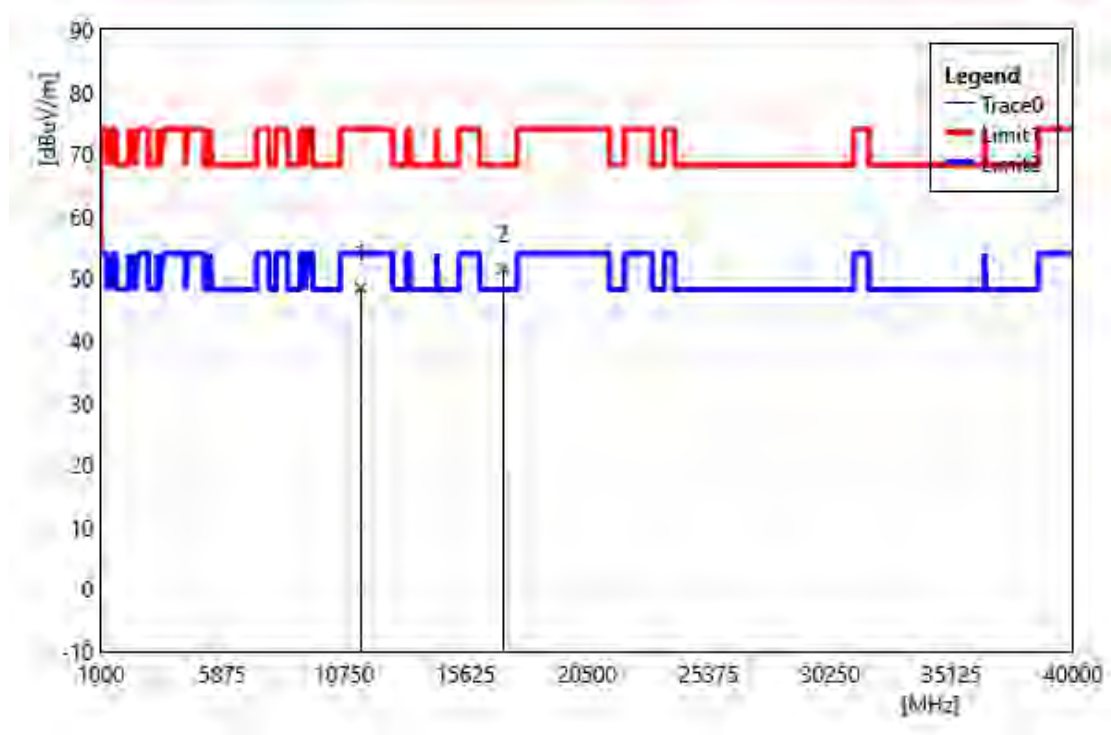


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	36.01	12.46	48.47	74.00	-25.53	PEAK
2	17130.00	34.03	17.46	51.49	68.20	-16.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755 MHz		
Polarization:	Vertical		
Remark:			

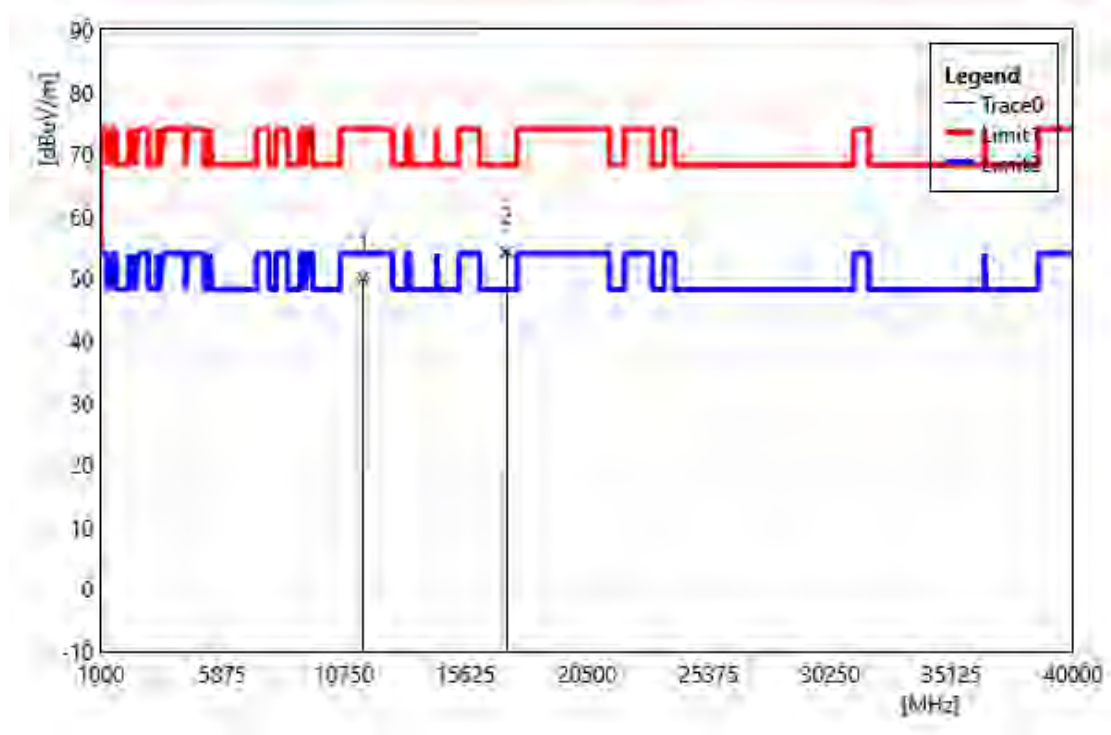


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	36.08	13.96	50.04	74.00	-23.96	PEAK
2	17265.00	35.15	19.11	54.26	68.20	-13.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

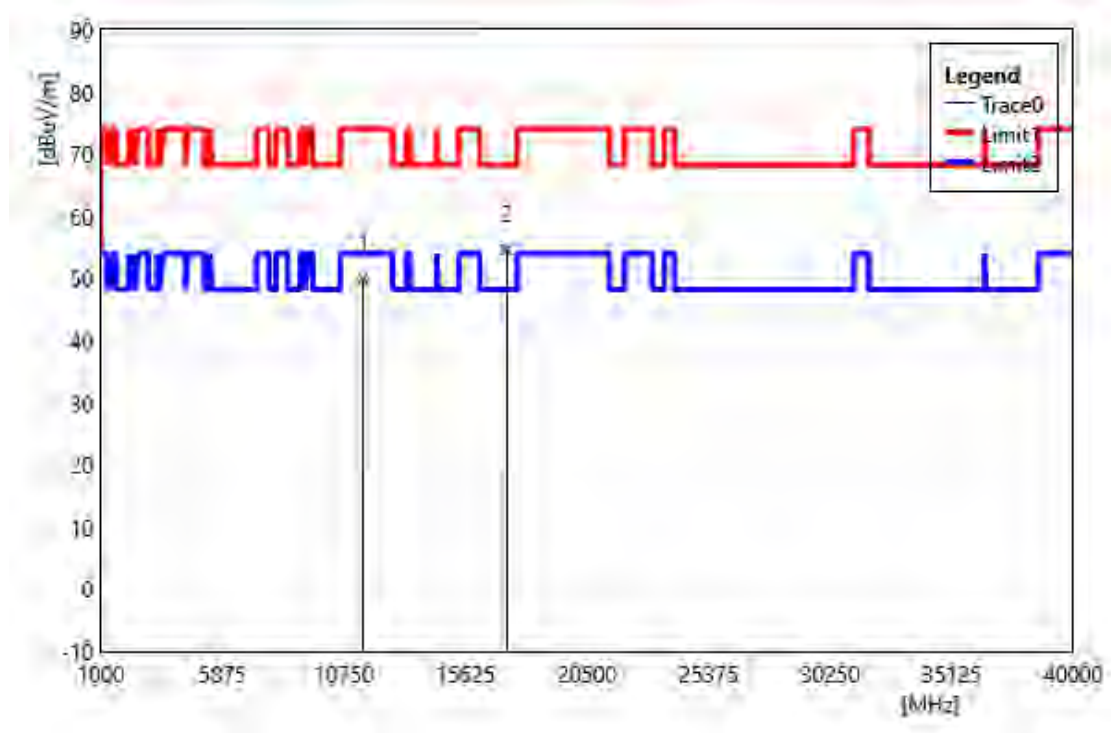


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	36.02	13.96	49.98	74.00	-24.02	PEAK
2	17265.00	35.54	19.11	54.65	68.20	-13.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Vertical		
Remark:			

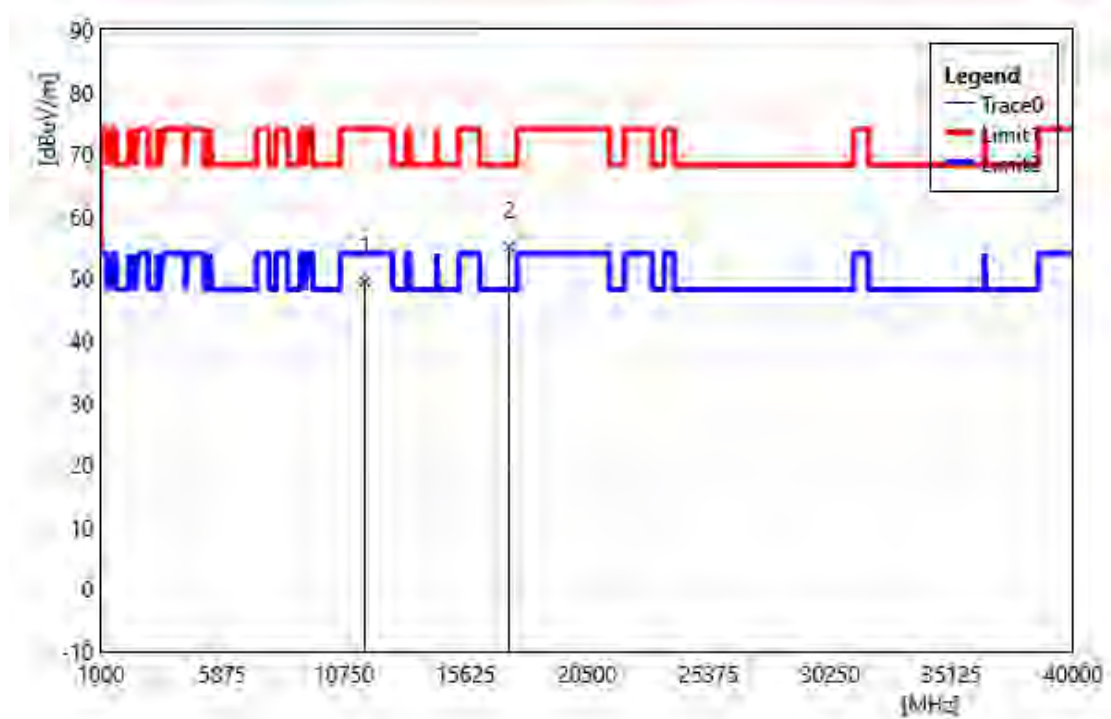


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	35.92	13.57	49.49	74.00	-24.51	PEAK
2	17385.00	35.65	19.49	55.14	68.20	-13.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

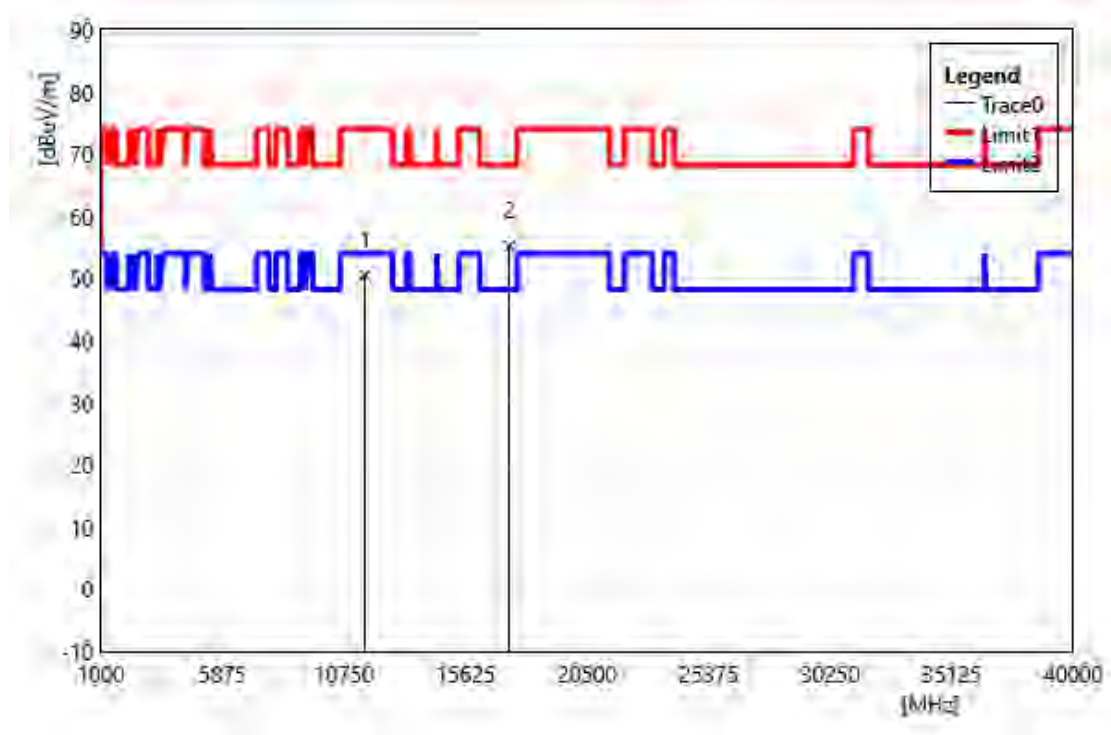


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	36.92	13.57	50.49	74.00	-23.51	PEAK
2	17385.00	35.76	19.49	55.25	68.20	-12.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Vertical		
Remark:			

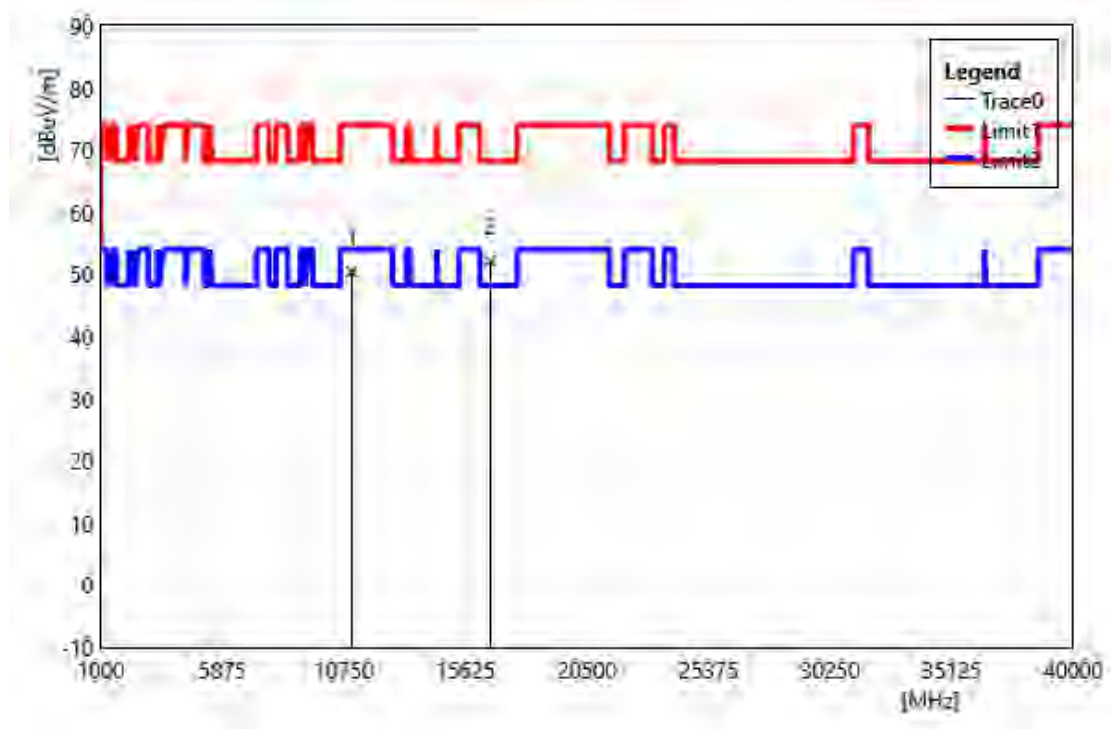


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	37.20	13.17	50.37	74.00	-23.63	PEAK
2	16590.00	36.05	16.11	52.16	68.20	-16.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Horizontal		
Remark:			

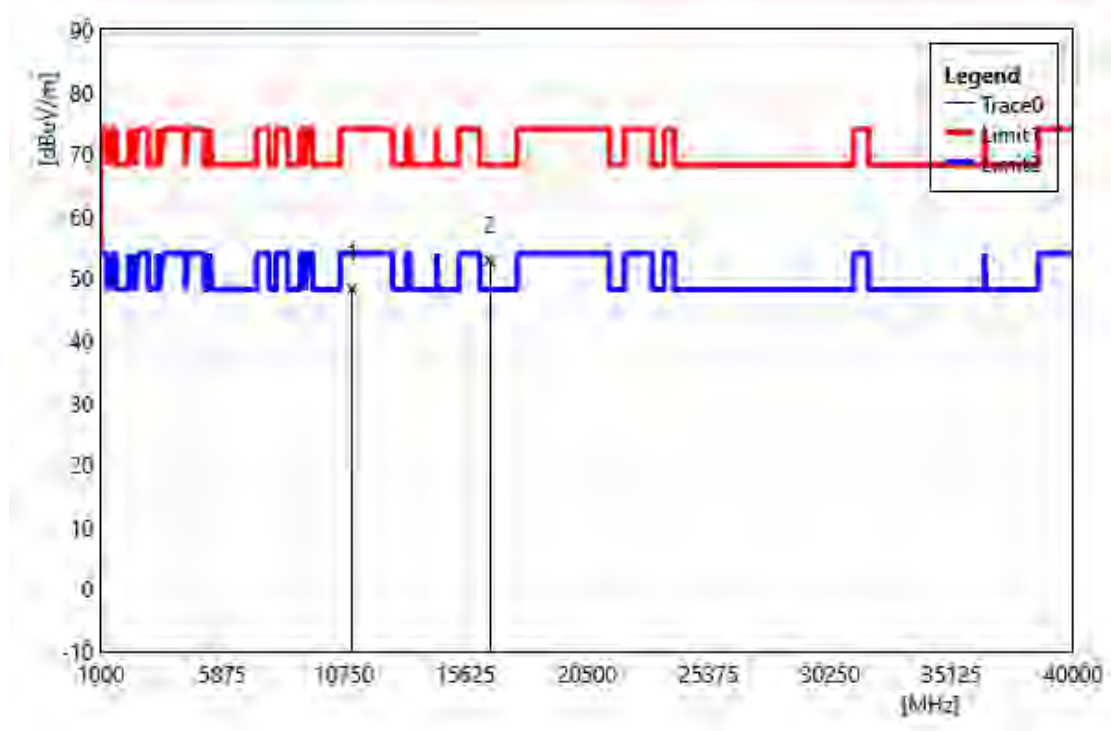


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.14	13.17	48.31	74.00	-25.69	PEAK
2	16590.00	36.79	16.11	52.90	68.20	-15.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Vertical		
Remark:			

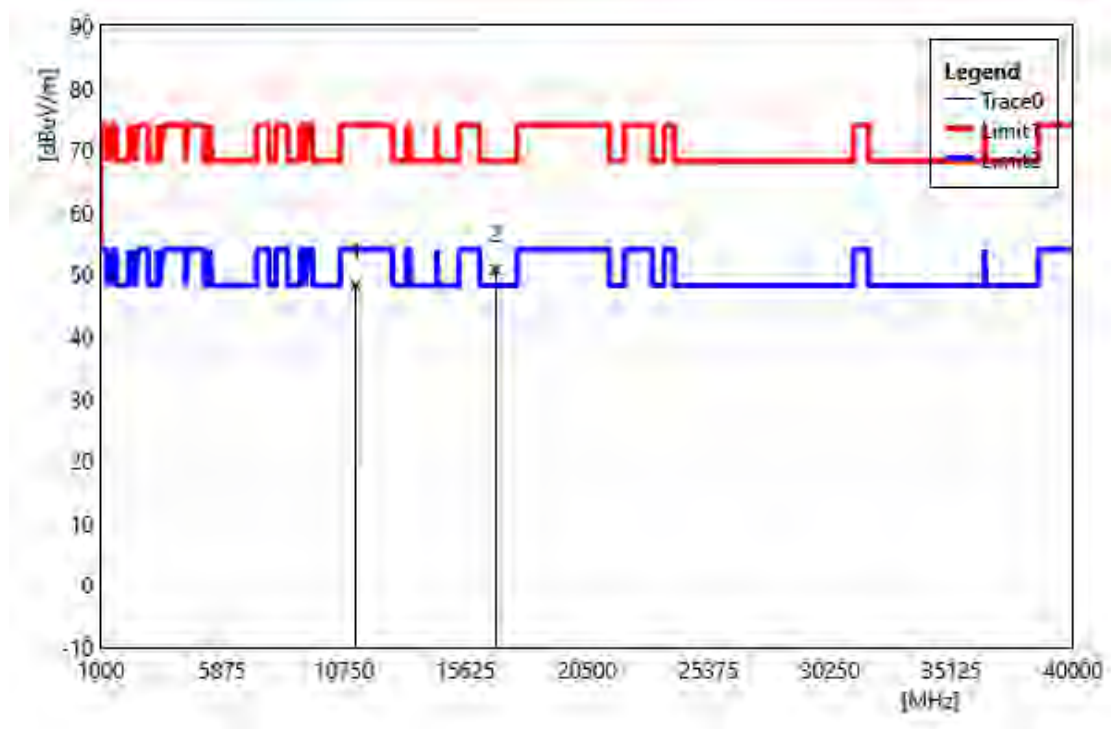


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	36.17	11.99	48.16	74.00	-25.84	PEAK
2	16830.00	34.62	16.14	50.76	68.20	-17.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Horizontal		
Remark:			

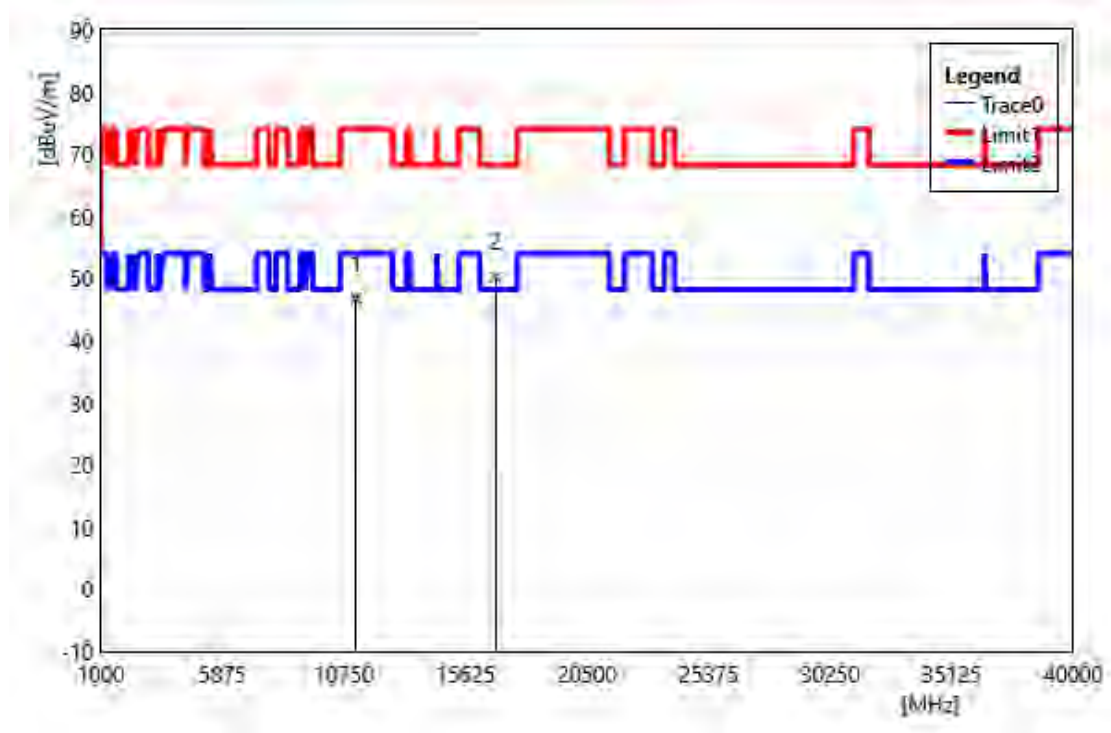


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	34.75	11.99	46.74	74.00	-27.26	PEAK
2	16830.00	34.10	16.14	50.24	68.20	-17.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Vertical		
Remark:			

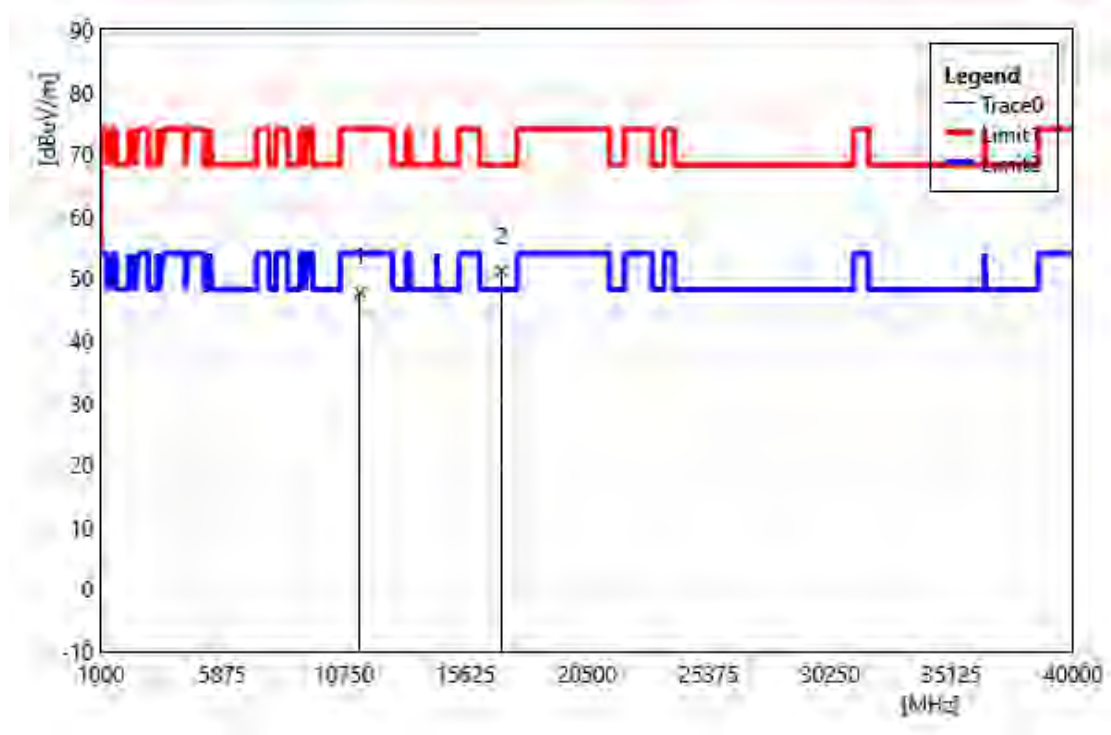


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	35.46	12.30	47.76	74.00	-26.24	PEAK
2	17070.00	34.13	17.09	51.22	68.20	-16.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

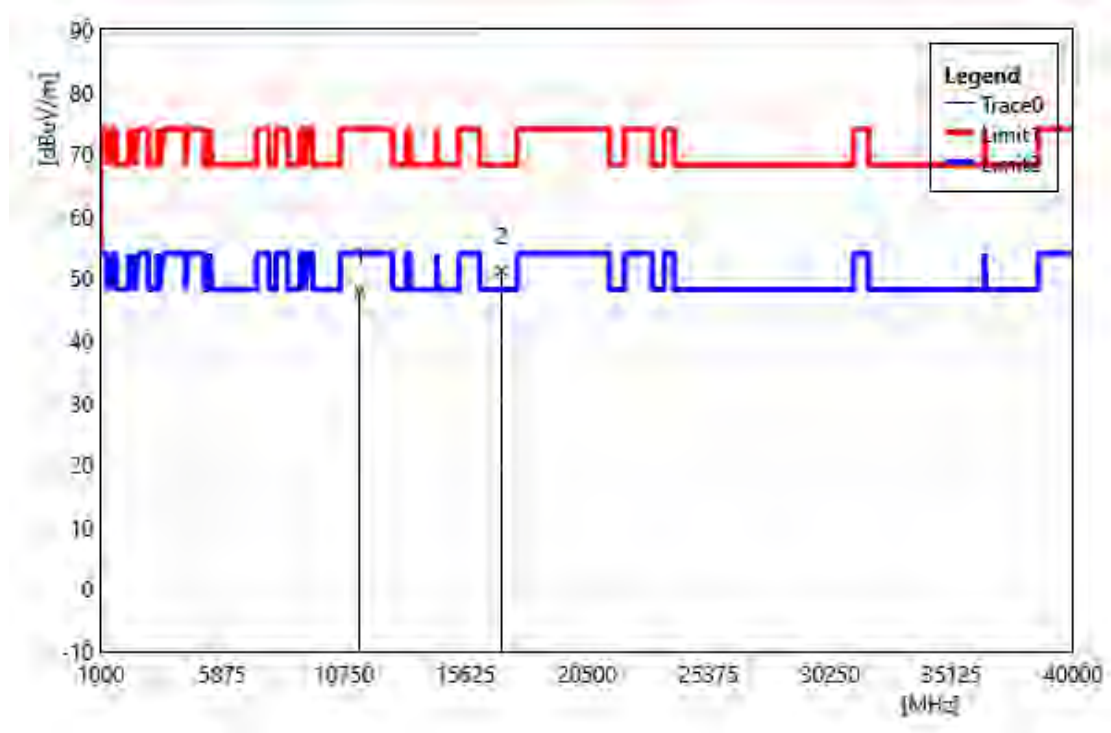


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	35.49	12.30	47.79	74.00	-26.21	PEAK
2	17070.00	34.14	17.09	51.23	68.20	-16.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

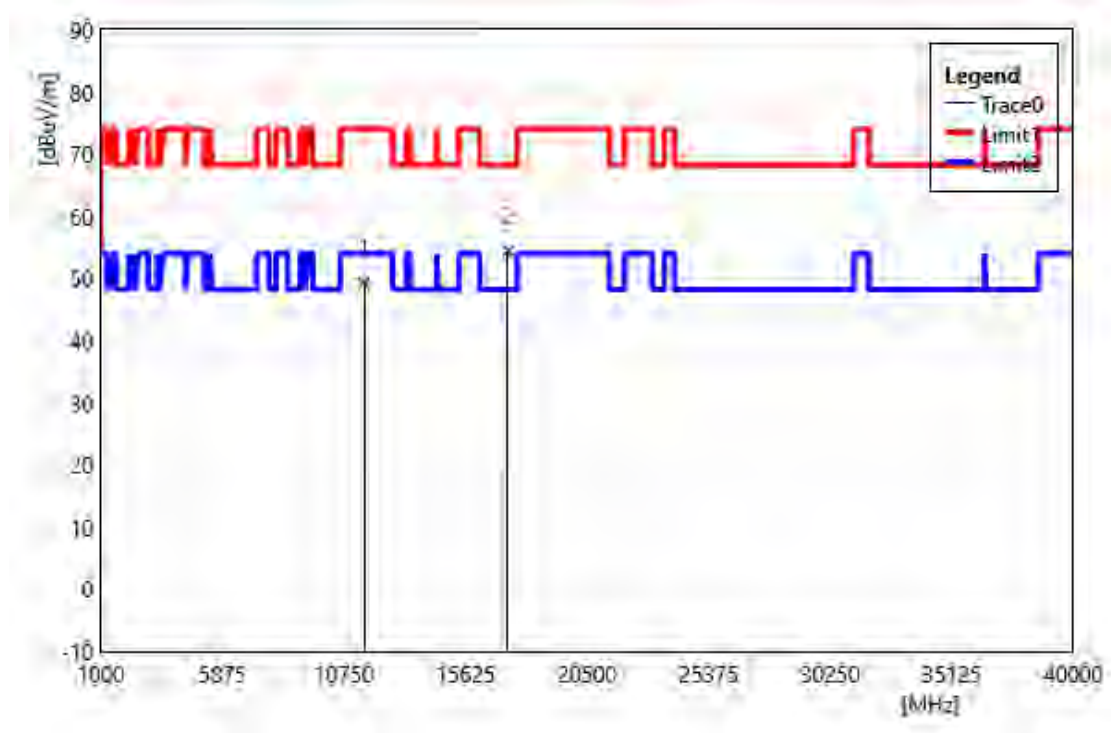


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.45	13.76	49.21	74.00	-24.79	PEAK
2	17325.00	35.07	19.41	54.48	68.20	-13.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

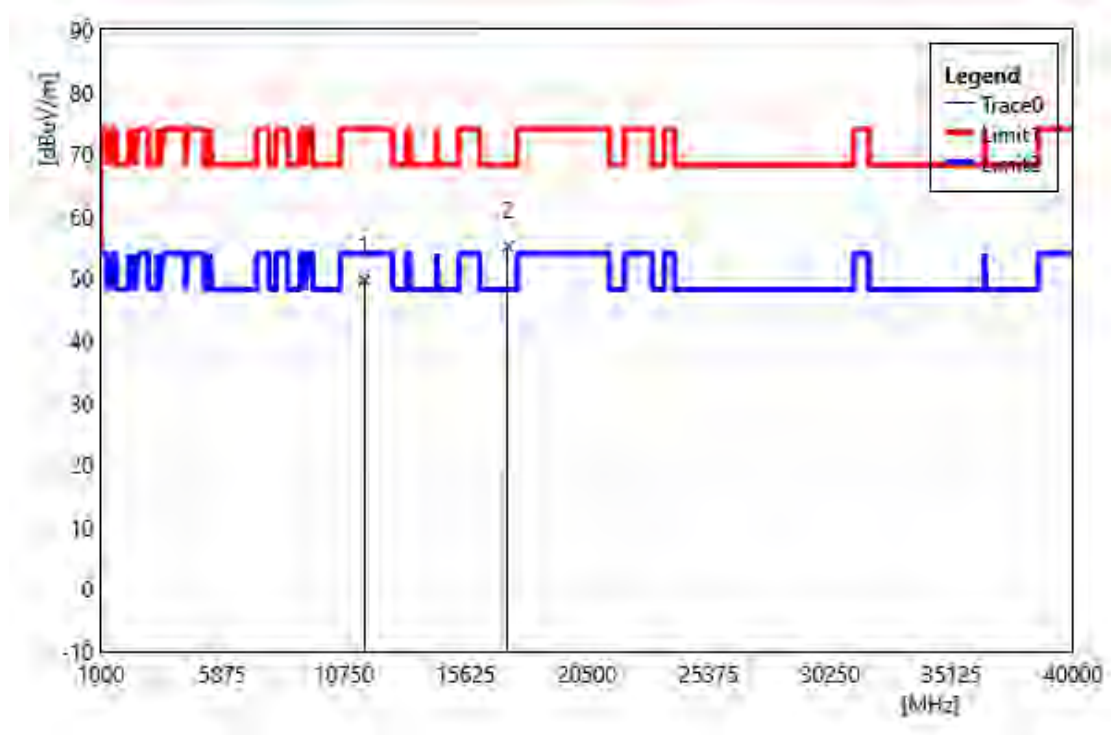


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.98	13.76	49.74	74.00	-24.26	PEAK
2	17325.00	35.73	19.41	55.14	68.20	-13.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

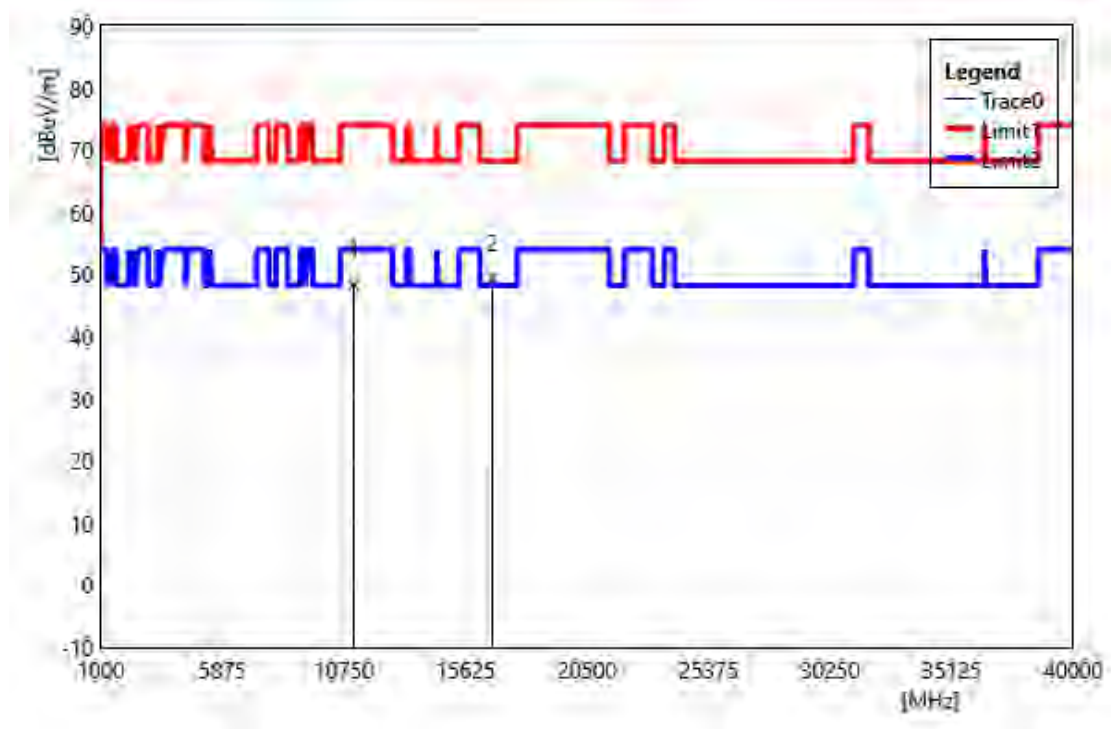

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	36.28	12.10	48.38	74.00	-25.62	PEAK
2	16710.00	33.87	15.49	49.36	68.20	-18.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

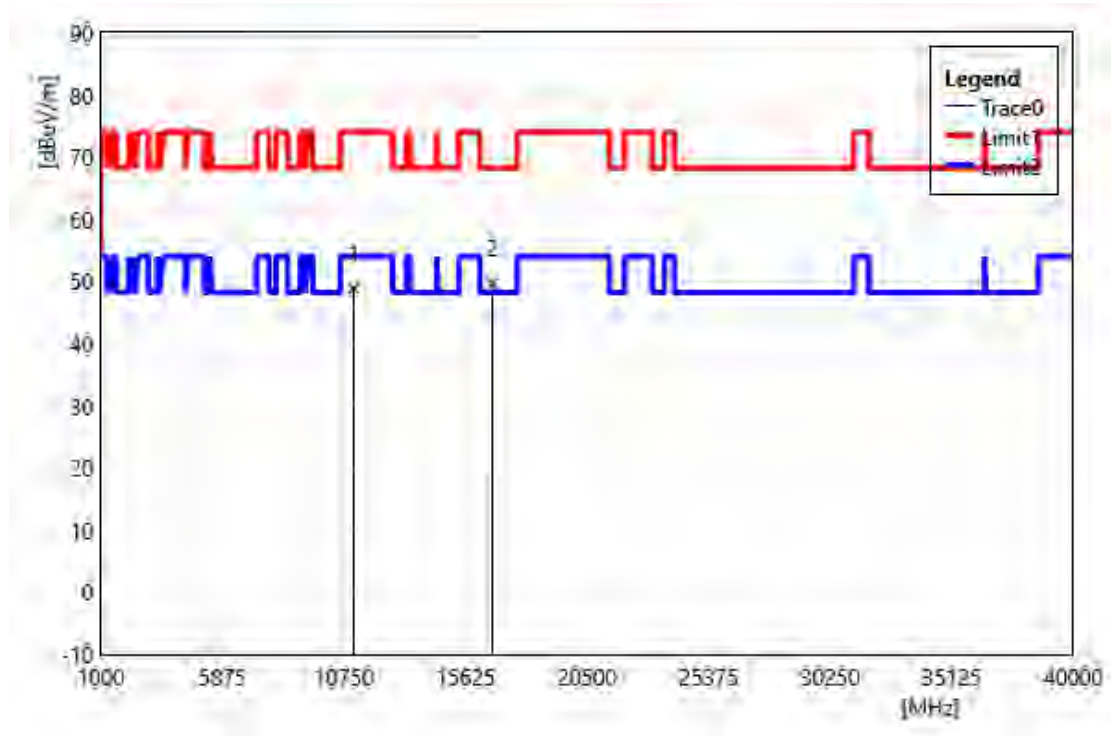


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	36.78	12.10	48.88	74.00	-25.12	PEAK
2	16710.00	34.18	15.49	49.67	68.20	-18.53	PEAK

Band Edge


Peak + Average

Test Site: 966 Chamber Standard: Part 15E
Test Mode: 802.11a 5500 MHz
Polarization: Vertical
Remark:

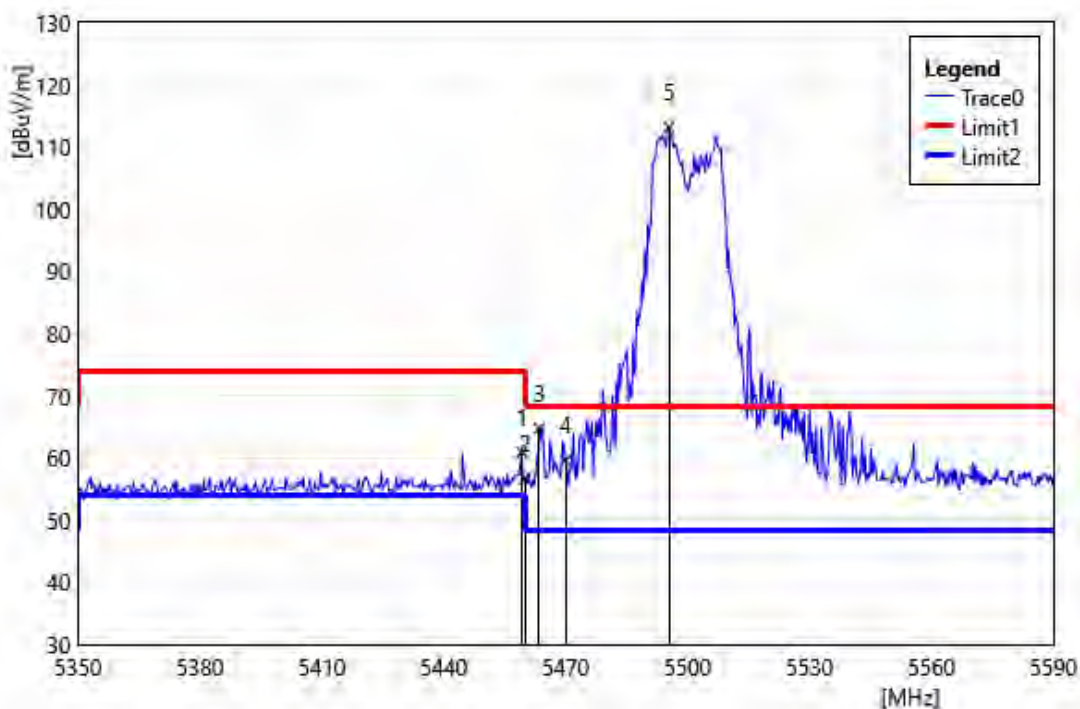


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	61.31	-0.41	60.90	74.00	-13.10	PEAK
2	5460.00	57.05	-0.41	56.64	74.00	-17.36	PEAK
3	5463.52	65.16	-0.42	64.74	68.20	-3.46	PEAK
4	5470.00	60.02	-0.42	59.60	68.20	-8.60	PEAK
5	5495.44	113.60	-0.45	113.15	68.20	44.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

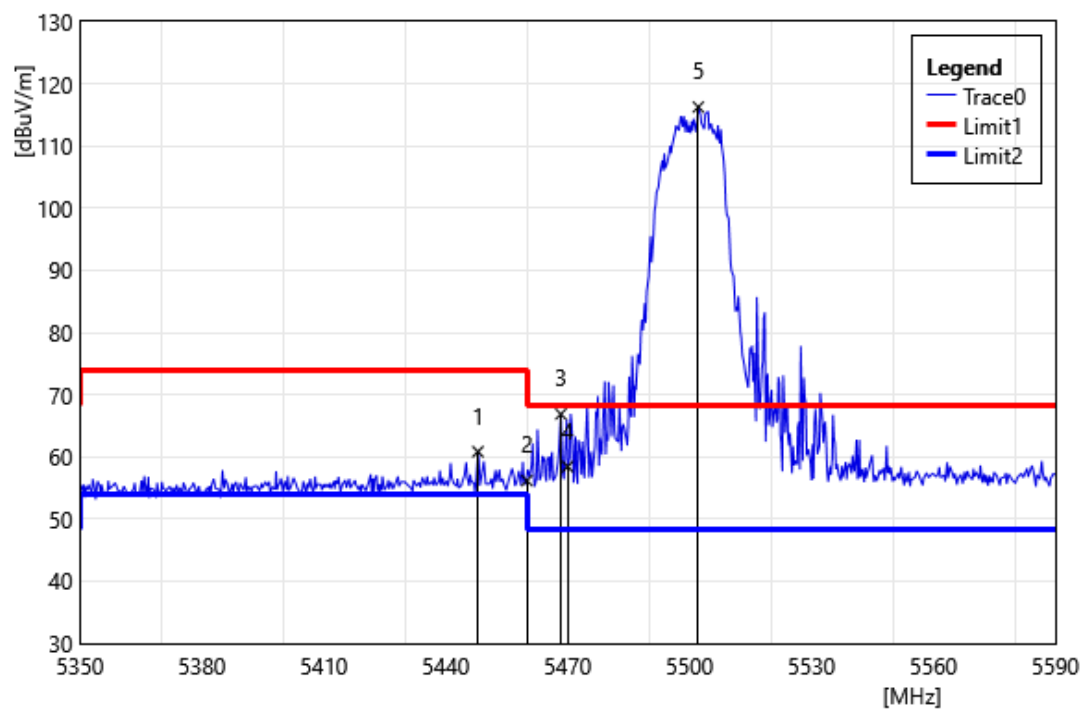


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.92	61.26	-0.42	60.84	74.00	-13.16	PEAK
2	5460.00	56.59	-0.41	56.18	74.00	-17.82	PEAK
3	5468.32	67.30	-0.42	66.88	68.20	-1.32	PEAK
4	5470.00	58.86	-0.42	58.44	68.20	-9.76	PEAK
5	5502.16	116.72	-0.45	116.27	68.20	48.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

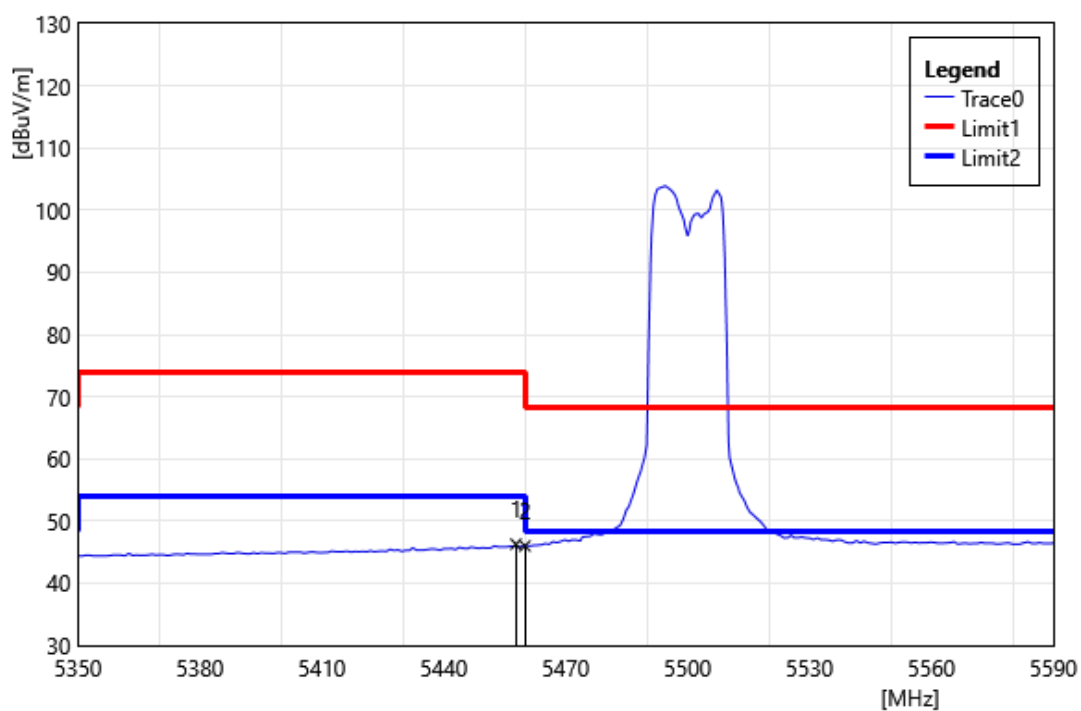


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.76	46.70	-0.41	46.29	54.00	-7.71	AVG
2	5460.00	46.40	-0.41	45.99	54.00	-8.01	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

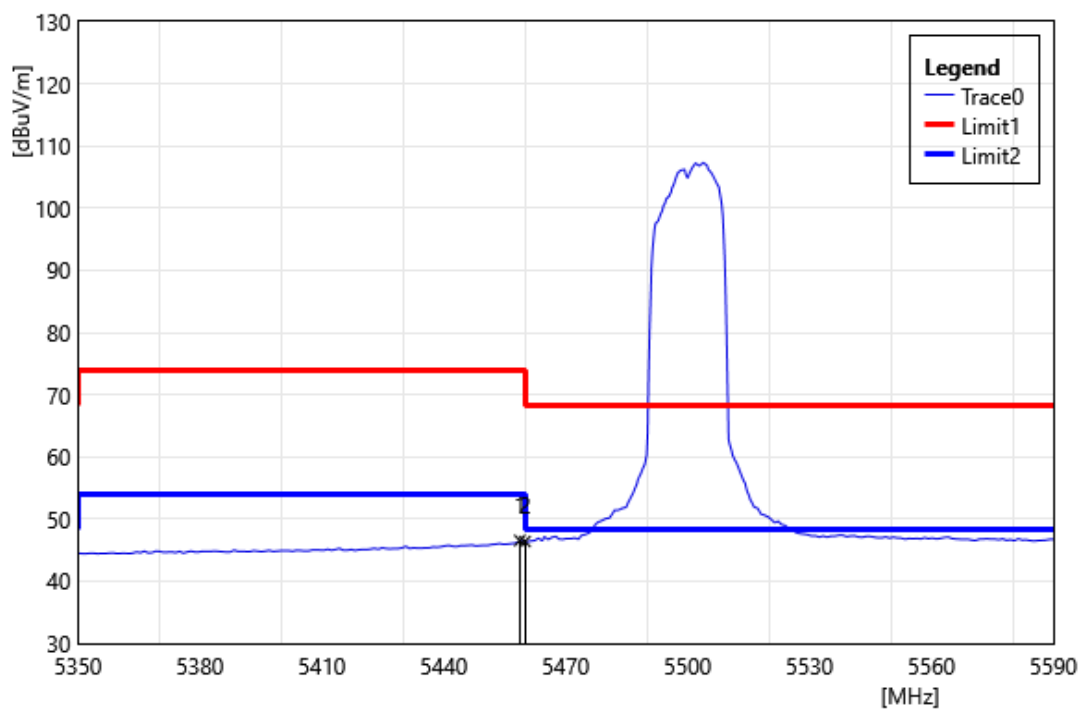


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	46.97	-0.41	46.56	54.00	-7.44	AVG
2	5460.00	46.80	-0.41	46.39	54.00	-7.61	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

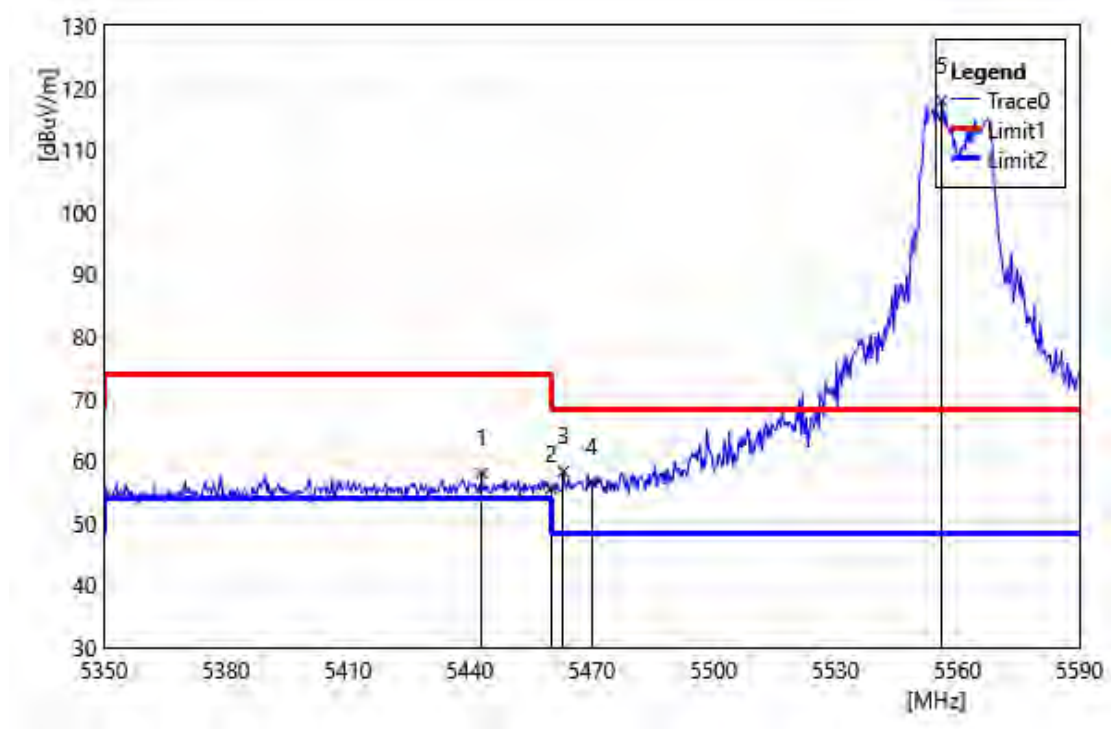


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.88	58.55	-0.45	58.10	74.00	-15.90	PEAK
2	5460.00	55.93	-0.41	55.52	74.00	-18.48	PEAK
3	5463.04	58.74	-0.42	58.32	68.20	-9.88	PEAK
4	5470.00	56.96	-0.42	56.54	68.20	-11.66	PEAK
5	5556.16	118.32	-0.50	117.82	68.20	49.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

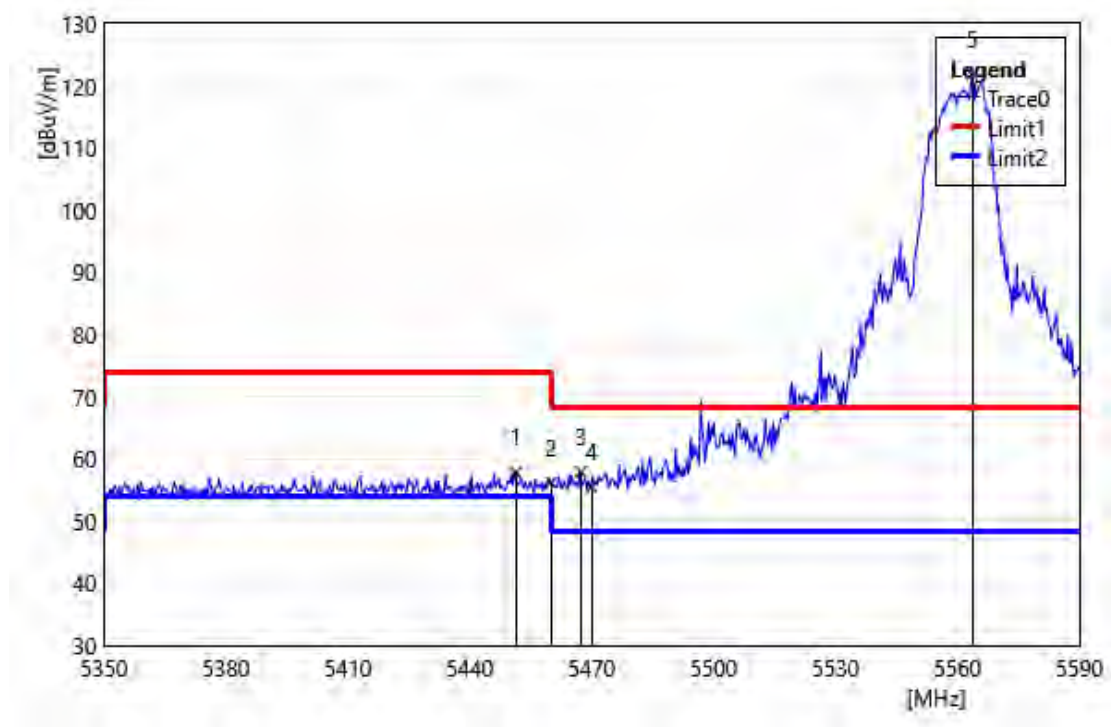


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.28	58.23	-0.41	57.82	74.00	-16.18	PEAK
2	5460.00	56.55	-0.41	56.14	74.00	-17.86	PEAK
3	5467.36	58.34	-0.42	57.92	68.20	-10.28	PEAK
4	5470.00	55.91	-0.42	55.49	68.20	-12.71	PEAK
5	5563.60	122.36	-0.50	121.86	68.20	53.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

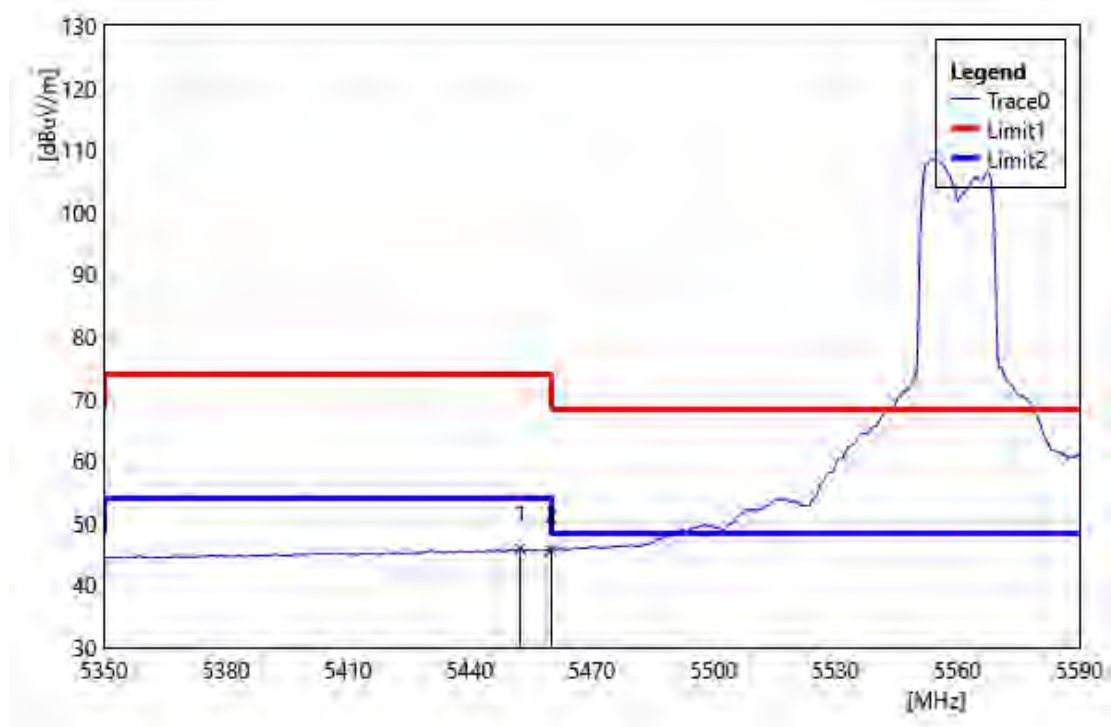


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.48	46.29	-0.41	45.88	54.00	-8.12	AVG
2	5460.00	46.07	-0.41	45.66	54.00	-8.34	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

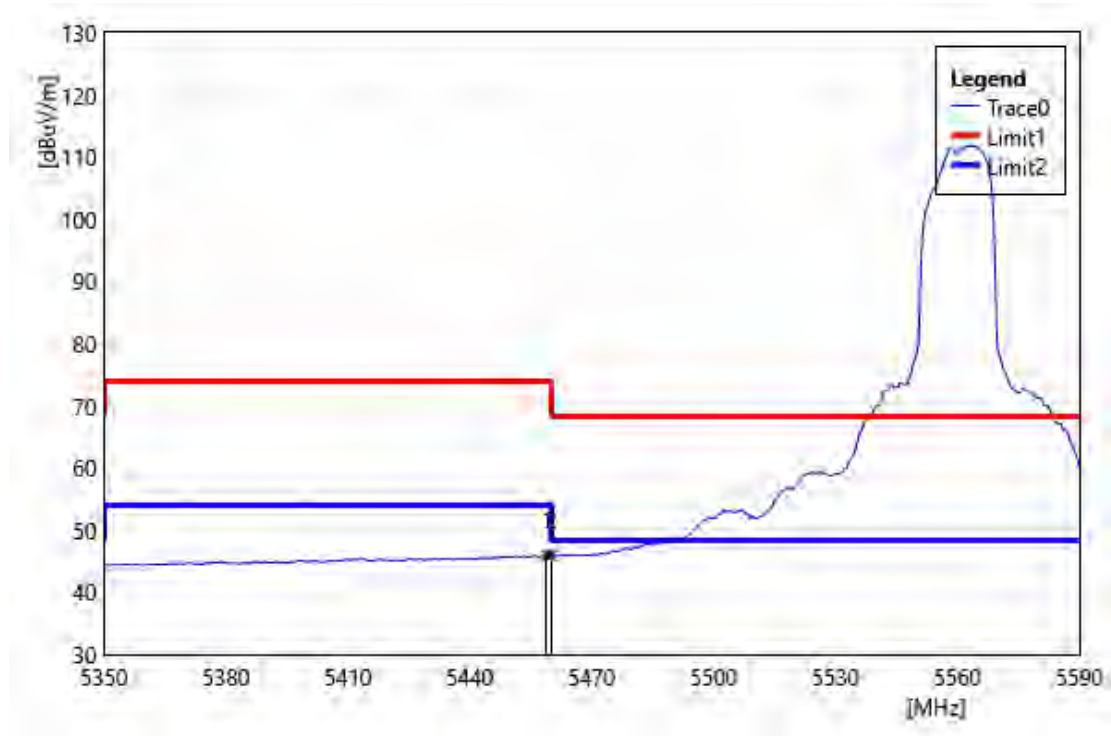


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	46.38	-0.41	45.97	54.00	-8.03	AVG
2	5460.00	46.32	-0.41	45.91	54.00	-8.09	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

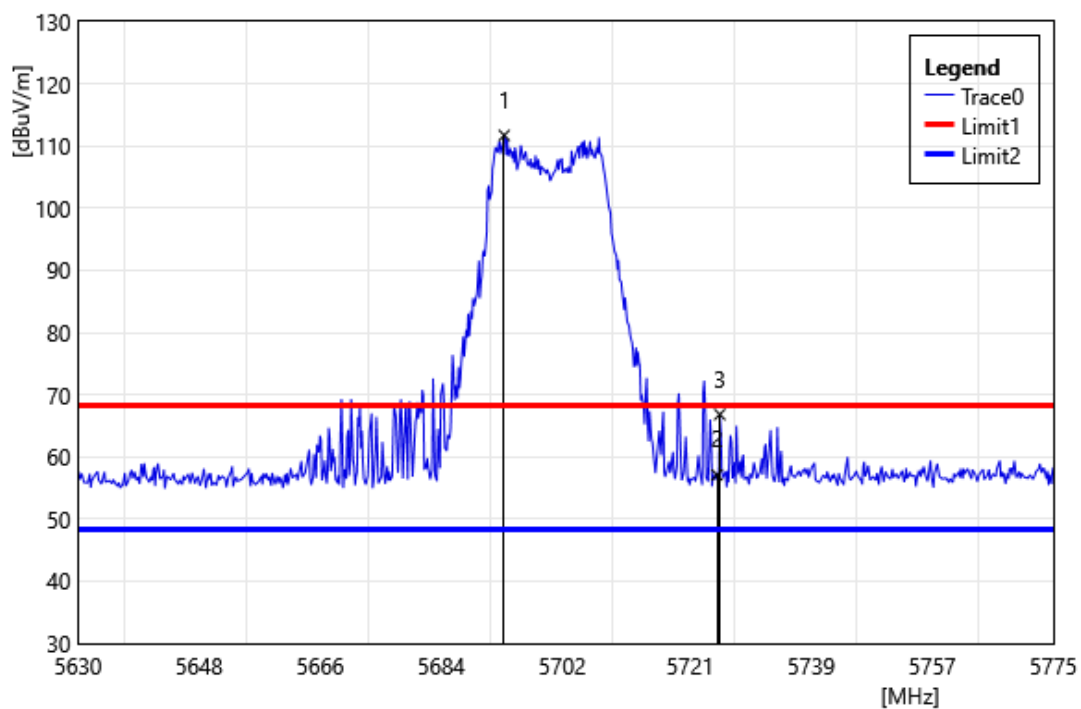


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5693.37	112.14	-0.44	111.70	68.20	43.50	PEAK
2	5725.00	57.24	-0.14	57.10	68.20	-11.10	PEAK
3	5725.41	66.96	-0.14	66.82	68.20	-1.38	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

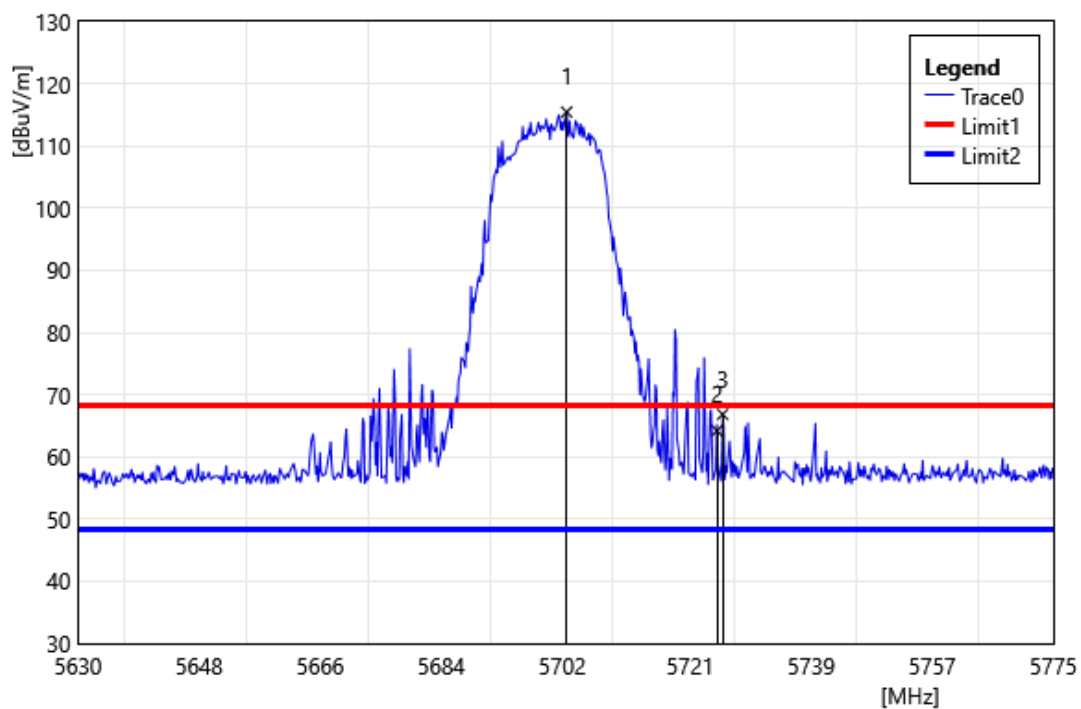


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5702.65	115.85	-0.39	115.46	68.20	47.26	PEAK
2	5725.00	64.34	-0.14	64.20	68.20	-4.00	PEAK
3	5725.85	66.96	-0.13	66.84	68.20	-1.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

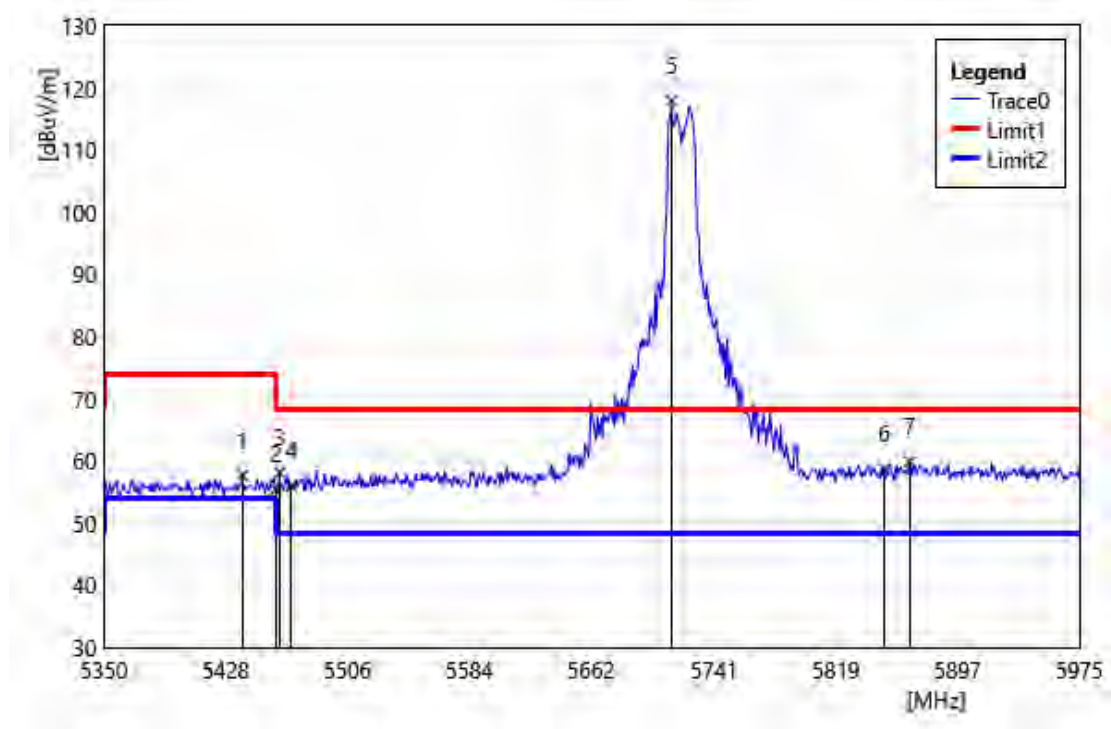


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5438.75	58.10	-0.48	57.62	74.00	-16.38	PEAK
2	5460.00	55.78	-0.41	55.37	74.00	-18.63	PEAK
3	5462.50	58.56	-0.42	58.14	68.20	-10.06	PEAK
4	5470.00	56.35	-0.42	55.93	68.20	-12.27	PEAK
5	5713.75	118.15	-0.27	117.88	68.20	49.68	PEAK
6	5850.00	58.26	0.45	58.71	68.20	-9.49	PEAK
7	5866.25	59.37	0.53	59.90	68.20	-8.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

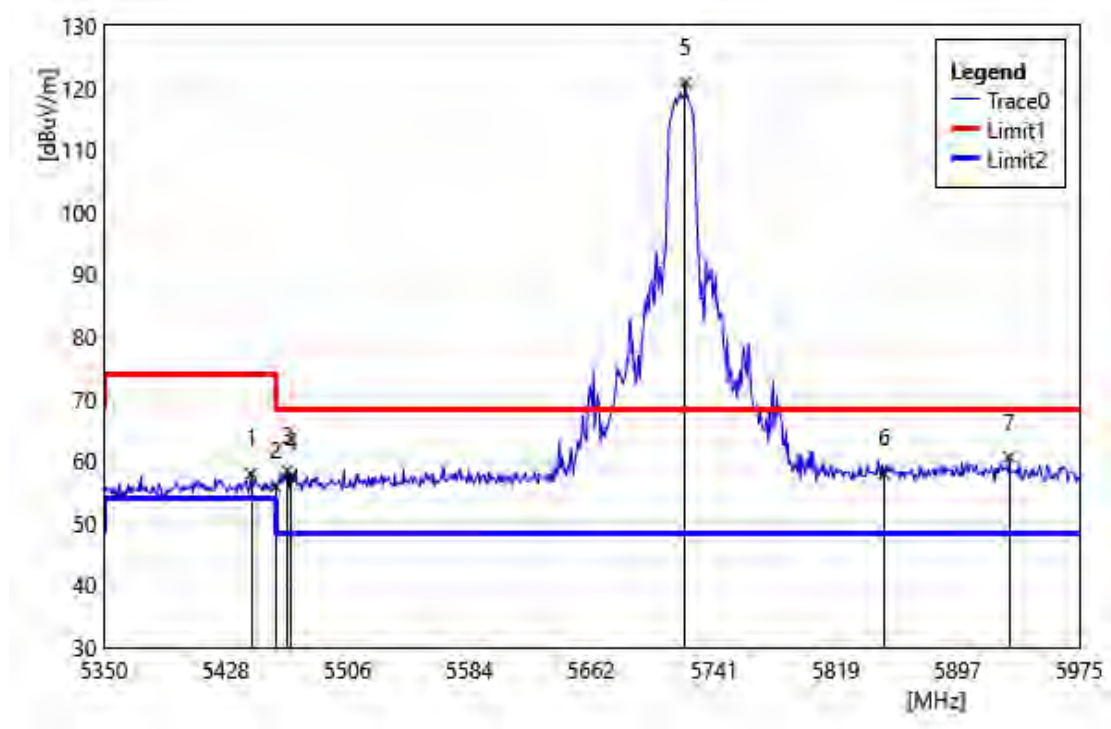


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.38	58.41	-0.44	57.97	74.00	-16.03	PEAK
2	5460.00	56.28	-0.41	55.87	74.00	-18.13	PEAK
3	5467.50	58.86	-0.42	58.44	68.20	-9.76	PEAK
4	5470.00	57.80	-0.42	57.38	68.20	-10.82	PEAK
5	5722.50	120.98	-0.17	120.81	68.20	52.61	PEAK
6	5850.00	57.51	0.45	57.96	68.20	-10.24	PEAK
7	5930.00	59.99	0.62	60.61	68.20	-7.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

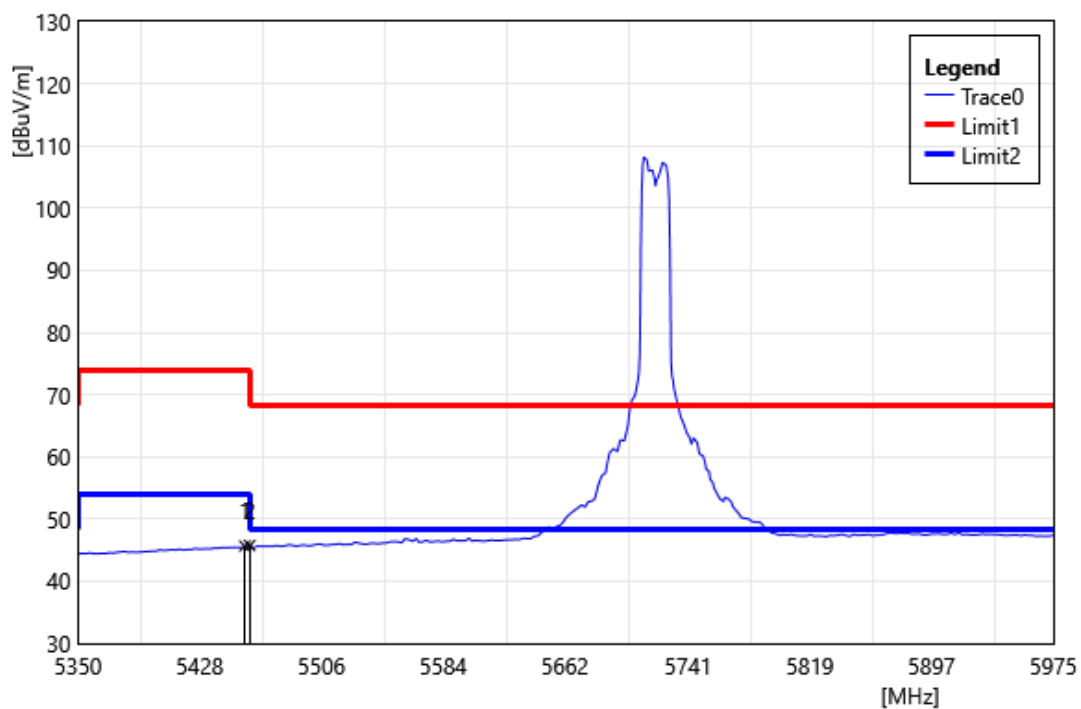


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.88	46.07	-0.41	45.66	54.00	-8.34	AVG
2	5460.00	46.15	-0.41	45.74	54.00	-8.26	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

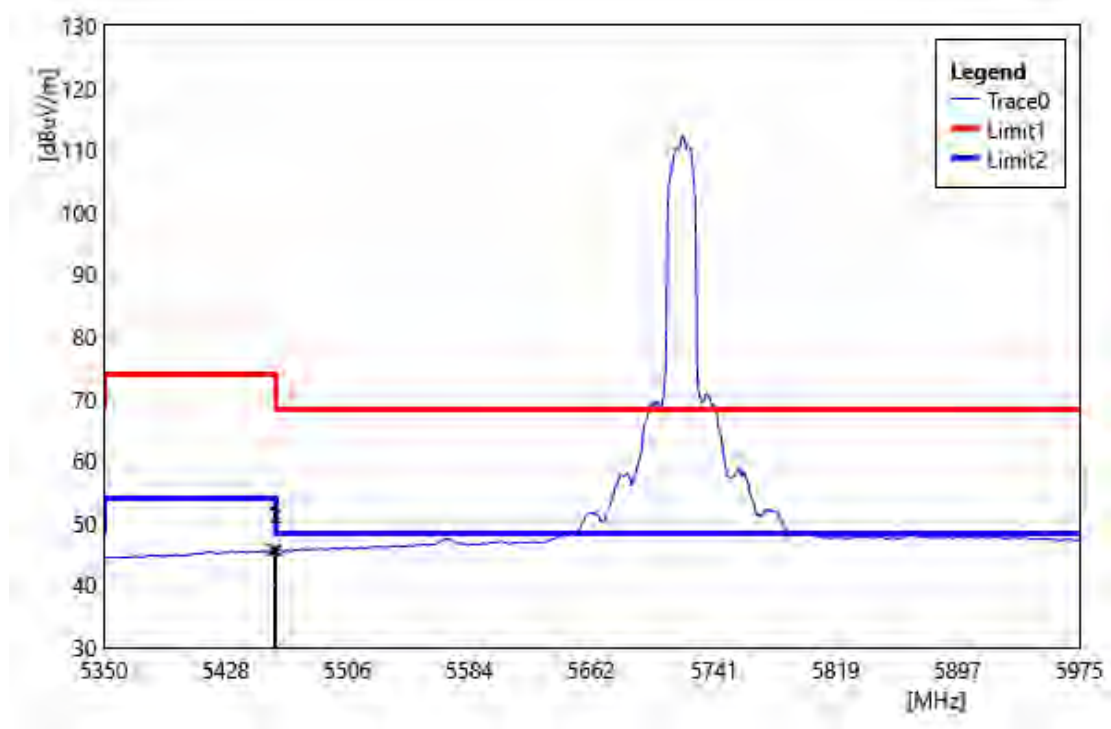


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.75	46.10	-0.41	45.69	54.00	-8.31	AVG
2	5460.00	46.03	-0.41	45.62	54.00	-8.38	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

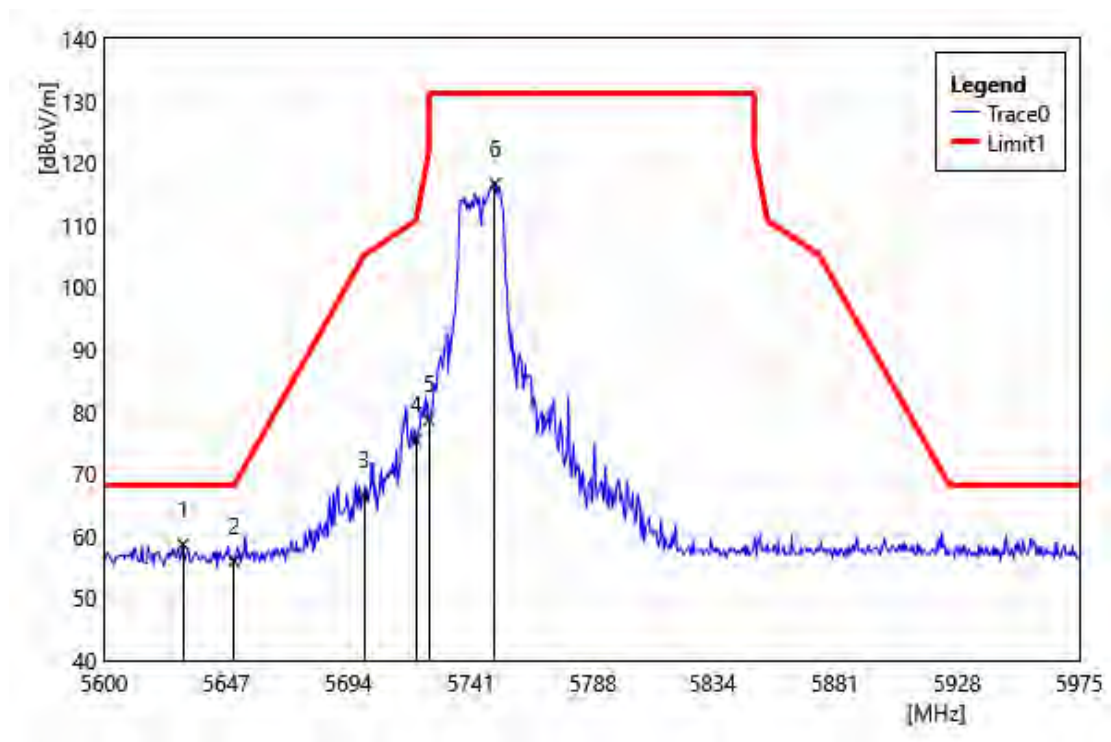


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5630.38	59.25	-0.56	58.69	68.20	-9.51	PEAK
2	5650.00	56.53	-0.58	55.95	68.20	-12.25	PEAK
3	5700.00	66.93	-0.42	66.51	105.20	-38.69	PEAK
4	5720.00	75.60	-0.20	75.40	110.80	-35.40	PEAK
5	5725.00	78.83	-0.14	78.69	122.20	-43.51	PEAK
6	5750.38	116.56	0.14	116.70	131.20	-14.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

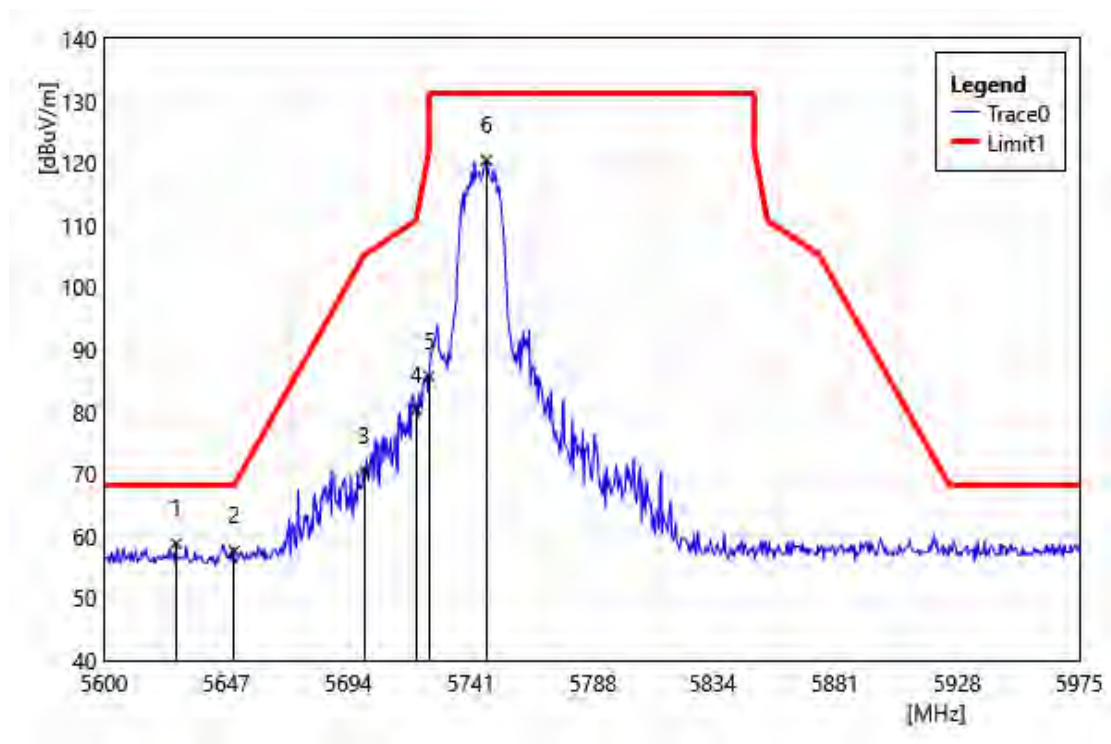

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5627.75	59.35	-0.56	58.79	68.20	-9.41	PEAK
2	5650.00	58.17	-0.58	57.59	68.20	-10.61	PEAK
3	5700.00	70.91	-0.42	70.49	105.20	-34.71	PEAK
4	5720.00	80.53	-0.20	80.33	110.80	-30.47	PEAK
5	5725.00	85.79	-0.14	85.65	122.20	-36.55	PEAK
6	5747.00	120.37	0.10	120.47	131.20	-10.73	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

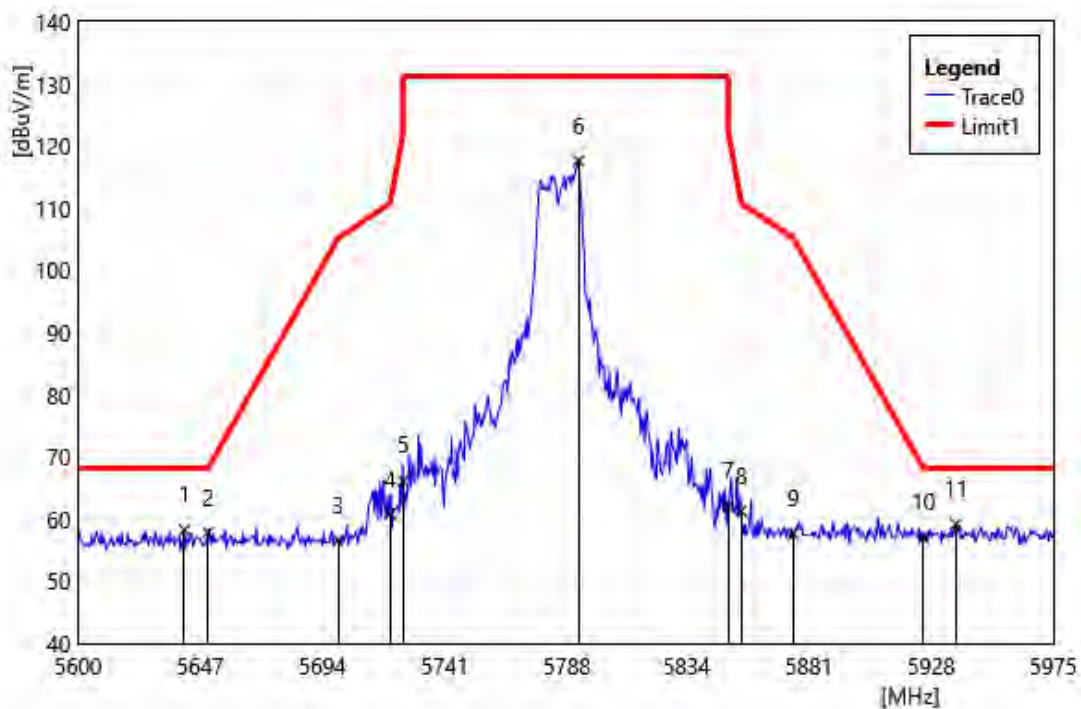

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5640.88	58.80	-0.57	58.23	68.20	-9.97	PEAK
2	5650.00	58.35	-0.58	57.77	68.20	-10.43	PEAK
3	5700.00	56.97	-0.42	56.55	105.20	-48.65	PEAK
4	5720.00	60.99	-0.20	60.79	110.80	-50.01	PEAK
5	5725.00	66.31	-0.14	66.17	122.20	-56.03	PEAK
6	5792.38	117.35	0.27	117.62	131.20	-13.58	PEAK
7	5850.00	61.60	0.45	62.05	122.20	-60.15	PEAK
8	5855.00	60.81	0.47	61.28	110.80	-49.52	PEAK
9	5875.00	56.97	0.58	57.55	105.20	-47.65	PEAK
10	5925.00	56.32	0.63	56.95	68.20	-11.25	PEAK
11	5937.50	58.57	0.60	59.17	68.20	-9.03	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			

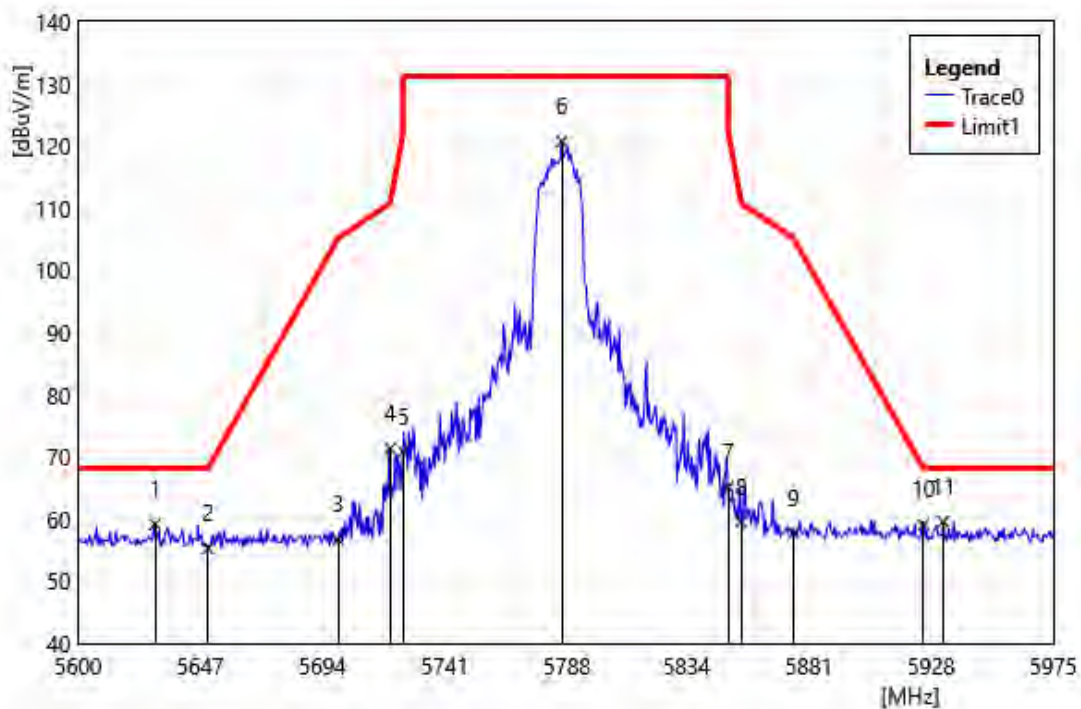

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5629.63	59.75	-0.56	59.19	68.20	-9.01	PEAK
2	5650.00	55.82	-0.58	55.24	68.20	-12.96	PEAK
3	5700.00	57.18	-0.42	56.75	105.20	-48.45	PEAK
4	5720.00	71.57	-0.20	71.37	110.80	-39.43	PEAK
5	5725.00	71.04	-0.14	70.90	122.20	-51.30	PEAK
6	5786.00	120.49	0.25	120.74	131.20	-10.46	PEAK
7	5850.00	64.70	0.45	65.15	122.20	-57.05	PEAK
8	5855.00	59.12	0.47	59.59	110.80	-51.21	PEAK
9	5875.00	57.05	0.58	57.63	105.20	-47.57	PEAK
10	5925.00	58.46	0.63	59.09	68.20	-9.11	PEAK
11	5932.63	59.00	0.61	59.61	68.20	-8.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

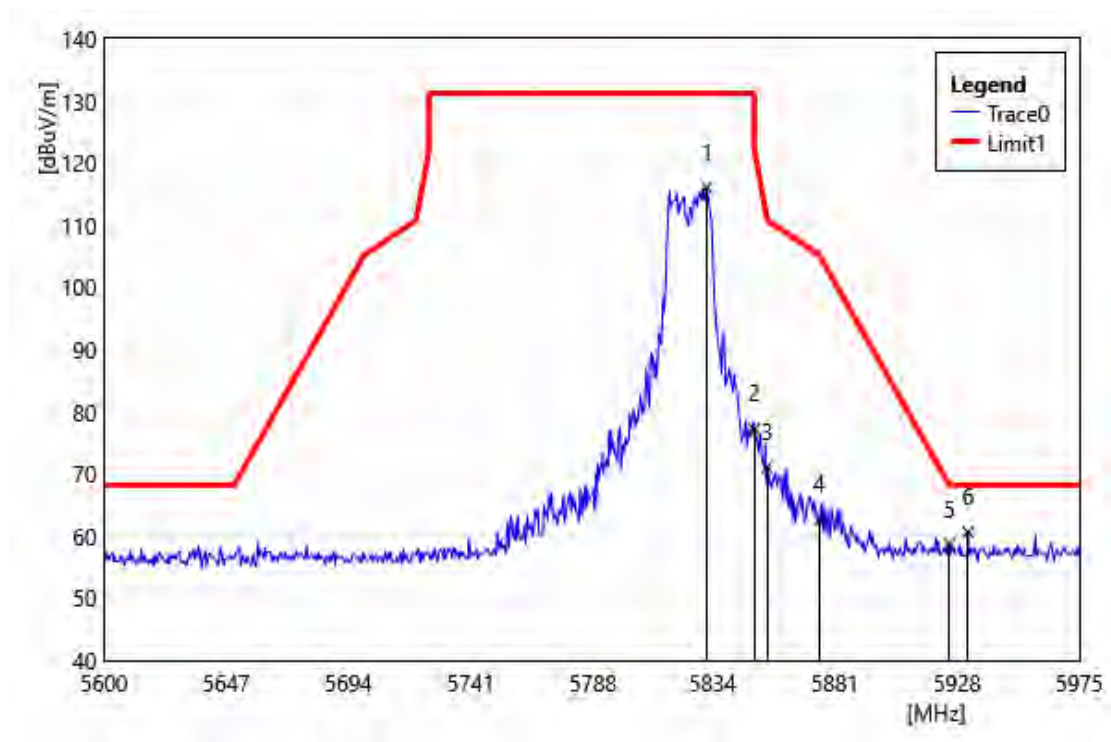


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5831.75	115.67	0.39	116.06	131.20	-15.14	PEAK
2	5850.00	76.75	0.45	77.19	122.20	-45.01	PEAK
3	5855.00	70.63	0.47	71.10	110.80	-39.70	PEAK
4	5875.00	62.07	0.58	62.65	105.20	-42.55	PEAK
5	5925.00	58.03	0.63	58.66	68.20	-9.54	PEAK
6	5932.25	60.00	0.61	60.61	68.20	-7.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

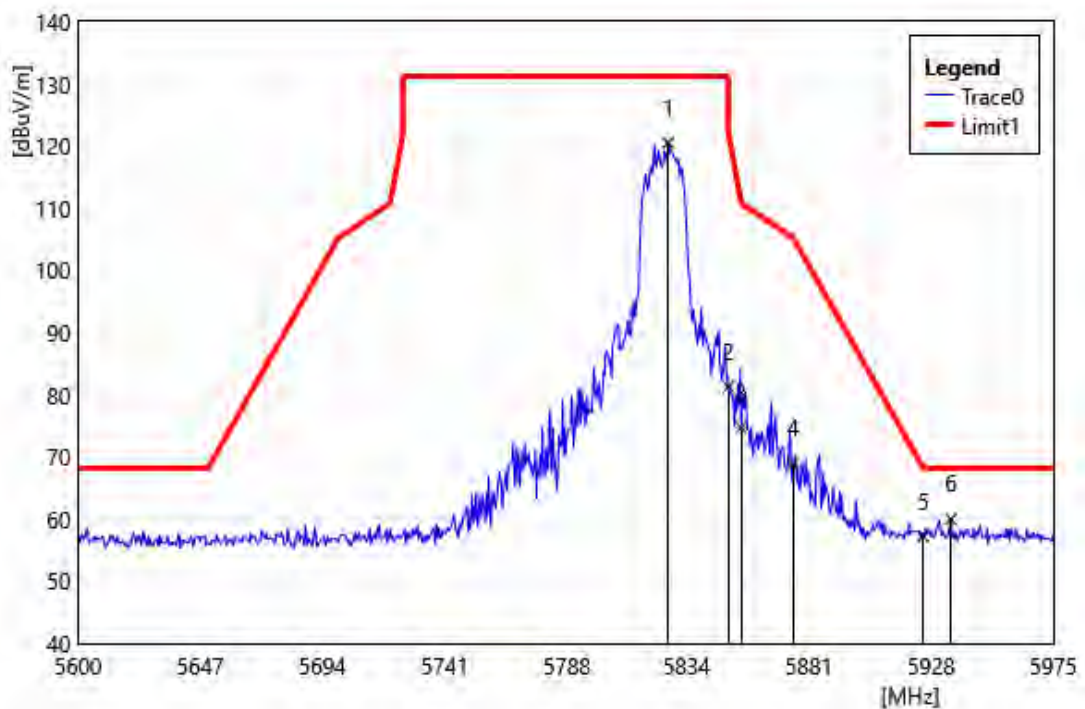


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5826.88	120.13	0.38	120.51	131.20	-10.69	PEAK
2	5850.00	80.82	0.45	81.27	122.20	-40.93	PEAK
3	5855.00	74.28	0.47	74.75	110.80	-36.05	PEAK
4	5875.00	68.26	0.58	68.84	105.20	-36.36	PEAK
5	5925.00	56.58	0.63	57.21	68.20	-10.99	PEAK
6	5935.63	59.40	0.60	60.00	68.20	-8.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

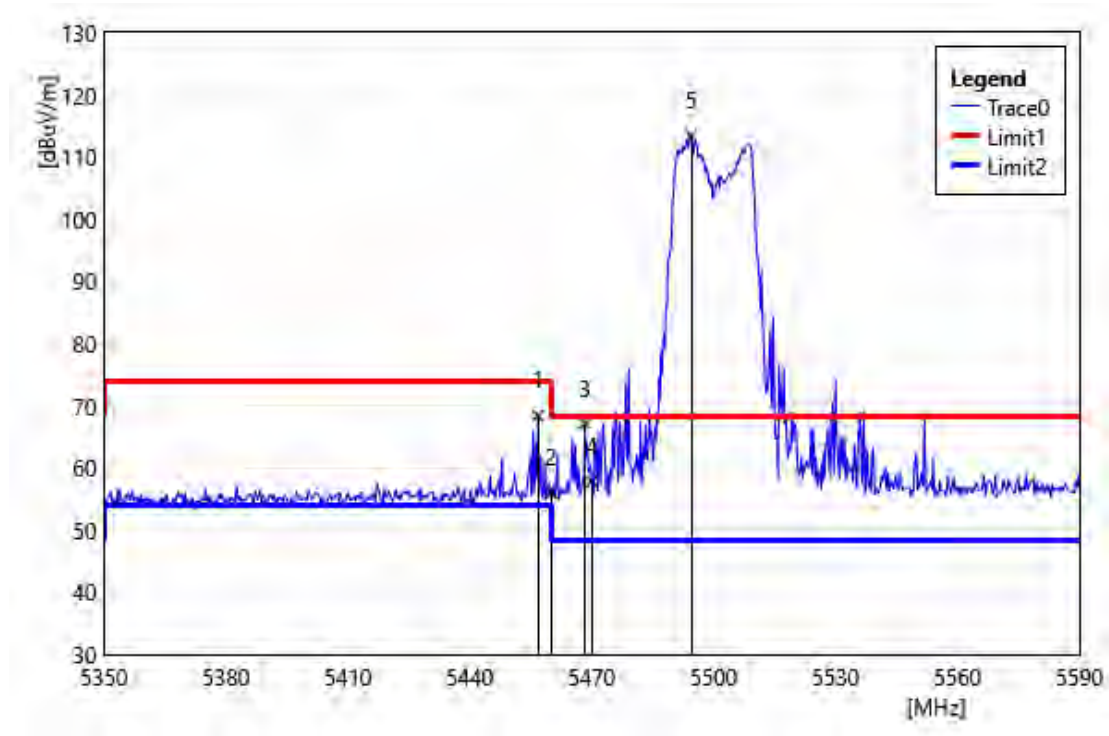


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.80	68.81	-0.41	68.40	74.00	-5.60	PEAK
2	5460.00	56.40	-0.41	55.99	74.00	-18.01	PEAK
3	5468.32	67.55	-0.42	67.13	68.20	-1.07	PEAK
4	5470.00	58.23	-0.42	57.81	68.20	-10.39	PEAK
5	5494.48	113.85	-0.44	113.41	68.20	45.21	PEAK

Test Site: 966 Chamber Standard: Part 15E
Test Mode: 802.11be EHT20 5500 MHz
Polarization: Horizontal
Remark:

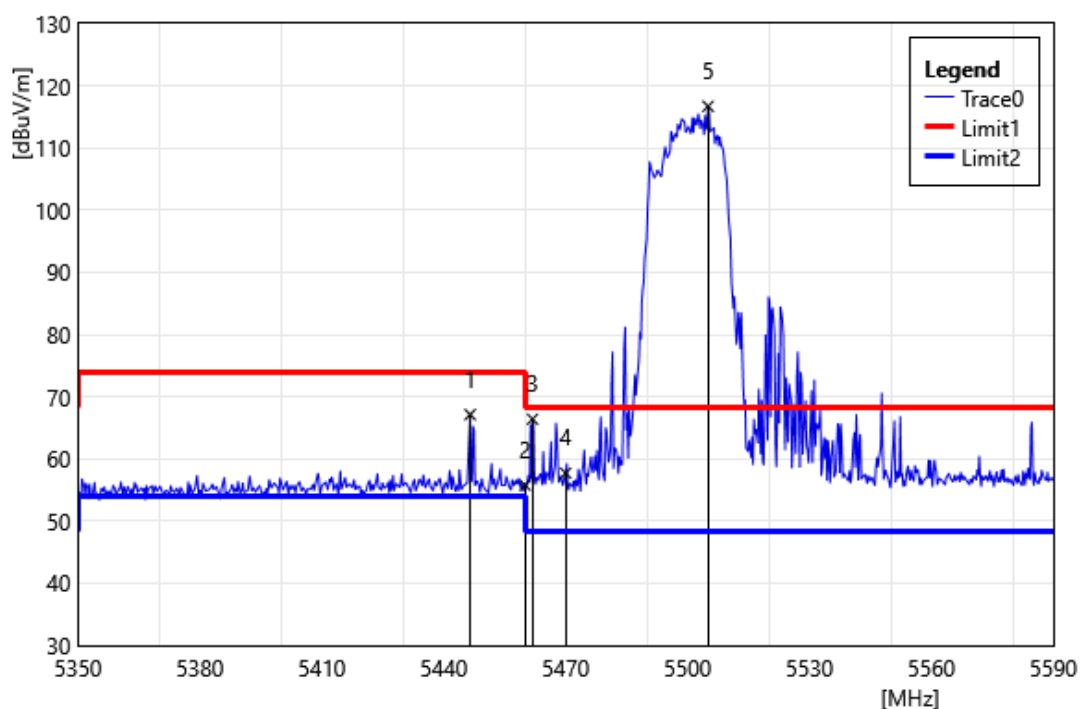


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.48	67.55	-0.43	67.12	74.00	-6.88	PEAK
2	5460.00	56.18	-0.41	55.77	74.00	-18.23	PEAK
3	5461.84	66.79	-0.41	66.38	68.20	-1.82	PEAK
4	5470.00	58.12	-0.42	57.70	68.20	-10.50	PEAK
5	5505.04	117.16	-0.45	116.71	68.20	48.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

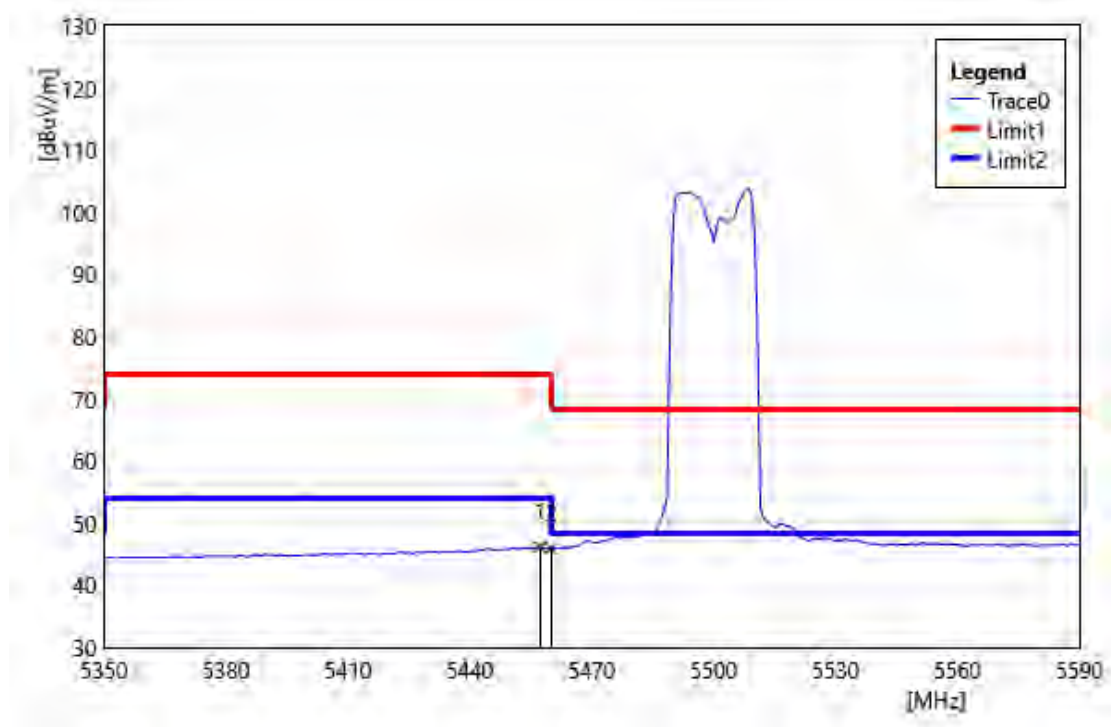


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	46.61	-0.41	46.20	54.00	-7.80	AVG
2	5460.00	46.34	-0.41	45.93	54.00	-8.07	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Horizontal		
Remark:			

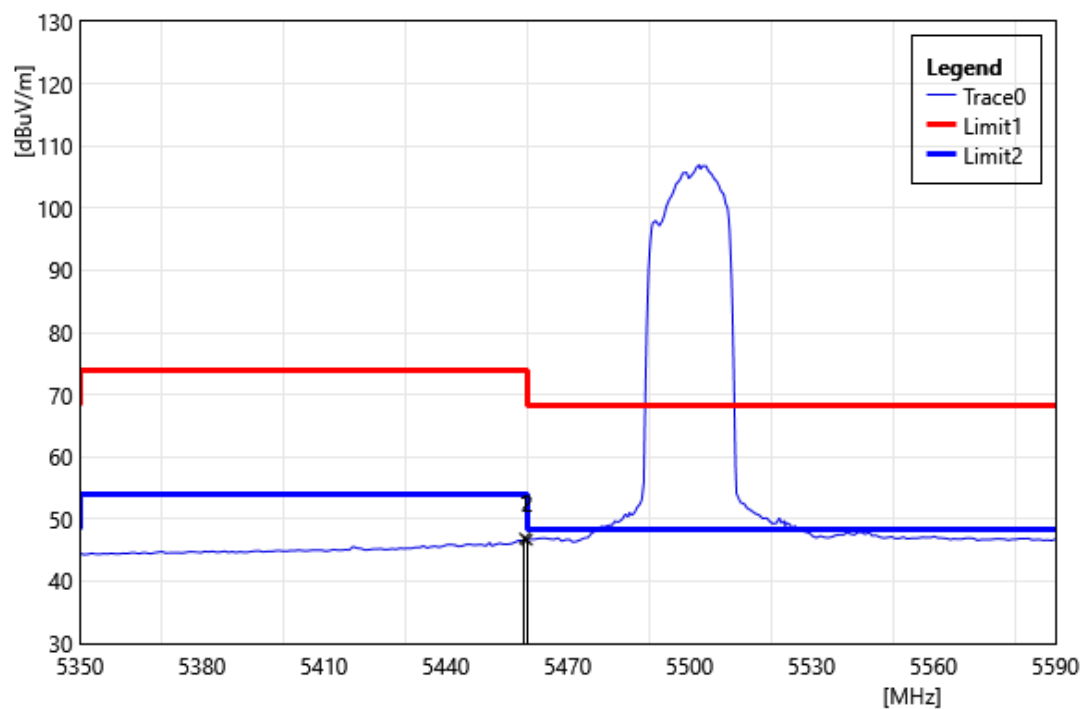


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	47.30	-0.41	46.89	54.00	-7.11	AVG
2	5460.00	47.07	-0.41	46.66	54.00	-7.34	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560 MHz		
Polarization:	Vertical		
Remark:			

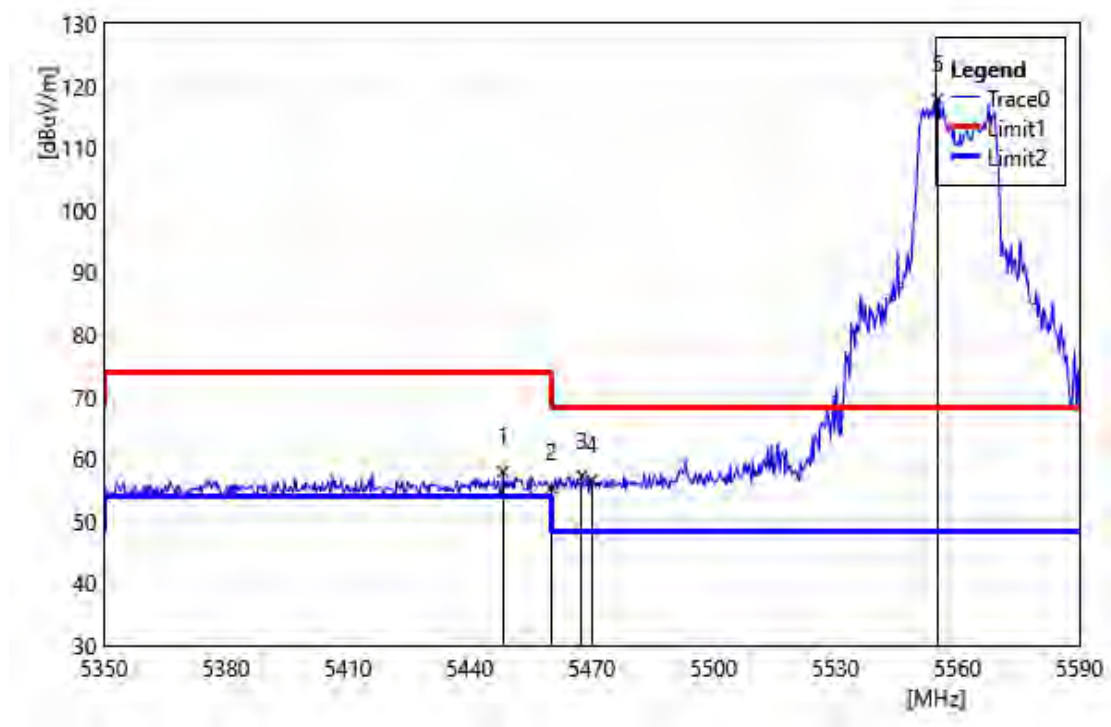


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.16	58.38	-0.42	57.96	74.00	-16.04	PEAK
2	5460.00	55.69	-0.41	55.28	74.00	-18.72	PEAK
3	5467.60	57.72	-0.42	57.30	68.20	-10.90	PEAK
4	5470.00	56.99	-0.42	56.57	68.20	-11.63	PEAK
5	5555.20	118.30	-0.50	117.80	68.20	49.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560 MHz		
Polarization:	Horizontal		
Remark:			

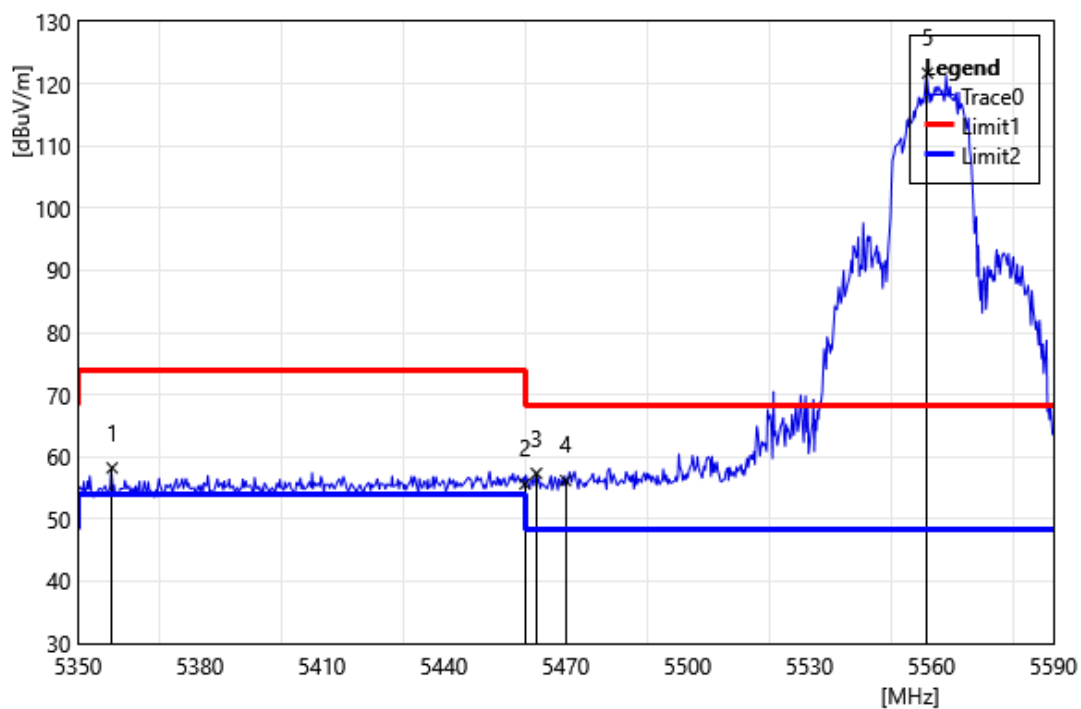


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5358.40	59.44	-1.22	58.22	74.00	-15.78	PEAK
2	5460.00	56.05	-0.41	55.64	74.00	-18.36	PEAK
3	5462.80	57.76	-0.42	57.34	68.20	-10.86	PEAK
4	5470.00	56.61	-0.42	56.19	68.20	-12.01	PEAK
5	5559.04	122.22	-0.50	121.72	68.20	53.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560 MHz		
Polarization:	Vertical		
Remark:			

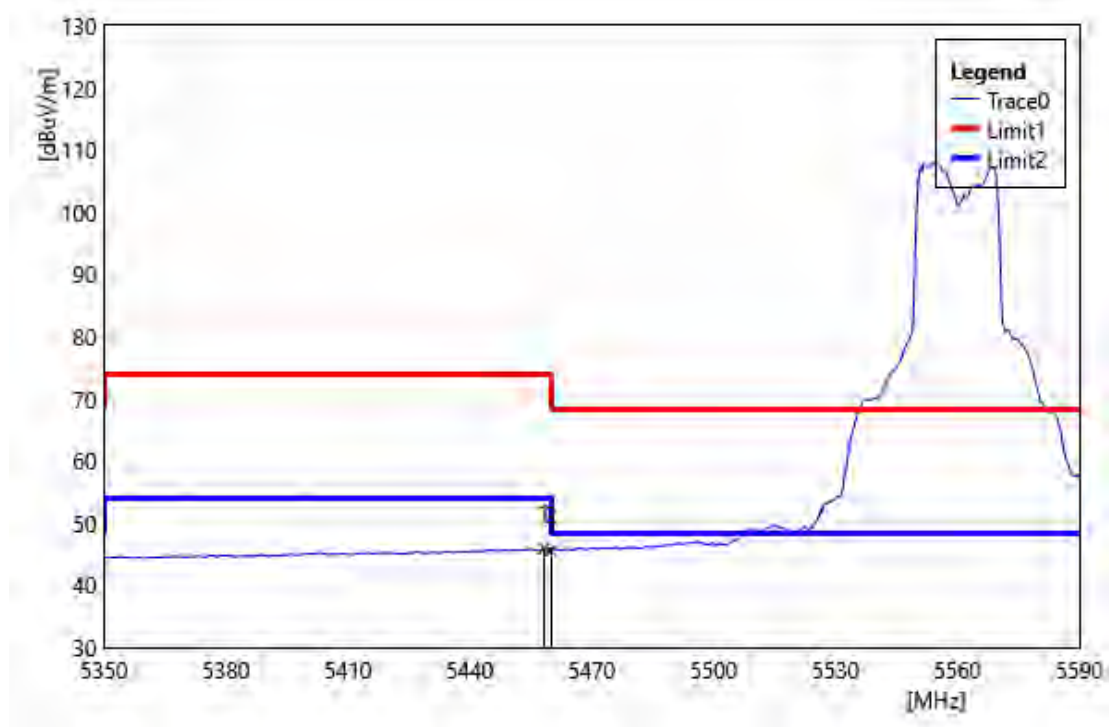


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	46.30	-0.41	45.89	54.00	-8.11	AVG
2	5460.00	46.00	-0.41	45.59	54.00	-8.41	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560 MHz		
Polarization:	Horizontal		
Remark:			

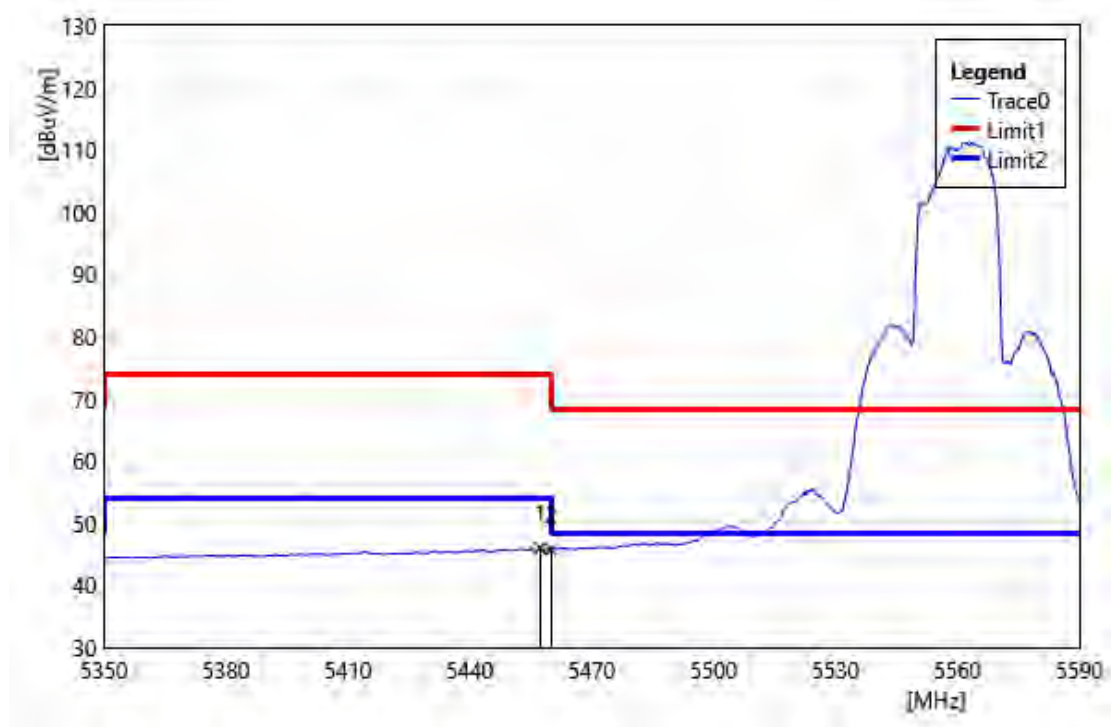


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	46.40	-0.41	45.99	54.00	-8.02	AVG
2	5460.00	46.14	-0.41	45.73	54.00	-8.27	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Vertical		
Remark:			

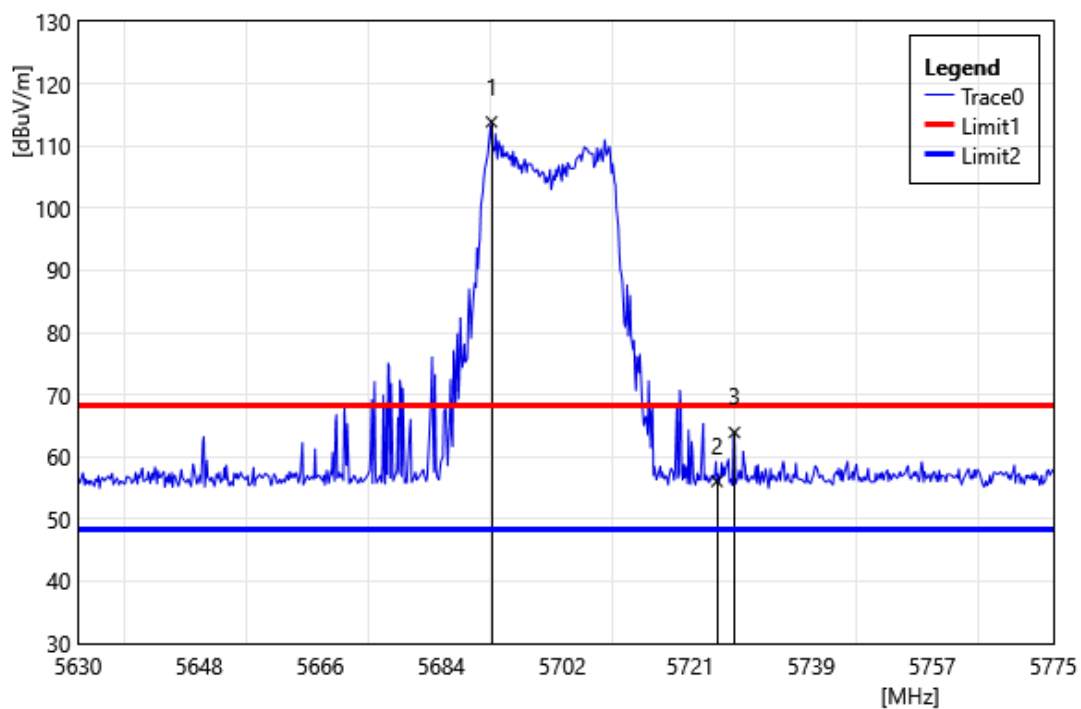


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5691.48	114.32	-0.45	113.87	68.20	45.67	PEAK
2	5725.00	56.21	-0.14	56.07	68.20	-12.13	PEAK
3	5727.59	64.05	-0.11	63.94	68.20	-4.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

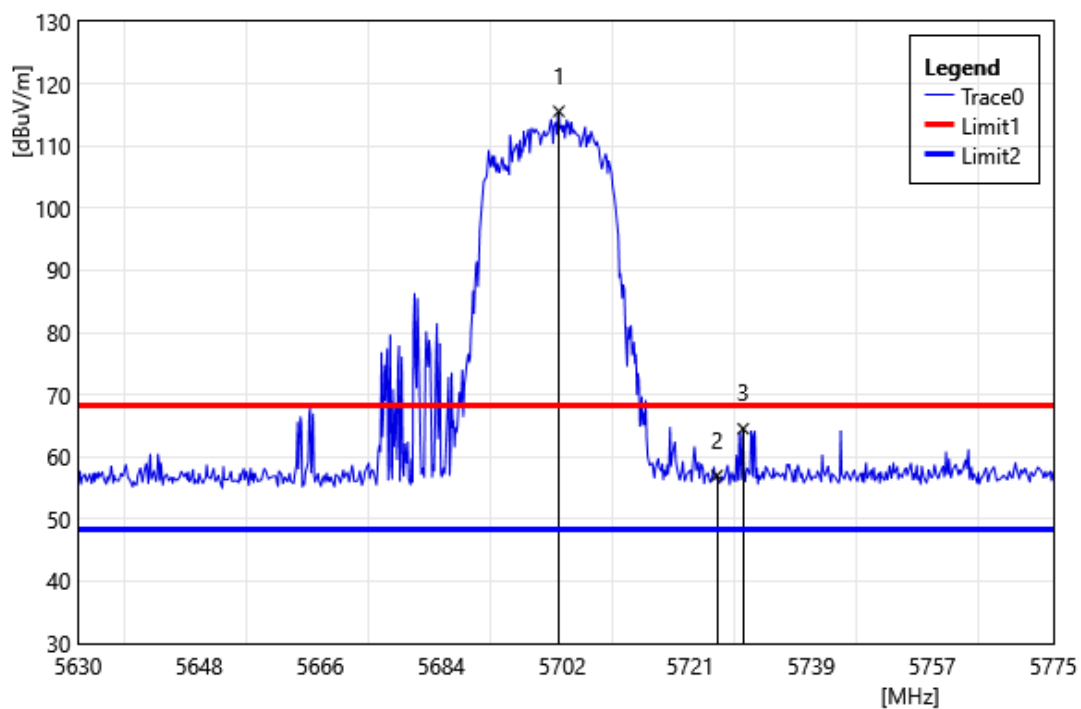


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5701.49	115.99	-0.41	115.58	68.20	47.38	PEAK
2	5725.00	57.13	-0.14	56.99	68.20	-11.21	PEAK
3	5728.89	64.63	-0.10	64.53	68.20	-3.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

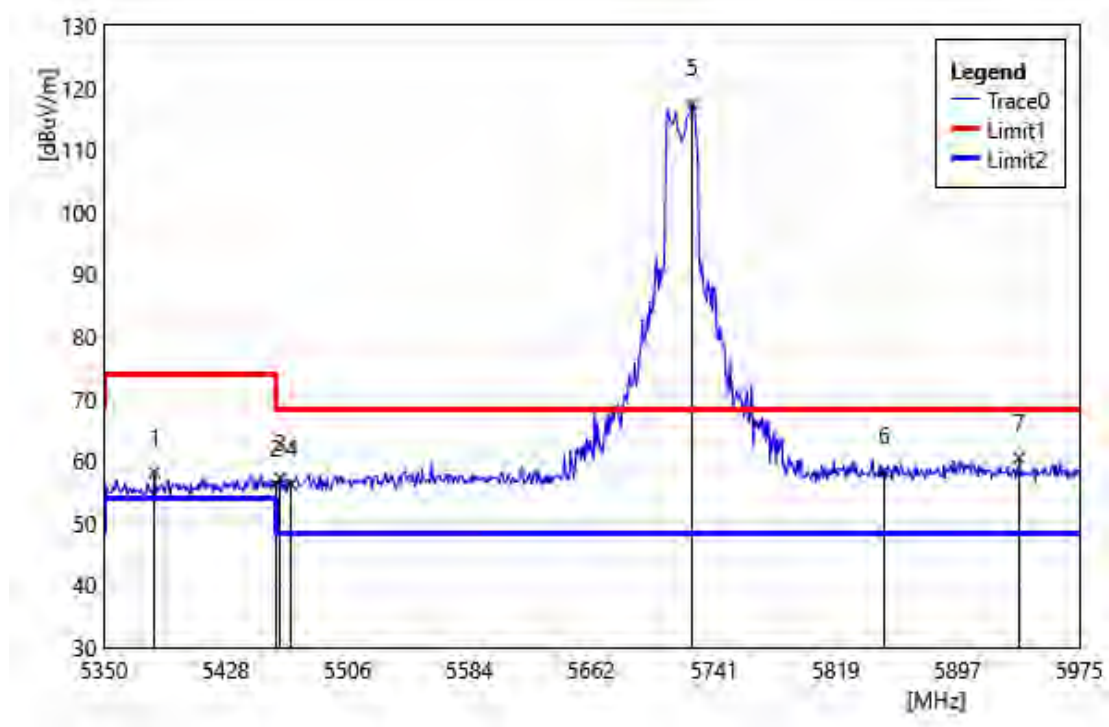


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5382.50	59.10	-0.95	58.15	74.00	-15.85	PEAK
2	5460.00	56.60	-0.41	56.19	74.00	-17.81	PEAK
3	5463.13	57.65	-0.42	57.23	68.20	-10.97	PEAK
4	5470.00	56.69	-0.42	56.27	68.20	-11.93	PEAK
5	5726.88	117.57	-0.12	117.45	68.20	49.25	PEAK
6	5850.00	57.96	0.45	58.41	68.20	-9.79	PEAK
7	5936.25	59.91	0.60	60.51	68.20	-7.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

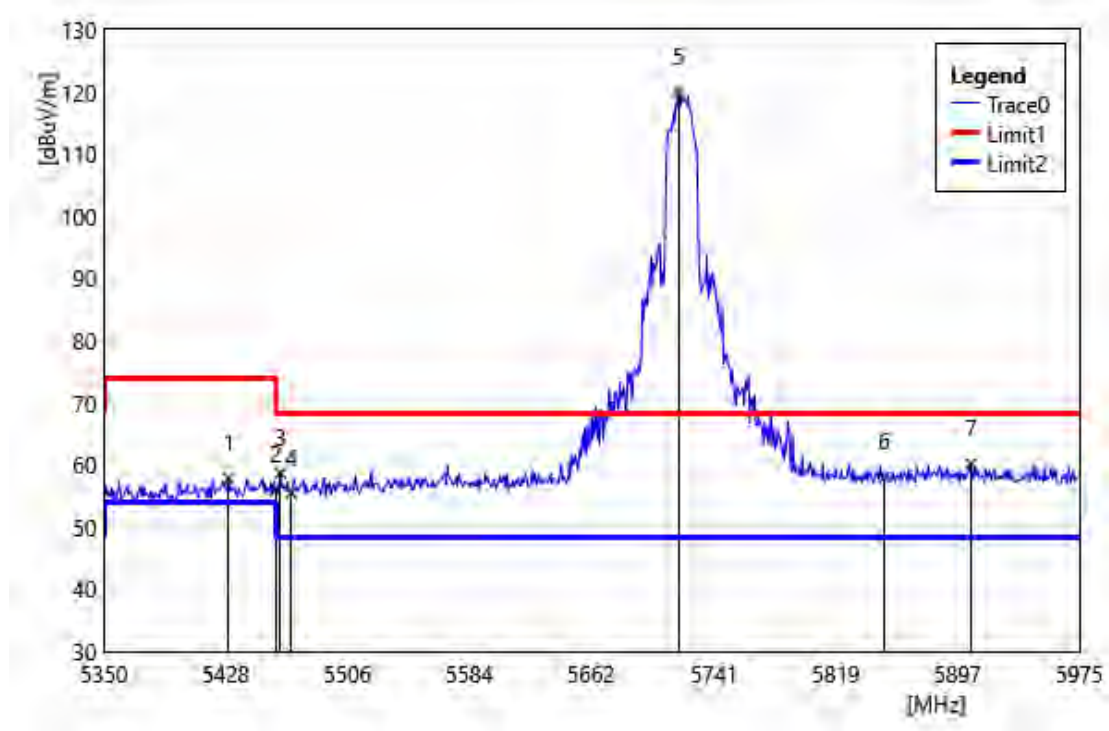


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5430.00	58.37	-0.55	57.82	74.00	-16.18	PEAK
2	5460.00	56.36	-0.41	55.95	74.00	-18.05	PEAK
3	5463.13	59.08	-0.42	58.66	68.20	-9.54	PEAK
4	5470.00	55.89	-0.42	55.47	68.20	-12.73	PEAK
5	5718.13	120.26	-0.22	120.04	68.20	51.84	PEAK
6	5850.00	57.59	0.45	58.04	68.20	-10.16	PEAK
7	5905.63	59.47	0.69	60.16	68.20	-8.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

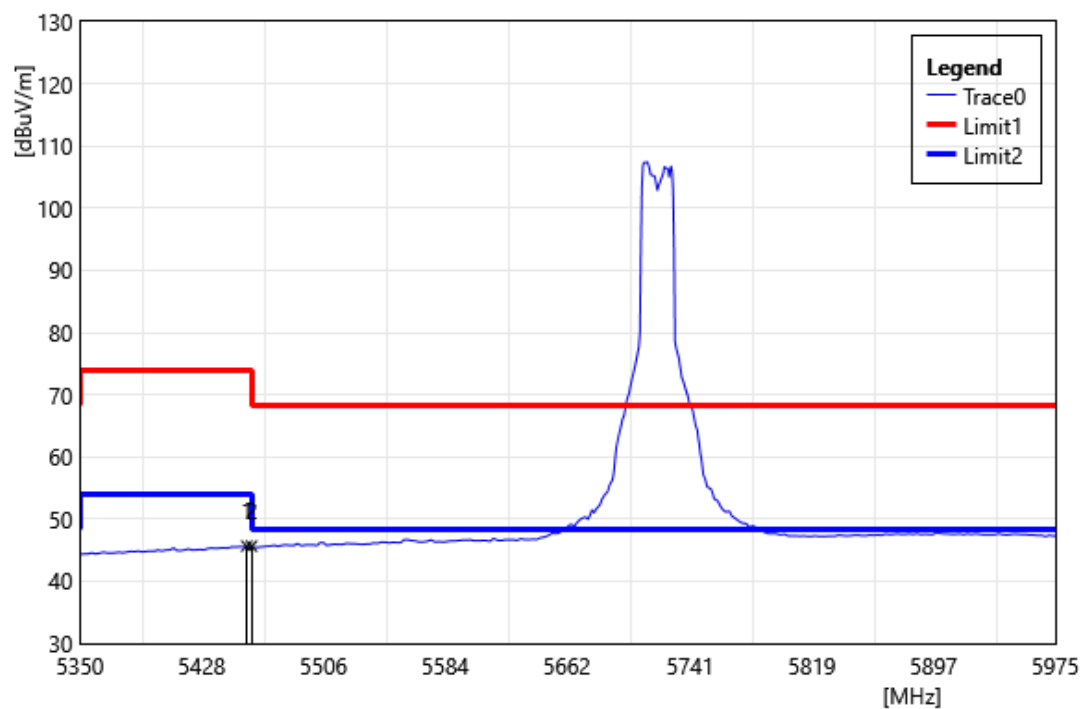


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.88	46.06	-0.41	45.65	54.00	-8.35	AVG
2	5460.00	46.06	-0.41	45.65	54.00	-8.35	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

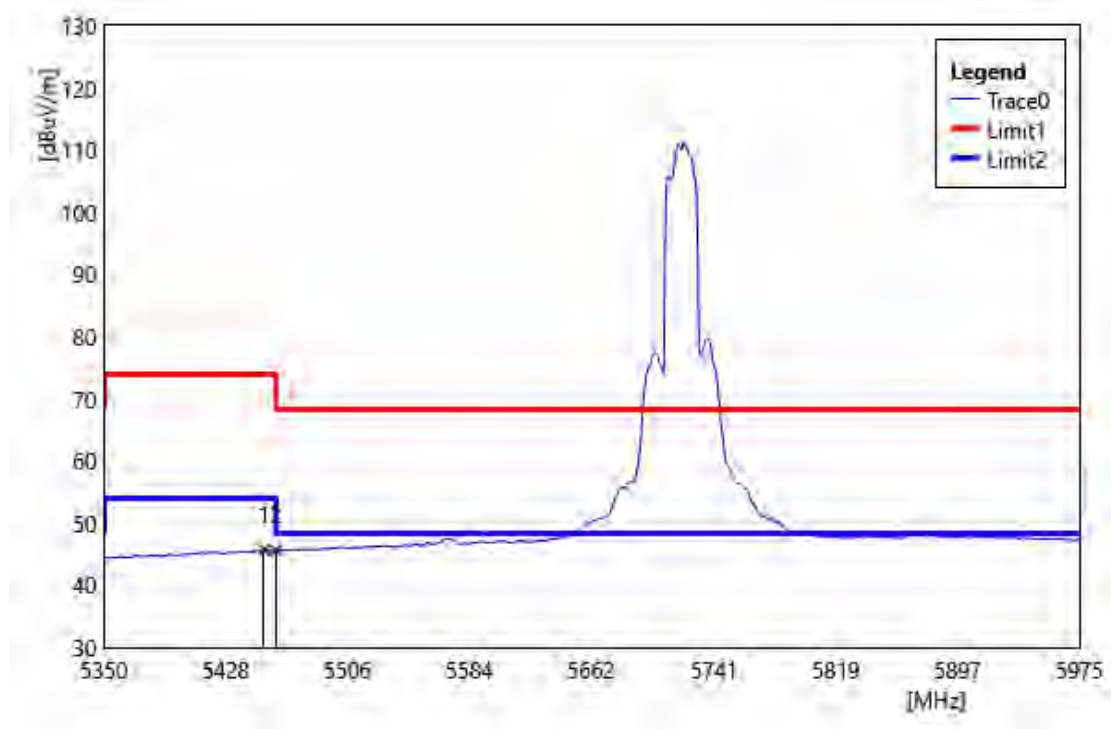


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.50	46.07	-0.41	45.66	54.00	-8.34	AVG
2	5460.00	46.02	-0.41	45.61	54.00	-8.39	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745 MHz		
Polarization:	Vertical		
Remark:			

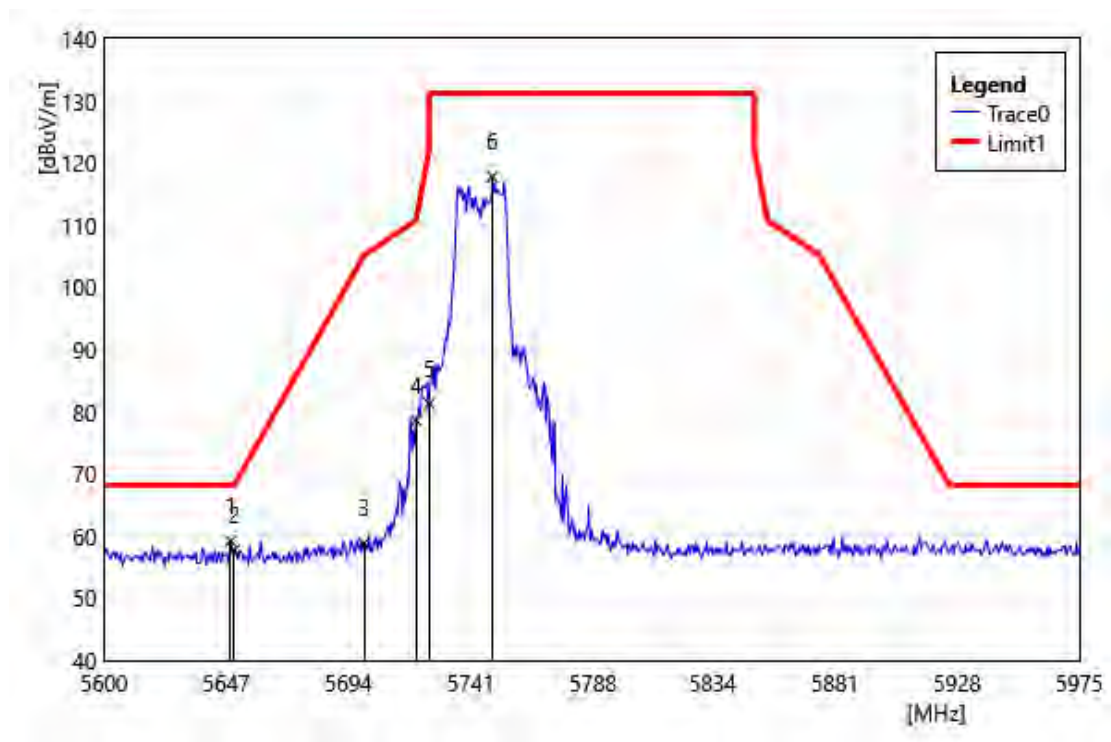


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.75	59.80	-0.58	59.22	68.20	-8.98	PEAK
2	5650.00	58.29	-0.58	57.71	68.20	-10.49	PEAK
3	5700.00	59.26	-0.42	58.84	105.20	-46.36	PEAK
4	5720.00	78.80	-0.20	78.60	110.80	-32.20	PEAK
5	5725.00	81.46	-0.14	81.32	122.20	-40.88	PEAK
6	5749.25	117.66	0.13	117.79	131.20	-13.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

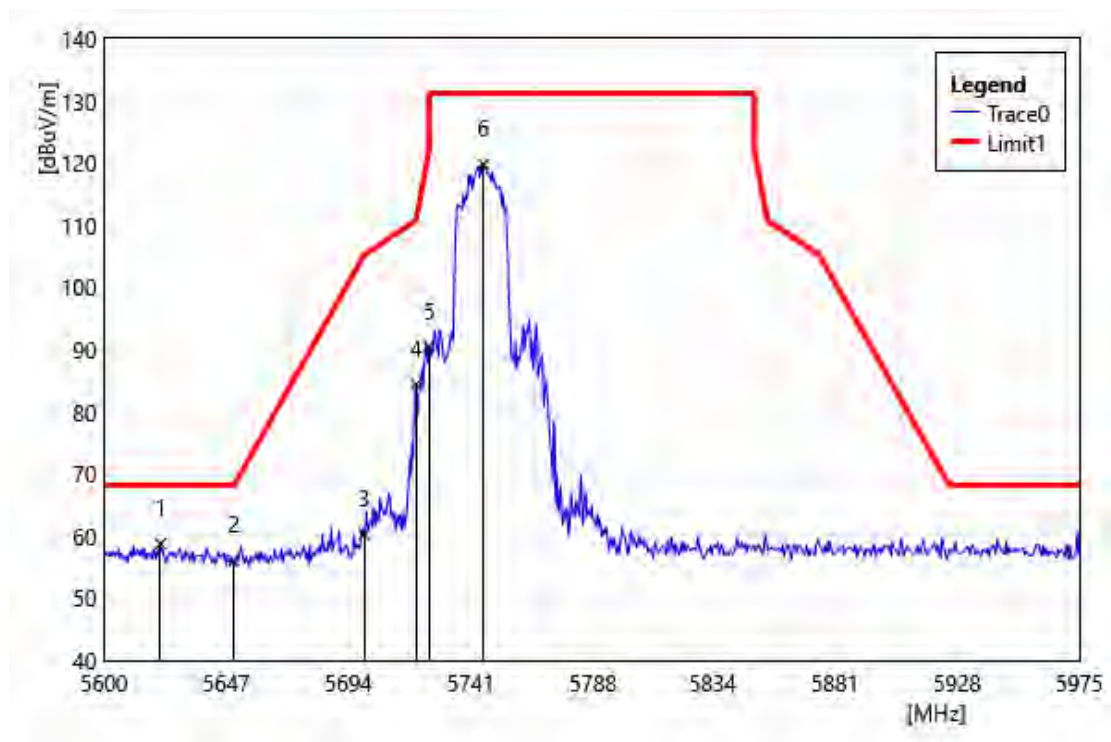

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5621.75	59.32	-0.55	58.77	68.20	-9.43	PEAK
2	5650.00	56.65	-0.58	56.07	68.20	-12.13	PEAK
3	5700.00	60.71	-0.42	60.28	105.20	-44.92	PEAK
4	5720.00	84.58	-0.20	84.38	110.80	-26.42	PEAK
5	5725.00	90.66	-0.14	90.52	122.20	-31.68	PEAK
6	5745.88	119.67	0.09	119.76	131.20	-11.44	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

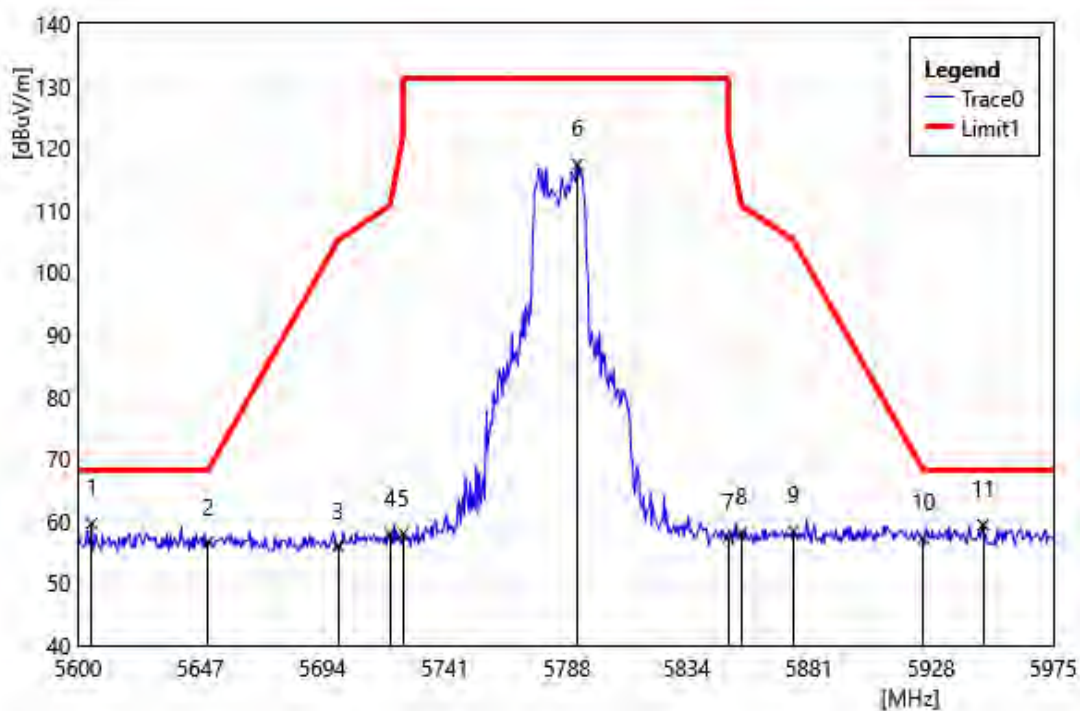

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5605.25	60.17	-0.54	59.63	68.20	-8.57	PEAK
2	5650.00	57.20	-0.58	56.62	68.20	-11.58	PEAK
3	5700.00	56.40	-0.42	55.98	105.20	-49.22	PEAK
4	5720.00	58.14	-0.20	57.94	110.80	-52.86	PEAK
5	5725.00	58.17	-0.14	58.03	122.20	-64.17	PEAK
6	5792.00	117.13	0.27	117.40	131.20	-13.80	PEAK
7	5850.00	56.93	0.45	57.38	122.20	-64.82	PEAK
8	5855.00	57.66	0.47	58.13	110.80	-52.67	PEAK
9	5875.00	57.89	0.58	58.47	105.20	-46.73	PEAK
10	5925.00	56.66	0.63	57.29	68.20	-10.91	PEAK
11	5948.00	58.81	0.57	59.38	68.20	-8.82	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

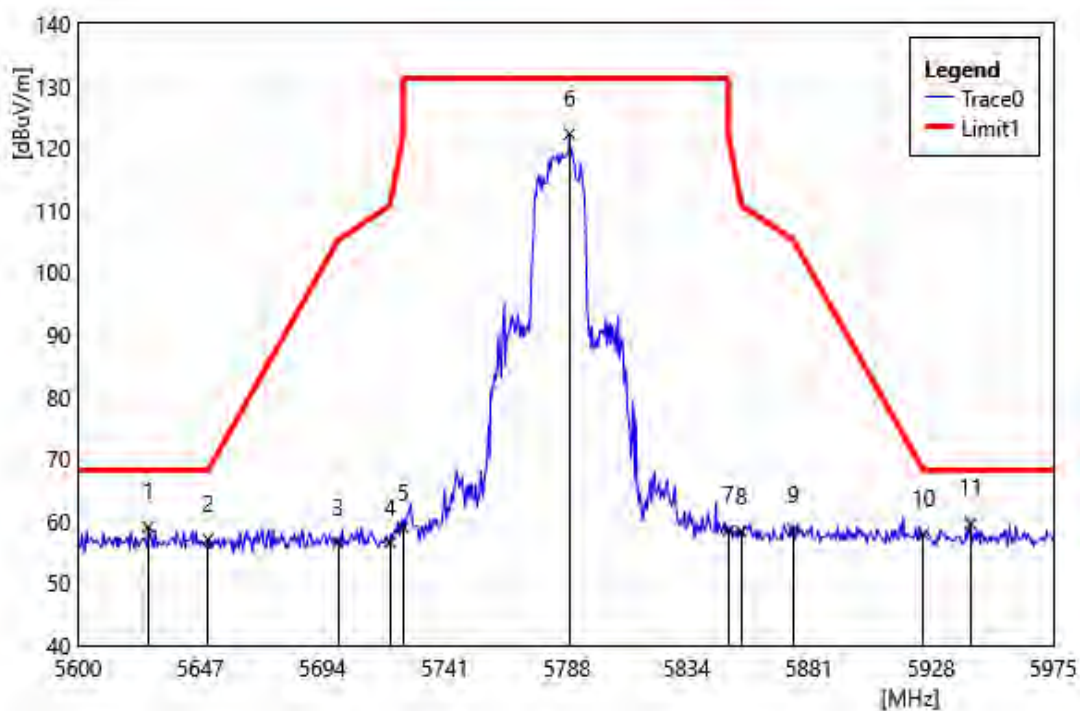

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5627.00	59.62	-0.56	59.06	68.20	-9.14	PEAK
2	5650.00	57.66	-0.58	57.08	68.20	-11.12	PEAK
3	5700.00	56.97	-0.42	56.55	105.20	-48.65	PEAK
4	5720.00	56.81	-0.20	56.61	110.80	-54.19	PEAK
5	5725.00	59.12	-0.14	58.98	122.20	-63.22	PEAK
6	5789.00	122.02	0.26	122.28	131.20	-8.92	PEAK
7	5850.00	58.00	0.45	58.45	122.20	-63.75	PEAK
8	5855.00	57.87	0.47	58.34	110.80	-52.46	PEAK
9	5875.00	58.04	0.58	58.62	105.20	-46.58	PEAK
10	5925.00	57.28	0.63	57.91	68.20	-10.29	PEAK
11	5943.13	59.08	0.58	59.66	68.20	-8.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825 MHz		
Polarization:	Vertical		
Remark:			

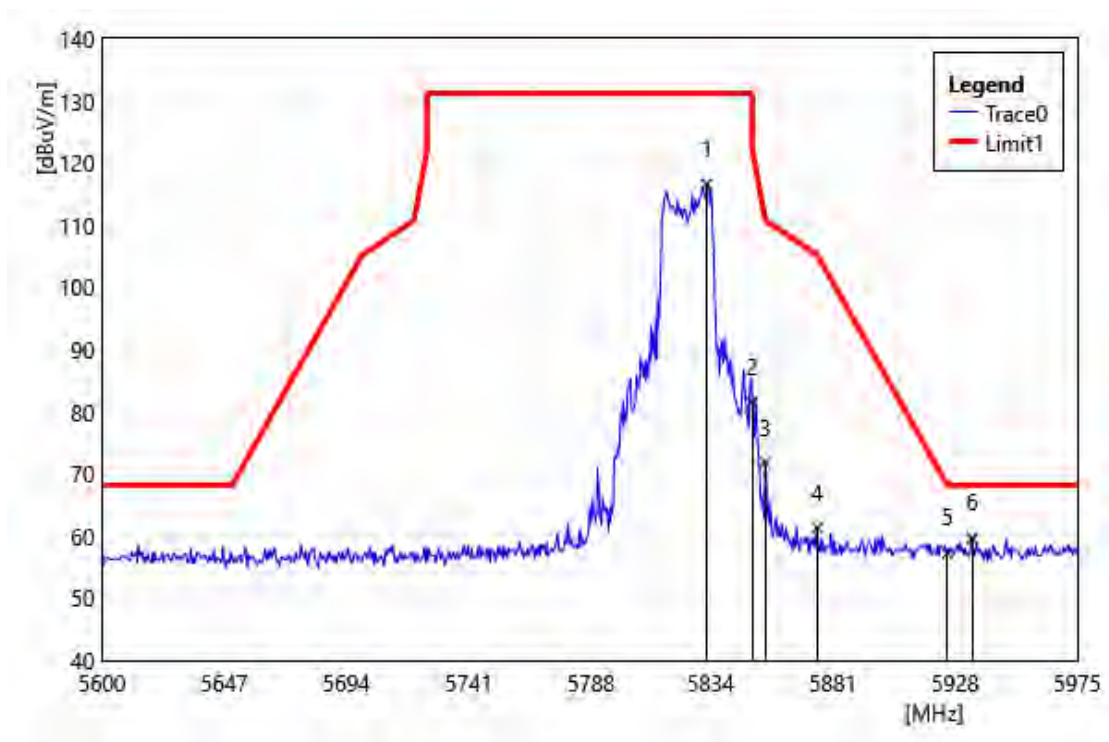


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5832.50	116.20	0.39	116.59	131.20	-14.61	PEAK
2	5850.00	81.08	0.45	81.53	122.20	-40.67	PEAK
3	5855.00	71.33	0.47	71.80	110.80	-39.00	PEAK
4	5875.00	60.78	0.58	61.36	105.20	-43.84	PEAK
5	5925.00	56.64	0.63	57.27	68.20	-10.93	PEAK
6	5934.50	59.02	0.61	59.63	68.20	-8.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

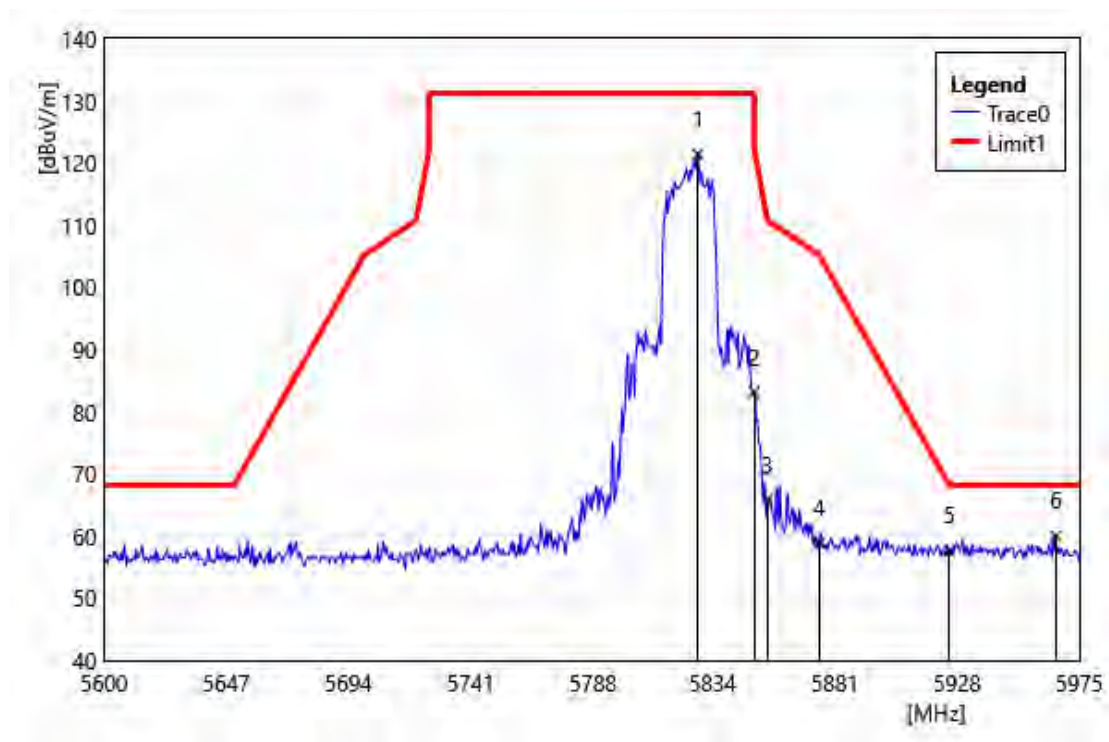


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5828.38	121.02	0.38	121.40	131.20	-9.80	PEAK
2	5850.00	82.67	0.45	83.12	122.20	-39.08	PEAK
3	5855.00	65.35	0.47	65.82	110.80	-44.98	PEAK
4	5875.00	58.29	0.58	58.87	105.20	-46.33	PEAK
5	5925.00	56.96	0.63	57.59	68.20	-10.61	PEAK
6	5966.00	59.47	0.55	60.02	68.20	-8.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510 MHz		
Polarization:	Vertical		
Remark:			

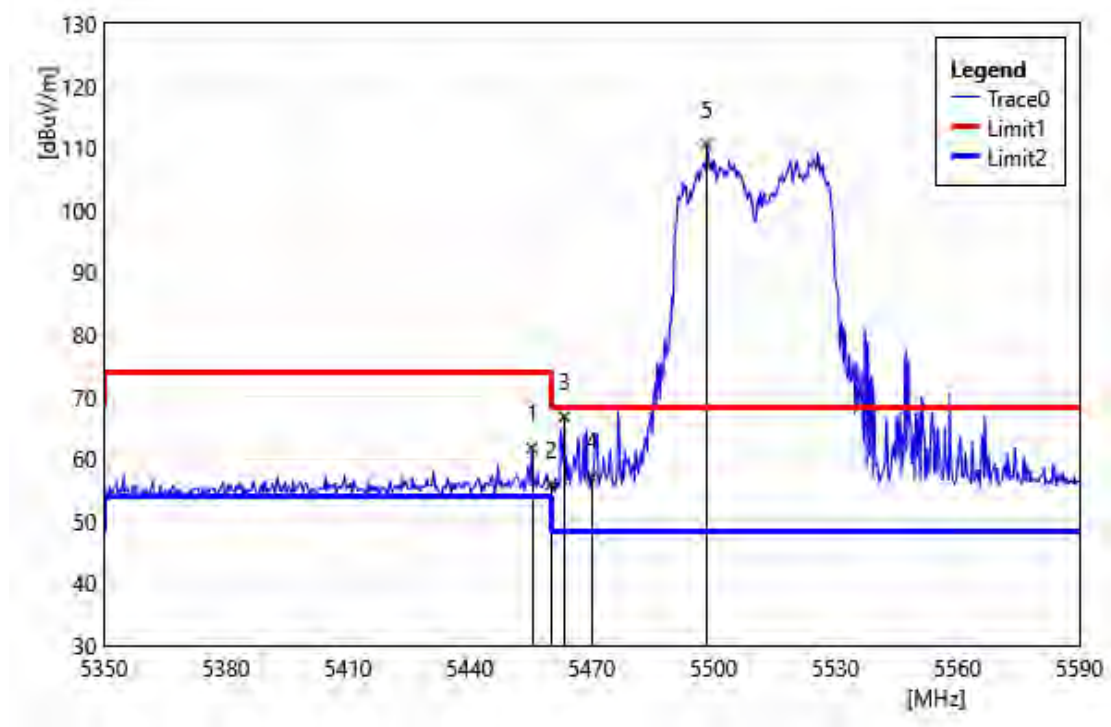


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.36	62.14	-0.41	61.73	74.00	-12.27	PEAK
2	5460.00	56.26	-0.41	55.85	74.00	-18.15	PEAK
3	5463.28	67.16	-0.42	66.74	68.20	-1.46	PEAK
4	5470.00	57.48	-0.42	57.06	68.20	-11.14	PEAK
5	5498.32	111.00	-0.45	110.55	68.20	42.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510 MHz		
Polarization:	Horizontal		
Remark:			

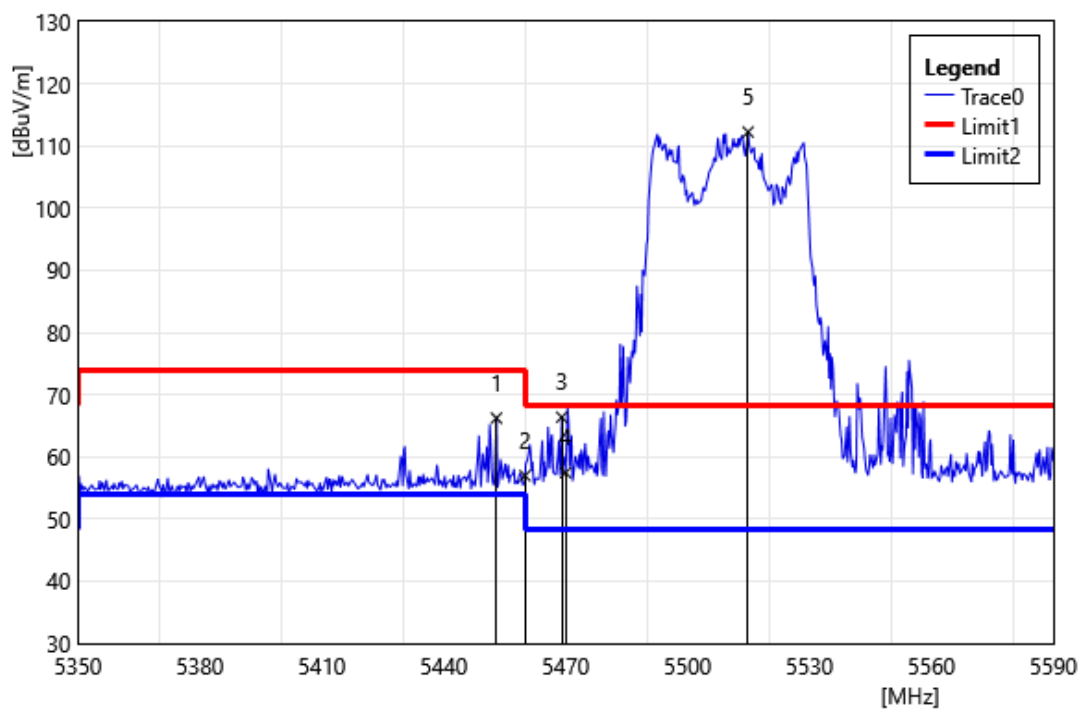


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.96	66.65	-0.41	66.24	74.00	-7.76	PEAK
2	5460.00	57.38	-0.41	56.97	74.00	-17.03	PEAK
3	5469.04	66.81	-0.42	66.39	68.20	-1.81	PEAK
4	5470.00	57.88	-0.42	57.46	68.20	-10.74	PEAK
5	5514.88	112.71	-0.46	112.26	68.20	44.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510 MHz		
Polarization:	Vertical		
Remark:			

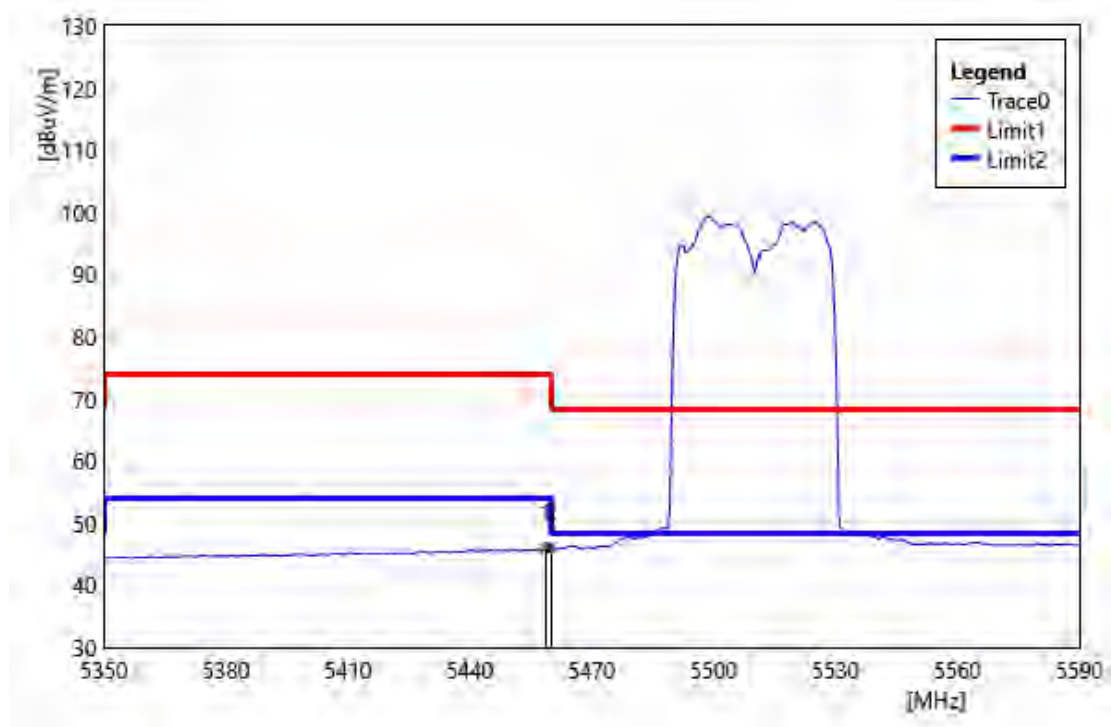


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	46.40	-0.41	45.99	54.00	-8.01	AVG
2	5460.00	46.46	-0.41	46.05	54.00	-7.95	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510 MHz		
Polarization:	Horizontal		
Remark:			

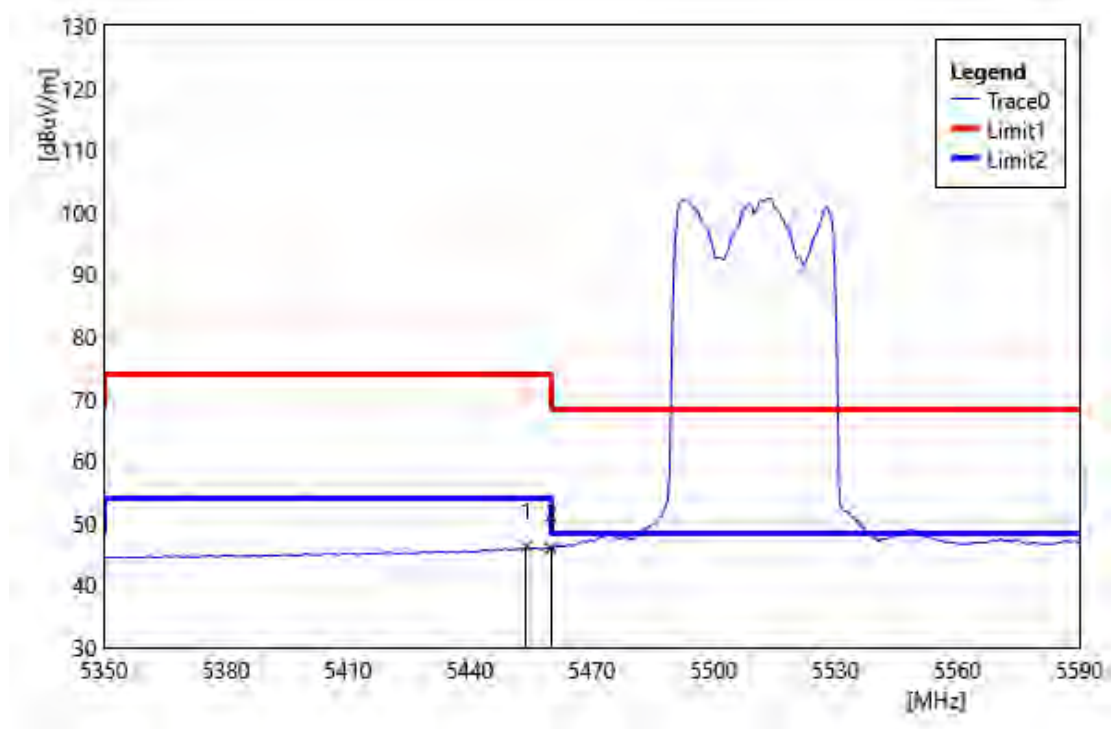


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.92	46.64	-0.41	46.24	54.00	-7.77	AVG
2	5460.00	46.38	-0.41	45.97	54.00	-8.03	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Vertical		
Remark:			

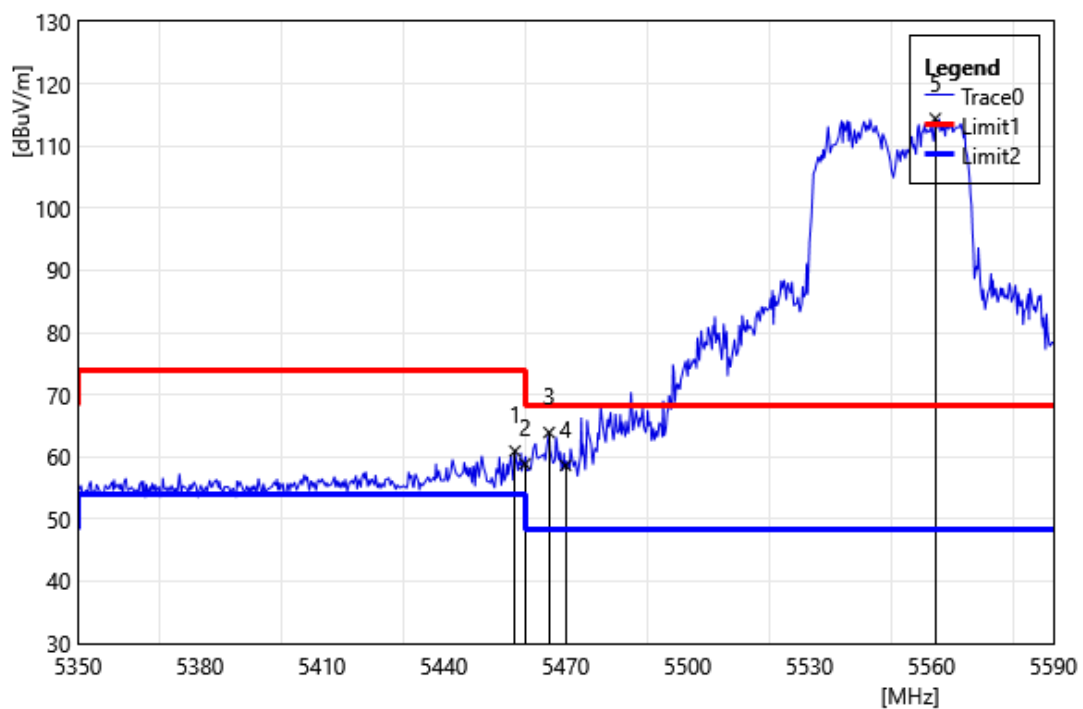


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.52	61.35	-0.41	60.94	74.00	-13.06	PEAK
2	5460.00	59.29	-0.41	58.88	74.00	-15.12	PEAK
3	5465.92	64.33	-0.42	63.91	68.20	-4.29	PEAK
4	5470.00	59.04	-0.42	58.62	68.20	-9.58	PEAK
5	5560.96	114.90	-0.50	114.40	68.20	46.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Horizontal		
Remark:			

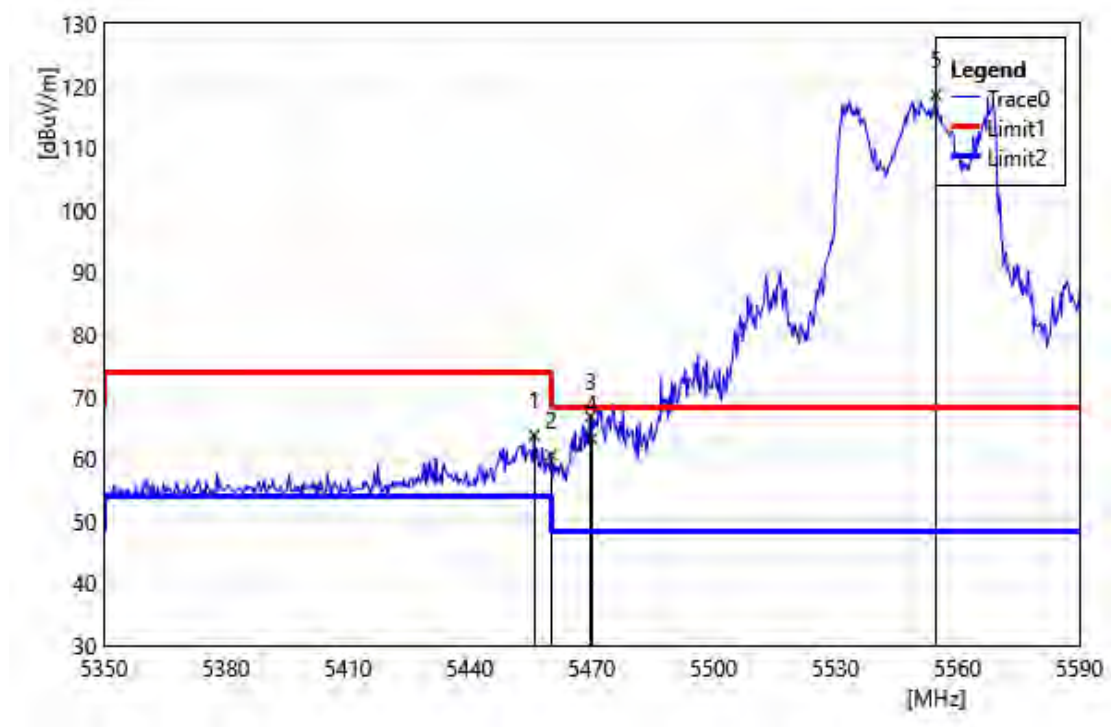


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.84	64.18	-0.41	63.77	74.00	-10.24	PEAK
2	5460.00	61.00	-0.41	60.59	74.00	-13.41	PEAK
3	5469.76	67.25	-0.42	66.83	68.20	-1.37	PEAK
4	5470.00	63.67	-0.42	63.25	68.20	-4.95	PEAK
5	5554.72	119.07	-0.50	118.57	68.20	50.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Vertical		
Remark:			

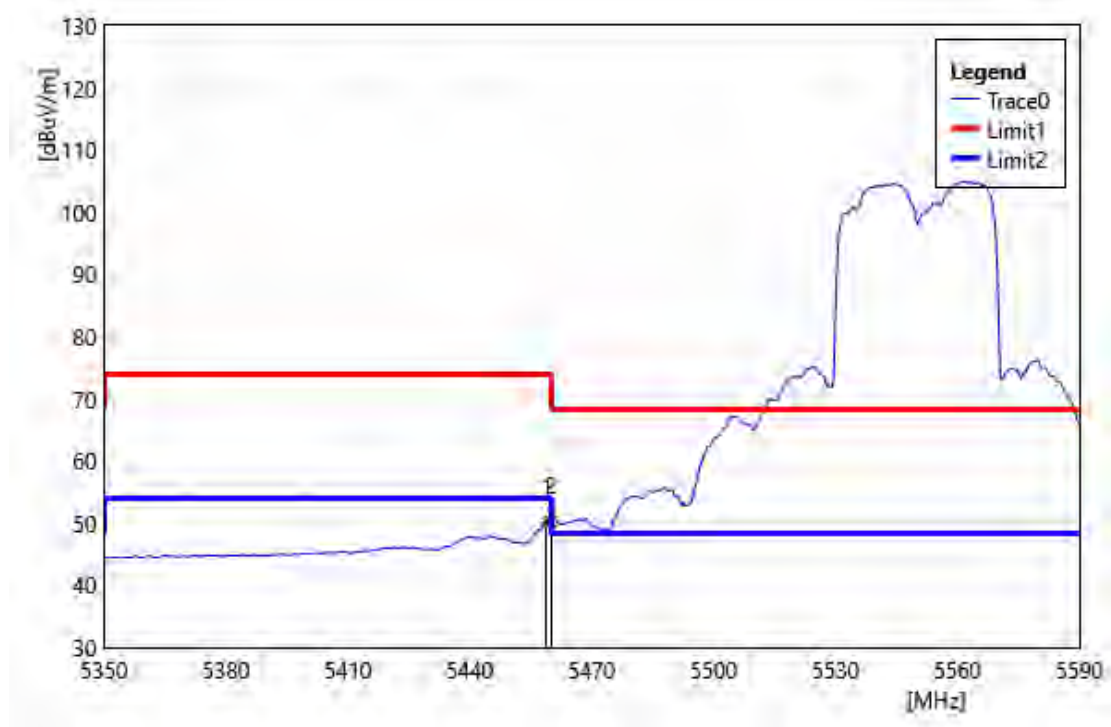


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	50.58	-0.41	50.17	54.00	-3.83	AVG
2	5460.00	50.66	-0.41	50.25	54.00	-3.75	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Horizontal		
Remark:			

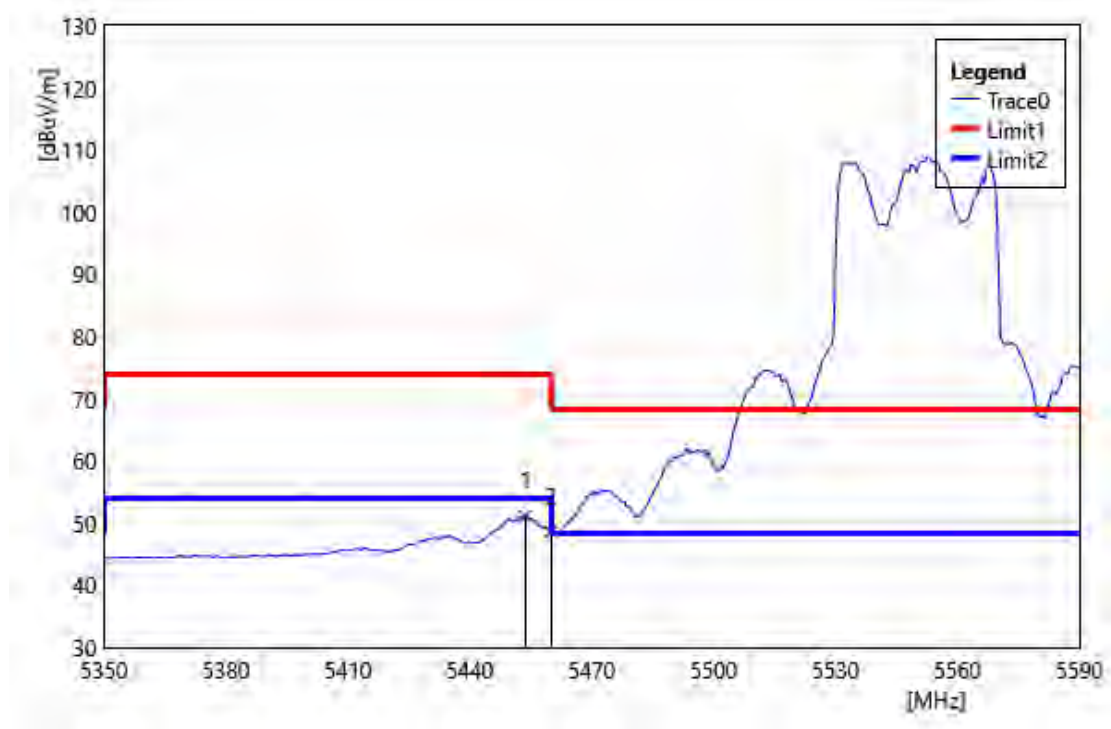


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.68	51.51	-0.41	51.10	54.00	-2.90	AVG
2	5460.00	49.03	-0.41	48.62	54.00	-5.38	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670 MHz		
Polarization:	Vertical		
Remark:			

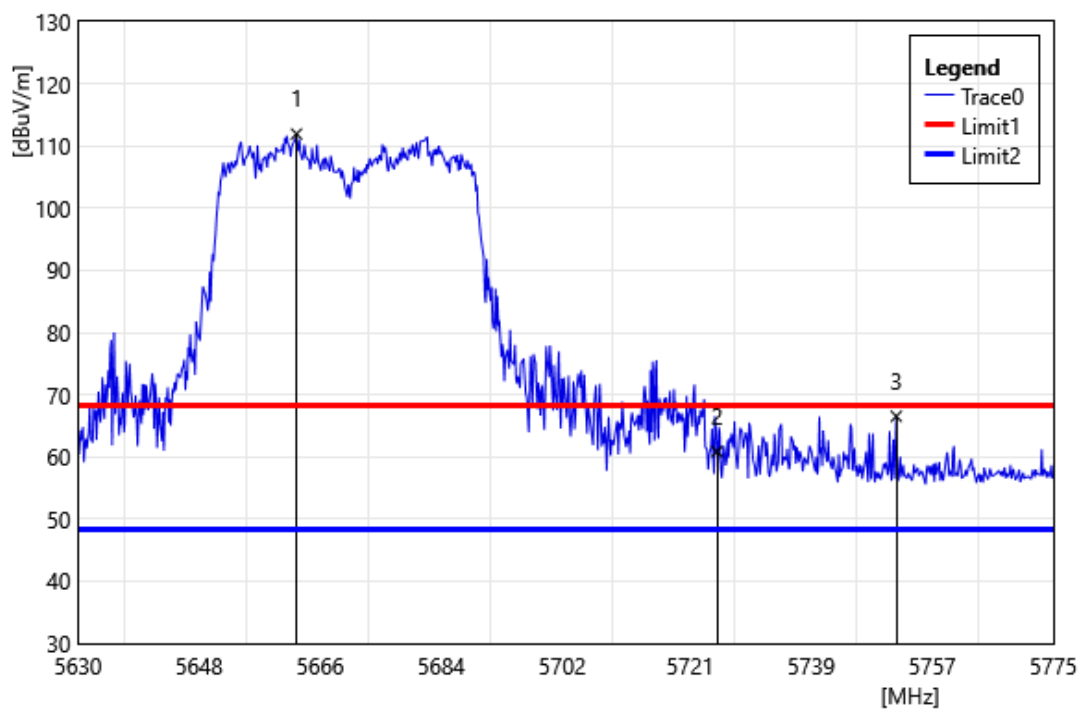


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5662.48	112.47	-0.54	111.93	68.20	43.73	PEAK
2	5725.00	61.00	-0.14	60.86	68.20	-7.34	PEAK
3	5751.66	66.40	0.14	66.54	68.20	-1.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670 MHz		
Polarization:	Horizontal		
Remark:			

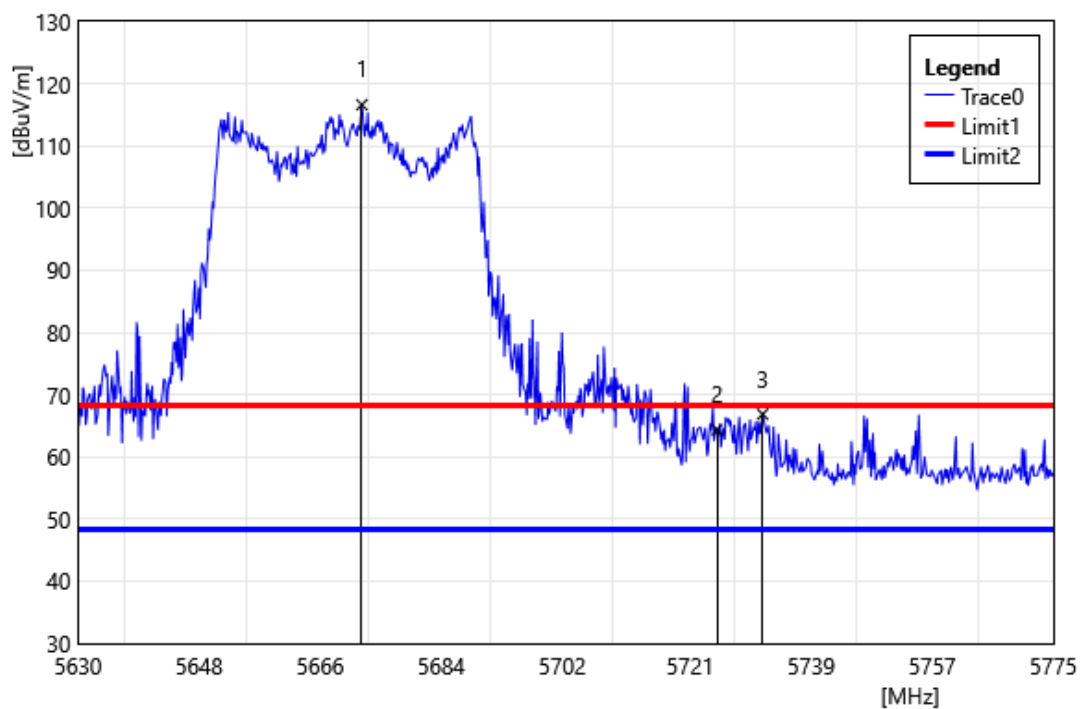


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5672.20	117.15	-0.51	116.64	68.20	48.44	PEAK
2	5725.00	64.52	-0.14	64.38	68.20	-3.82	PEAK
3	5731.79	66.93	-0.07	66.86	68.20	-1.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Vertical		
Remark:			

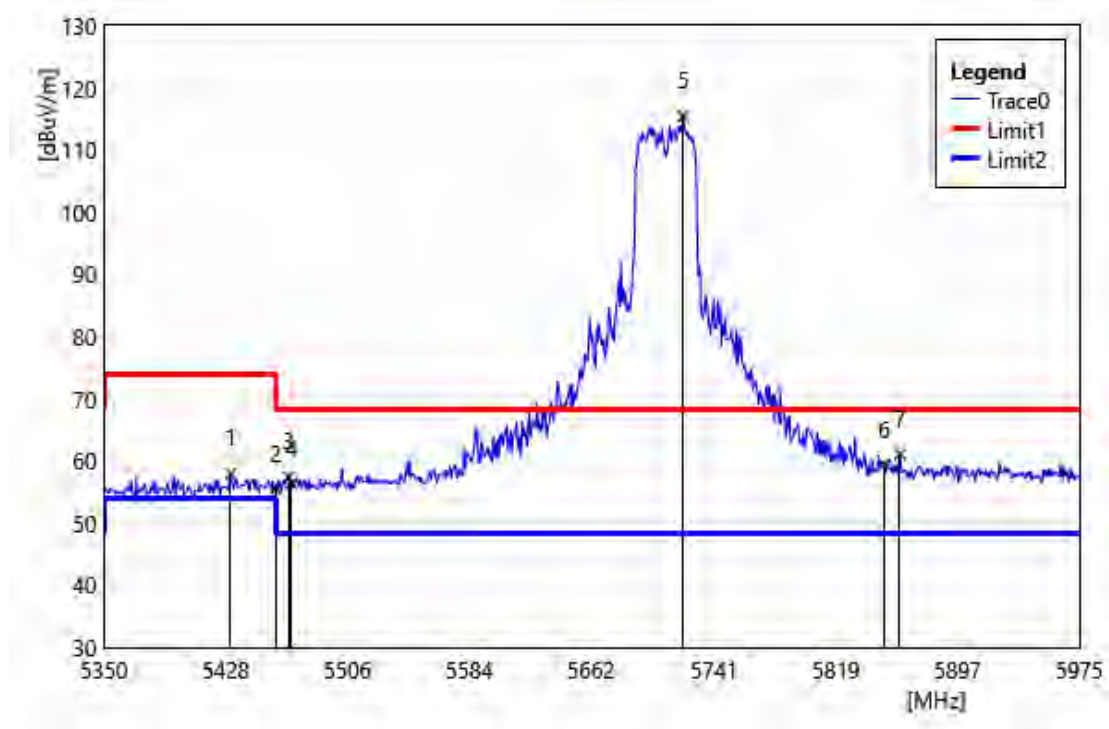


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5431.25	58.48	-0.54	57.95	74.00	-16.06	PEAK
2	5460.00	55.89	-0.41	55.48	74.00	-18.52	PEAK
3	5468.13	57.82	-0.42	57.40	68.20	-10.80	PEAK
4	5470.00	56.79	-0.42	56.37	68.20	-11.83	PEAK
5	5721.25	115.59	-0.19	115.40	68.20	47.20	PEAK
6	5850.00	58.97	0.45	59.42	68.20	-8.78	PEAK
7	5860.00	60.60	0.50	61.10	68.20	-7.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Horizontal		
Remark:			

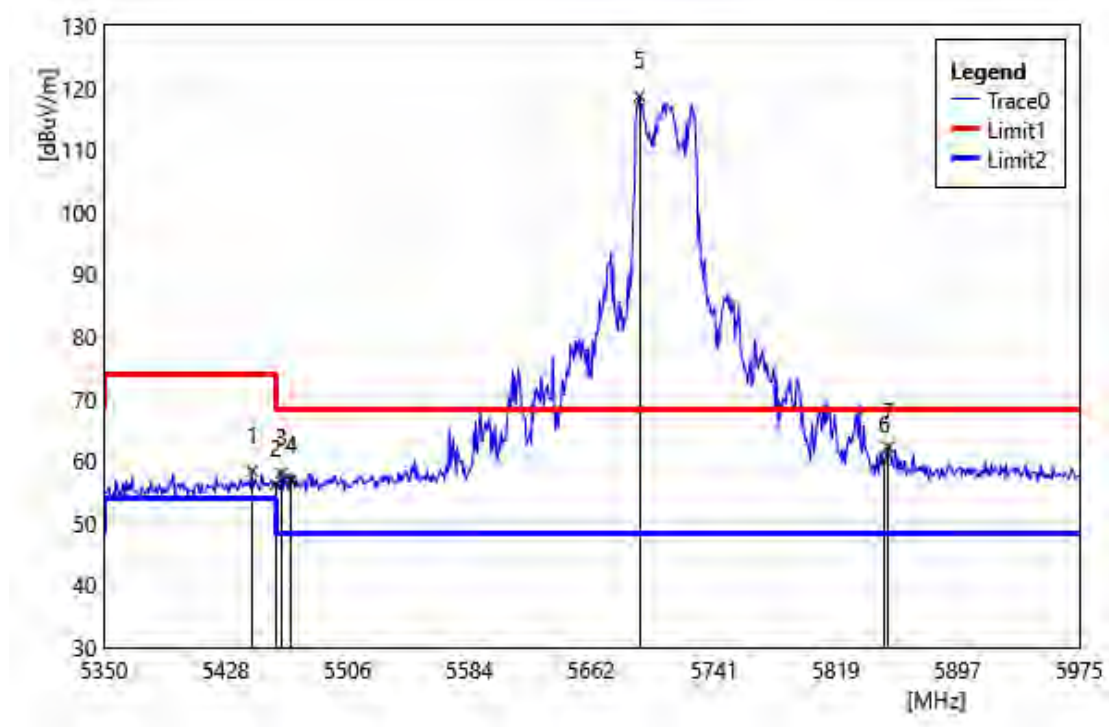


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5445.00	58.80	-0.44	58.36	74.00	-15.64	PEAK
2	5460.00	56.63	-0.41	56.22	74.00	-17.78	PEAK
3	5463.75	58.47	-0.42	58.05	68.20	-10.15	PEAK
4	5470.00	57.39	-0.42	56.97	68.20	-11.23	PEAK
5	5693.13	119.14	-0.44	118.70	68.20	50.50	PEAK
6	5850.00	59.69	0.45	60.14	68.20	-8.06	PEAK
7	5852.50	61.83	0.46	62.29	68.20	-5.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Vertical		
Remark:			

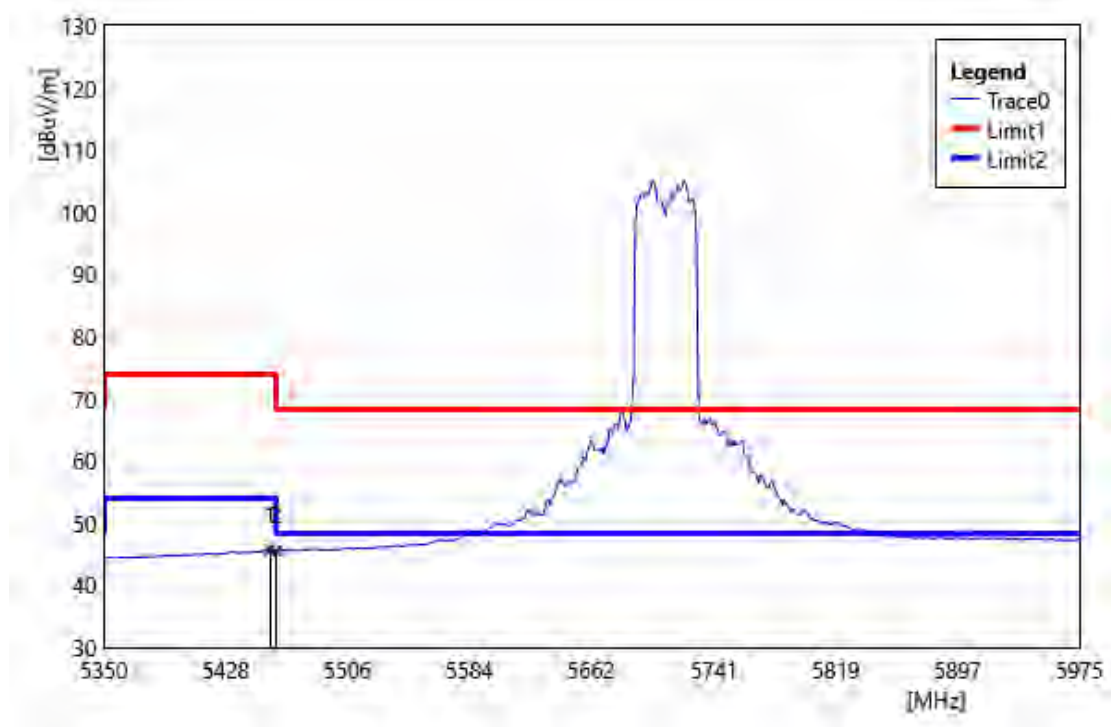


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	46.11	-0.41	45.70	54.00	-8.30	AVG
2	5460.00	45.91	-0.41	45.50	54.00	-8.50	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710 MHz		
Polarization:	Horizontal		
Remark:			

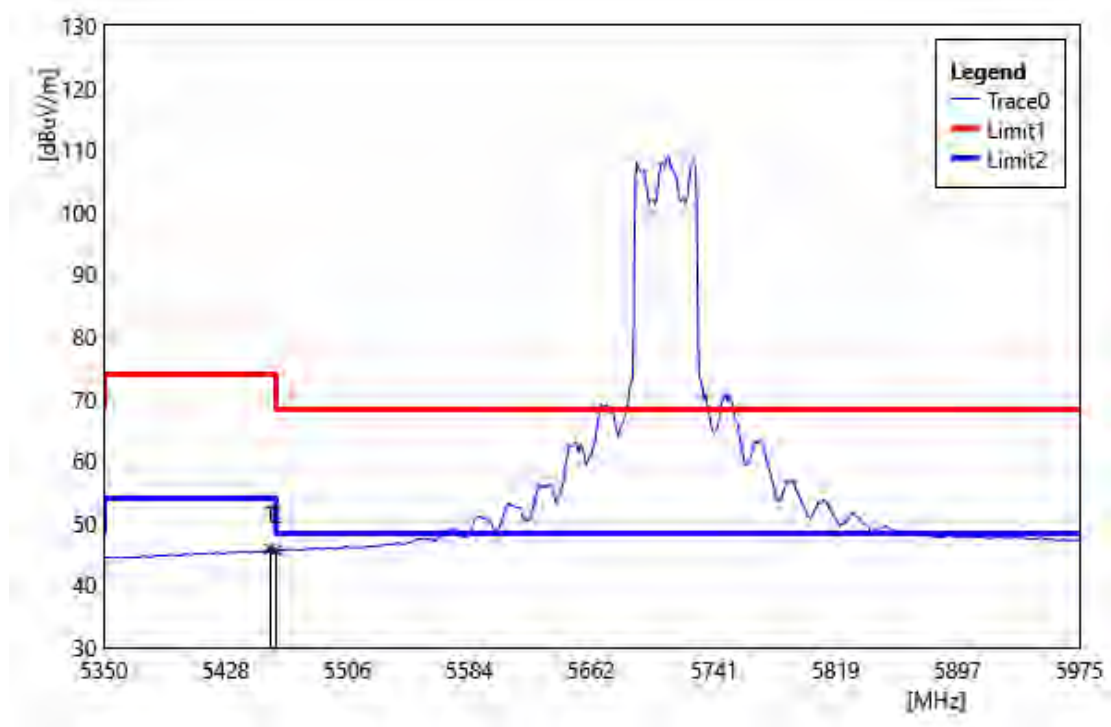


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	46.21	-0.41	45.80	54.00	-8.20	AVG
2	5460.00	46.02	-0.41	45.61	54.00	-8.39	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755 MHz		
Polarization:	Vertical		
Remark:			

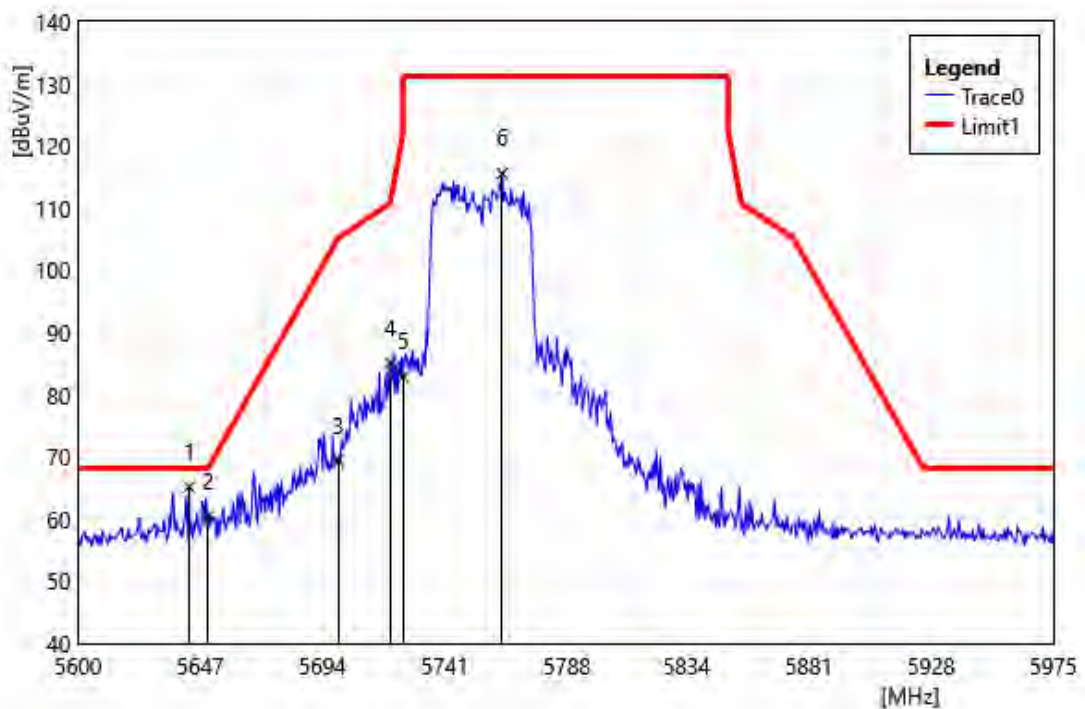


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.75	65.75	-0.57	65.18	68.20	-3.02	PEAK
2	5650.00	61.00	-0.58	60.42	68.20	-7.78	PEAK
3	5700.00	69.80	-0.42	69.38	105.20	-35.82	PEAK
4	5720.00	85.27	-0.20	85.07	110.80	-25.73	PEAK
5	5725.00	83.03	-0.14	82.89	122.20	-39.31	PEAK
6	5763.13	115.37	0.18	115.55	131.20	-15.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

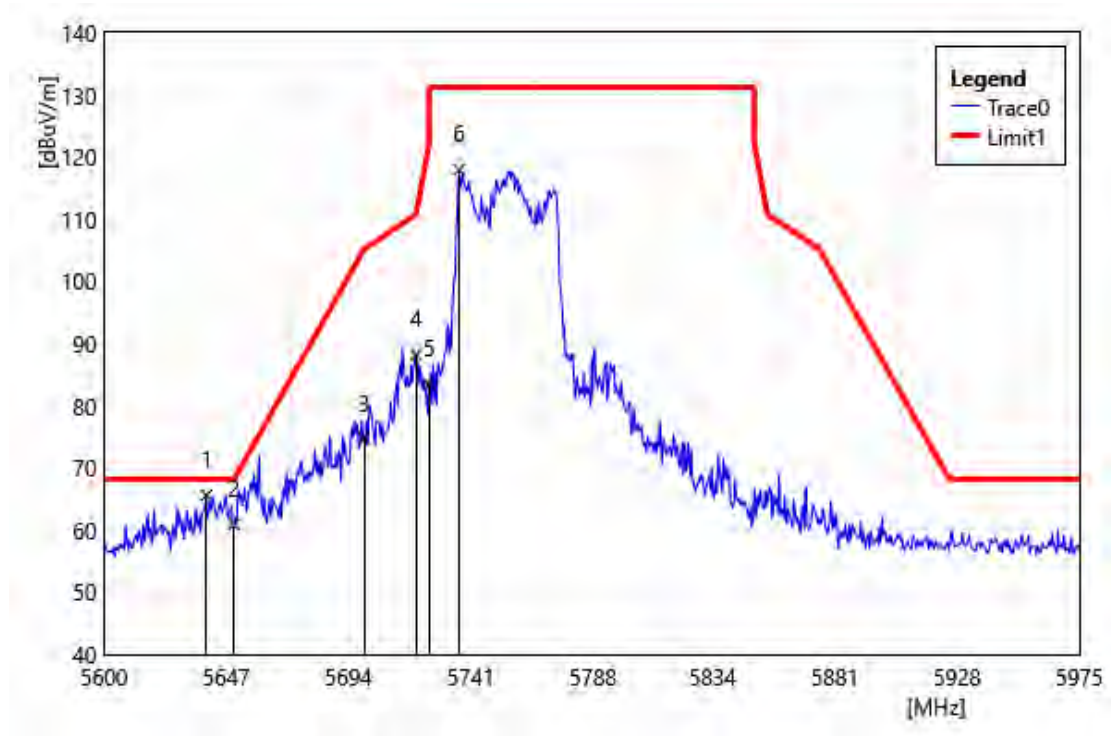


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5639.38	66.17	-0.57	65.60	68.20	-2.60	PEAK
2	5650.00	61.52	-0.58	60.94	68.20	-7.26	PEAK
3	5700.00	75.18	-0.42	74.76	105.20	-30.44	PEAK
4	5720.00	88.44	-0.20	88.24	110.80	-22.56	PEAK
5	5725.00	83.66	-0.14	83.52	122.20	-38.68	PEAK
6	5736.50	118.02	-0.02	118.00	131.20	-13.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Vertical		
Remark:			

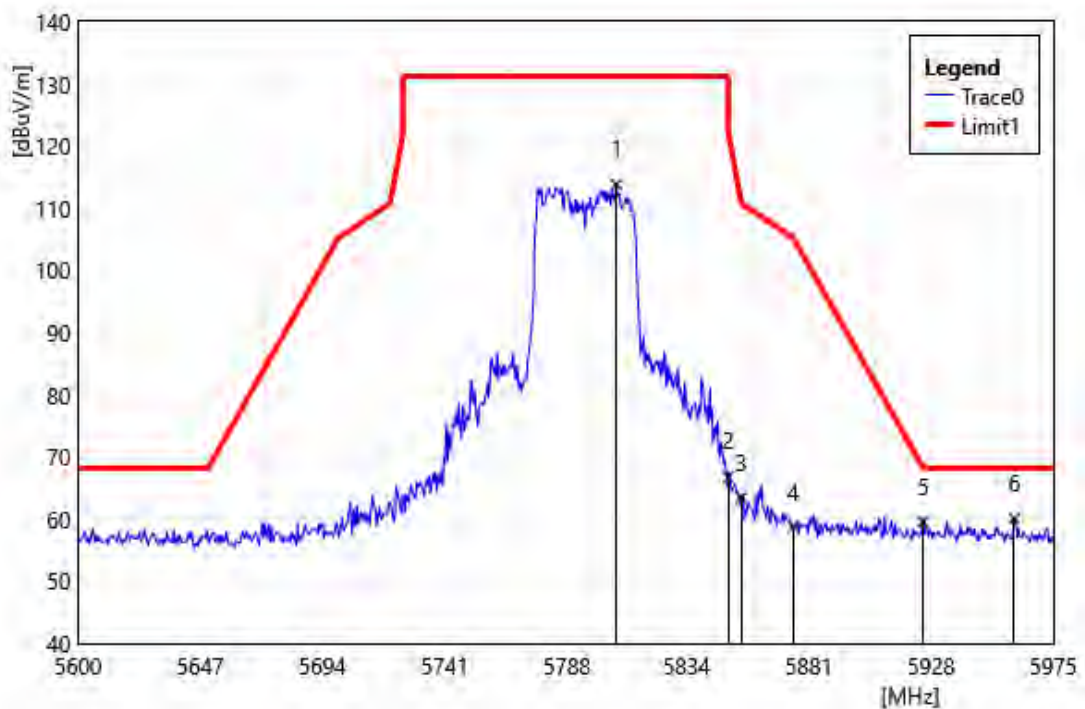


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5807.00	113.51	0.31	113.82	131.20	-17.38	PEAK
2	5850.00	66.32	0.45	66.77	122.20	-55.43	PEAK
3	5855.00	62.92	0.47	63.39	110.80	-47.41	PEAK
4	5875.00	58.13	0.58	58.71	105.20	-46.49	PEAK
5	5925.00	58.91	0.63	59.54	68.20	-8.66	PEAK
6	5960.00	59.55	0.55	60.10	68.20	-8.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

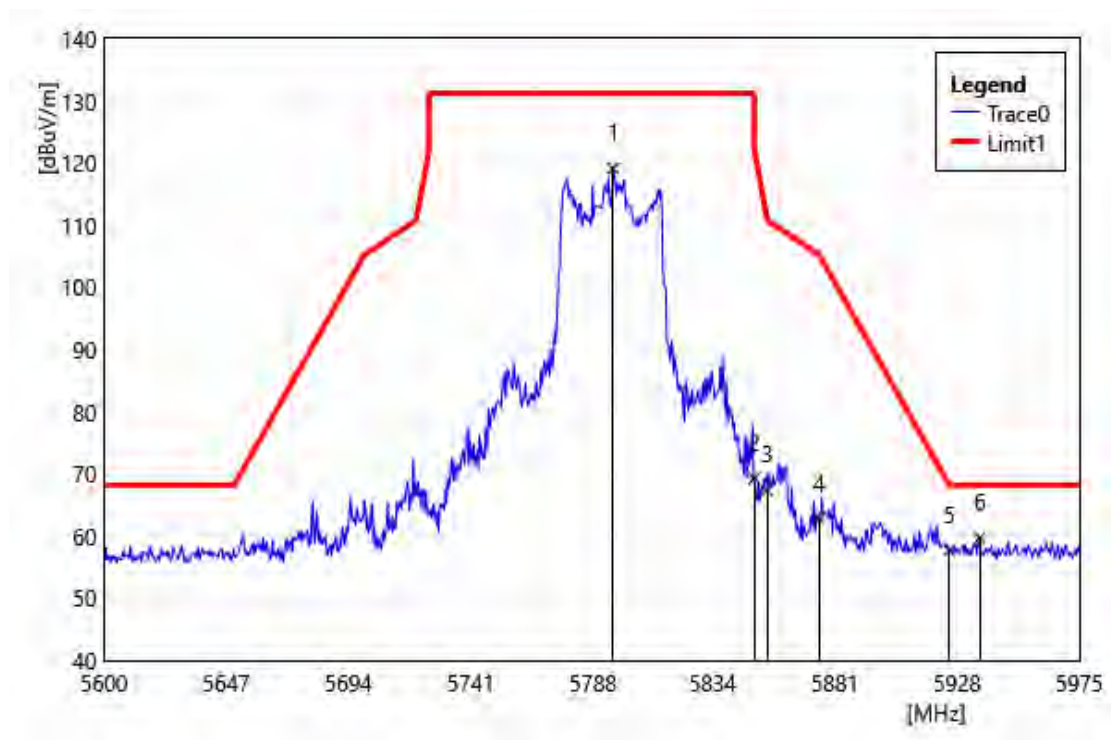


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5795.75	118.85	0.28	119.13	131.20	-12.07	PEAK
2	5850.00	68.83	0.45	69.28	122.20	-52.92	PEAK
3	5855.00	66.89	0.47	67.36	110.80	-43.44	PEAK
4	5875.00	62.27	0.58	62.85	105.20	-42.35	PEAK
5	5925.00	57.08	0.63	57.71	68.20	-10.49	PEAK
6	5936.75	59.16	0.60	59.76	68.20	-8.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Vertical		
Remark:			

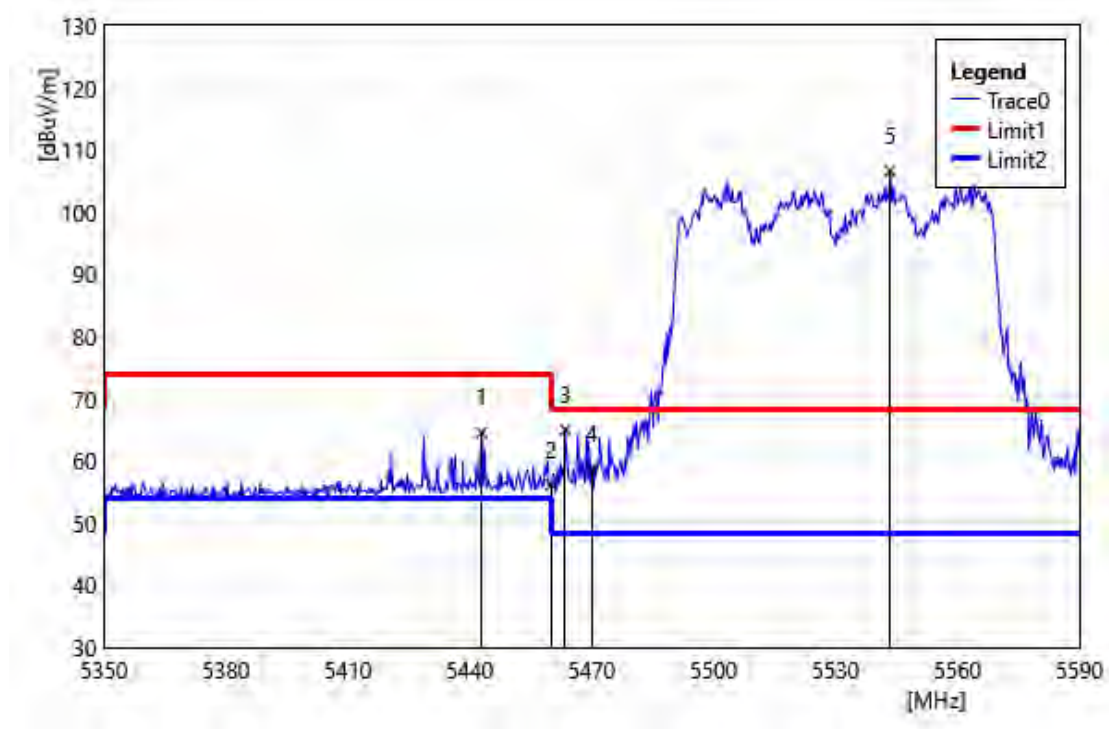


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.88	64.96	-0.45	64.51	74.00	-9.49	PEAK
2	5460.00	56.55	-0.41	56.14	74.00	-17.86	PEAK
3	5463.52	65.45	-0.42	65.03	68.20	-3.18	PEAK
4	5470.00	59.18	-0.42	58.76	68.20	-9.44	PEAK
5	5543.44	107.14	-0.49	106.65	68.20	38.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Horizontal		
Remark:			

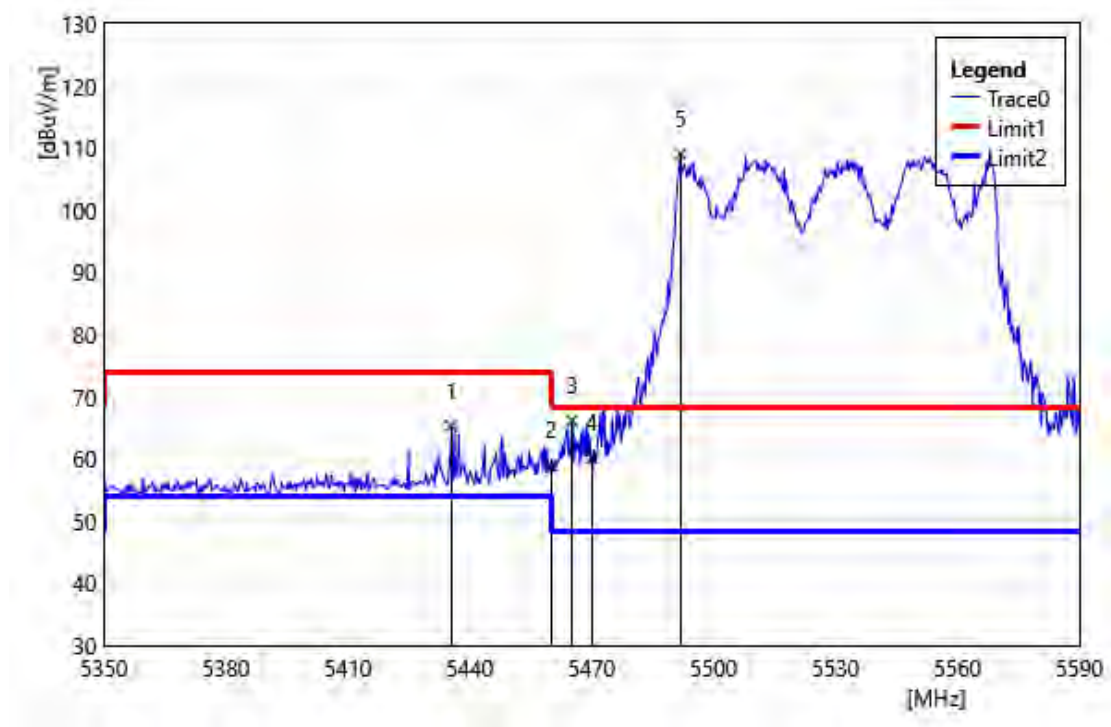


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5435.44	65.83	-0.51	65.32	74.00	-8.68	PEAK
2	5460.00	59.27	-0.41	58.86	74.00	-15.14	PEAK
3	5465.20	66.58	-0.42	66.16	68.20	-2.04	PEAK
4	5470.00	60.51	-0.42	60.09	68.20	-8.11	PEAK
5	5491.84	109.56	-0.44	109.12	68.20	40.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Vertical		
Remark:			

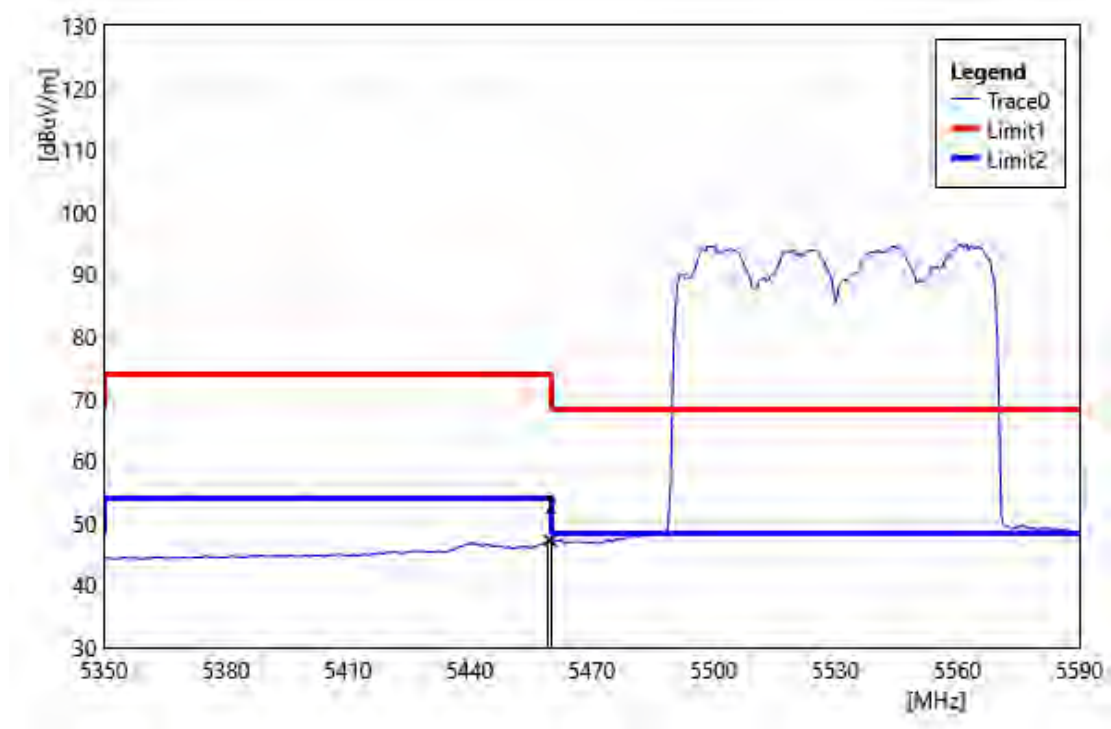


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	47.71	-0.41	47.30	54.00	-6.70	AVG
2	5460.00	47.56	-0.41	47.15	54.00	-6.85	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530 MHz		
Polarization:	Horizontal		
Remark:			

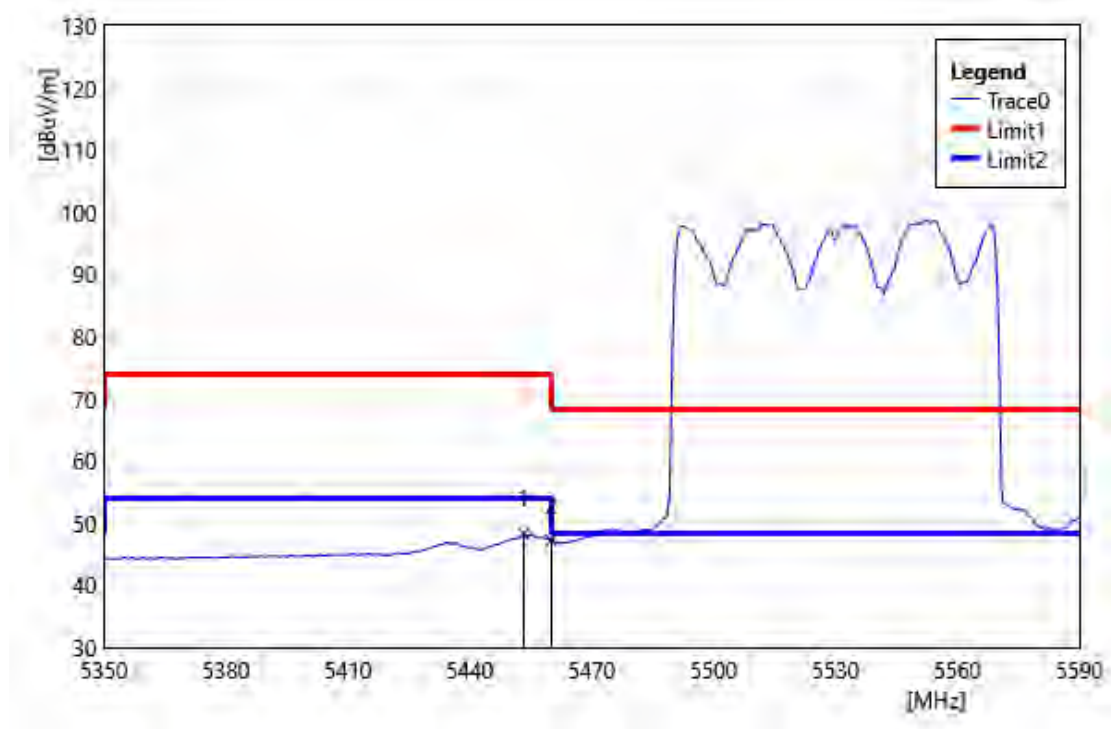


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.20	48.72	-0.41	48.31	54.00	-5.69	AVG
2	5460.00	47.63	-0.41	47.22	54.00	-6.78	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Vertical		
Remark:			

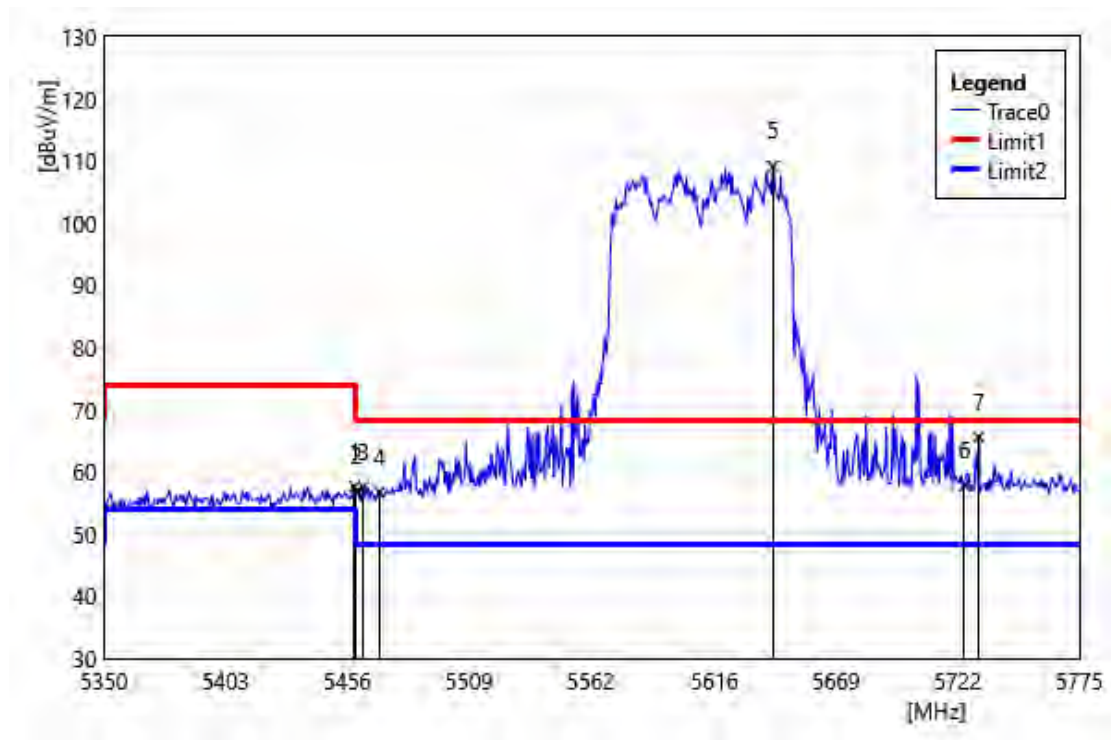


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.23	58.03	-0.41	57.62	74.00	-16.38	PEAK
2	5460.00	57.28	-0.41	56.87	74.00	-17.13	PEAK
3	5463.05	57.97	-0.42	57.55	68.20	-10.65	PEAK
4	5470.00	57.15	-0.42	56.73	68.20	-11.47	PEAK
5	5641.55	109.78	-0.57	109.21	68.20	41.01	PEAK
6	5725.00	57.91	-0.14	57.77	68.20	-10.43	PEAK
7	5731.23	65.72	-0.07	65.65	68.20	-2.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Horizontal		
Remark:			

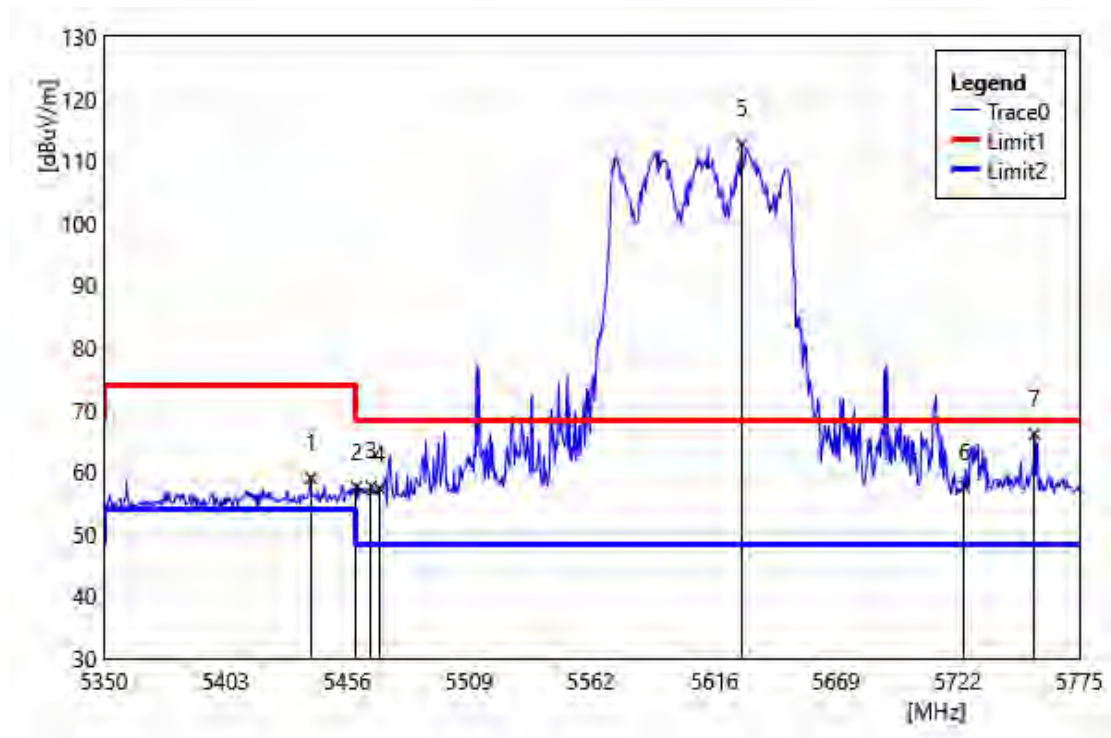


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5440.10	59.48	-0.47	59.02	74.00	-14.99	PEAK
2	5460.00	58.03	-0.41	57.62	74.00	-16.38	PEAK
3	5466.45	58.13	-0.42	57.71	68.20	-10.49	PEAK
4	5470.00	57.74	-0.42	57.32	68.20	-10.88	PEAK
5	5627.95	113.34	-0.56	112.78	68.20	44.58	PEAK
6	5725.00	57.76	-0.14	57.62	68.20	-10.58	PEAK
7	5755.45	65.93	0.15	66.09	68.20	-2.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Vertical		
Remark:			

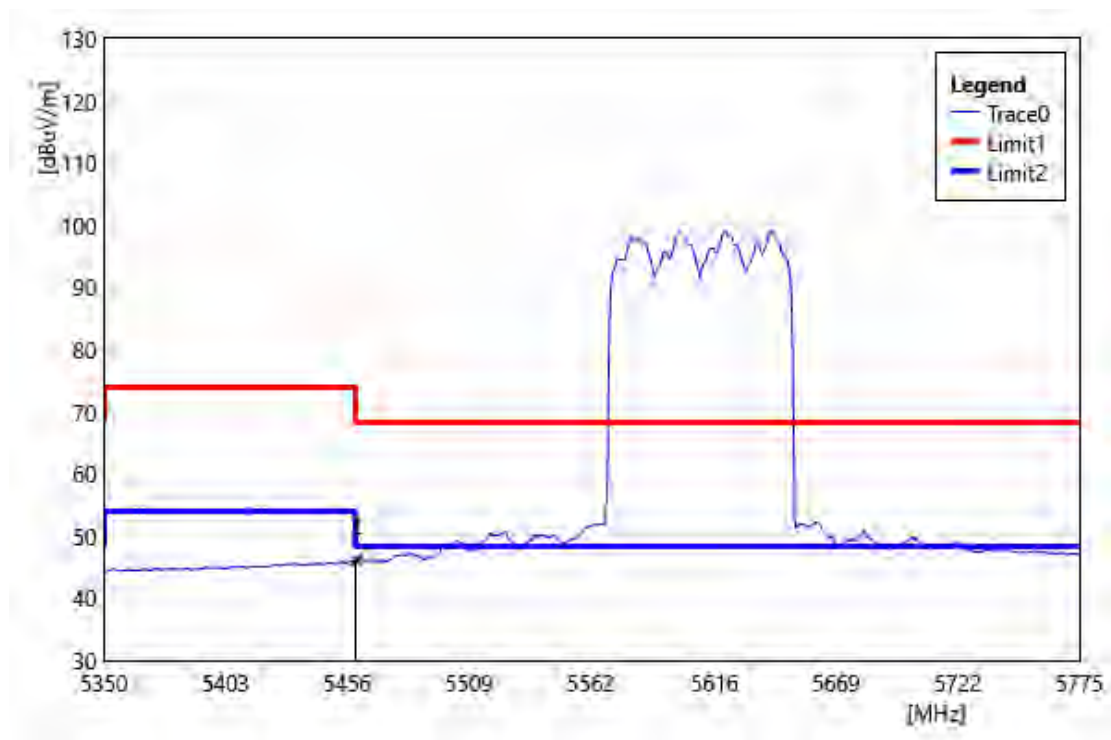


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.65	46.60	-0.41	46.19	54.00	-7.81	AVG
2	5460.00	46.40	-0.41	45.99	54.00	-8.01	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610 MHz		
Polarization:	Horizontal		
Remark:			

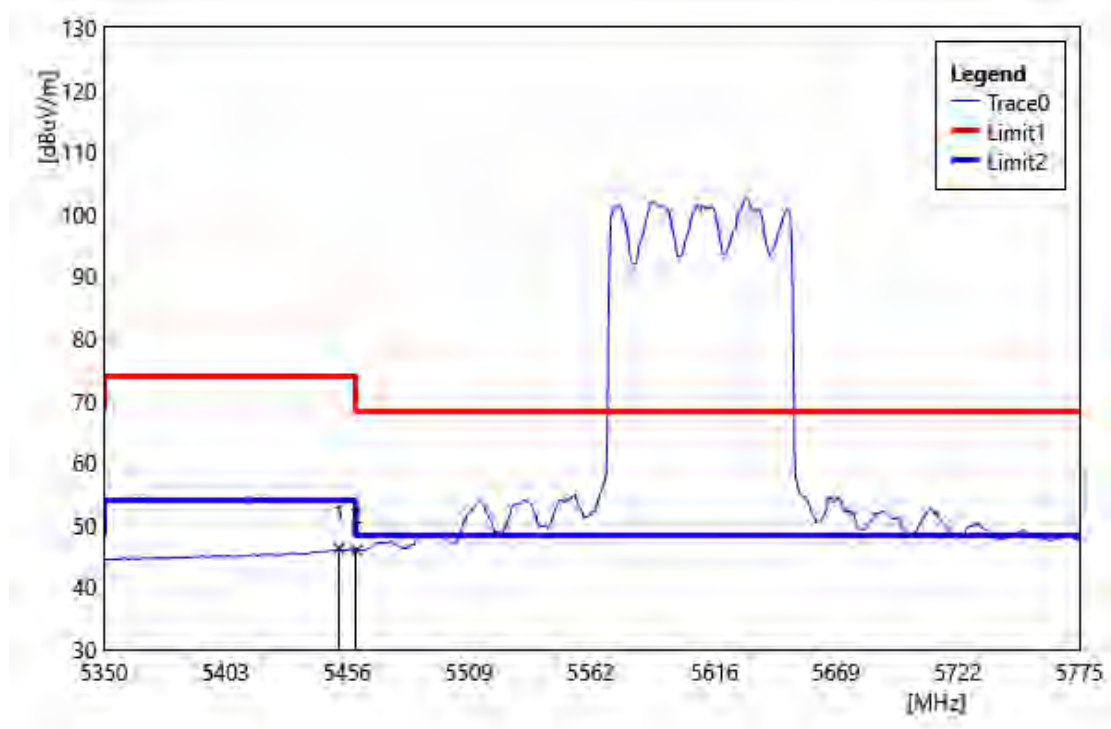


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.43	46.70	-0.41	46.29	54.00	-7.71	AVG
2	5460.00	46.38	-0.41	45.97	54.00	-8.03	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Vertical		
Remark:			

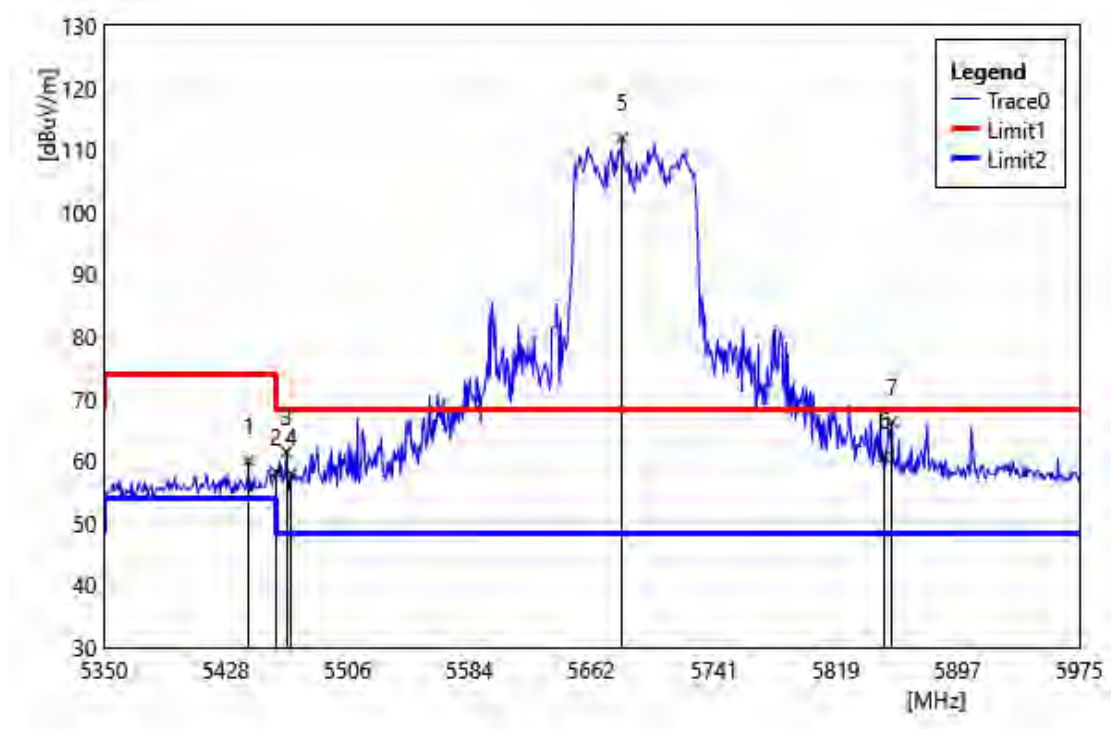


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.50	60.47	-0.46	60.01	74.00	-13.99	PEAK
2	5460.00	58.64	-0.41	58.23	74.00	-15.77	PEAK
3	5466.88	61.90	-0.42	61.48	68.20	-6.72	PEAK
4	5470.00	58.36	-0.42	57.94	68.20	-10.26	PEAK
5	5681.88	112.38	-0.48	111.90	68.20	43.70	PEAK
6	5850.00	60.18	0.45	60.63	68.20	-7.57	PEAK
7	5855.00	65.77	0.47	66.24	68.20	-1.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

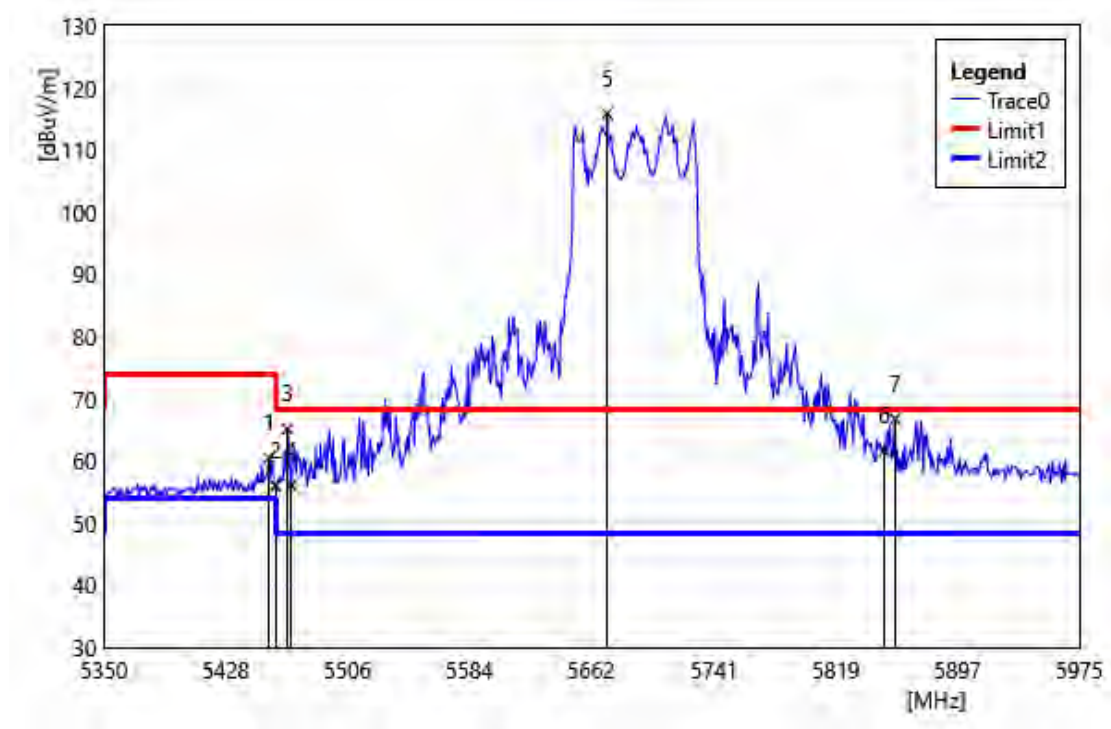


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.63	60.91	-0.41	60.50	74.00	-13.50	PEAK
2	5460.00	56.39	-0.41	55.98	74.00	-18.02	PEAK
3	5467.50	65.55	-0.42	65.13	68.20	-3.07	PEAK
4	5470.00	56.53	-0.42	56.11	68.20	-12.09	PEAK
5	5672.50	116.37	-0.51	115.86	68.20	47.66	PEAK
6	5850.00	61.27	0.45	61.72	68.20	-6.48	PEAK
7	5856.88	66.32	0.48	66.80	68.20	-1.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Vertical		
Remark:			

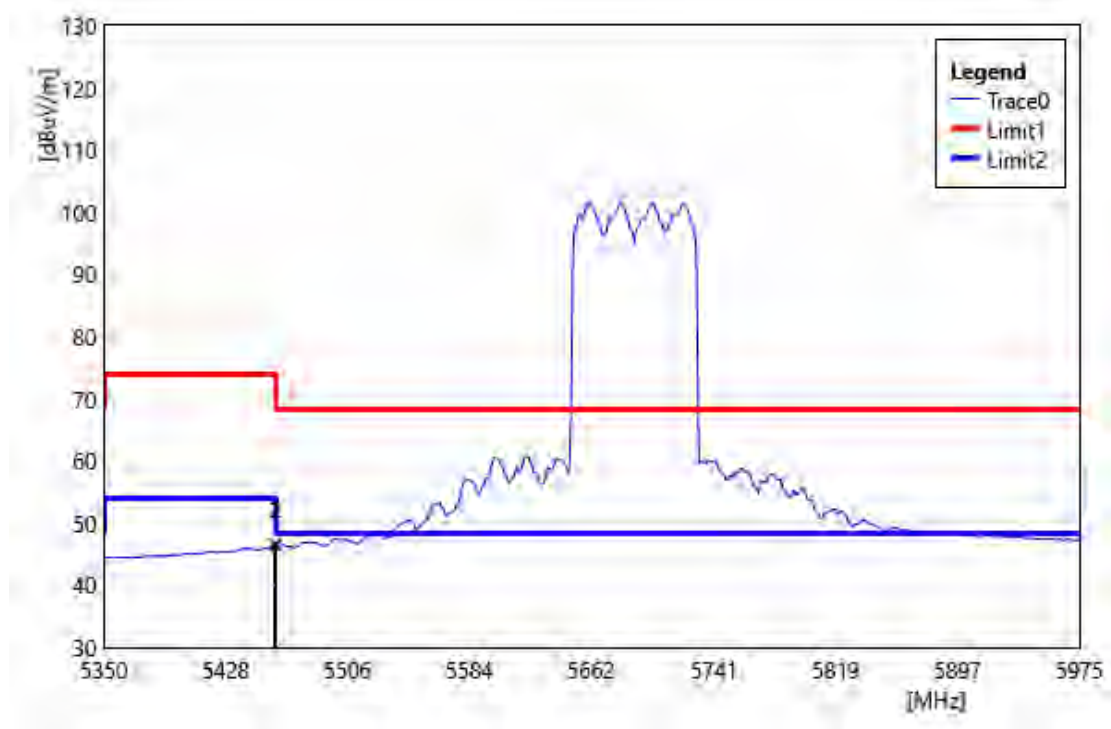


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.38	47.02	-0.41	46.61	54.00	-7.39	AVG
2	5460.00	46.79	-0.41	46.38	54.00	-7.62	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

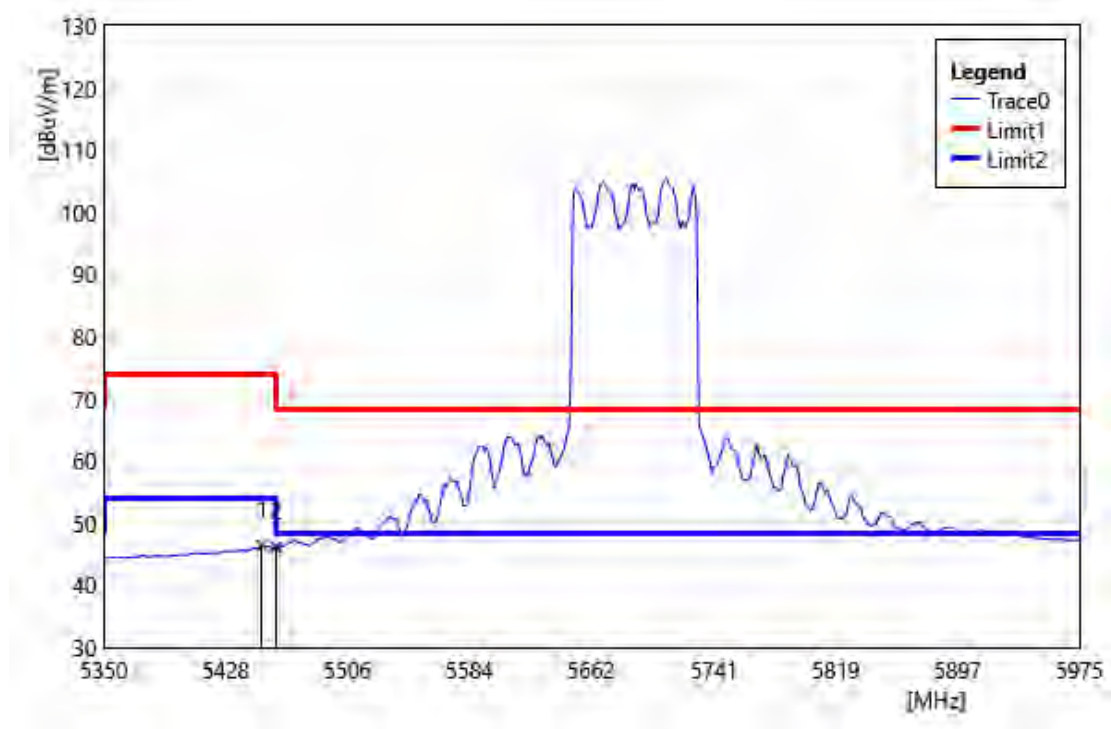

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.25	46.86	-0.41	46.45	54.00	-7.55	AVG
2	5460.00	46.56	-0.41	46.15	54.00	-7.85	AVG


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

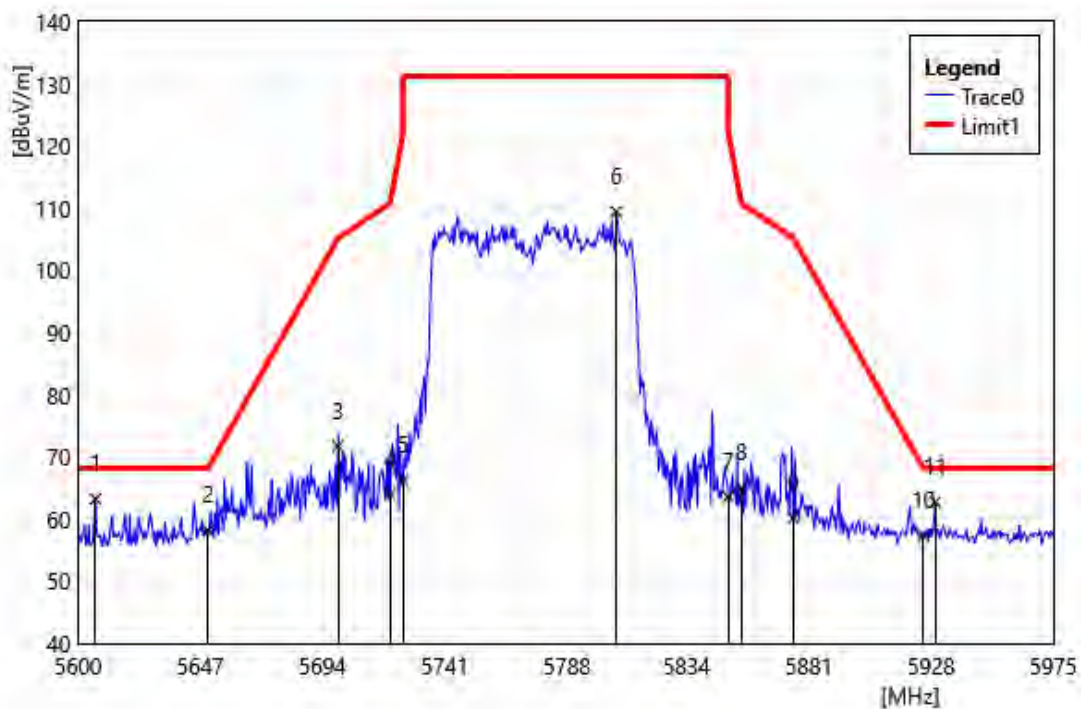

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5606.75	63.78	-0.54	63.24	68.20	-4.97	PEAK
2	5650.00	58.72	-0.58	58.14	68.20	-10.06	PEAK
3	5700.00	72.13	-0.42	71.71	105.20	-33.49	PEAK
4	5720.00	64.27	-0.20	64.07	110.80	-46.73	PEAK
5	5725.00	66.43	-0.14	66.29	122.20	-55.91	PEAK
6	5807.00	109.12	0.31	109.43	131.20	-21.77	PEAK
7	5850.00	63.11	0.45	63.56	122.20	-58.64	PEAK
8	5855.00	64.57	0.47	65.04	110.80	-45.76	PEAK
9	5875.00	59.58	0.58	60.17	105.20	-45.04	PEAK
10	5925.00	56.67	0.63	57.30	68.20	-10.90	PEAK
11	5929.63	62.11	0.62	62.73	68.20	-5.47	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

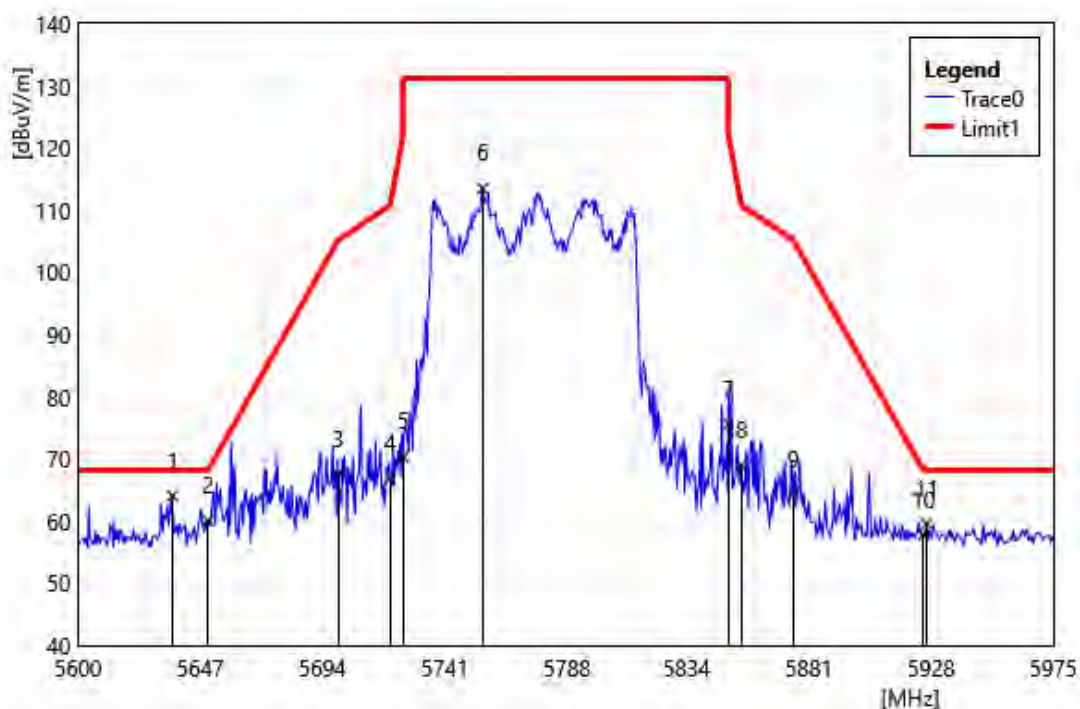

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.38	64.62	-0.57	64.05	68.20	-4.15	PEAK
2	5650.00	60.66	-0.58	60.08	68.20	-8.12	PEAK
3	5700.00	67.98	-0.42	67.56	105.20	-37.64	PEAK
4	5720.00	67.05	-0.20	66.85	110.80	-43.95	PEAK
5	5725.00	70.47	-0.14	70.33	122.20	-51.87	PEAK
6	5755.63	113.34	0.15	113.50	131.20	-17.71	PEAK
7	5850.00	75.13	0.45	75.58	122.20	-46.62	PEAK
8	5855.00	68.47	0.47	68.94	110.80	-41.86	PEAK
9	5875.00	63.78	0.58	64.36	105.20	-40.84	PEAK
10	5925.00	57.10	0.63	57.73	68.20	-10.47	PEAK
11	5926.25	58.98	0.63	59.61	68.20	-8.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

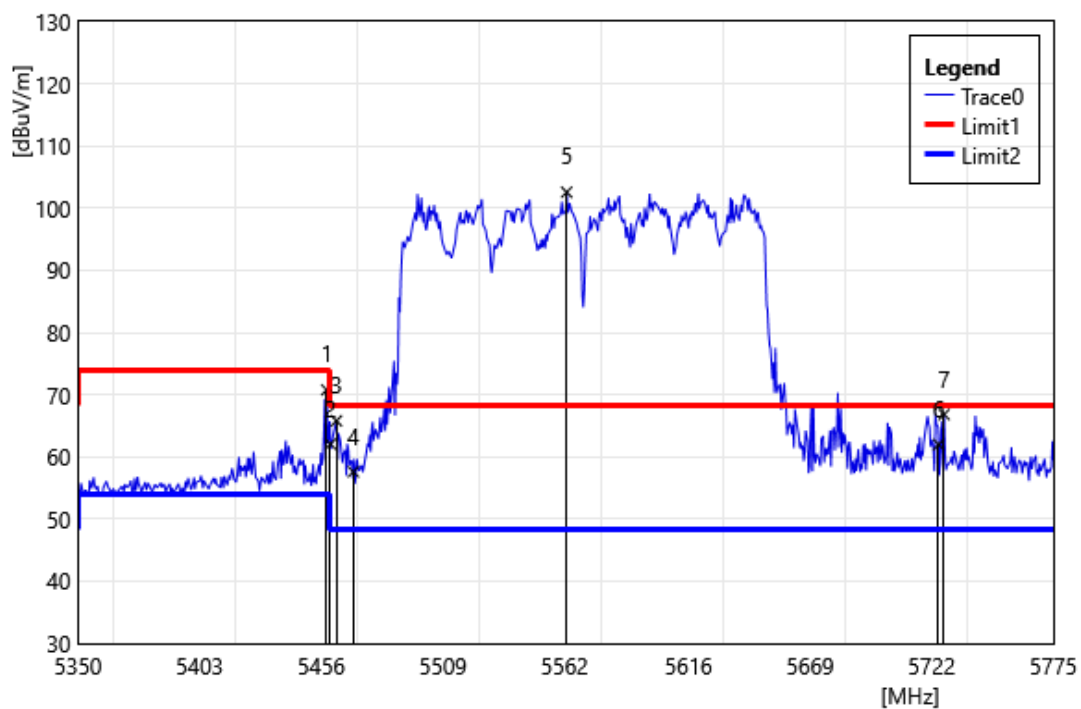


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.38	71.19	-0.41	70.78	74.00	-3.22	PEAK
2	5460.00	62.47	-0.41	62.06	74.00	-11.94	PEAK
3	5462.63	66.22	-0.42	65.80	68.20	-2.40	PEAK
4	5470.00	58.02	-0.42	57.60	68.20	-10.60	PEAK
5	5562.93	103.08	-0.50	102.58	68.20	34.38	PEAK
6	5725.00	62.12	-0.14	61.98	68.20	-6.22	PEAK
7	5727.40	66.94	-0.12	66.82	68.20	-1.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

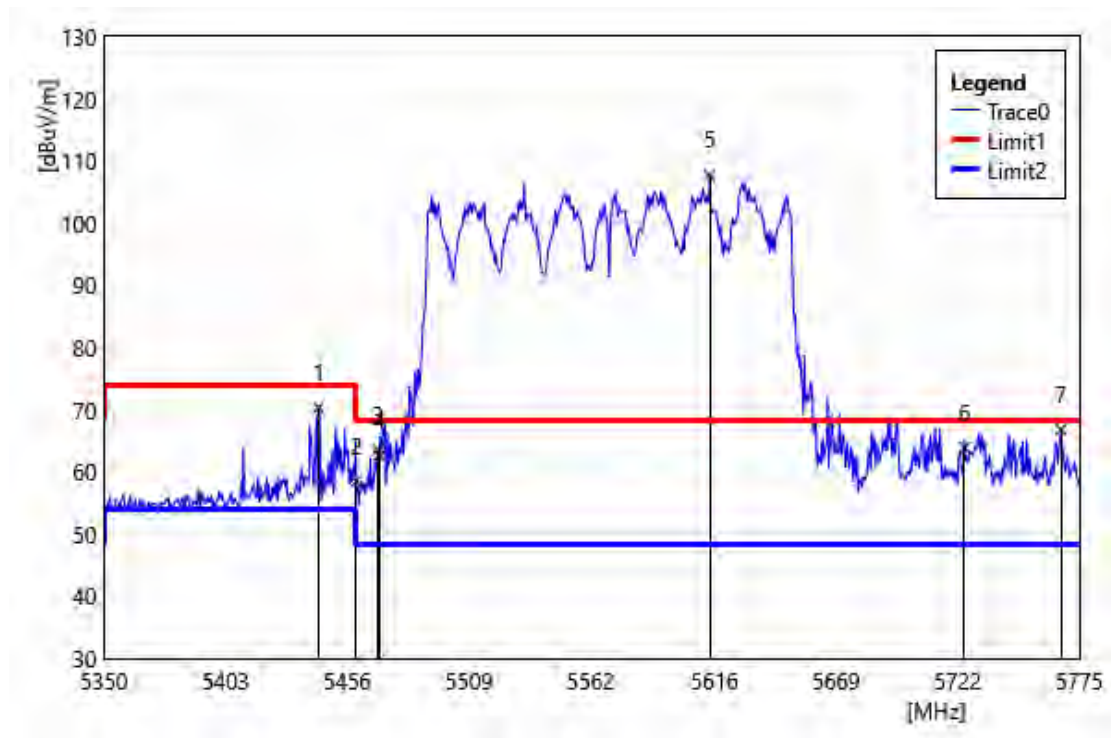


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.50	70.78	-0.45	70.33	74.00	-3.67	PEAK
2	5460.00	58.87	-0.41	58.46	74.00	-15.54	PEAK
3	5469.43	63.98	-0.42	63.56	68.20	-4.64	PEAK
4	5470.00	63.03	-0.42	62.61	68.20	-5.59	PEAK
5	5613.93	108.20	-0.55	107.65	68.20	39.45	PEAK
6	5725.00	64.02	-0.14	63.88	68.20	-4.32	PEAK
7	5766.93	66.62	0.19	66.81	68.20	-1.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

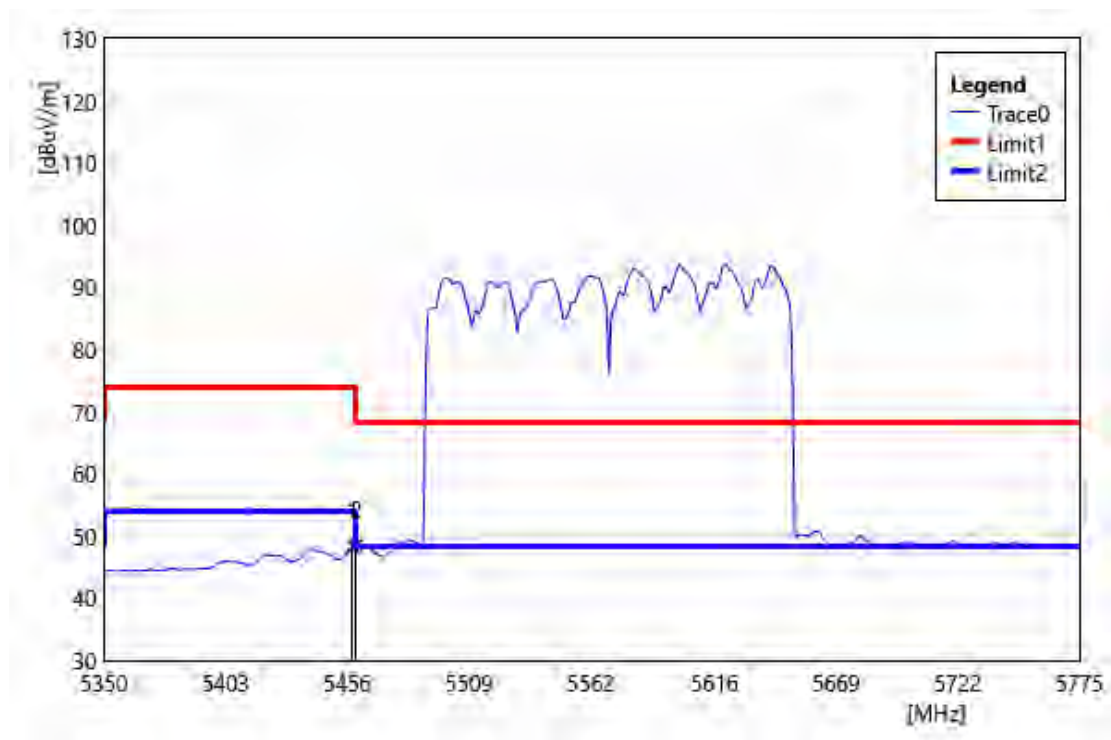

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.38	48.74	-0.41	48.33	54.00	-5.67	AVG
2	5460.00	48.92	-0.41	48.51	54.00	-5.49	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

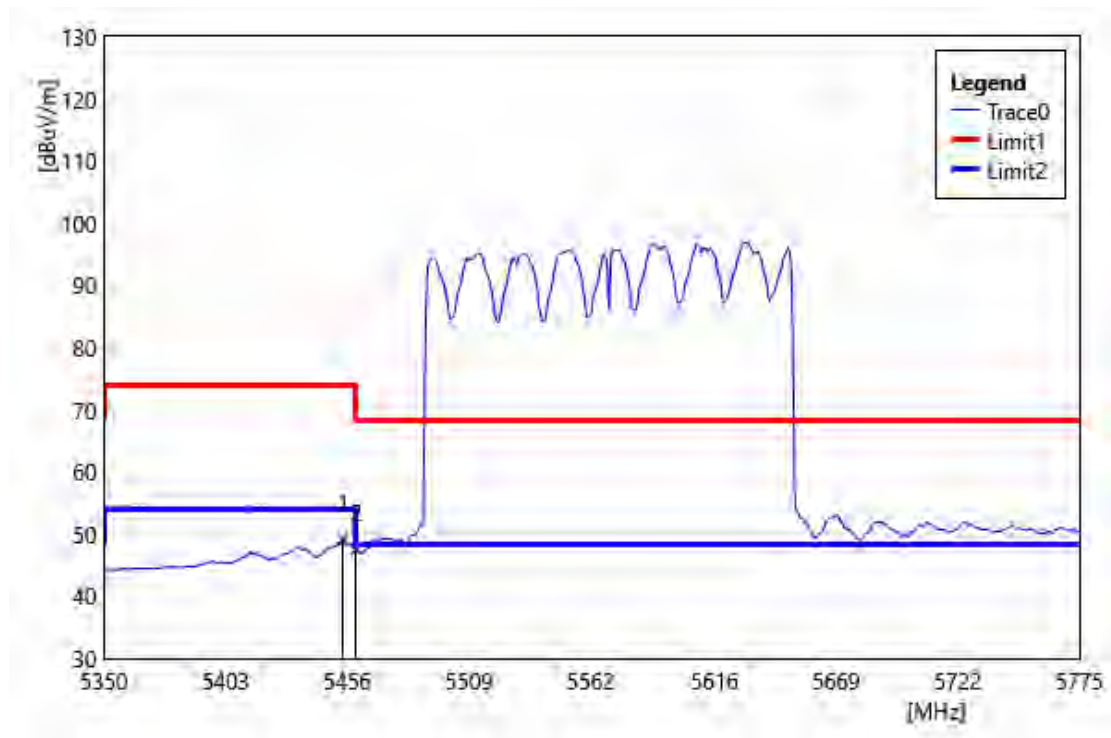

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.13	49.54	-0.41	49.13	54.00	-4.88	AVG
2	5460.00	47.97	-0.41	47.56	54.00	-6.44	AVG

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power and Transmit power control Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---