

Annex 1: Measurement diagrams to
TEST REPORT
 No.: 16-1-0032501T20a

According to:
FCC Regulations
 Part 15.209, Part 15.205

for

Huf Tools GmbH Velbert

BMW Keywriter Production Keywriter for transponder based vehicle
 keys

FCC-ID: PD6MU125134

Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 FEDERAL COMMUNICATIONS COMMISSION • USA • MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 AUTHORIZED RF LABORATORY	 Authorized™ Test Lab Lab Code: 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com			

Table of contents

1. MEASUREMENT DIAGRAMS OF EMISSION TEST	3
1.1. Diagrams of radiated field strength emissions, 9kHz to 30 MHz (Diagram group 02)	3
1.2. Occupied bandwidth under temperature/voltage variations measurements	11
1.2.1. 125 kHz transmitter.....	11
1.2.2. 134 kHz transmitter.....	30

1. Measurement diagrams of emission test


1.1. Diagrams of radiated field strength emissions, 9kHz to 30 MHz (Diagram group 02)

2.01_Power_Measurement_125KHz_lying_Position||1

Test description:	Date: 18.08.2016 Page 1 of 3
Test site and distance:	Magnetic Field Strength Measurement related to 30/300 m distance
Version of Testsoftware:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Distance correction:	EMC32 V9.25.0
Technical Data:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	Please see page 2 for detailed data of measurement setup
Used filter:	height 1.00 m, parallel and 90° to EUT polarisation
Test specification:	bypass
	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	HLA
Operating conditions:	TX-on at 125KHz
Power during tests:	5V DC
Comment 1:	--
Comment 2:	with Tag

EUT Information

Manufacturer:	Huf Tools GmbH
EuT:	Keywriter Prod
HW Version:	Rev.1
SW Version:	125kHz
Serial Number:	201629-Testsample 004
Connected Interfaces:	USB
Power Supply:	5VDC
Comments:	-

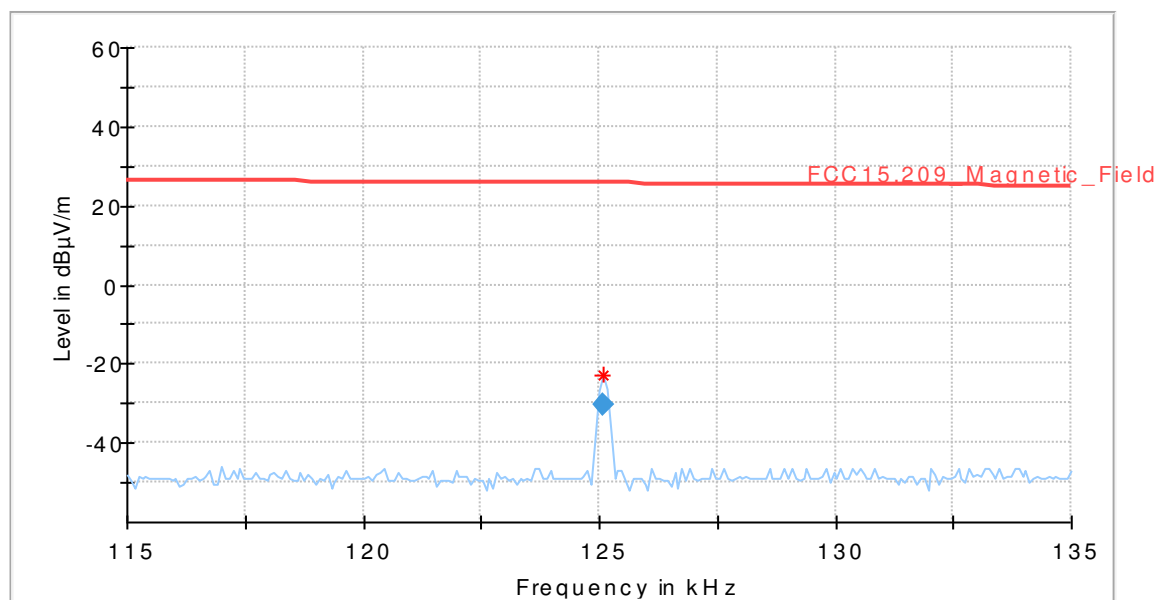


Final_Result

Frequency (MHz)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
0.125080	-30.40	25.66	56.05	1000.0	0.200	100.0	V	124.0	-59.9

2.05_Power_Measurement_125KHz_standing_Position||1

EUT Information

Manufacturer:	Huf Tools GmbH
EuT:	Keywriter Prod
HW Version:	Rev.1
SW Version:	125kHz
Serial Number:	201629-Testsample 004
Connected Interfaces:	USB
Power Supply:	5VDC
Comments:	-

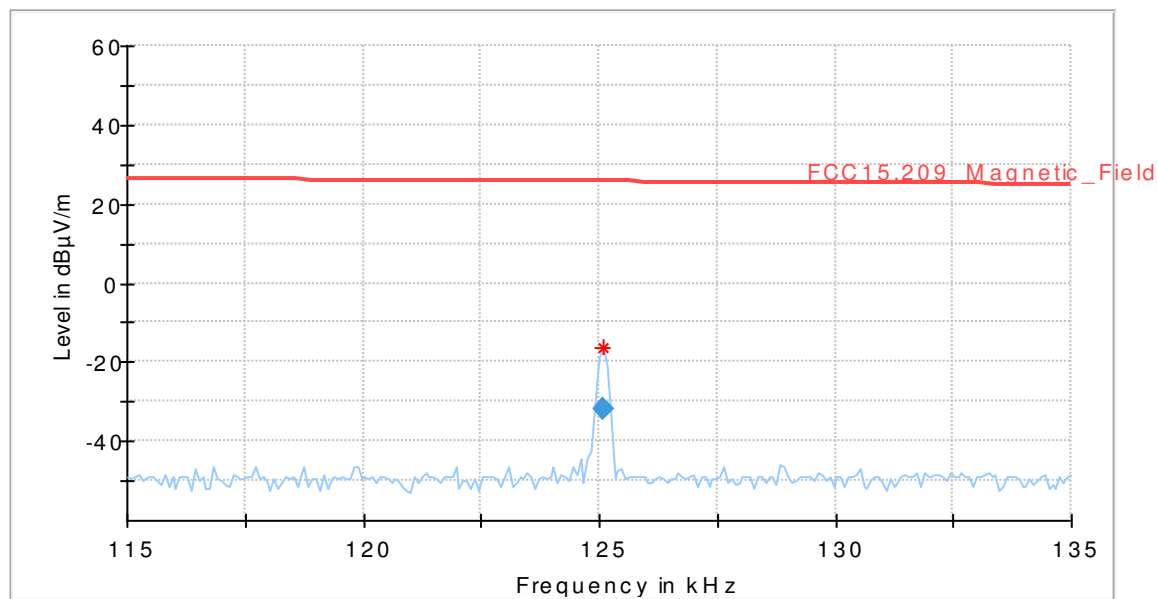

Final Result

Frequency (MHz)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
0.125080	-31.82	25.66	57.47	1000.0	0.200	100.0	V	108.0	-59.9

Diagram No. 2.06_Power_Measurement_134KHz_standing_Position

Date: 19.08.2016 Page 1 of 1
 Test description: Magnetic Field Strength Measurement related to 30/300 m distance
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: used accord. table, pls. see test report
 Technical Data: Please see page 2 for detailed data of measurement setup
 Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation
 Used filter: bypass
 Test specification: FCC 15.205 § 15.209; RSS-Gen: Issue 4


Operator: AFr
 Operating conditions: TX-on at 134KHz
 Power during tests: 5V DC

EUT Information

Manufacturer: Huf Tools GmbH
 EuT: Keywriter Prod

HW Version: Rev.1
 SW Version: 134kHz
 Serial Number: 201629-Testsample 004
 Connected Interfaces: USB
 Power Supply: 5VDC
 Comments: -

Full Spectrum

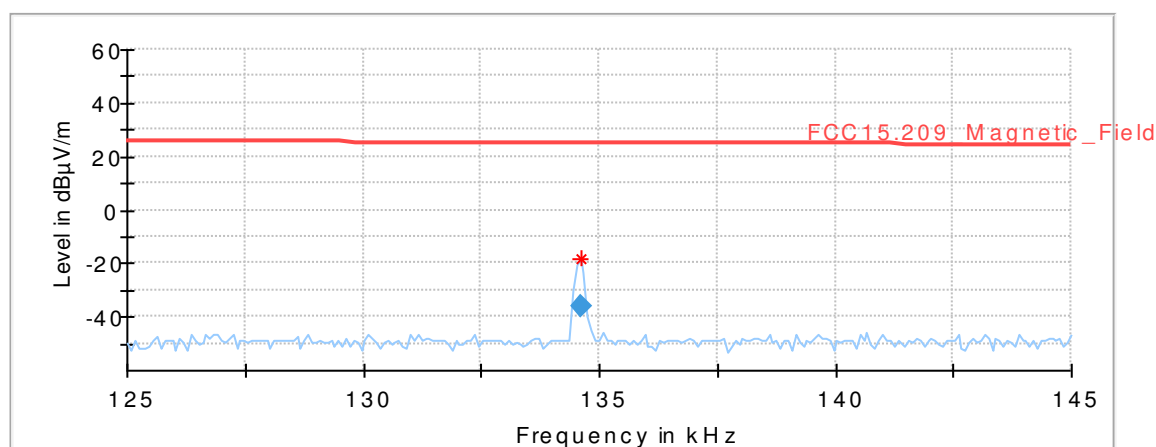

Final Result

Frequency (MHz)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
0.134600	-35.98	25.02	61.00	1000.0	0.200	100.0	V	111.0	-59.7

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
0.134600	08:37:44 - 19.08.2016


Diagram No. 2.07_Power_Measurement_134KHz_laying_Position

Date: 19.08.2016 Page 1 of 1
 Test description: Magnetic Field Strength Measurement related to 30/300 m distance
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: used accord. table, pls. see test report
 Technical Data: Please see page 2 for detailed data of measurement setup
 Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation
 Used filter: bypass
 Test specification: FCC 15.205 § 15.209; RSS-Gen: Issue 4
 Operator: AFr
 Operating conditions: TX-on at 134KHz
 Power during tests: 5V DC

EUT Information

Manufacturer: Huf Tools GmbH
 EuT: Keywriter Prod
 HW Version: Rev.1
 SW Version: 134kHz
 Serial Number: 201629-Testsample 004
 Connected Interfaces: USB
 Power Supply: 5VDC
 Comments: -

Full Spectrum

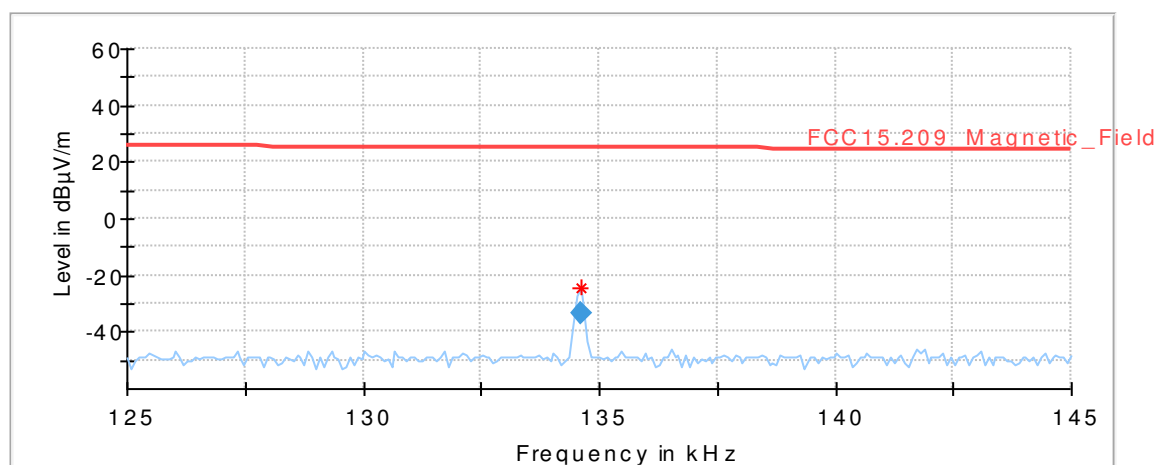

Final Result

Frequency (MHz)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
0.134600	-33.63	25.02	58.65	1000.0	0.200	100.0	V	119.0	-59.7

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
0.134600	08:58:56 - 19.08.2016

Diagram No. 2.01_Spurious_Emission_125KHz_laying_position

Date:	18.08.2016	Page 1 of 3
Test description:	Magnetic Field Strength Measurement related to 30/300 m distance	
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance	
Version of Testsoftware:	EMC32 V9.25.0	
Distance correction:	used accord. table, pls. see test report	
Technical Data:	Please see page 2 for detailed data of measurement setup	
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation	
Used filter:	bypass	
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4	
Operator:	HLA	
Operating conditions:	TX-on at 134KHz	
Power during tests:	5V DC	
Comment 1:	Channel low/middle/high	
Comment 2:	with Tag	

EUT Information

Manufacturer:	Huf Tools GmbH
EuT:	Keywriter Prod

HW Version:	Rev.1
SW Version:	134kHz
Serial Number:	201629-Testsample 004
Connected Interfaces:	USB
Power Supply:	5VDC
Comments:	-

Full Spectrum

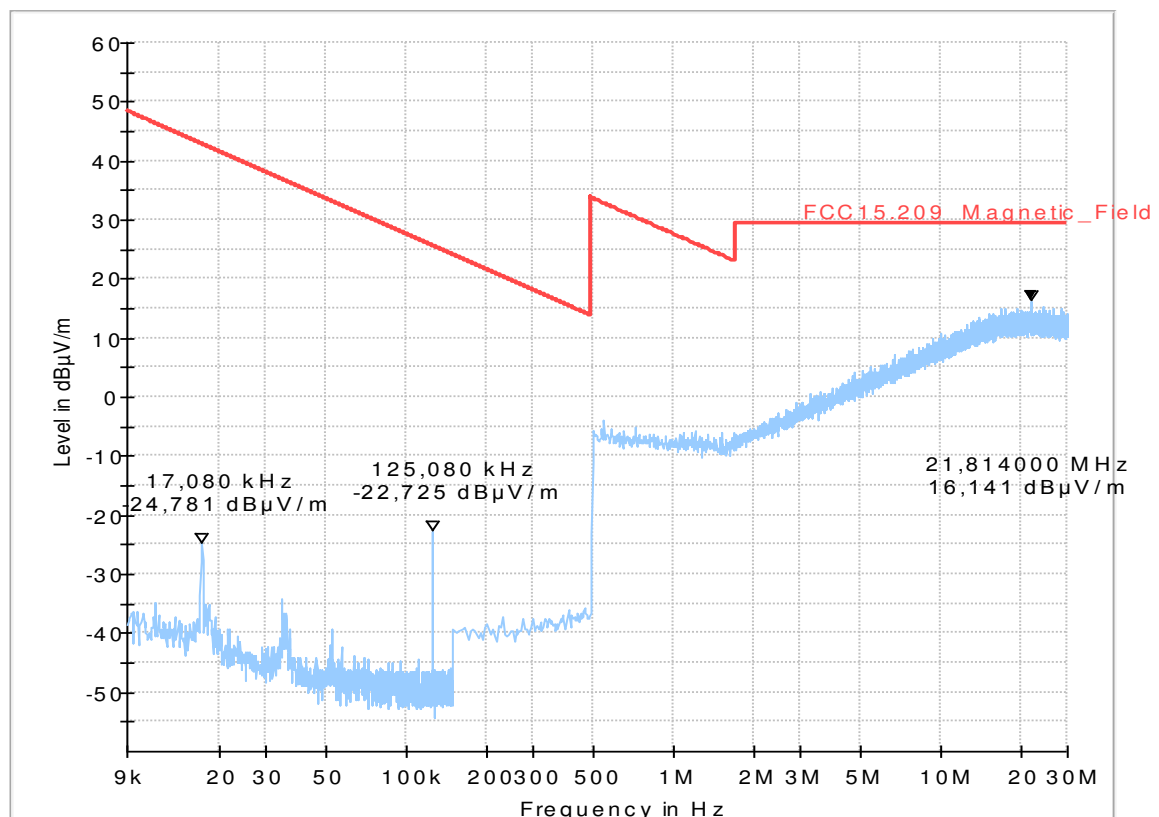


Diagram No. 2.02_Spurious_Emission_125KHz_standing_position

Test description:	Date: 18.08.2016 Page 1 of 3
Test site and distance:	Magnetic Field Strength Measurement related to 30/300 m distance
Version of Testsoftware:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Distance correction:	EMC32 V9.25.0
Technical Data:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	Please see page 2 for detailed data of measurement setup
Used filter:	height 1.00 m, parallel and 90° to EUT polarisation
Test specification:	bypass
	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	HLA
Operating conditions:	TX-on at 134KHz
Power during tests:	5V DC
Comment 1:	Channel low/middle/high
Comment 2:	with Tag

EUT Information

Manufacturer:	Huf Tools GmbH
EuT:	Keywriter Prod
HW Version:	Rev.1
SW Version:	134kHz
Serial Number:	201629-Testsample 004
Connected Interfaces:	USB
Power Supply:	5VDC
Comments:	-

Full Spectrum

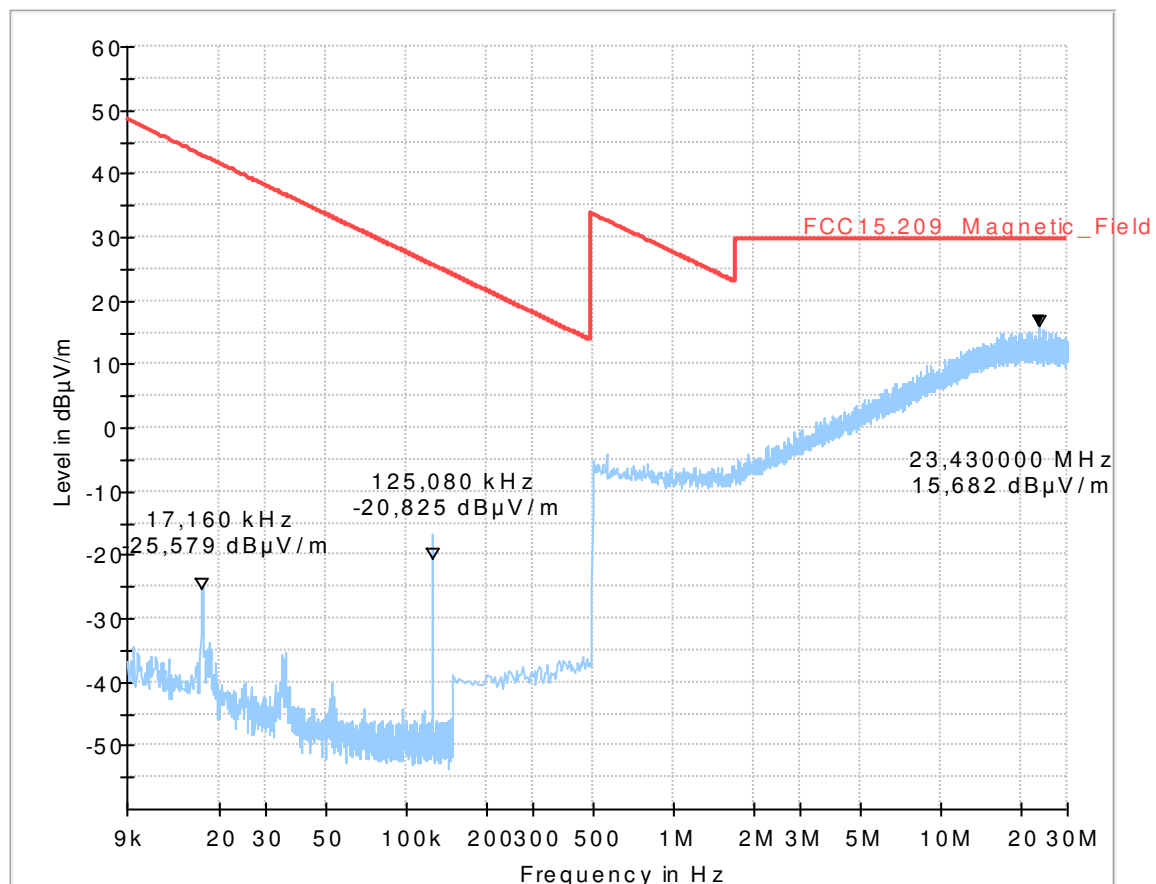


Diagram No. 2.03_Spurious_Emission_134KHz_lying_position

Test description:	Date: 18.08.2016 Page 1 of 5
Test site and distance:	Magnetic Field Strength Measurement related to 30/300 m distance
Version of Testsoftware:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Distance correction:	EMC32 V9.25.0
Technical Data:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	Please see page 2 for detailed data of measurement setup
Used filter:	height 1.00 m, parallel and 90° to EUT polarisation
Test specification:	bypass
	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	HLA
Operating conditions:	TX-on at 134KHz
Power during tests:	5V DC
Comment 1:	Channel low/middle/high
Comment 2:	with Tag

EUT Information

Manufacturer:	Huf Tools GmbH
EuT:	Keywriter Prod
HW Version:	Rev.1
SW Version:	134kHz
Serial Number:	201629-Testsample 004
Connected Interfaces:	USB
Power Supply:	5VDC
Comments:	-

Full Spectrum

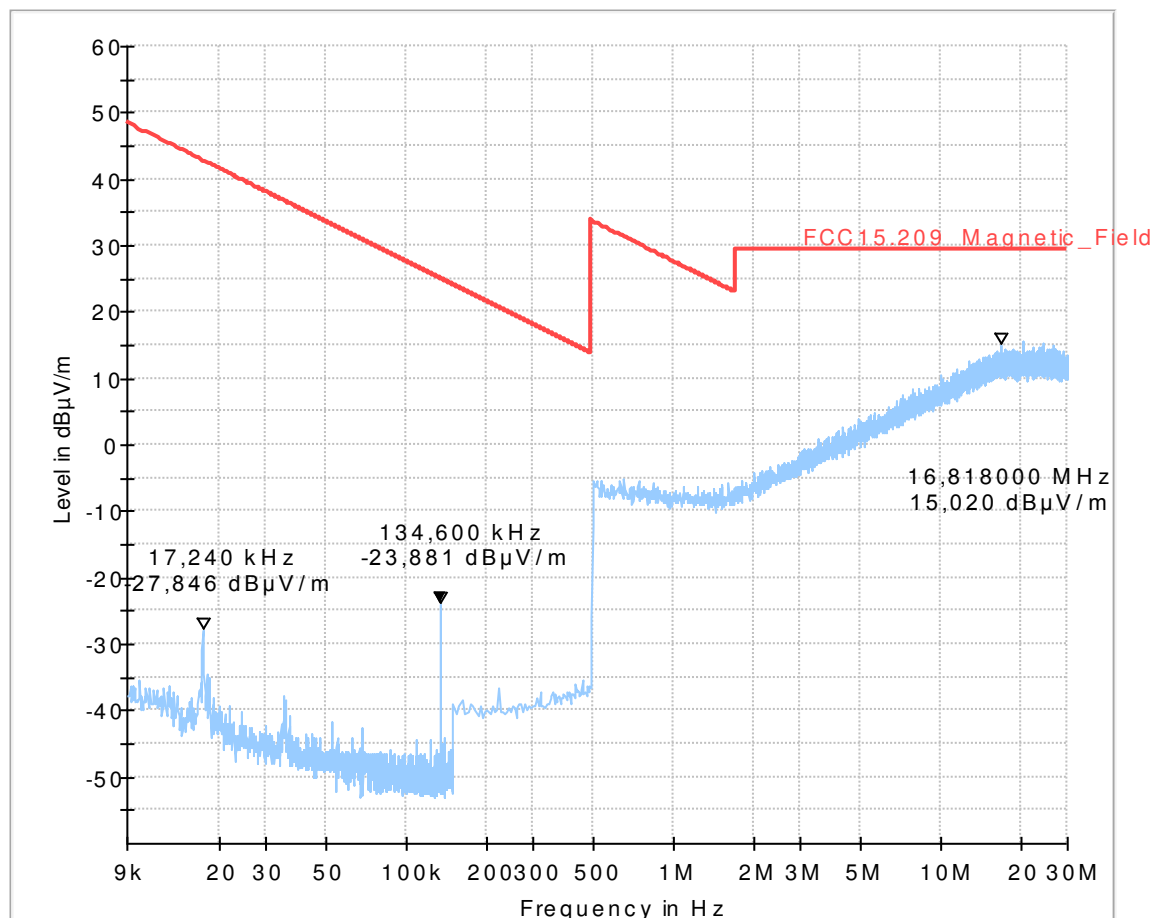


Diagram No. 2.04_Spurious_Emission_134KHz_standing_position

Test description:
Test site and distance:
Version of Testsoftware:
Distance correction:
Technical Data:
Rec. antenna (pre-scan):
Used filter:
Test specification:

Date: 18.08.2016 Page 1 of 3
Magnetic Field Strength Measurement related to 30/300 m distance
Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
EMC32 V9.25.0
used accord. table, pls. see test report
Please see page 2 for detailed data of measurement setup
height 1.00 m, parallel and 90° to EUT polarisation
bypass
FCC 15.205 § 15.209; RSS-Gen: Issue 4

Operator:
Operating conditions:
Power during tests:
Comment 1:
Comment 2:

HLa
TX-on at 134KHz
5V DC
Channel low/middle/high
with Tag

EUT Information


Manufacturer:
EuT:

Huf Tools GmbH
Keywriter Prod

HW Version:
SW Version:
Serial Number:
Connected Interfaces:
Power Supply:
Comments:

Rev.1
134kHz
201629-Testsample 004
USB
5VDC
-


Full Spectrum

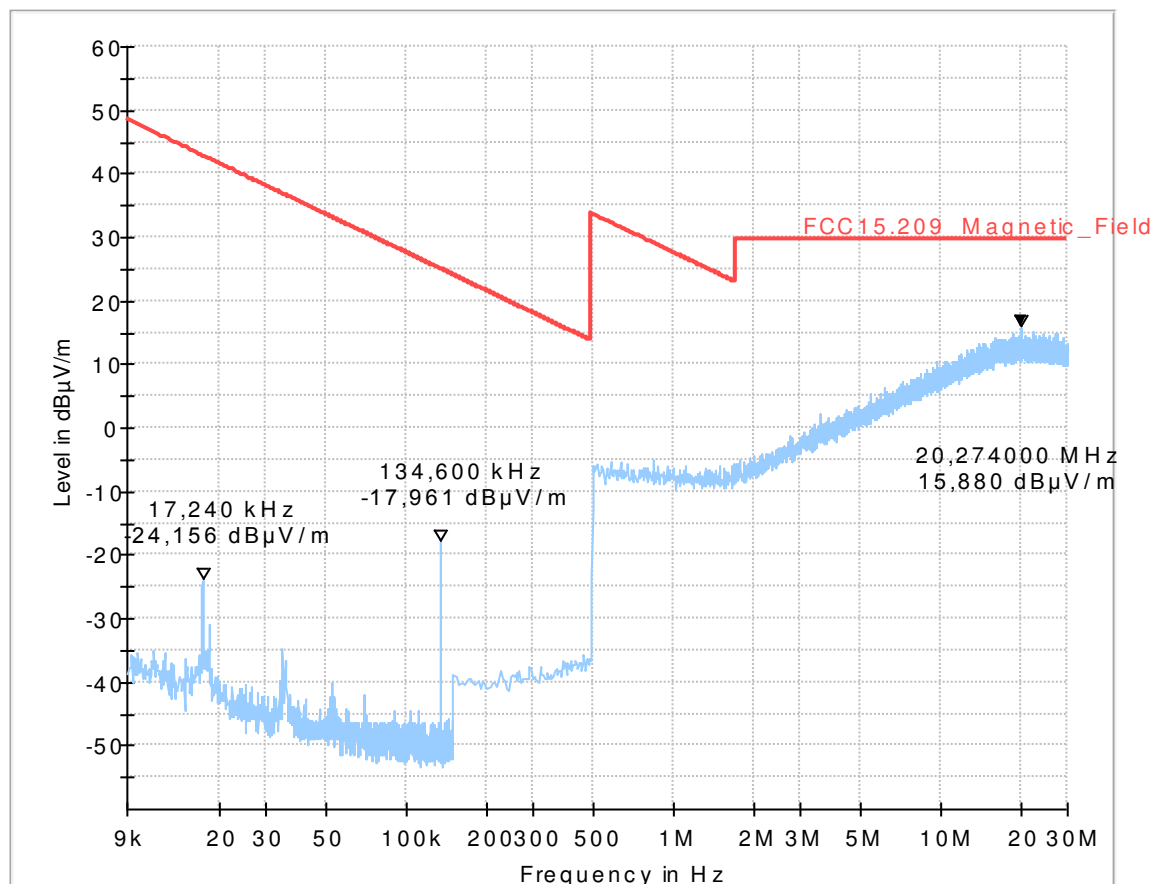

1.2. Occupied bandwidth under temperature/voltage variations measurements


1.2.1. 125 kHz transmitter

1.2.1.1. Temperature variations

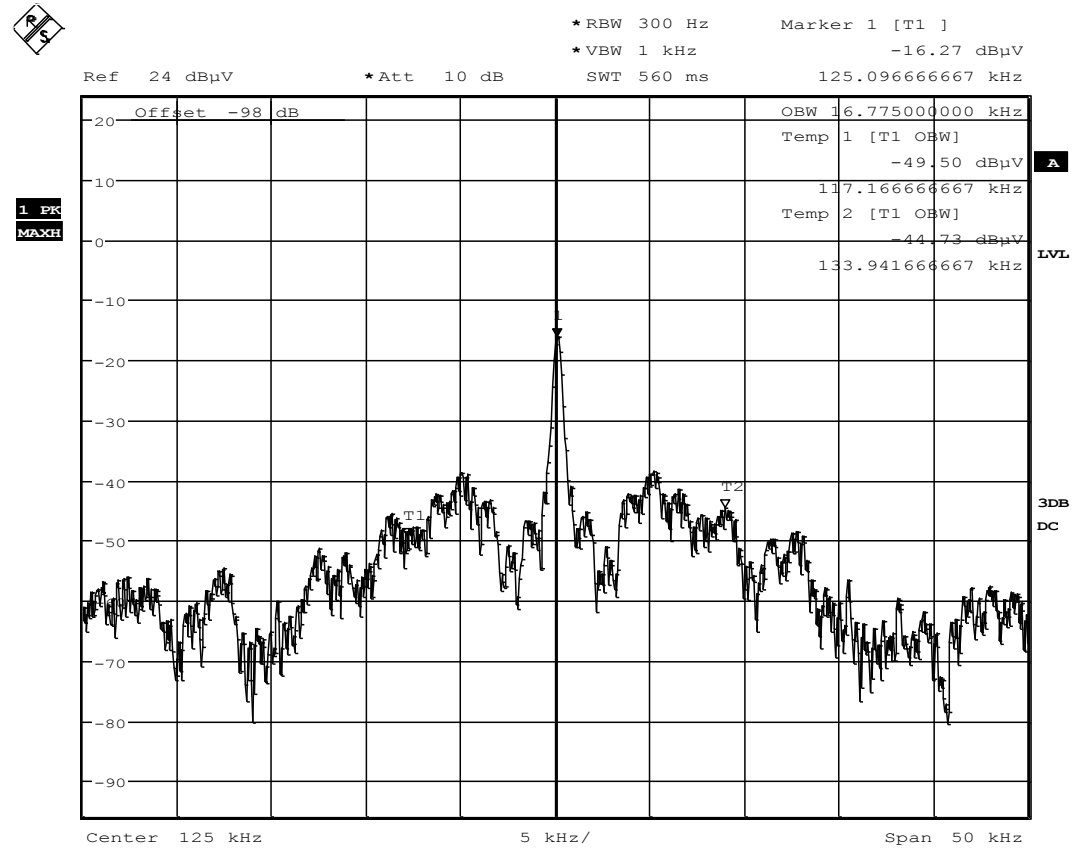


Date: 24.OCT.2016 09:44:08

Diagram 1: OBW_125kHz_TnomVnom_FCC (reference at nominal conditions)

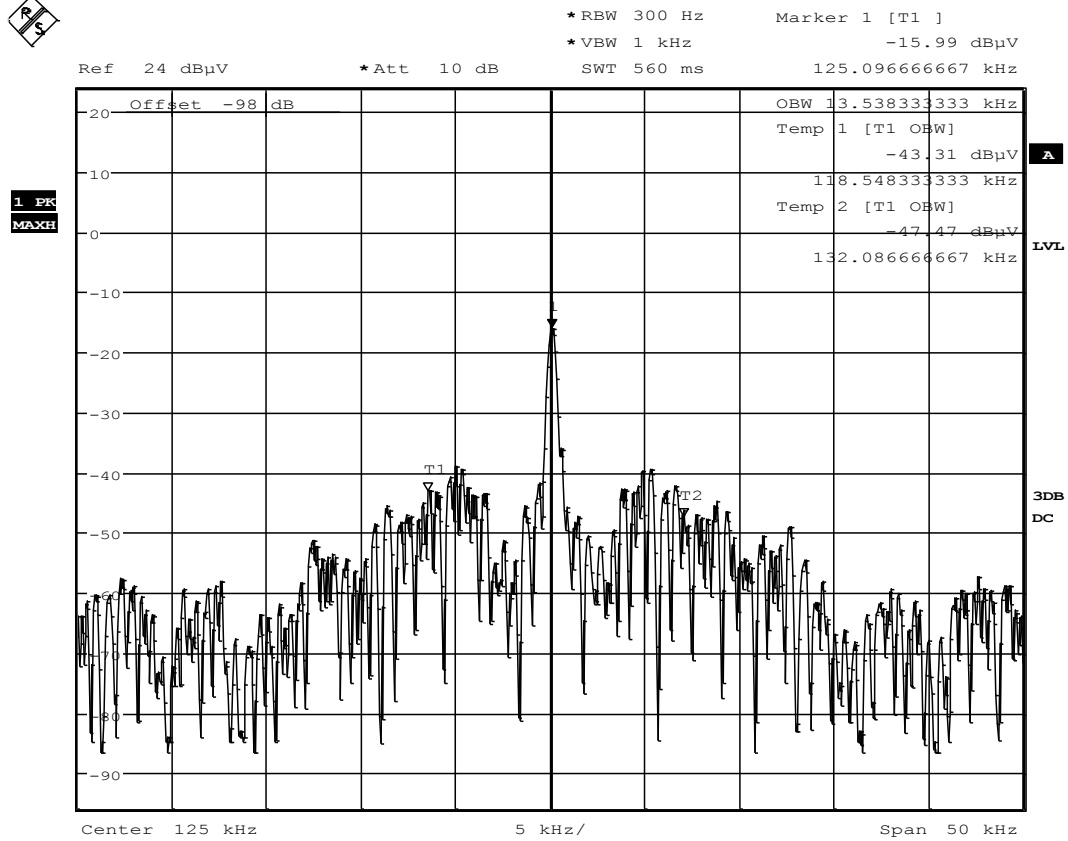


Date: 21.OCT.2016 15:32:39

Diagram 2: OBW_125kHz_M20_T1

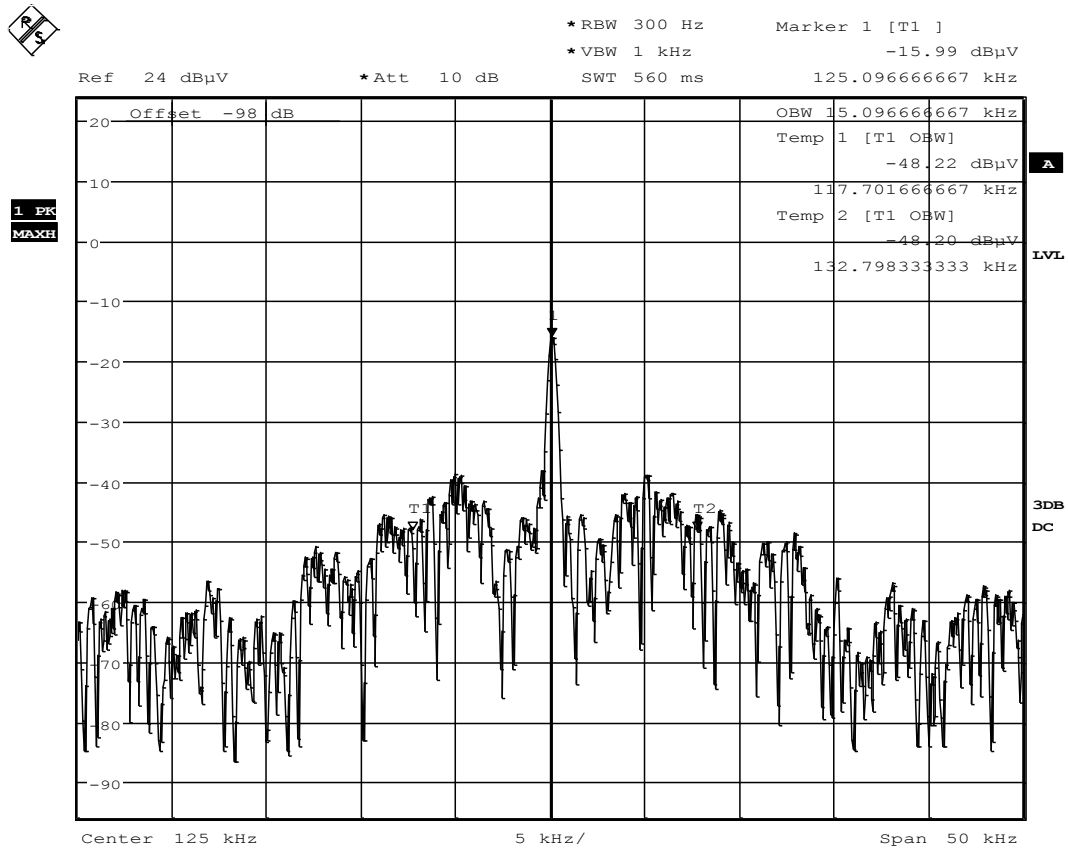


Date: 21.OCT.2016 15:34:19

Diagram 3: OBW_125kHz_M20_T2

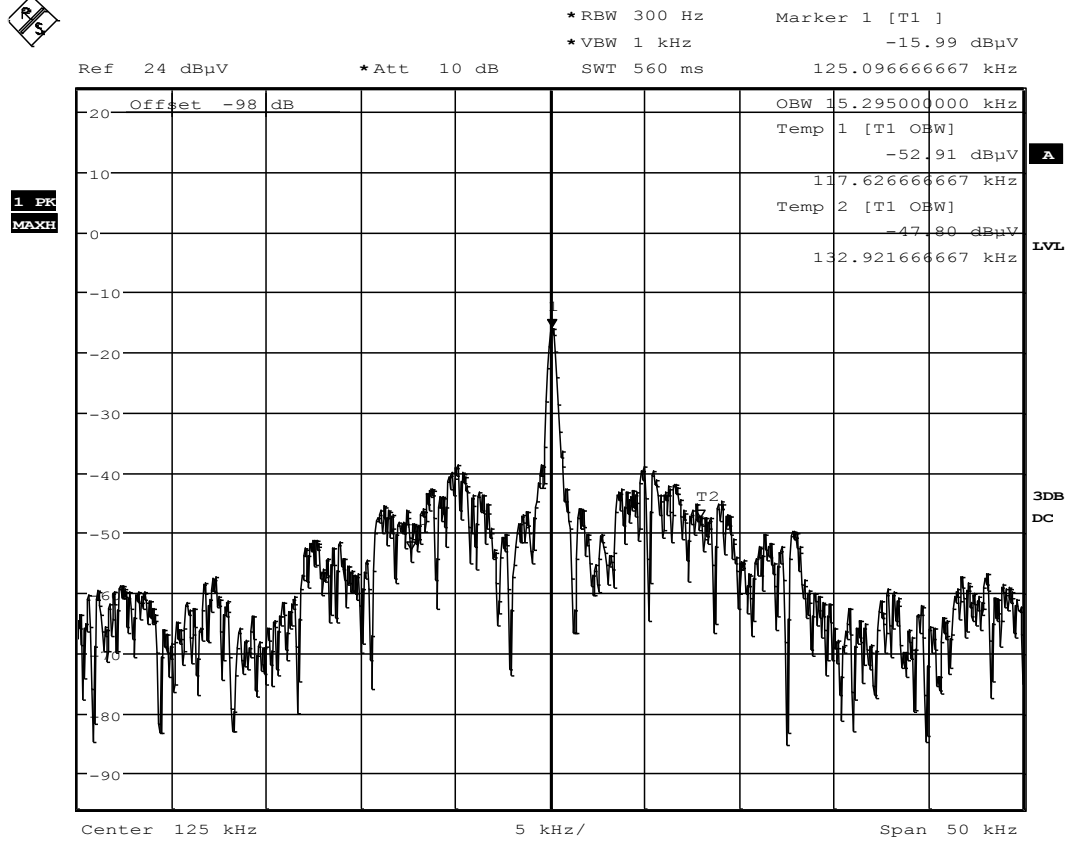


Date: 21.OCT.2016 15:37:19

Diagram 4: OBW_125kHz_M20_T3

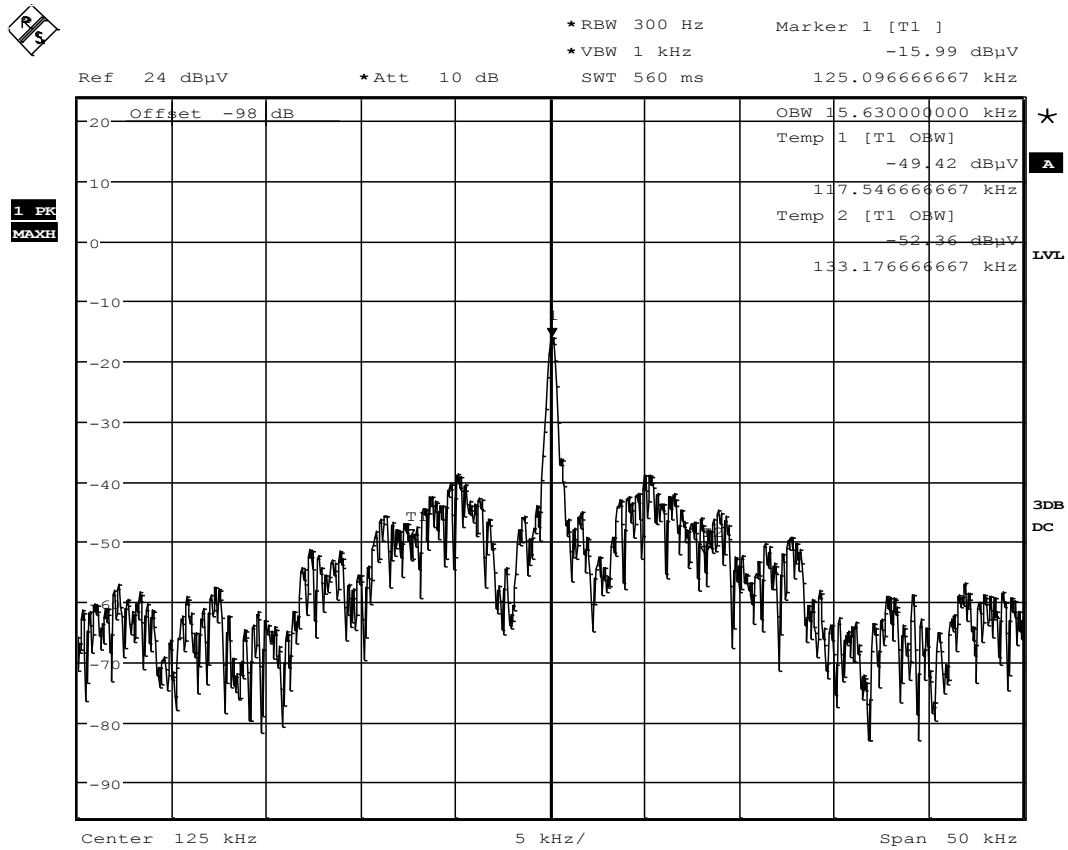


Date: 21.OCT.2016 15:42:25

Diagram 5: OBW_125kHz_M20_T4

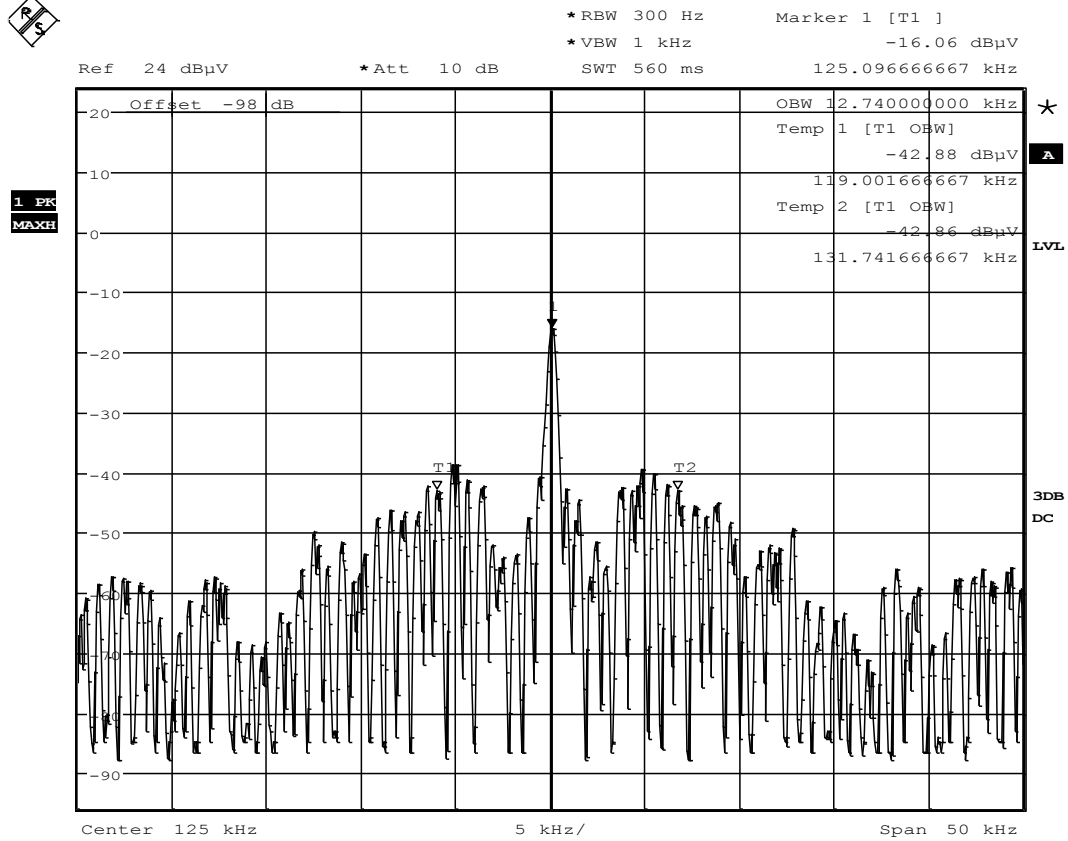


Date: 21.OCT.2016 10:36:30

Diagram 6: OBW_125kHz_P5_T1

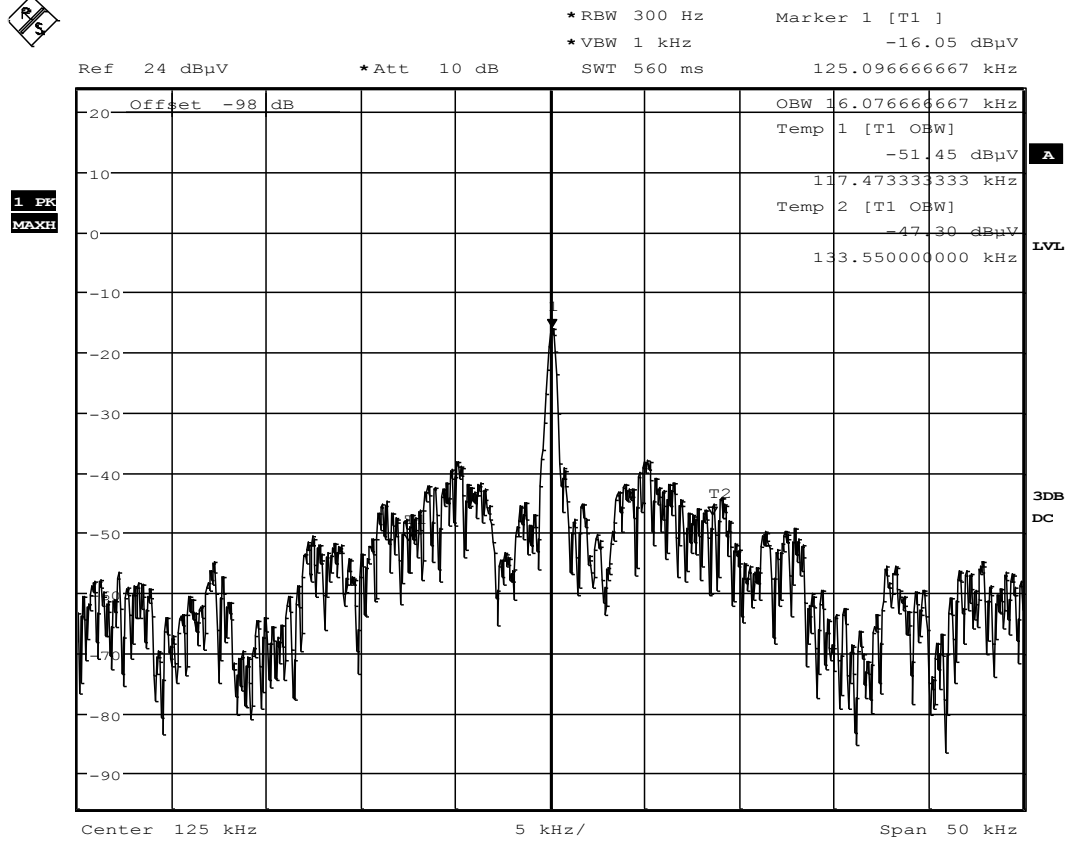


Date: 21.OCT.2016 10:38:19

Diagram 7: OBW_125kHz_P5_T2

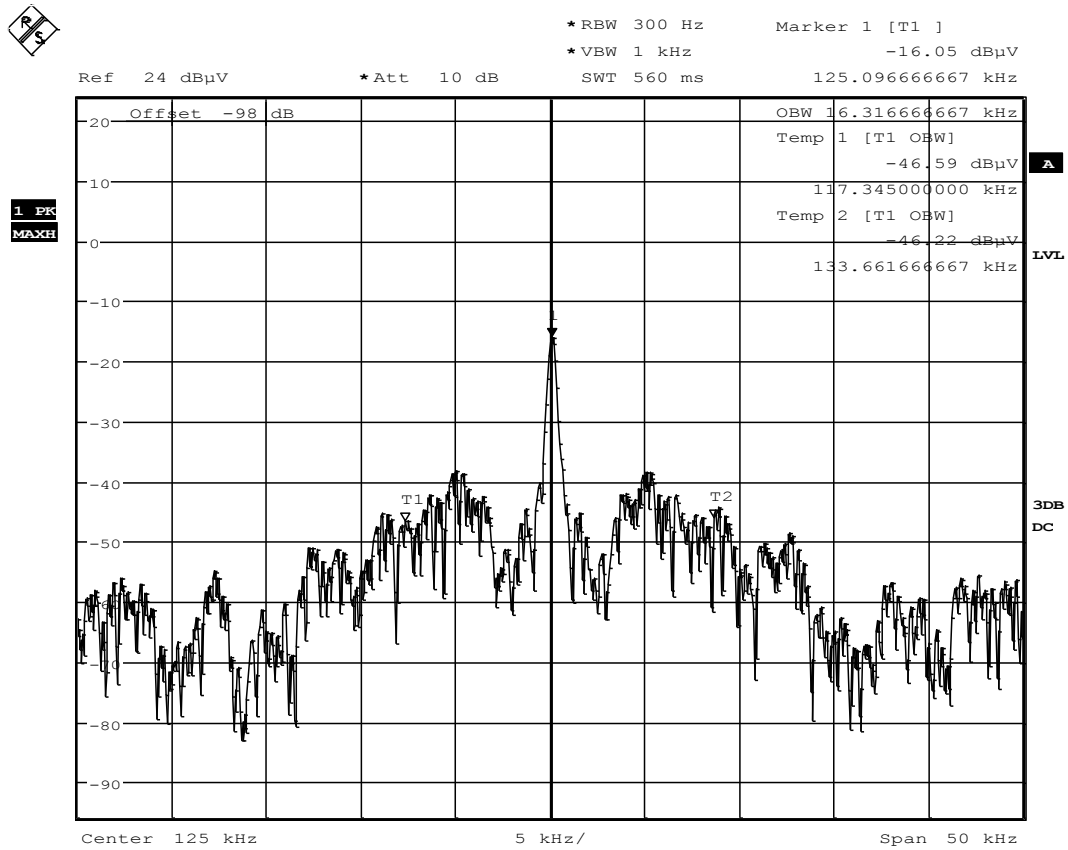


Date: 21.OCT.2016 10:41:19

Diagram 8: OBW_125kHz_P5_T3

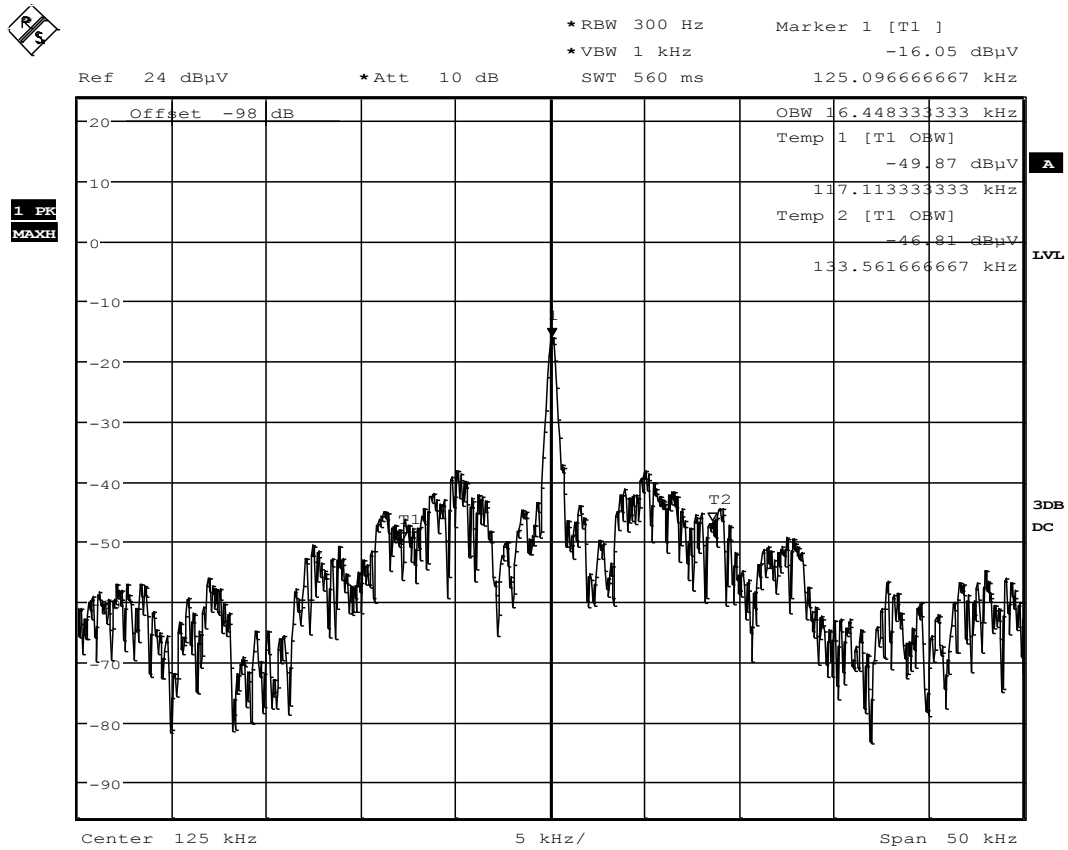


Date: 21.OCT.2016 10:46:19

Diagram 9: OBW_125kHz_P5_T4

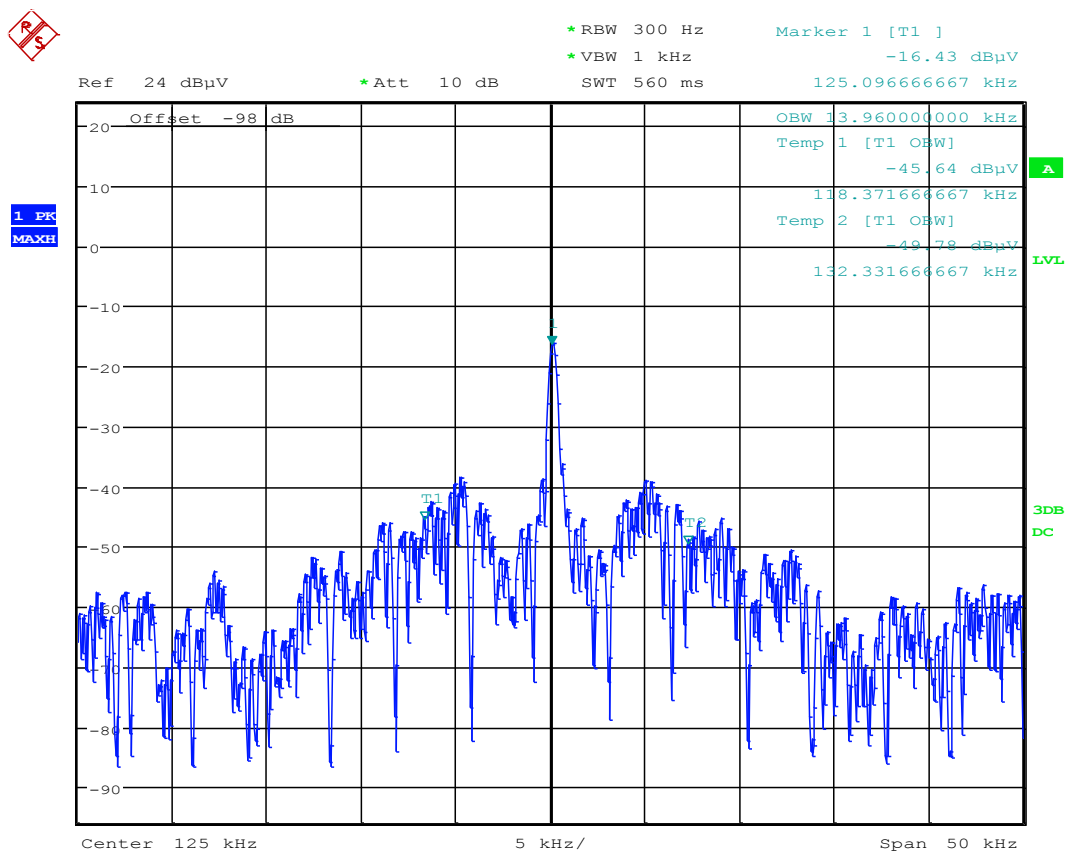


Date: 21.OCT.2016 11:45:39

Diagram 10: OBW_125kHz_P35_T1

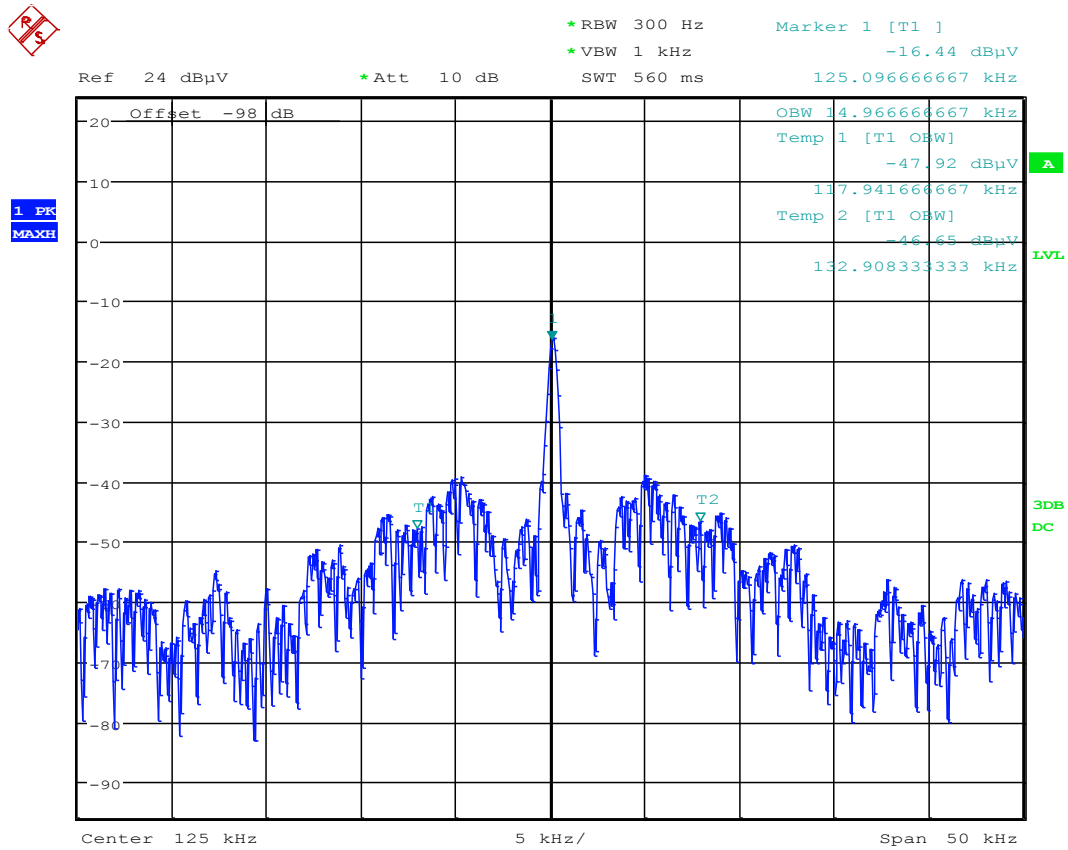


Date: 21.OCT.2016 11:47:19

Diagram 11: OBW_125kHz_P35_T2

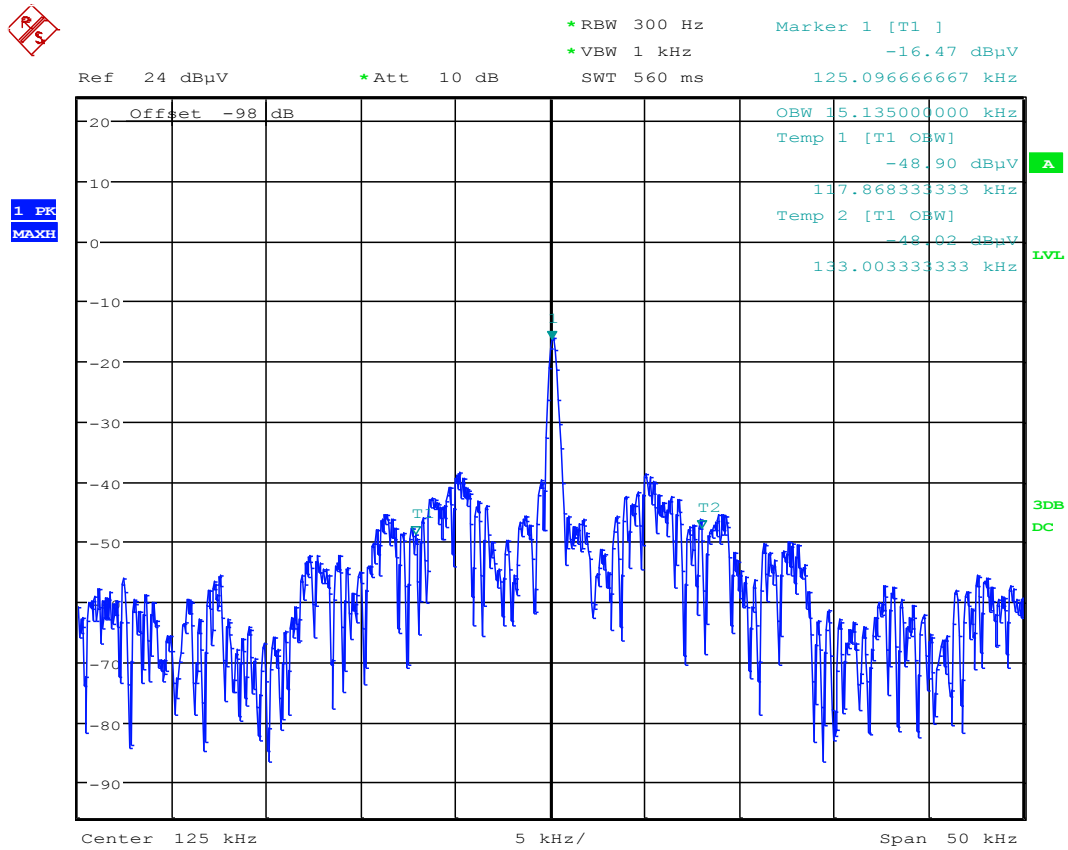


Date: 21.OCT.2016 11:50:19

Diagram 12: OBW_125kHz_P35_T3

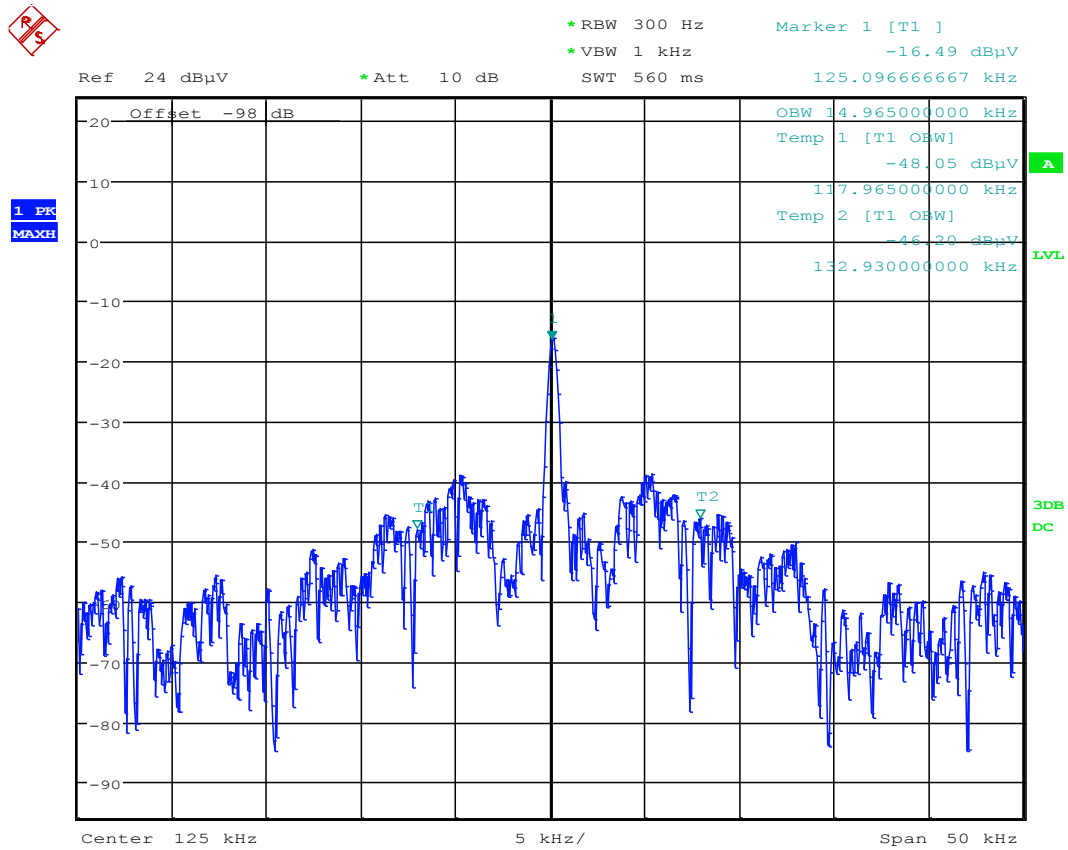


Date: 21.OCT.2016 11:55:19

Diagram 13: OBW_125kHz_P35_T4

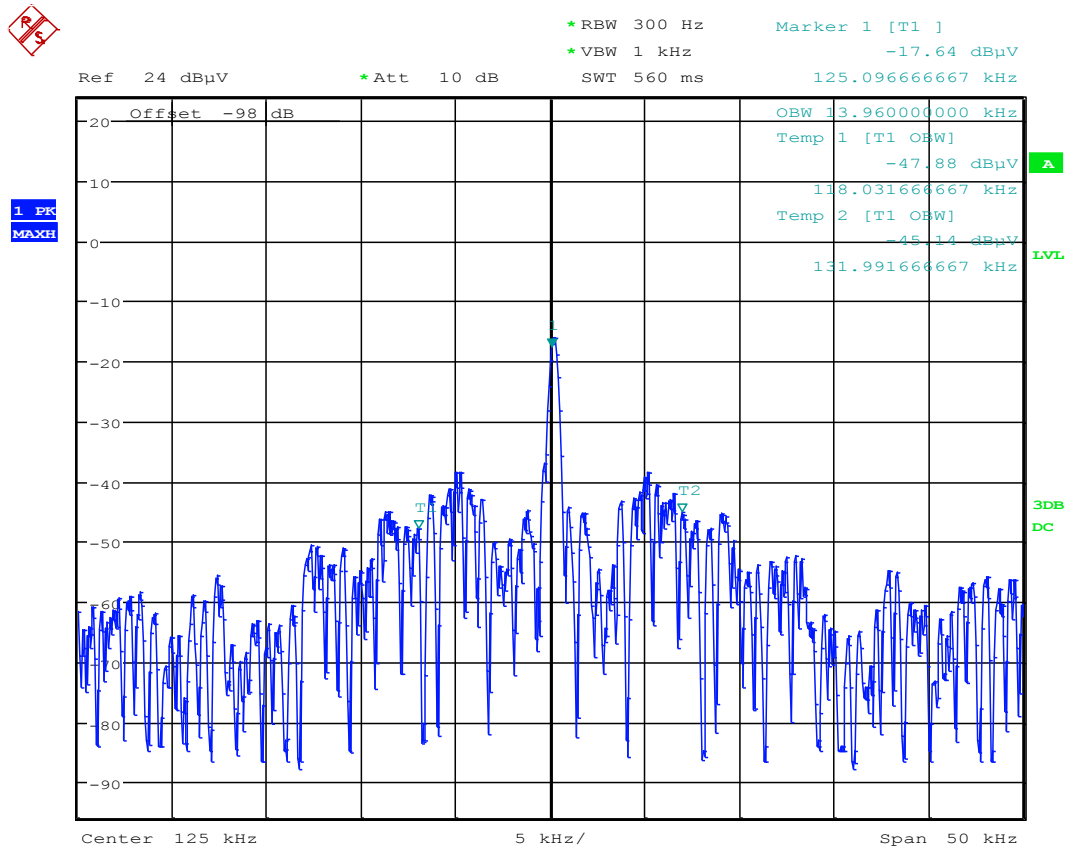


Date: 21.OCT.2016 13:06:39

Diagram 14: OBW_125kHz_P50_T1

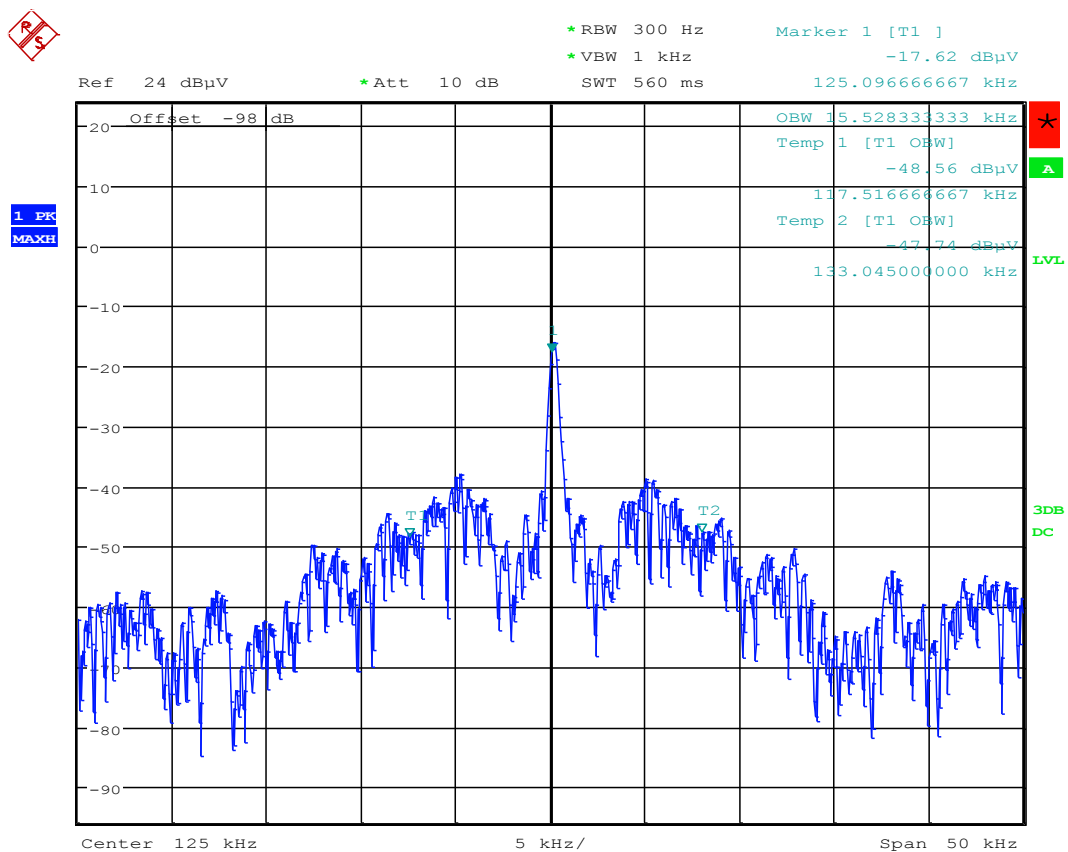


Date: 21.OCT.2016 13:08:19

Diagram 15: OBW_125kHz_P50_T2

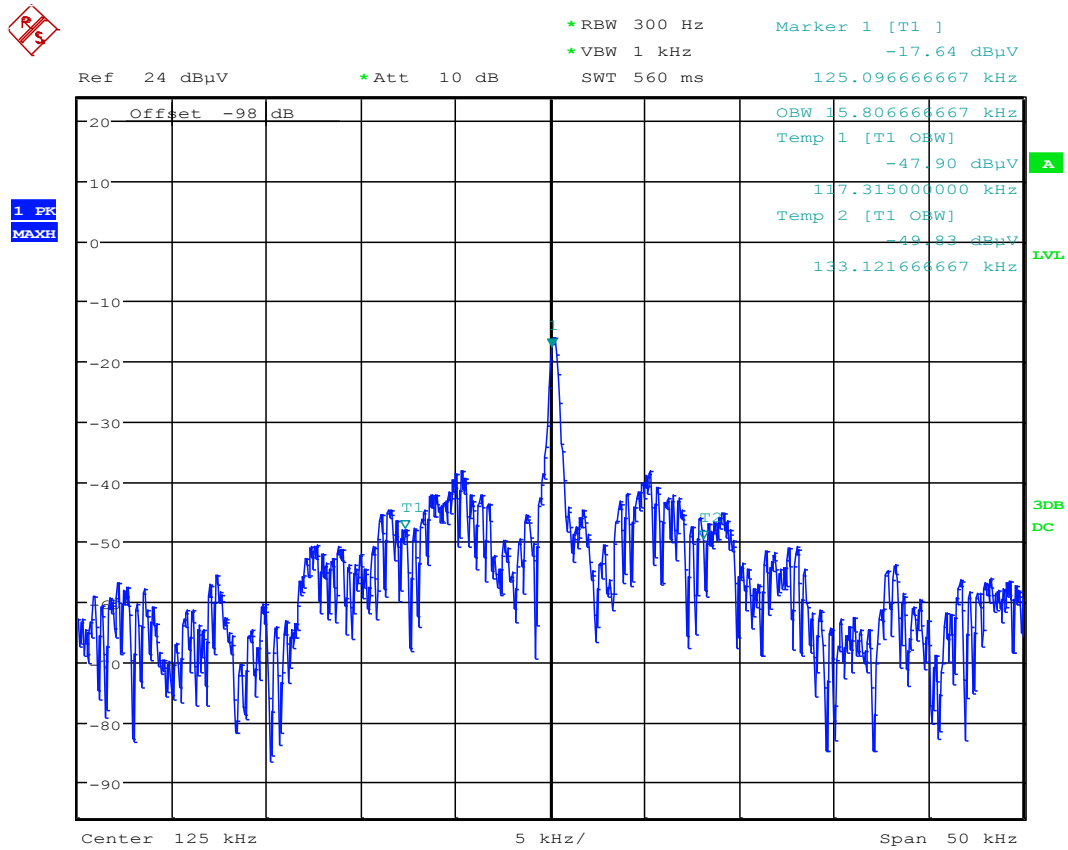

Date: 21.OCT.2016 13:11:19


Diagram 16: OBW_125kHz_P50_T3

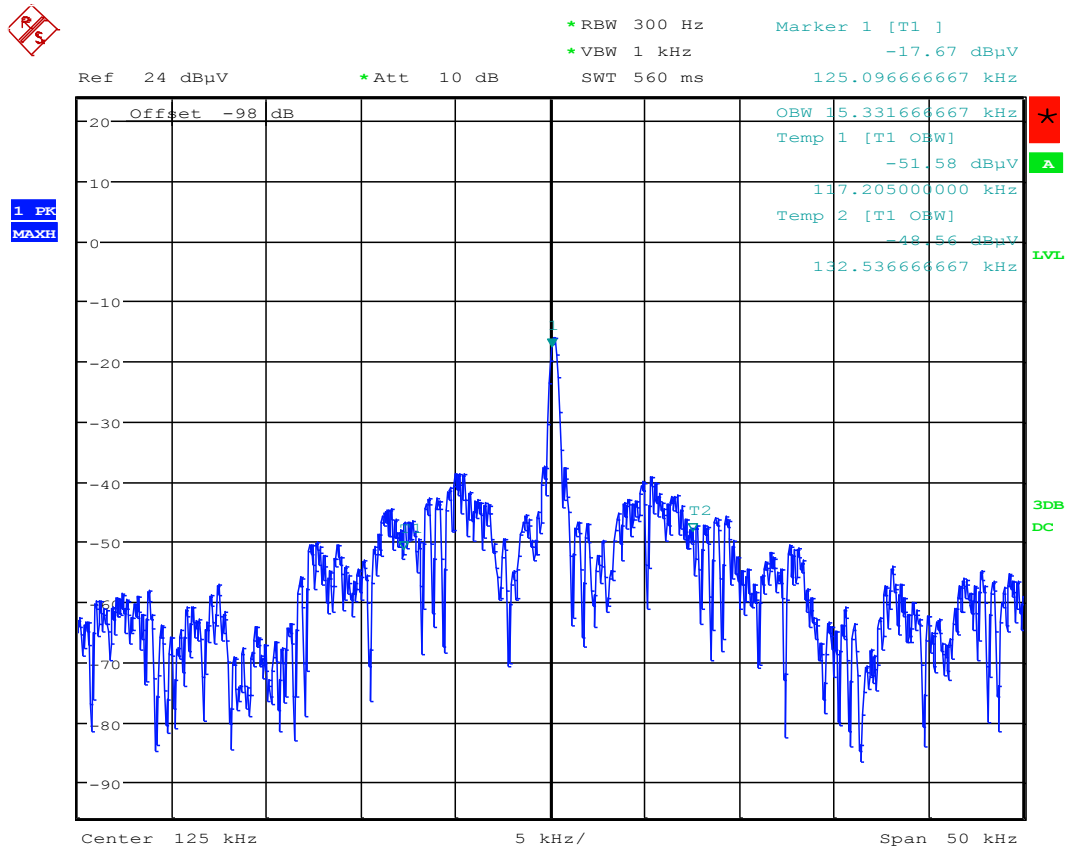

Date: 21.OCT.2016 13:16:19


Diagram 17: OBW_125kHz_P50_T4

1.2.1.2. Voltage variations

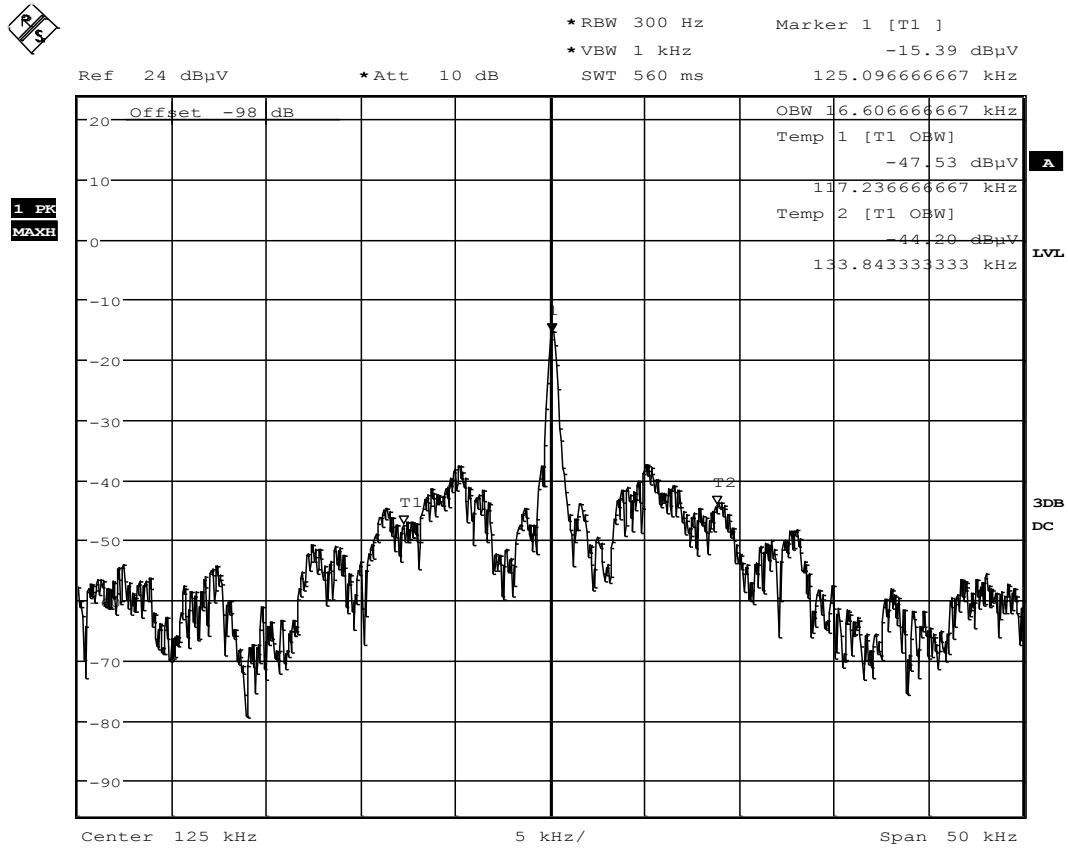

Date: 24.OCT.2016 09:42:51

Diagram 18: OBW_125kHz_TnomVmax_FCC

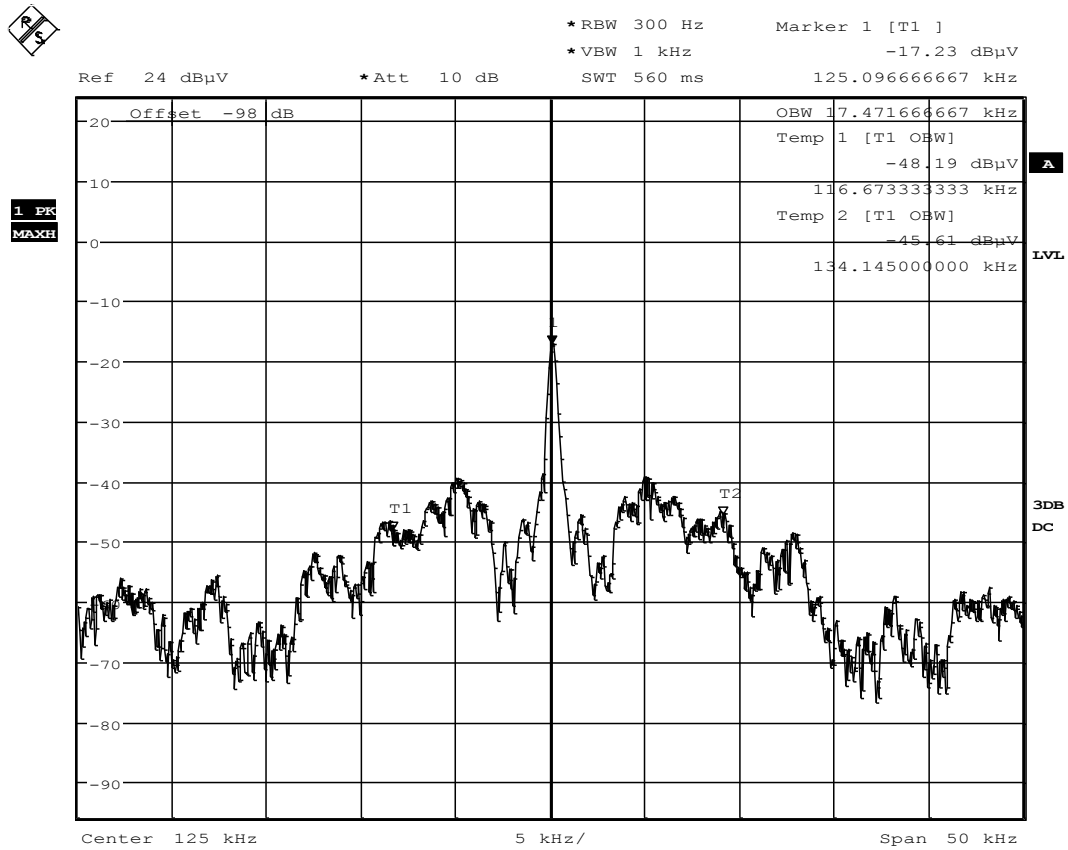


Date: 24.OCT.2016 09:45:32

Diagram 19: OBW_125kHz_TnomVmin_FCC


1.2.2. 134 kHz transmitter

1.2.2.1. Temperature variations

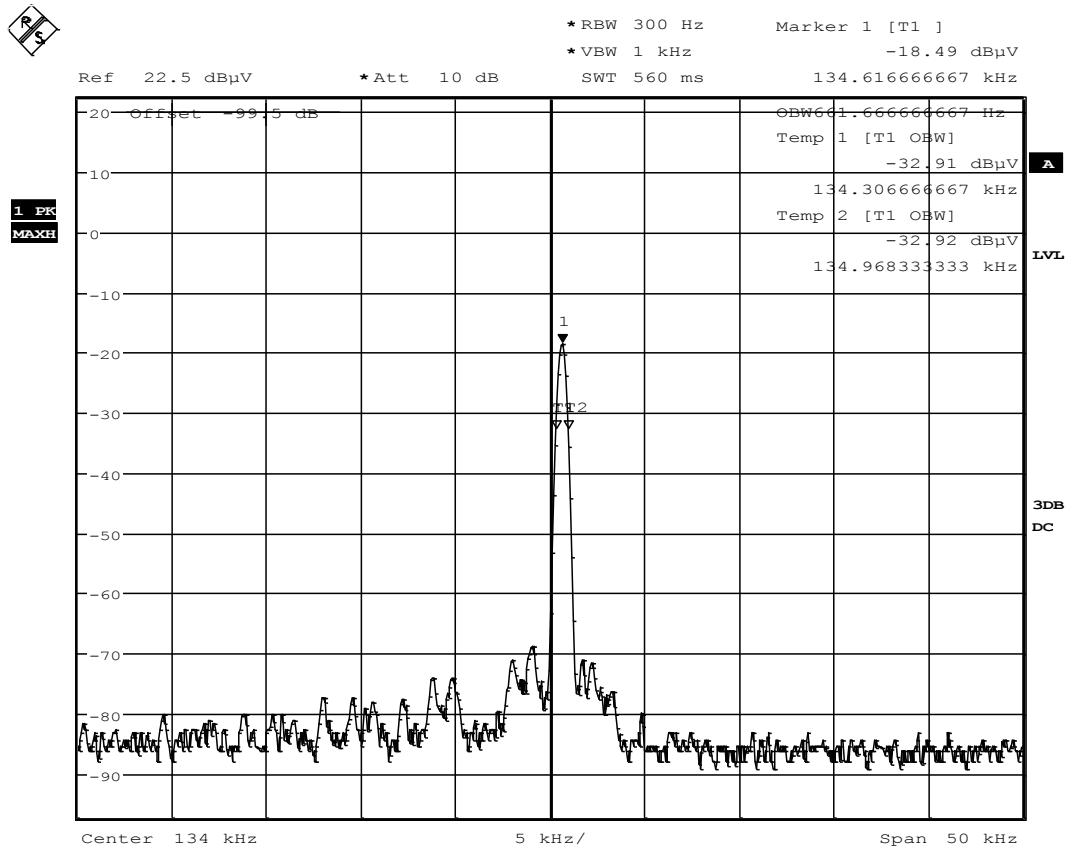


Date: 24.OCT.2016 11:22:28

Diagram 20: OBW_134kHz_TnomVnom_FCC (reference at nominal conditions)

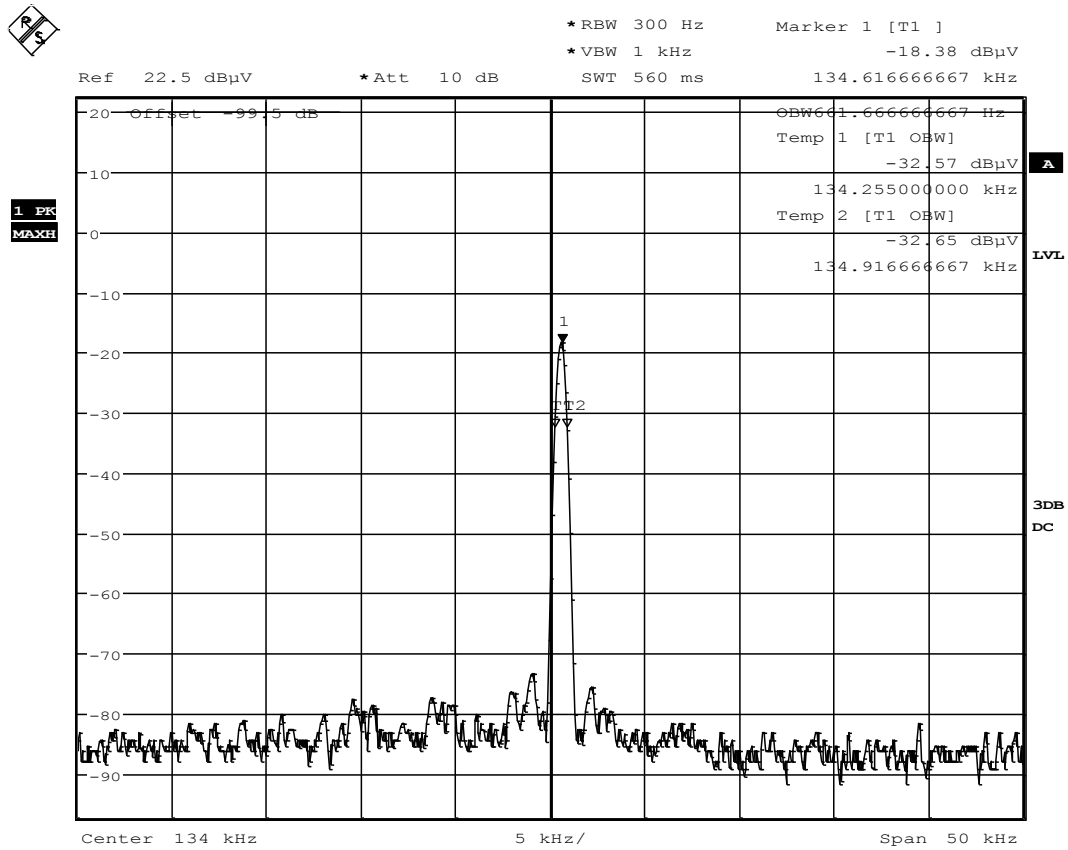


Date: 21.OCT.2016 15:19:49

Diagram 21: OBW_134kHz_M20_T1

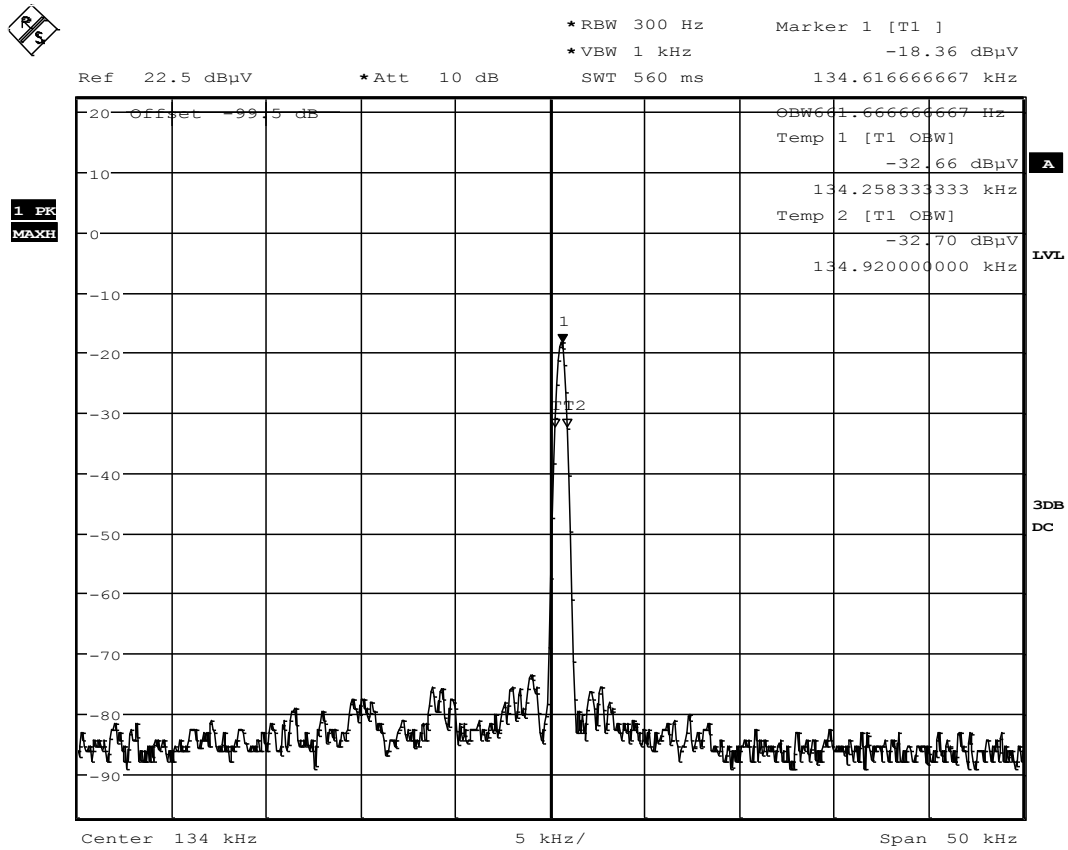


Date: 21.OCT.2016 15:21:29

Diagram 22: OBW_134kHz_M20_T2

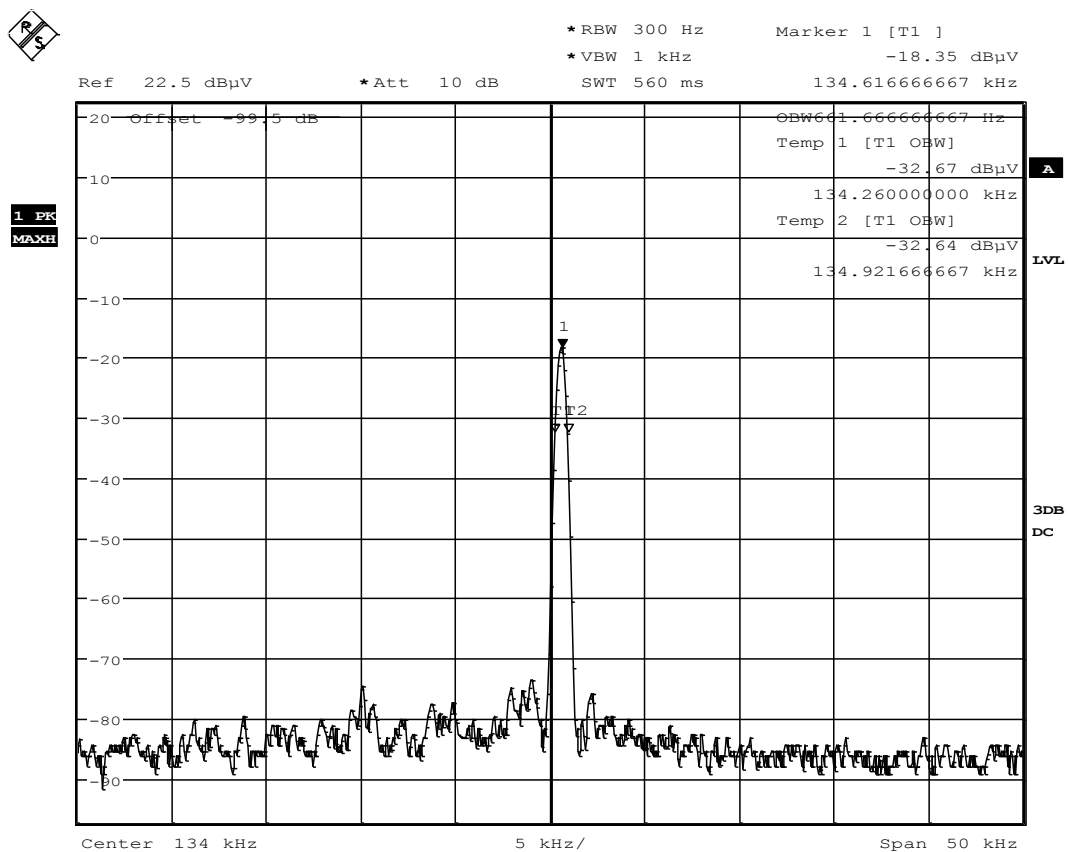


Date: 21.OCT.2016 15:24:29

Diagram 23: OBW_134kHz_M20_T3

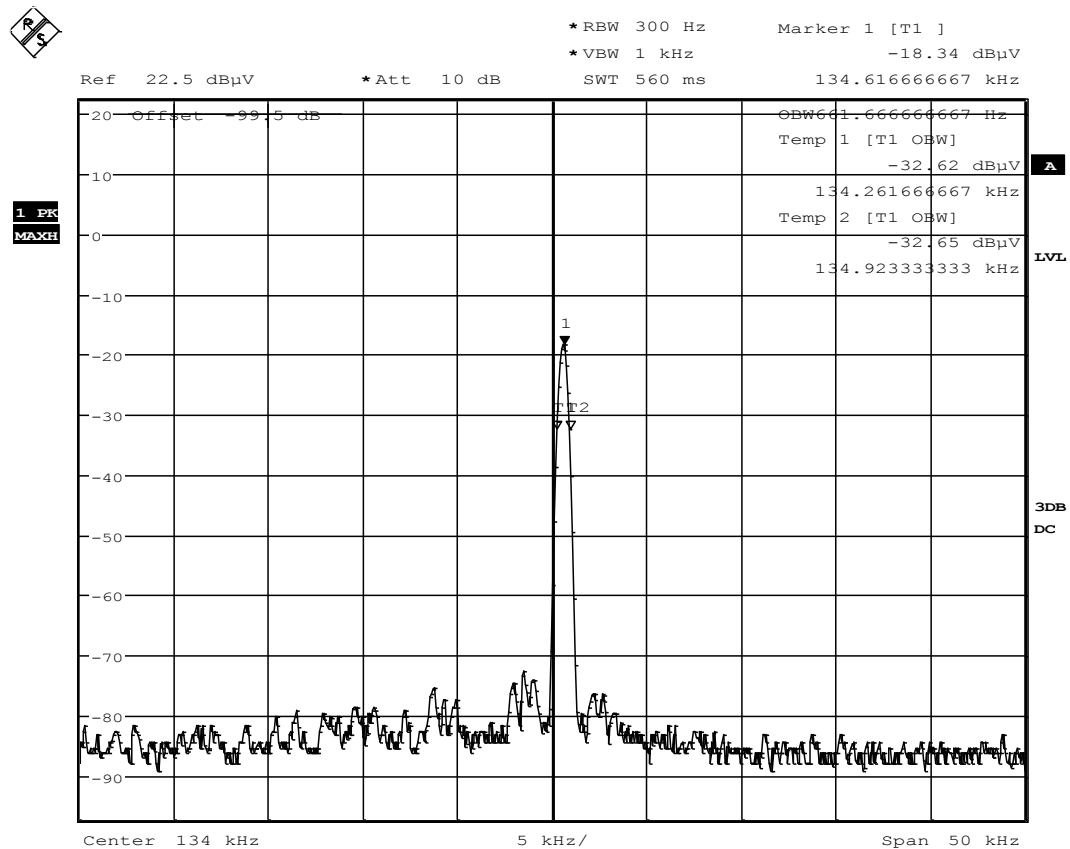


Date: 21.OCT.2016 15:29:30

Diagram 24: OBW_134kHz_M20_T4

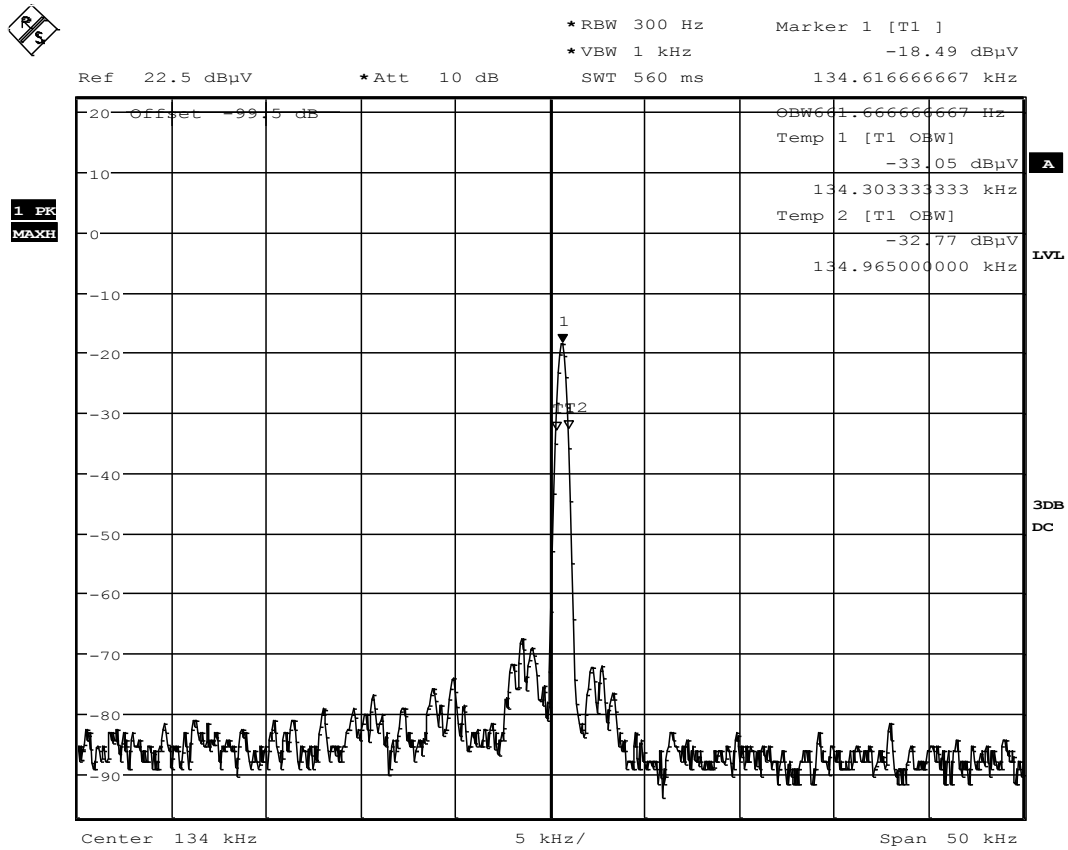


Date: 24.OCT.2016 11:12:43

Diagram 25: OBW_134kHz_P5_T1

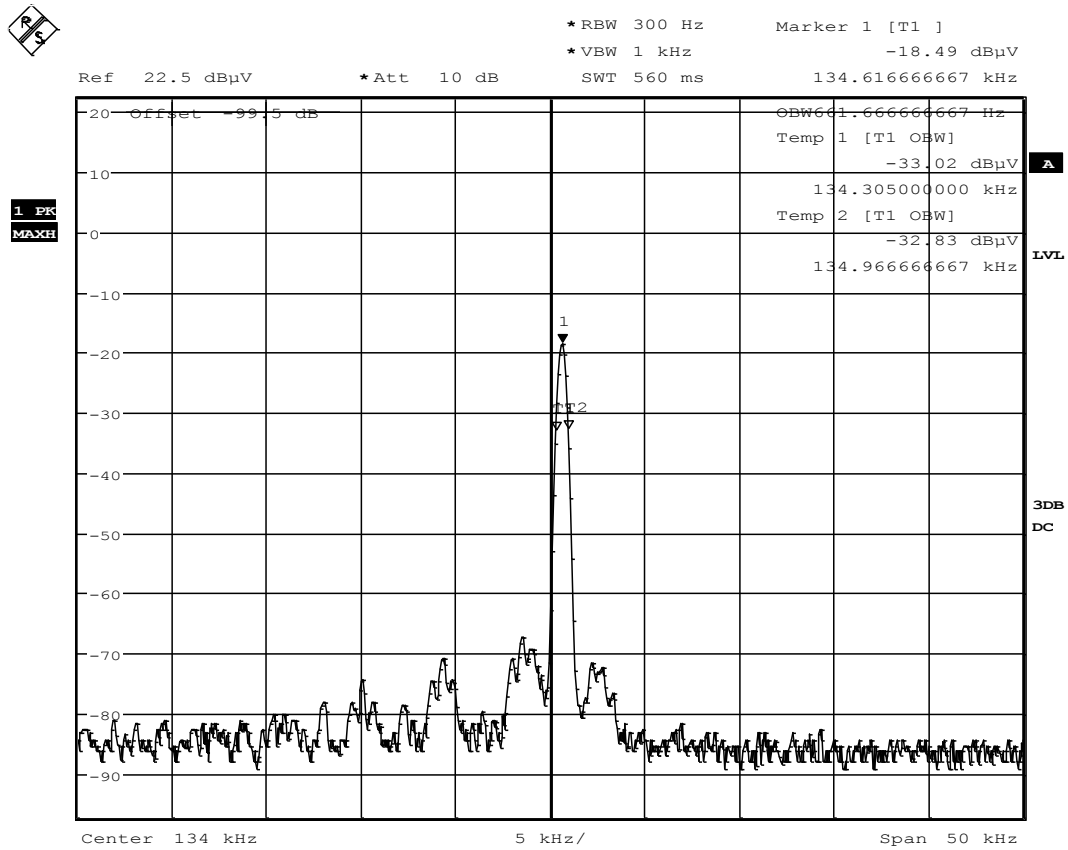


Date: 24.OCT.2016 11:14:27

Diagram 26: OBW_134kHz_P5_T2

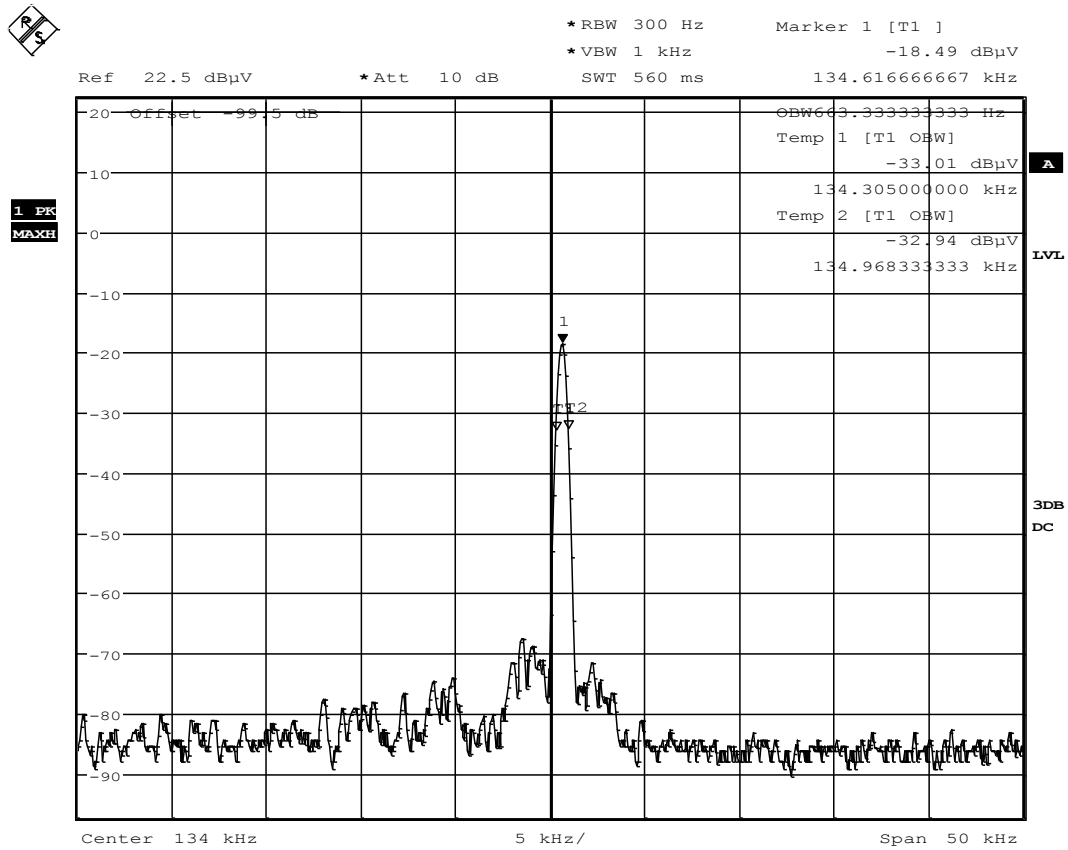


Date: 24.OCT.2016 11:17:28

Diagram 27: OBW_134kHz_P5_T3

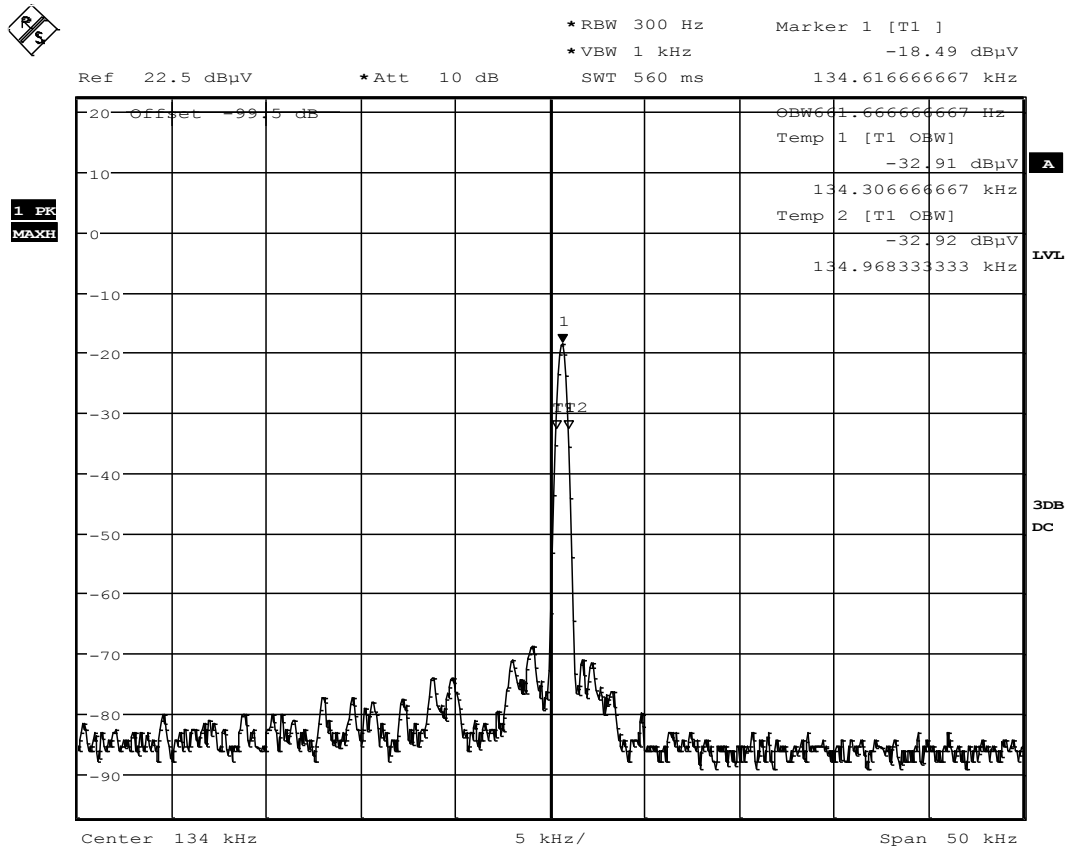


Date: 24.OCT.2016 11:22:28

Diagram 28: OBW_134kHz_P5_T4

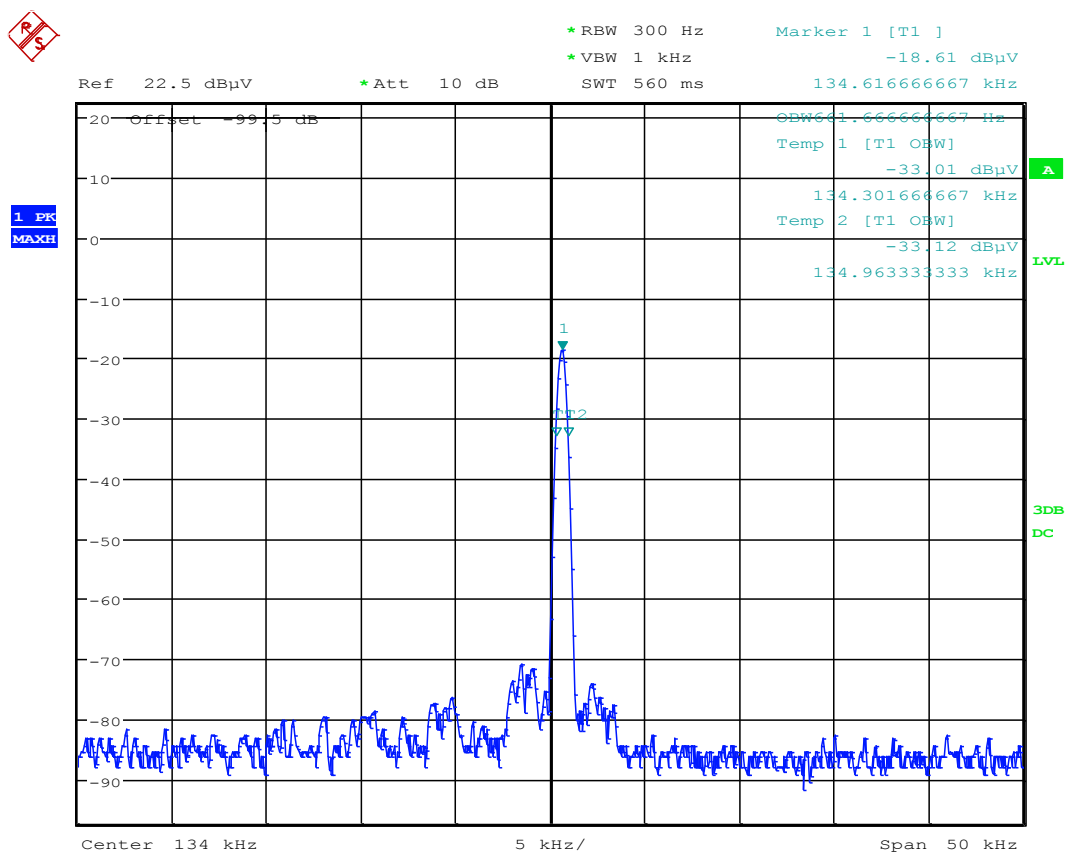


Date: 21.OCT.2016 11:33:03

Diagram 29: OBW_134kHz_P35_T1

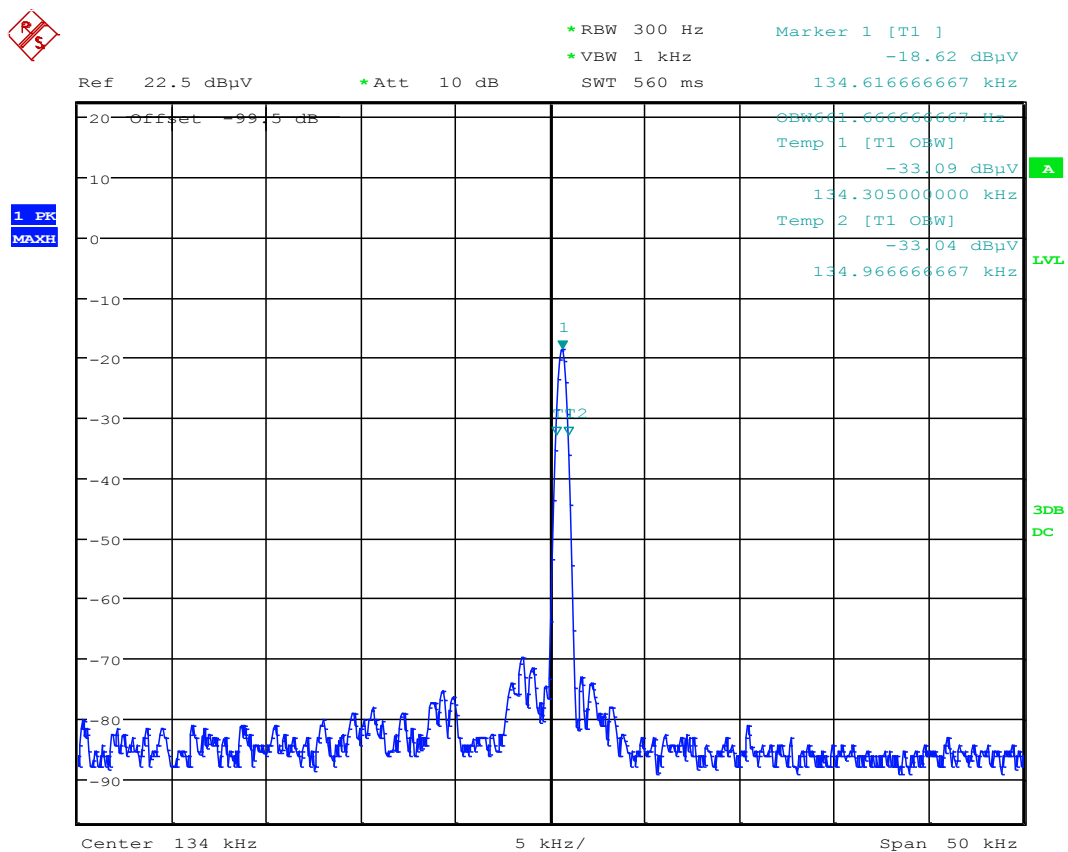


Date: 21.OCT.2016 11:34:43

Diagram 30: OBW_134kHz_P35_T2

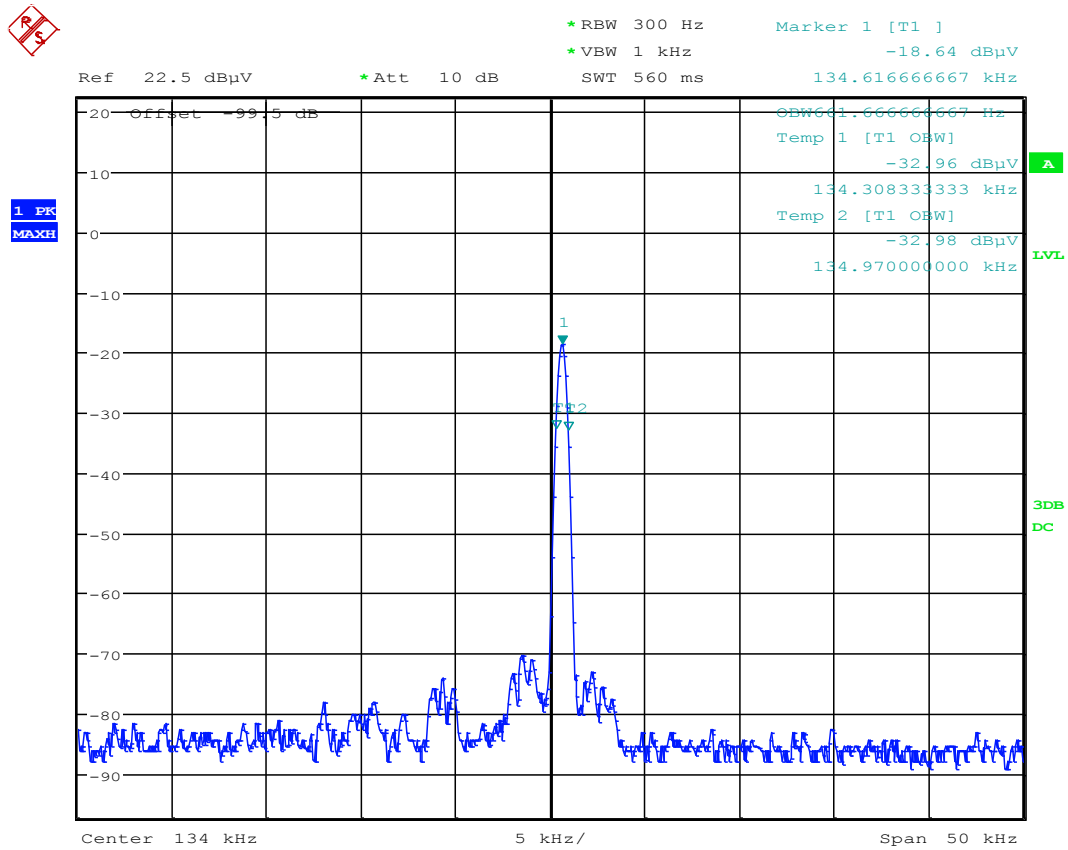


Date: 21.OCT.2016 11:37:52

Diagram 31: OBW_134kHz_P35_T3

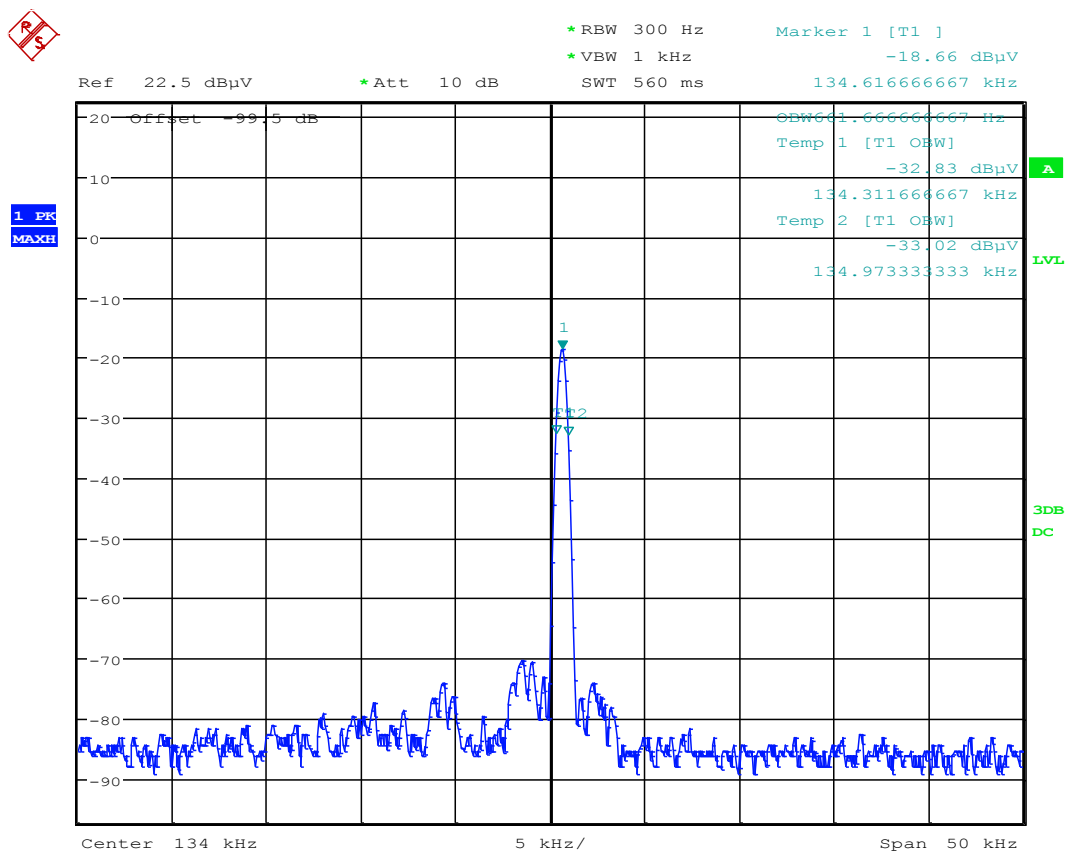


Date: 21.OCT.2016 11:42:45

Diagram 32: OBW_134kHz_P35_T4

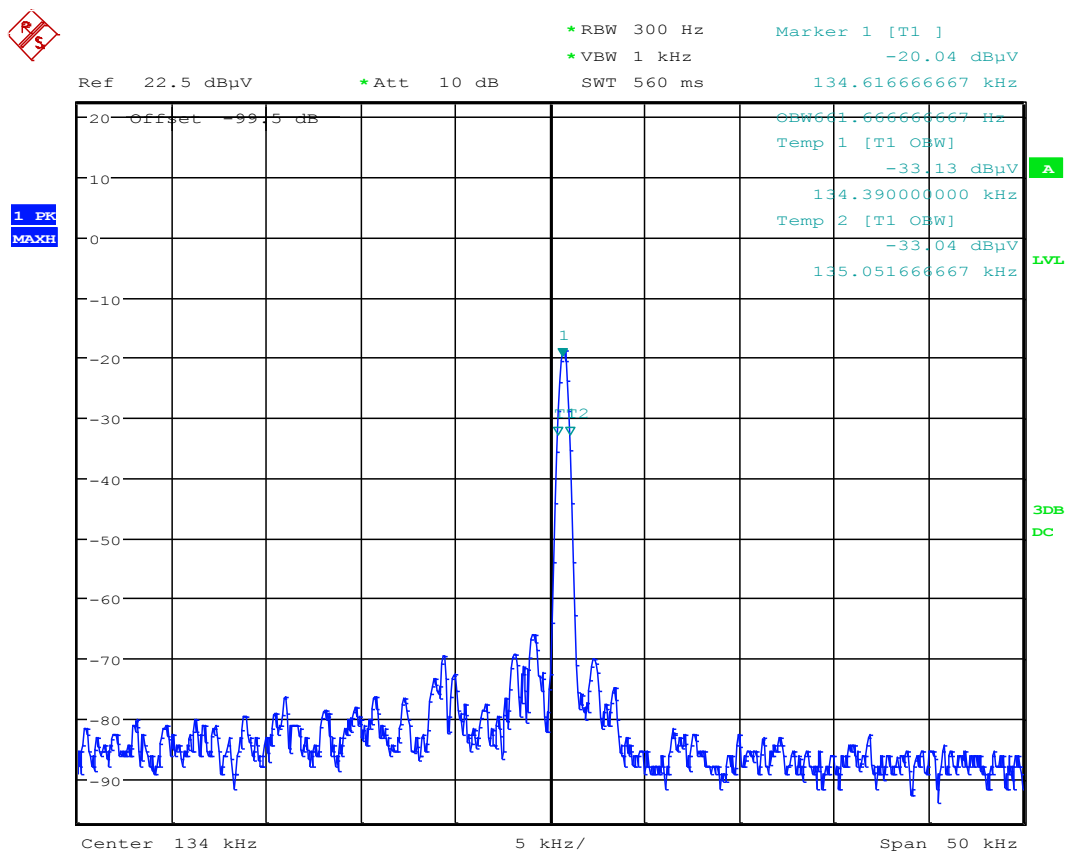


Date: 21.OCT.2016 12:55:39

Diagram 33: OBW_134kHz_P50_T1

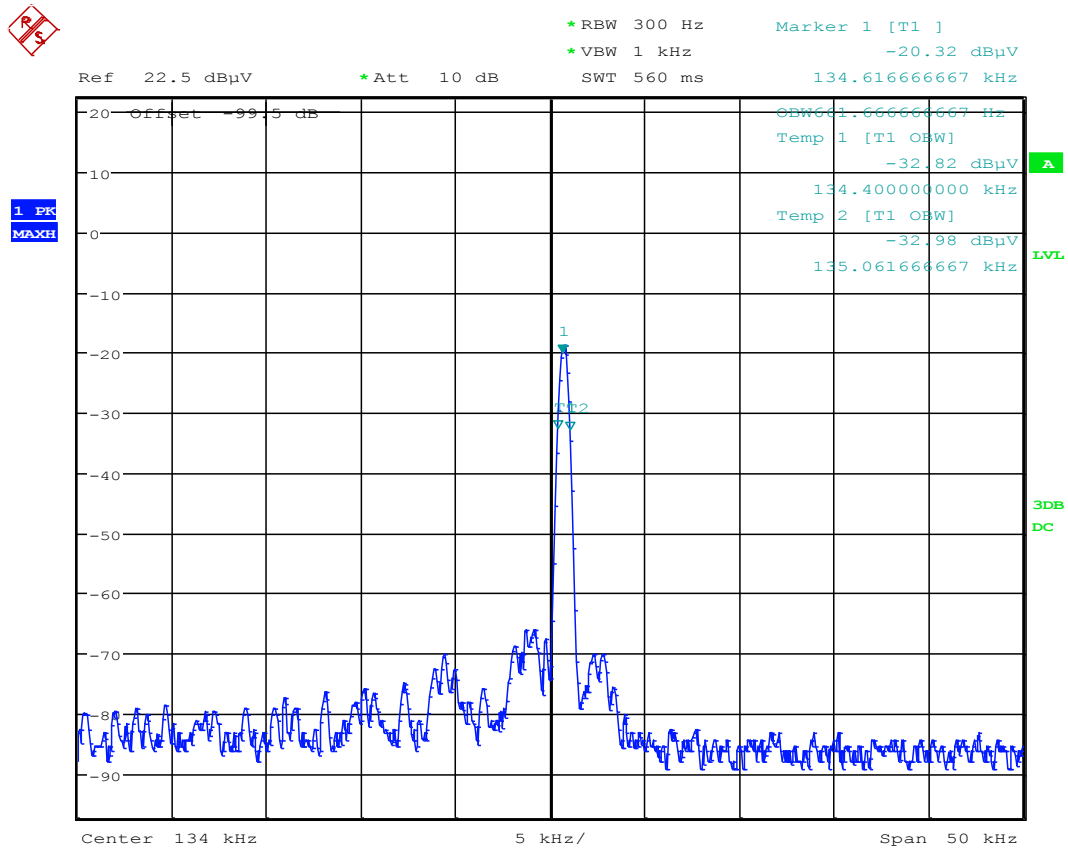


Date: 21.OCT.2016 12:57:19

Diagram 34: OBW_134kHz_P50_T2

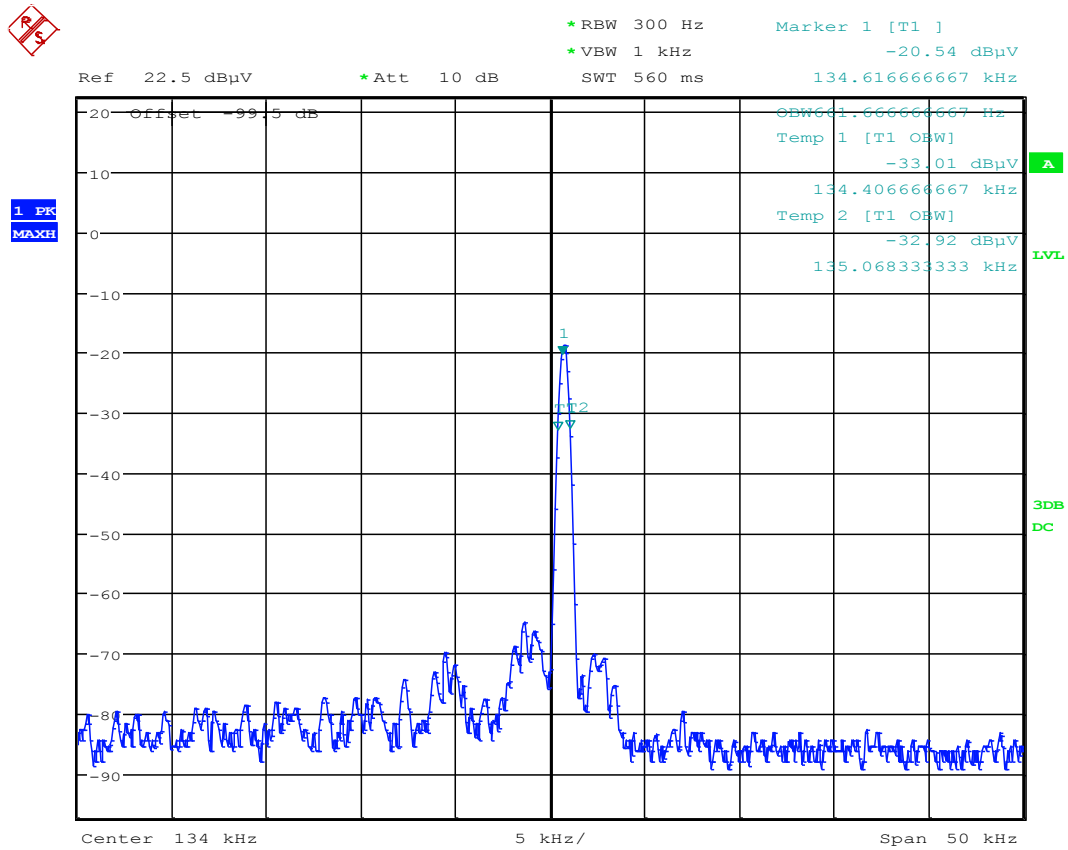

Date: 21.OCT.2016 13:00:19


Diagram 35: OBW_134kHz_P50_T3

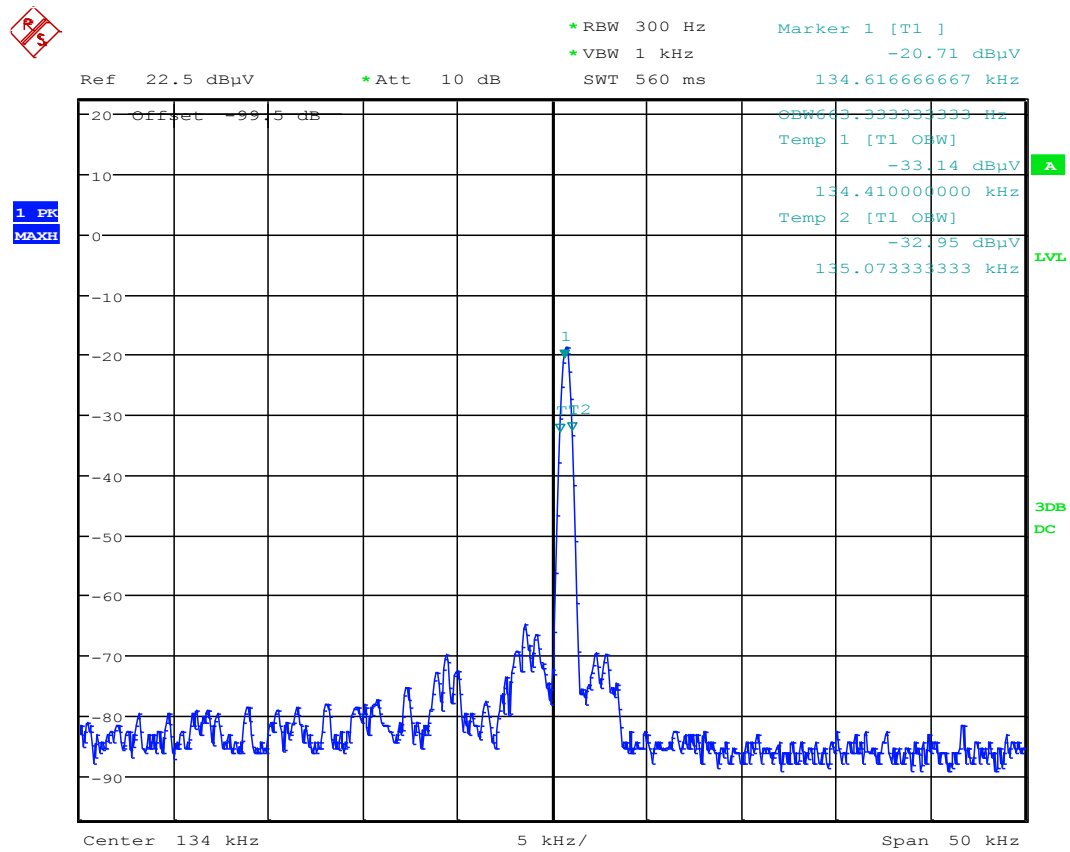

Date: 21.OCT.2016 13:05:19


Diagram 36: OBW_134kHz_P50_T4

1.2.2.2. Voltage variations

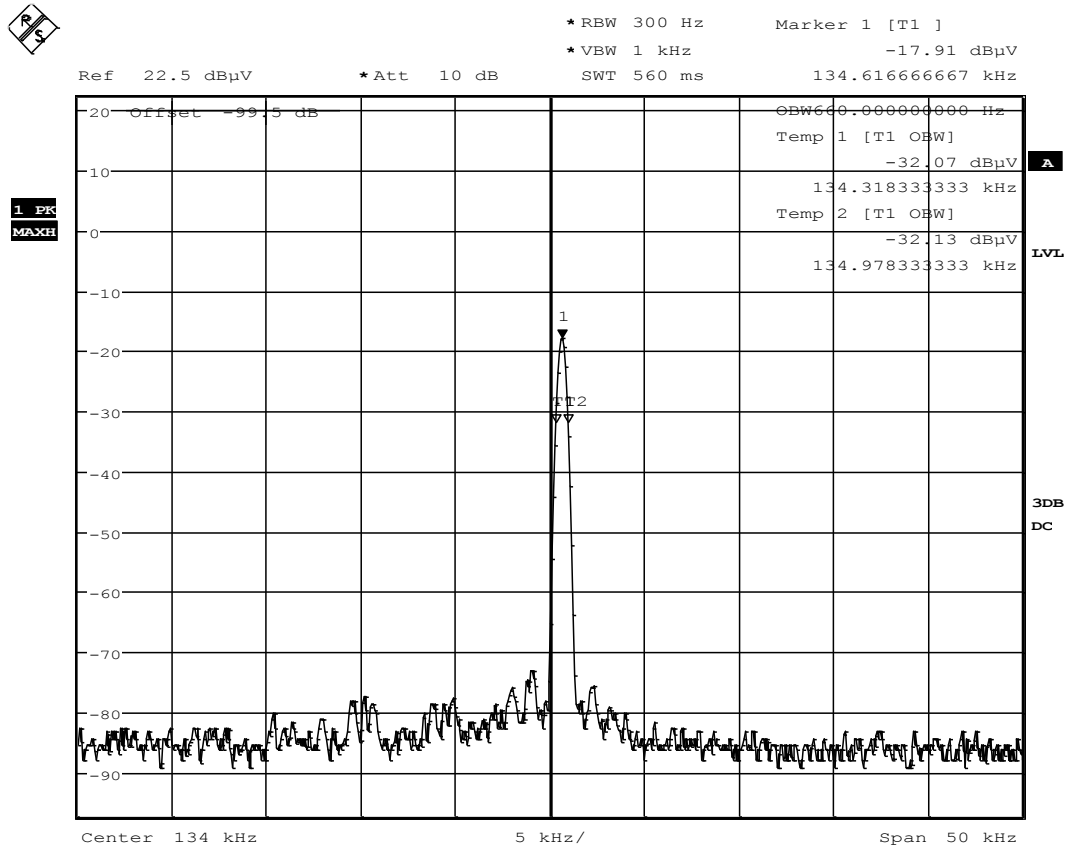

Date: 24.OCT.2016 09:35:16

Diagram 37: OBW_134kHz_TnomVmax_FCC

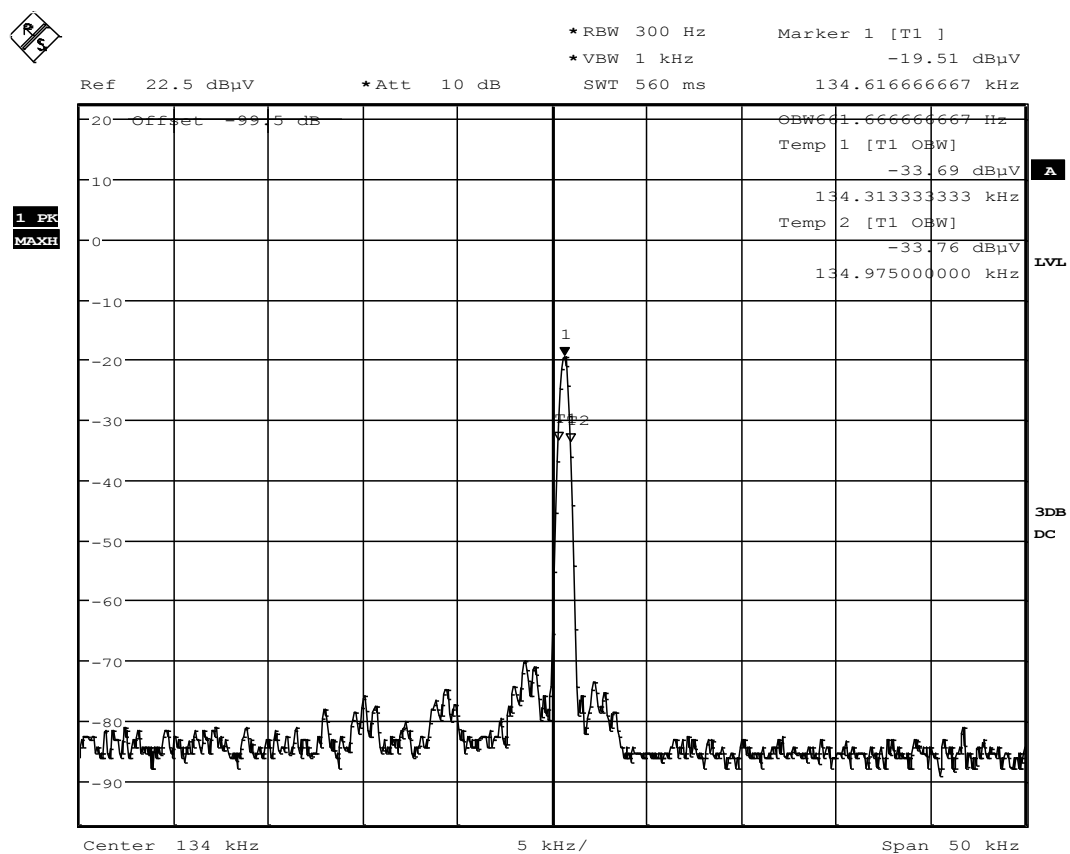

Date: 24.OCT.2016 09:31:58

Diagram 38: OBW_134kHz_TnomVmin_FCC