

FCC Test Report

(Class II Permissive Change)

Product Name	Intel® Wireless-AC 9260D2WL
Model No	9260D2WL
FCC ID	PD99260D2L

Applicant	Intel Corporation
Address	100 Center Point Circle Suite 200 Columbia, South Carolina 29210, United States

Date of Receipt	Mar. 30, 2019
Issued Date	July 01, 2019
Report No.	1930503R-RFUSP30V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report


Issued Date: July 01, 2019

Report No.: 1930503R-RFUSP30V00



Product Name	Intel® Wireless-AC 9260D2WL
Applicant	Intel Corporation
Address	100 Center Point Circle Suite 200 Columbia, South Carolina 29210, United States
Manufacturer	INTEL MOBILE COMMUNICATIONS
Model No.	9260D2WL
FCC ID.	PD99260D2L
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	DC 3.3V
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E: 2018 ANSI C63.4: 2014, ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v02
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Rita Huang)

Tested By :



(Engineer / Yunche Chen)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment	10
2. Maximun conducted output power.....	11
2.1. Test Setup	11
2.2. Limits	11
2.3. Test Procedure	13
2.4. Uncertainty	13
2.5. Test Result of Maximum conducted output power.....	14
3. Radiated Emission.....	97
3.1. Test Setup	97
3.2. Limits	98
3.3. Test Procedure	99
3.4. Uncertainty	101
3.5. Test Result of Radiated Emission.....	102
4. Band Edge.....	448
4.1. Test Setup	448
4.2. Limits	448
4.3. Test Procedure	449
4.4. Uncertainty	451
4.5. Test Result of Band Edge	452
5. Duty Cycle.....	690
5.1. Test Setup	690
5.2. Test Procedure	690
5.3. Uncertainty	690
5.4. Test Result of Duty Cycle.....	691
6. EMI Reduction Method During Compliance Testing	702

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Intel® Wireless-AC 9260D2WL
Trade Name	Intel
FCC ID.	PD99260D2L
Model No.	9260D2WL
Frequency Range	802.11a/n-20MHz: 5180-5320MHz, 5500-5700MHz, 5720 MHz, 5745-5825MHz 802.11n-40MHz: 5190-5310MHz, 5510-5670MHz, 5710 MHz, 5755-5795MHz 802.11ac-80MHz: 5210-5290MHz, 5530-5690MHz, 5775MHz 802.11ac-160MHz: 5250MHz, 5570MHz
Number of Channels	802.11a/n-20MHz: 25 802.11n-40MHz: 12 802.11ac-80MHz: 6 802.11ac-160MHz: 2
Data Rate	802.11a: 6 - 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7MHz
Type of Modulation	802.11a/n/ac: OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Antenna type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table "Antenna List"

Antenna List

No.	Manufacturer	Part No.	Antenna type	Peak Gain
1	WIESON Technologies co.,Ltd.	GY121HT0321-003-H / GY121C888-001-H	Dipole Antenna	2.92 dBi for 5.15~5.25GHz 3.19 dBi for 5.25~5.35GHz 4.41 dBi for 5.47~5.725GHz 4.22 dBi for 5.725~5.85GHz

Note: The antenna of EUT is conforming to FCC 15.203.

802.11a/n-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 036:	5180 MHz	Channel 040:	5200 MHz	Channel 044:	5220 MHz	Channel 048:	5240 MHz
Channel 052:	5260 MHz	Channel 056:	5280 MHz	Channel 060:	5300 MHz	Channel 064:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 144:	5720 MHz
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 038:	5190 MHz	Channel 046:	5230 MHz	Channel 054:	5270 MHz	Channel 062:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 142:	5710 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz

802.11ac-80MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 042:	5210 MHz	Channel 058:	5290 MHz	Channel 106:	5530 MHz	Channel 122:	5610 MHz
Channel 138:	5690 MHz	Channel 155:	5775 MHz				

802.11ac-160MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency
Channel 50:	5250 MHz	Channel 114:	5570 MHz

Note:

1. This device is an Intel® Wireless-AC 9260D2WL with a built-in WLAN (802.11a/b/g/n/ac) with Bluetooth (5.0 and V3.0+HS, V2.1+EDR) transceiver, this report for 5GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance of transmitter with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.
5. This is to request a Class II permissive change for FCC ID: PD99260D2W, originally granted on 02/05/2019.

The major change filed under this application is:

Change #1: Addition an Dipole Antenna, the antenna type is different with the original application, All other hardware is identical with original granted.

Test Mode	Mode 1 SISO A: Transmit (802.11a_6Mbps)
	Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)
	Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)
	Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)
	Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)
	Mode 6 SISO B: Transmit (802.11a_6Mbps)
	Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps)
	Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)
	Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)
	Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)
	Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)
	Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)
	Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)
	Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)
	Mode 15: Transmit-SISO A
	Mode 16: Transmit-SISO B
	Mode 17: Transmit-MIMO


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Test Fixture	Intel	N/A	N/A
2	Notebook PC	DELL	Latitude E5470	416FJC0
				Non-Shielded, 1.8m

Signal Cable Type	Signal cable Description
A	USB Cable
B	Signal Cable

1.4. Configuration of tested System

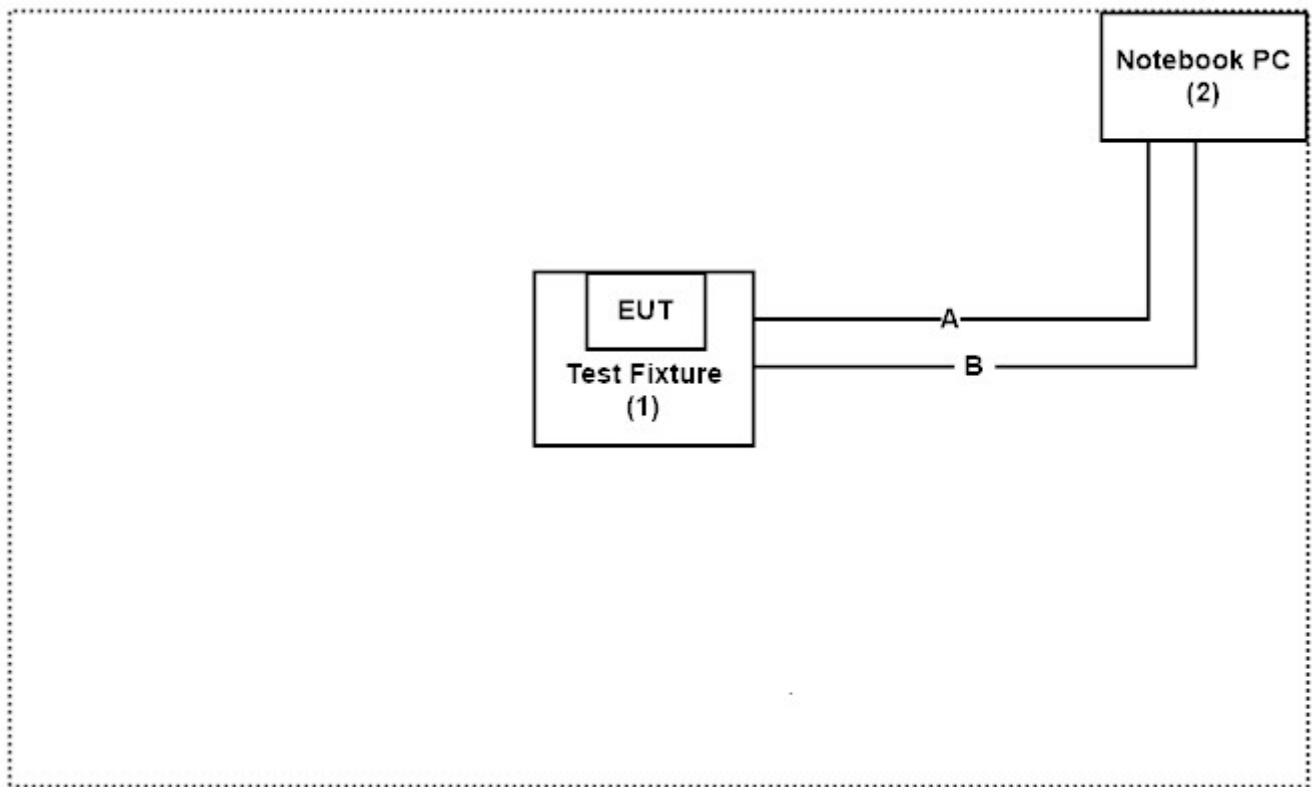

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “DRTU (Ver 11.1850.0-08900)” on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/chinese/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: [http:// www.dekra.com.tw](http://www.dekra.com.tw)

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2019/02/26	2020/02/25
X	Spectrum Analyzer	Agilent	N9010A	MY53470892	2018/09/27	2019/09/26
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2018/08/01	2019/07/31
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2018/07/25	2019/07/24
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2018/07/25	2019/07/24
	EMI Test Receiver	R&S	ESCS 30	100369	2018/11/19	2019/11/18
	LISN	R&S	ENV216	101105	2019/03/30	2020/03/29
	LISN	R&S	ESH3-Z5	836679/014	2019/04/02	2020/04/01
	Coaxial Cable	DEKRA	RG 400	LC018-RG	2019/06/21	2020/06/20

For Radiated measurements /Site3/CB8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2019/03/11	2020/03/10
X	Loop Antenna	Teseq	HLA6121	37133	2018/10/13	2019/10/12
X	Bilog Antenna	Schaffner Chase	CBL6112B	2707	2019/06/24	2020/06/23
X	Coaxial Cable	DEKRA	RG 214	LC003-RG	2019/06/14	2020/06/13
X	Pre-Amplifier	Jet-Power	JPA-10M1G33	170101000330010	2019/06/14	2020/06/13
X	Horn Antenna	ETS-Lindgren	3117	00135205	2019/05/03	2020/05/02
X	Horn Antenna	SCHWARZBECK	9120D	576	2018/12/18	2019/12/17
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2019/04/10	2020/04/09
X	Horn Antenna	Com-Power	AH-840	101043	2019/01/09	2020/01/08
X	Amplifier + Cable	EMCI	EMC184045SE	980370	2019/03/21	2020/03/20
X	Filter	MICRO-TRONICS	BRM50702	G270	2018/08/06	2019/08/05
X	Filter	MICRO-TRONICS	BRM50716	G196	2018/08/06	2019/08/05


Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :QuiTek EMI 2.0 V2.1.113.


2. Maximun conducted output power

2.1. Test Setup


26dBc Occupied Bandwidth

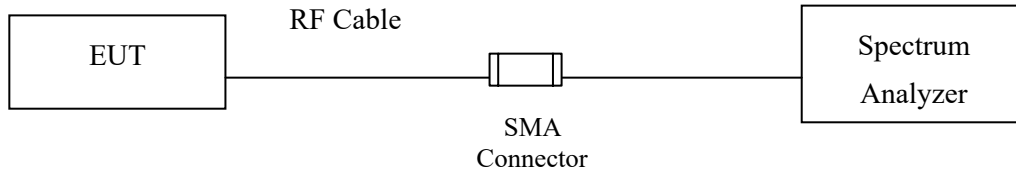

Conduction Power Measurement (for 802.11an)

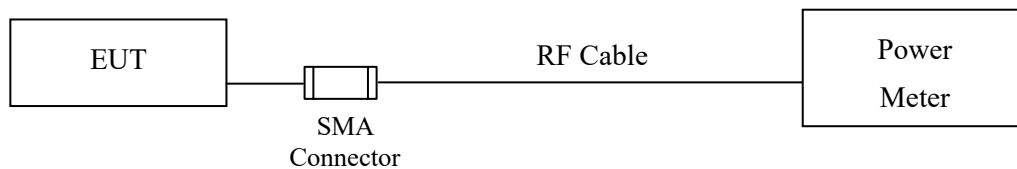

Conduction Power Measurement (for 802.11ac)

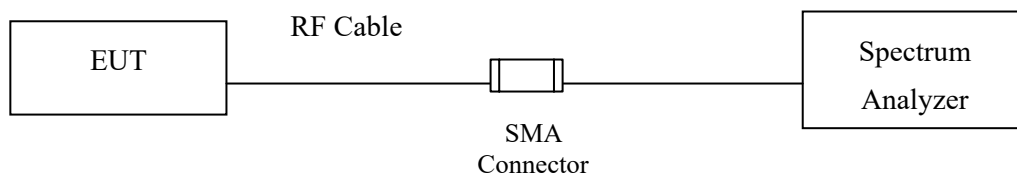

2.2. Limits

2.2.1. For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna

gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2.2.2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2.2.3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

2.3. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW $\leq$ 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D01 section F) procedure is used for measurements.

2.4. Uncertainty

± 1.62 dB

2.5. Test Result of Maximum conducted output power

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
		Measurement Level (dBm)							
36	5180	18.33	--	--	--	--	--	--	--
44	5220	20.83	20.66	20.50	20.44	20.34	20.19	20.04	19.86
48	5240	21.06	--	--	--	--	--	--	--
52	5260	21.07	--	--	--	--	--	--	--
60	5300	20.97	20.87	20.72	20.58	20.50	20.33	20.21	20.05
64	5320	18.45	--	--	--	--	--	--	--
100	5500	19.14	--	--	--	--	--	--	--
116	5580	20.67	20.41	20.16	20.04	19.95	19.83	19.62	19.51
140	5700	18.94	--	--	--	--	--	--	--
149	5745	20.53	--	--	--	--	--	--	--
157	5785	20.86	20.72	20.65	20.53	20.43	20.33	20.21	20.12
165	5825	20.92	--	--	--	--	--	--	--


Note: Maximum conducted output power Value = Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
36	5180	--	18.33	24	--	Pass
44	5220	--	20.83	24	--	Pass
48	5240	--	21.06	24	--	Pass
52	5260	17.047	21.07	24	23.32	Pass
60	5300	17.789	20.97	24	23.50	Pass
64	5320	16.939	18.45	24	23.29	Pass
100	5500	17.000	19.14	24	23.30	Pass
116	5580	17.119	20.67	24	23.33	Pass
140	5700	16.947	18.94	24	23.29	Pass
149	5745	--	20.53	30	--	Pass
157	5785	--	20.86	30	--	Pass
165	5825	--	20.92	30	--	Pass

99% Occupied Bandwidth:


Channel 52

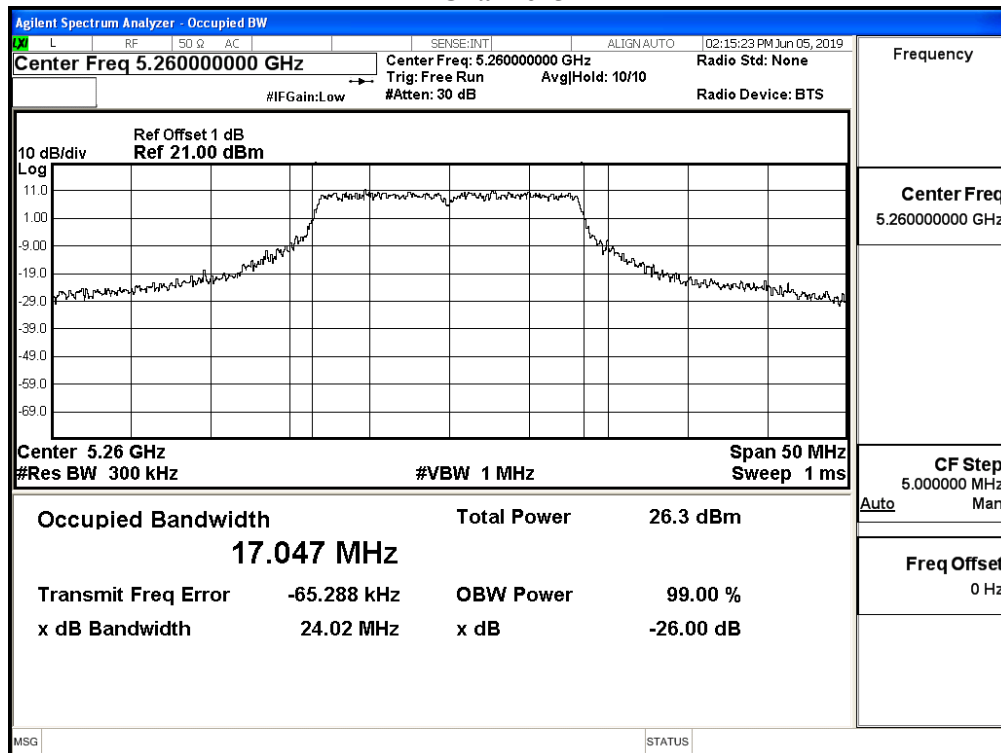


Channel 60

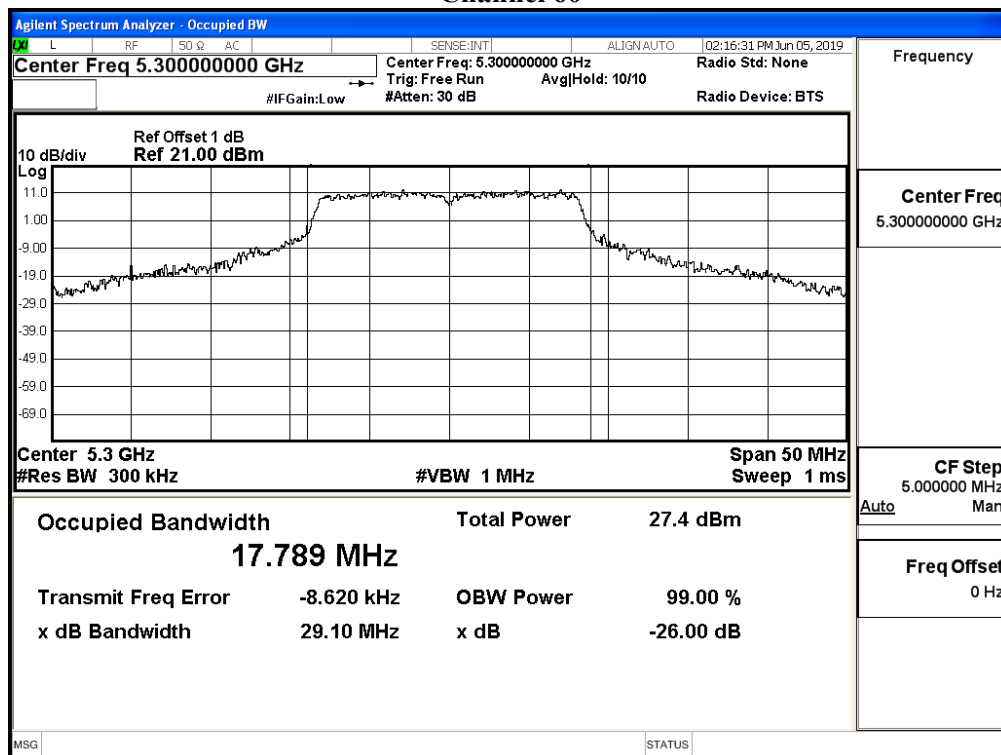


Channel 64

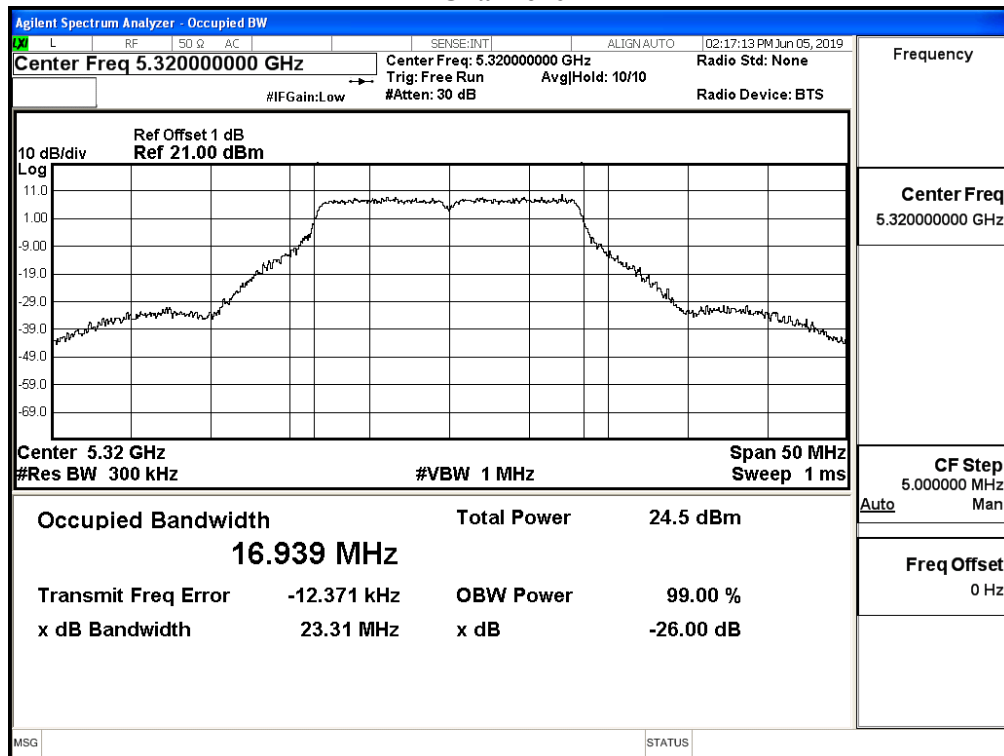


Channel 100

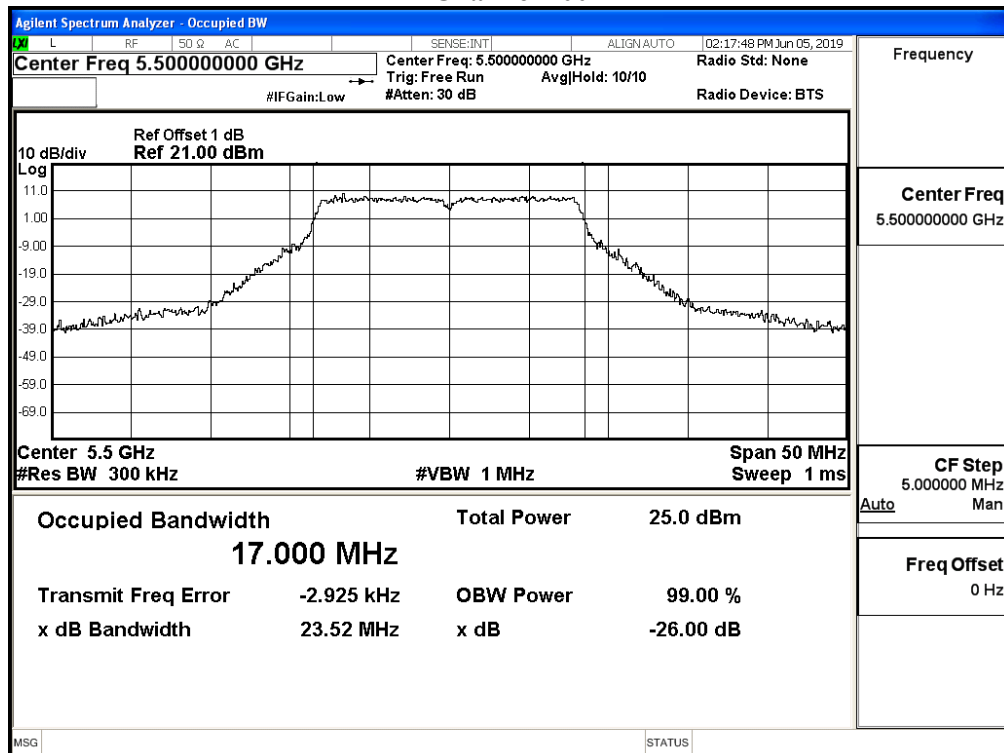

Channel 116

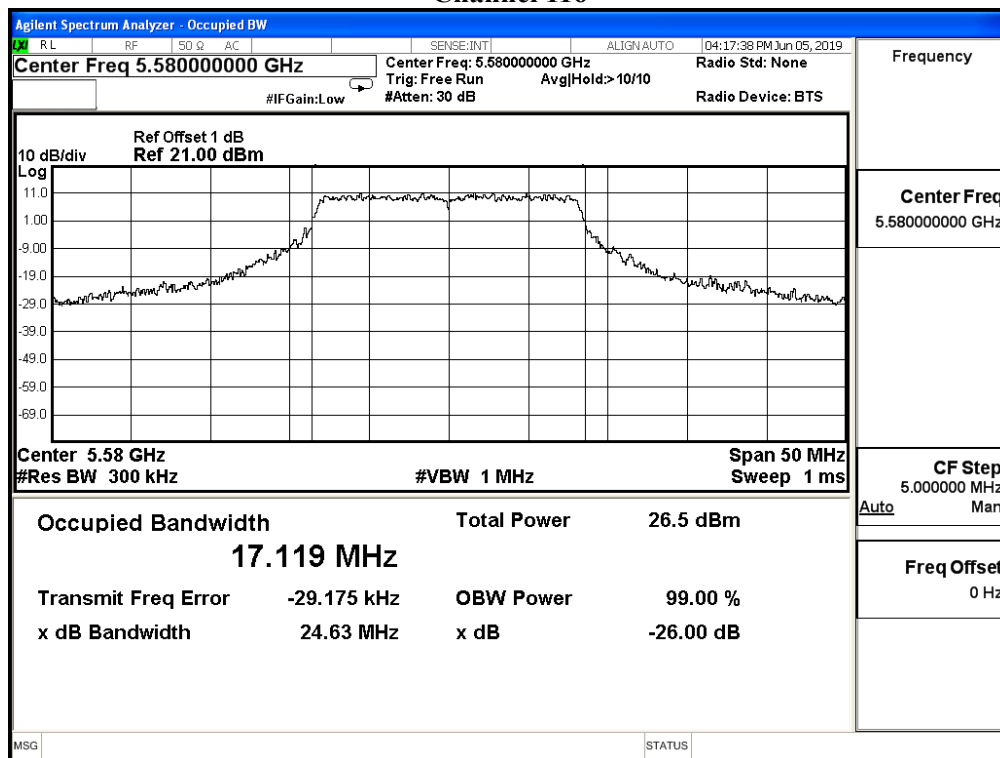

Channel 140

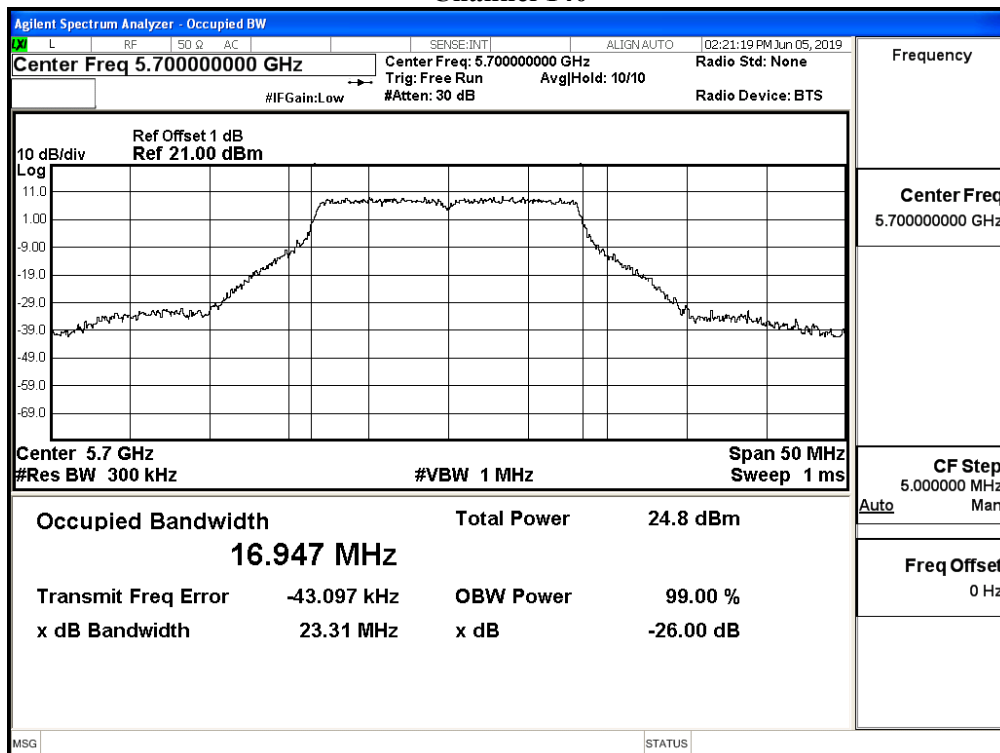

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2
		Measurement Level (dBm)							
36	5180	18.17	--	--	--	--	--	--	--
44	5220	20.57	20.51	20.38	20.27	20.14	19.97	19.83	19.70
48	5240	20.72	--	--	--	--	--	--	--
52	5260	20.66	--	--	--	--	--	--	--
60	5300	20.56	20.48	20.37	20.32	20.24	20.11	19.95	19.76
64	5320	18.27	--	--	--	--	--	--	--
100	5500	18.6	--	--	--	--	--	--	--
116	5580	20.62	20.51	20.36	20.21	20.14	20.08	19.92	19.78
140	5700	18.73	--	--	--	--	--	--	--
144(U-NII-2C)	5720	19.56	19.49	19.35	19.22	19.04	18.97	18.87	18.78
144(U-NII-3)	5720	13.98	13.81	13.75	13.61	13.47	13.35	13.26	13.11
149	5745	20.73	--	--	--	--	--	--	--
157	5785	20.86	20.74	20.62	20.48	20.35	20.24	20.16	20.08
165	5825	20.71	--	--	--	--	--	--	--


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
36	5180	--	18.17	24	--	Pass
44	5220	--	20.57	24	--	Pass
48	5240	--	20.72	24	--	Pass
52	5260	18.143	20.66	24	23.59	Pass
60	5300	18.084	20.56	24	23.57	Pass
64	5320	18.041	18.27	24	23.56	Pass
100	5500	17.994	18.6	24	23.55	Pass
116	5580	18.082	20.62	24	23.57	Pass
140	5700	18.067	18.73	24	23.57	Pass
144(U-NII-2C)	5720	14.194	19.56	24	22.52	Pass
144(U-NII-3)	5720	--	13.98	30	--	Pass
149	5745	--	20.73	30	--	Pass
157	5785	--	20.86	30	--	Pass
165	5825	--	20.71	30	--	Pass

99% Occupied Bandwidth:


Channel 52

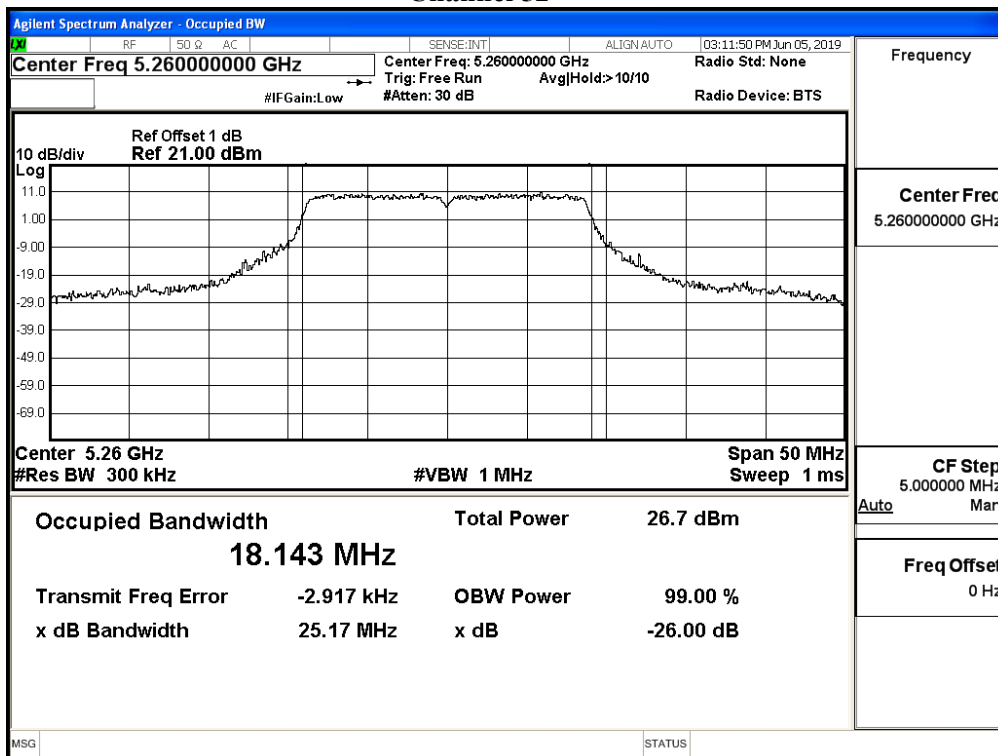


Channel 60

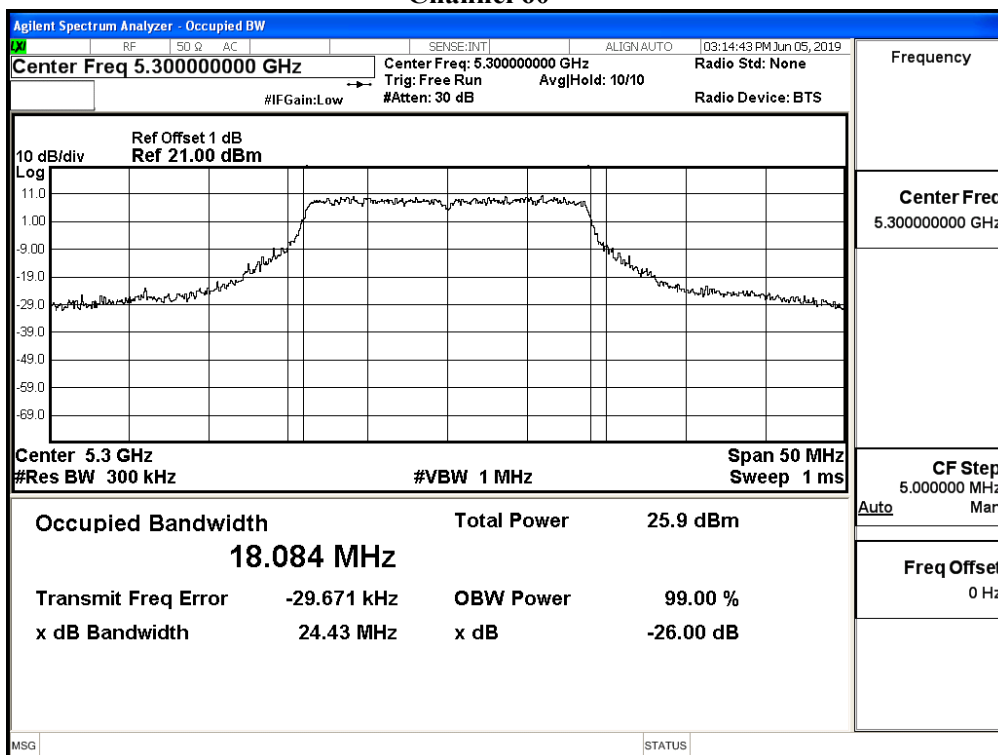


Channel 64

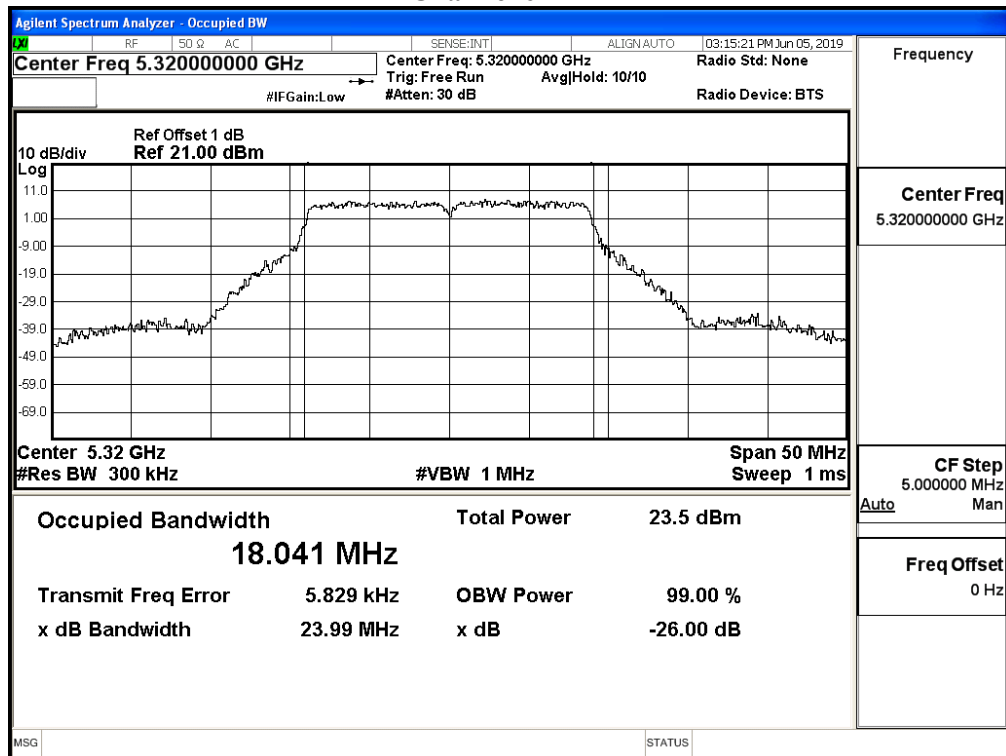


Channel 100

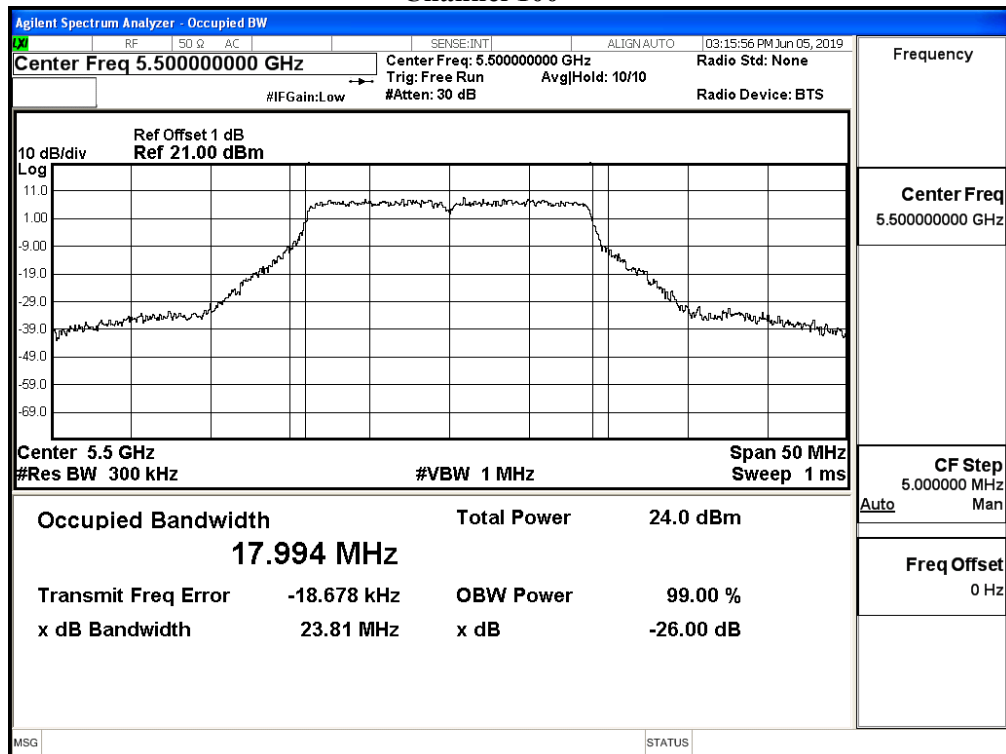


Channel 116


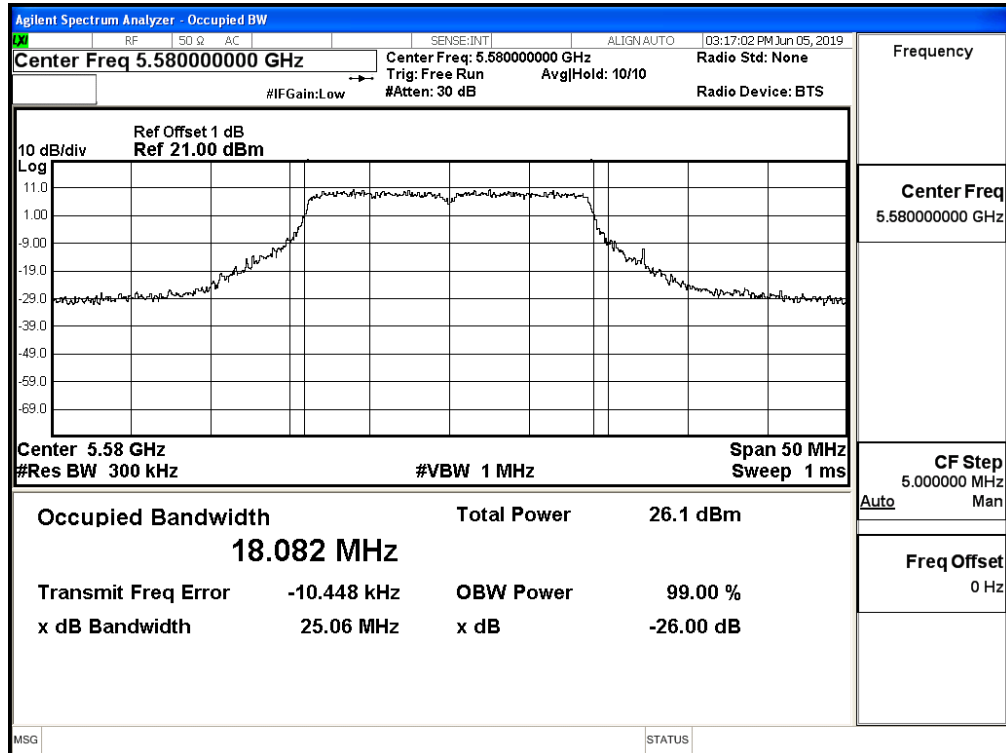


Channel 140

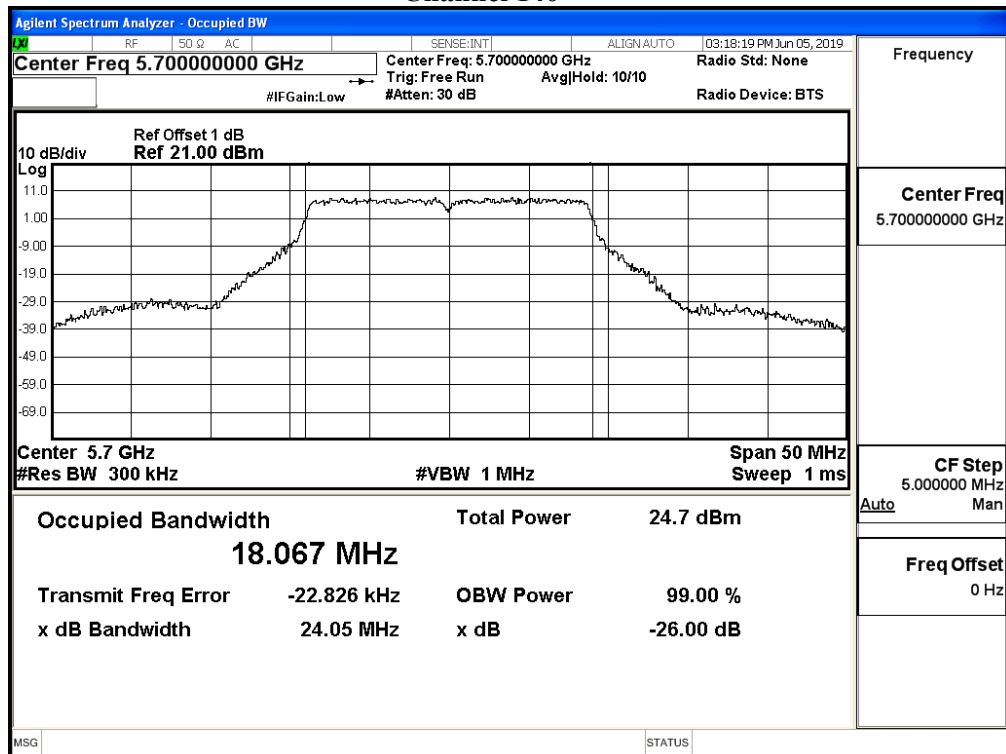

Channel 144

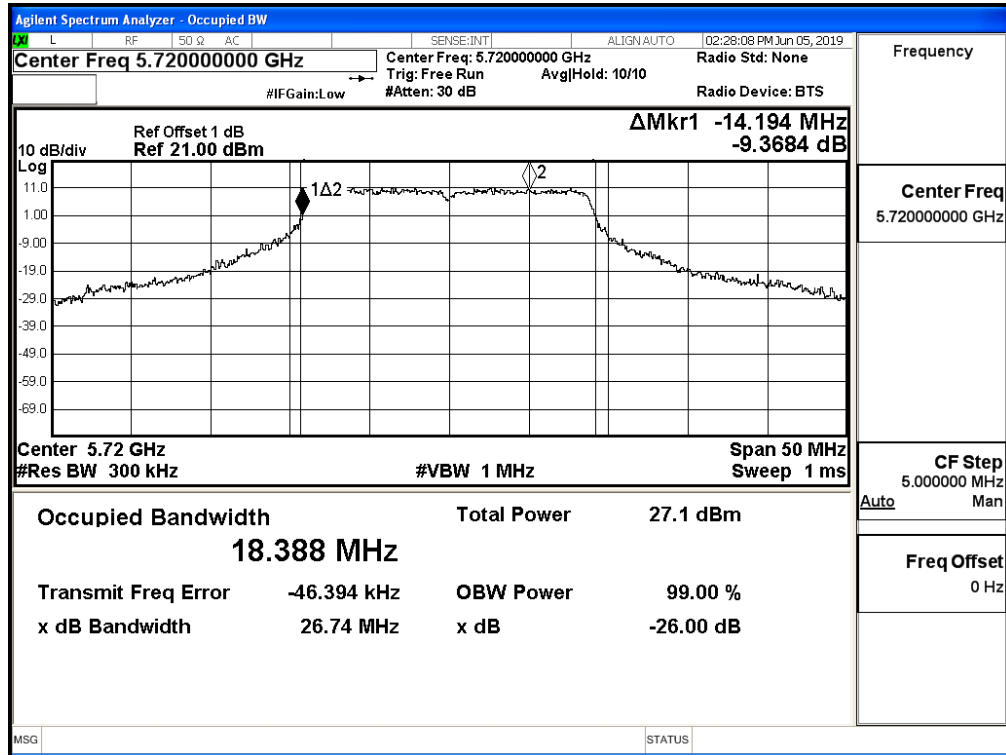

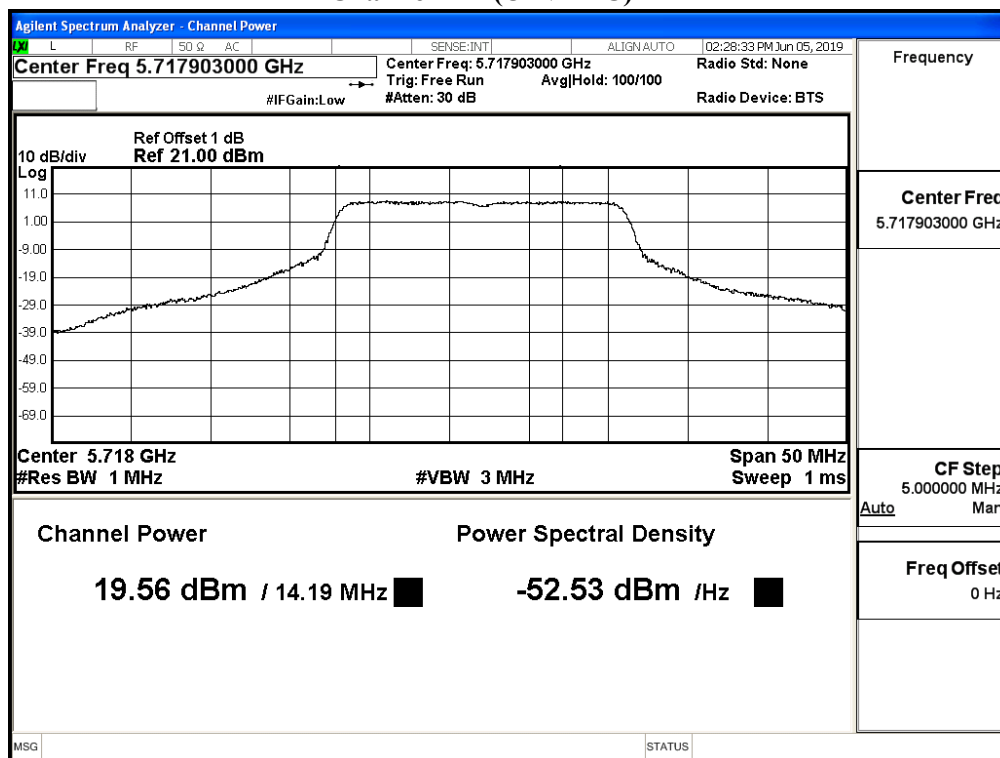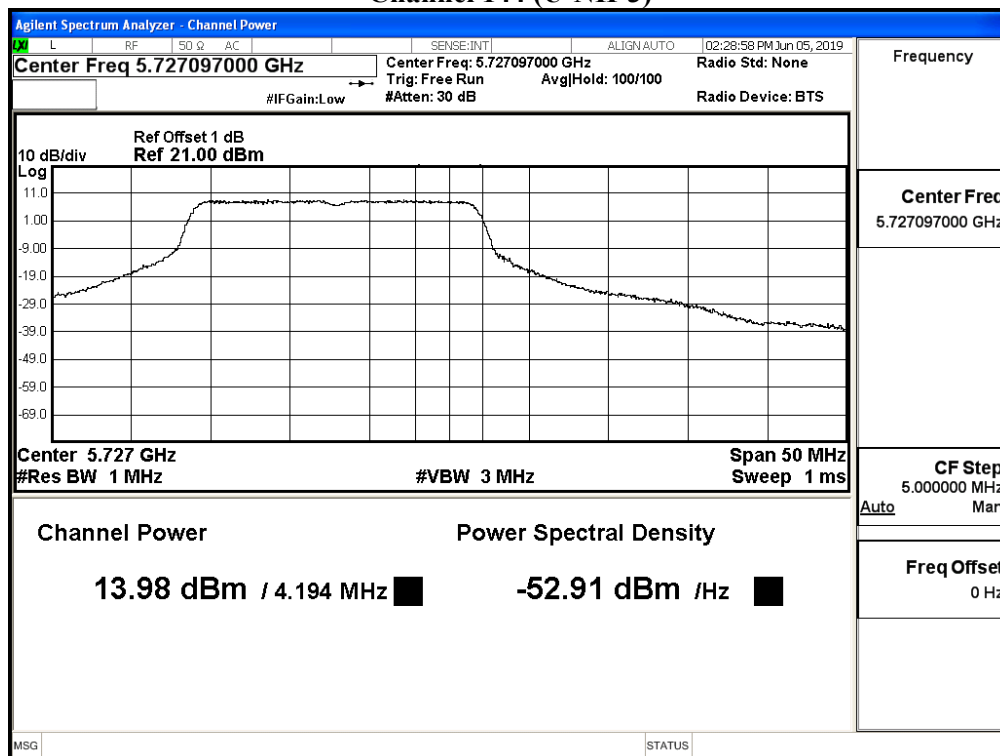Maximum conducted output power:**Channel 144 (U-NII-2C)****Maximum conducted output power:****Channel 144 (U-NII-3)**

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		15	30	45	60	90	120	135	150
		Measurement Level (dBm)							
38	5190	18.11	--	--	--	--	--	--	--
46	5230	20.58	20.49	20.39	20.24	20.14	19.96	19.78	19.67
54	5270	20.83	--	--	--	--	--	--	--
62	5310	15.97	15.73	15.58	15.43	15.26	15.08	14.98	14.85
102	5510	19.25	--	--	--	--	--	--	--
110	5550	20.92	20.73	20.61	20.48	20.30	20.12	20.02	19.86
134	5670	19.45	--	--	--	--	--	--	--
142(U-NII-2C)	5710	20.67	20.61	20.52	20.41	20.27	20.21	20.12	19.95
142(U-NII-3)	5710	10.48	10.34	10.25	10.14	10.07	10	9.85	9.73
151	5755	20.81	--	--	--	--	--	--	--
159	5795	20.89	20.75	20.65	20.50	20.36	20.24	20.16	20.02


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
38	5190	--	18.11	24	--	Pass
46	5230	--	20.58	24	--	Pass
54	5270	36.617	20.83	24	26.64	Pass
62	5310	36.507	15.97	24	26.62	Pass
102	5510	36.561	19.25	24	26.63	Pass
110	5550	36.574	20.92	24	26.63	Pass
134	5670	36.548	19.45	24	26.63	Pass
142(U-NII-2C)	5710	33.547	20.67	24	26.26	Pass
142(U-NII-3)	5710	--	10.48	30	--	Pass
151	5755	--	20.81	30	--	Pass
159	5795	--	20.89	30	--	Pass

99% Occupied Bandwidth:


Channel 54

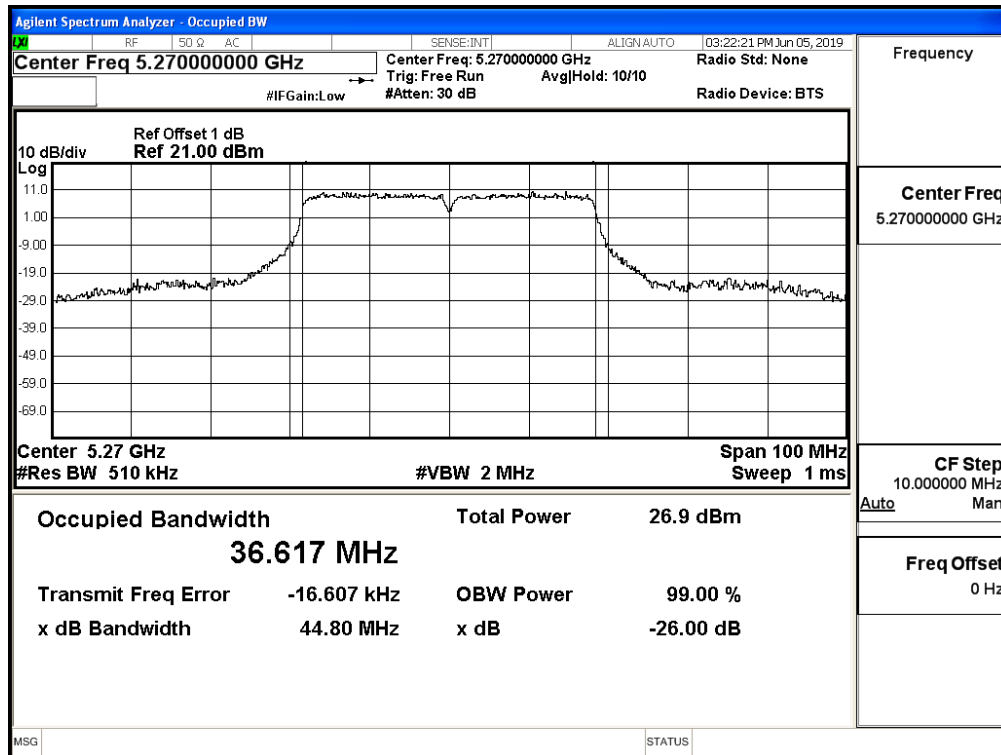


Channel 62

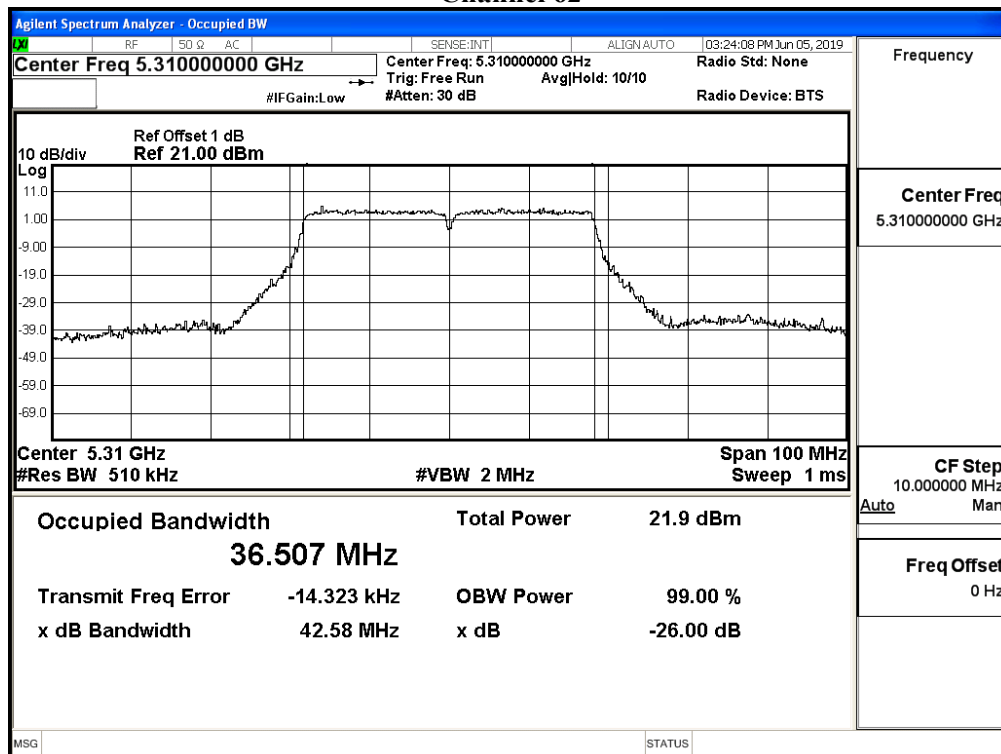


Channel 102

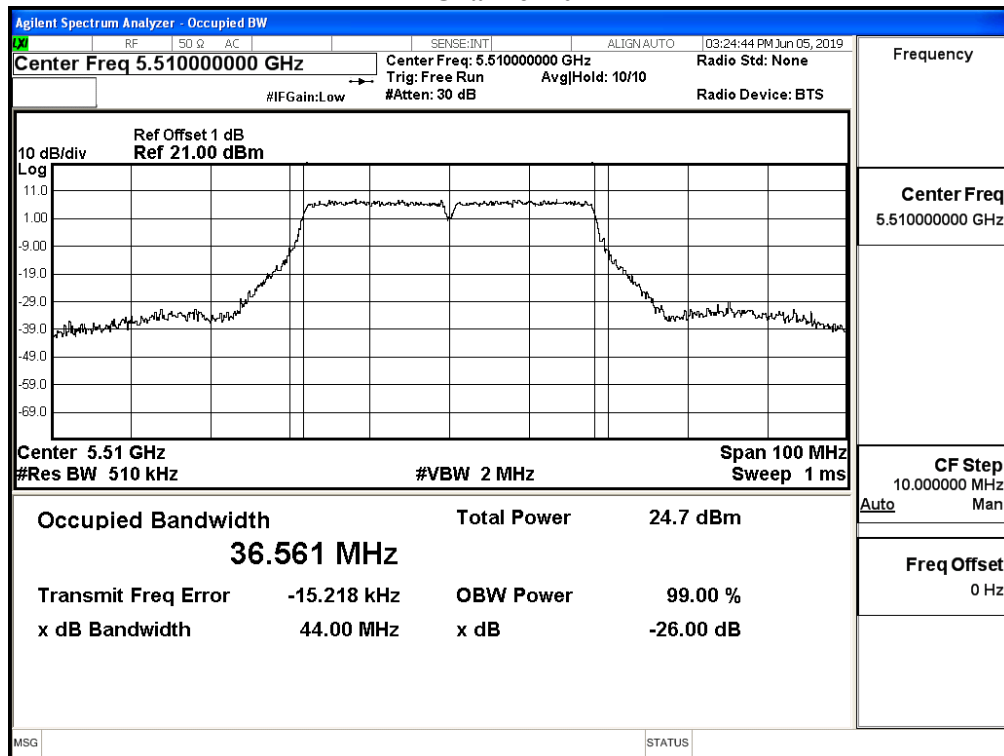


Channel 110

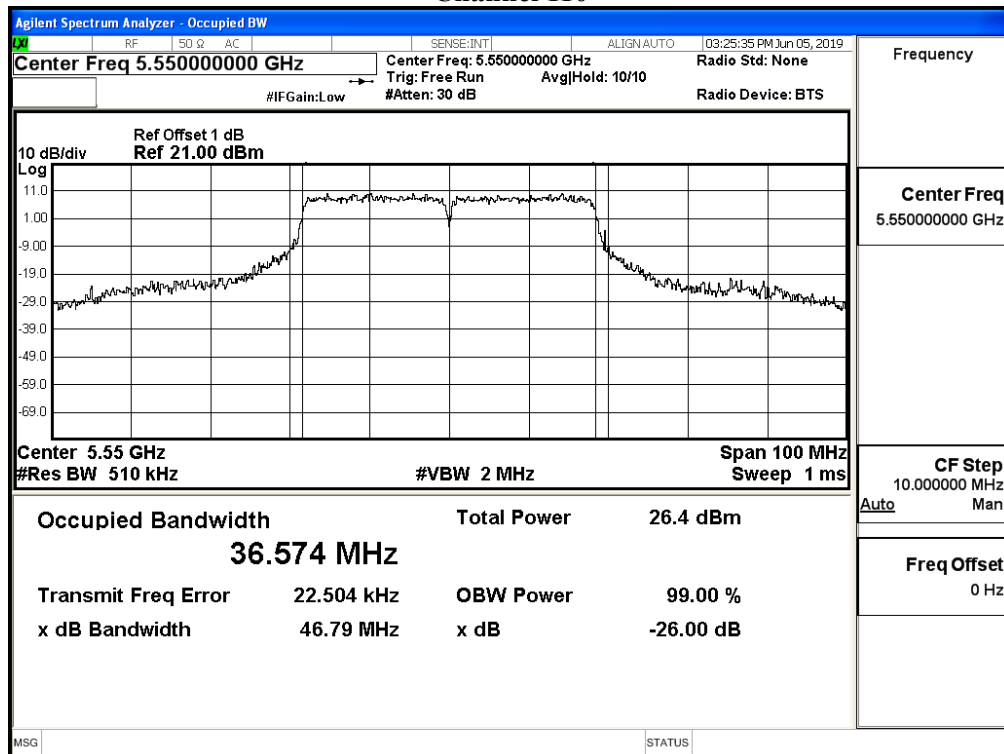

Channel 134

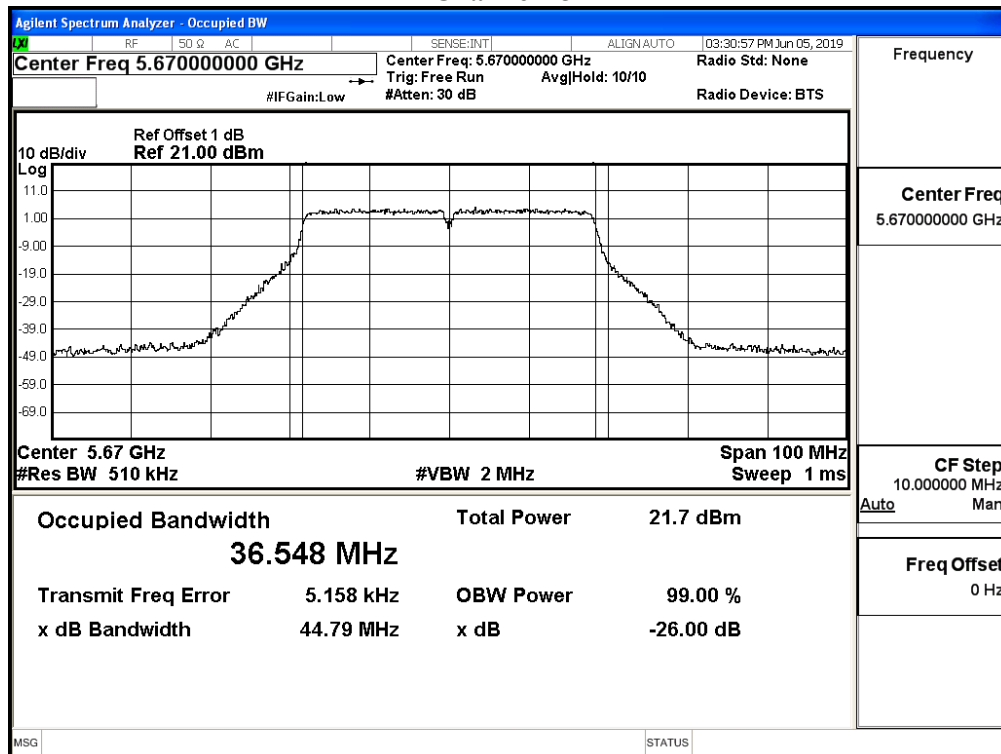


Channel 142

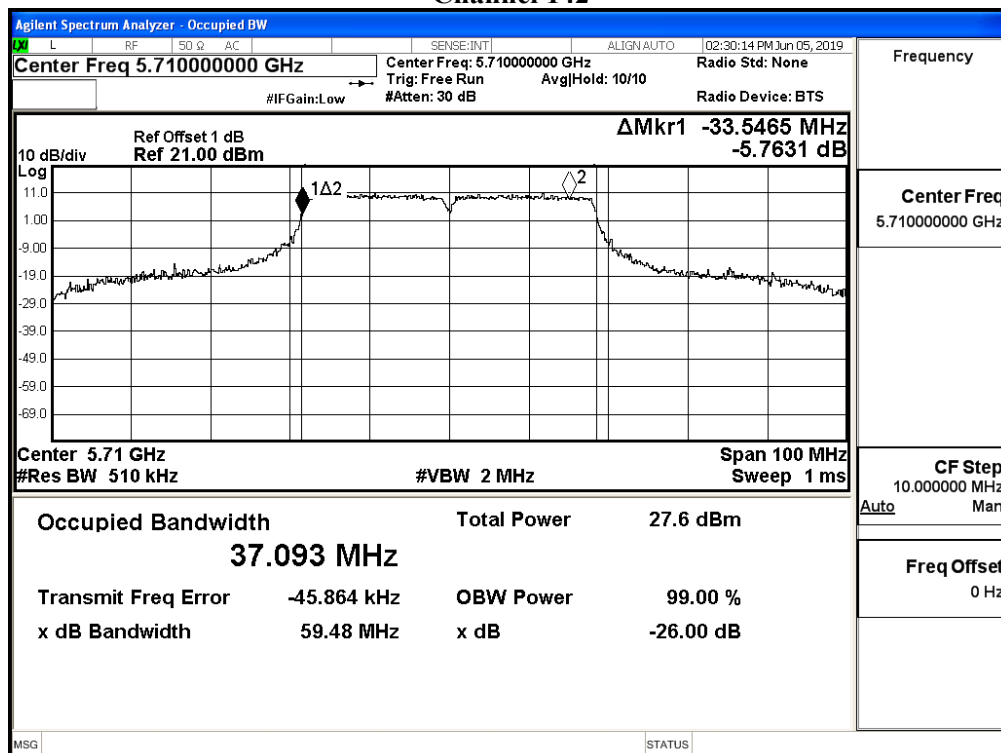


Maximum conducted output power:

Channel 142 (U-NII-2C)

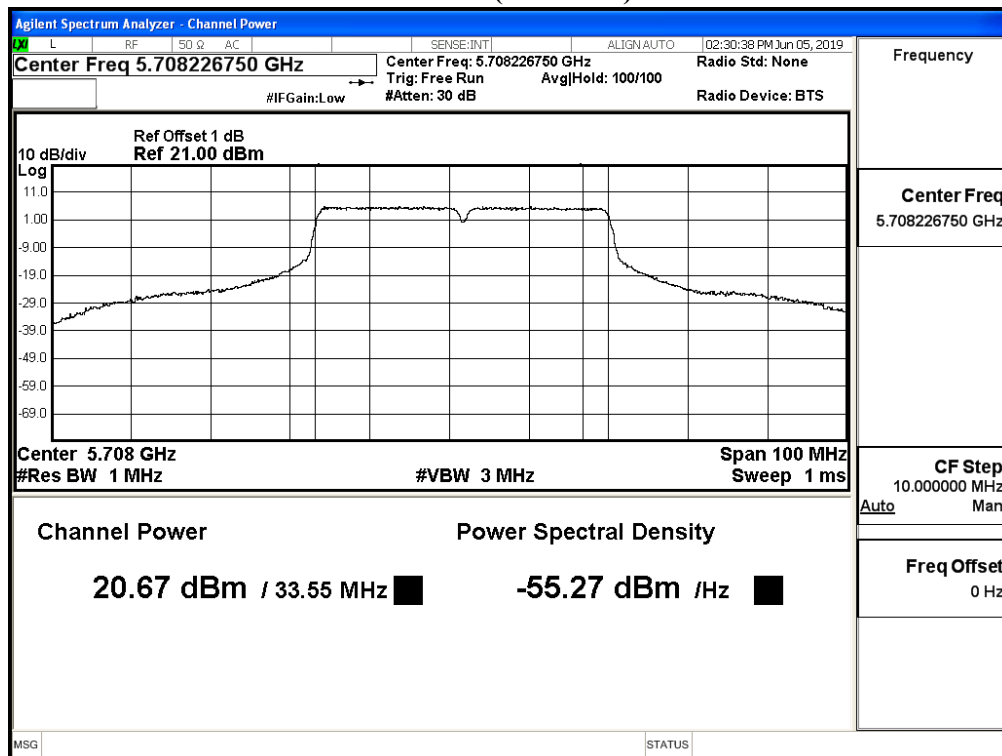

Maximum conducted output power:

Channel 142 (U-NII-3)

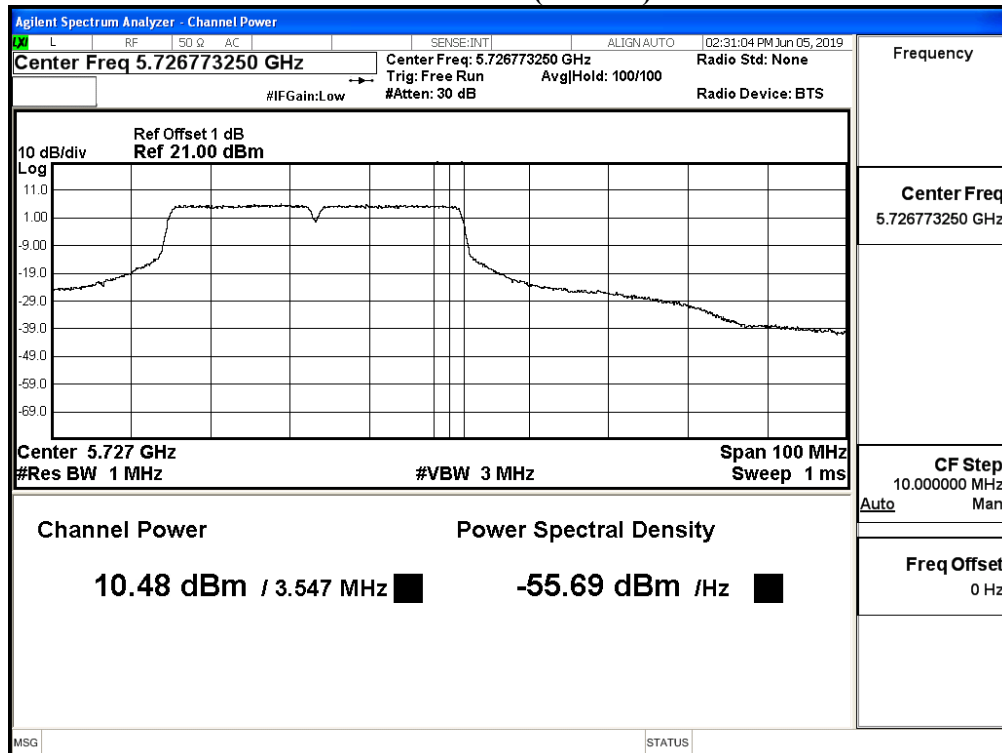

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)

Cable loss=1.0dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		32.5	65	97.5	130	195	260	292.5	325	390	433.3
42	5210	17.76	17.68	17.51	17.38	17.22	17.13	16.98	16.86	16.74	16.60
58	5290	16.82	16.67	16.52	16.46	16.35	16.22	16.06	15.88	15.70	15.54
106	5530	19.19	--	--	--	--	--	--	--	--	--
122	5610	20.25	20.13	19.96	19.84	19.73	19.66	19.59	19.46	19.31	19.24
138 (U-NII-2C)	5690	20.62	20.54	20.37	20.22	20.09	20.00	19.92	19.86	19.71	19.63
138 (U-NII-3)	5690	4.56	4.43	4.27	4.17	4.03	3.89	3.80	3.65	3.50	3.40
155	5775	19.38	19.24	19.17	19.08	19.02	18.84	18.70	18.57	18.47	18.34


Note: Maximum conducted output power Value = Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
42	5210	--	17.76	24	--	Pass
58	5290	75.131	16.82	24	29.76	Pass
106	5530	75.038	19.19	24	29.75	Pass
122	5610	75.286	20.25	24	29.77	Pass
138 (U-NII-2C)	5690	72.653	20.62	24	29.61	Pass
138 (U-NII-3)	5690	--	4.56	30	--	Pass
155	5775	--	19.38	30	--	Pass

99% Occupied Bandwidth:


Channel 58

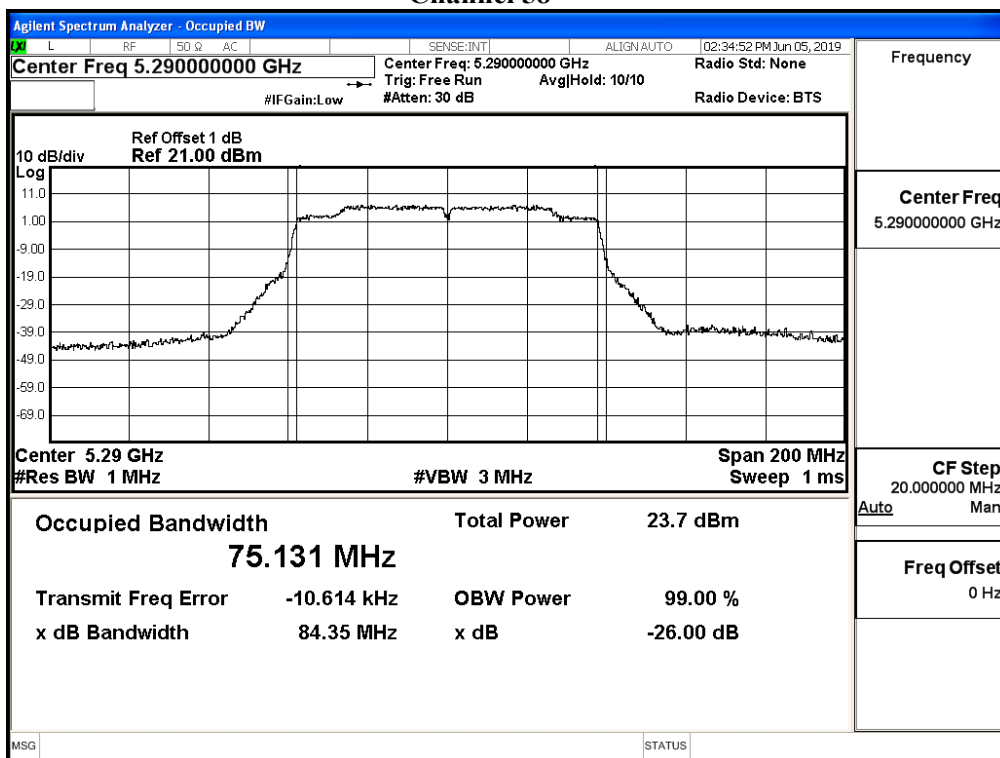


Channel 106

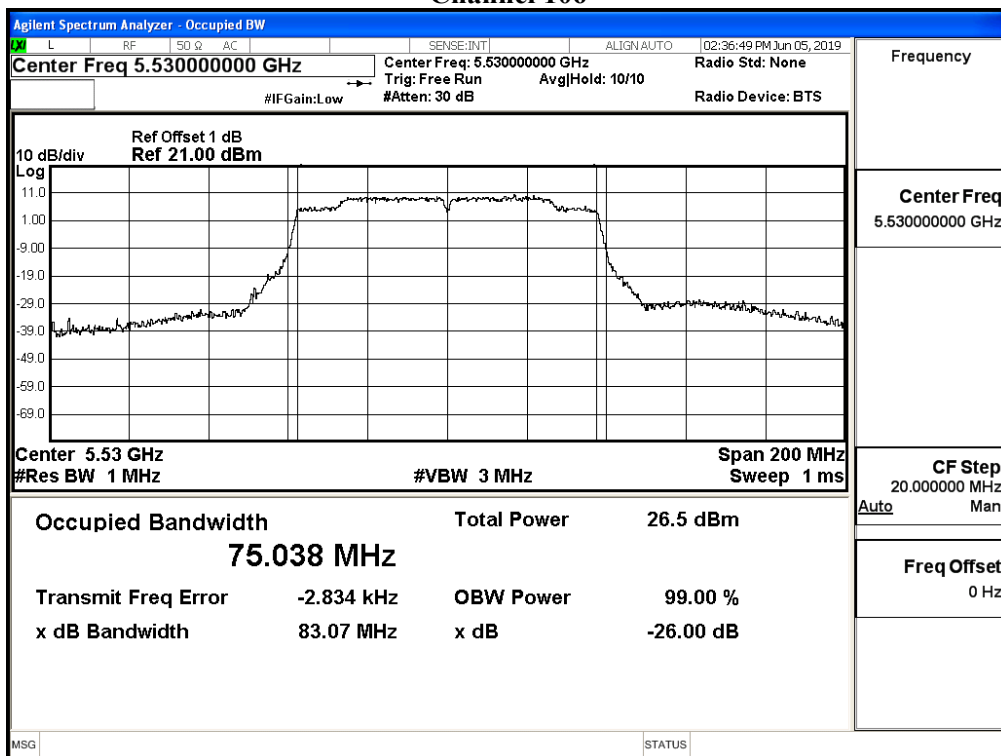

Channel 122

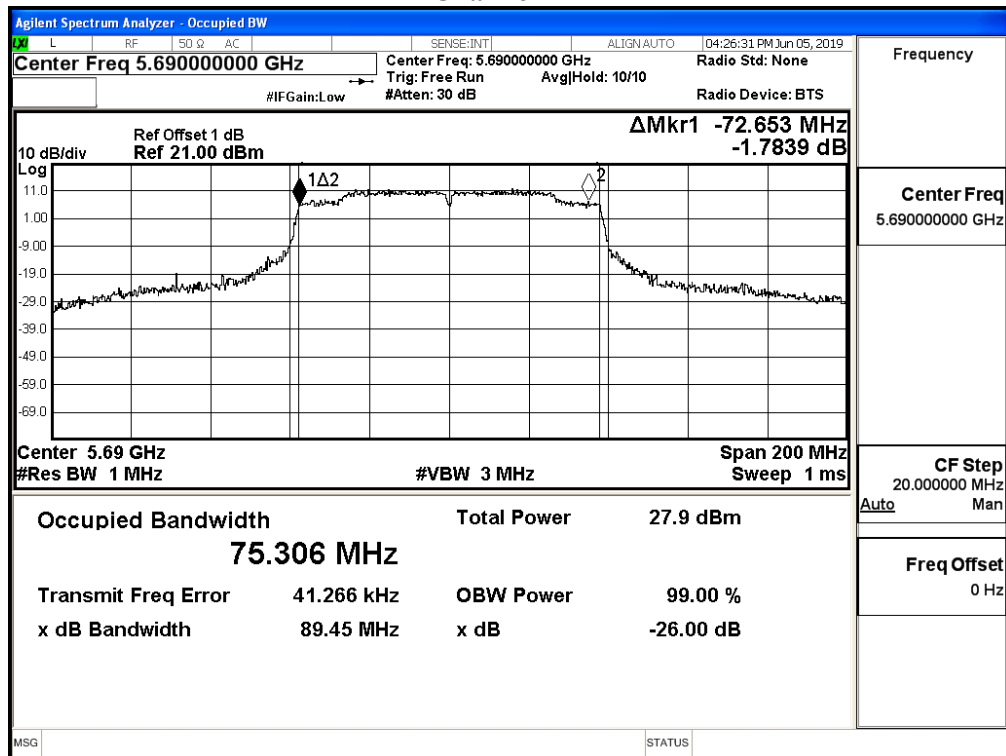


Channel 138

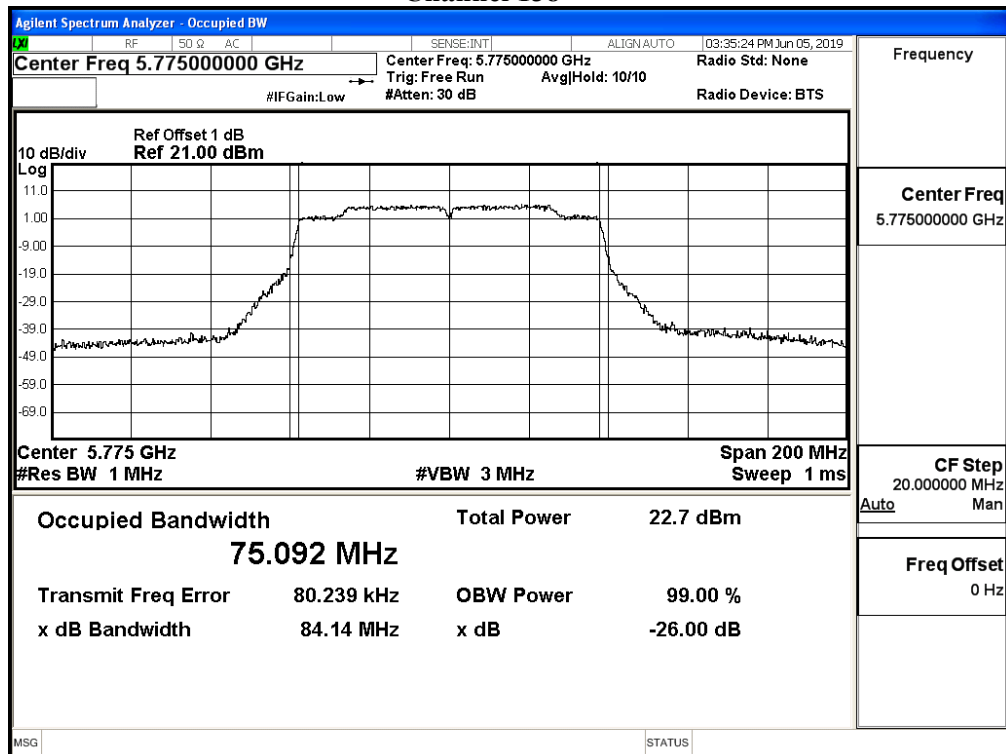


Maximum conducted output power:

Channel 138 (U-NII-2C)

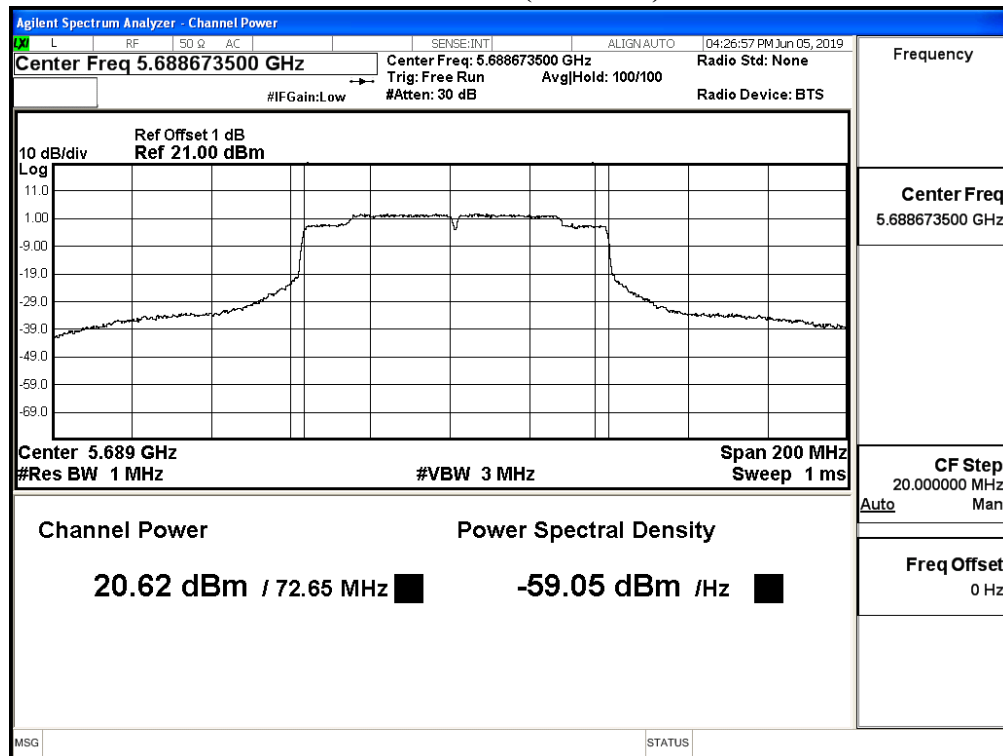

Maximum conducted output power:

Channel 138 (U-NII-3)

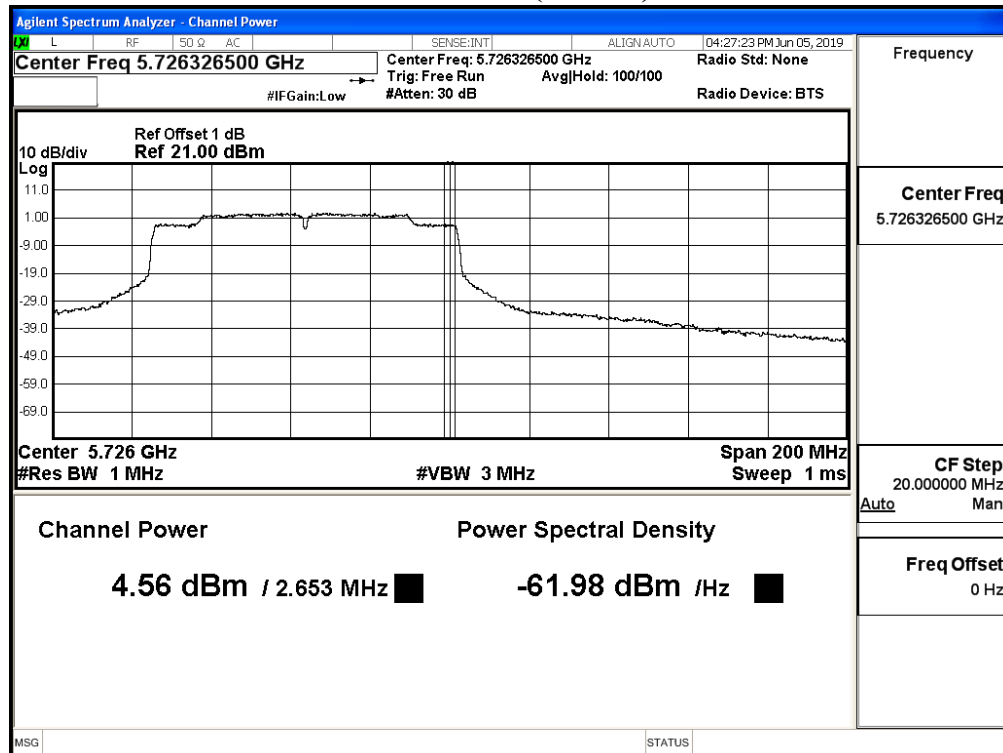

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)

Cable loss=1.0dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	195	260	390	520	585	650	780	866.7
50 (U-NII-1)	5250	10.14	10.05	9.99	9.82	9.64	9.56	9.44	9.36	9.29	9.11
50 (U-NII-2A)	5250	9.80	9.62	9.52	9.35	9.23	9.11	8.96	8.84	8.78	8.61
114	5570	14.97	14.88	14.78	14.67	14.55	14.41	14.33	14.26	14.20	14.11


Note: Maximum conducted output power Value = Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
50 (U-NII-1)	5250	--	10.14	24	--	Pass
50 (U-NII-2A)	5250	76.520	9.80	24	29.84	Pass
114	5570	152.950	14.97	24	32.85	Pass

99% Occupied Bandwidth:

Channel 50

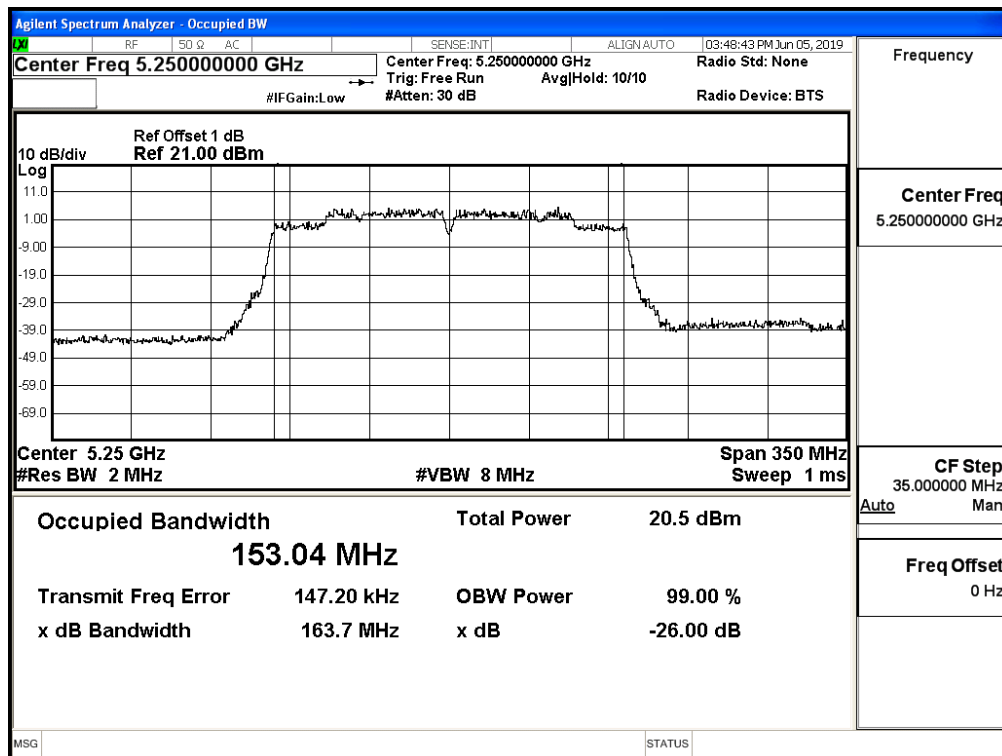


Channel 114

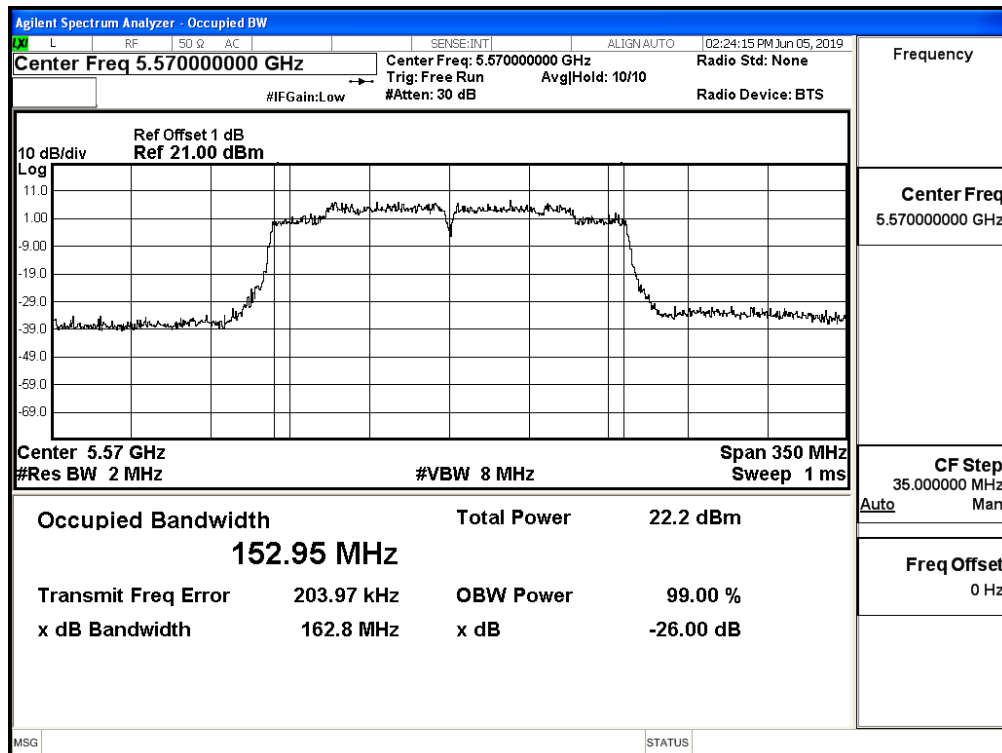


Maximum conducted output power:

Channel 50 (U-NII-1)

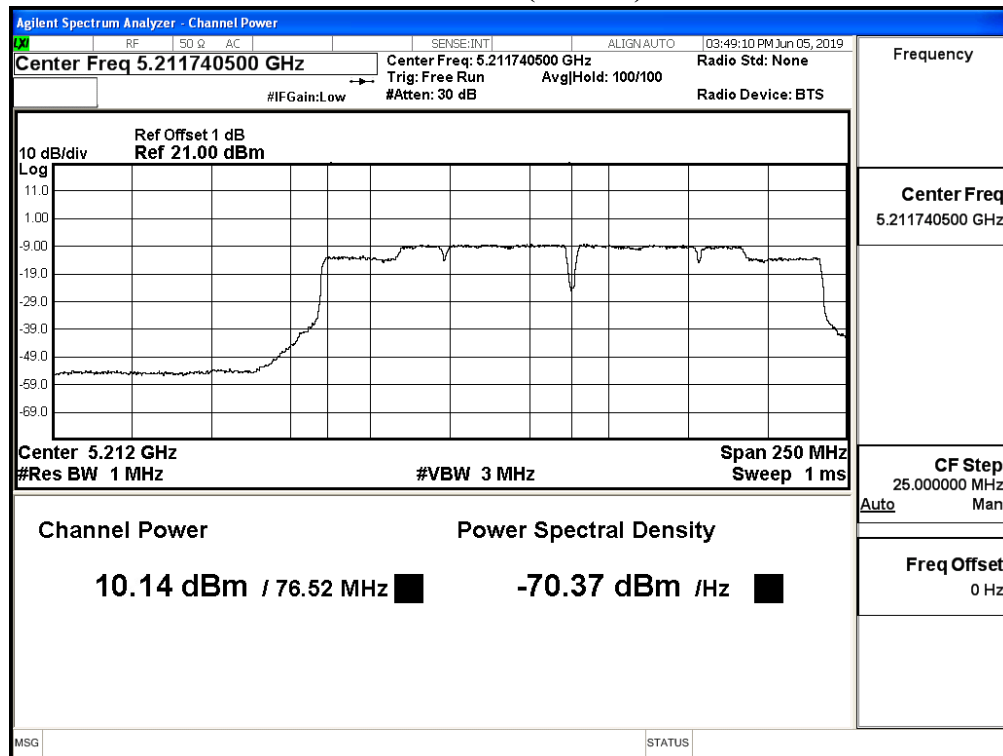

Maximum conducted output power:

Channel 50 (U-NII-2A)

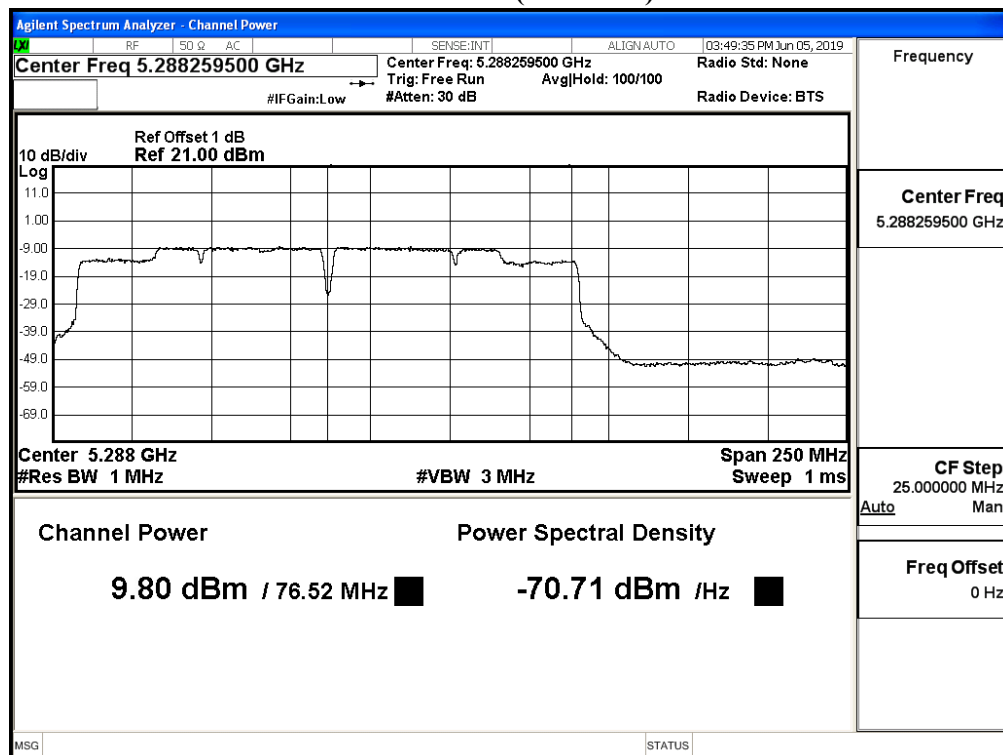

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
		Measurement Level (dBm)							
36	5180	18.41	--	--	--	--	--	--	--
44	5220	20.64	20.52	20.42	20.31	20.18	20.07	19.98	19.88
48	5240	20.59	--	--	--	--	--	--	--
52	5260	20.77	--	--	--	--	--	--	--
60	5300	20.77	20.63	20.47	20.36	20.19	20.09	19.93	19.79
64	5320	18.36	--	--	--	--	--	--	--
100	5500	19.25	--	--	--	--	--	--	--
116	5580	20.84	20.59	20.47	20.40	20.30	20.24	20.15	20.08
140	5700	18.68	--	--	--	--	--	--	--
149	5745	20.51	--	--	--	--	--	--	--
157	5785	20.63	20.52	20.35	20.29	20.14	20.04	19.90	19.74
165	5825	20.59	--	--	--	--	--	--	--


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
36	5180	--	18.41	24	--	Pass
44	5220	--	20.64	24	--	Pass
48	5240	--	20.59	24	--	Pass
52	5260	17.030	20.77	24	23.31	Pass
60	5300	17.180	20.77	24	23.35	Pass
64	5320	16.935	18.36	24	23.29	Pass
100	5500	16.964	19.25	24	23.30	Pass
116	5580	17.062	20.84	24	23.32	Pass
140	5700	16.969	18.68	24	23.30	Pass
149	5745	--	20.51	30	--	Pass
157	5785	--	20.63	30	--	Pass
165	5825	--	20.59	30	--	Pass

99% Occupied Bandwidth:


Channel 52

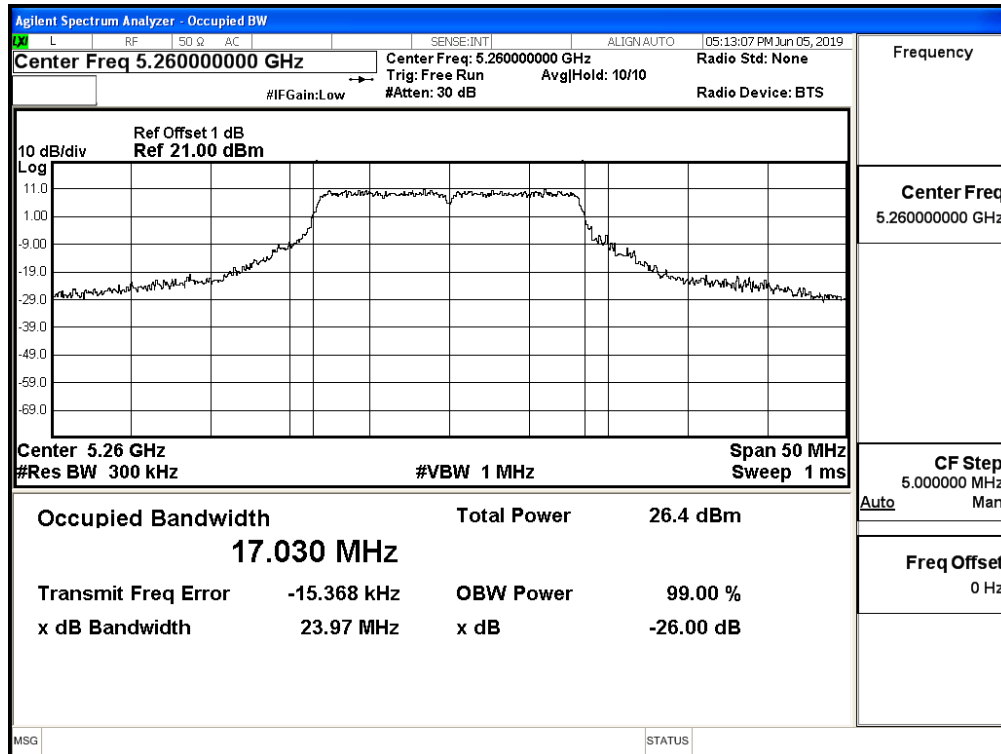


Channel 60

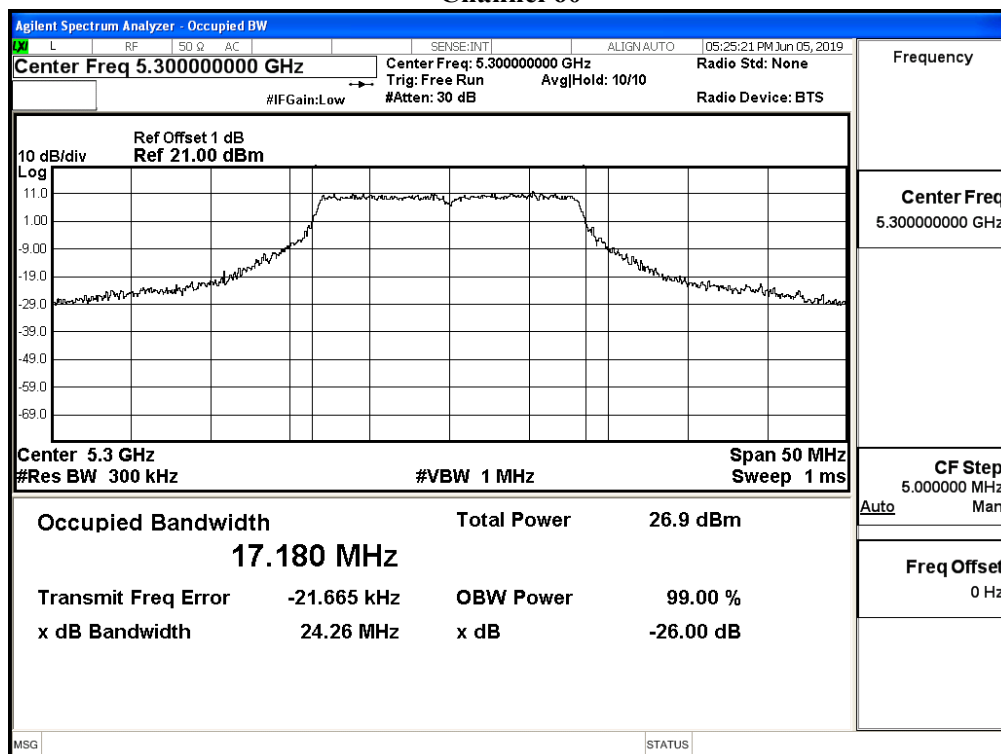


Channel 64

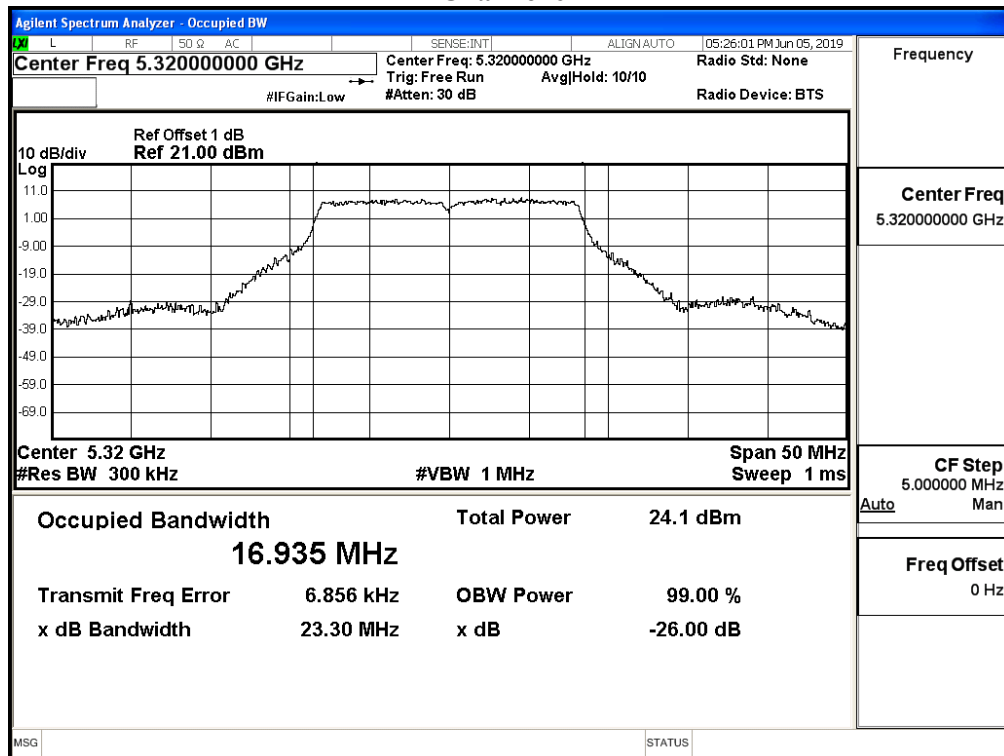


Channel 100

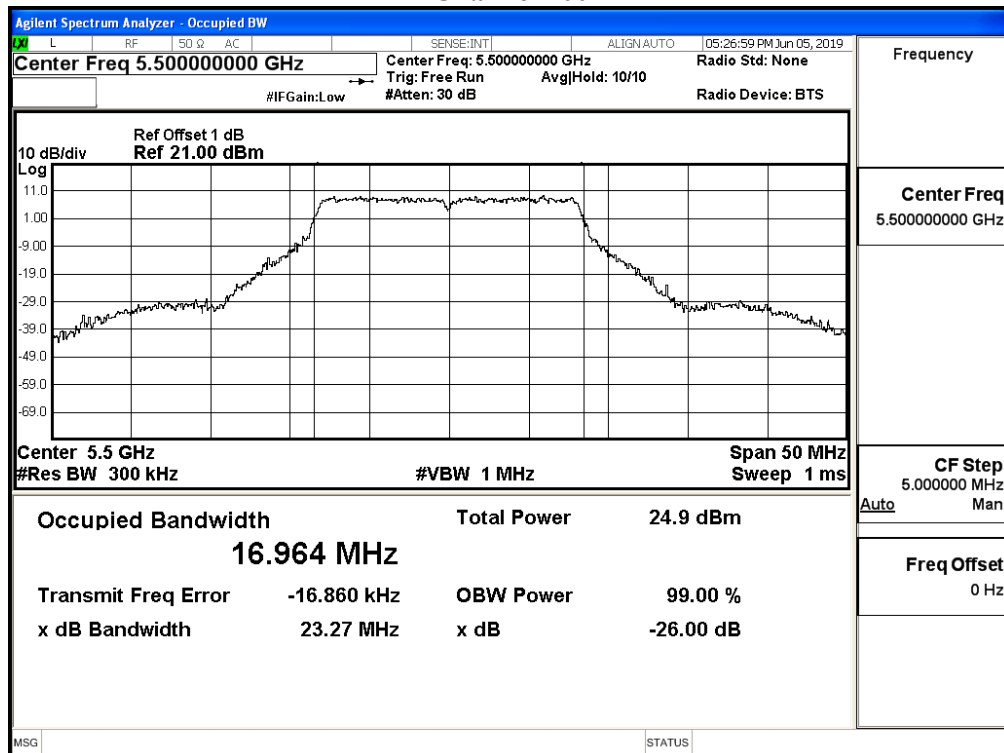

Channel 116

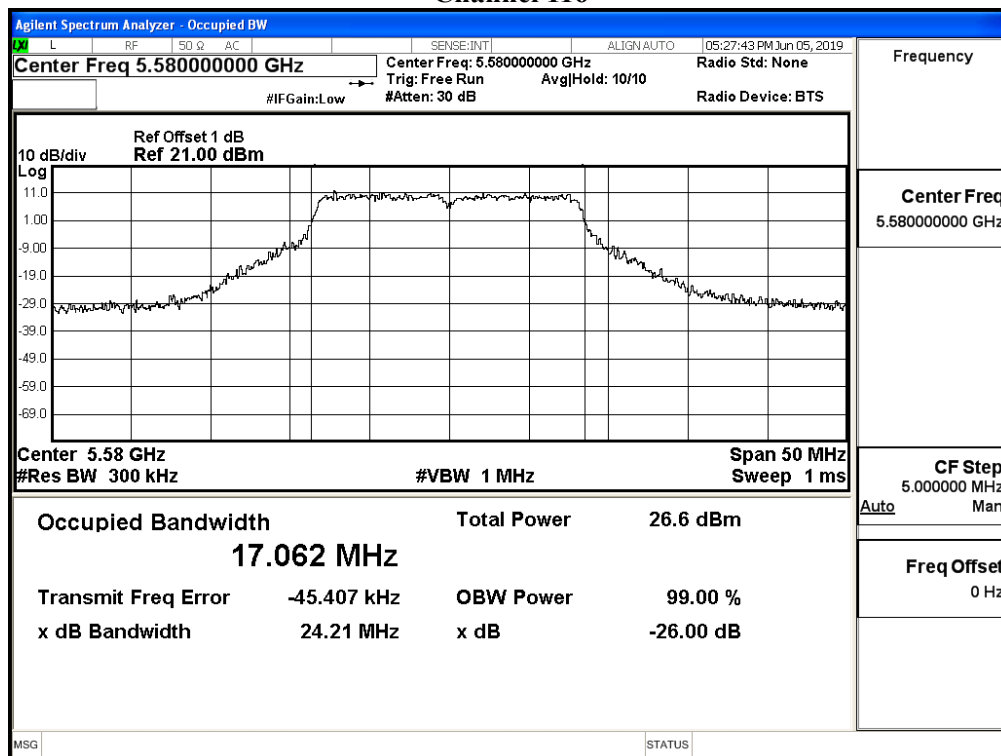

Channel 140

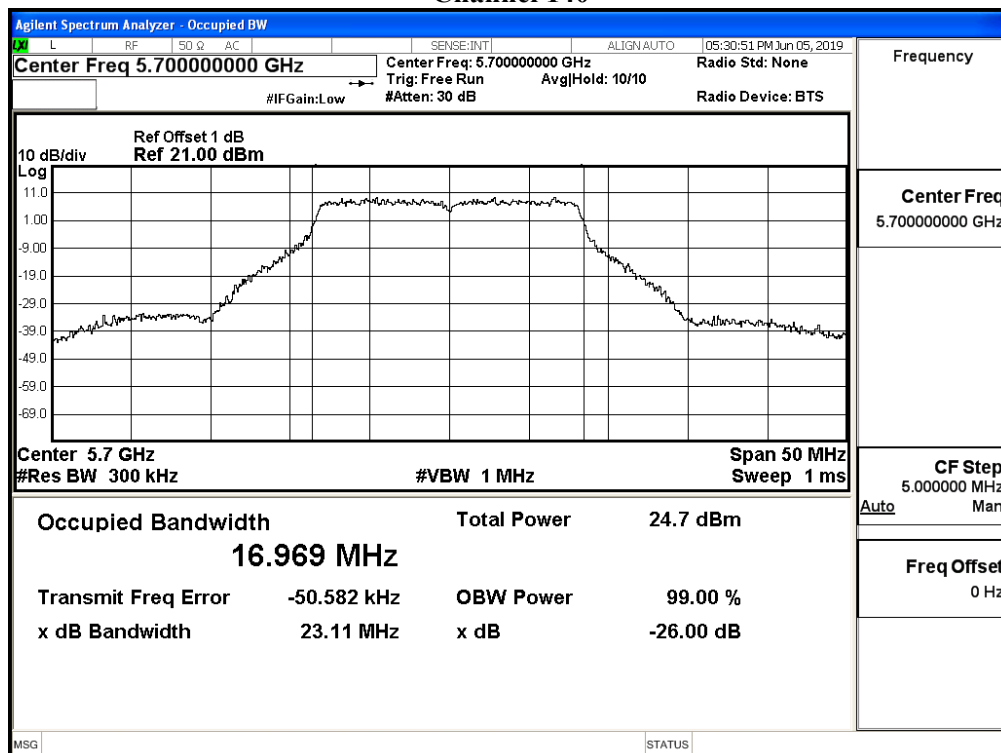

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps)

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2
		Measurement Level (dBm)							
36	5180	18.39	--	--	--	--	--	--	--
44	5220	20.34	20.16	20.04	19.91	19.75	19.60	19.49	19.42
48	5240	20.61	--	--	--	--	--	--	--
52	5260	20.74	--	--	--	--	--	--	--
60	5300	20.76	20.68	20.54	20.41	20.32	20.21	20.13	20.04
64	5320	17.98	--	--	--	--	--	--	--
100	5500	17.77	--	--	--	--	--	--	--
116	5580	20.64	20.55	20.38	20.20	20.07	19.95	19.82	19.69
140	5700	18.86	--	--	--	--	--	--	--
144(U-NII-2C)	5720	19.57	19.46	19.36	19.30	19.17	19.07	18.90	18.82
144(U-NII-3)	5720	13.96	13.8	13.62	13.44	13.27	13.16	13.09	13.02
149	5745	20.72	--	--	--	--	--	--	--
157	5785	20.61	20.54	20.48	20.37	20.28	20.18	20.10	19.95
165	5825	20.7	--	--	--	--	--	--	--


Note: Maximum conducted output power Value = Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	$\text{dBm} + 10\log(\text{BW})$	
36	5180	--	18.39	24	--	Pass
44	5220	--	20.34	24	--	Pass
48	5240	--	20.61	24	--	Pass
52	5260	18.180	20.74	24	23.60	Pass
60	5300	18.138	20.76	24	23.59	Pass
64	5320	18.055	17.98	24	23.57	Pass
100	5500	18.085	17.77	24	23.57	Pass
116	5580	18.094	20.64	24	23.58	Pass
140	5700	18.077	18.86	24	23.57	Pass
144(U-NII-2C)	5720	14.072	19.57	24	22.48	Pass
144(U-NII-3)	5720	--	13.96	30	--	Pass
149	5745	--	20.72	30	--	Pass
157	5785	--	20.61	30	--	Pass
165	5825	--	20.7	30	--	Pass

99% Occupied Bandwidth:


Channel 52

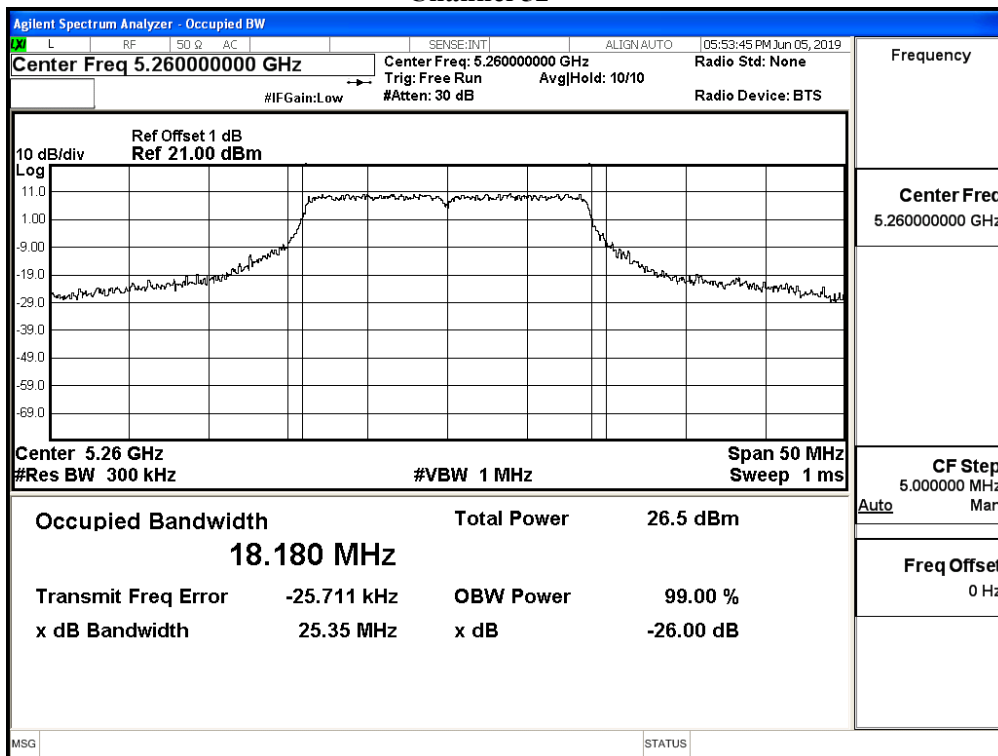


Channel 60

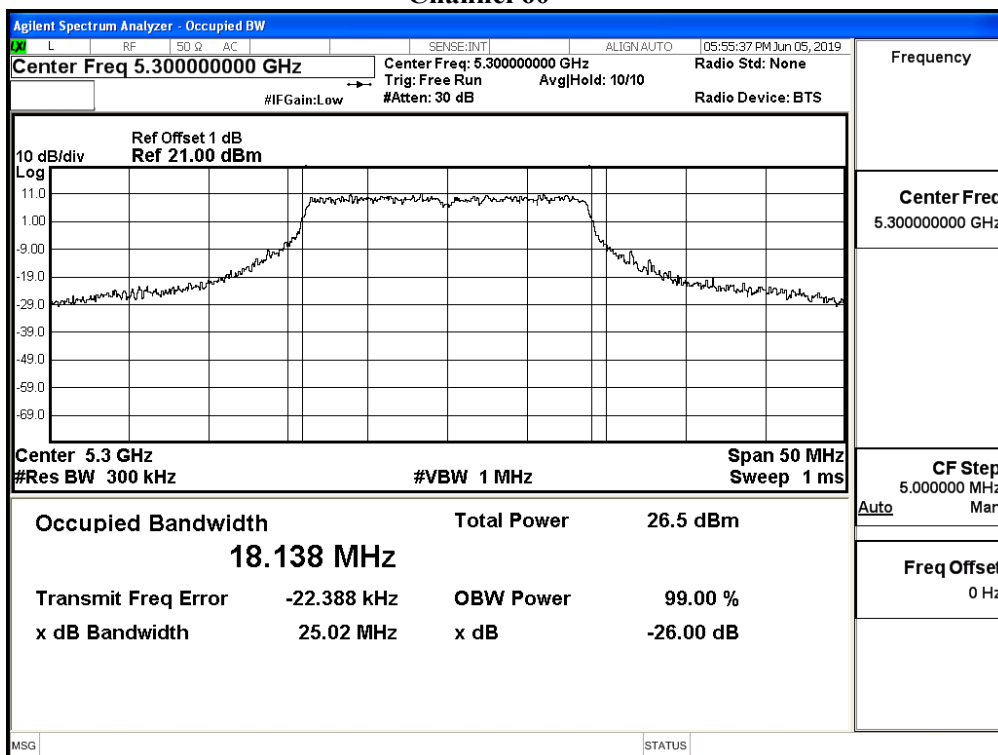


Channel 64

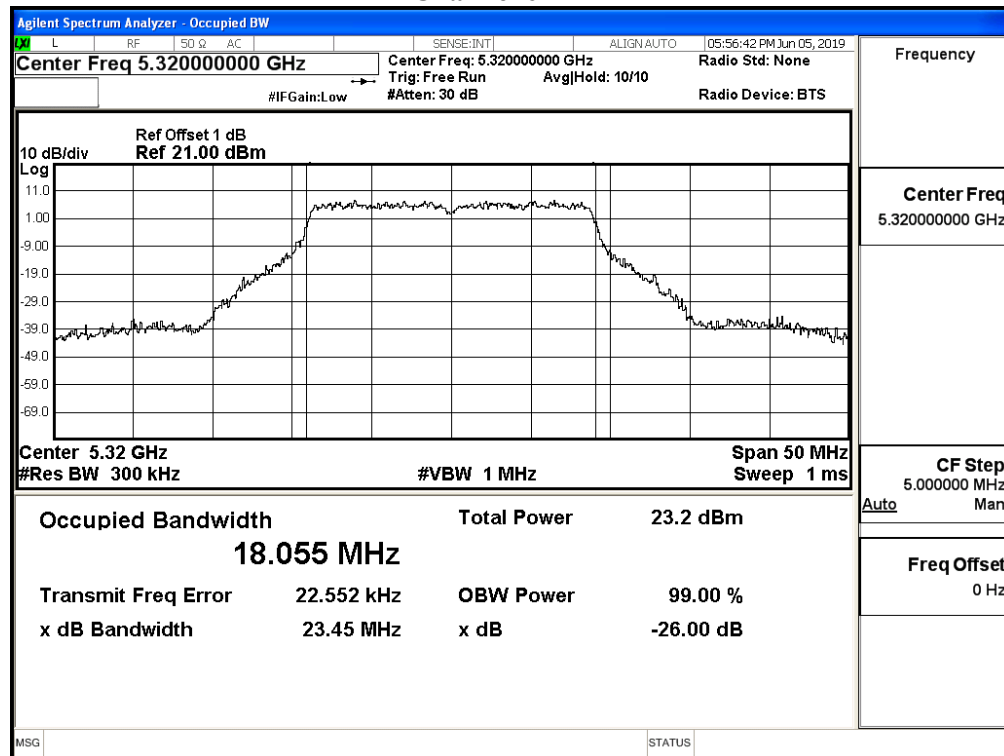


Channel 100

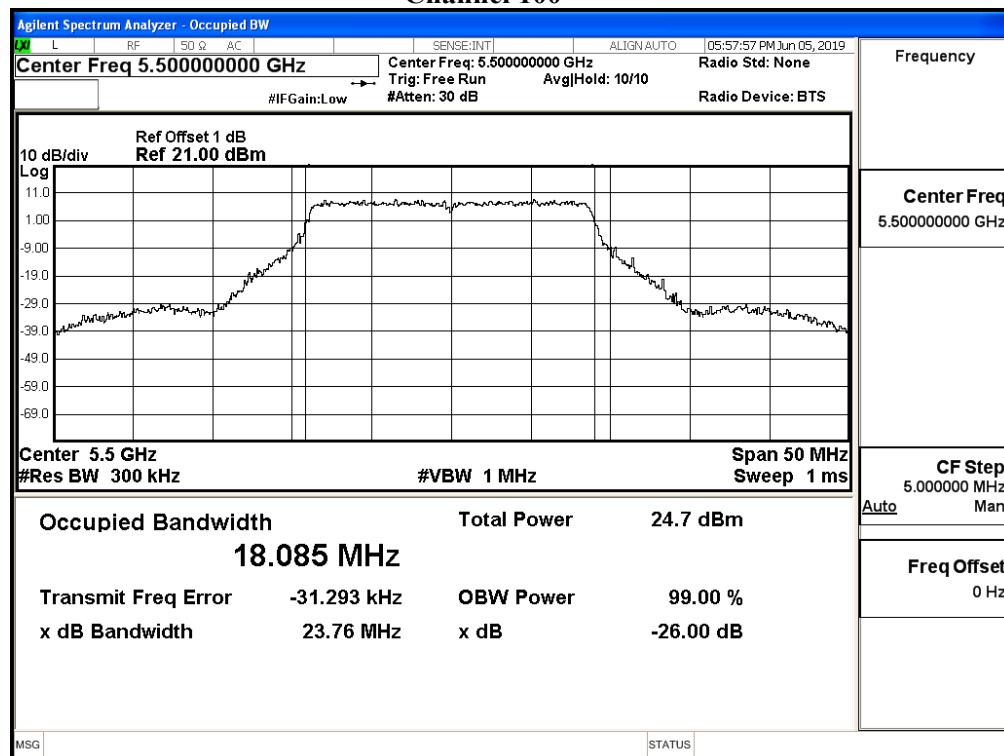


Channel 116

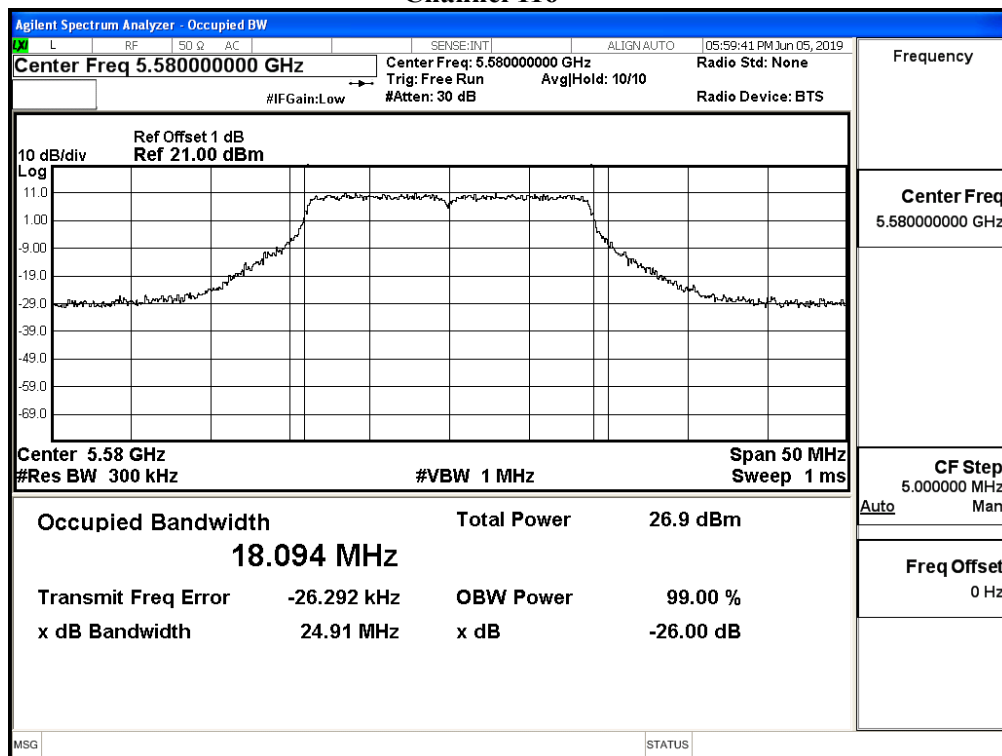


Channel 140

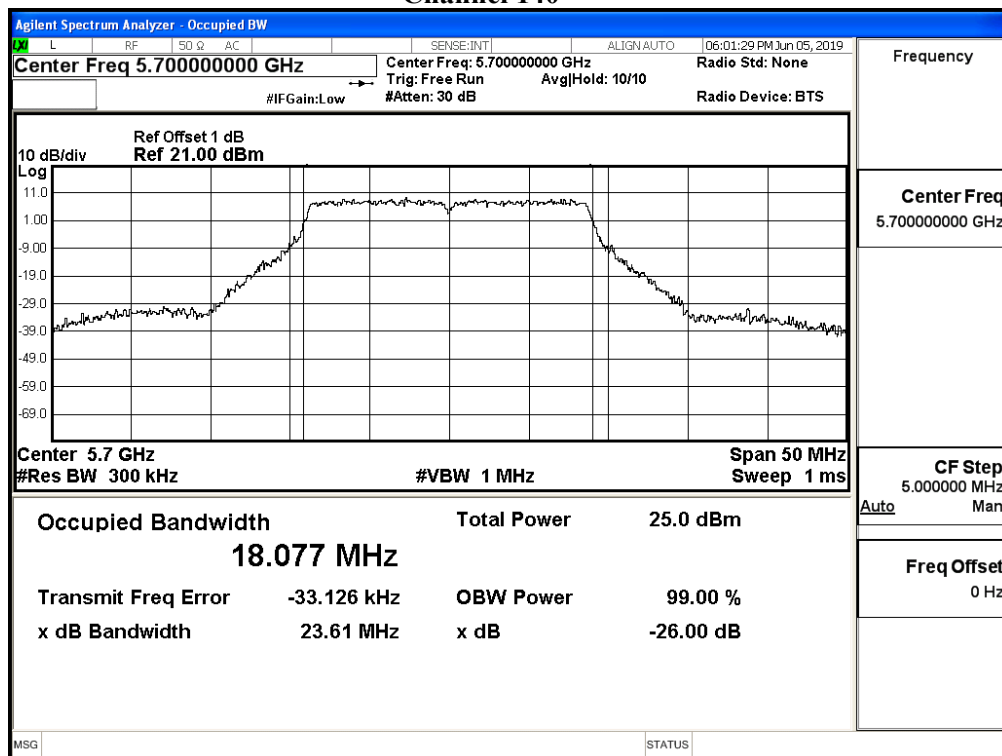


Channel 144

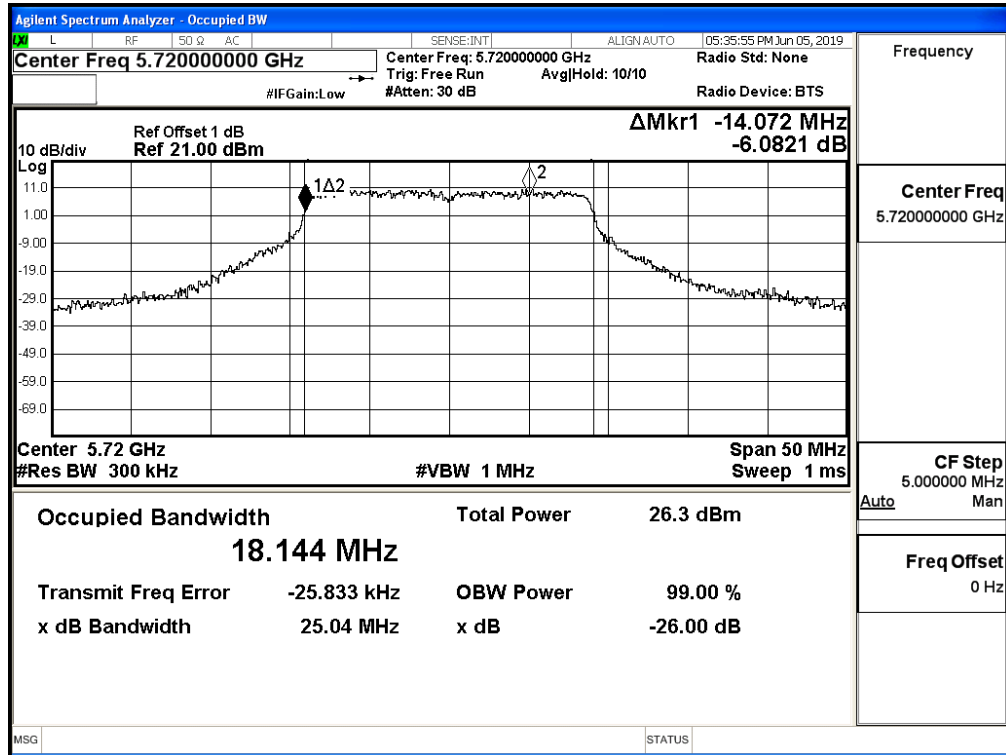

Maximum conducted output power:
Channel 144 (U-NII-2C)

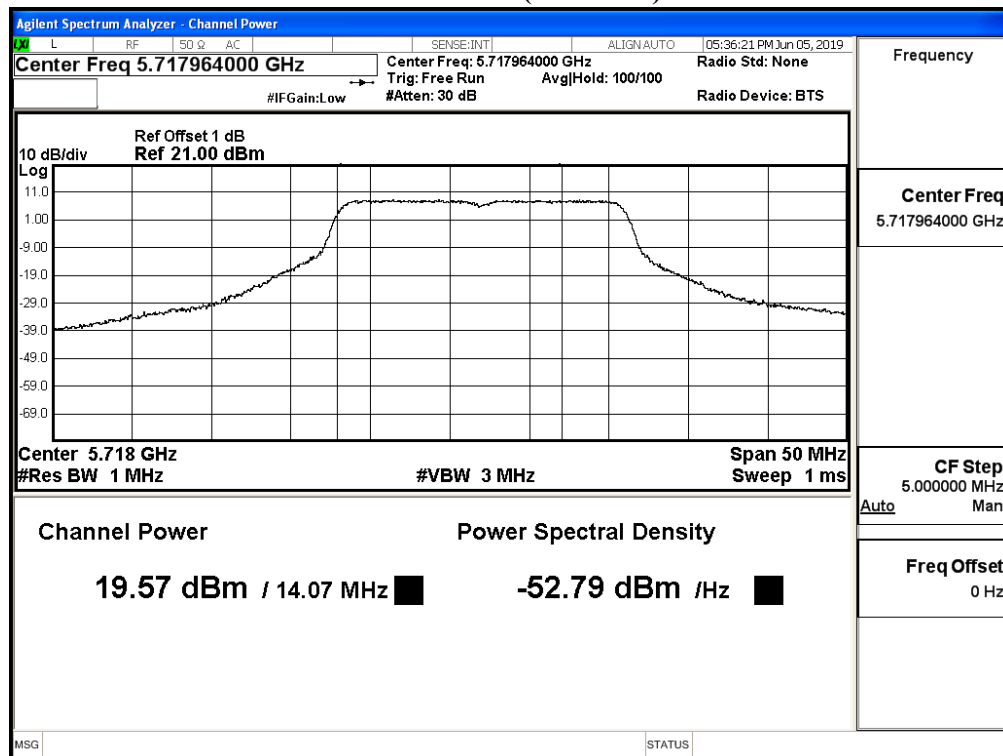

Maximum conducted output power:
Channel 144 (U-NII-3)

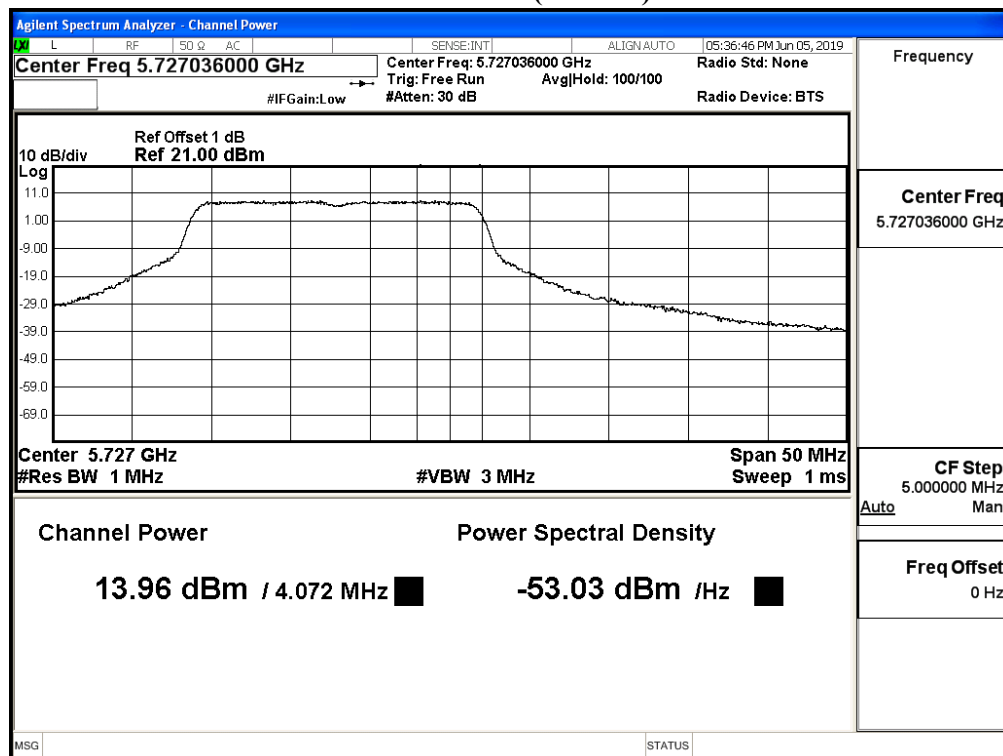

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		15	30	45	60	90	120	135	150
		Measurement Level (dBm)							
38	5190	18.11	--	--	--	--	--	--	--
46	5230	20.44	20.26	20.11	19.96	19.87	19.75	19.65	19.51
54	5270	20.53	--	--	--	--	--	--	--
62	5310	16.13	16	15.92	15.80	15.62	15.44	15.34	15.25
102	5510	19.05	--	--	--	--	--	--	--
110	5550	20.85	20.71	20.60	20.43	20.34	20.17	20.01	19.88
134	5670	19.55	--	--	--	--	--	--	--
142(U-NII-2C)	5710	20.39	20.31	20.16	20.00	19.82	19.71	19.65	19.48
142(U-NII-3)	5710	10.41	10.23	10.15	9.97	9.9	9.73	9.64	9.48
151	5755	20.77	--	--	--	--	--	--	--
159	5795	21.01	20.9	20.80	20.65	20.56	20.46	20.30	20.24


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
38	5190	--	18.11	24	--	Pass
46	5230	--	20.44	24	--	Pass
54	5270	36.714	20.53	24	26.65	Pass
62	5310	36.542	16.13	24	26.63	Pass
102	5510	36.580	19.05	24	26.63	Pass
110	5550	36.535	20.85	24	26.63	Pass
134	5670	36.550	19.55	24	26.63	Pass
142(U-NII-2C)	5710	33.338	20.39	24	26.23	Pass
142(U-NII-3)	5710	--	10.41	30	--	Pass
151	5755	--	20.77	30	--	Pass
159	5795	--	21.01	30	--	Pass

99% Occupied Bandwidth:


Channel 54

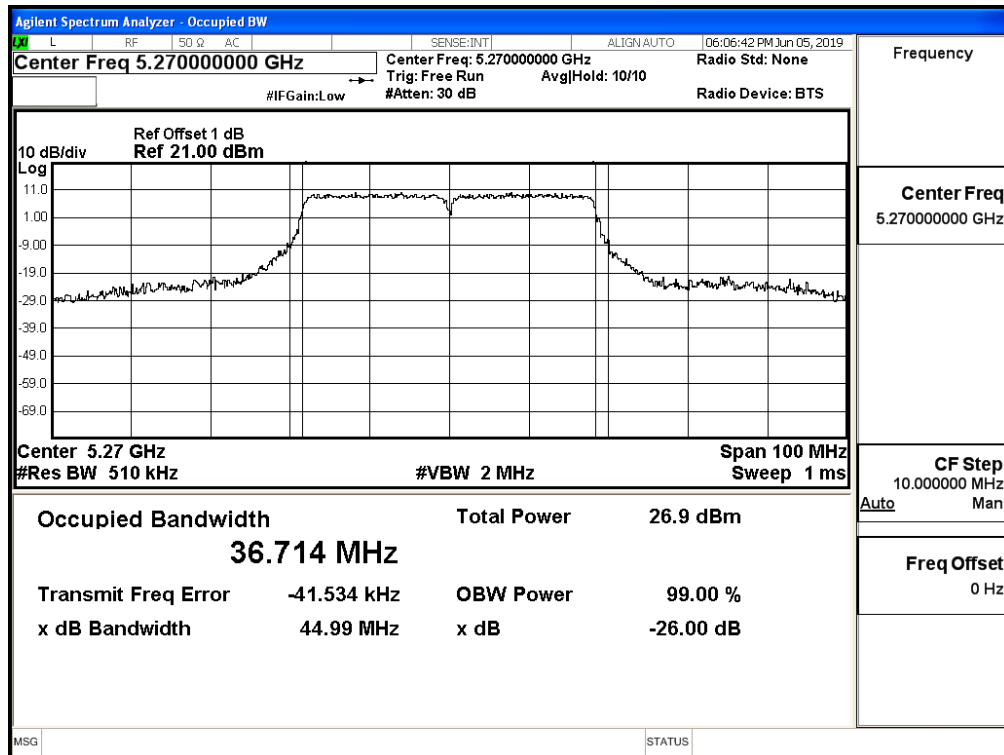


Channel 62

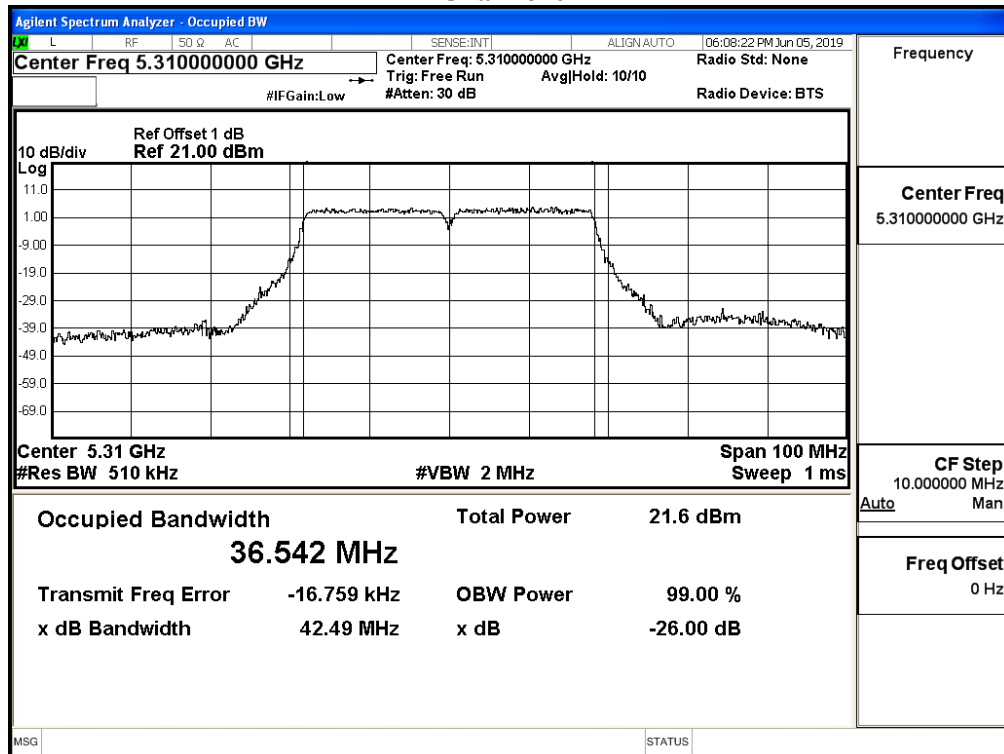


Channel 102

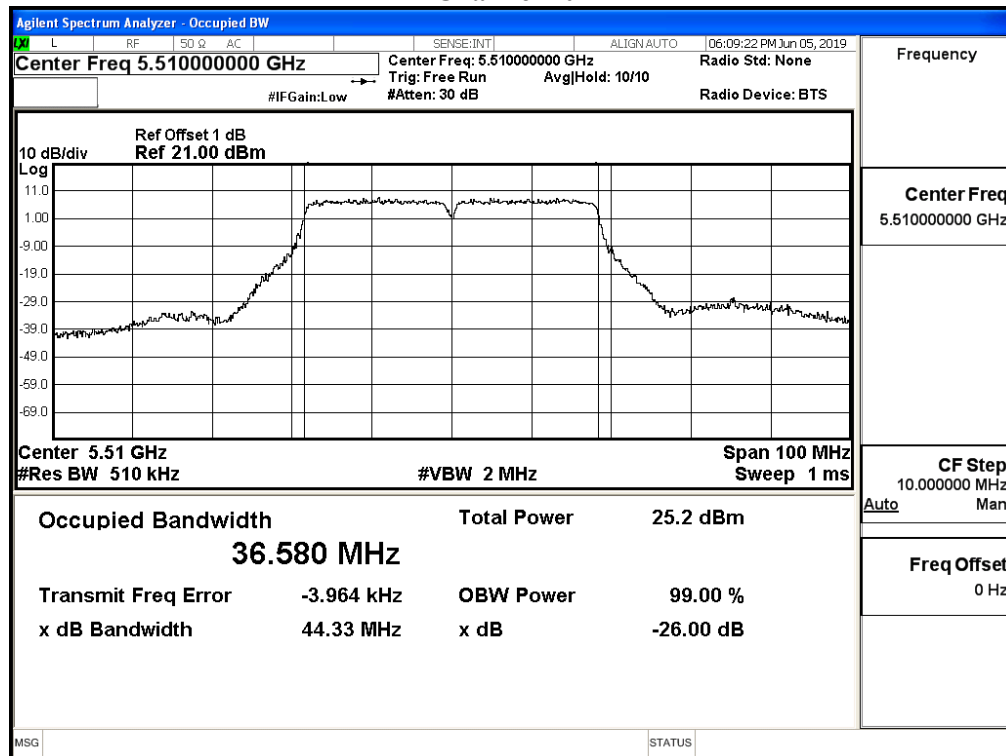


Channel 110


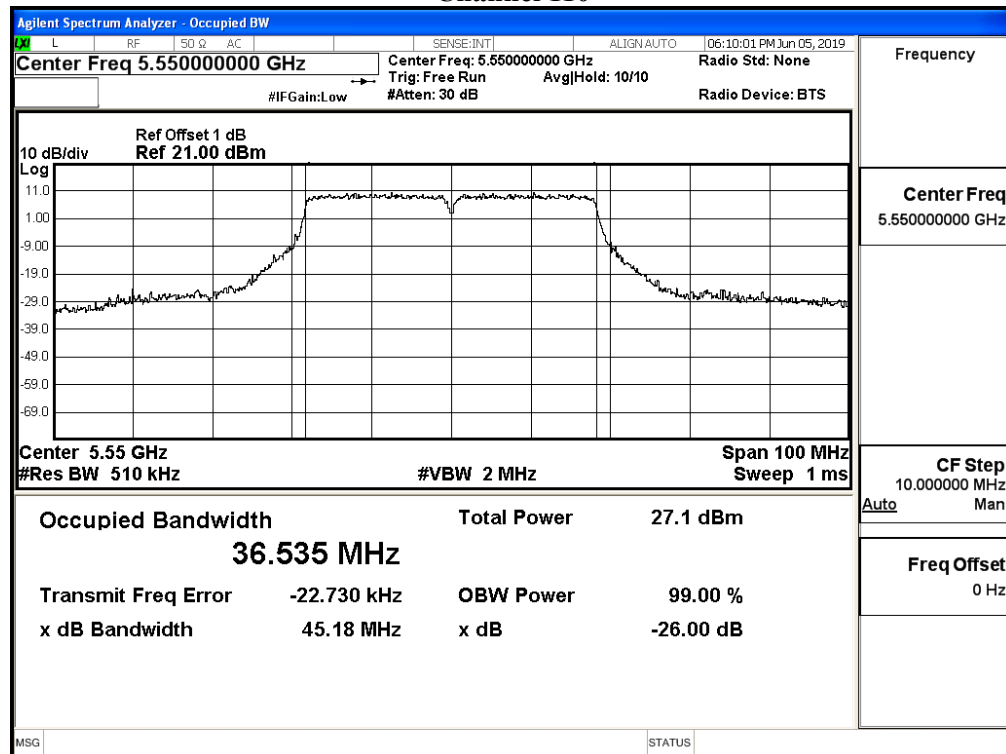


Channel 134

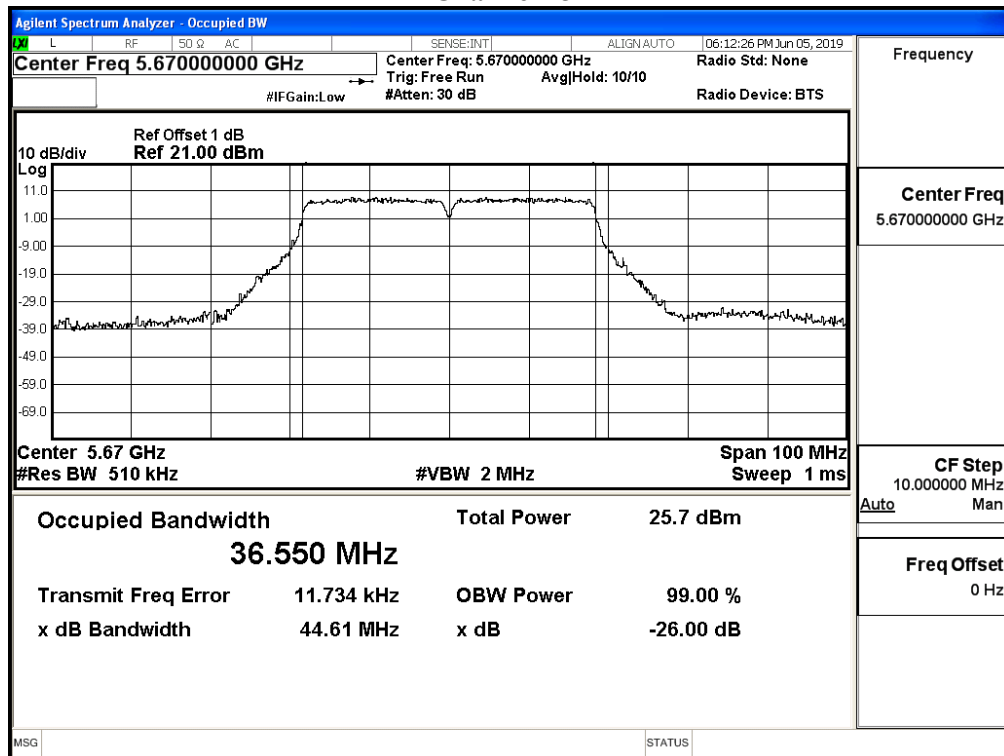

Channel 142

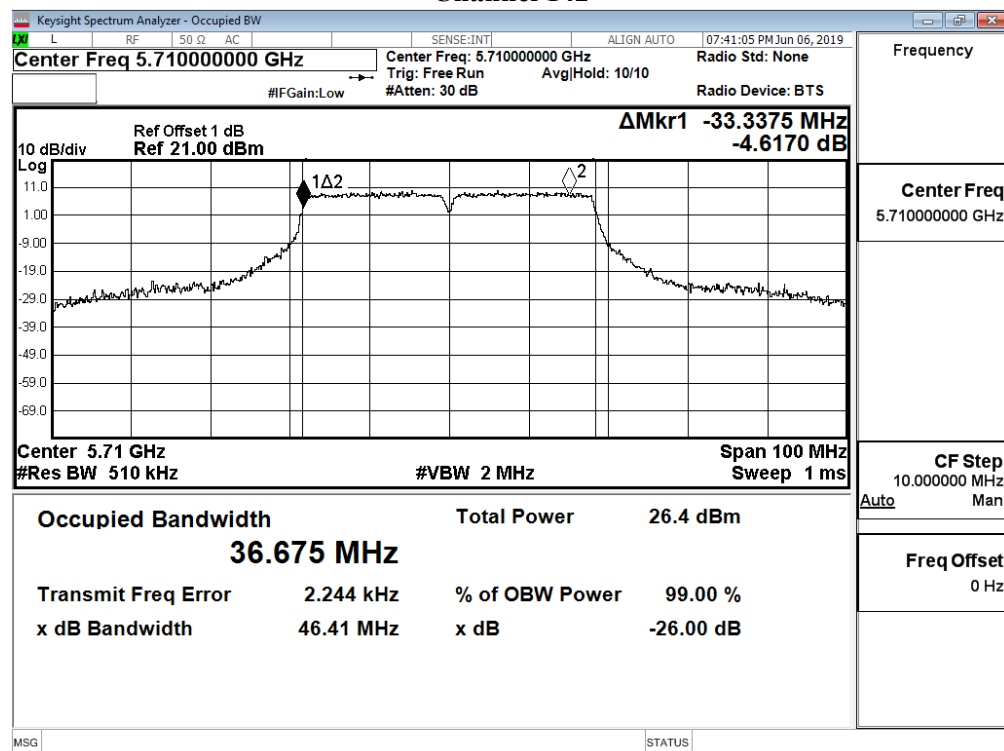

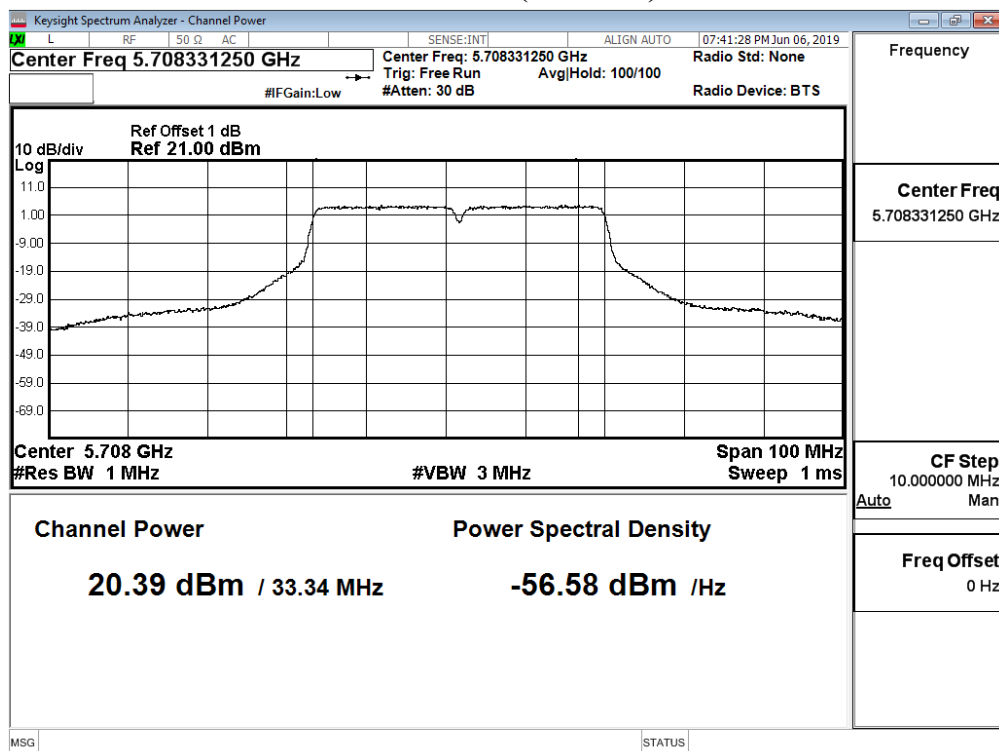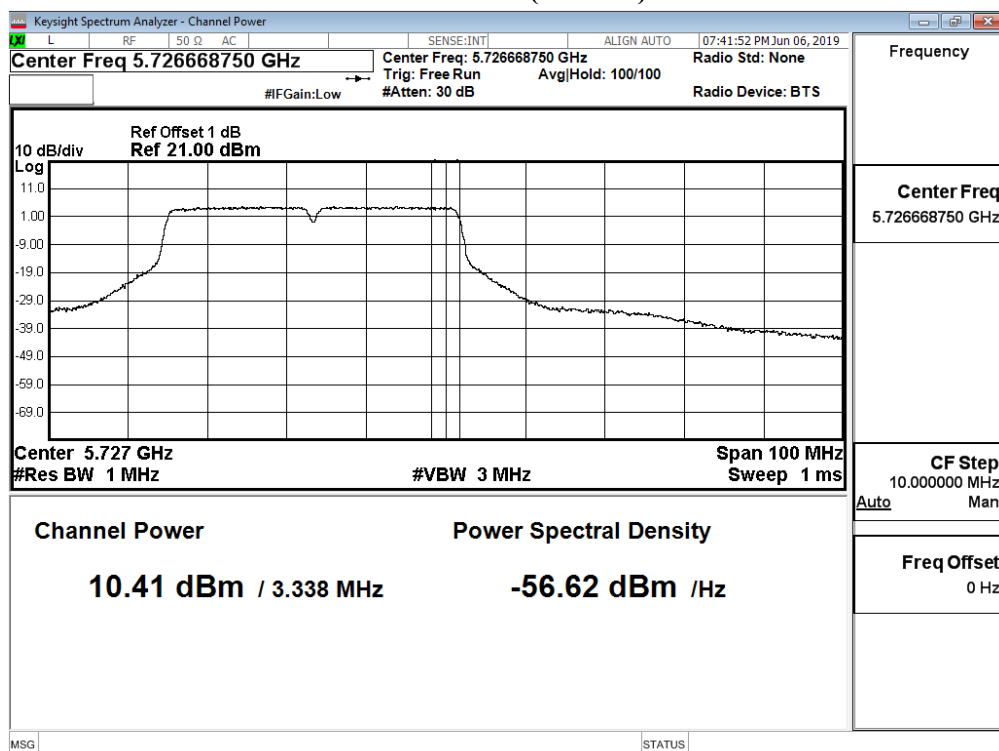Maximum conducted output power:**Channel 142 (U-NII-2C)****Maximum conducted output power:****Channel 142 (U-NII-3)**

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)

Cable loss=1.0dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		32.5	65	97.5	130	195	260	292.5	325	390	433.3
42	5210	17.78	17.58	17.36	17.18	16.98	16.84	16.76	16.51	16.30	16.18
58	5290	16.53	16.40	16.23	16.14	16.07	15.97	15.91	15.82	15.75	15.60
106	5530	18.97	--	--	--	--	--	--	--	--	--
122	5610	20.20	20.12	19.96	19.85	19.69	19.55	19.46	19.33	19.17	19.11
138 (U-NII-2C)	5690	20.39	20.24	20.18	20.00	19.87	19.73	19.56	19.40	19.28	19.11
138 (U-NII-3)	5690	4.22	4.12	3.96	3.84	3.71	3.58	3.49	3.38	3.24	3.10
155	5775	19.38	19.28	19.16	19.10	18.92	18.80	18.68	18.51	18.34	18.24


Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
42	5210	--	17.78	24	--	Pass
58	5290	75.149	16.53	24	29.76	Pass
106	5530	75.106	18.97	24	29.76	Pass
122	5610	75.360	20.20	24	29.77	Pass
138 (U-NII-2C)	5690	72.613	20.39	24	29.61	Pass
138 (U-NII-3)	5690	--	4.22	30	--	Pass
155	5775	--	19.38	30	--	Pass

99% Occupied Bandwidth:


Channel 58

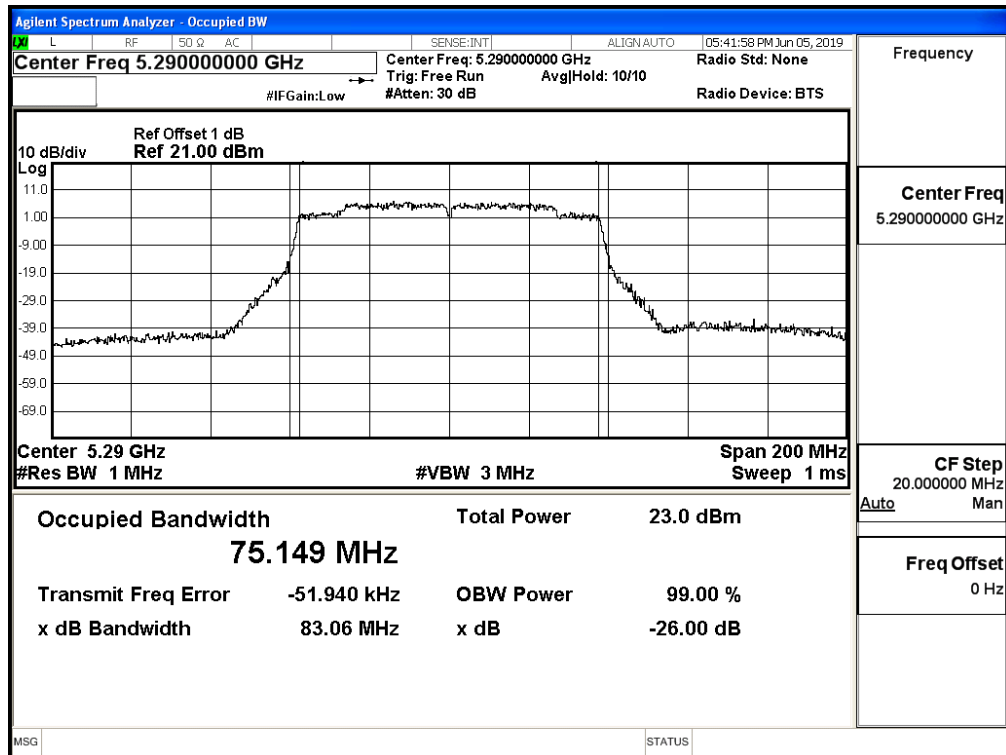


Channel 106

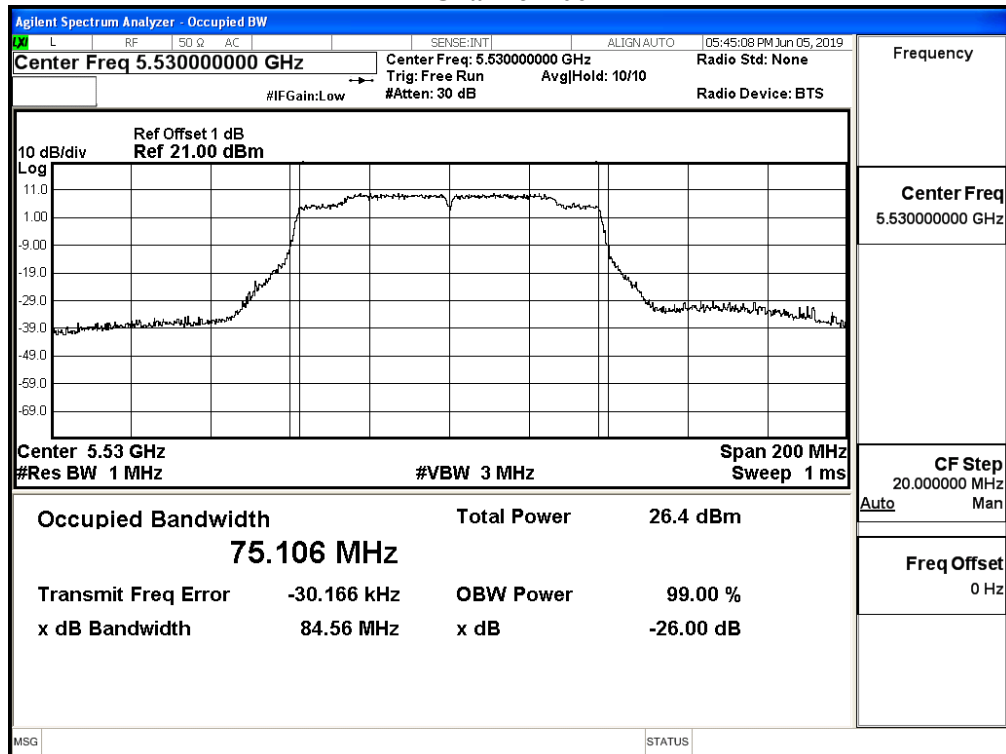

Channel 122

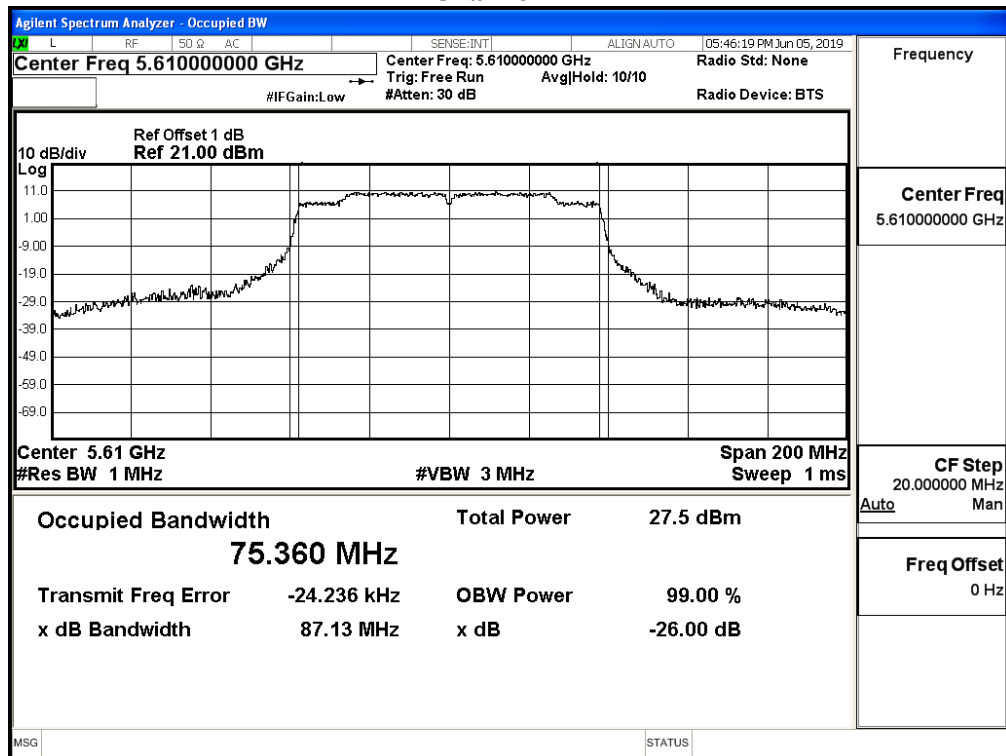


Channel 138

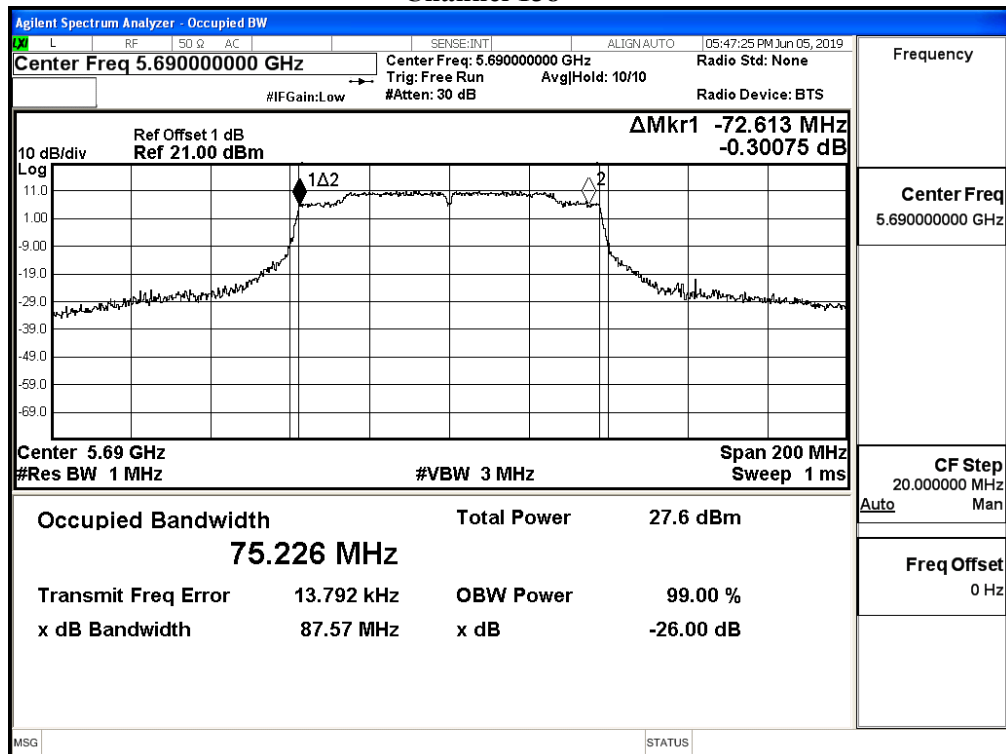


Maximum conducted output power:

Channel 138 (U-NII-2C)

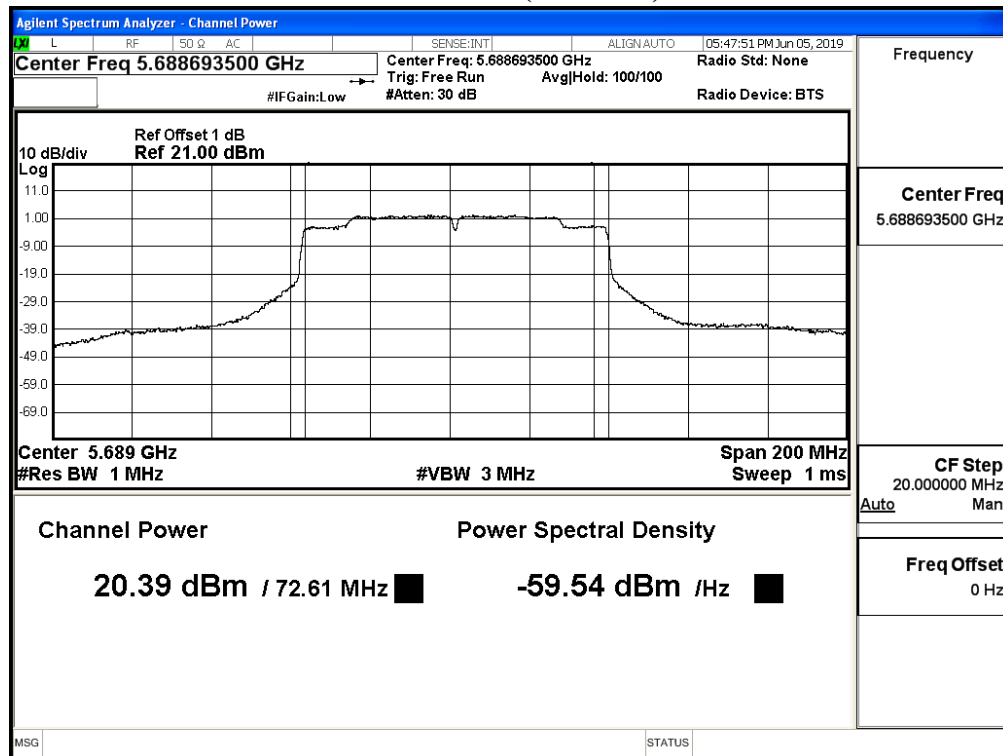

Maximum conducted output power:

Channel 138 (U-NII-3)

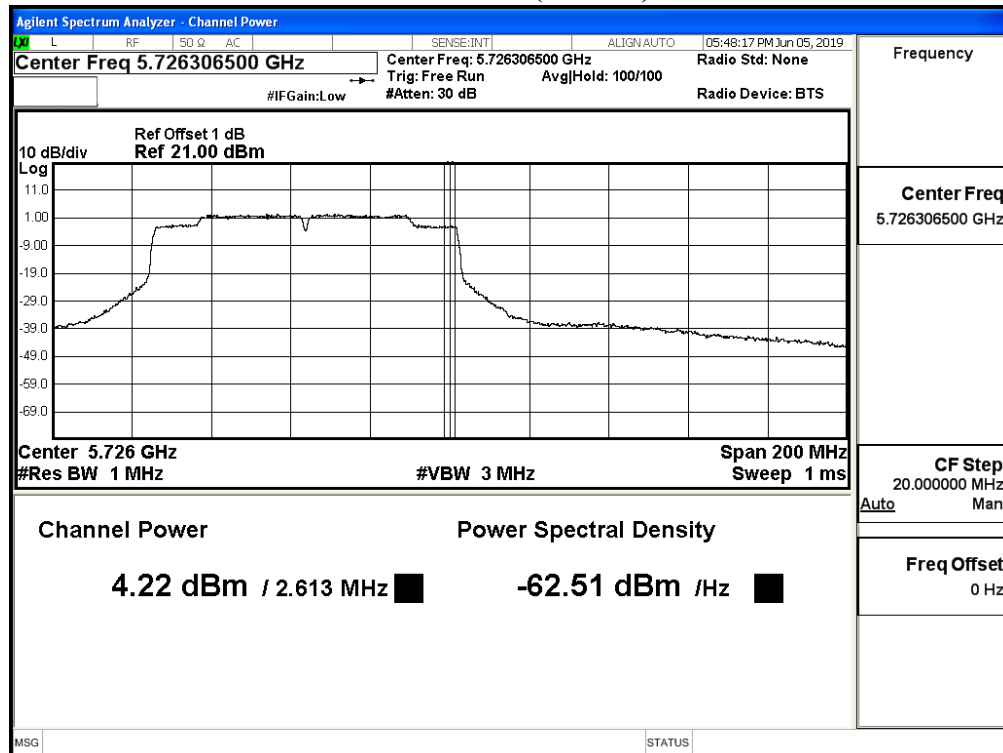

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)

Cable loss=1.0dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	195	260	390	520	585	650	780	866.7
50 (U-NII-1)	5250	9.98	9.85	9.63	9.44	9.29	9.21	8.99	8.82	8.66	8.59
50 (U-NII-2A)	5250	9.61	9.56	9.39	9.31	9.18	8.97	8.80	8.73	8.48	8.26
114	5570	14.41	14.35	14.24	14.16	14.08	13.92	13.85	13.72	13.59	13.47


Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
50 (U-NII-1)	5250	--	9.98	24	--	Pass
50 (U-NII-2A)	5250	76.605	9.61	24	29.84	Pass
114	5570	152.950	14.41	24	32.85	Pass



99% Occupied Bandwidth:

Channel 50

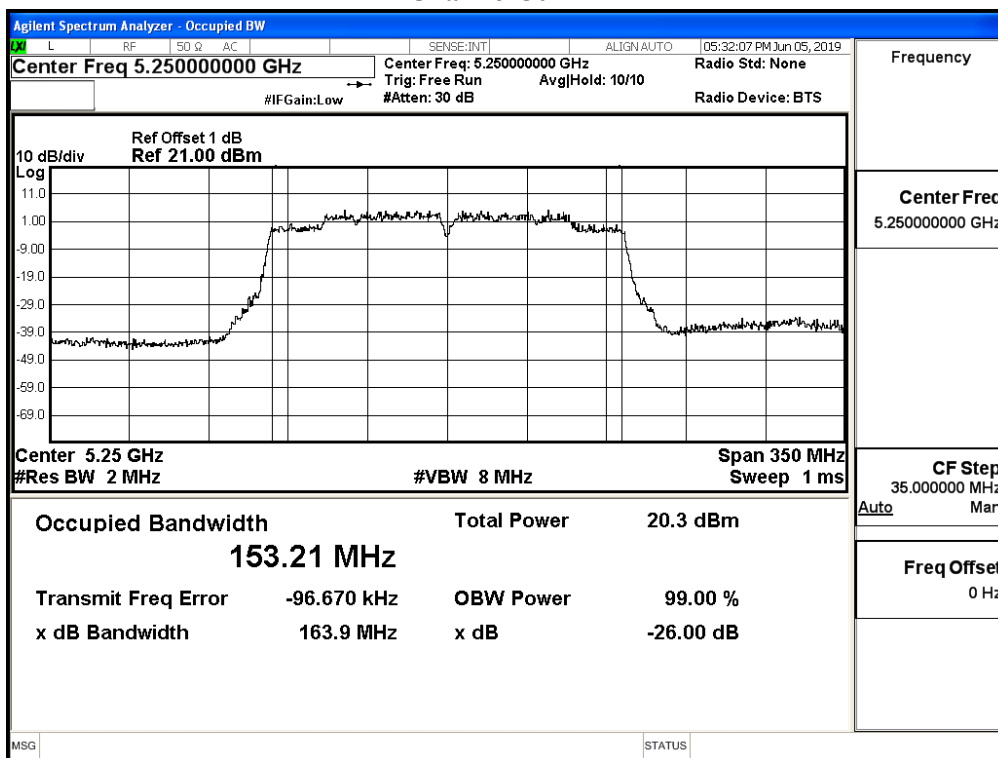

Channel 114

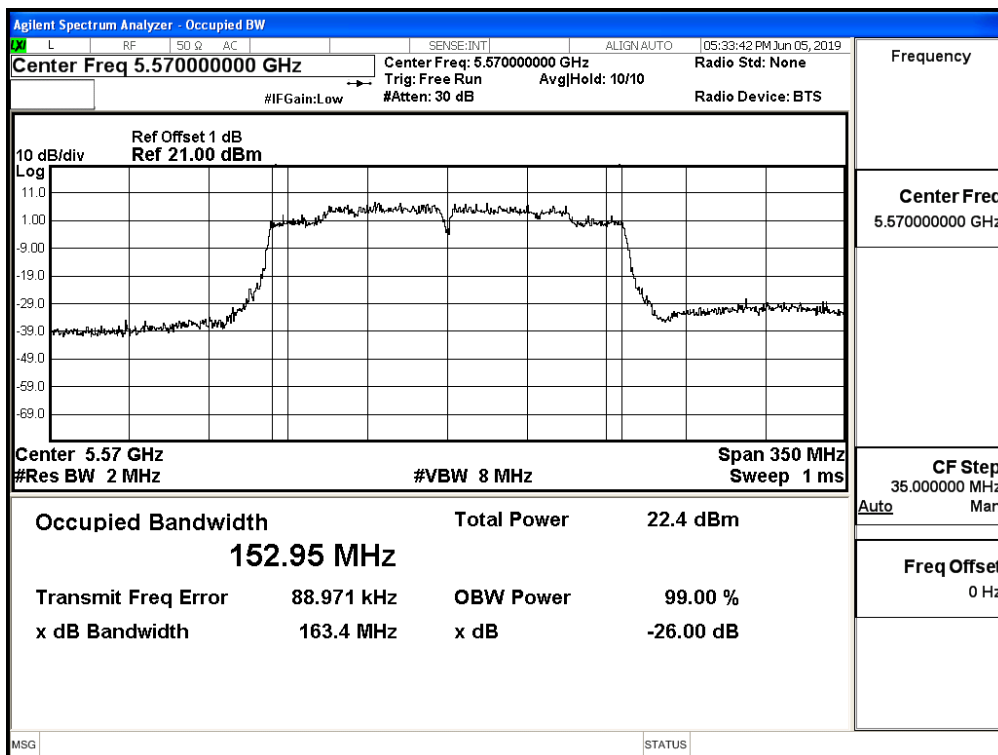

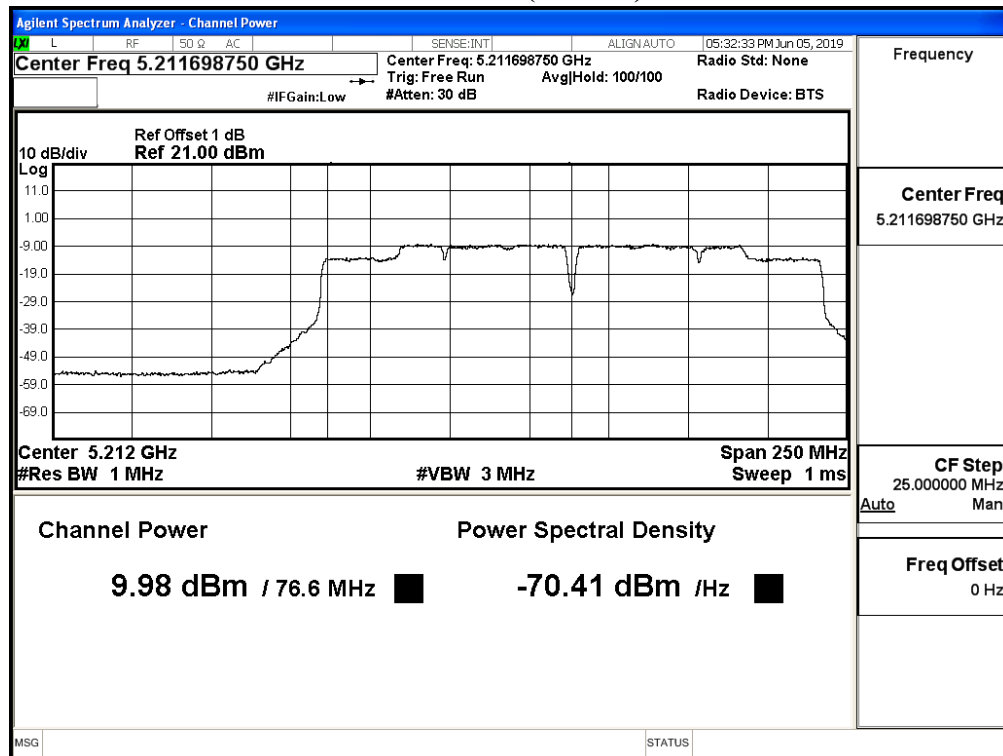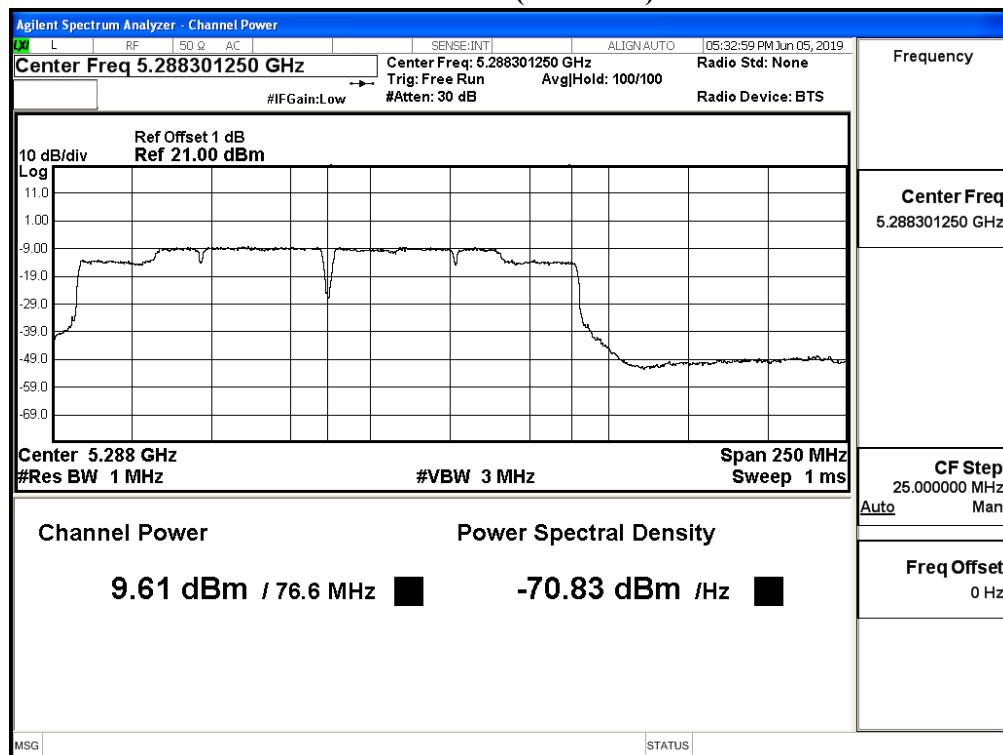Maximum conducted output power:**Channel 50 (U-NII-1)****Maximum conducted output power:****Channel 50 (U-NII-2A)**

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)

Chain A

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4
36	5180	17.79	--	--	--	--	--	--	--
44	5220	19.39	19.3	19.2	19.13	19.01	18.84	18.7	18.56
48	5240	19.48	--	--	--	--	--	--	--
52	5260	19.55	--	--	--	--	--	--	--
60	5300	19.54	19.38	19.3	19.21	19.11	18.97	18.87	18.76
64	5320	16.88	--	--	--	--	--	--	--
100	5500	17.04	--	--	--	--	--	--	--
116	5580	19.19	19.06	19	18.93	18.81	18.67	18.56	18.5
140	5700	18.12	--	--	--	--	--	--	--
144(U-NII-2C)	5720	18.36	18.26	18.08	17.92	17.83	17.67	17.55	17.41
144(U-NII-3)	5720	13	12.93	12.85	12.73	12.67	12.49	12.38	12.29
149	5745	20.18	--	--	--	--	--	--	--
157	5785	20.09	19.99	19.89	19.81	19.64	19.58	19.4	19.23
165	5825	20.19	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4
36	5180	18.05	--	--	--	--	--	--	--
44	5220	19.59	19.41	19.31	19.25	19.14	19.07	18.89	18.72
48	5240	19.62	--	--	--	--	--	--	--
52	5260	19.58	--	--	--	--	--	--	--
60	5300	19.7	19.54	19.41	19.24	19.11	18.97	18.8	18.70
64	5320	17.08	--	--	--	--	--	--	--
100	5500	17.39	--	--	--	--	--	--	--
116	5580	19.68	19.47	19.34	19.25	19.1	19.02	18.95	18.78
140	5700	17.98	--	--	--	--	--	--	--
144(U-NII-2C)	5720	18.27	18.12	17.95	17.88	17.74	17.56	17.46	17.37
144(U-NII-3)	5720	12.9	12.84	12.73	12.58	12.47	12.38	12.22	12.15
149	5745	19.89	--	--	--	--	--	--	--
157	5785	20.1	19.99	19.82	19.73	19.55	19.37	19.25	19.08
165	5825	20.12	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
36	5180	--	17.79	18.05	20.93	24	--	Pass
44	5220	--	19.39	19.59	22.50	24	--	Pass
48	5240	--	19.48	19.62	22.56	24	--	Pass
52	5260	17.931	19.55	19.58	22.58	24	23.54	Pass
60	5300	17.947	19.54	19.70	22.63	24	23.54	Pass
64	5320	17.941	16.88	17.08	19.99	24	23.54	Pass
100	5500	17.932	17.04	17.39	20.23	24	23.54	Pass
116	5580	17.931	19.19	19.68	22.45	24	23.54	Pass
140	5700	17.965	18.12	17.98	21.06	24	23.54	Pass
144(U-NII-2C)	5720	14.018	18.36	18.27	21.33	24	22.47	Pass
144(U-NII-3)	5720	--	13.00	12.90	15.96	30	--	Pass
149	5745	--	20.18	19.89	23.05	30	--	Pass
157	5785	--	20.09	20.10	23.11	30	--	Pass
165	5825	--	20.19	20.12	23.17	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:


Channel 52 (Chain A)

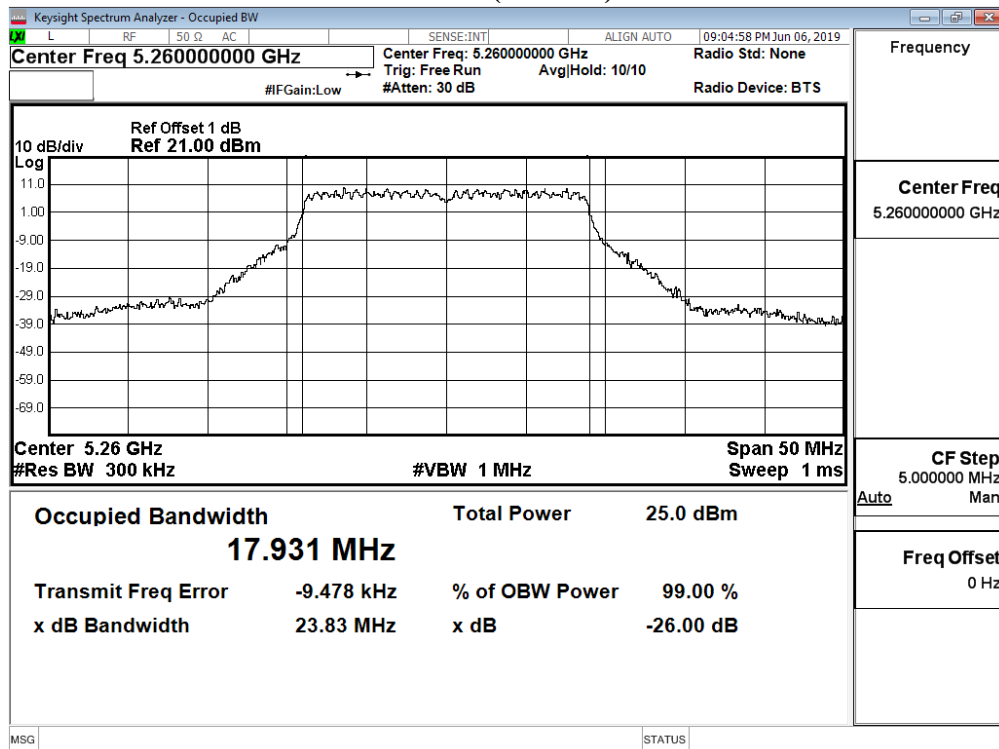


Channel 52 (Chain B)

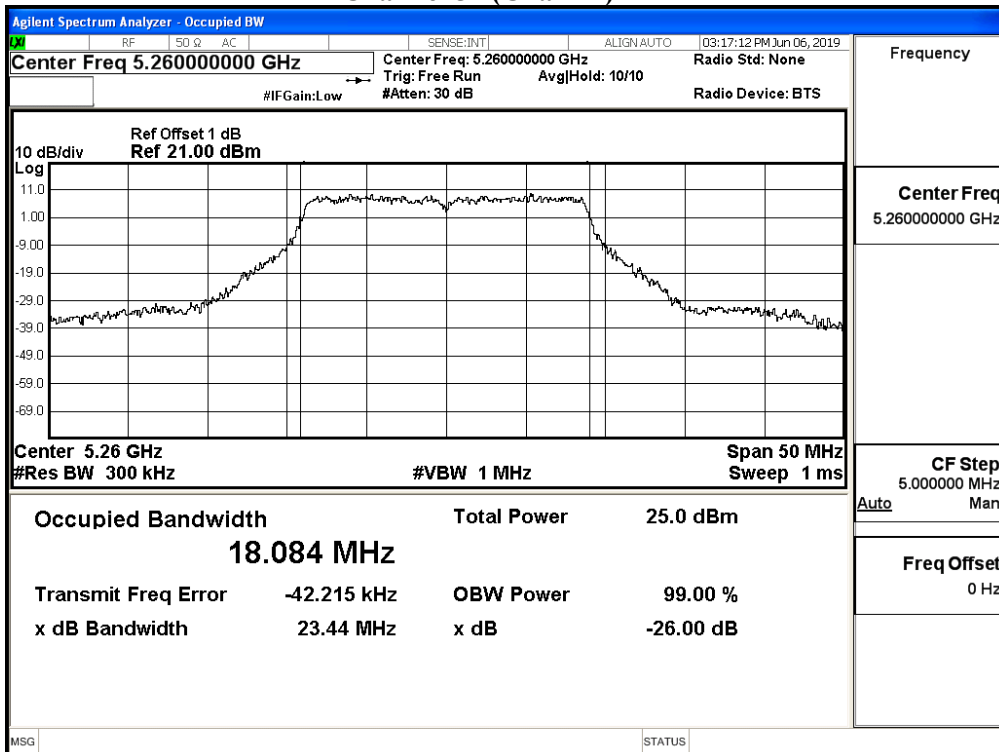


Channel 60 (Chain A)

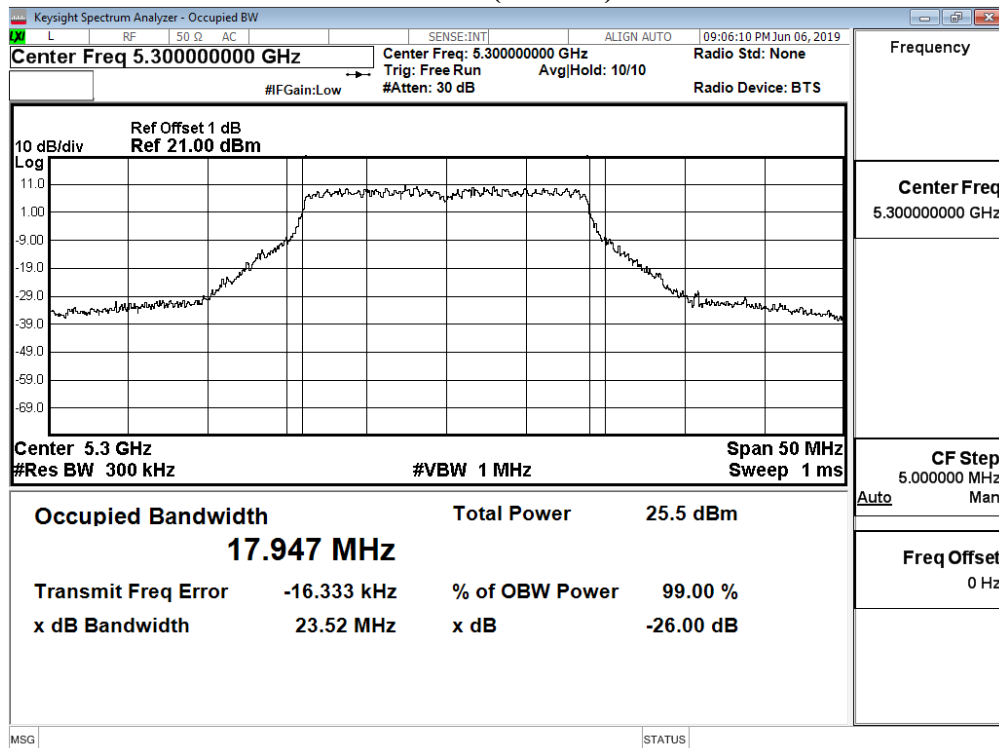


Channel 60 (Chain B)

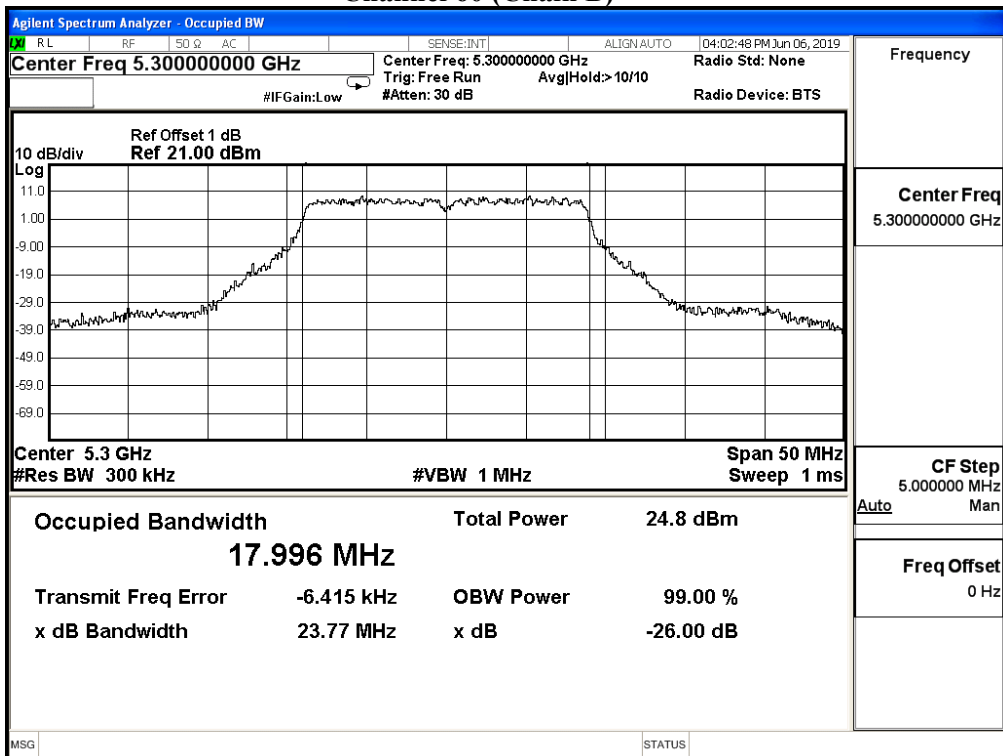


Channel 64 (Chain A)

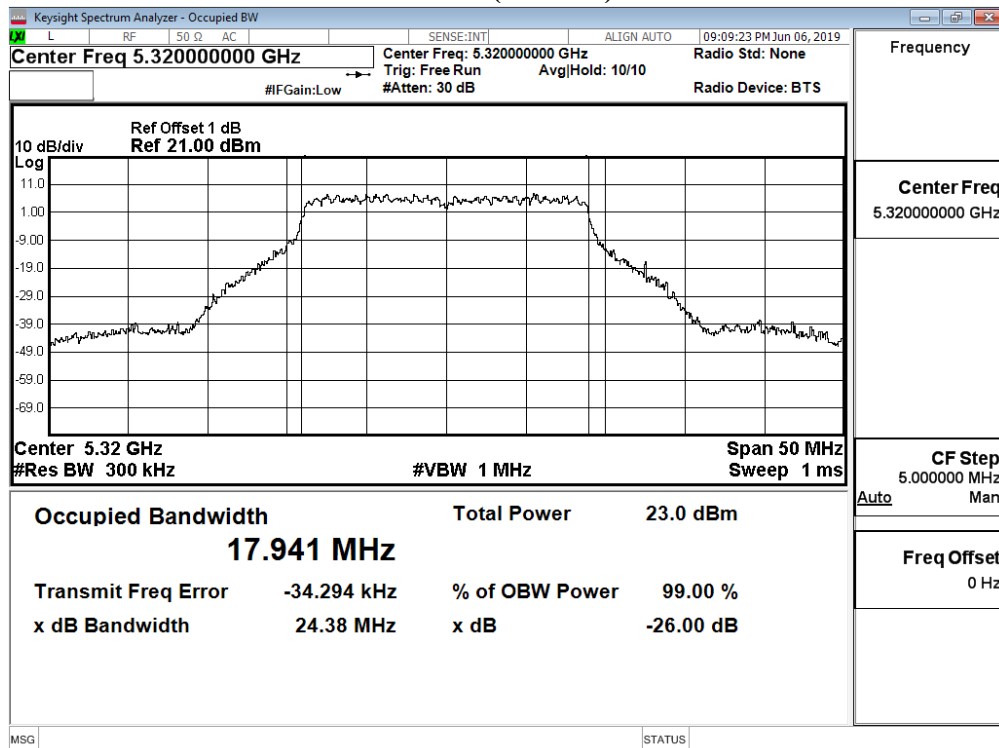


Channel 64 (Chain B)

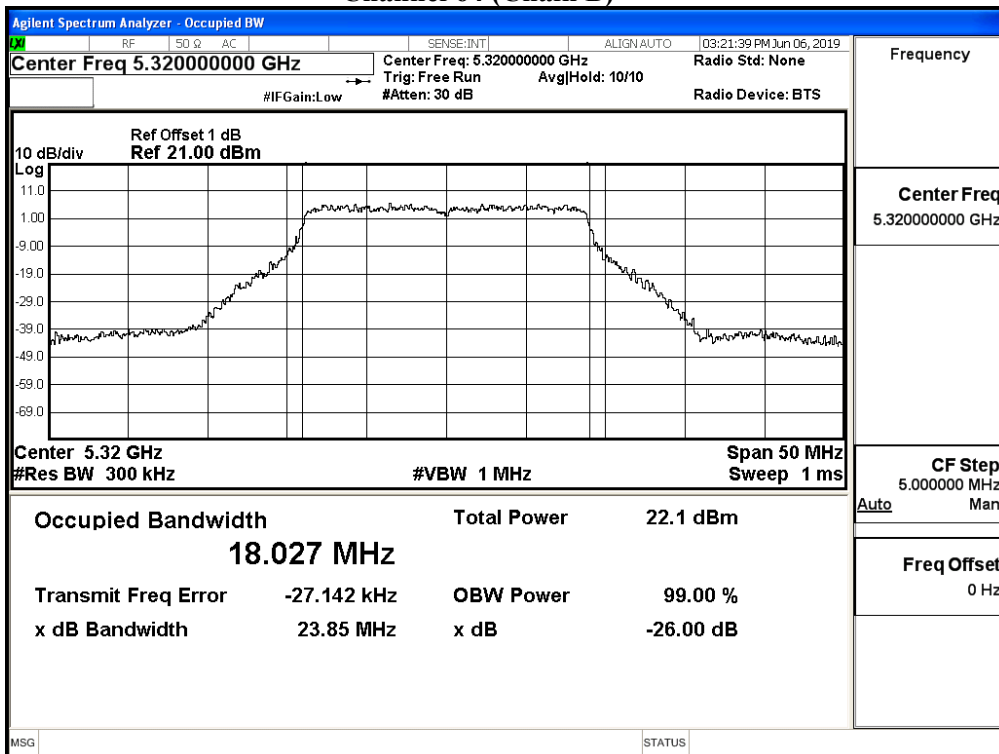


Channel 100 (Chain A)

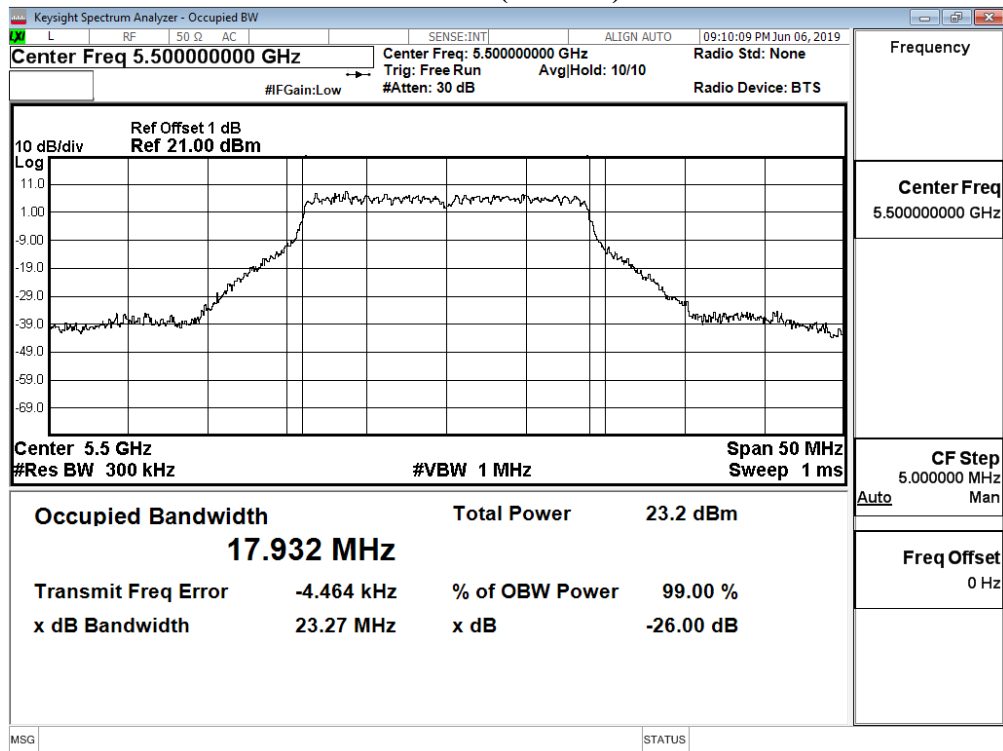


Channel 100 (Chain B)

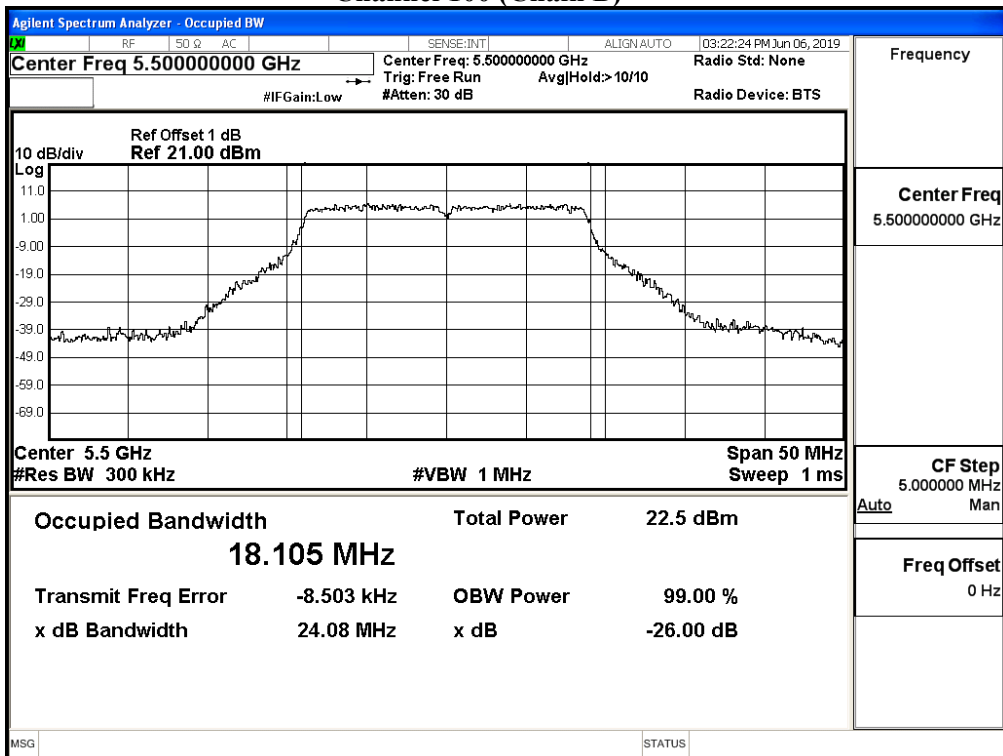


Channel 116 (Chain A)

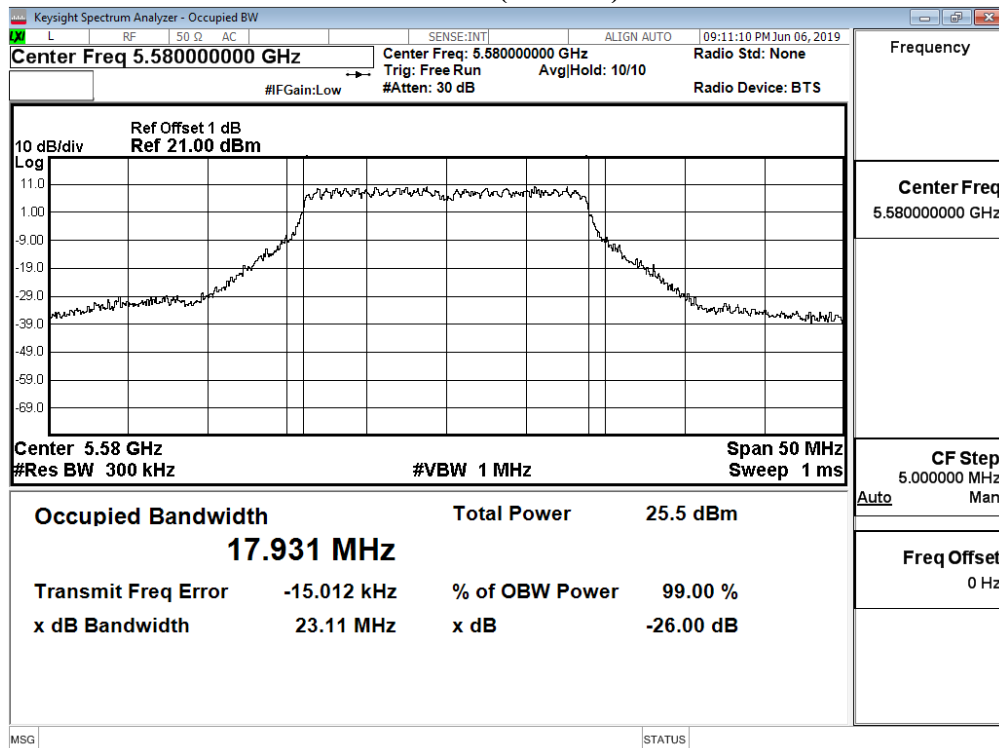


Channel 116 (Chain B)

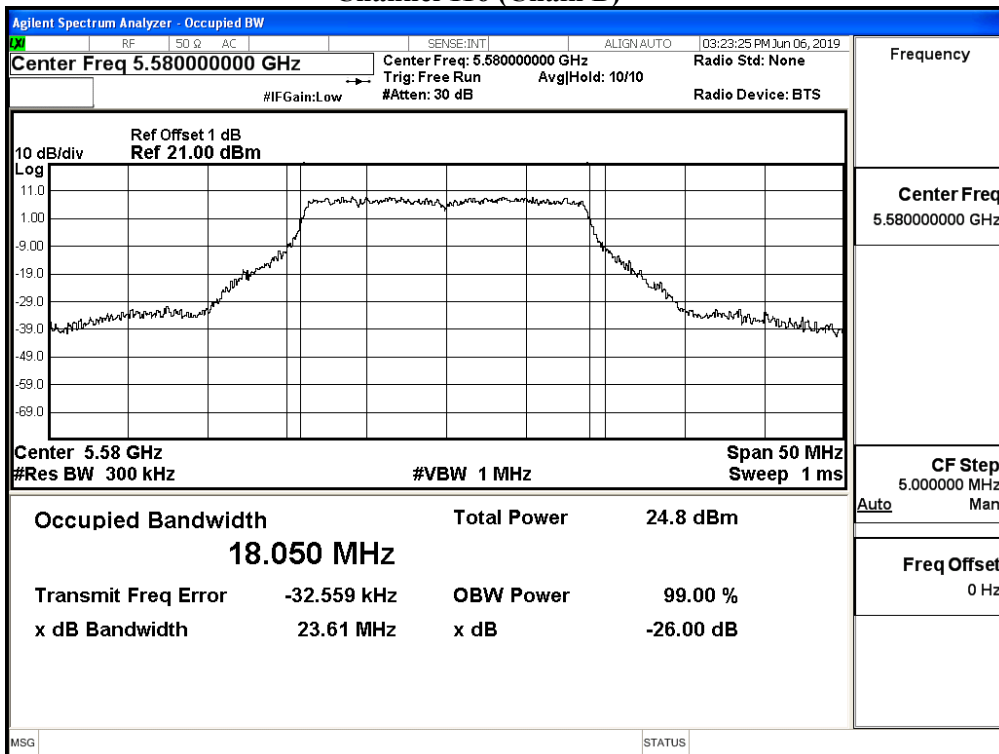


Channel 140 (Chain A)

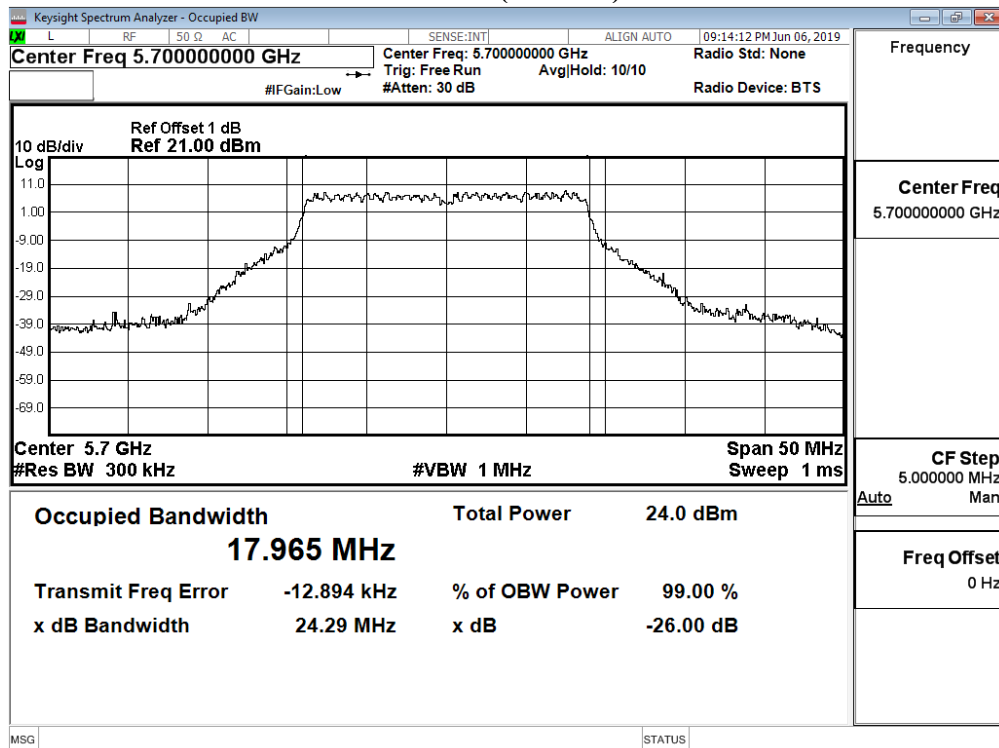


Channel 140 (Chain B)

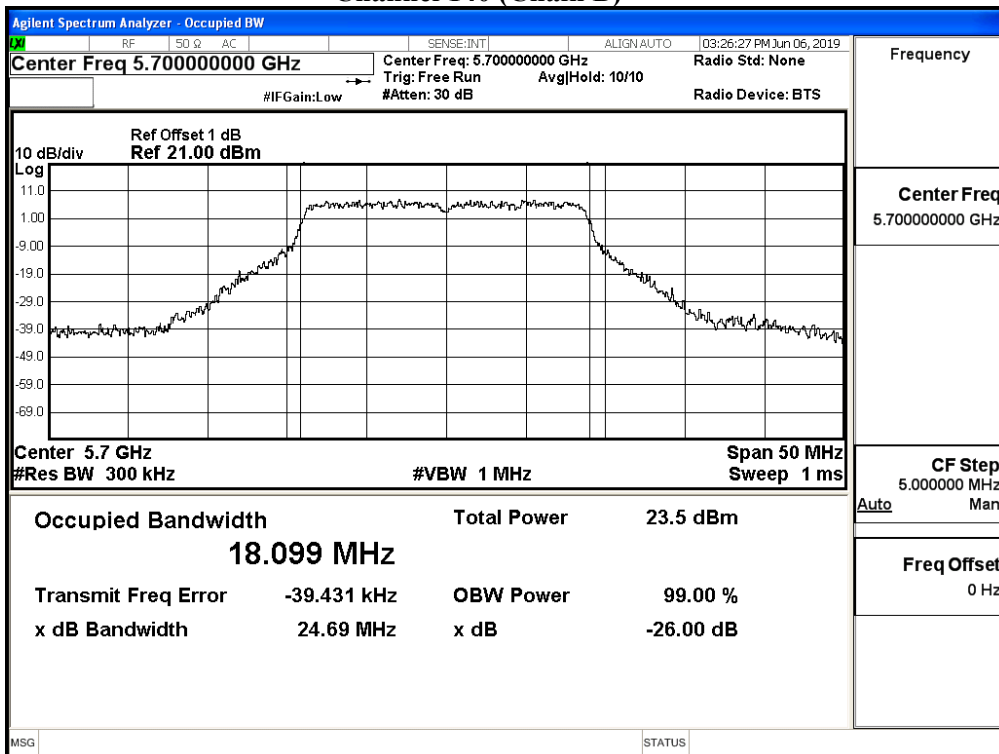


Channel 144 (Chain A)

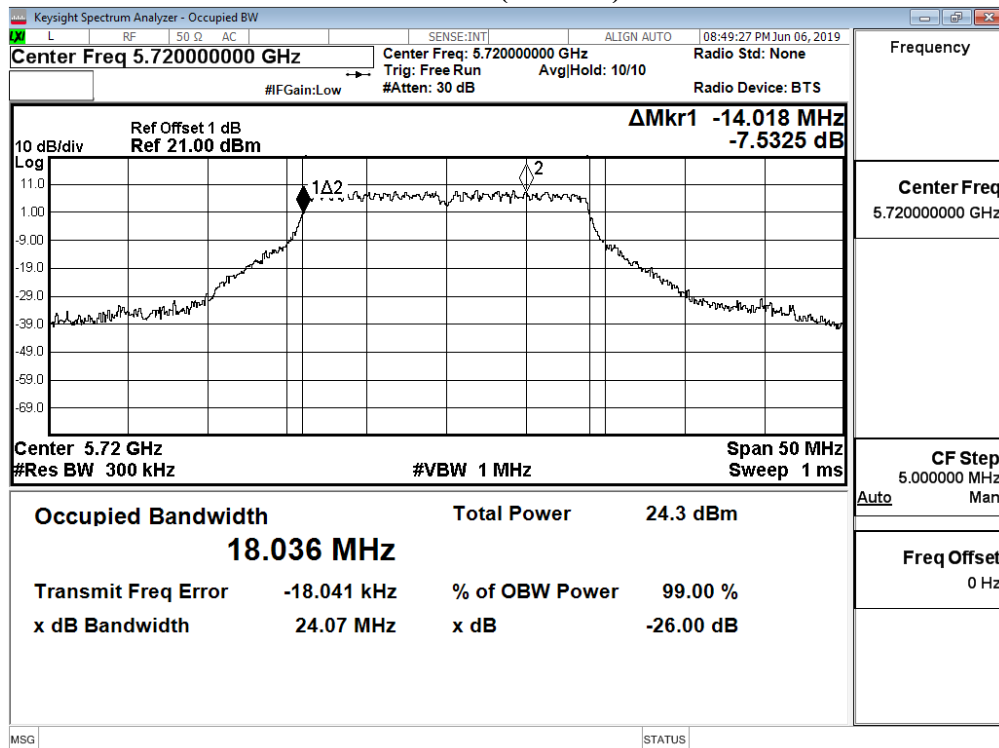


Channel 144 (Chain B)

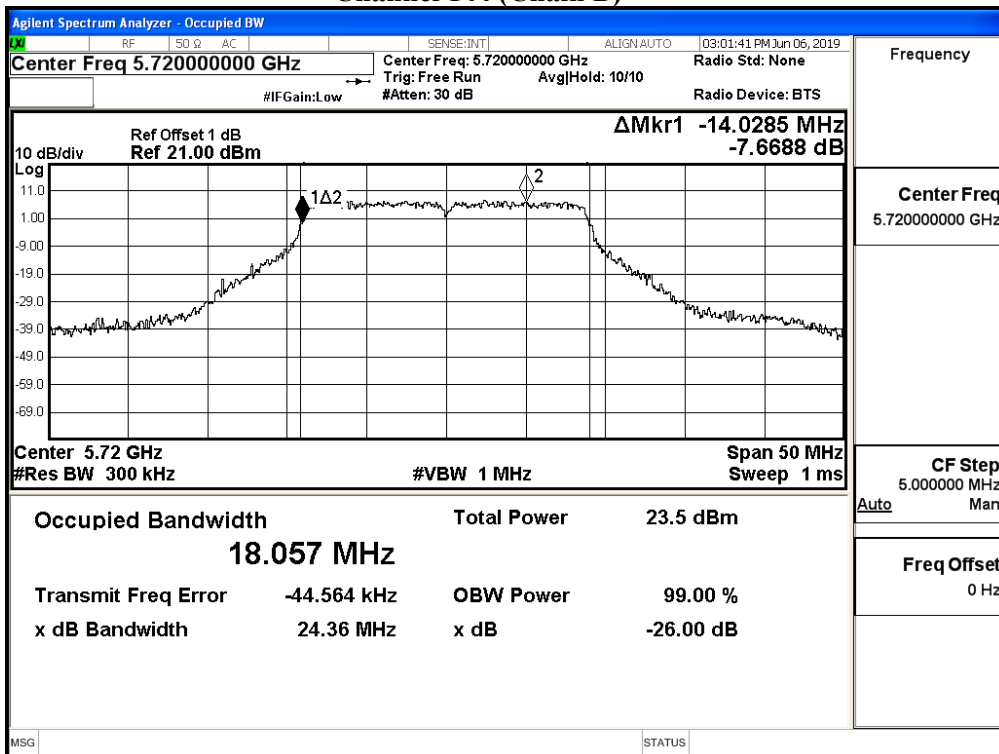


Maximum conducted output power:
Channel 144 (U-NII-2C) (Chain A)

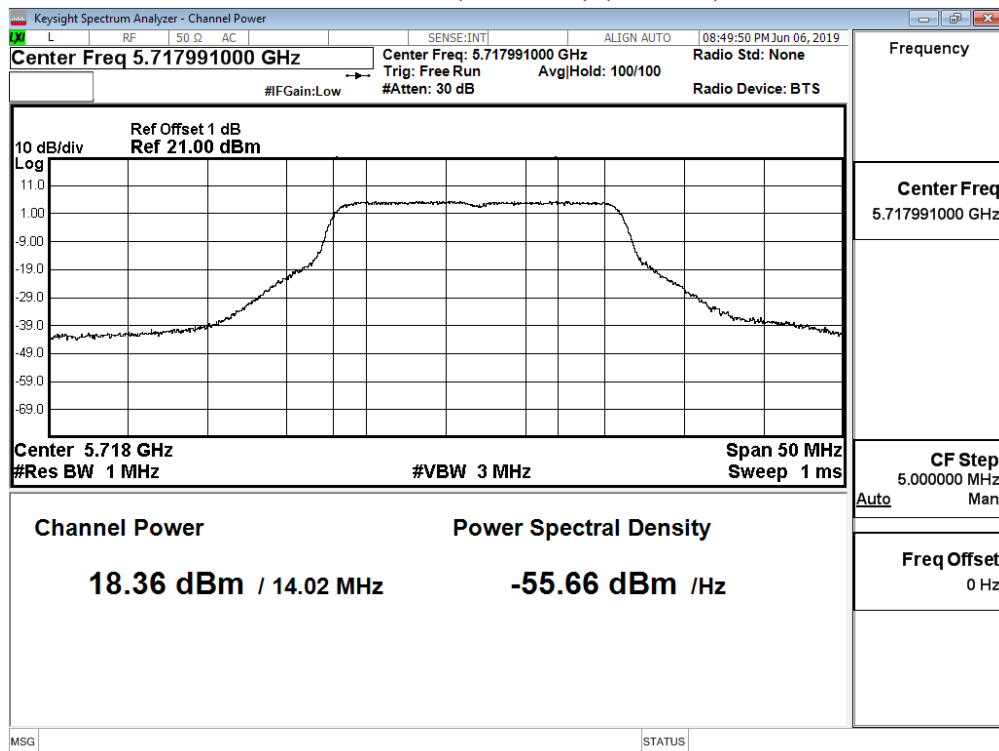


Maximum conducted output power:
Channel 144 (U-NII-3) (Chain A)

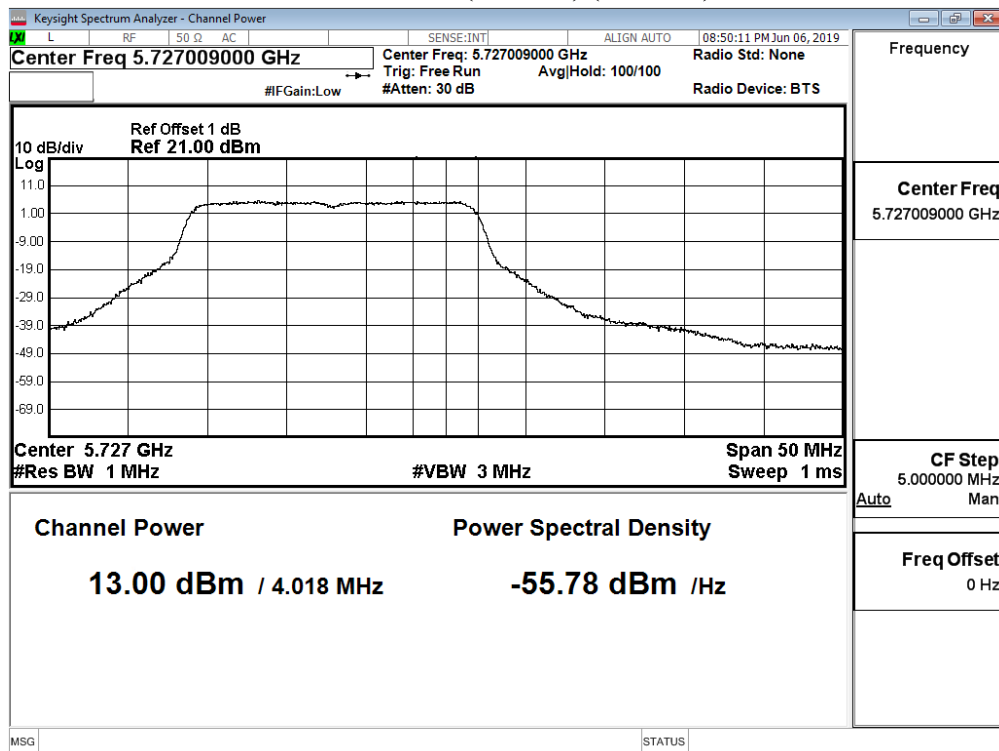

Maximum conducted output power:
Channel 144 (U-NII-2C) (Chain B)

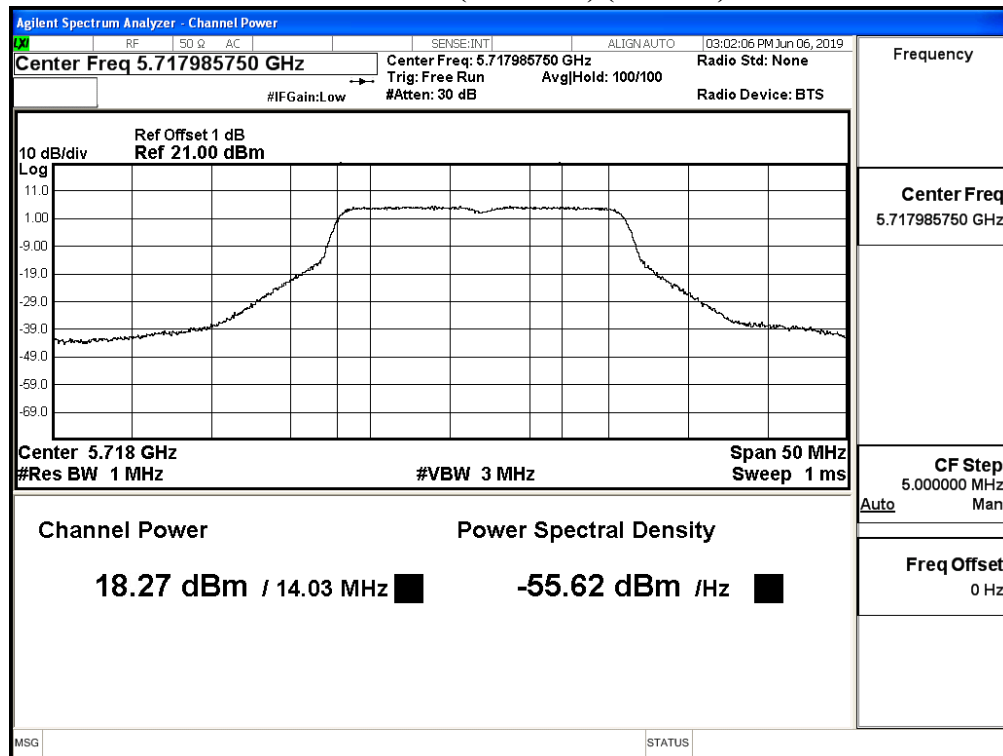

Maximum conducted output power:
Channel 144 (U-NII-3) (Chain B)

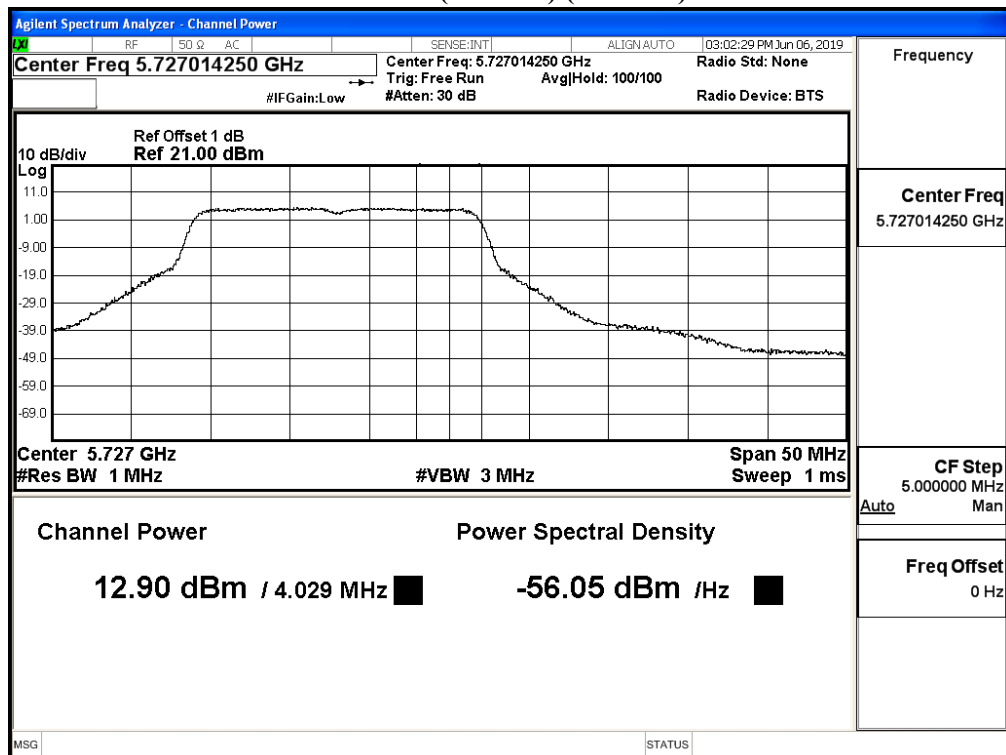

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)

Chain A

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		30	60	90	120	180	240	270	300
38	5190	15.47	--	--	--	--	--	--	--
46	5230	19.83	19.65	19.53	19.44	19.28	19.11	18.99	18.87
54	5270	20.06	--	--	--	--	--	--	--
62	5310	15.79	15.72	15.57	15.45	15.38	15.2	15.05	14.92
102	5510	16.79	--	--	--	--	--	--	--
110	5550	19.07	18.95	18.86	18.71	18.54	18.48	18.41	18.33
134	5670	18.68	--	--	--	--	--	--	--
142(U-NII-2C)	5710	19.21	19.04	18.98	18.83	18.65	18.58	18.46	18.31
142(U-NII-3)	5710	9.48	9.38	9.3	9.23	9.08	8.92	8.76	8.62
151	5755	20.08	--	--	--	--	--	--	--
159	5795	20.27	20.21	20.12	20.05	19.99	19.85	19.75	19.64

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=1.0dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		30	60	90	120	180	240	270	300
38	5190	15.29	--	--	--	--	--	--	--
46	5230	19.94	19.85	19.76	19.63	19.53	19.44	19.38	19.29
54	5270	19.95	--	--	--	--	--	--	--
62	5310	15.85	15.67	15.59	15.51	15.45	15.37	15.28	15.13
102	5510	17.05	--	--	--	--	--	--	--
110	5550	19.7	19.61	19.44	19.28	19.13	19.05	18.87	18.71
134	5670	18.72	--	--	--	--	--	--	--
142(U-NII-2C)	5710	19.14	18.99	18.83	18.71	18.54	18.47	18.33	18.26
142(U-NII-3)	5710	9.11	8.99	8.83	8.75	8.58	8.42	8.25	8.11
151	5755	20.01	--	--	--	--	--	--	--
159	5795	19.93	19.78	19.71	19.54	19.41	19.32	19.18	19.06

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
38	5190	--	15.47	15.29	18.39	24	--	Pass
46	5230	--	19.83	19.94	22.90	24	--	Pass
54	5270	36.415	20.06	19.95	23.02	24	26.61	Pass
62	5310	36.356	15.79	15.85	18.83	24	26.61	Pass
102	5510	36.410	16.79	17.05	19.93	24	26.61	Pass
110	5550	36.442	19.07	19.70	22.41	24	26.62	Pass
134	5670	36.481	18.68	18.72	21.71	24	26.62	Pass
142(U-NII-2C)	5710	33.201	19.21	19.14	22.19	24	26.21	Pass
142(U-NII-3)	5710	--	9.48	9.11	12.31	30	--	Pass
151	5755	--	20.08	20.01	23.06	30	--	Pass
159	5795	--	20.27	19.93	23.11	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:


Channel 54 (Chain A)

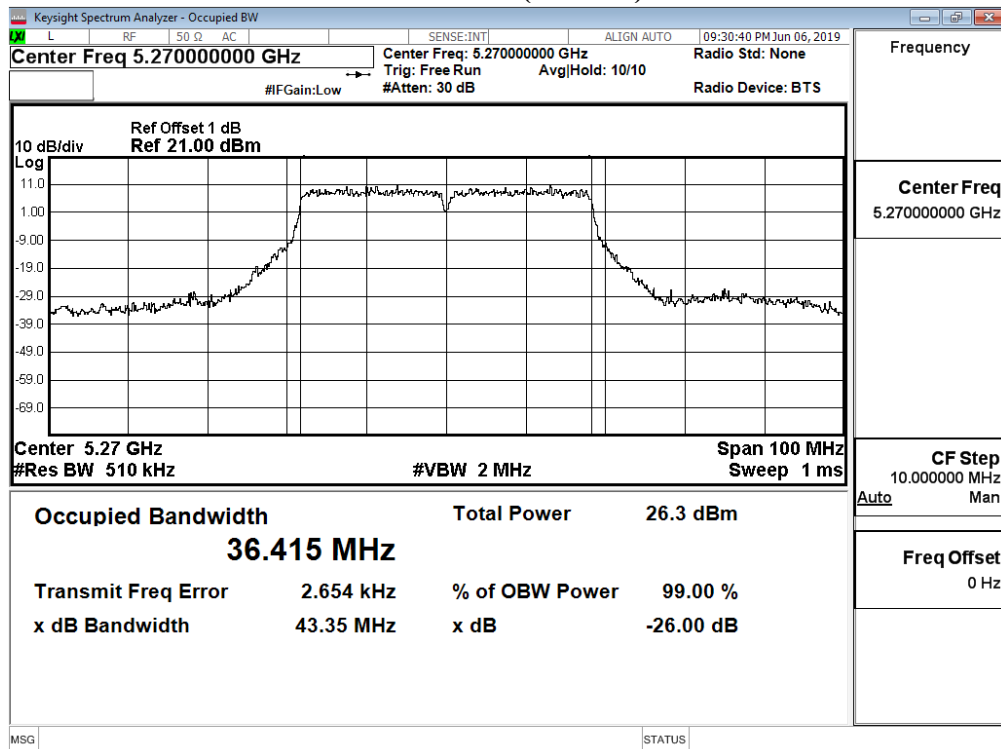


Channel 54 (Chain B)

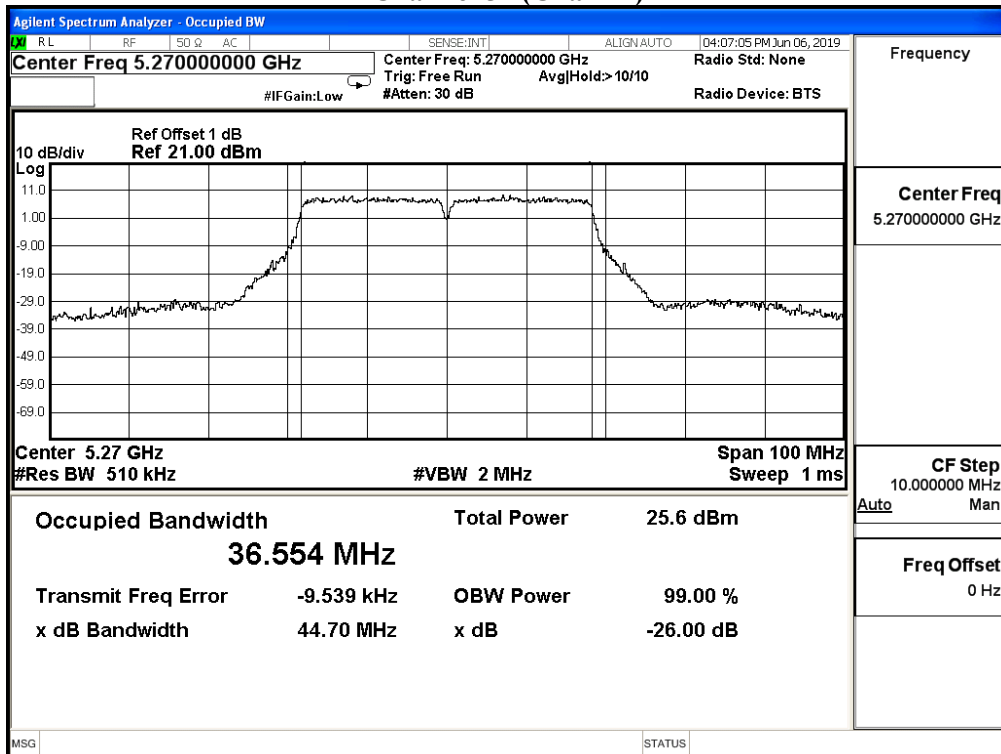


Channel 62 (Chain A)

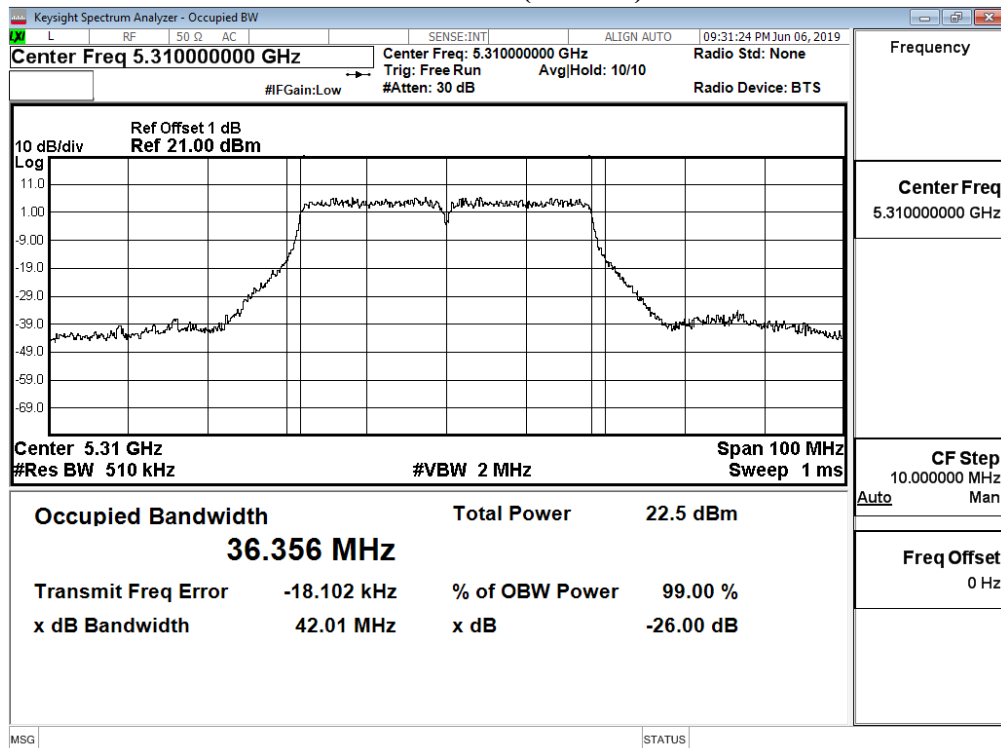


Channel 62 (Chain B)

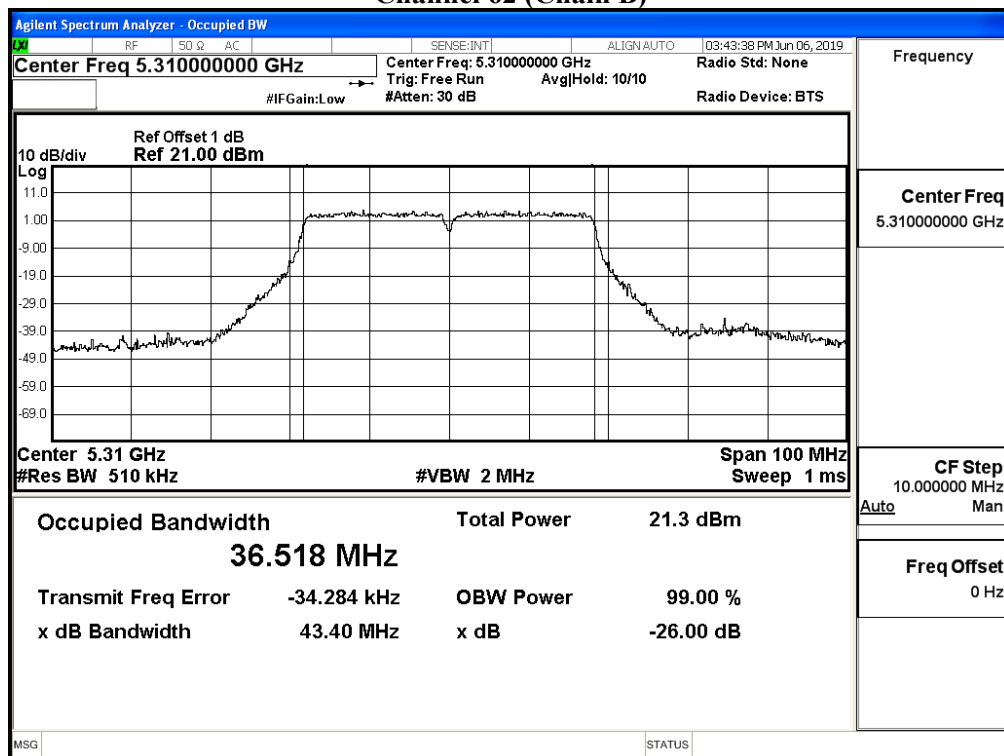


Channel 102 (Chain A)

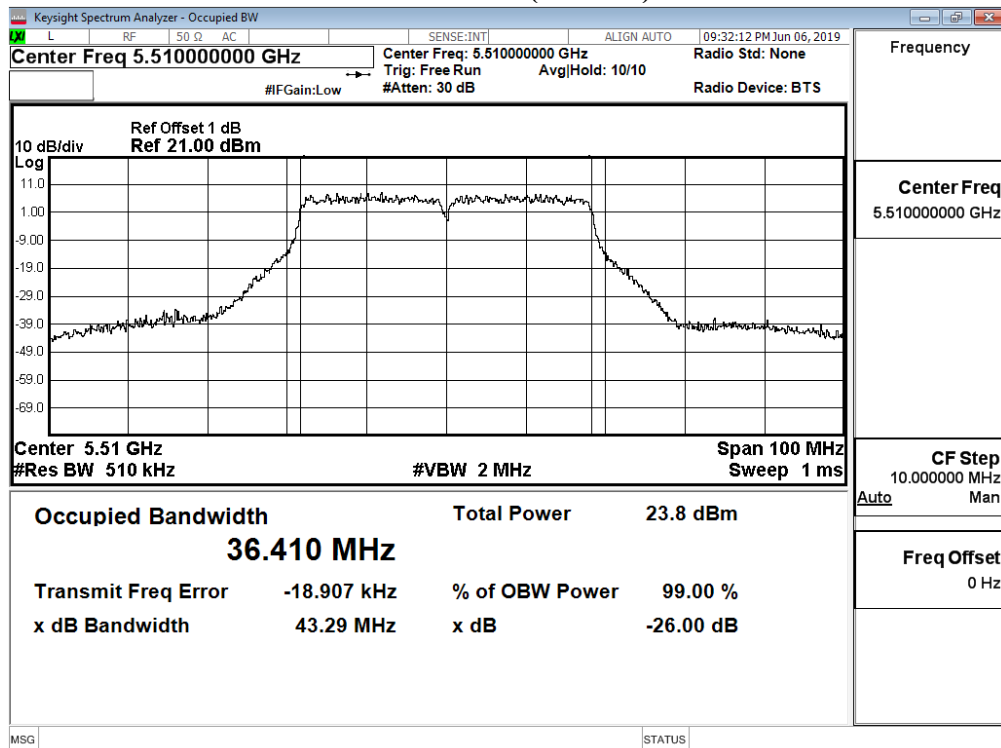


Channel 102 (Chain B)

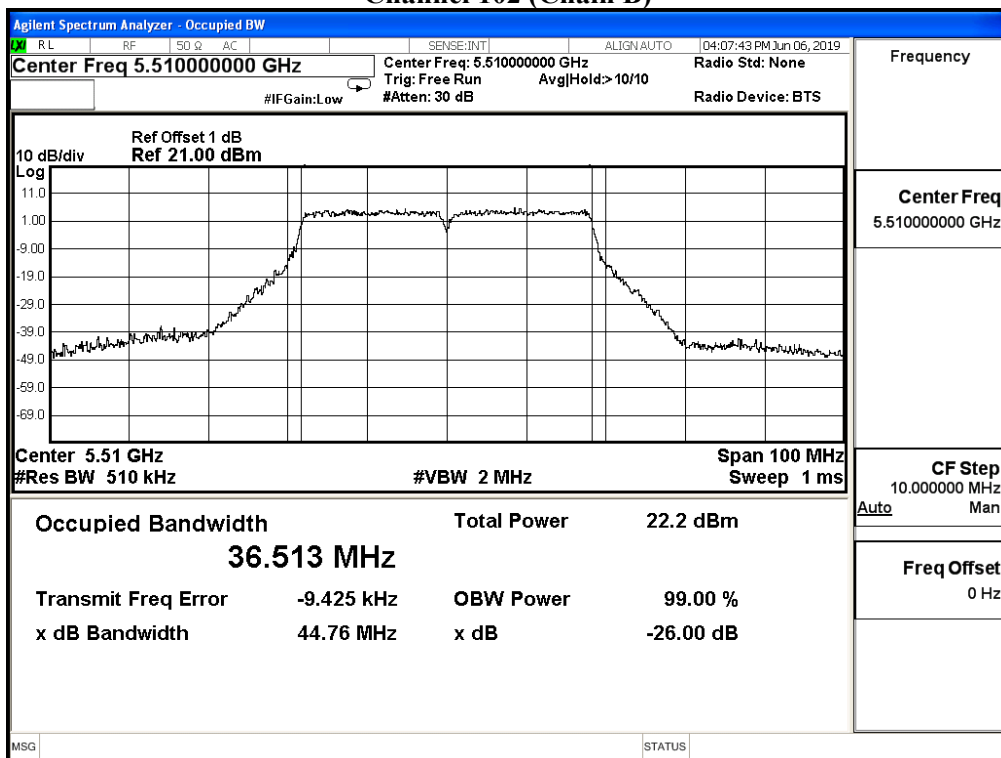


Channel 110 (Chain A)

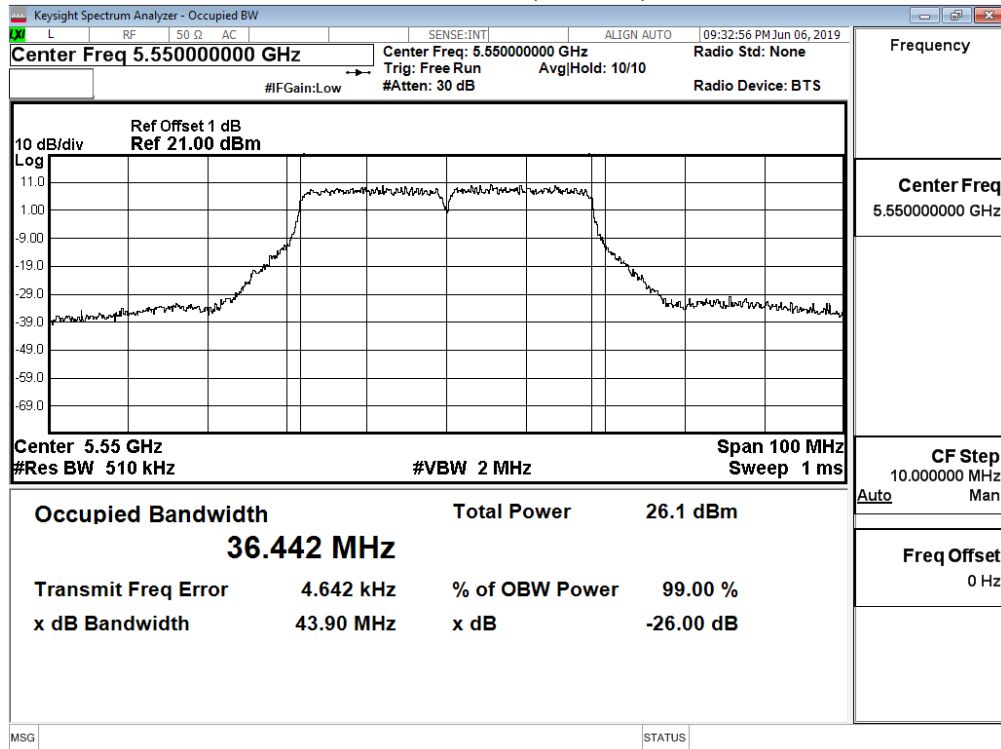


Channel 110 (Chain B)

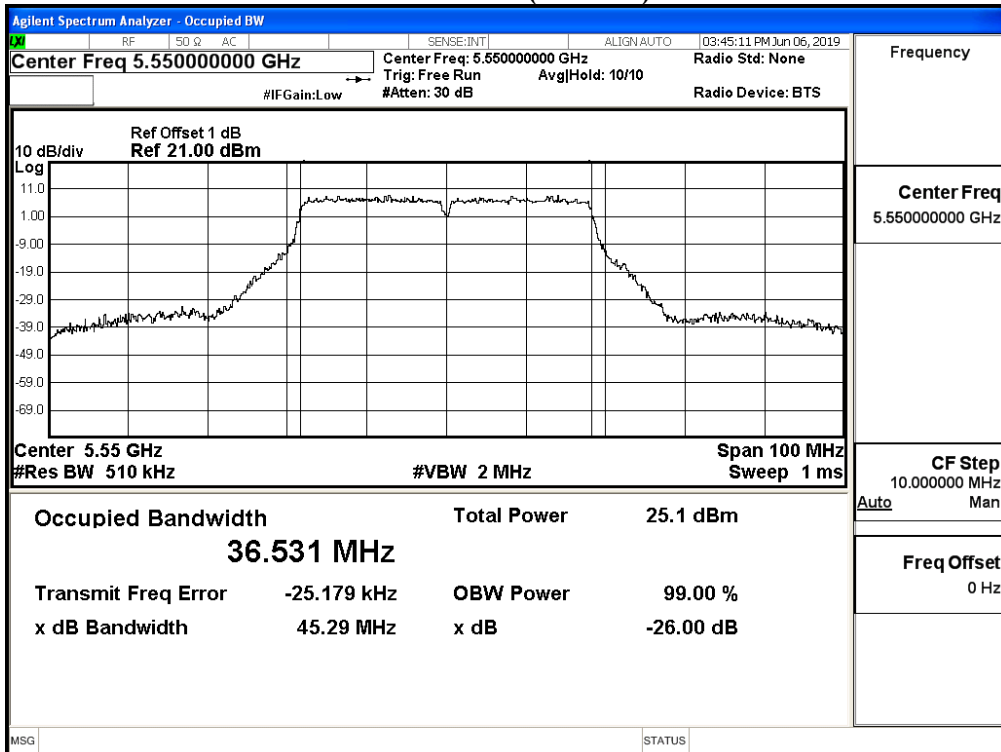


Channel 134 (Chain A)

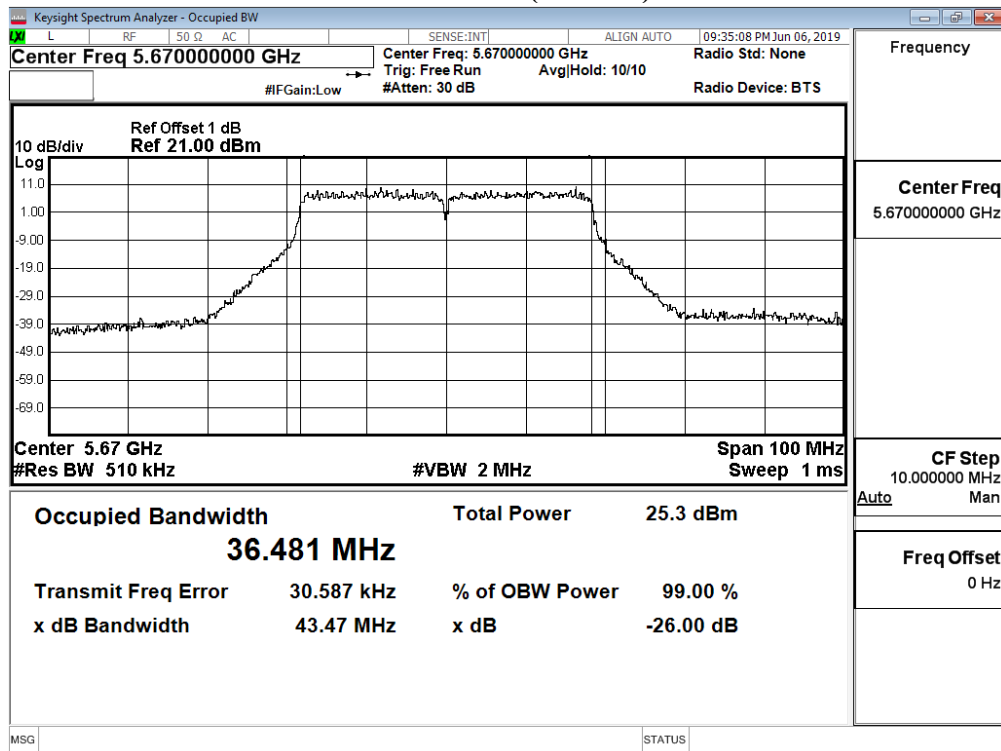


Channel 134 (Chain B)


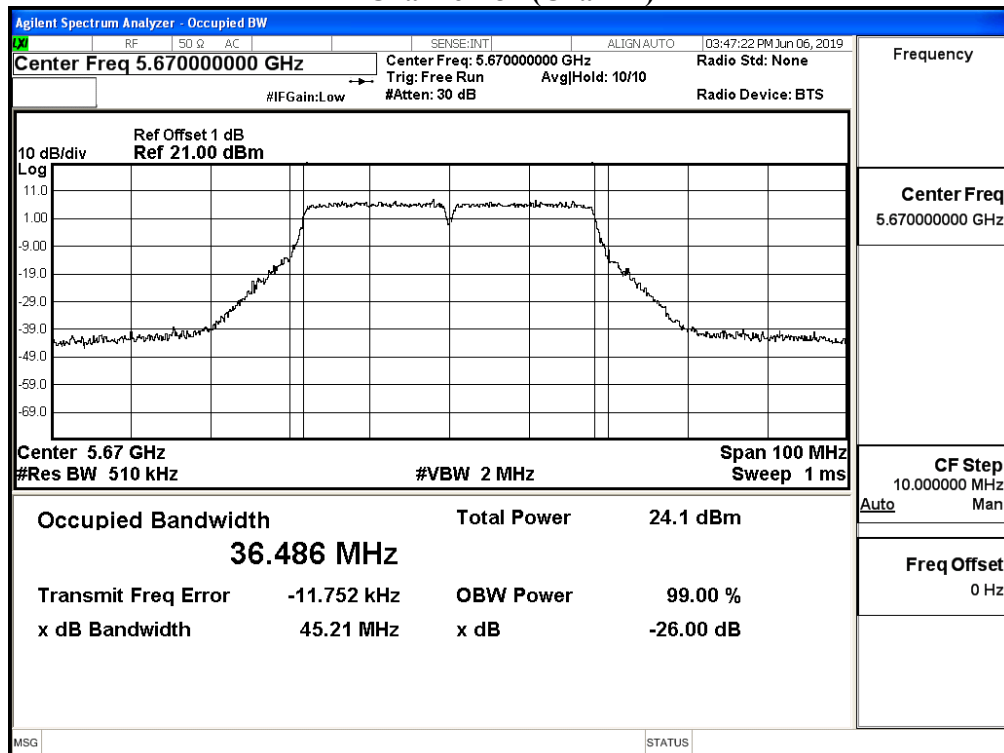


Channel 142 (Chain A)

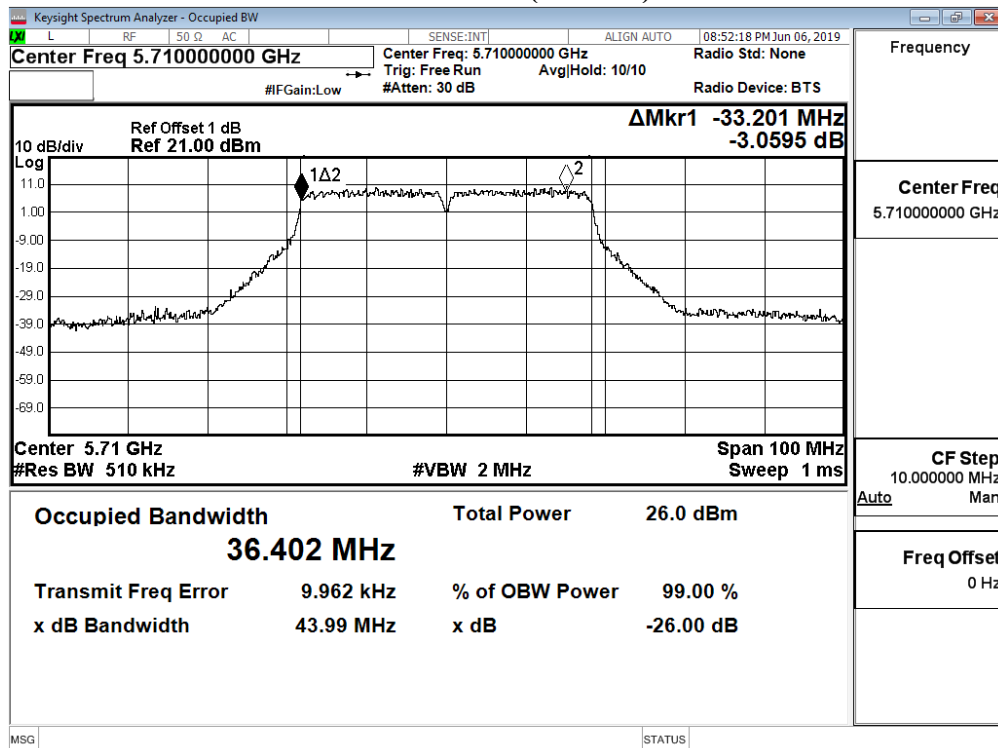


Channel 142 (Chain B)

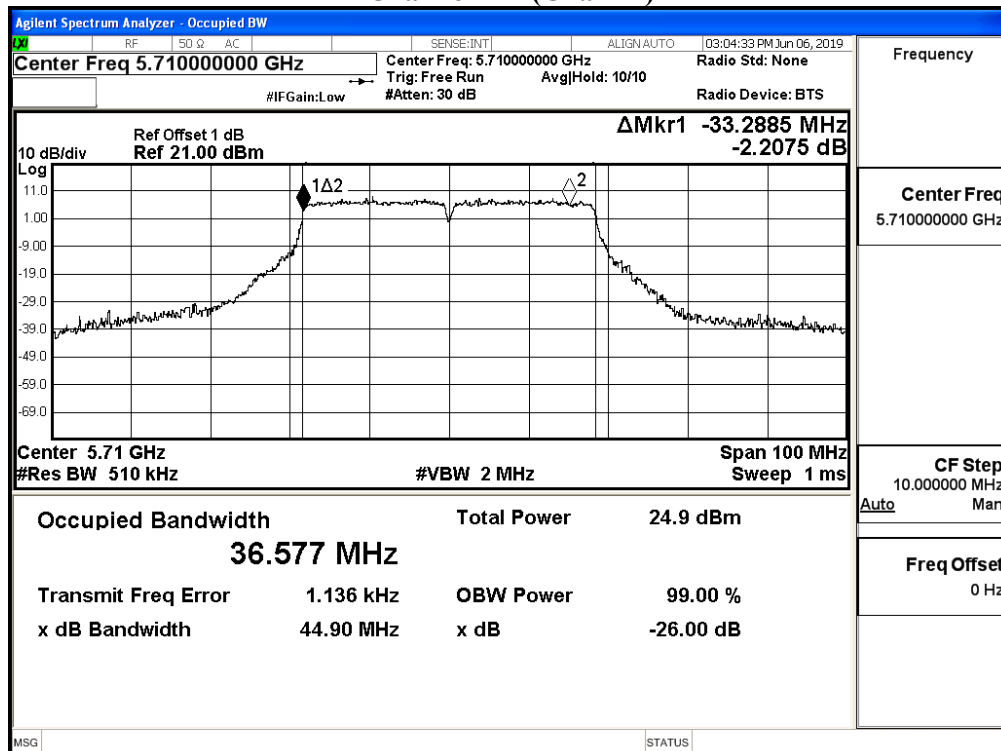


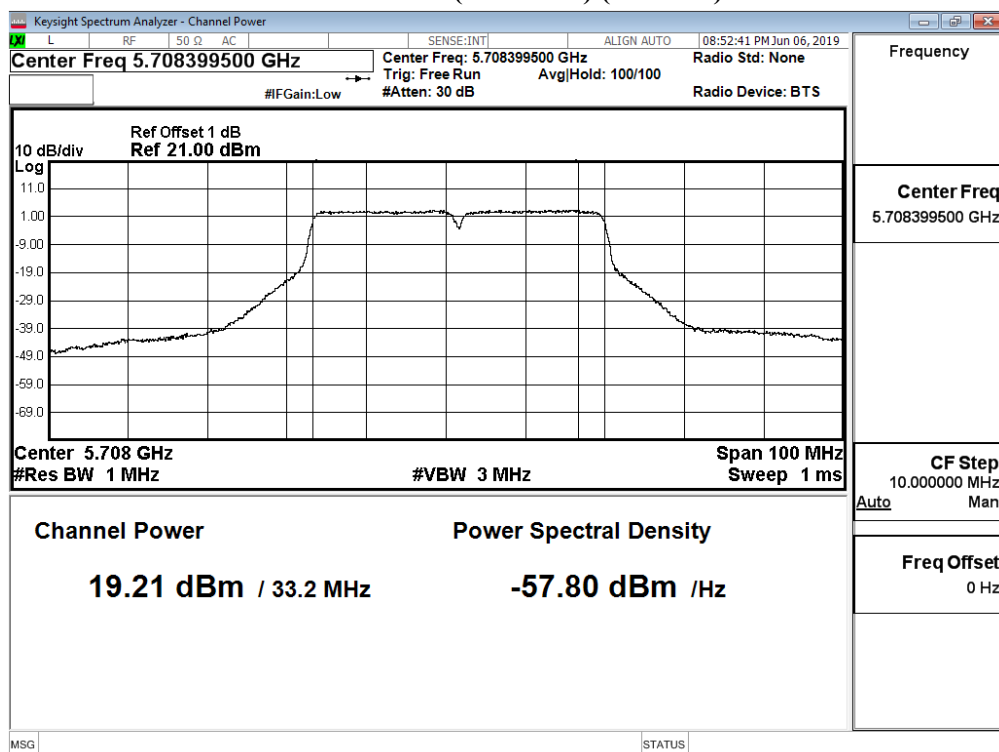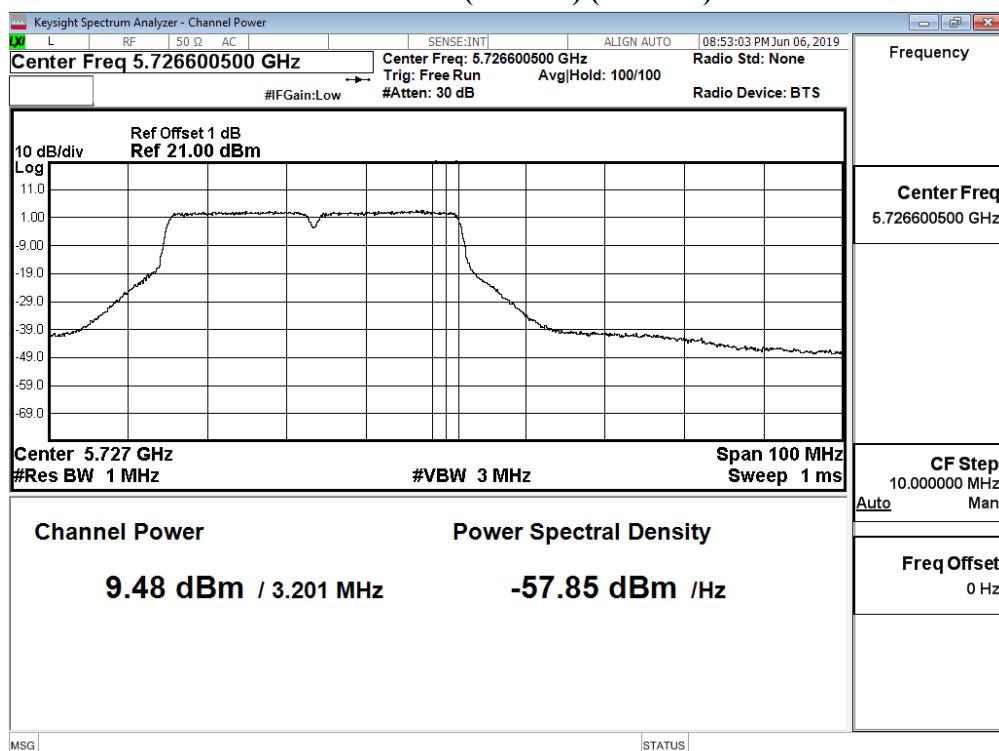Maximum conducted output power:**Channel 142 (U-NII-2C) (Chain A)****Maximum conducted output power:****Channel 142 (U-NII-3) (Chain A)**

Maximum conducted output power:
Channel 142 (U-NII-2C) (Chain B)

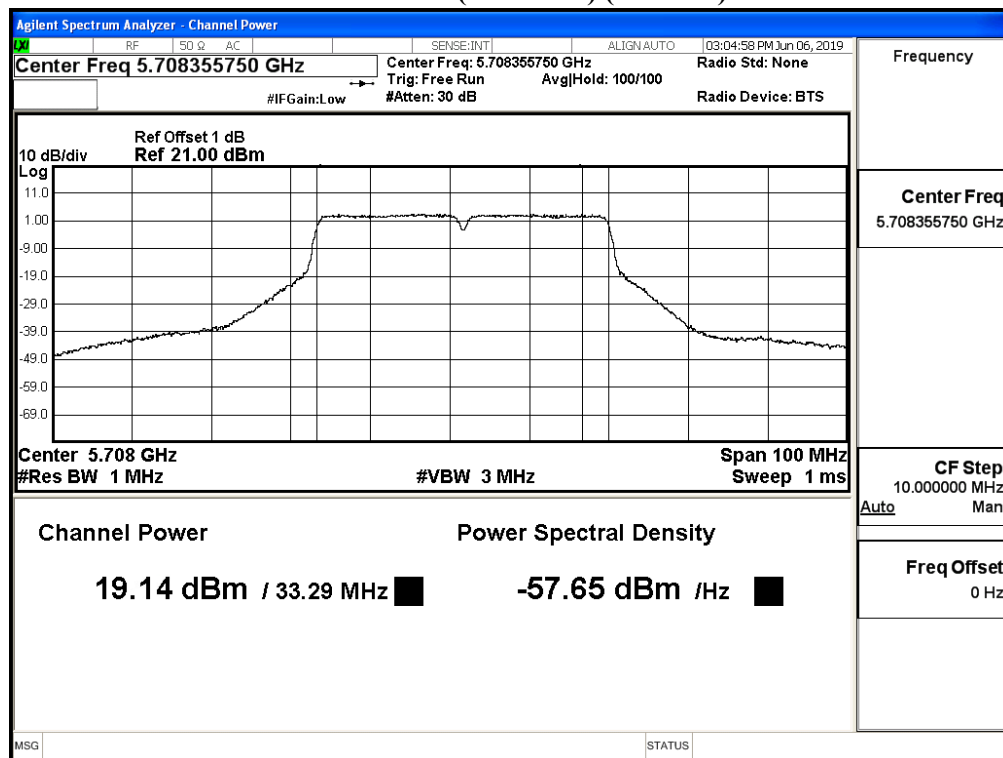

Maximum conducted output power:
Channel 142 (U-NII-3) (Chain B)

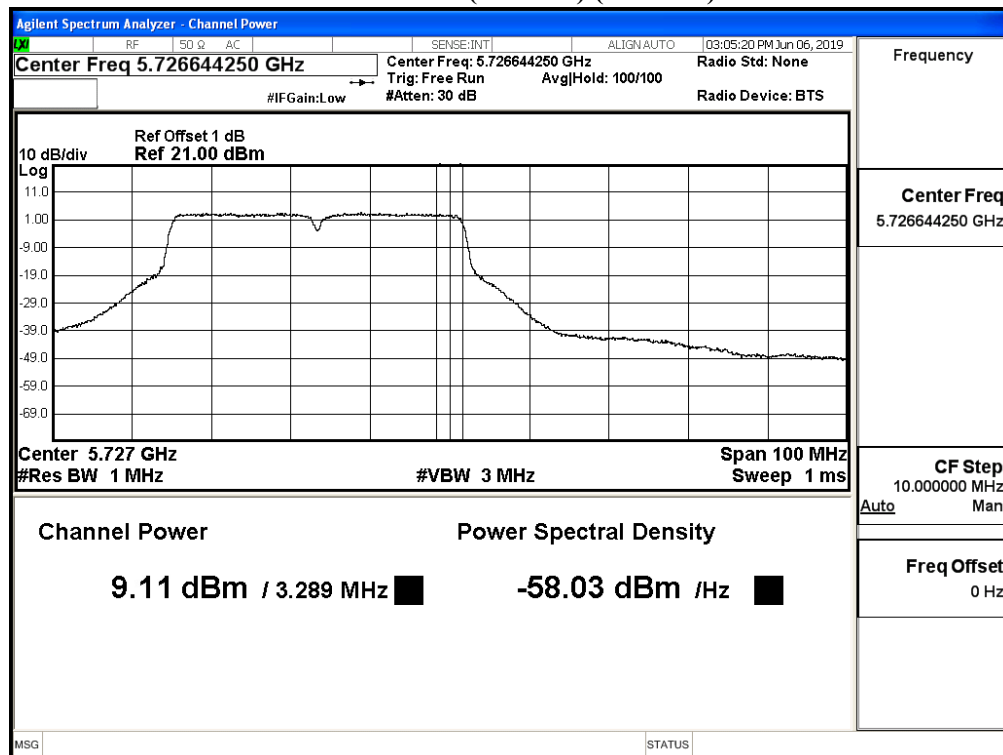

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Maximum conducted output power
 Test Date : 2019/06/11
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)

Chain A

Cable loss=1.0dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	1965	260	390	520	585	650	780	866.7
42	5210	14.39	14.23	14.05	13.87	13.72	13.62	13.53	13.42	13.27	13.20
58	5290	13.76	13.59	13.43	13.25	13.19	13.08	12.97	12.84	12.66	12.56
106	5530	17.18	--	--	--	--	--	--	--	--	--
122	5610	19.67	19.56	19.47	19.32	19.26	19.12	19.01	18.83	18.65	18.54
138 (U-NII-2C)	5690	19.85	19.75	19.69	19.55	19.41	19.23	19.12	19.05	18.99	18.85
138 (U-NII-3)	5690	3.73	3.7	3.62	3.35	3.17	3.08	2.9	2.82	2.69	2.52
155	5775	18.25	18.09	18.02	17.88	17.79	17.67	17.49	17.31	17.14	16.96

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=1.0dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	1965	260	390	520	585	650	780	866.7
42	5210	14.13	13.99	13.89	13.81	13.7	13.57	13.41	13.35	13.27	13.17
58	5290	13.33	13.17	13.07	12.90	12.83	12.77	12.68	12.53	12.45	12.30
106	5530	17.25	--	--	--	--	--	--	--	--	--
122	5610	19.83	19.77	19.7	19.58	19.42	19.28	19.21	19.03	18.94	18.84
138 (U-NII-2C)	5690	19.56	19.4	19.23	19.07	18.98	18.84	18.74	18.67	18.5	18.35
138 (U-NII-3)	5690	3.68	3.58	3.46	3.41	3.3	3.24	3.13	2.97	2.85	2.71
155	5775	17.88	17.76	17.65	17.52	17.46	17.33	17.21	17.12	17	16.88



Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
42	5210	--	14.39	14.13	17.27	24	--	Pass
58	5290	75.023	13.76	13.33	16.56	24	29.75	Pass
106	5530	75.084	17.18	17.25	20.23	24	29.76	Pass
122	5610	75.164	19.67	19.83	22.76	24	29.76	Pass
138 (U-NII-2C)	5690	72.617	19.85	19.56	22.72	24	29.61	Pass
138 (U-NII-3)	5690	--	3.73	3.68	6.72	30	--	Pass
155	5775	--	18.25	17.88	21.08	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

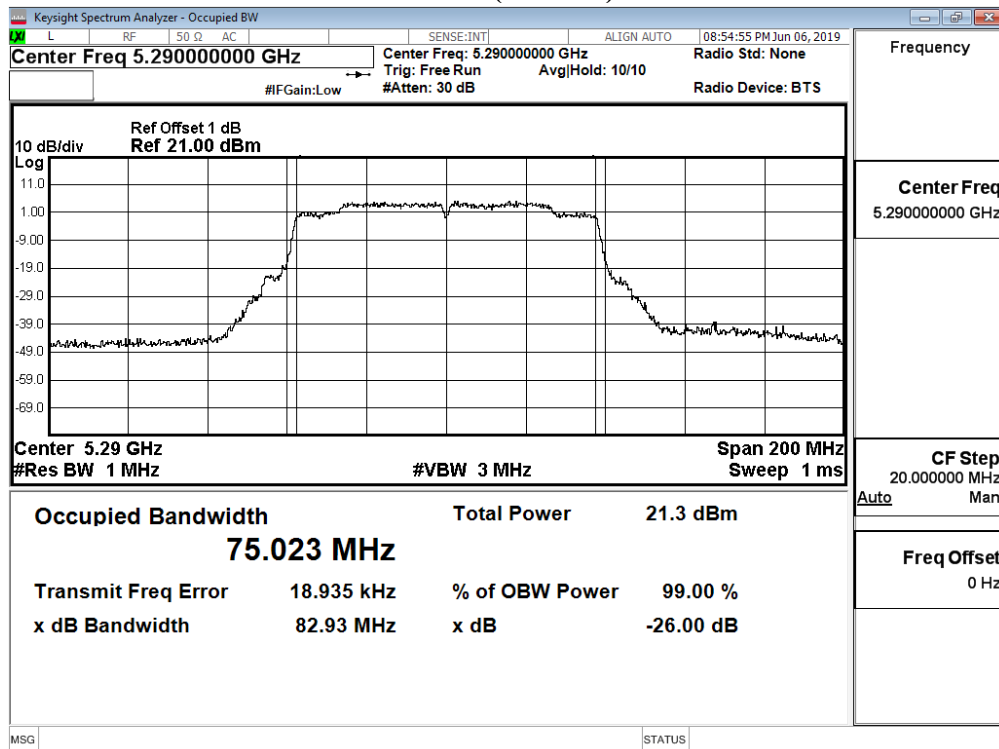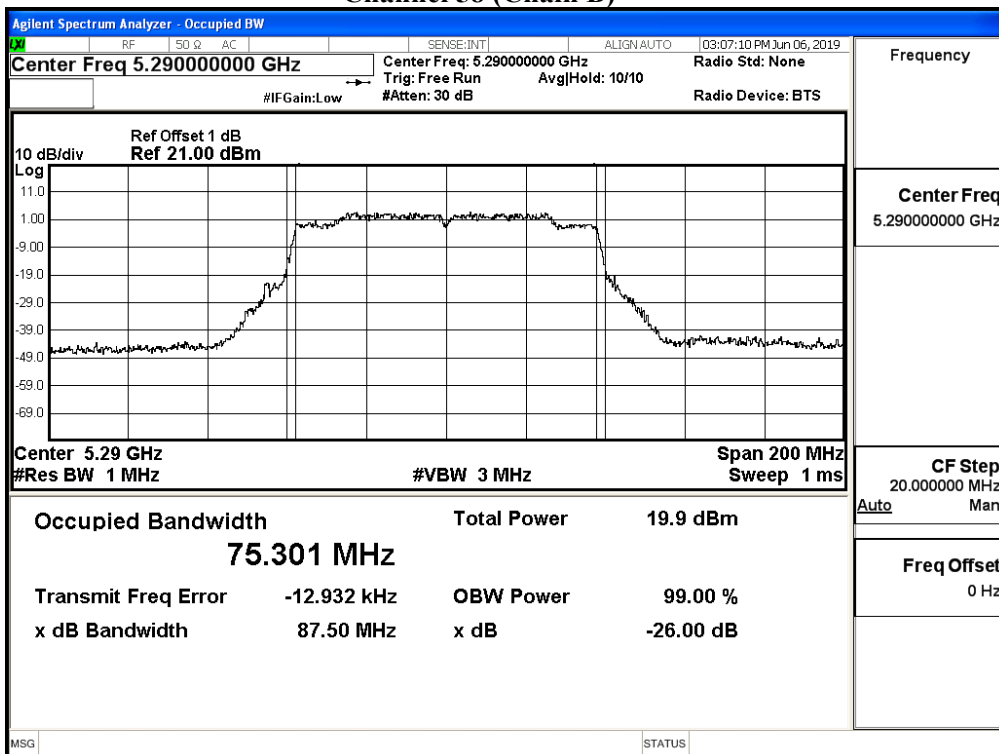99% Occupied Bandwidth:**Channel 58 (Chain A)****Channel 58 (Chain B)**

Channel 106 (Chain A)

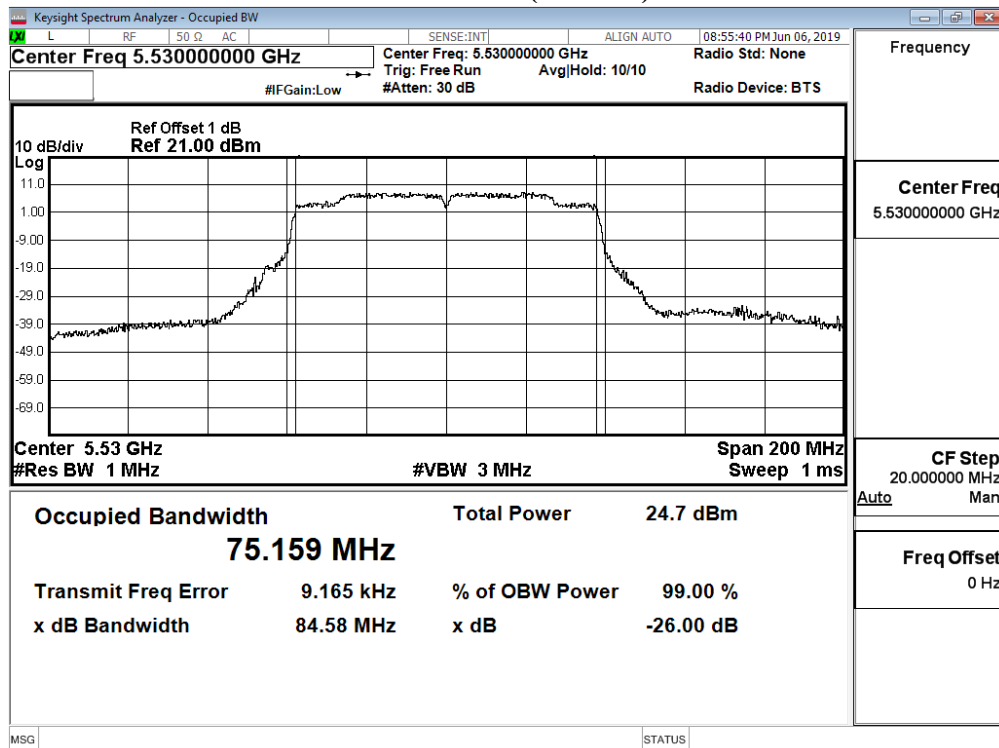

Channel 106 (Chain B)

