


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

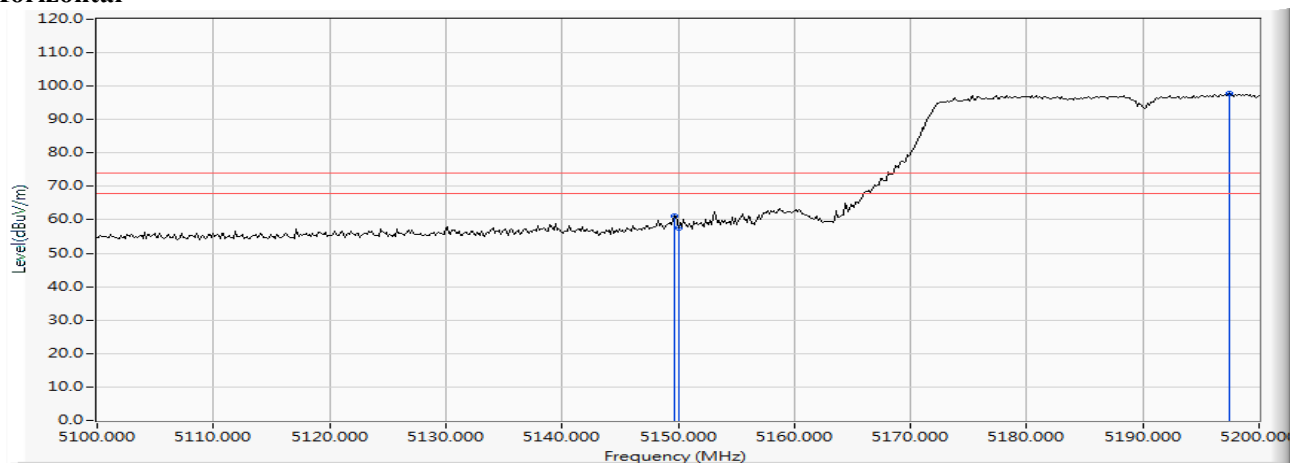


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.710	10.472	50.618	61.089	-12.911	74.000	PEAK
2		5150.000	10.470	47.170	57.641	-16.359	74.000	PEAK
3	*	5197.391	10.341	87.358	97.699	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

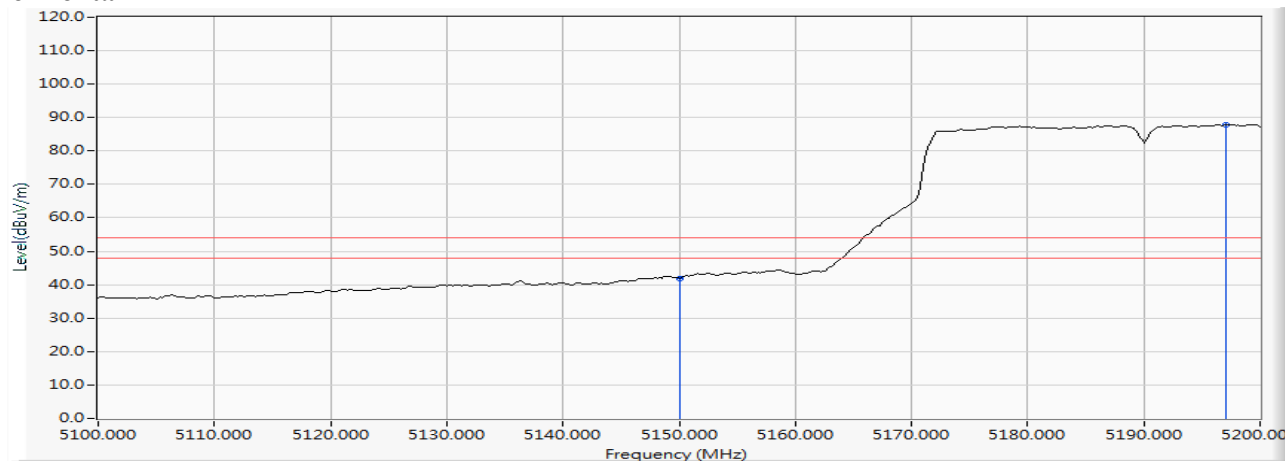


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	31.478	41.949	-12.051	54.000	AVERAGE
2	*	5197.101	10.342	77.588	87.930	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

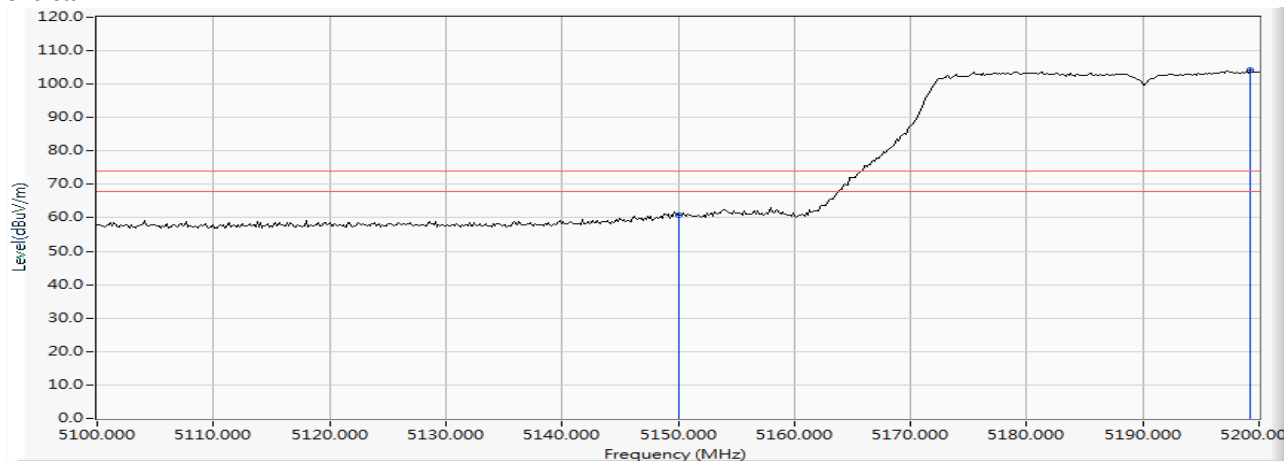


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	48.435	60.825	-13.175	74.000	PEAK
2	*	5199.275	12.564	91.527	104.091	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

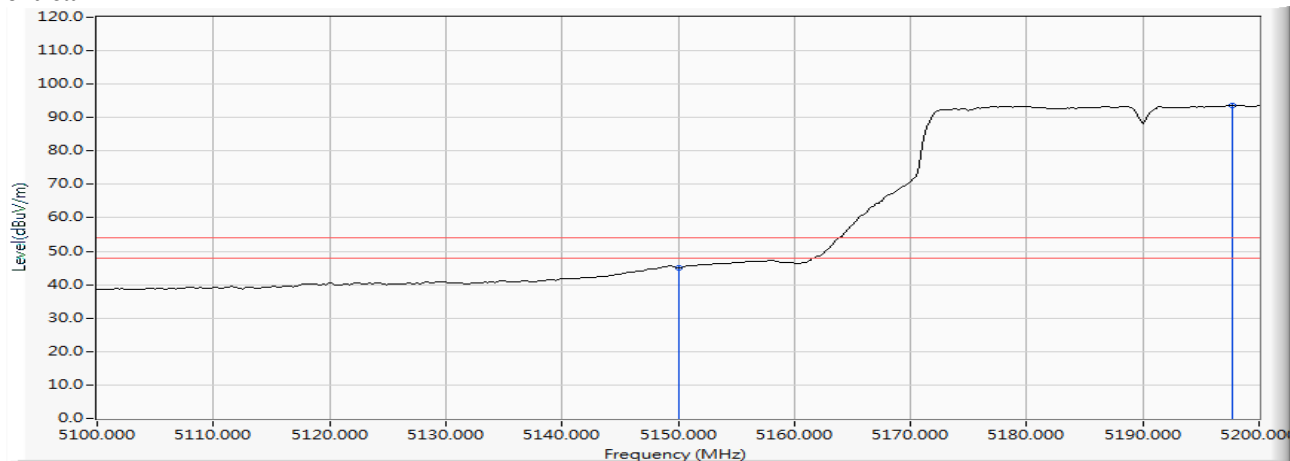


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	32.604	44.994	-9.006	54.000	AVERAGE
2	*	5197.681	12.558	81.059	93.617	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

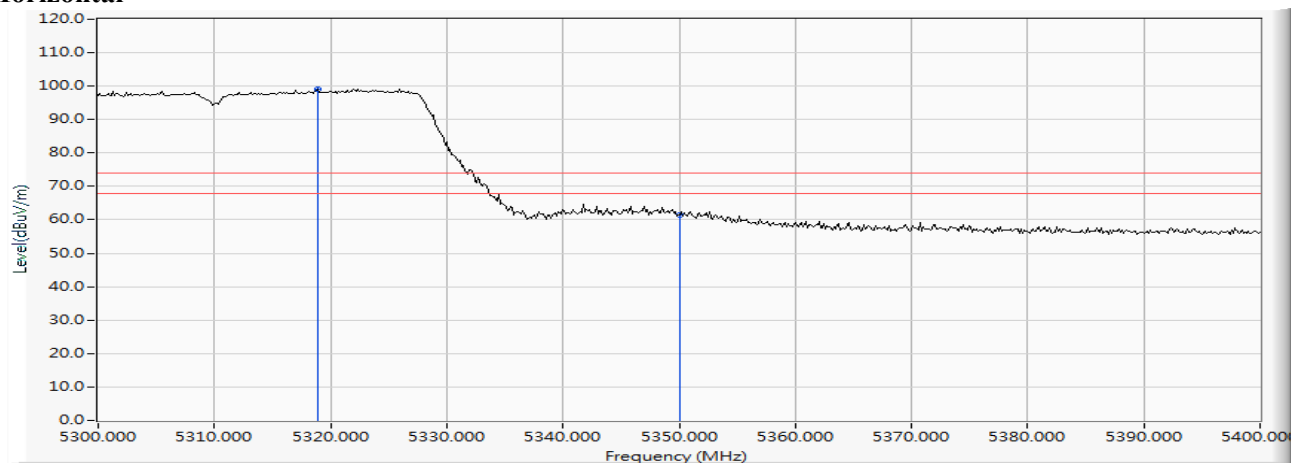


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5318.841	11.104	88.091	99.195	--	--	PEAK
2		5350.000	11.024	50.453	61.477	-12.523	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

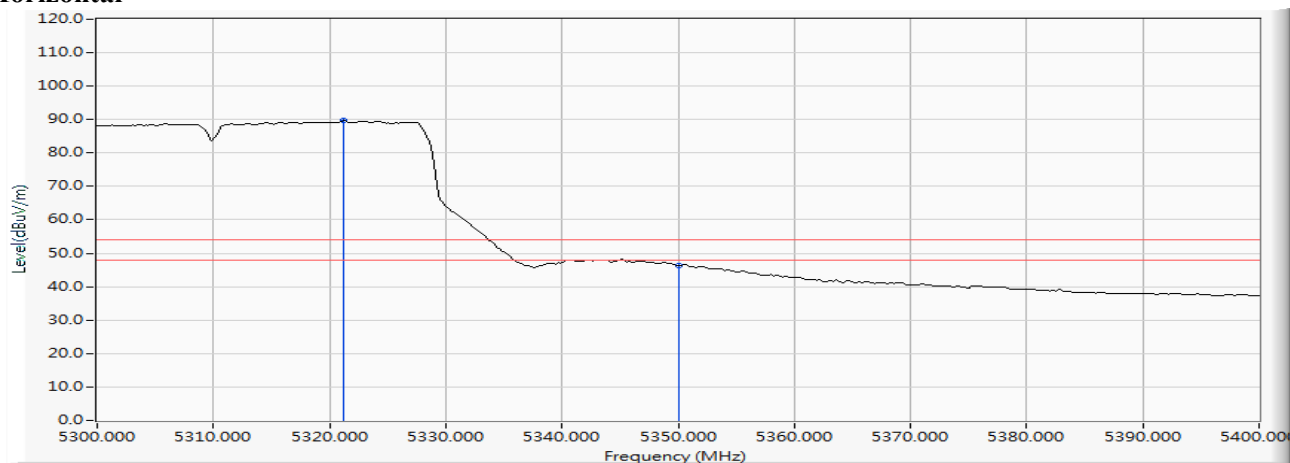


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5321.159	11.098	78.528	89.626	--	--	AVERAGE
2		5350.000	11.024	35.214	46.238	-7.762	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

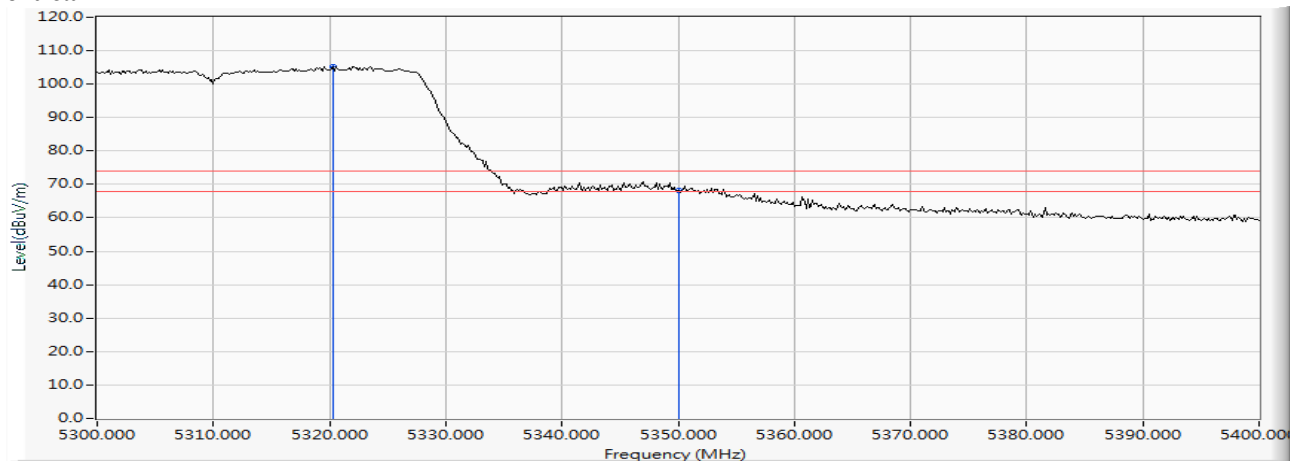
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5320.290	13.018	92.167	105.185	--	--	PEAK
2		5350.000	12.999	55.209	68.208	-5.792	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

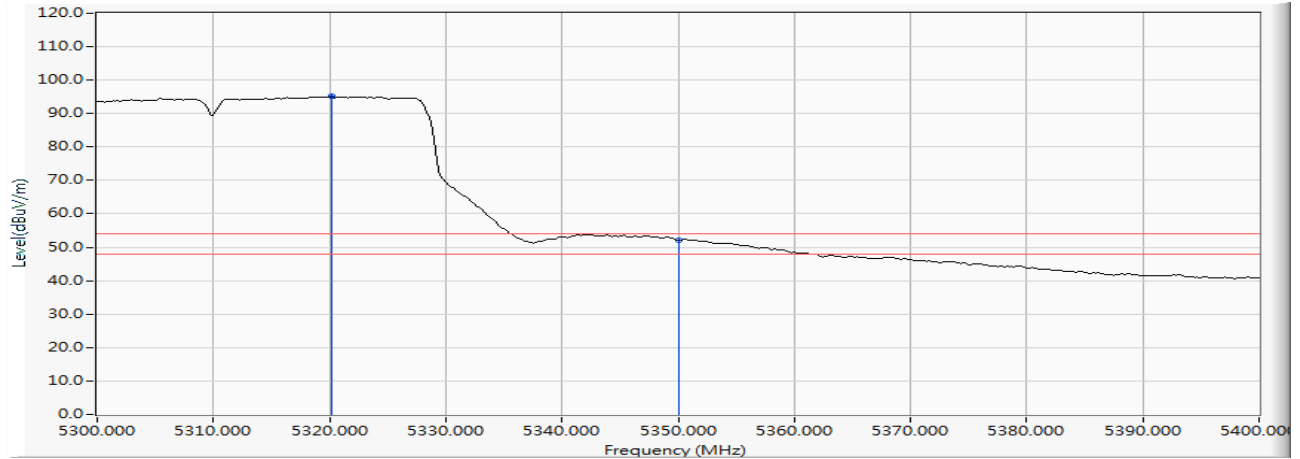Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5320.145	13.017	82.061	95.079	--	--	AVERAGE
2		5350.000	12.999	39.039	52.038	-1.962	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

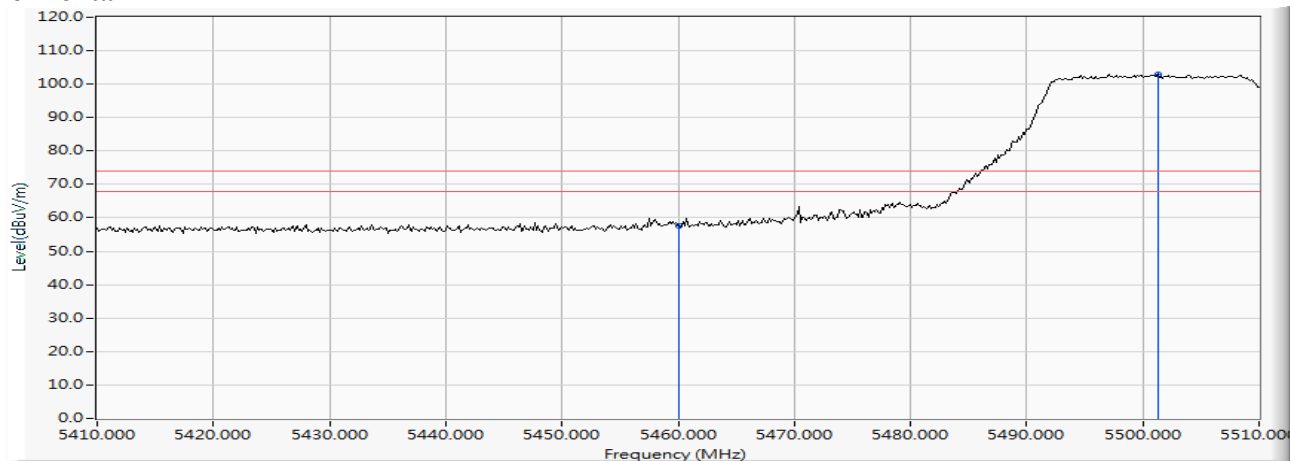


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	45.914	57.617	-16.383	74.000	PEAK
2	*	5501.304	12.178	90.887	103.065	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

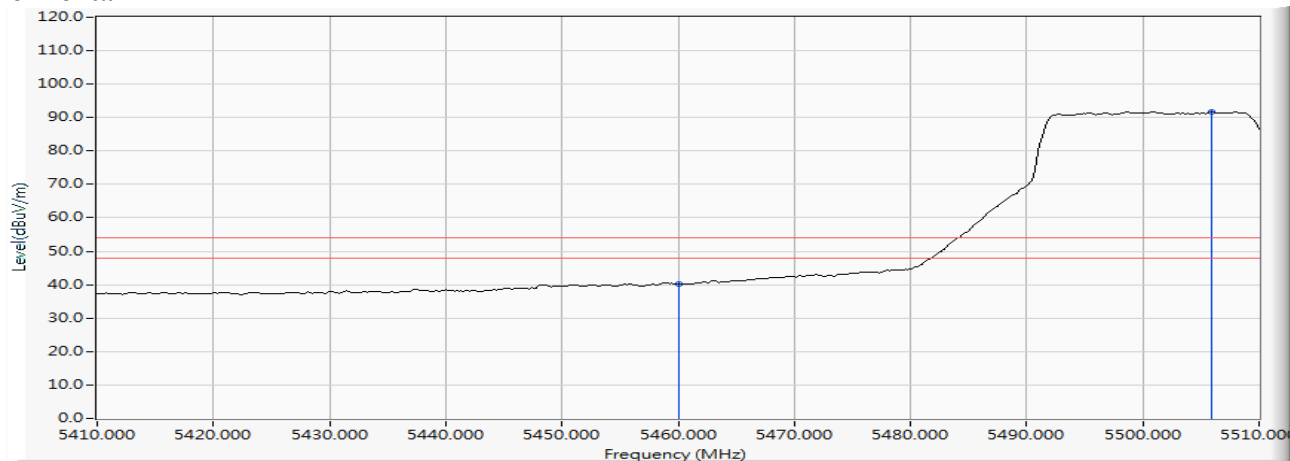


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	28.608	40.311	-13.689	54.000	AVERAGE
2	*	5505.942	12.196	79.617	91.813	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

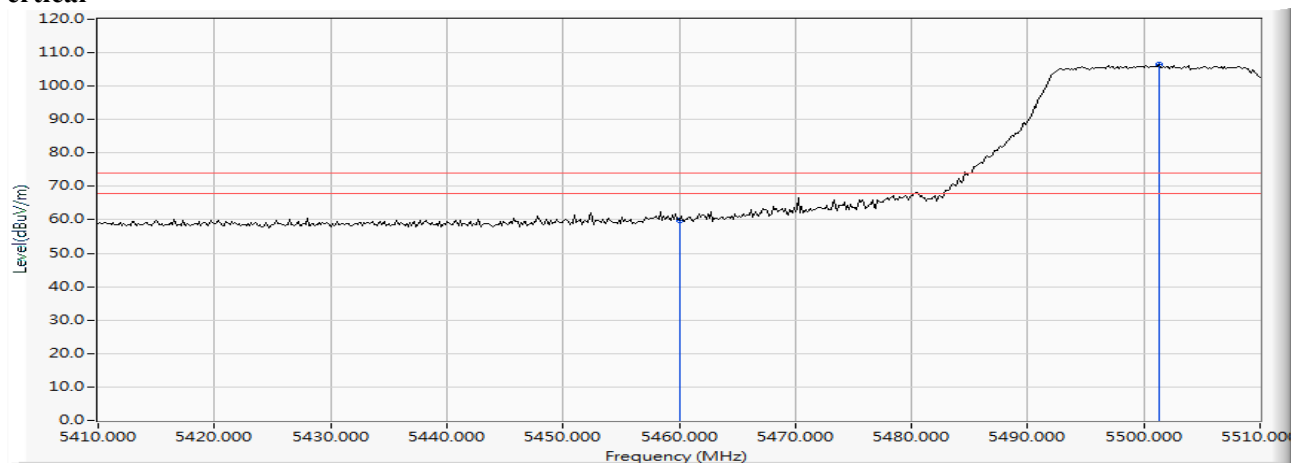
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	46.292	59.682	-14.318	74.000	PEAK
2	*	5501.304	13.633	92.903	106.536	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

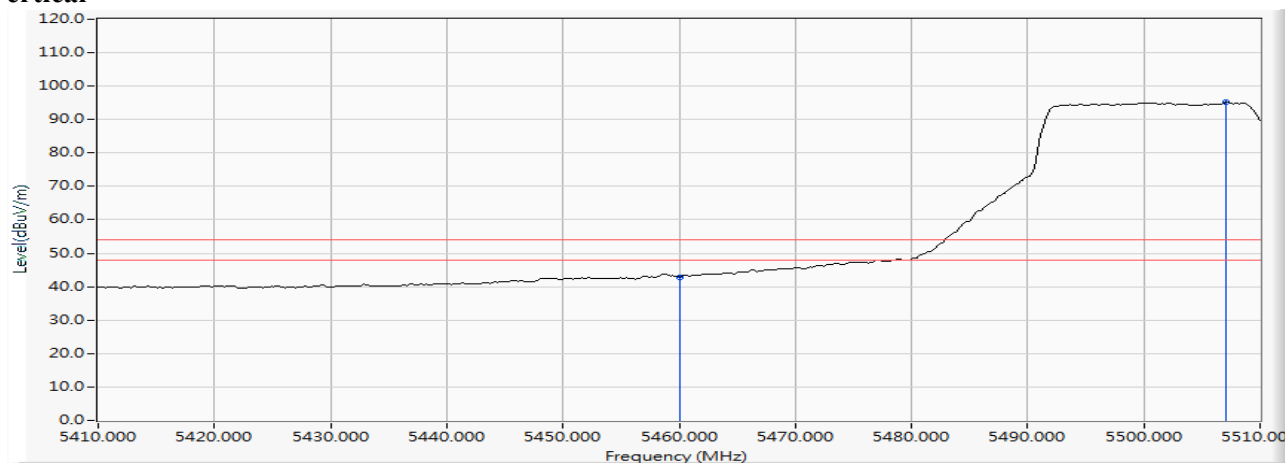Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	29.536	42.926	-11.074	54.000	AVERAGE
2	*	5507.101	13.631	81.463	95.094	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

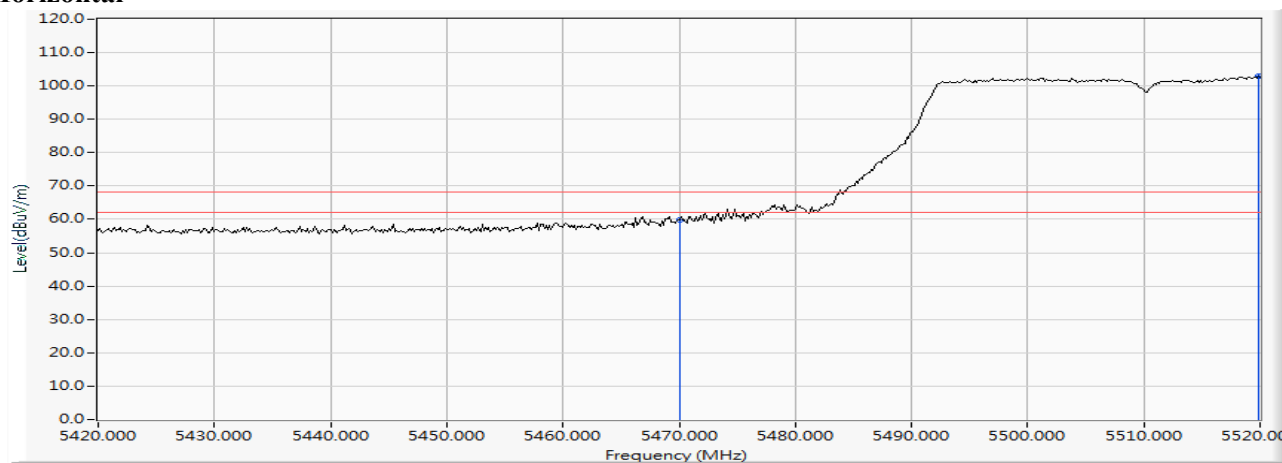

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	48.040	59.878	-8.342	68.220	PEAK
2	*	5519.855	12.083	90.730	102.814	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

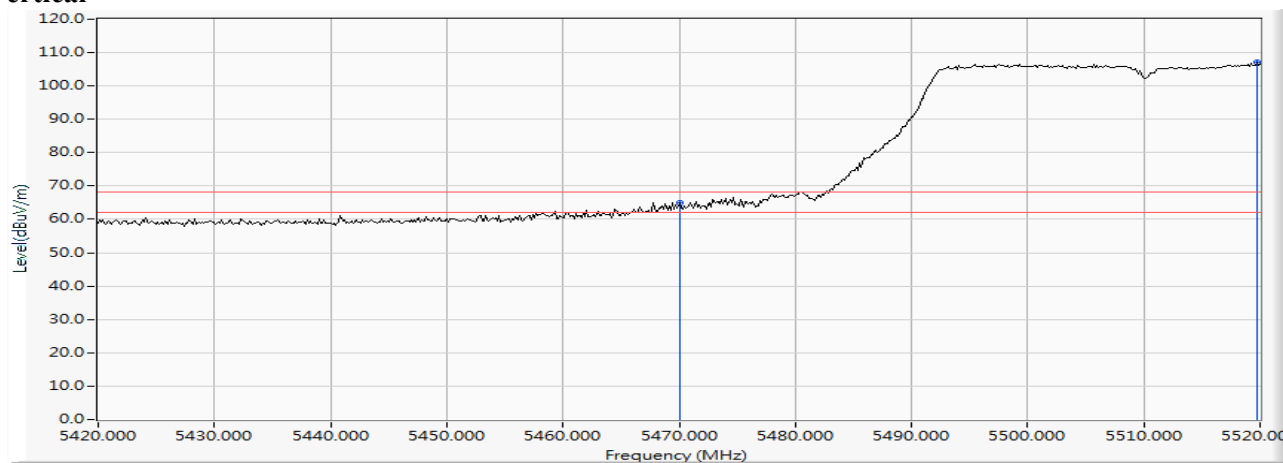Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	51.613	65.075	-3.145	68.220	PEAK
2	*	5519.710	13.550	93.455	107.005	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Horizontal

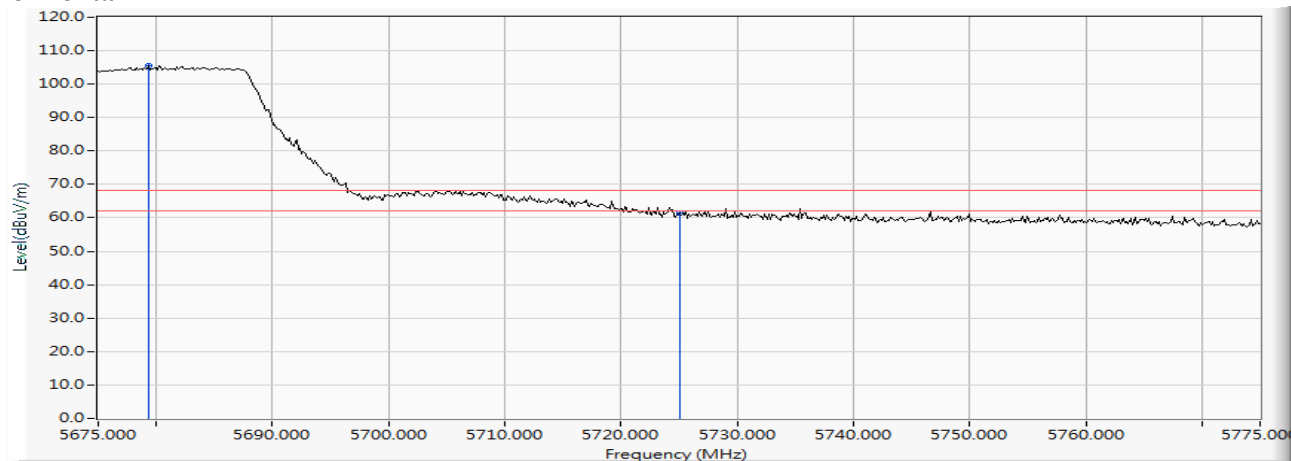

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5679.348	11.623	94.007	105.630	--	--	PEAK
2		5725.000	11.592	50.007	61.599	-6.621	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Vertical

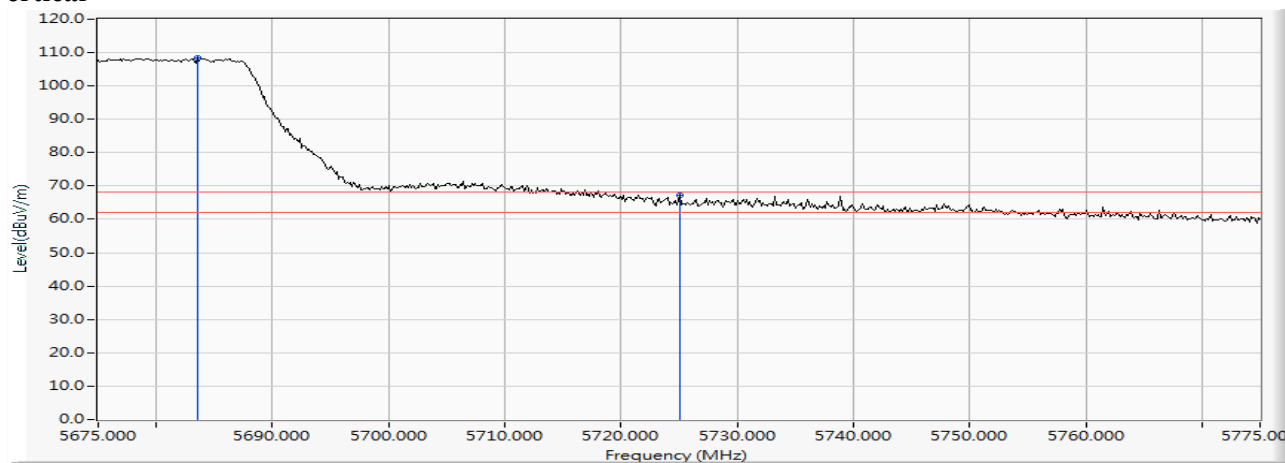

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5683.551	13.021	95.430	108.451	--	--	PEAK
2		5725.000	12.930	54.178	67.108	-1.112	68.220	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)

Horizontal

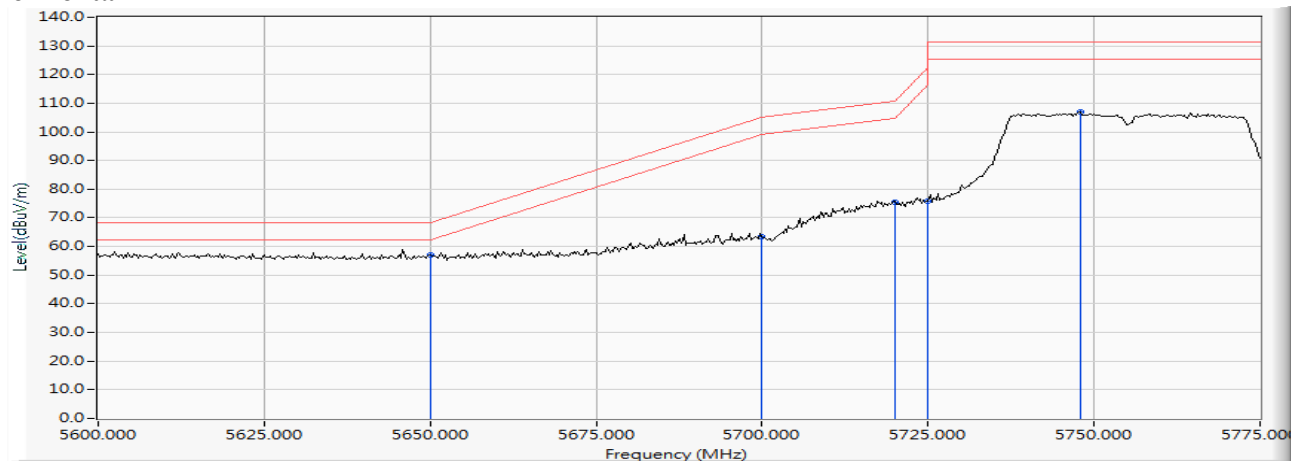

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	11.554	45.486	57.041	-11.179	68.220	PEAK
2		5700.000	11.647	51.757	63.404	-41.796	105.200	PEAK
3		5720.000	11.607	63.958	75.565	-35.235	110.800	PEAK
4		5725.000	11.592	64.349	75.941	-46.259	122.200	PEAK
5		5747.862	11.519	95.264	106.783	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)

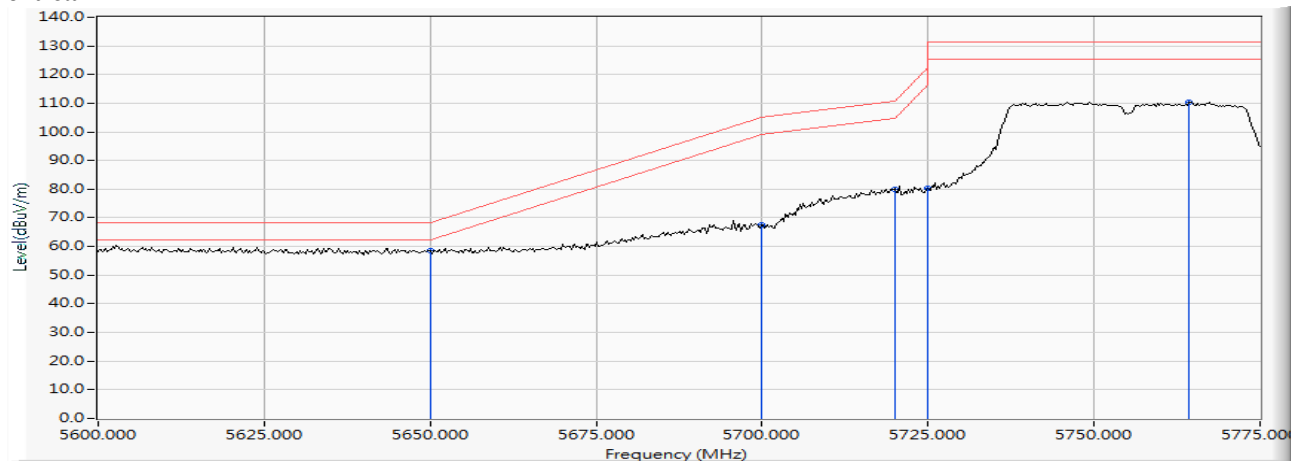Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	45.385	58.414	-9.806	68.220	PEAK
2		5700.000	13.003	54.451	67.454	-37.746	105.200	PEAK
3		5720.000	12.947	67.115	80.062	-30.738	110.800	PEAK
4		5725.000	12.930	67.337	80.267	-41.933	122.200	PEAK
5		5764.348	12.792	97.545	110.337	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)

Horizontal

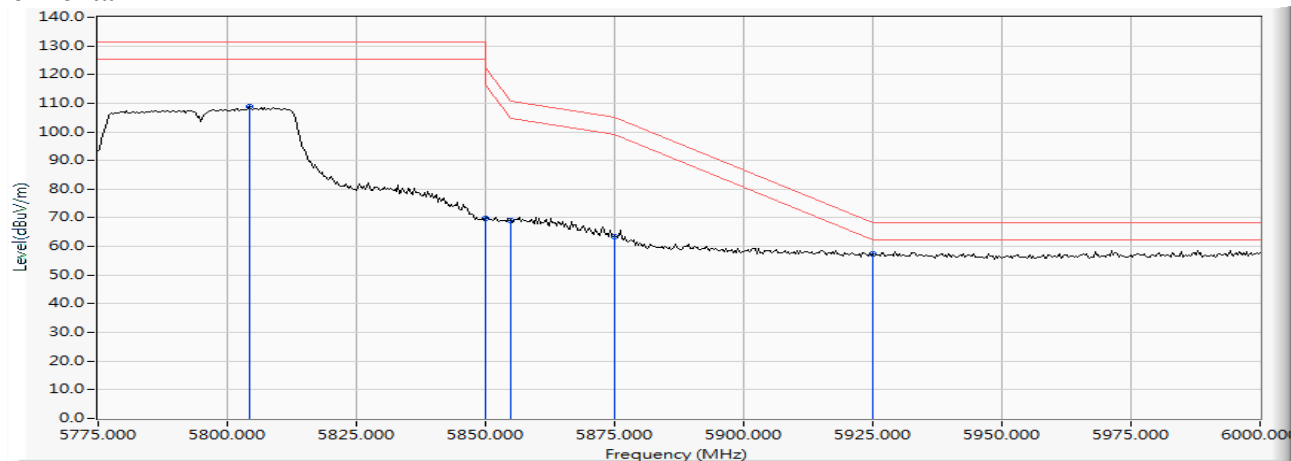

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5804.348	11.406	97.389	108.795	--	--	PEAK
2		5850.000	11.701	58.100	69.801	-52.399	122.200	PEAK
3		5855.000	11.735	57.283	69.018	-41.782	110.800	PEAK
4		5875.000	11.873	51.741	63.614	-41.586	105.200	PEAK
5	*	5925.000	12.068	45.477	57.546	-10.674	68.220	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)

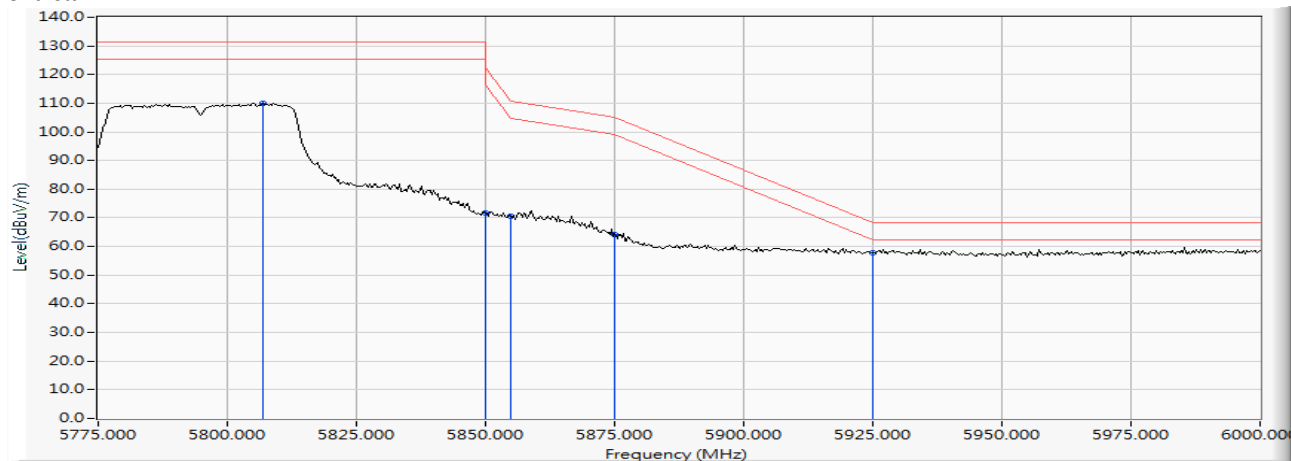Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5806.957	12.690	97.240	109.930	--	--	PEAK
2		5850.000	12.774	58.945	71.719	-50.481	122.200	PEAK
3		5855.000	12.784	57.596	70.380	-40.420	110.800	PEAK
4		5875.000	12.825	51.411	64.236	-40.964	105.200	PEAK
5	*	5925.000	12.911	44.783	57.694	-10.526	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

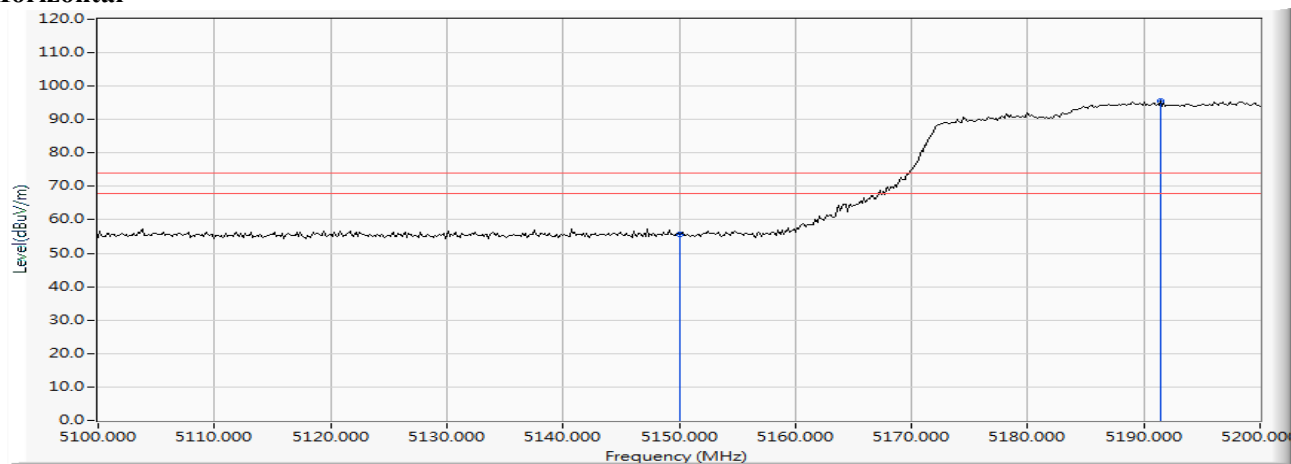


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	45.253	55.724	-18.276	74.000	PEAK
2	*	5191.449	10.361	85.057	95.419	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

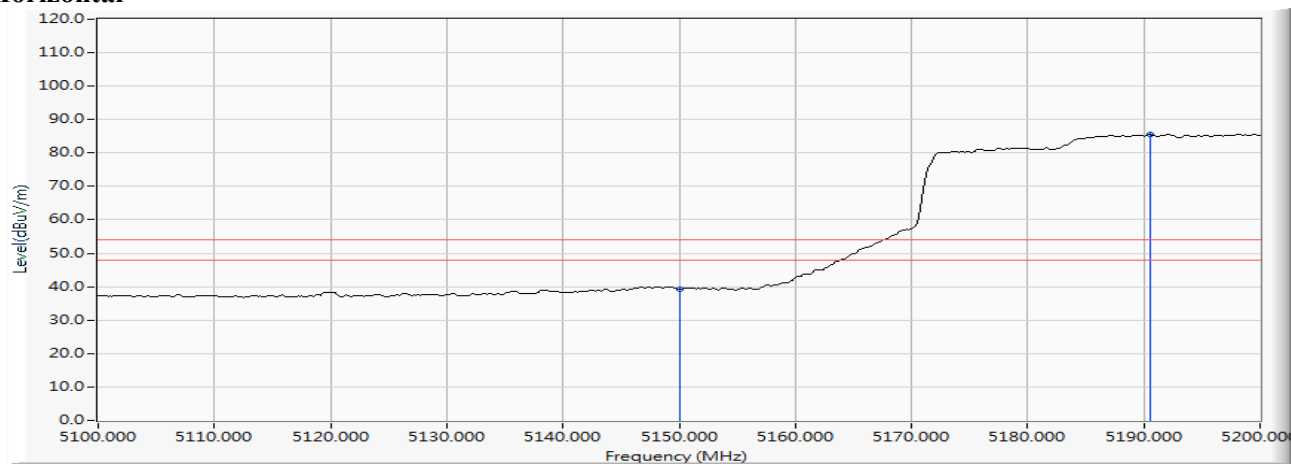


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	28.730	39.201	-14.799	54.000	AVERAGE
2	*	5190.580	10.365	75.198	85.563	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

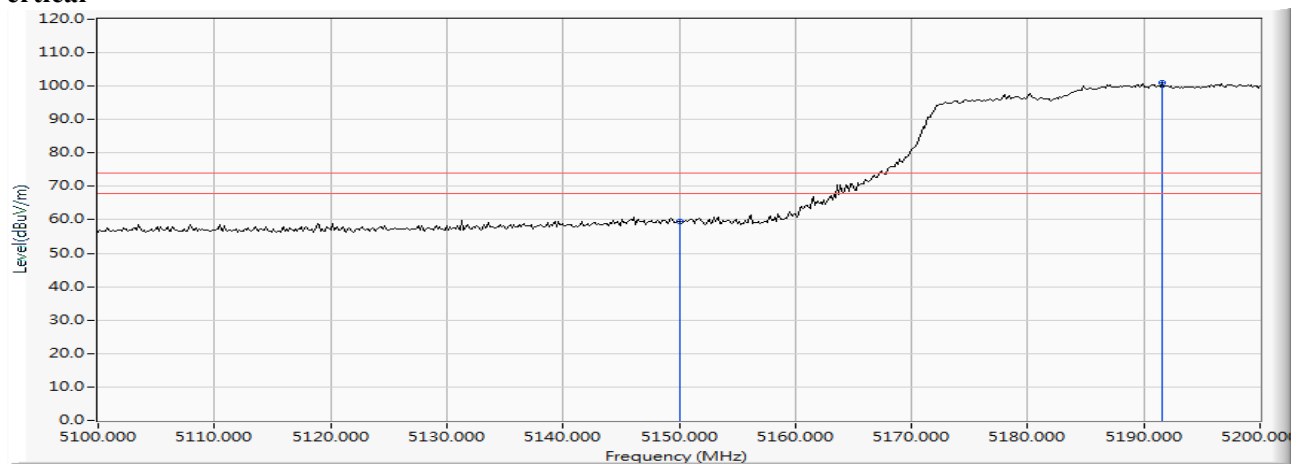
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	47.112	59.502	-14.498	74.000	PEAK
2	*	5191.594	12.542	88.412	100.953	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

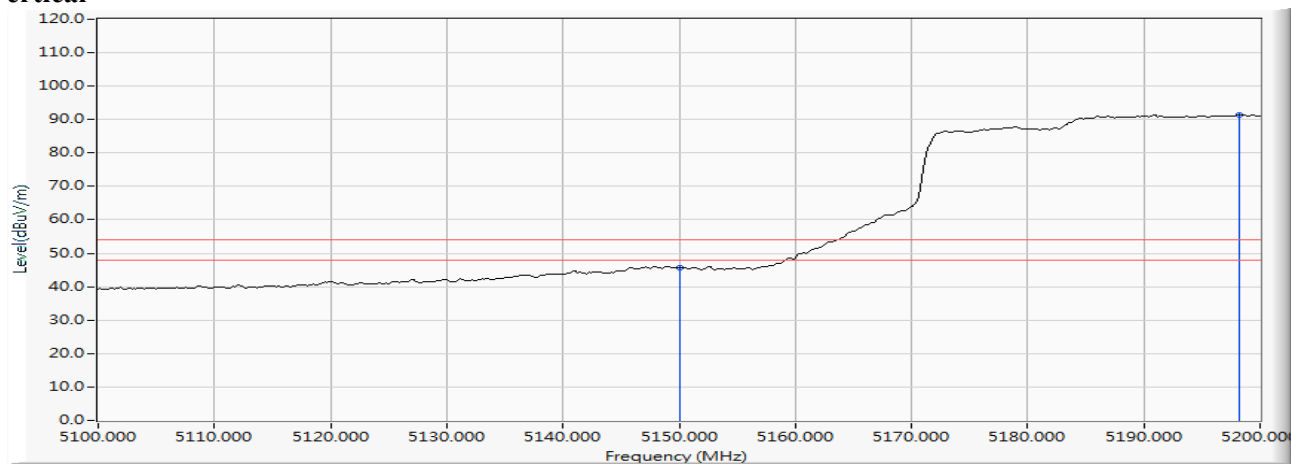Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	33.252	45.642	-8.358	54.000	AVERAGE
2	*	5198.261	12.560	78.756	91.316	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

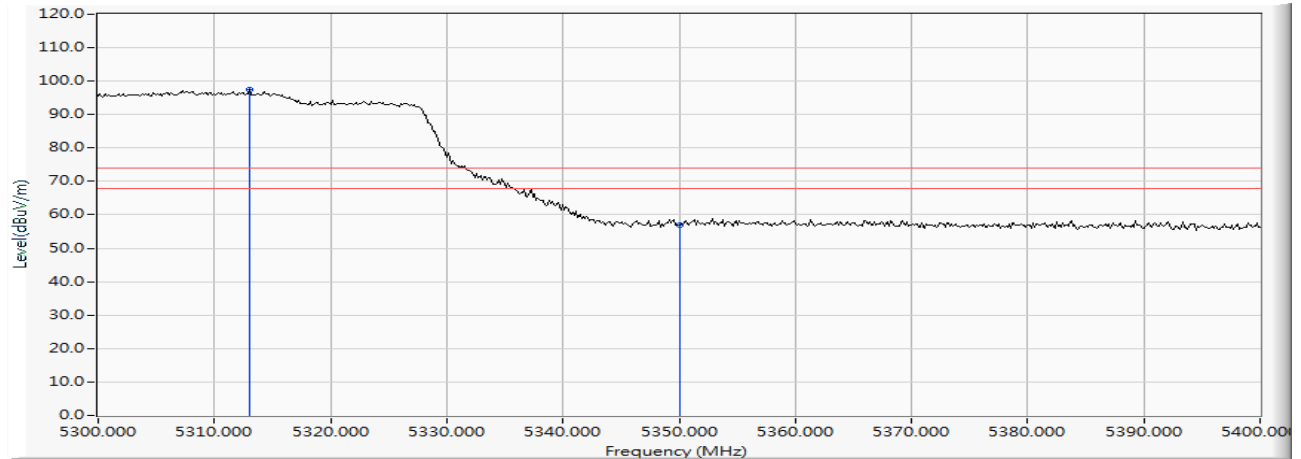


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.043	11.119	86.343	97.461	--	--	PEAK
2		5350.000	11.024	46.027	57.051	-16.949	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

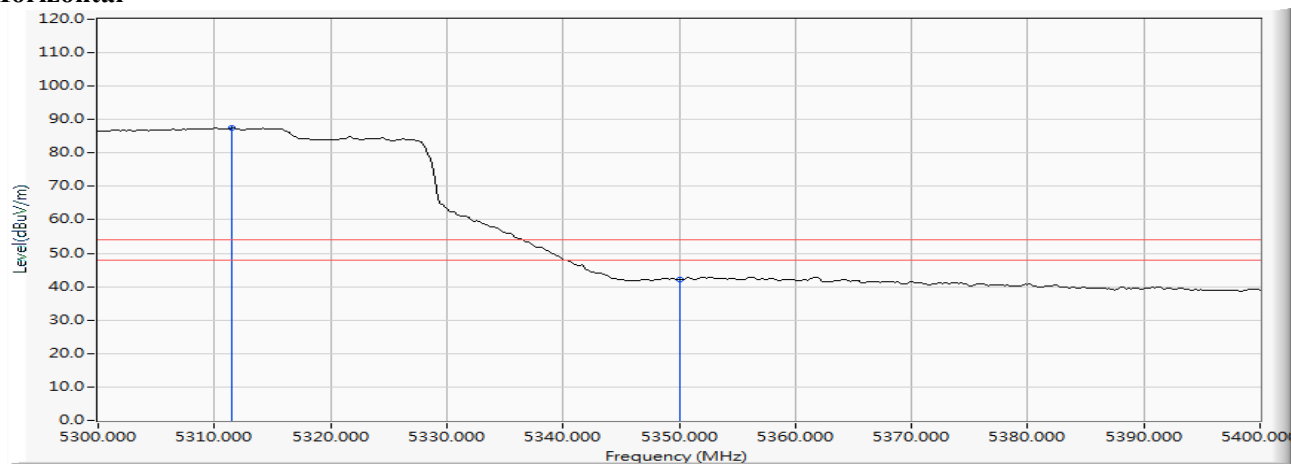


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5311.449	11.123	76.391	87.513	--	--	AVERAGE
2		5350.000	11.024	31.067	42.091	-11.909	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

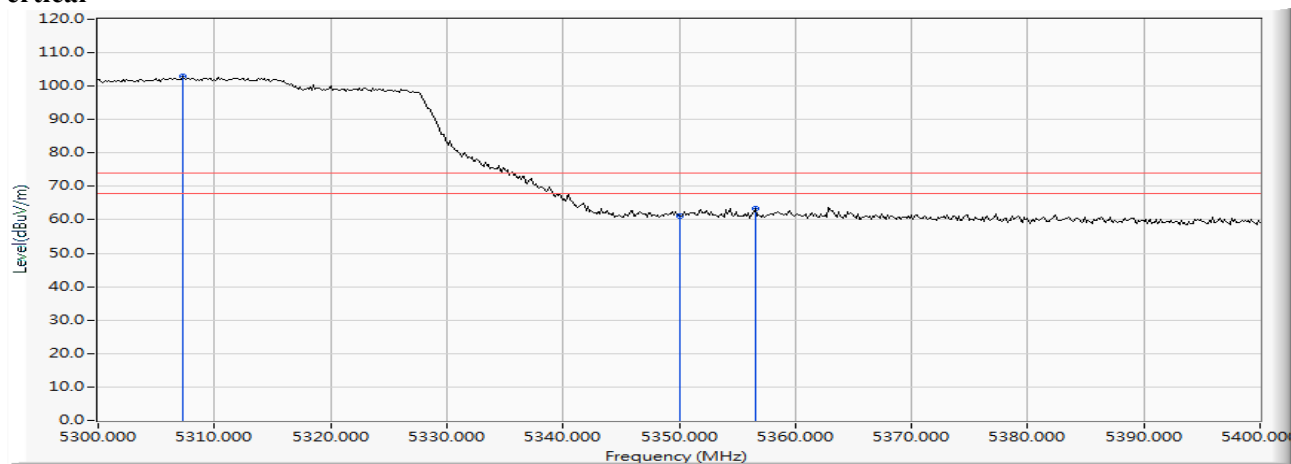
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5307.246	13.026	89.956	102.982	--	--	PEAK
2		5350.000	12.999	48.069	61.068	-12.932	74.000	PEAK
3		5356.522	12.994	50.401	63.396	-10.604	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

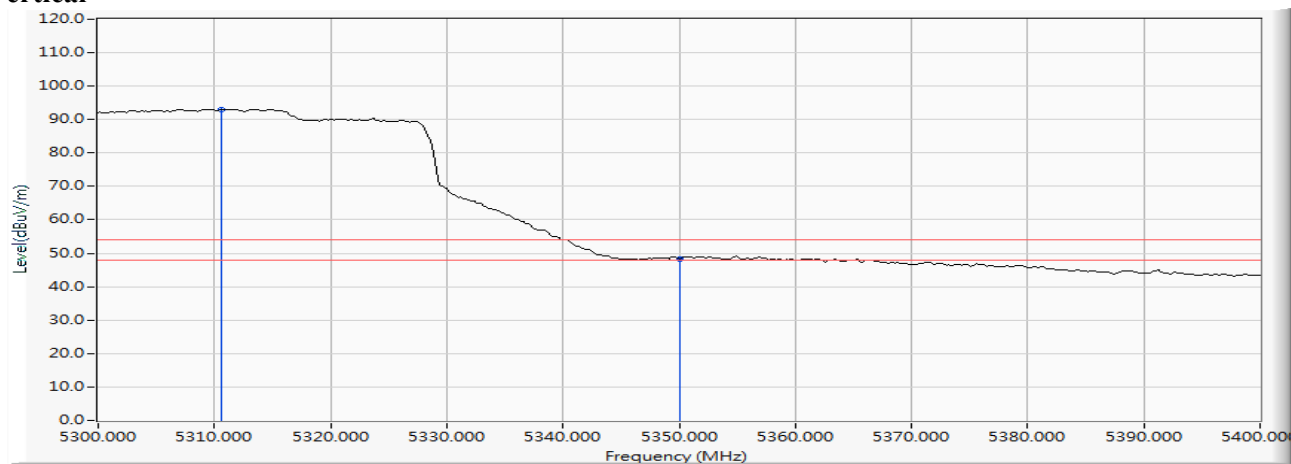Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5310.580	13.023	80.037	93.060	--	--	AVERAGE
2		5350.000	12.999	35.383	48.382	-5.618	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

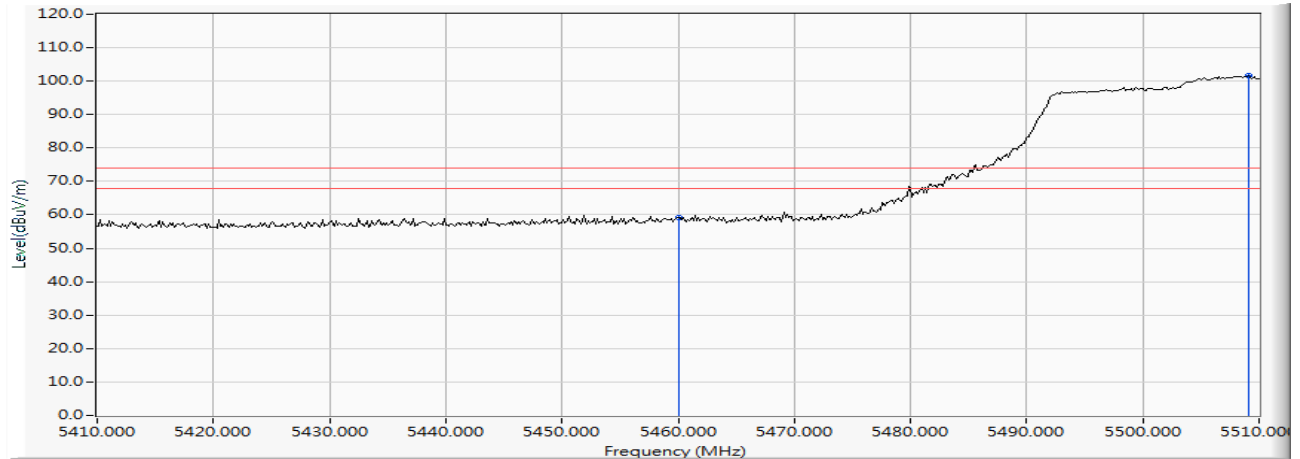


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	47.502	59.205	-14.795	74.000	PEAK
2	*	5509.130	12.170	89.481	101.651	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

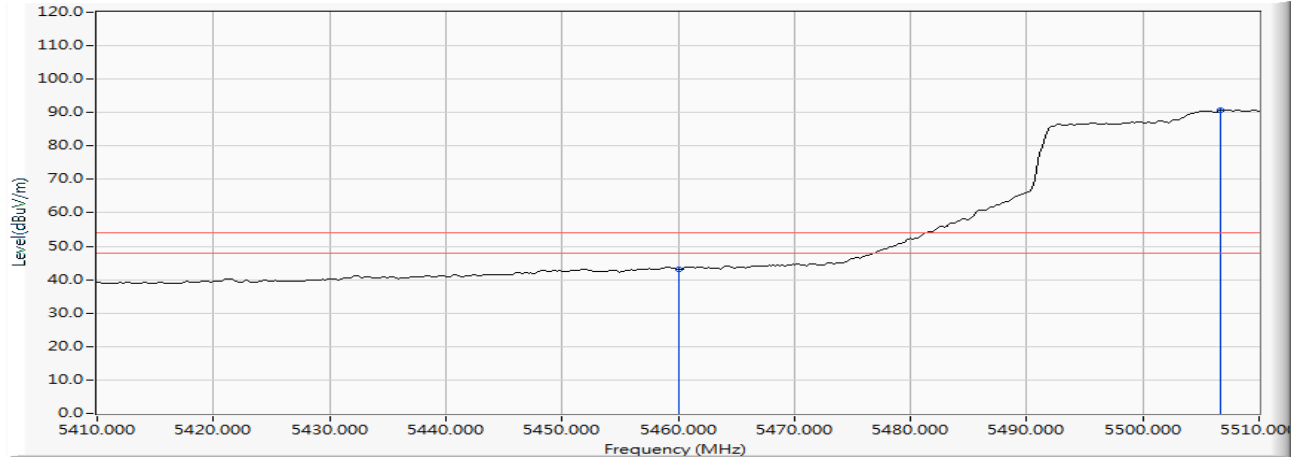


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	31.376	43.079	-10.921	54.000	AVERAGE
2	*	5506.667	12.190	78.549	90.739	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

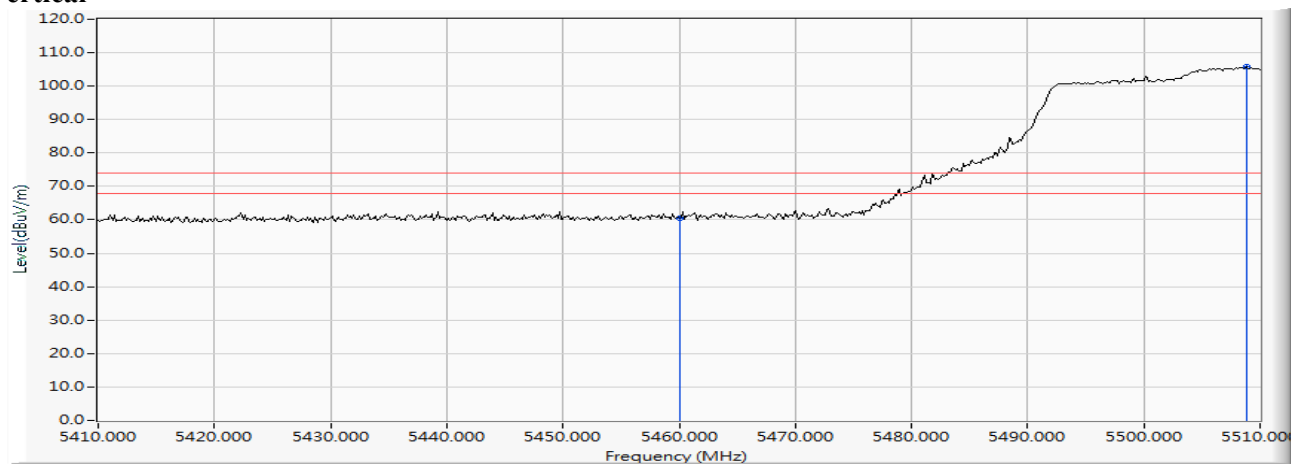


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	47.054	60.444	-13.556	74.000	PEAK
2	*	5508.841	13.619	92.086	105.706	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

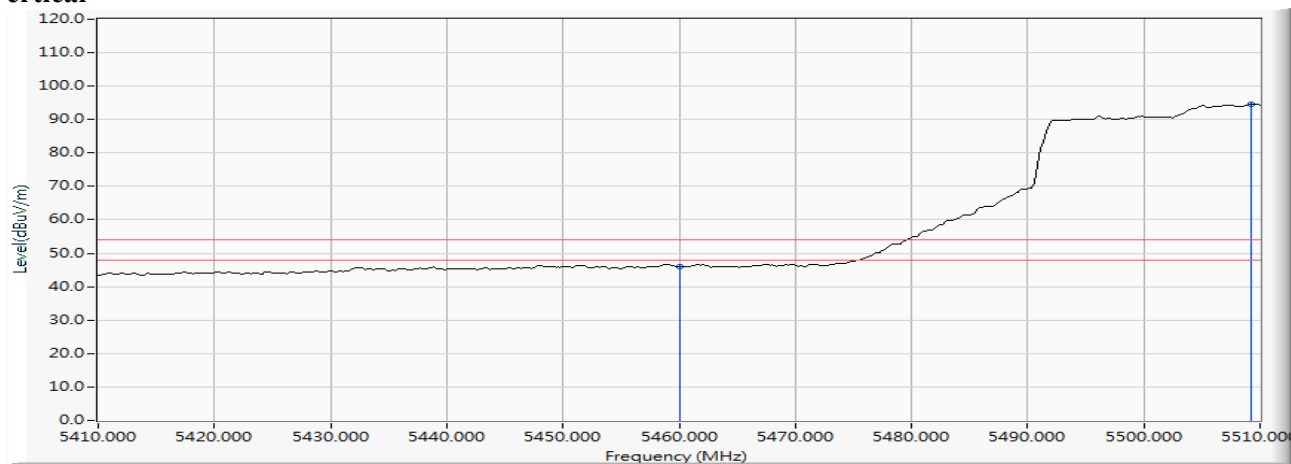Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	32.531	45.921	-8.079	54.000	AVERAGE
2	*	5509.275	13.617	80.954	94.571	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

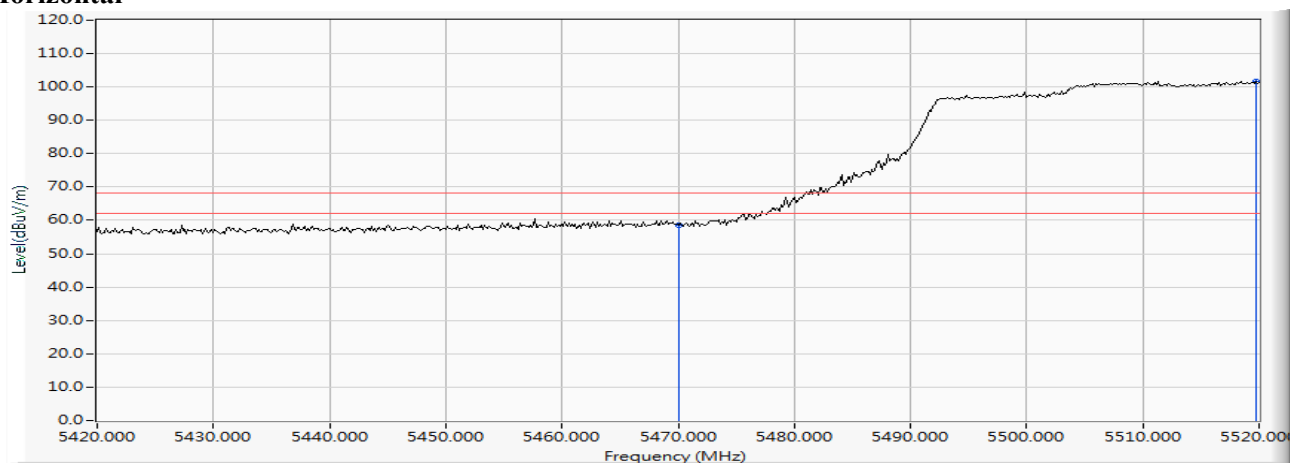

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	46.784	58.622	-9.598	68.220	PEAK
2	*	5519.710	12.085	89.662	101.747	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

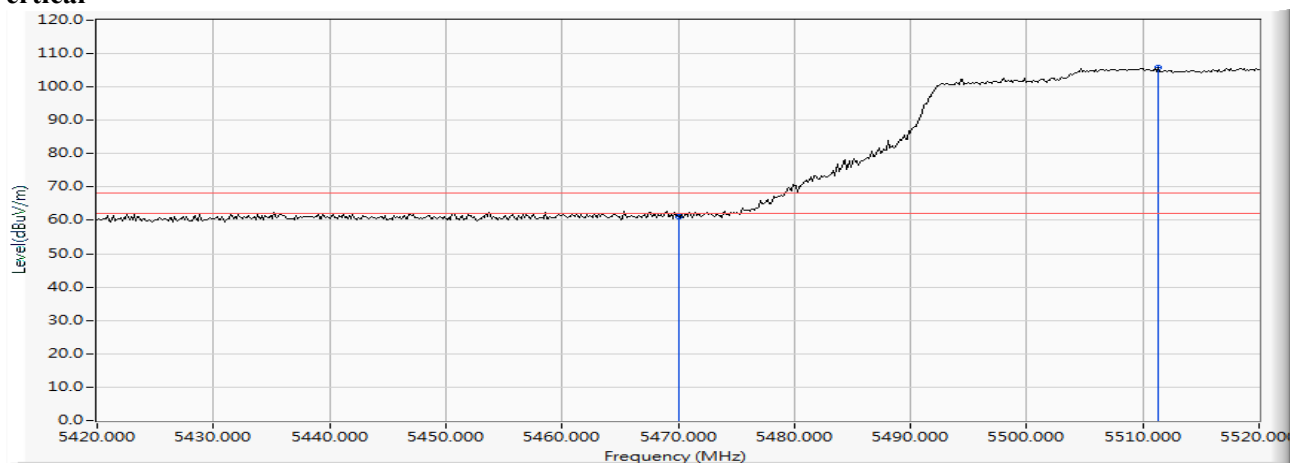Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	47.771	61.233	-6.987	68.220	PEAK
2	*	5511.304	13.604	92.302	105.906	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)

Horizontal

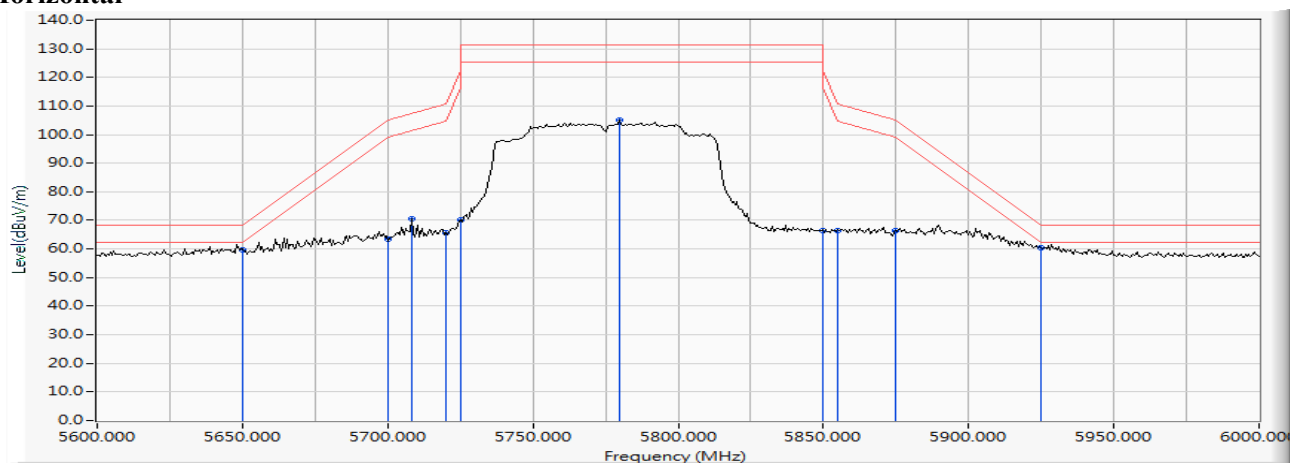

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5650.000	11.554	48.257	59.812	-8.408	68.220	PEAK
2		5700.000	11.647	51.927	63.574	-41.626	105.200	PEAK
3		5708.406	11.641	58.787	70.428	-37.126	107.554	PEAK
4		5720.000	11.607	54.146	65.753	-45.047	110.800	PEAK
5		5725.000	11.592	58.554	70.146	-52.054	122.200	PEAK
6		5779.710	11.419	93.689	105.107	--	--	PEAK
7		5850.000	11.701	54.816	66.517	-55.683	122.200	PEAK
8		5855.000	11.735	54.855	66.590	-44.210	110.800	PEAK
9		5875.000	11.873	54.507	66.380	-38.820	105.200	PEAK
10	*	5925.000	12.068	48.198	60.267	-7.953	68.220	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)

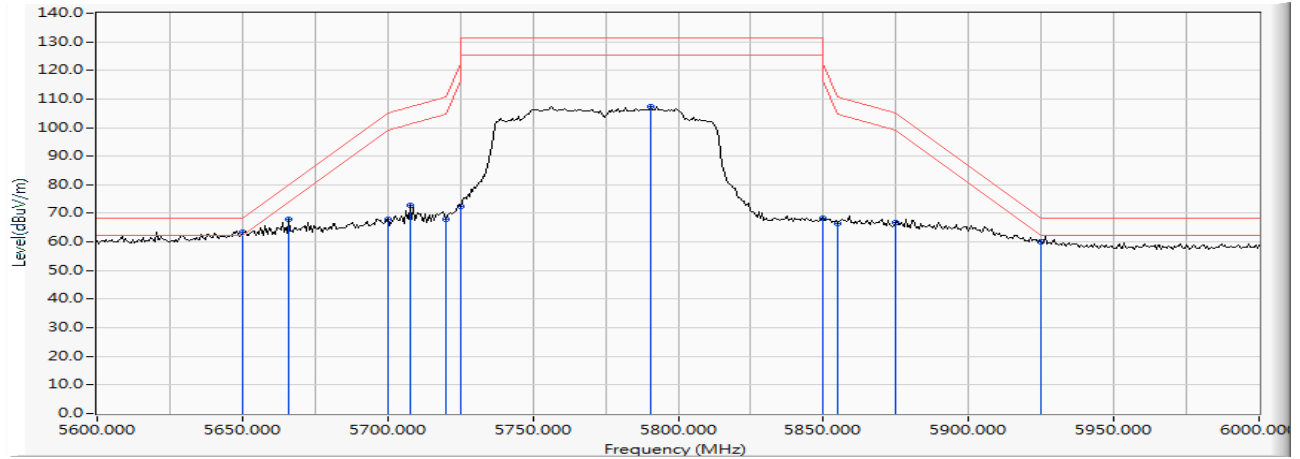Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	50.255	63.284	-4.936	68.220	PEAK
2		5666.087	13.026	55.005	68.031	-12.087	80.118	PEAK
3		5700.000	13.003	54.757	67.760	-37.440	105.200	PEAK
4		5707.826	12.988	59.876	72.863	-34.528	107.391	PEAK
5		5720.000	12.947	54.823	67.770	-43.030	110.800	PEAK
6		5725.000	12.930	59.493	72.423	-49.777	122.200	PEAK
7		5790.725	12.700	94.730	107.430	--	--	PEAK
8		5850.000	12.774	55.685	68.459	-53.741	122.200	PEAK
9		5855.000	12.784	53.825	66.609	-44.191	110.800	PEAK
10		5875.000	12.825	54.049	66.874	-38.326	105.200	PEAK
11		5925.000	12.911	47.153	60.064	-8.156	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

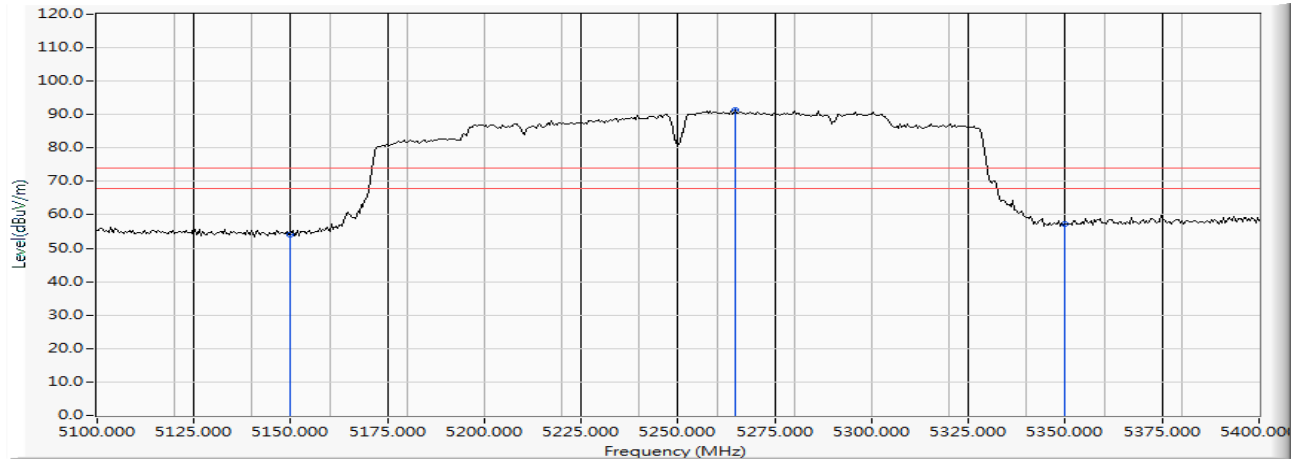


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	43.609	54.080	-19.920	74.000	PEAK
2	*	5264.783	10.866	80.403	91.269	--	--	PEAK
3		5350.000	11.024	46.146	57.170	-16.830	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

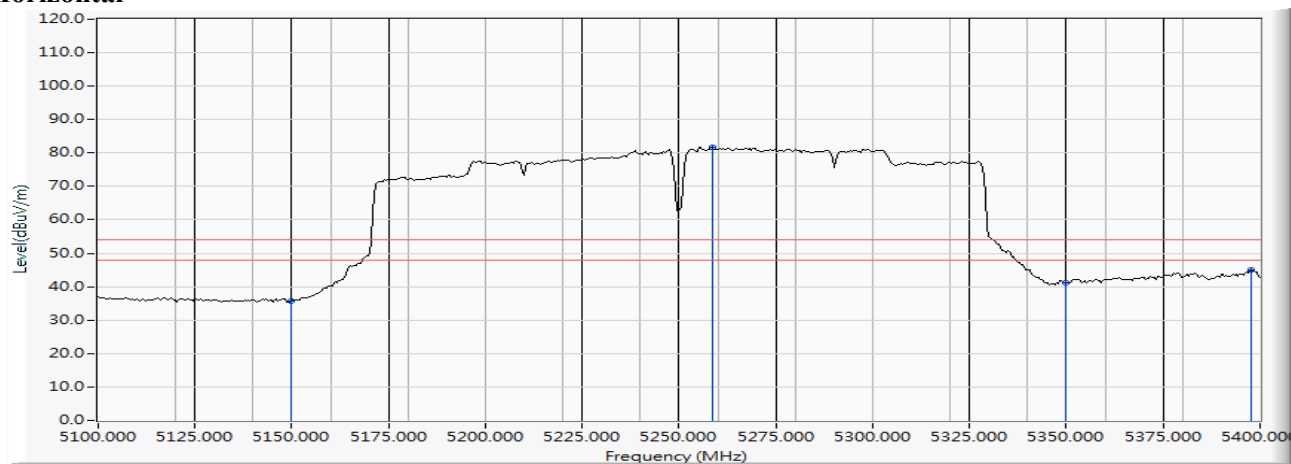


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	25.239	35.710	-18.290	54.000	AVERAGE
2	*	5258.696	10.818	70.962	81.780	--	--	AVERAGE
3		5350.000	11.024	30.239	41.263	-12.737	54.000	AVERAGE
4		5397.826	10.934	34.013	44.946	-9.054	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

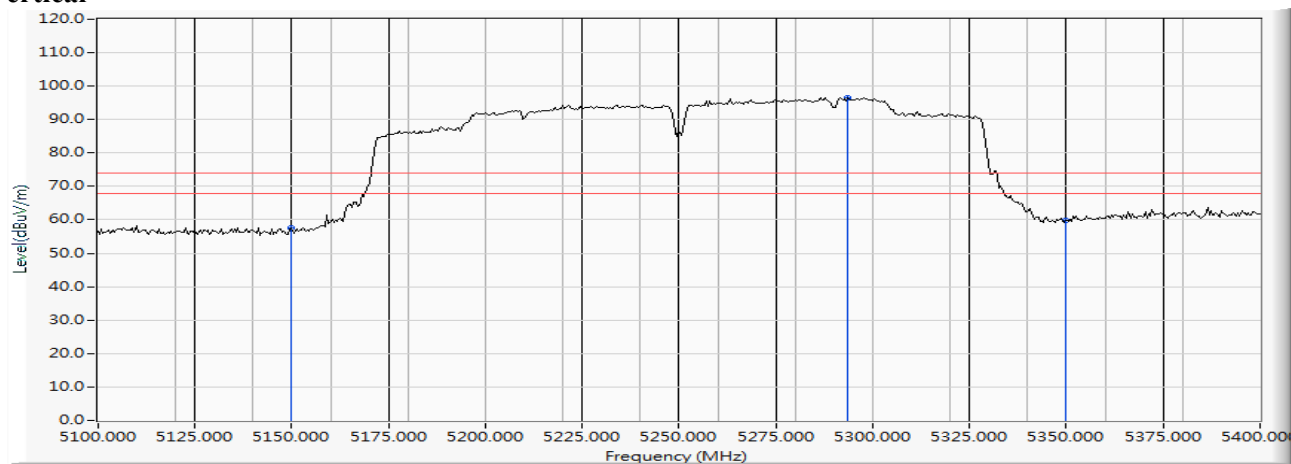
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	45.204	57.594	-16.406	74.000	PEAK
2	*	5293.478	12.998	83.642	96.640	--	--	PEAK
3		5350.000	12.999	46.945	59.944	-14.056	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

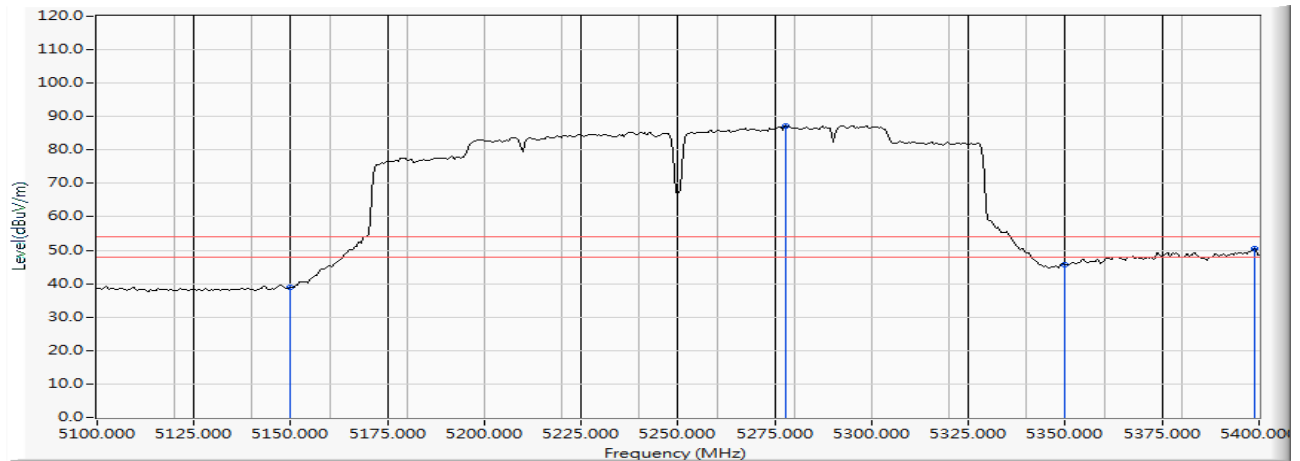Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	26.539	38.929	-15.071	54.000	AVERAGE
2	*	5277.826	12.930	74.407	87.337	--	--	AVERAGE
3		5350.000	12.999	32.758	45.757	-8.243	54.000	AVERAGE
4		5398.696	12.984	37.509	50.493	-3.507	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

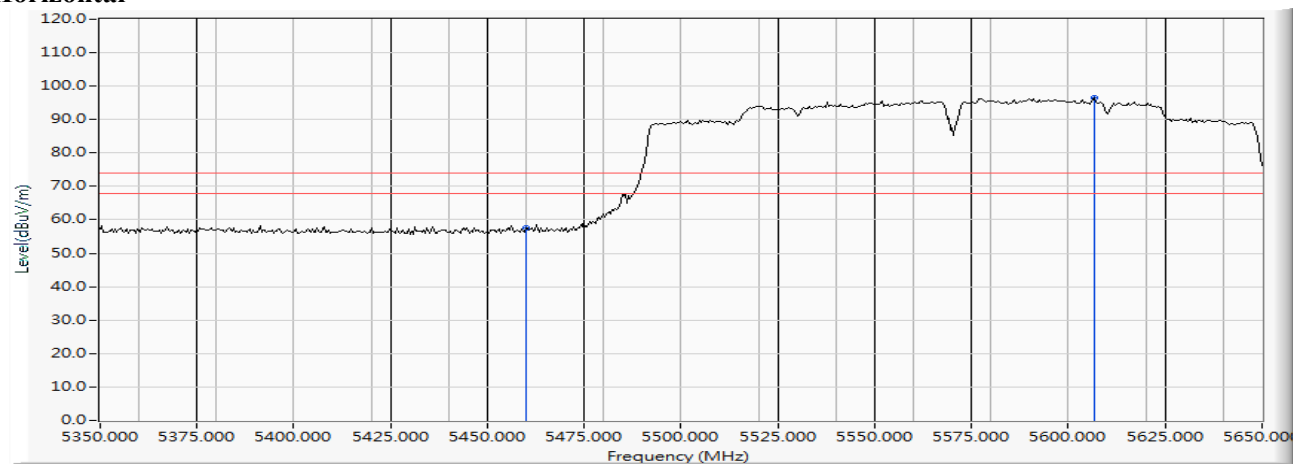


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	45.908	57.611	-16.389	74.000	PEAK
2	*	5606.522	11.453	85.130	96.584	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

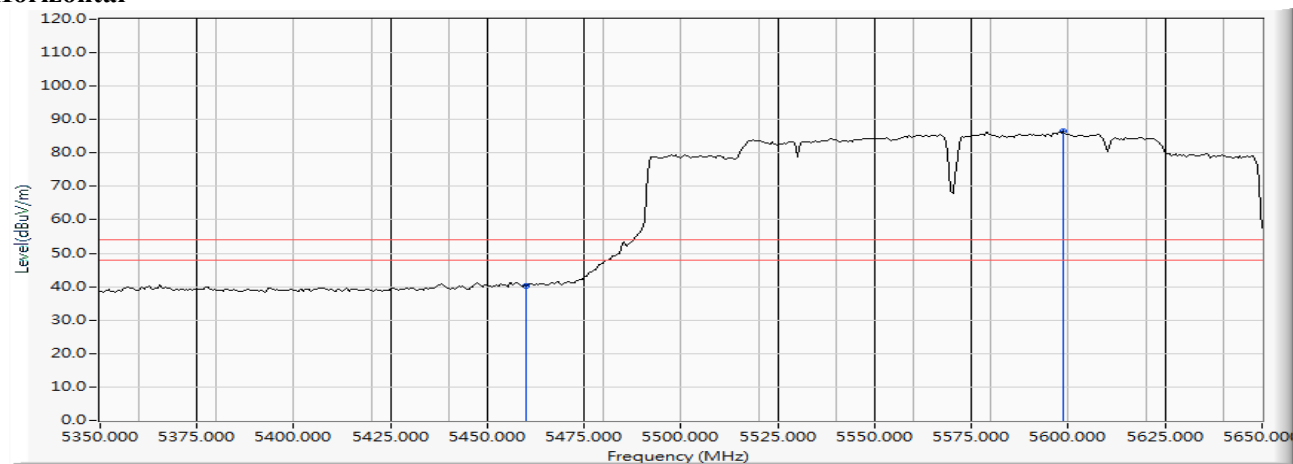


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	28.396	40.099	-13.901	54.000	AVERAGE
2	*	5598.696	11.474	74.910	86.384	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

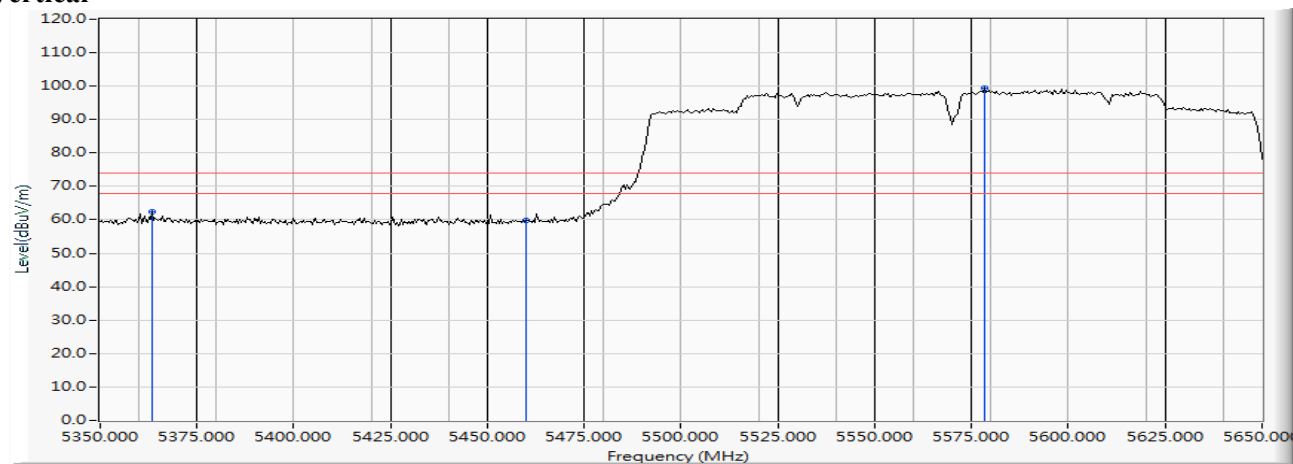


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5363.478	12.989	49.362	62.351	-11.649	74.000	PEAK
2		5460.000	36.194	46.523	59.913	-14.087	74.000	PEAK
3	*	5578.261	35.928	86.344	99.523	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

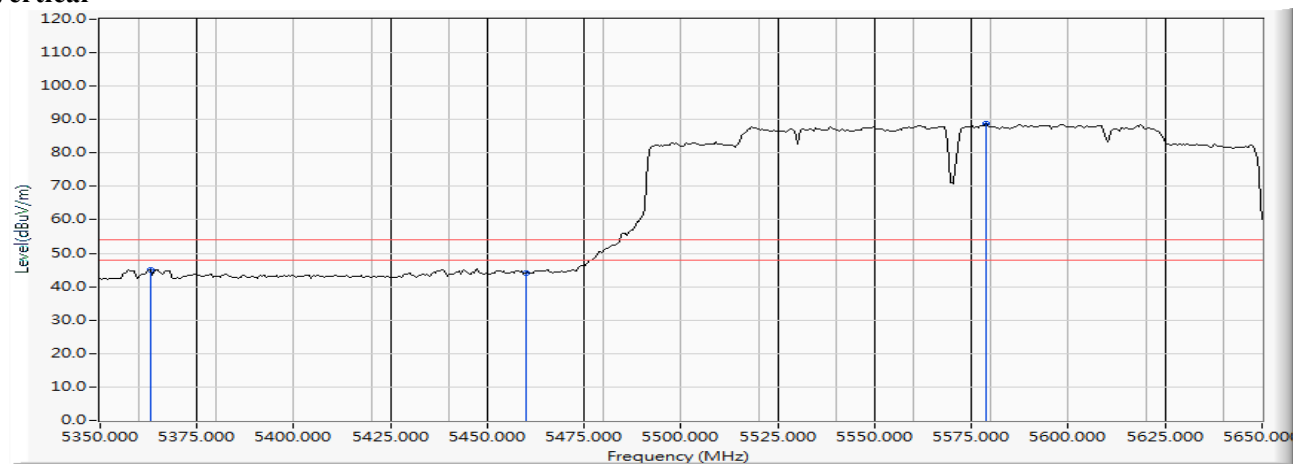Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5363.043	12.990	32.064	45.053	-8.947	54.000	AVERAGE
2		5460.000	13.390	30.726	44.116	-9.884	54.000	AVERAGE
3	*	5578.696	13.176	75.496	88.672	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Horizontal

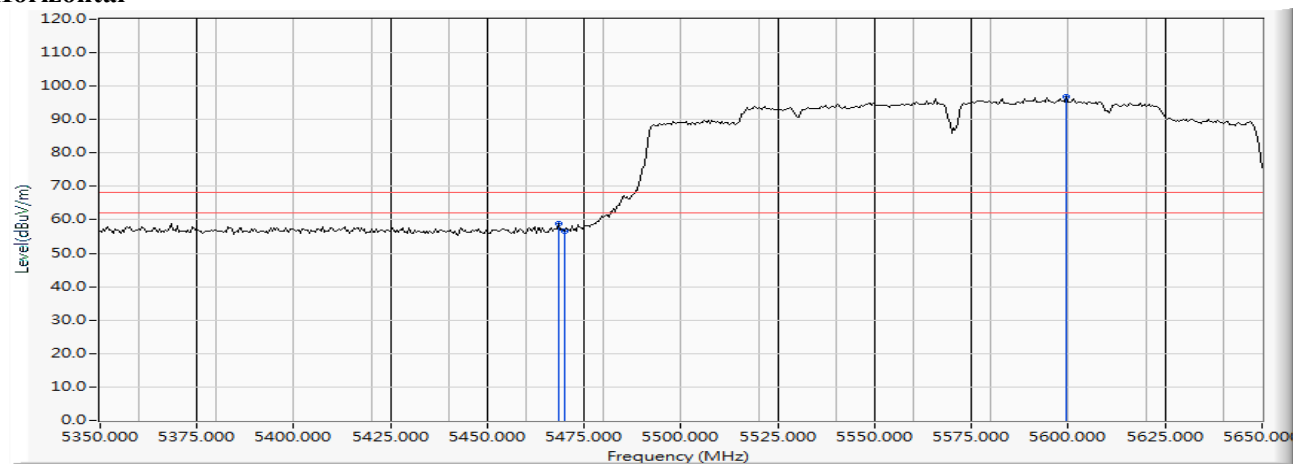

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.261	11.815	46.964	58.779	-9.441	68.220	PEAK
2		5470.000	11.838	44.657	56.495	-11.725	68.220	PEAK
3	*	5599.565	11.469	85.274	96.744	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/01
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Vertical Vertical

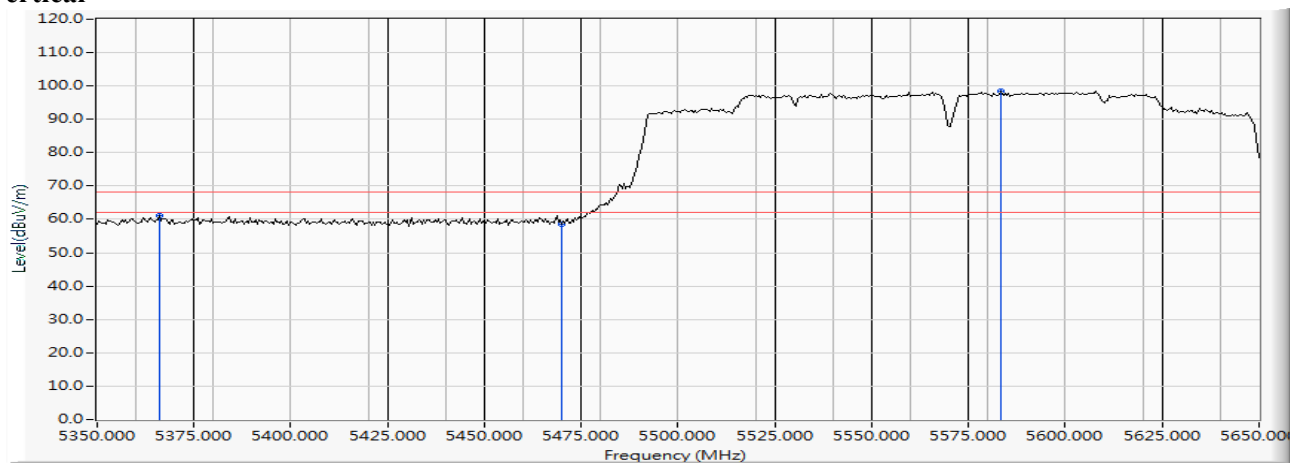

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5366.087	12.987	48.038	61.025	-7.195	68.220	PEAK
2		5470.000	13.462	45.104	58.566	-9.654	68.220	PEAK
3	*	5583.478	13.146	85.294	98.440	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Horizontal

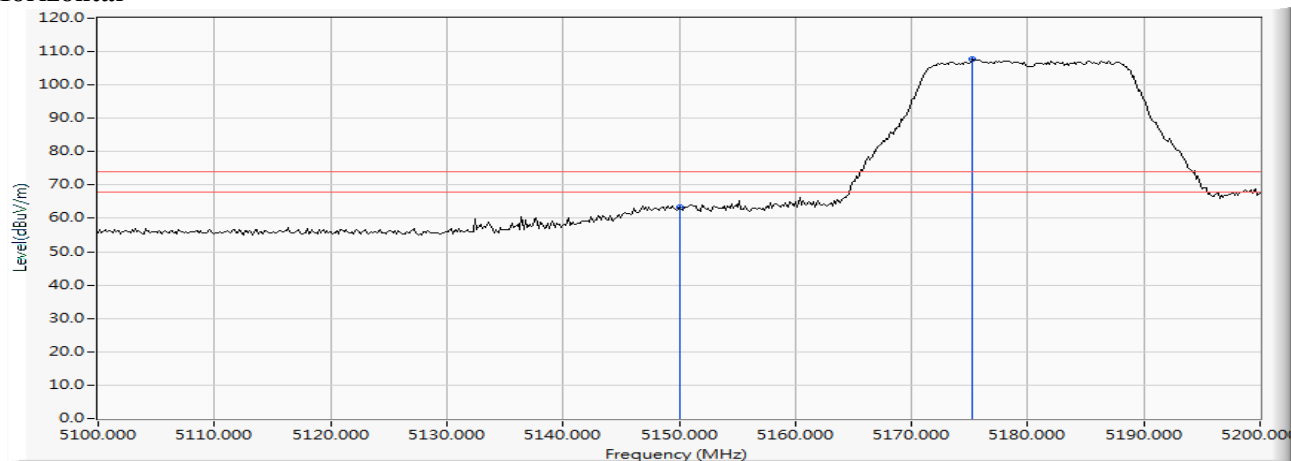


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	53.029	63.500	-10.500	74.000	PEAK
2	*	5175.217	10.406	97.229	107.635	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Horizontal

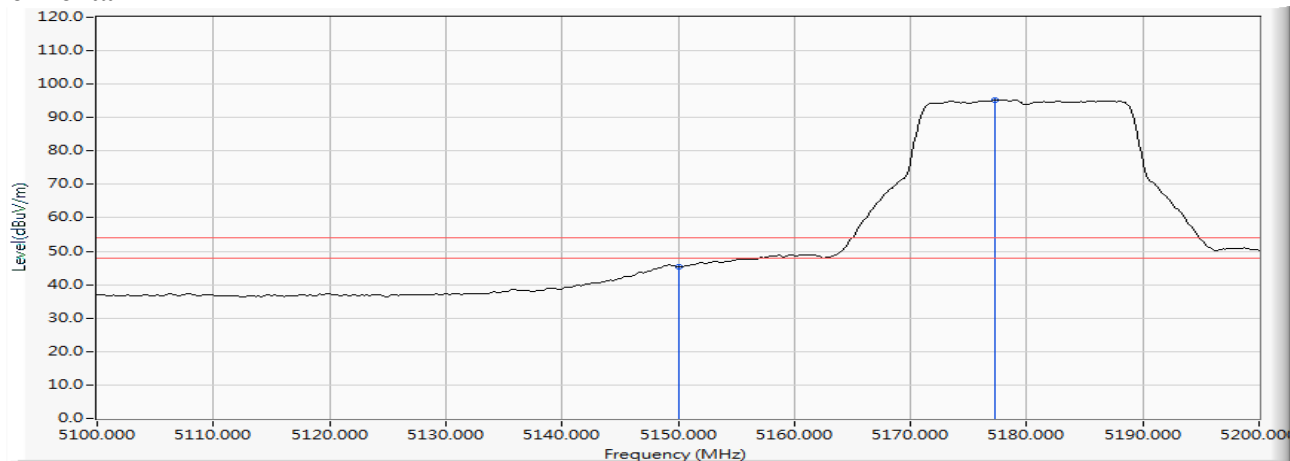


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	34.771	45.242	-8.758	54.000	AVERAGE
2	*	5177.246	10.400	84.916	95.317	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Vertical

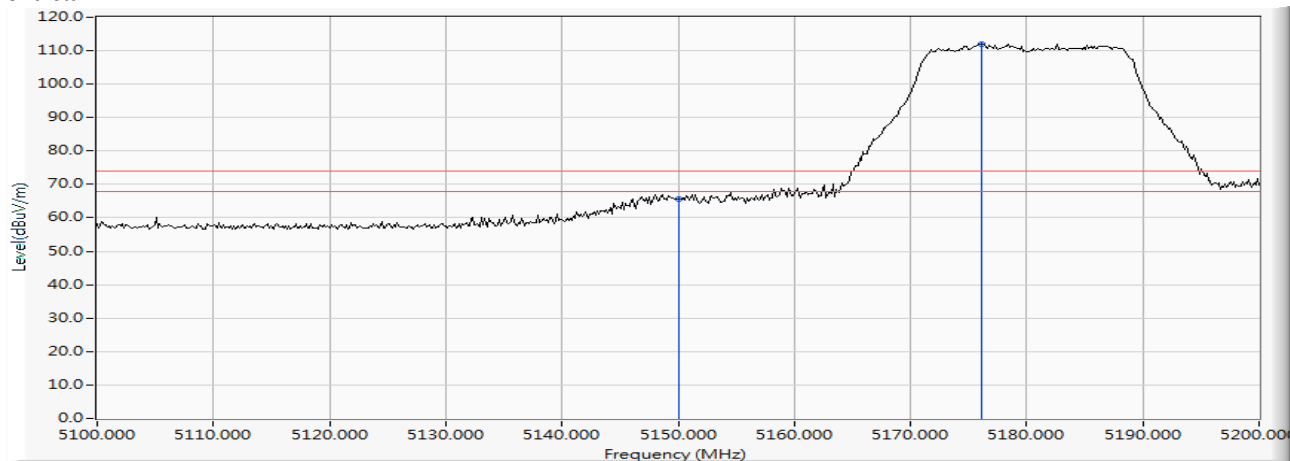


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	53.199	65.589	-8.411	74.000	PEAK
2	*	5176.087	12.488	99.418	111.905	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

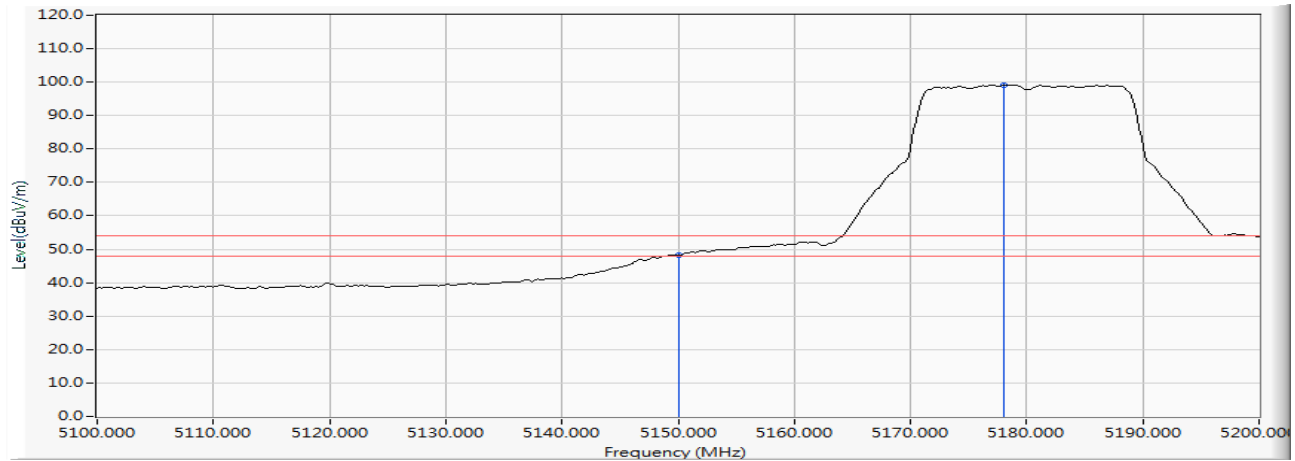Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	35.756	48.146	-5.854	54.000	AVERAGE
2	*	5177.971	12.493	86.719	99.213	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Horizontal

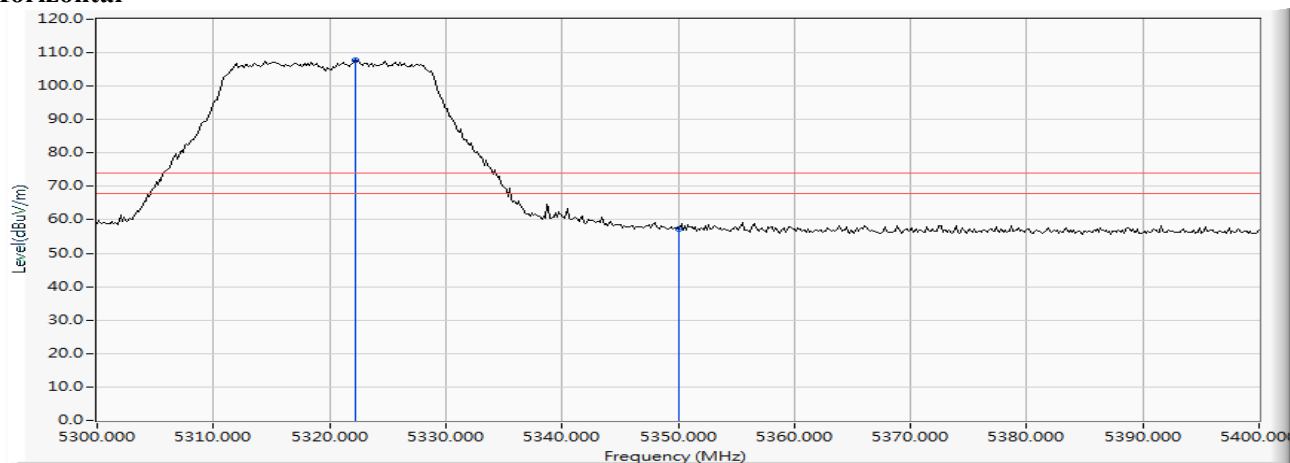


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5322.174	11.095	96.522	107.617	--	--	PEAK
2		5350.000	11.024	46.130	57.154	-16.846	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Horizontal

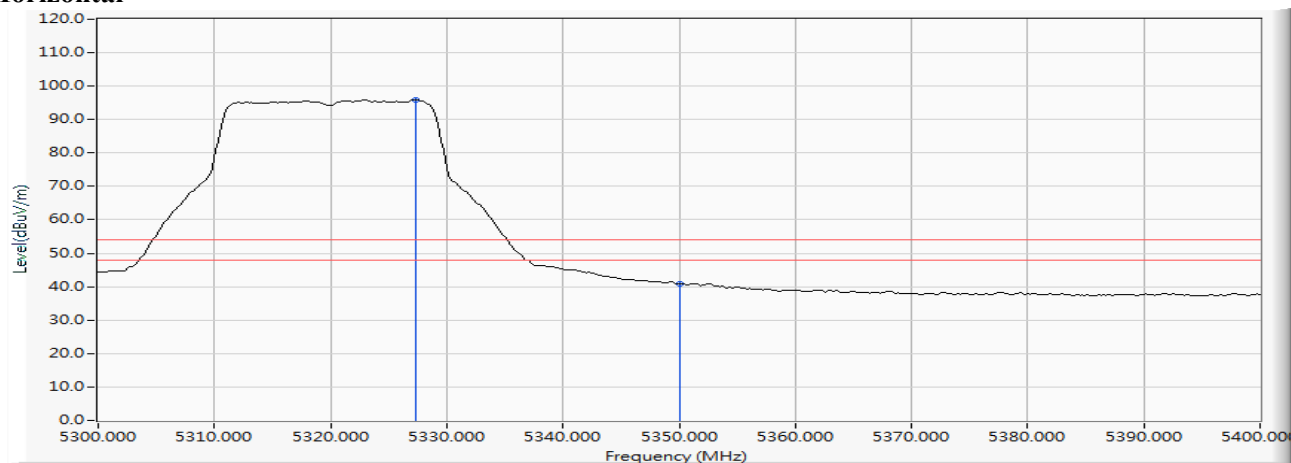


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5327.391	11.082	84.822	95.904	--	--	AVERAGE
2		5350.000	11.024	29.800	40.824	-13.176	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

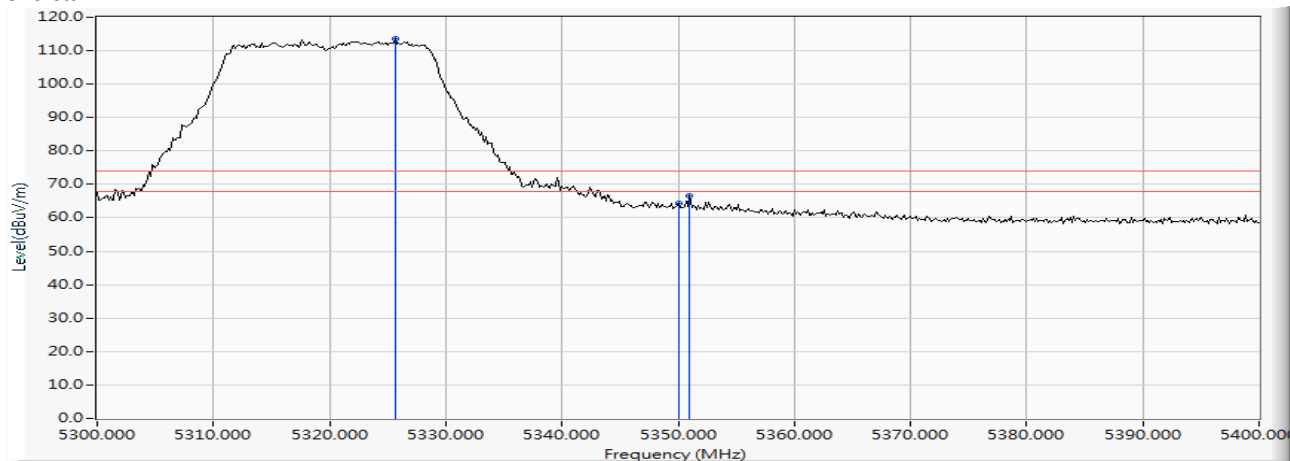Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5325.652	13.013	100.414	113.428	--	--	PEAK
2		5350.000	12.999	51.306	64.305	-9.695	74.000	PEAK
3		5351.014	12.999	53.473	66.472	-7.528	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Vertical

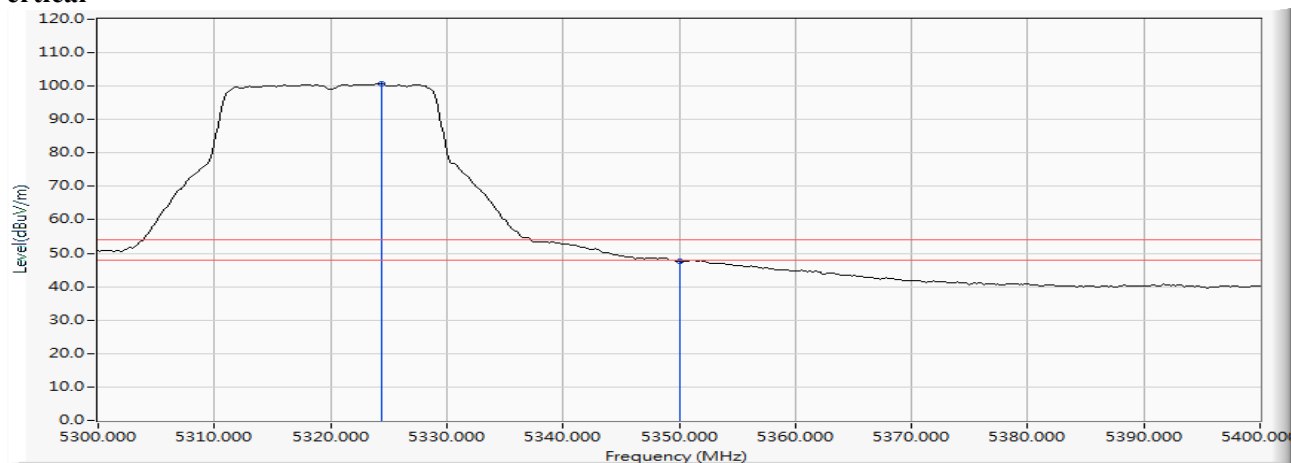


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5324.348	13.014	87.649	100.664	--	--	AVERAGE
2		5350.000	12.999	34.589	47.588	-6.412	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Horizontal

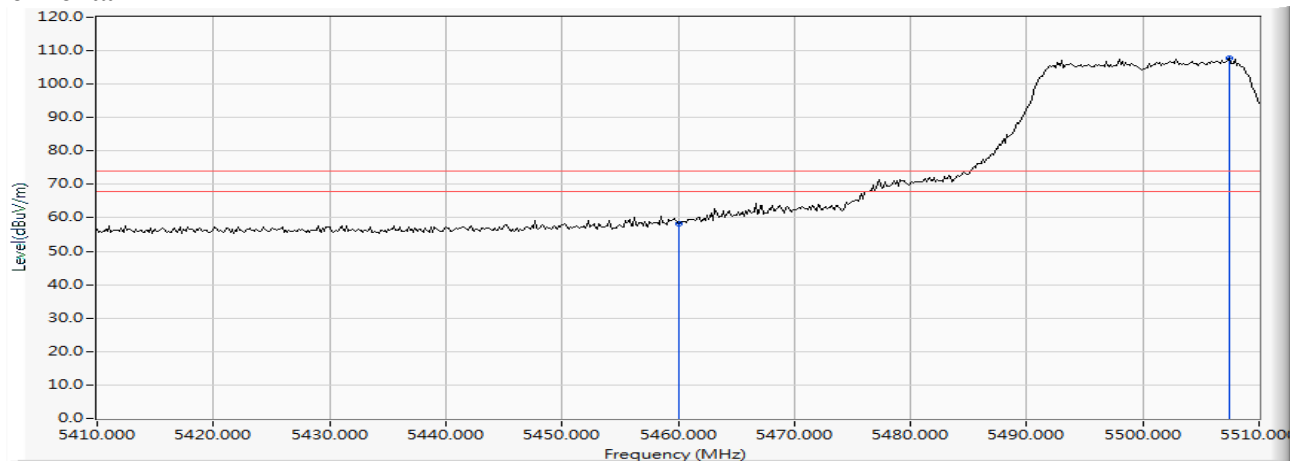


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	46.670	58.373	-15.627	74.000	PEAK
2	*	5507.391	12.185	95.711	107.895	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Horizontal

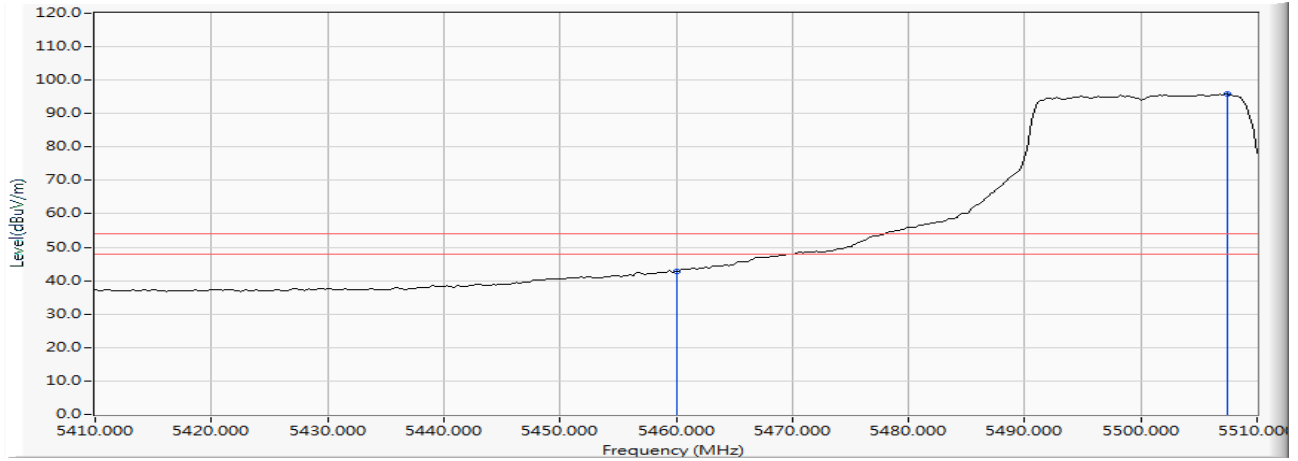


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	31.039	42.742	-11.258	54.000	AVERAGE
2	*	5507.391	12.185	83.605	95.789	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

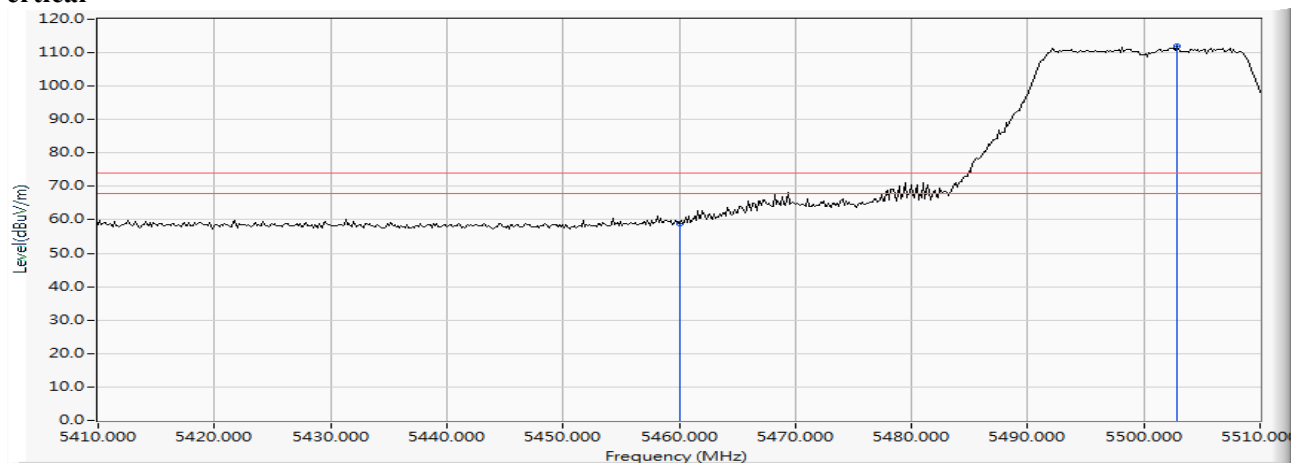
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	45.454	58.844	-15.156	74.000	PEAK
2	*	5502.899	13.639	98.223	111.861	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

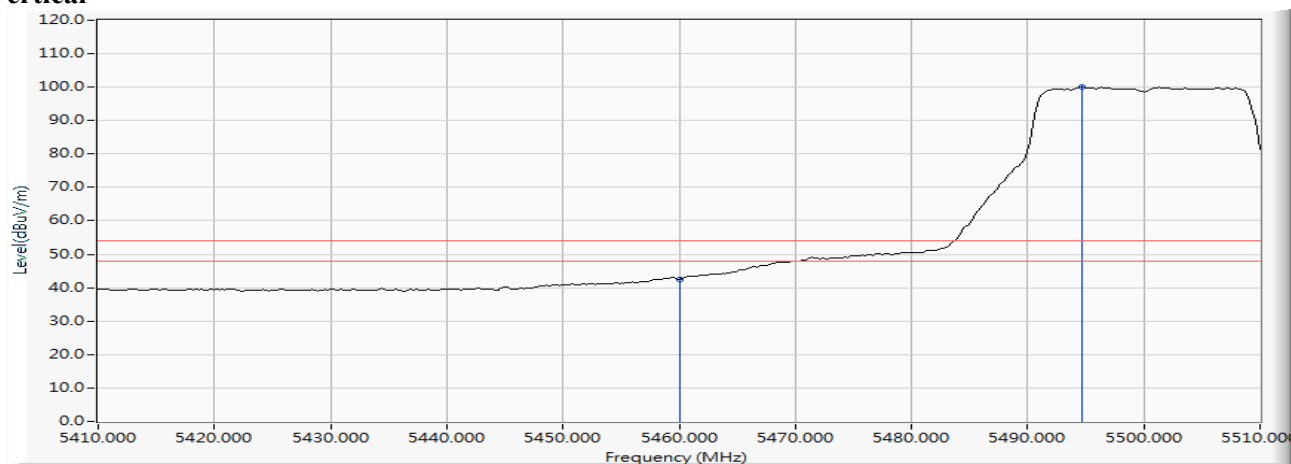Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	29.152	42.542	-11.458	54.000	AVERAGE
2	*	5494.638	13.612	86.423	100.035	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)


Horizontal

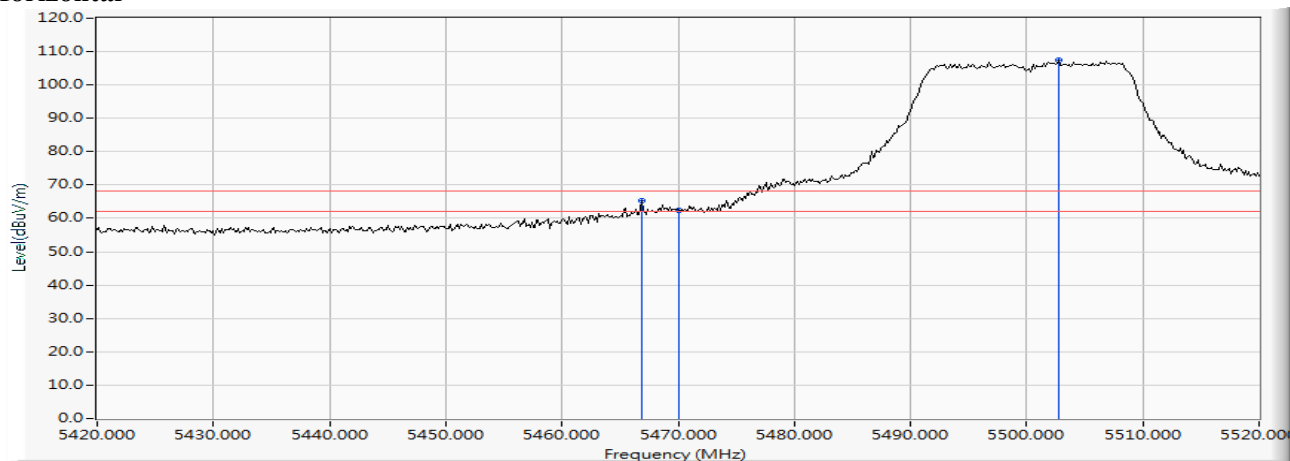

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.812	11.795	53.595	65.390	-2.830	68.220	PEAK
2		5470.000	11.838	50.426	62.264	-5.956	68.220	PEAK
3	*	5502.754	12.188	95.164	107.352	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)


Vertical

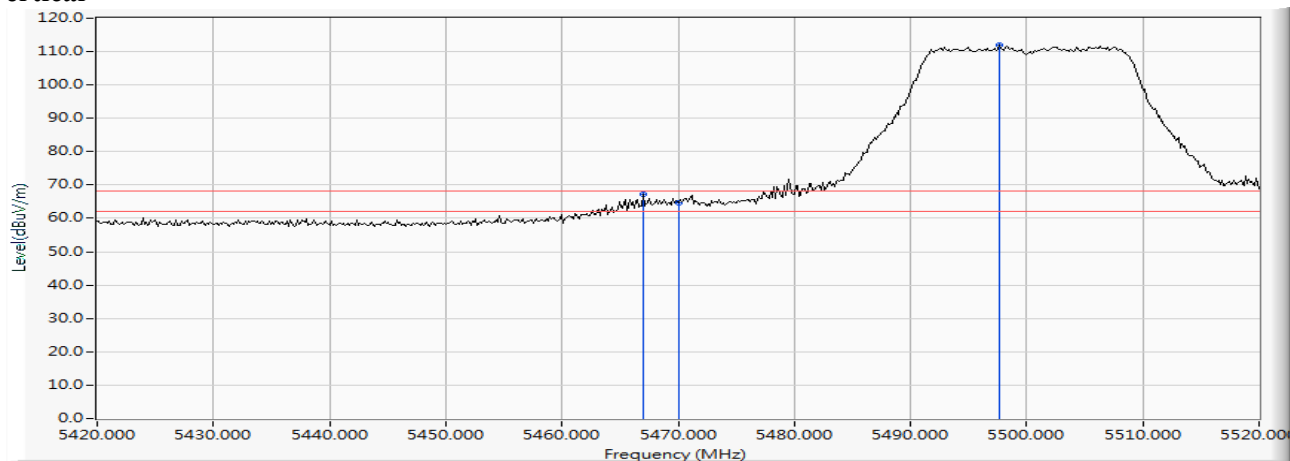

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.957	13.441	53.648	67.088	-1.132	68.220	PEAK
2		5470.000	13.462	51.176	64.638	-3.582	68.220	PEAK
3	*	5497.681	13.622	98.233	111.855	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 140 (5700MHz)


Horizontal

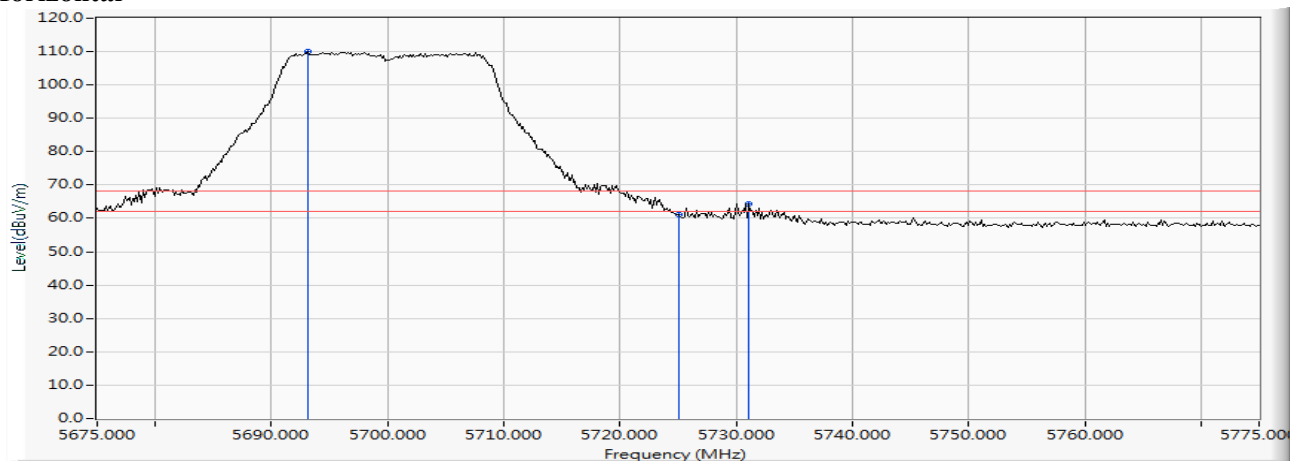

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5693.116	11.652	98.458	110.110	--	--	PEAK
2		5725.000	11.592	49.461	61.053	-7.167	68.220	PEAK
3		5731.087	11.574	52.787	64.360	-3.860	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 140 (5700MHz)


Vertical

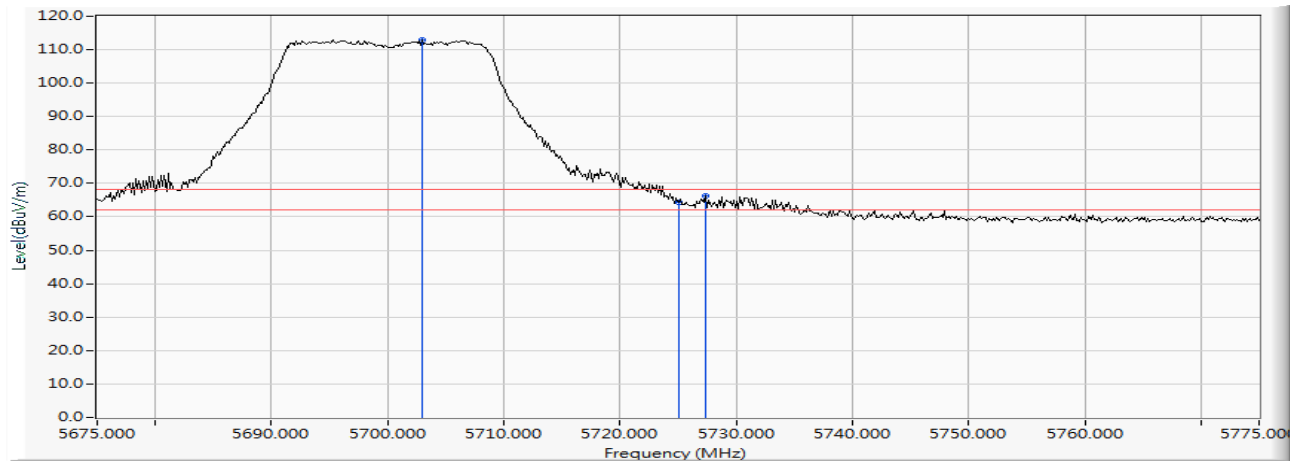

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5702.971	12.998	99.918	112.915	--	--	PEAK
2		5725.000	12.930	51.452	64.382	-3.838	68.220	PEAK
3		5727.319	12.922	53.275	66.197	-2.023	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 149 (5745MHz)


Horizontal

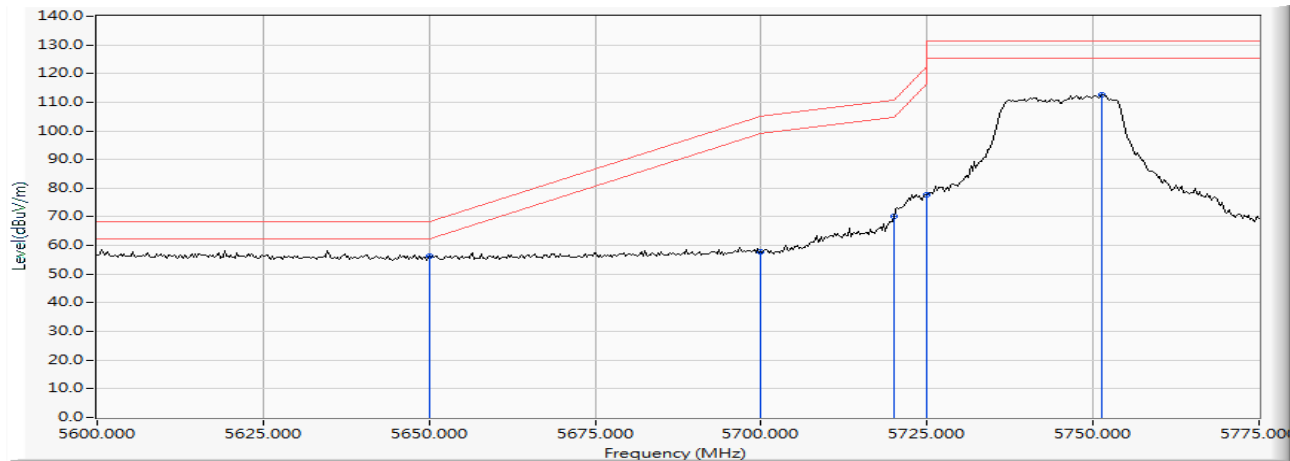

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	11.554	44.574	56.129	-12.091	68.220	PEAK
2		5700.000	11.647	45.993	57.640	-47.560	105.200	PEAK
3		5720.000	11.607	58.673	70.280	-40.520	110.800	PEAK
4		5725.000	11.592	66.185	77.777	-44.423	122.200	PEAK
5		5751.413	11.507	101.026	112.534	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 149 (5745MHz)


Vertical

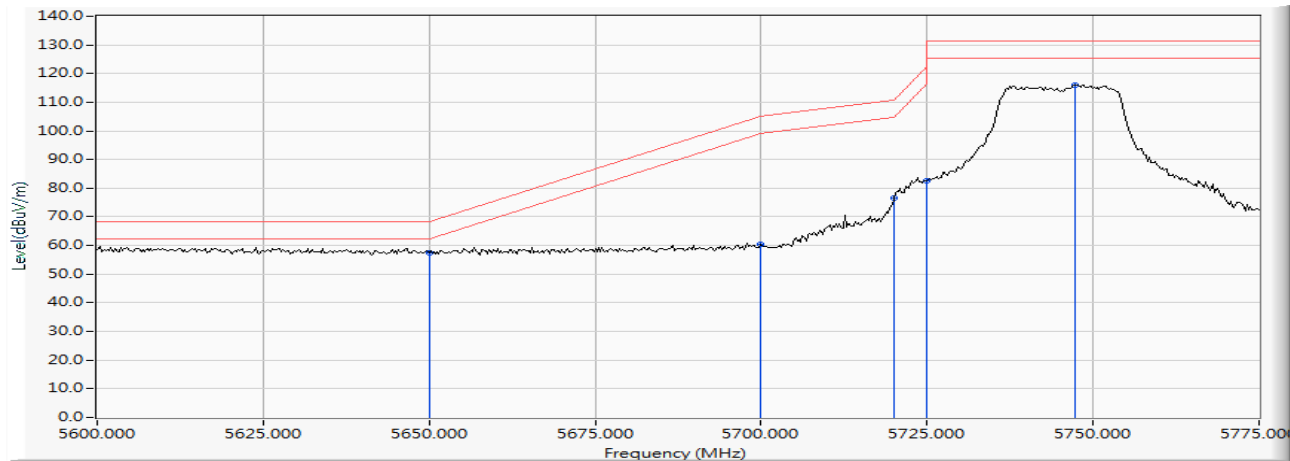

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	44.456	57.485	-10.735	68.220	PEAK
2		5700.000	13.003	47.412	60.415	-44.785	105.200	PEAK
3		5720.000	12.947	63.453	76.400	-34.400	110.800	PEAK
4		5725.000	12.930	69.705	82.635	-39.565	122.200	PEAK
5		5747.355	12.852	103.215	116.067	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/12
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 165 (5825MHz)


Horizontal

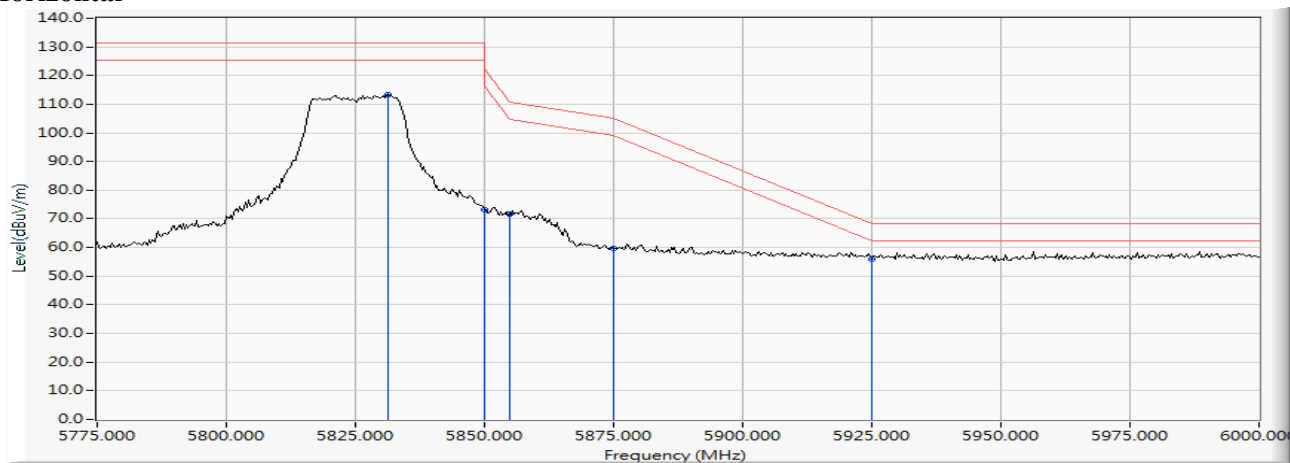

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5831.413	11.573	101.785	113.357	--	--	PEAK
2		5850.000	11.701	61.602	73.303	-48.897	122.200	PEAK
3		5855.000	11.735	60.069	71.804	-38.996	110.800	PEAK
4		5875.000	11.873	47.922	59.795	-45.405	105.200	PEAK
5	*	5925.000	12.068	43.907	55.976	-12.244	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 165 (5825MHz)


Vertical

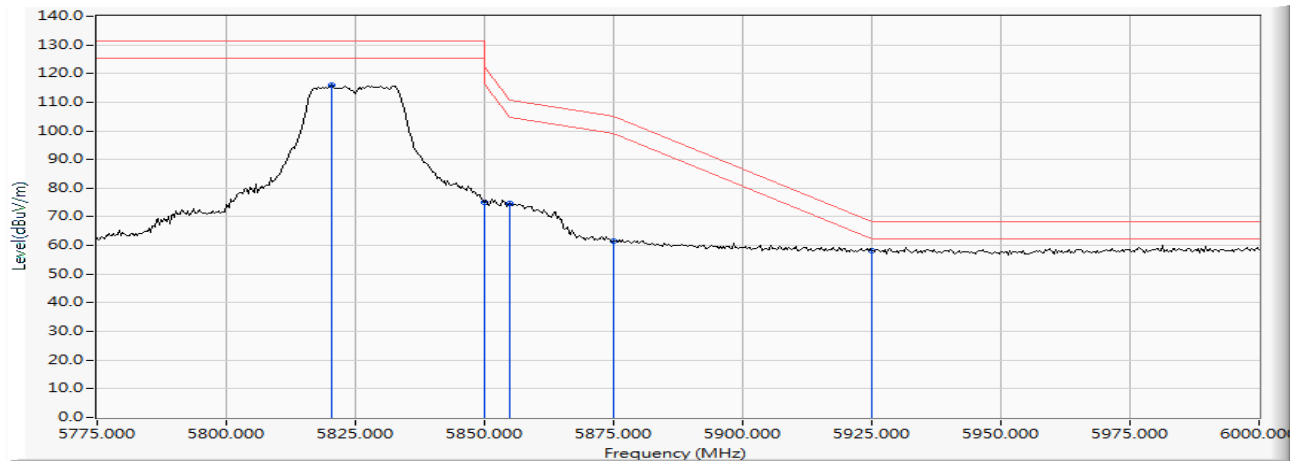

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5820.326	12.712	103.094	115.805	--	--	PEAK
2		5850.000	12.774	62.344	75.118	-47.082	122.200	PEAK
3		5855.000	12.784	61.754	74.538	-36.262	110.800	PEAK
4		5875.000	12.825	48.586	61.411	-43.789	105.200	PEAK
5	*	5925.000	12.911	45.227	58.138	-10.082	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Horizontal

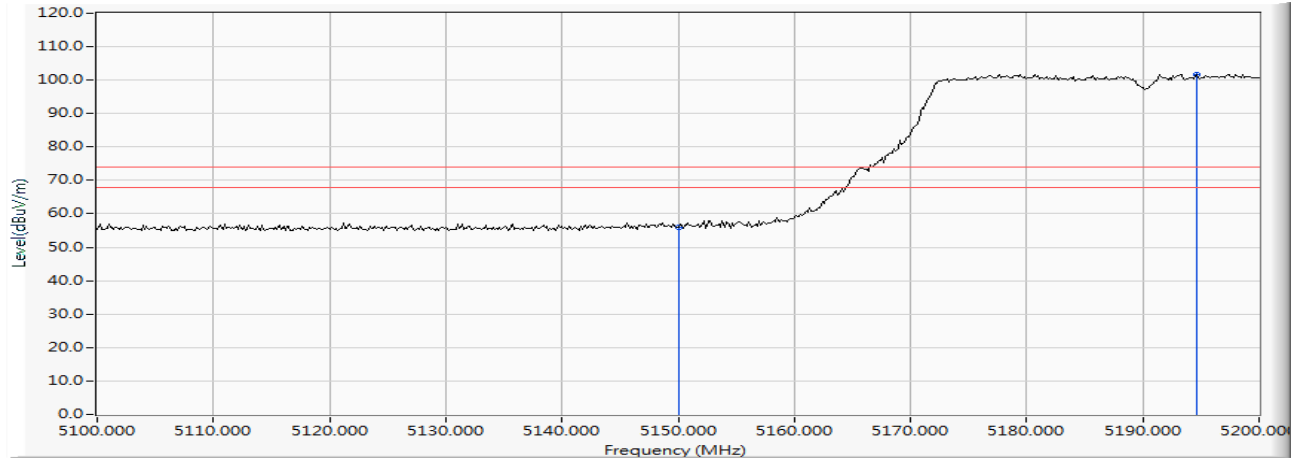


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	45.376	55.847	-18.153	74.000	PEAK
2	*	5194.638	10.350	91.399	101.749	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Horizontal

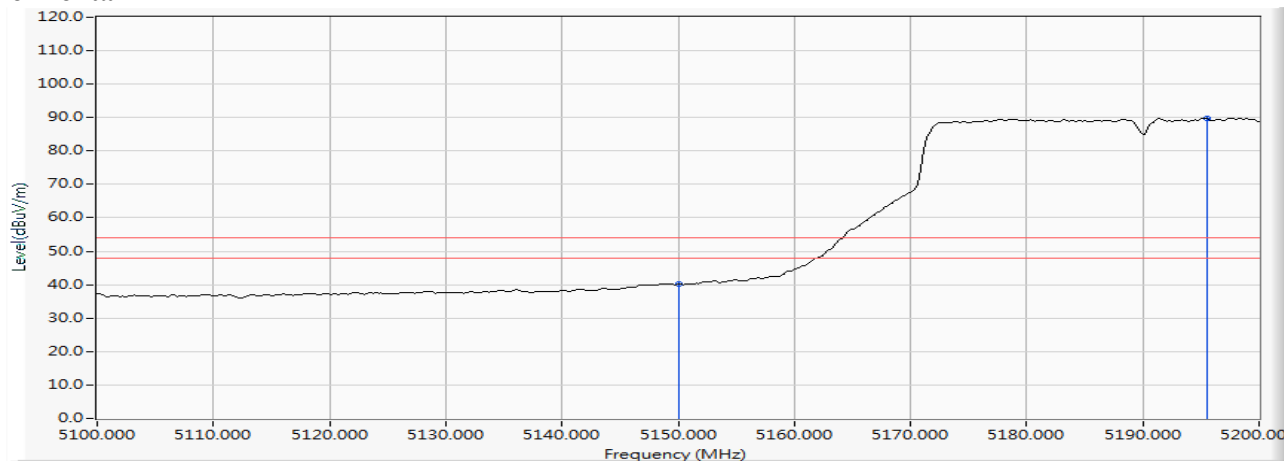


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	29.674	40.145	-13.855	54.000	AVERAGE
2	*	5195.507	10.347	79.491	89.838	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

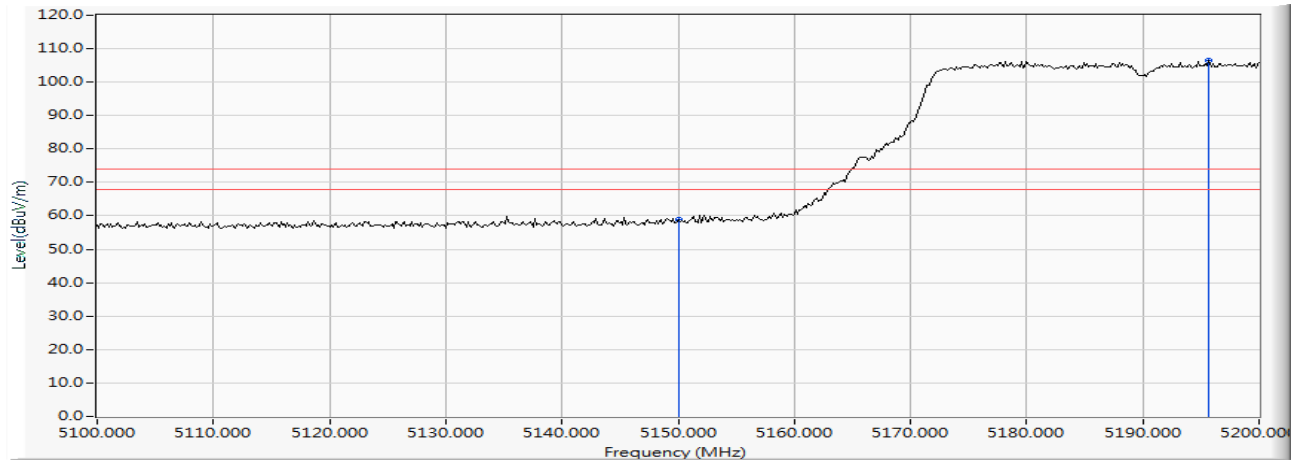Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	46.407	58.797	-15.203	74.000	PEAK
2	*	5195.652	12.553	94.048	106.601	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Vertical

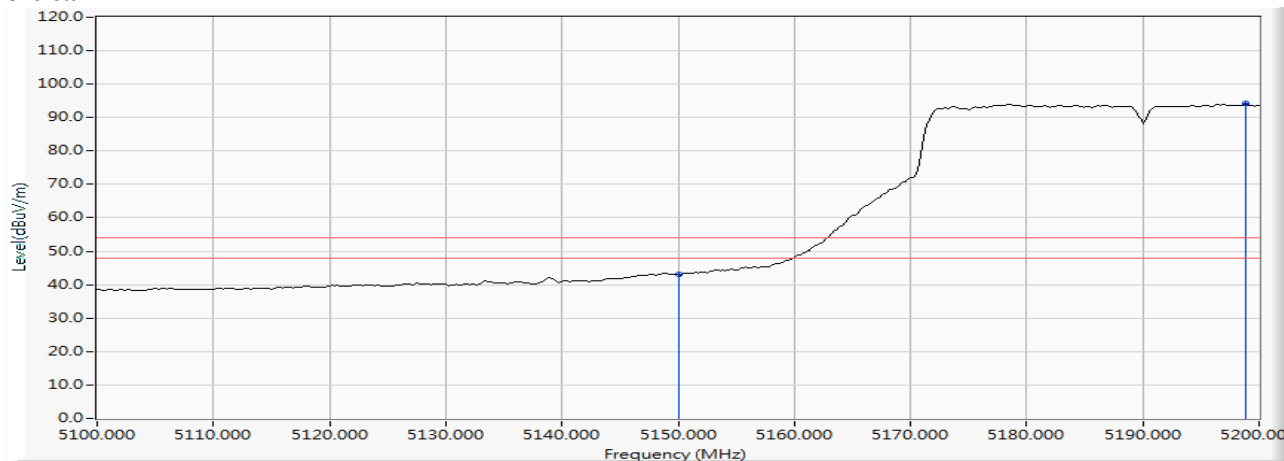


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	30.590	42.980	-11.020	54.000	AVERAGE
2	*	5198.841	12.561	81.633	94.195	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Horizontal

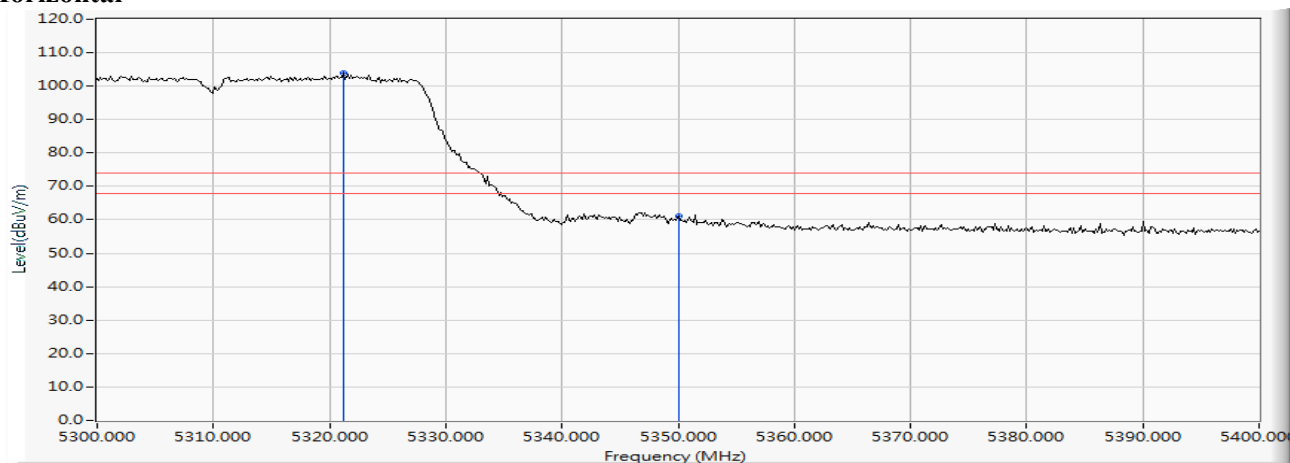


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5321.159	11.098	92.805	103.903	--	--	PEAK
2		5350.000	11.024	50.208	61.232	-12.768	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Horizontal

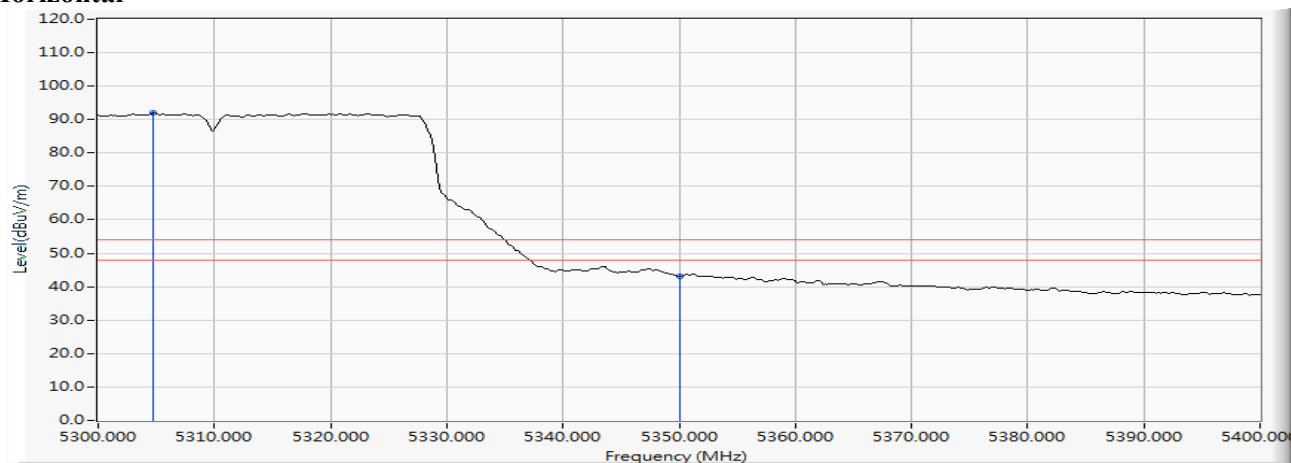


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.783	11.141	80.711	91.851	--	--	AVERAGE
2		5350.000	11.024	32.174	43.198	-10.802	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

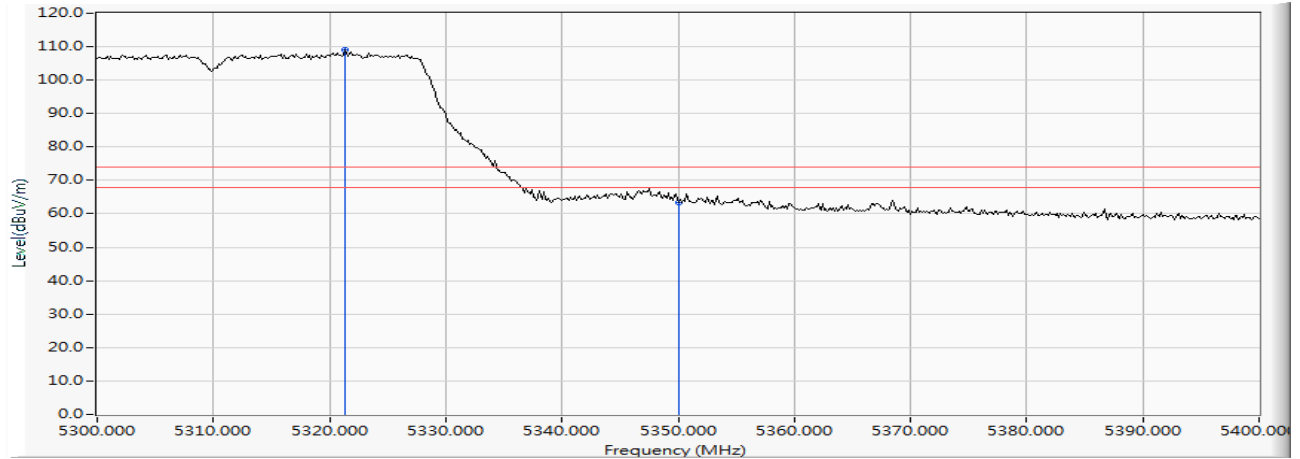
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5321.304	13.017	95.942	108.959	--	--	PEAK
2		5350.000	12.999	50.509	63.508	-10.492	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

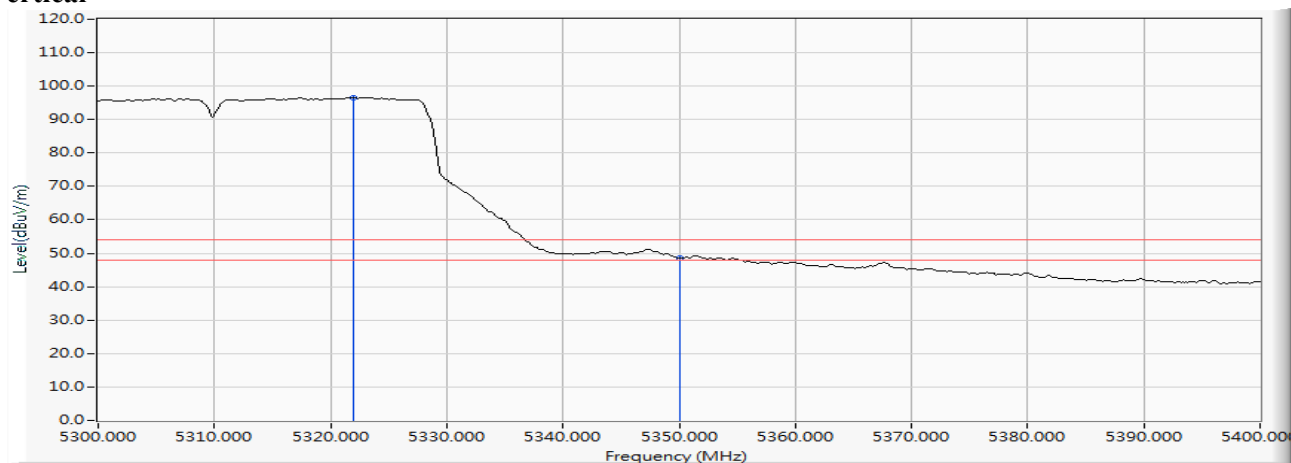Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5322.029	13.016	83.626	96.642	--	--	AVERAGE
2		5350.000	12.999	35.507	48.506	-5.494	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Horizontal

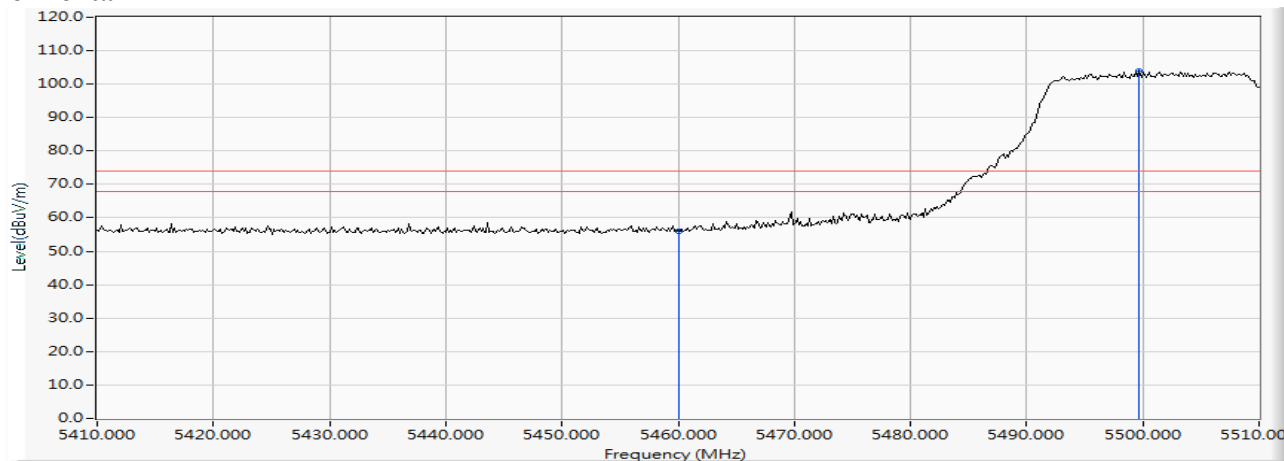


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	44.244	55.947	-18.053	74.000	PEAK
2	*	5499.710	12.166	91.871	104.038	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Horizontal

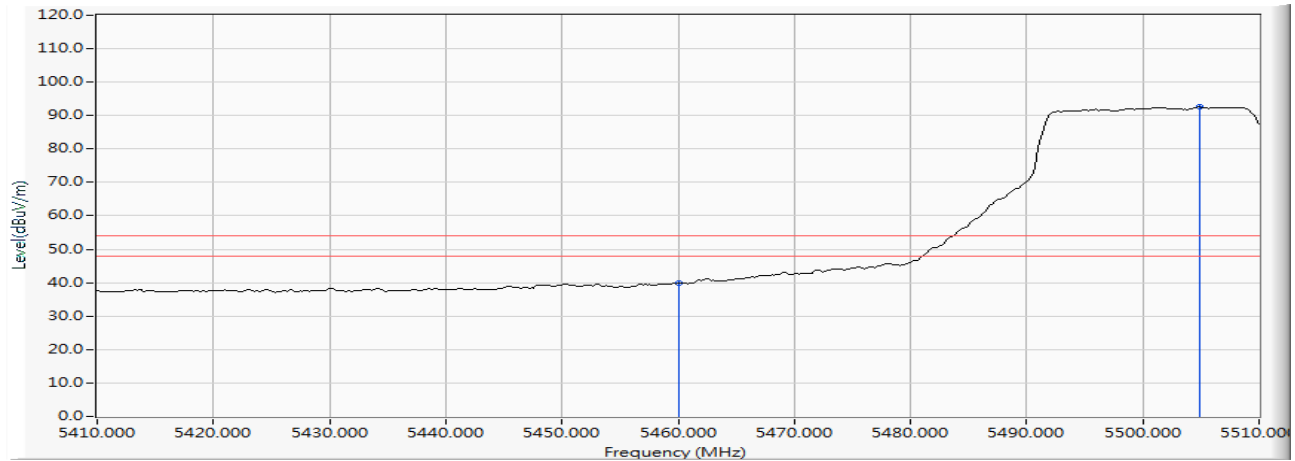


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	28.054	39.757	-14.243	54.000	AVERAGE
2	*	5504.928	12.203	80.323	92.526	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

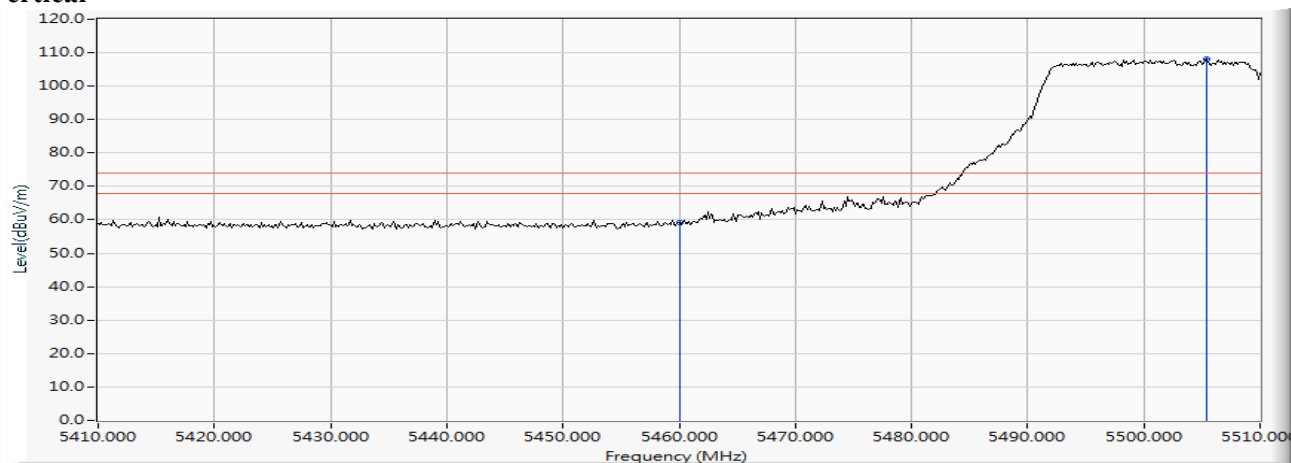
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	45.787	59.177	-14.823	74.000	PEAK
2	*	5505.362	13.642	94.412	108.054	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

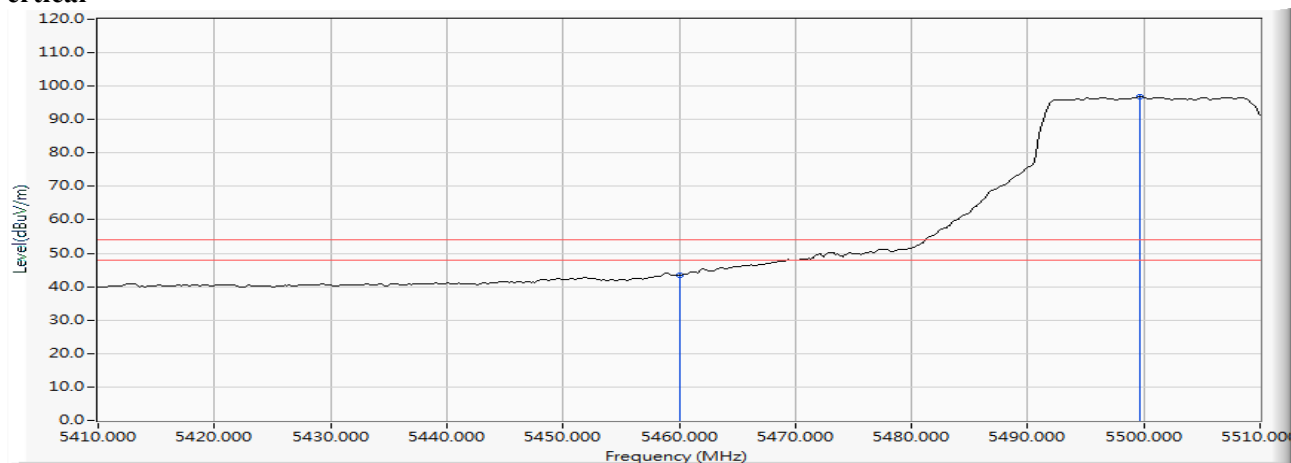Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	29.969	43.359	-10.641	54.000	AVERAGE
2	*	5499.710	13.628	83.174	96.802	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)


Horizontal

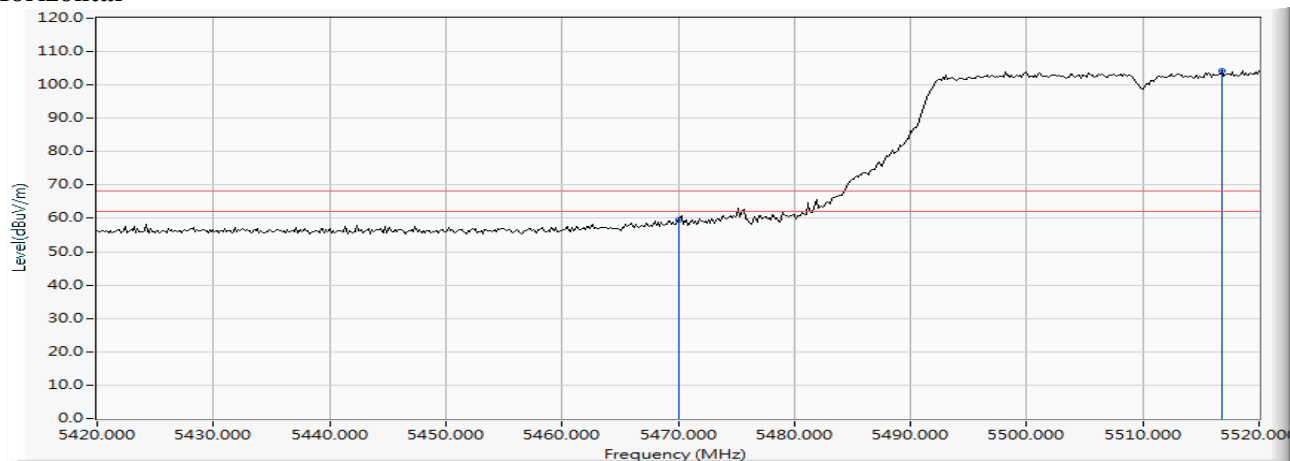

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	47.733	59.571	-8.649	68.220	PEAK
2	*	5516.812	12.108	92.130	104.238	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)


Vertical

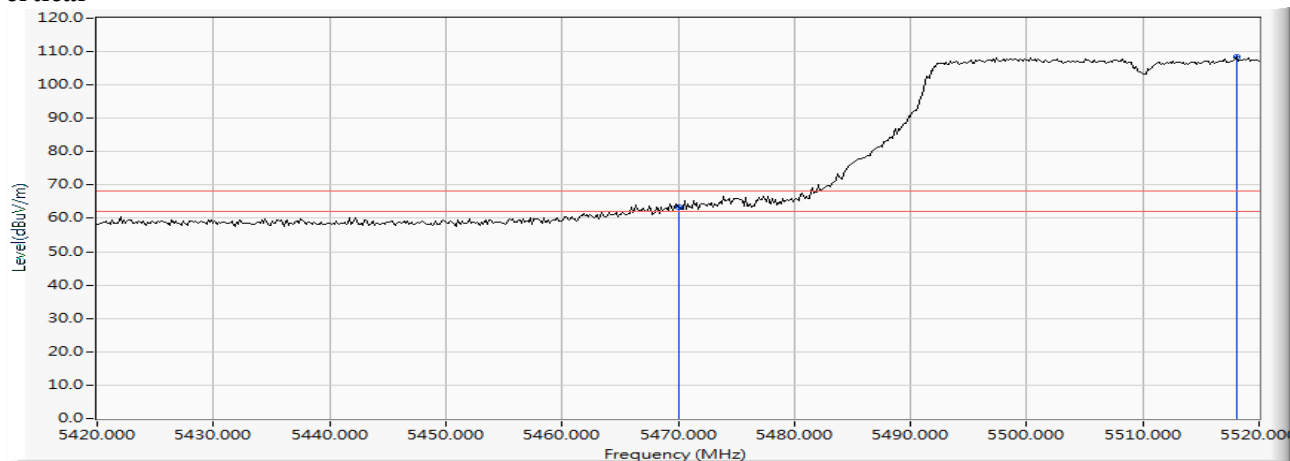

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	49.841	63.303	-4.917	68.220	PEAK
2	*	5518.116	13.560	94.757	108.317	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/12
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 134 (5670MHz)

Horizontal

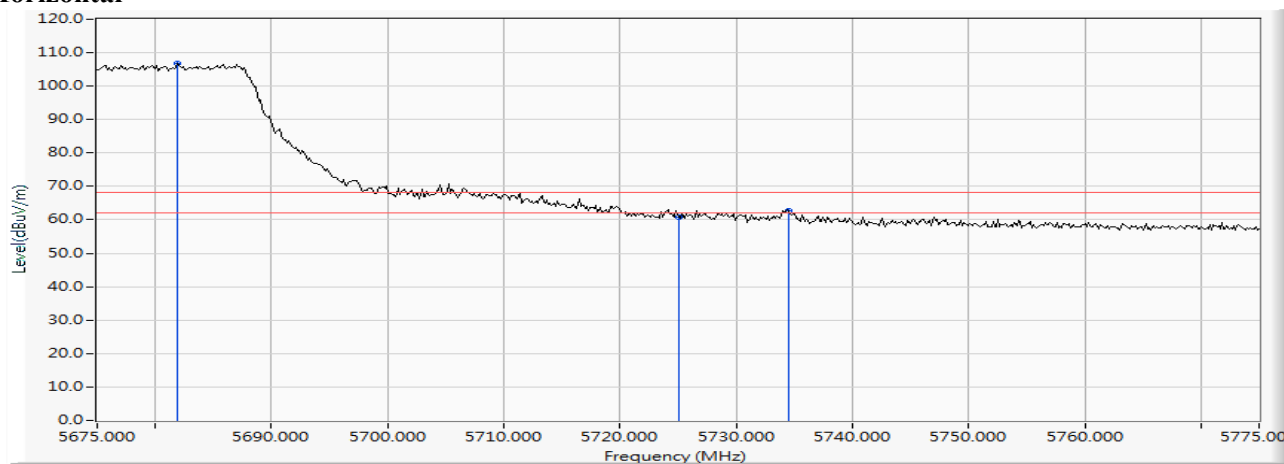

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5681.957	11.630	95.098	106.727	--	--	PEAK
2		5725.000	11.592	49.052	60.644	-7.576	68.220	PEAK
3		5734.565	11.561	51.267	62.829	-5.391	68.220	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/12
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 134 (5670MHz)

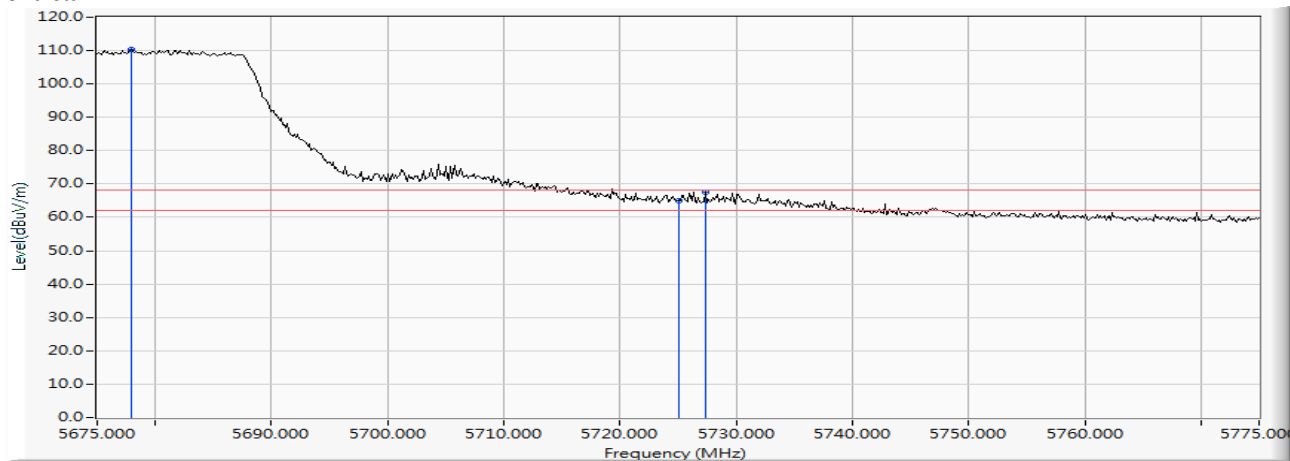Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5677.899	13.023	97.463	110.485	--	--	PEAK
2		5725.000	12.930	52.160	65.090	-3.130	68.220	PEAK
3		5727.319	12.922	54.796	67.718	-0.502	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 151 (5755MHz)


Horizontal

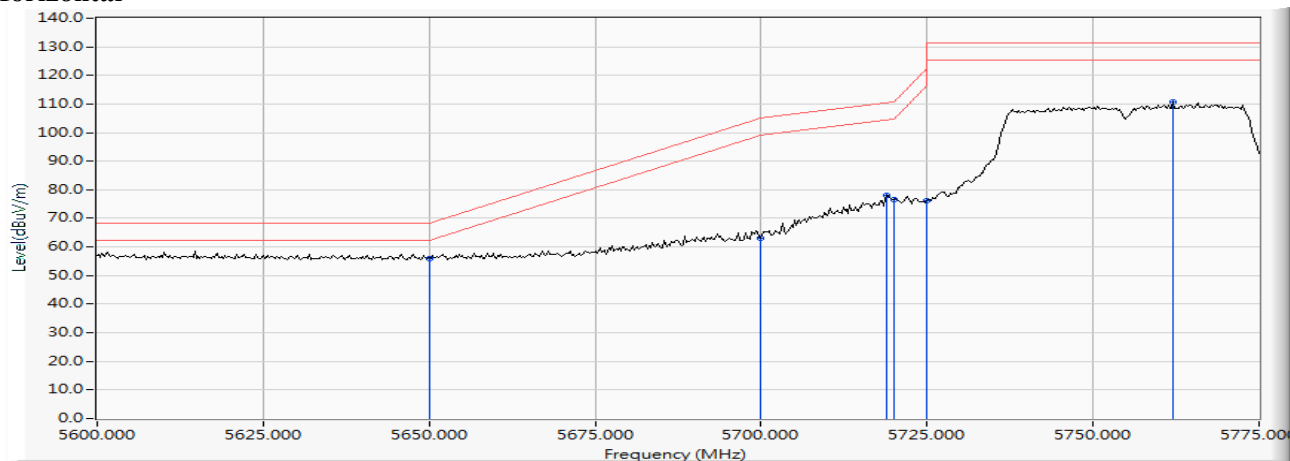

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	11.554	44.540	56.095	-12.125	68.220	PEAK
2		5700.000	11.647	51.591	63.238	-41.962	105.200	PEAK
3		5718.949	11.610	66.413	78.023	-32.483	110.506	PEAK
4		5720.000	11.607	64.868	76.475	-34.325	110.800	PEAK
5		5725.000	11.592	64.550	76.142	-46.058	122.200	PEAK
6		5762.065	11.475	99.247	110.722	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 151 (5755MHz)


Vertical

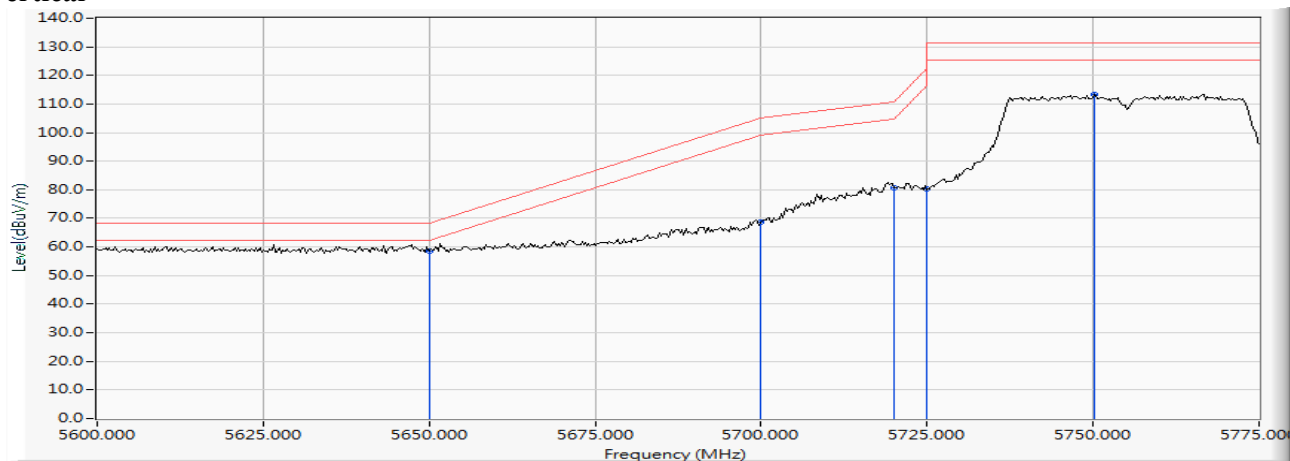

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	45.516	58.545	-9.675	68.220	PEAK
2		5700.000	13.003	55.523	68.526	-36.674	105.200	PEAK
3		5720.000	12.947	67.686	80.633	-30.167	110.800	PEAK
4		5725.000	12.930	67.214	80.144	-42.056	122.200	PEAK
5		5750.145	12.843	100.544	113.386	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/12
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 159 (5795MHz)


Horizontal

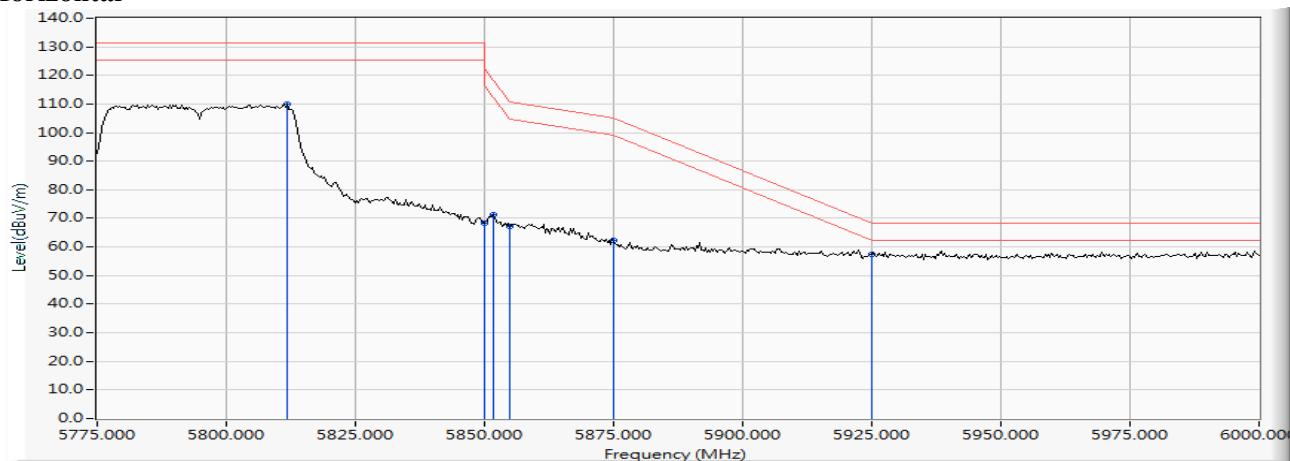

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5811.848	11.439	98.610	110.049	--	--	PEAK
2		5850.000	11.701	56.788	68.489	-53.711	122.200	PEAK
3		5851.630	11.711	59.537	71.249	-47.235	118.484	PEAK
4		5855.000	11.735	55.431	67.166	-43.634	110.800	PEAK
5		5875.000	11.873	50.294	62.167	-43.033	105.200	PEAK
6	*	5925.000	12.068	45.432	57.501	-10.719	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/06/12
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 159 (5795MHz)


Vertical

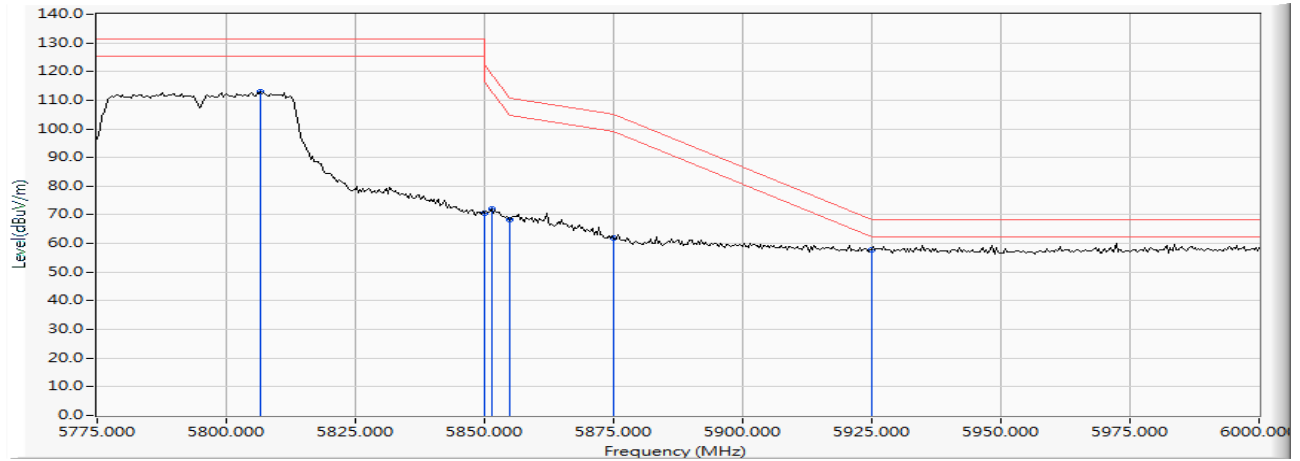

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5806.630	12.689	100.335	113.024	--	--	PEAK
2		5850.000	12.774	57.659	70.433	-51.767	122.200	PEAK
3		5851.304	12.776	59.328	72.104	-47.123	119.227	PEAK
4		5855.000	12.784	55.518	68.302	-42.498	110.800	PEAK
5		5875.000	12.825	49.104	61.929	-43.271	105.200	PEAK
6	*	5925.000	12.911	44.949	57.860	-10.360	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Horizontal

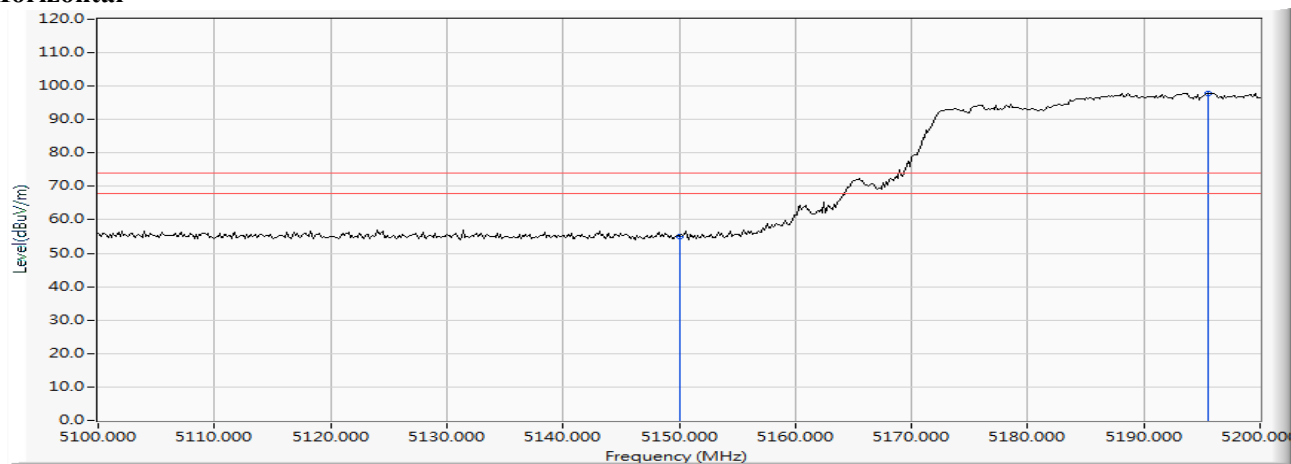


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	44.669	55.140	-18.860	74.000	PEAK
2	*	5195.507	10.347	87.572	97.919	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Horizontal

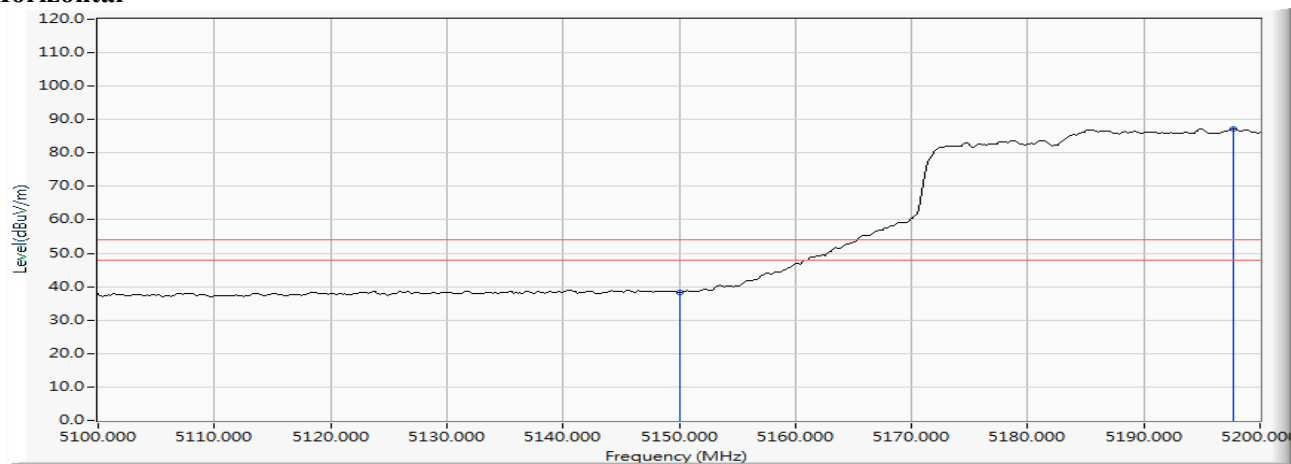


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	27.824	38.295	-15.705	54.000	AVERAGE
2	*	5197.681	10.339	76.972	87.312	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

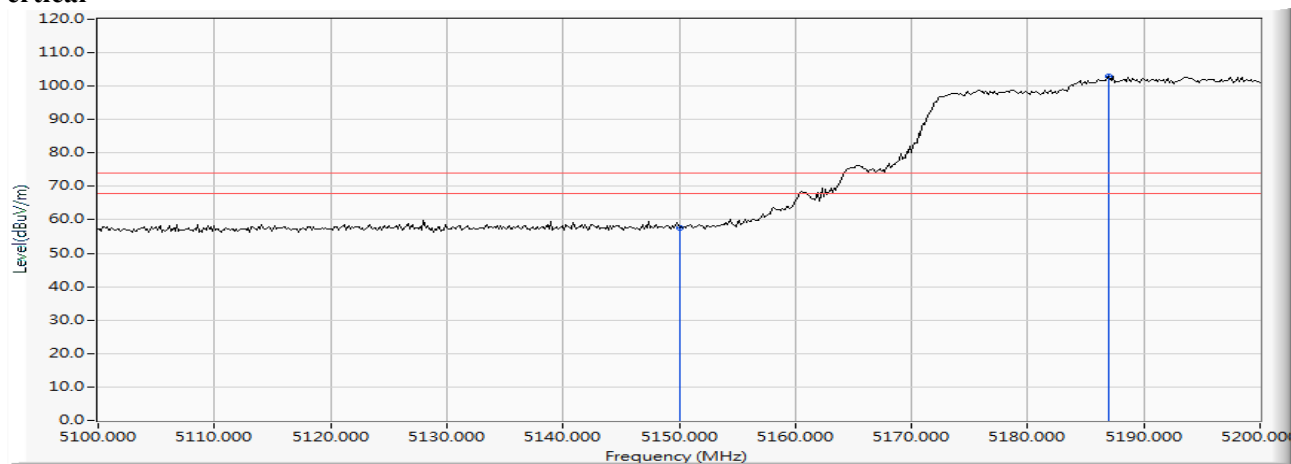
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	45.330	57.720	-16.280	74.000	PEAK
2	*	5186.957	12.528	90.550	103.078	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

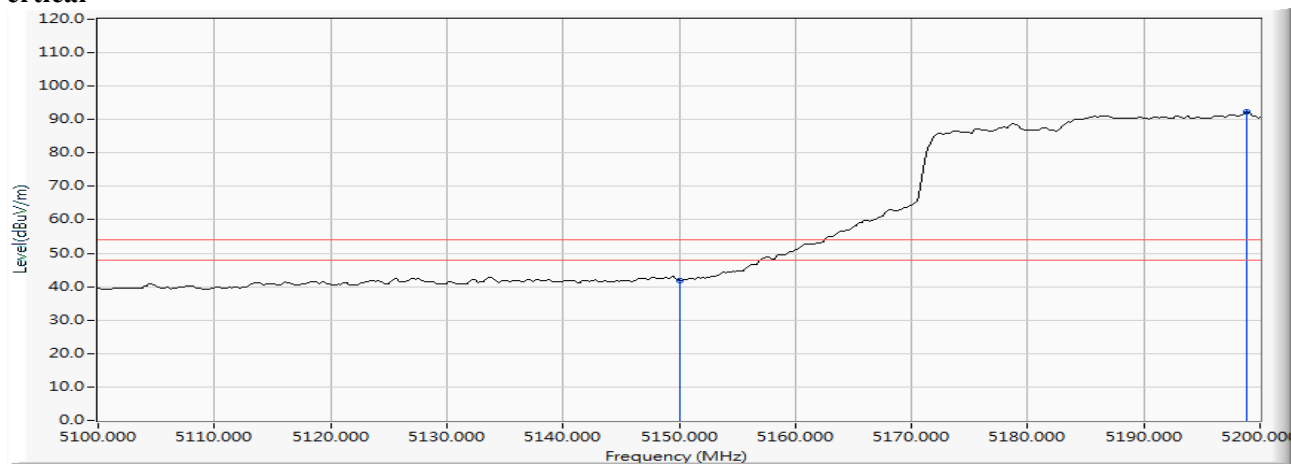Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	29.500	41.890	-12.110	54.000	AVERAGE
2	*	5198.841	12.561	79.628	92.190	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Horizontal

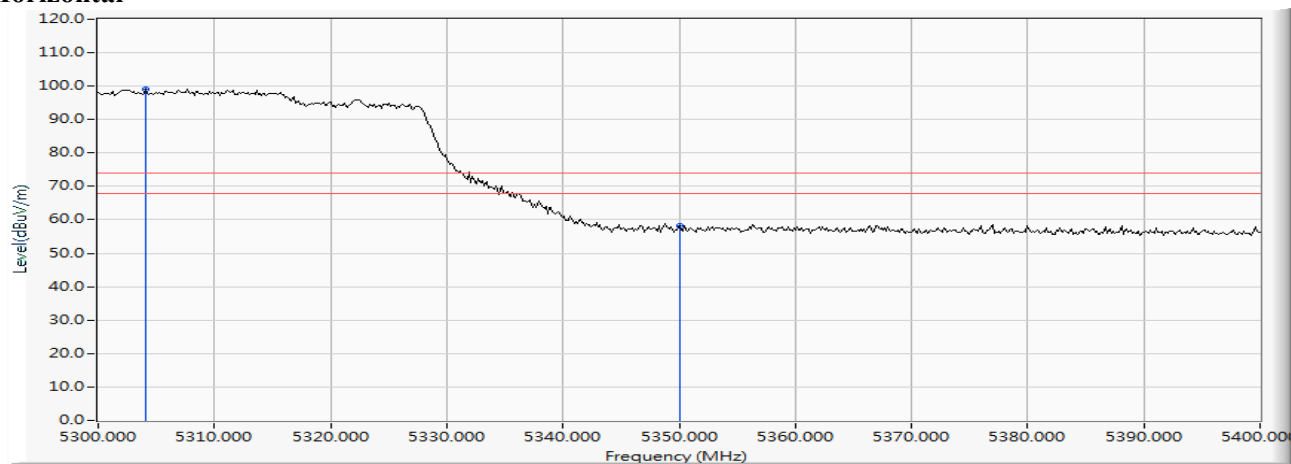


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.058	11.142	88.030	99.172	--	--	PEAK
2		5350.000	11.024	47.090	58.114	-15.886	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Horizontal

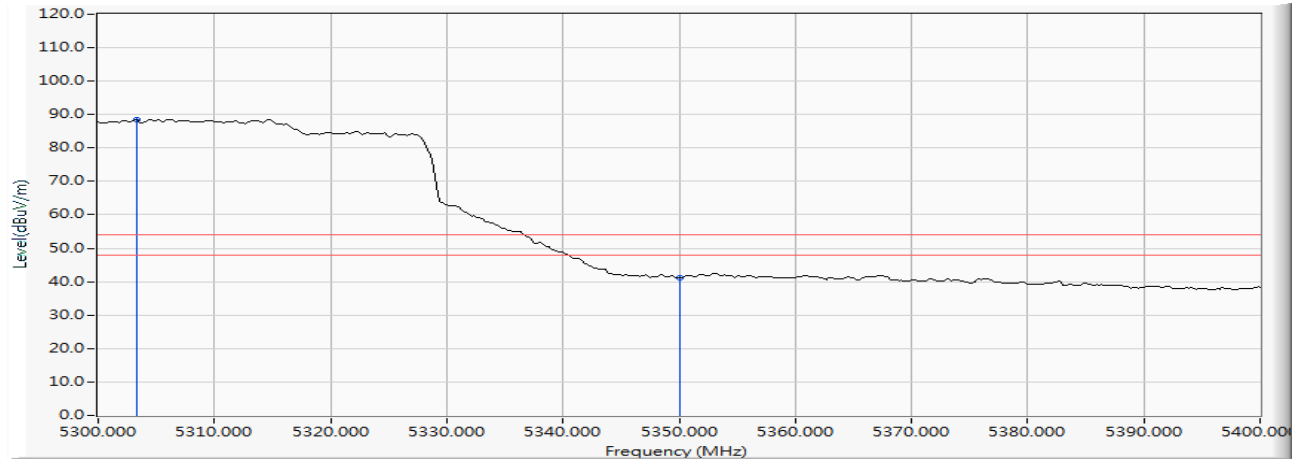


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5303.333	11.144	77.403	88.546	--	--	AVERAGE
2		5350.000	11.024	30.163	41.187	-12.813	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

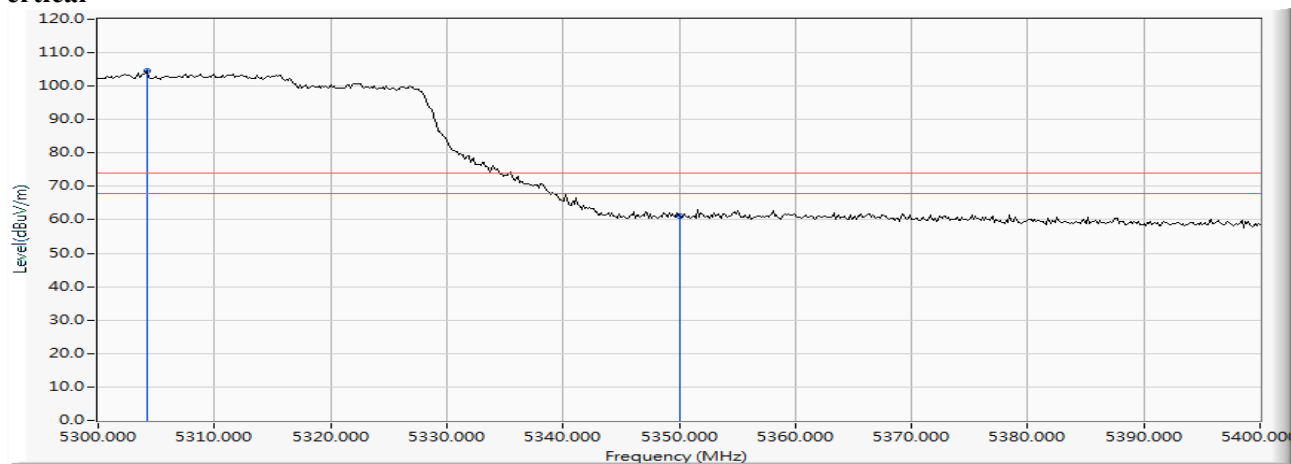
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.203	13.027	91.495	104.523	--	--	PEAK
2		5350.000	12.999	48.122	61.121	-12.879	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

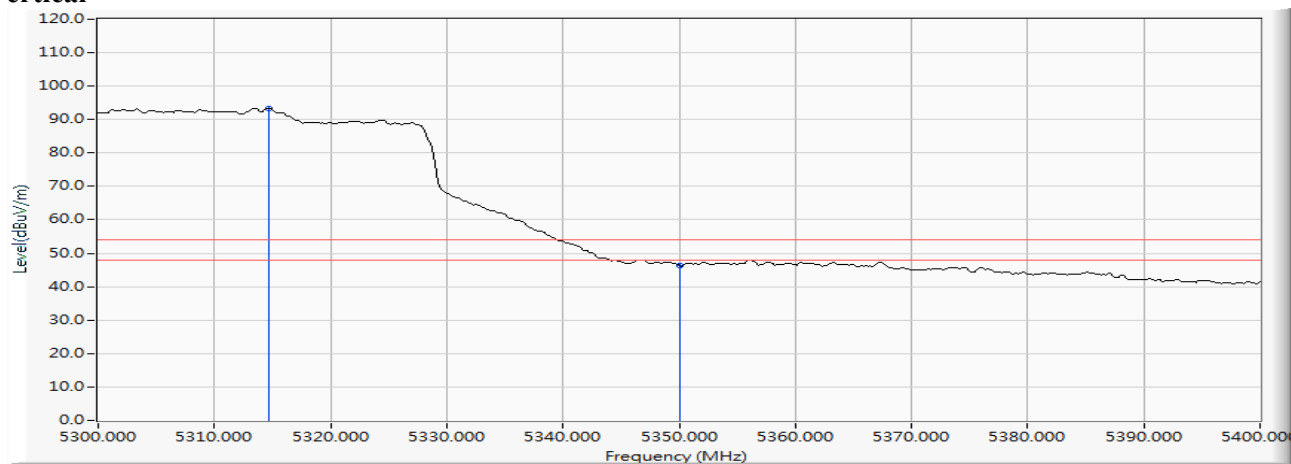Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.638	13.021	80.420	93.441	--	--	AVERAGE
2		5350.000	12.999	33.268	46.267	-7.733	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

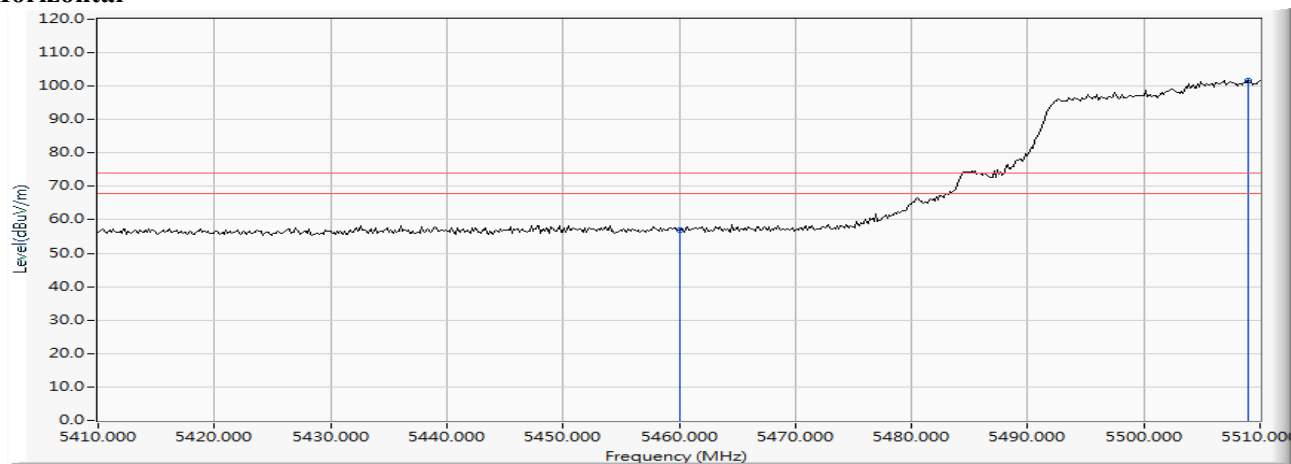


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	45.114	56.817	-17.183	74.000	PEAK
2	*	5508.986	12.172	89.509	101.681	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

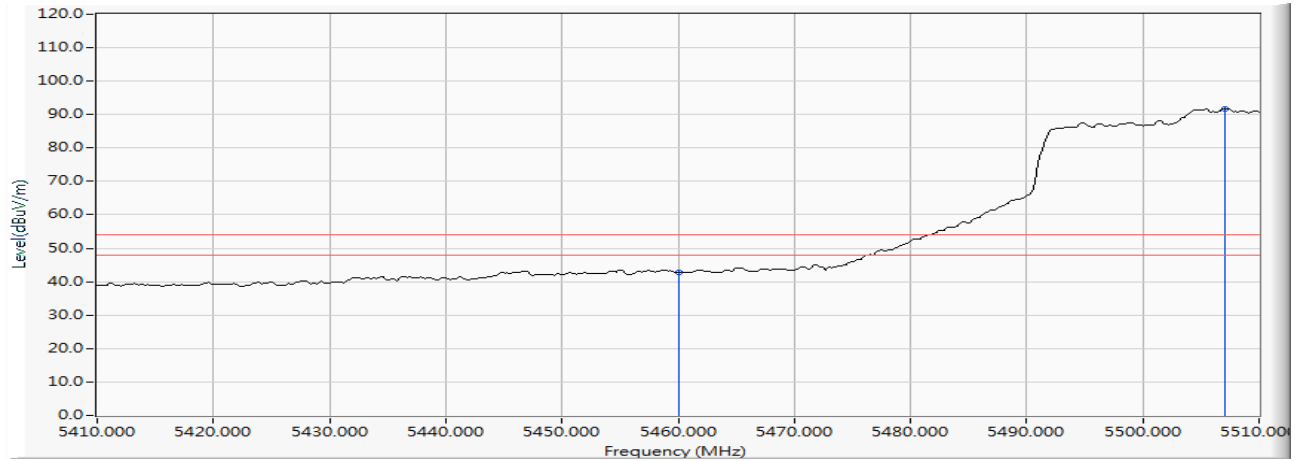


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	31.042	42.745	-11.255	54.000	AVERAGE
2	*	5507.101	12.187	79.651	91.838	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

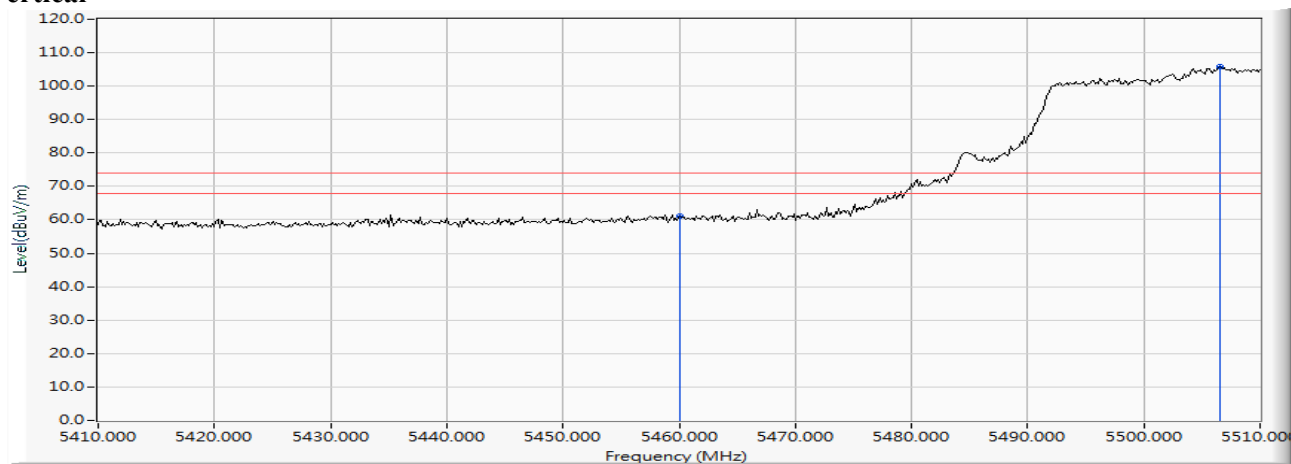Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	47.756	61.146	-12.854	74.000	PEAK
2	*	5506.522	13.635	92.139	105.774	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Vertical

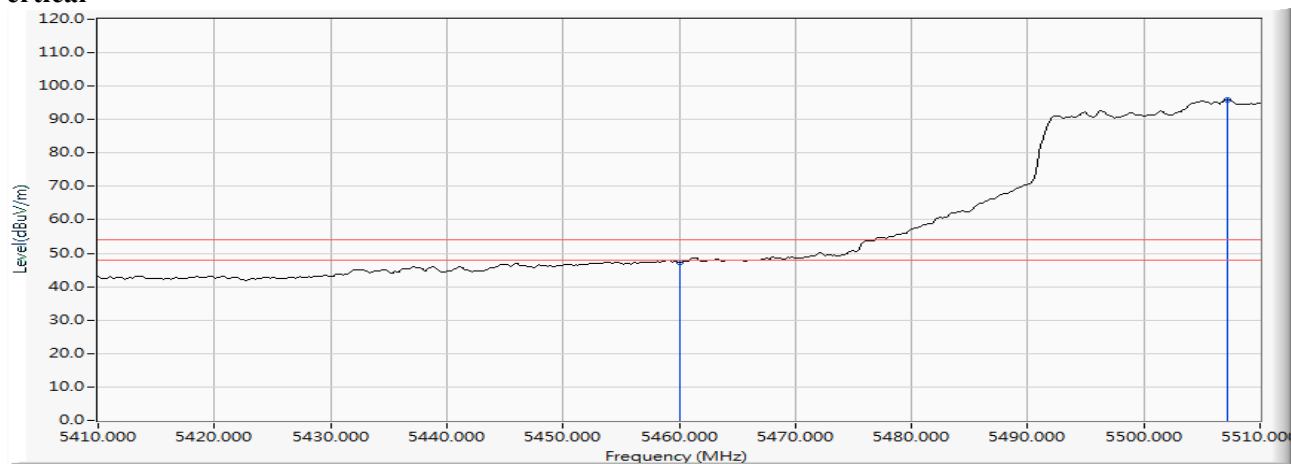


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	33.864	47.254	-6.746	54.000	AVERAGE
2	*	5507.246	13.631	82.295	95.925	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

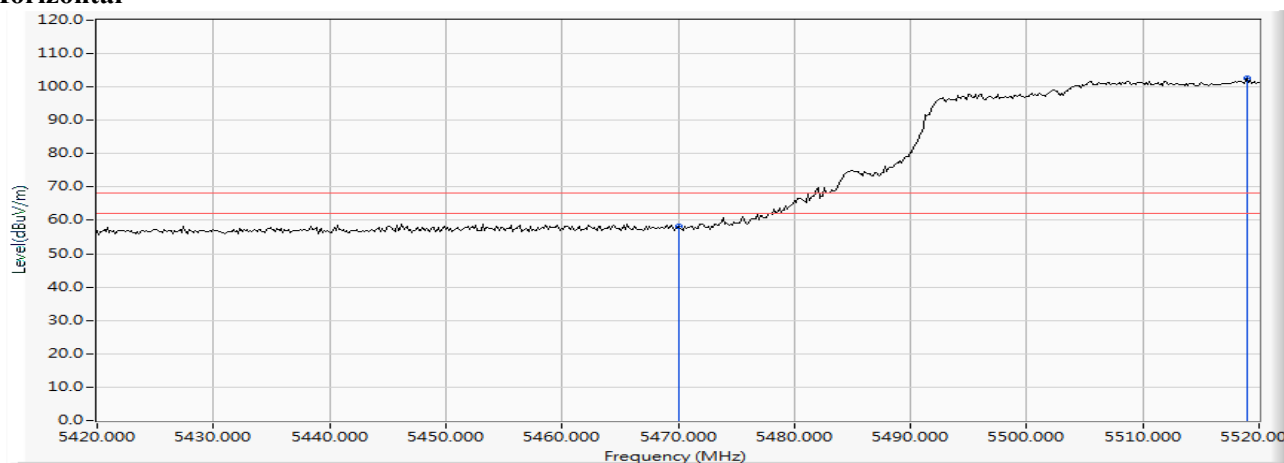

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	46.397	58.235	-9.985	68.220	PEAK
2	*	5518.986	12.091	90.431	102.522	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

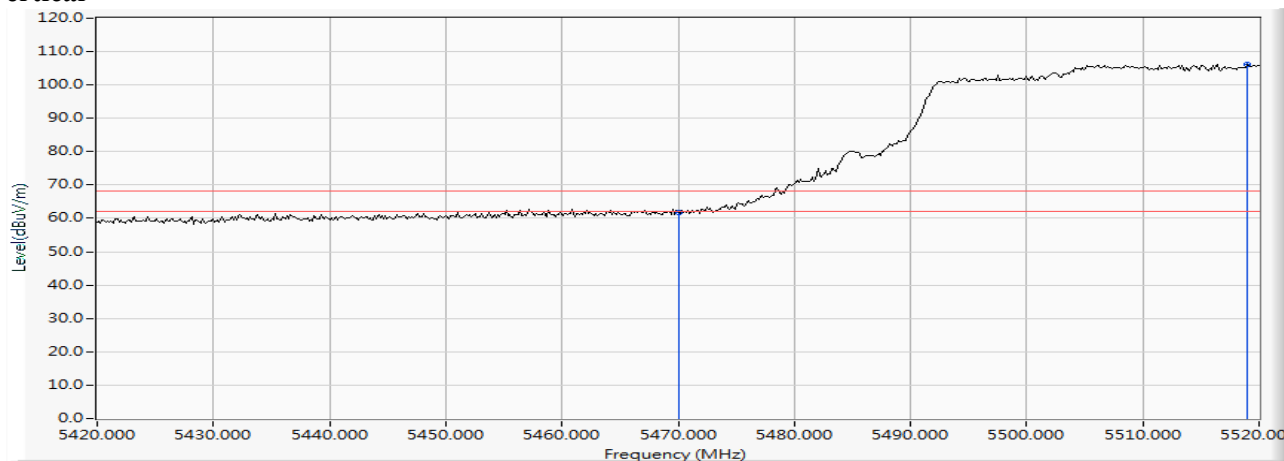Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	48.158	61.620	-6.600	68.220	PEAK
2	*	5518.986	13.555	92.473	106.028	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 155 (5775MHz)


Horizontal

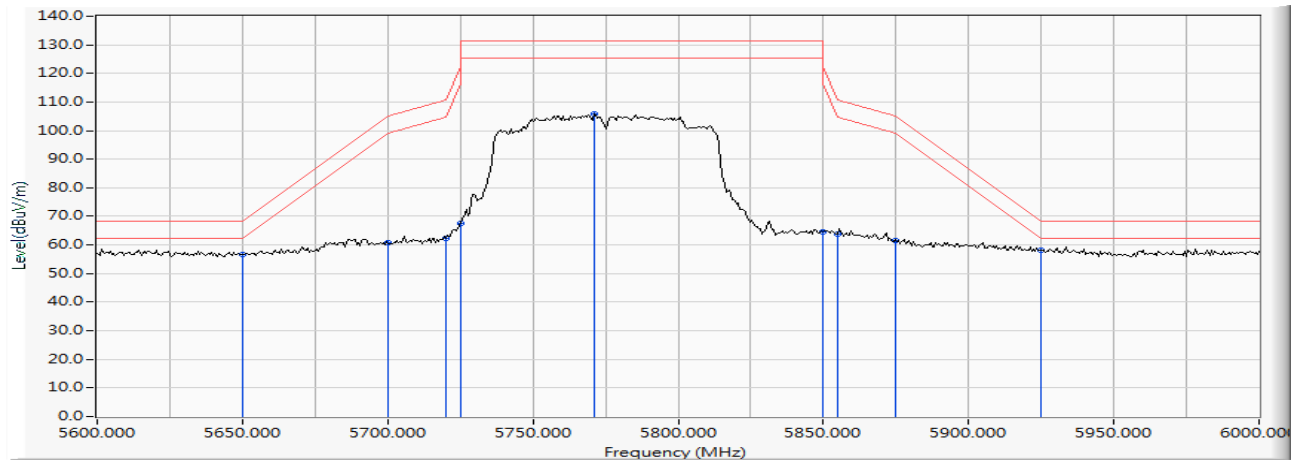

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5650.000	11.554	44.970	56.525	-11.695	68.220	PEAK
2		5700.000	11.647	49.007	60.654	-44.546	105.200	PEAK
3		5720.000	11.607	50.615	62.222	-48.578	110.800	PEAK
4		5725.000	11.592	55.848	67.440	-54.760	122.200	PEAK
5		5771.014	11.447	94.234	105.680	--	--	PEAK
6		5850.000	11.701	52.920	64.621	-57.579	122.200	PEAK
7		5855.000	11.735	51.943	63.678	-47.122	110.800	PEAK
8		5875.000	11.873	49.718	61.591	-43.609	105.200	PEAK
9	*	5925.000	12.068	46.166	58.235	-9.985	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 155 (5775MHz)


Vertical

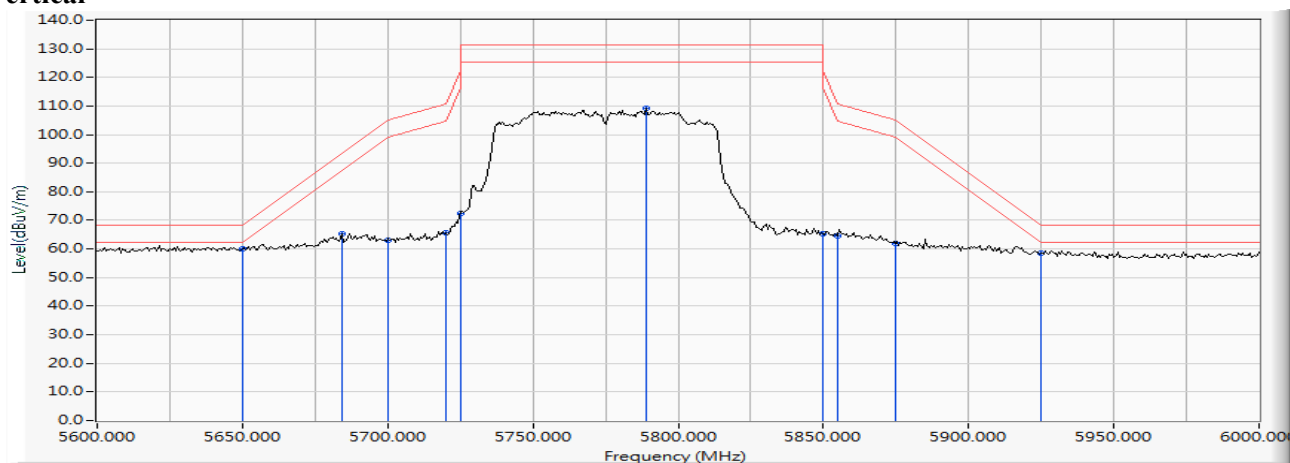

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	47.000	60.029	-8.191	68.220	PEAK
2		5684.058	13.020	52.176	65.197	-28.212	93.409	PEAK
3		5700.000	13.003	50.203	63.206	-41.994	105.200	PEAK
4		5720.000	12.947	52.809	65.756	-45.044	110.800	PEAK
5		5725.000	12.930	59.529	72.459	-49.741	122.200	PEAK
6		5788.986	12.706	96.566	109.272	--	--	PEAK
7		5850.000	12.774	52.594	65.368	-56.832	122.200	PEAK
8		5855.000	12.784	51.831	64.615	-46.185	110.800	PEAK
9		5875.000	12.825	49.233	62.058	-43.142	105.200	PEAK
10		5925.000	12.911	45.546	58.457	-9.763	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Horizontal

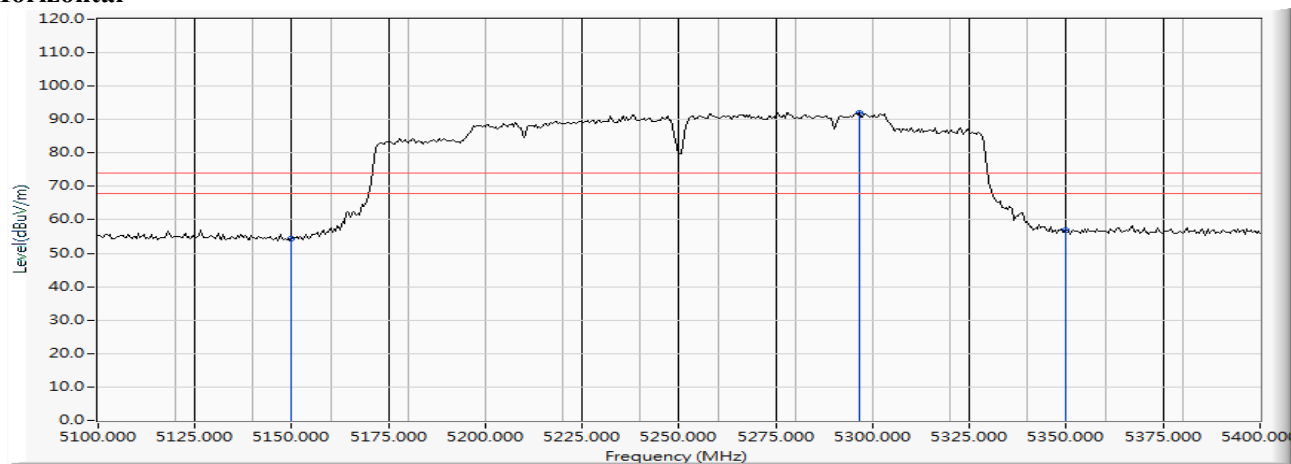


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	43.834	54.305	-19.695	74.000	PEAK
2	*	5296.522	11.116	80.936	92.052	--	--	PEAK
3		5350.000	11.024	46.032	57.056	-16.944	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Horizontal

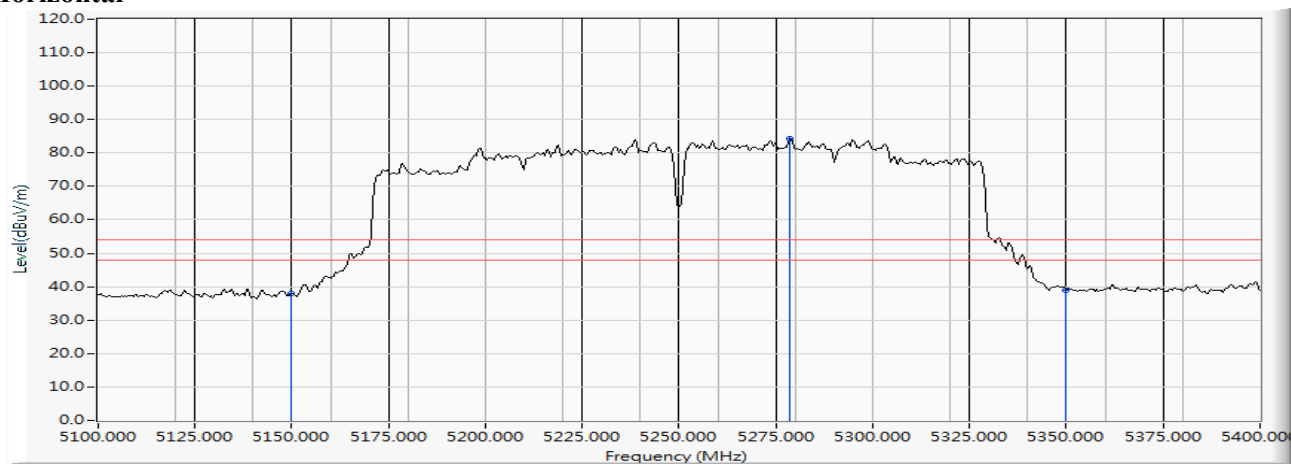


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	27.370	37.841	-16.159	54.000	AVERAGE
2	*	5278.696	10.979	73.164	84.143	--	--	AVERAGE
3		5350.000	11.024	27.928	38.952	-15.048	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

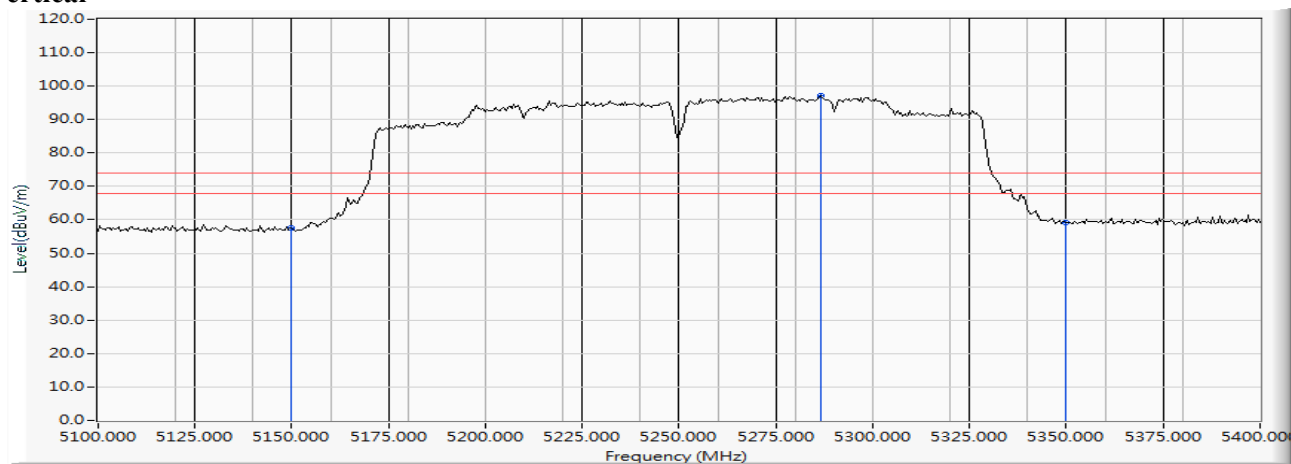
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	45.163	57.553	-16.447	74.000	PEAK
2	*	5286.522	12.968	84.109	97.077	--	--	PEAK
3		5350.000	12.999	46.229	59.228	-14.772	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

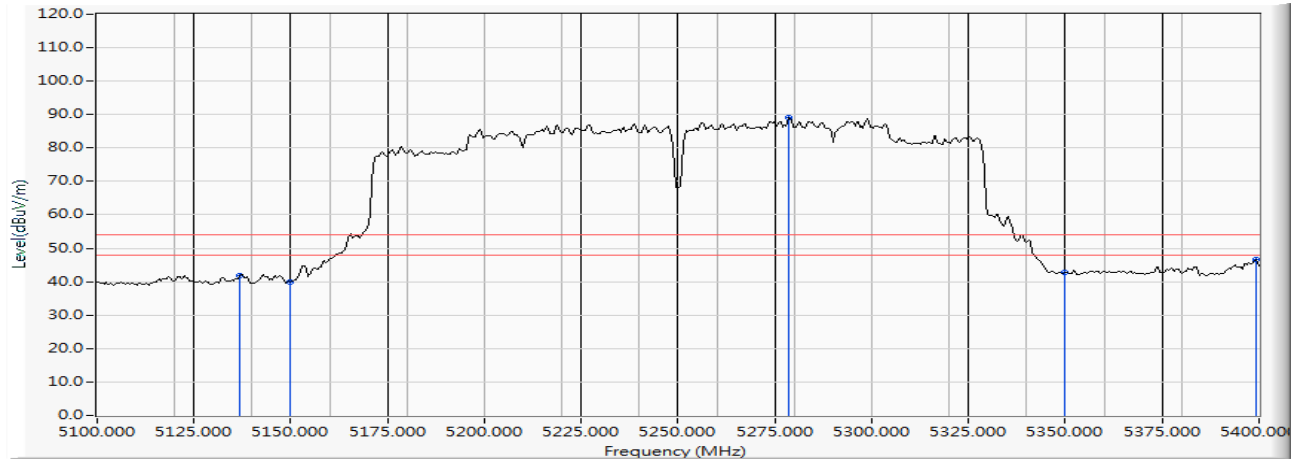Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5136.957	12.340	29.438	41.779	-12.221	54.000	AVERAGE
2		5150.000	12.390	27.463	39.853	-14.147	54.000	AVERAGE
3	*	5278.696	12.933	76.140	89.073	--	--	AVERAGE
4		5350.000	12.999	29.863	42.862	-11.138	54.000	AVERAGE
5		5399.130	12.984	33.575	46.559	-7.441	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Horizontal

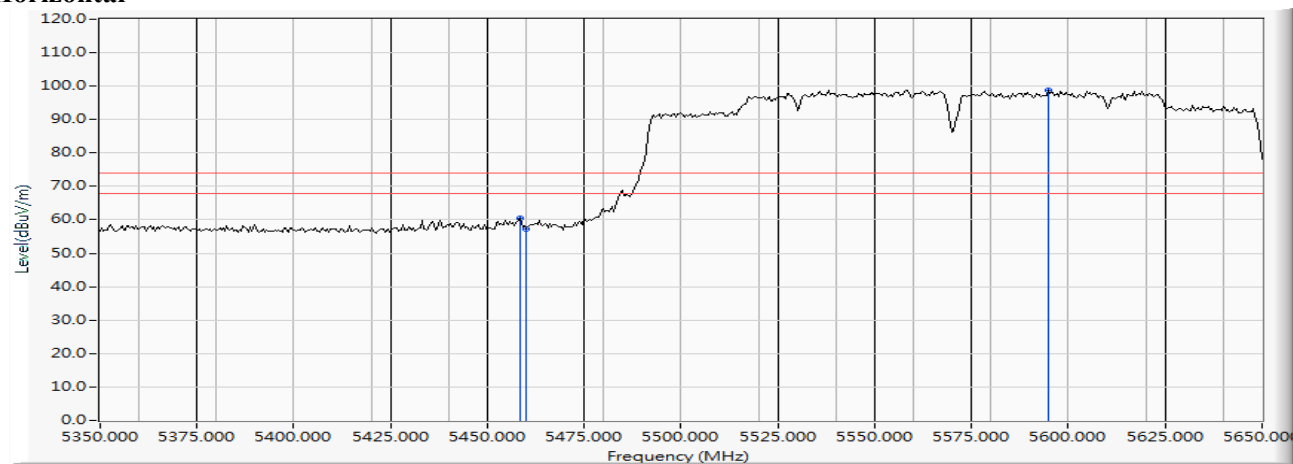


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.261	11.680	48.818	60.497	-13.503	74.000	PEAK
2		5460.000	11.703	45.475	57.178	-16.822	74.000	PEAK
3	*	5594.783	11.493	87.174	98.668	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Horizontal

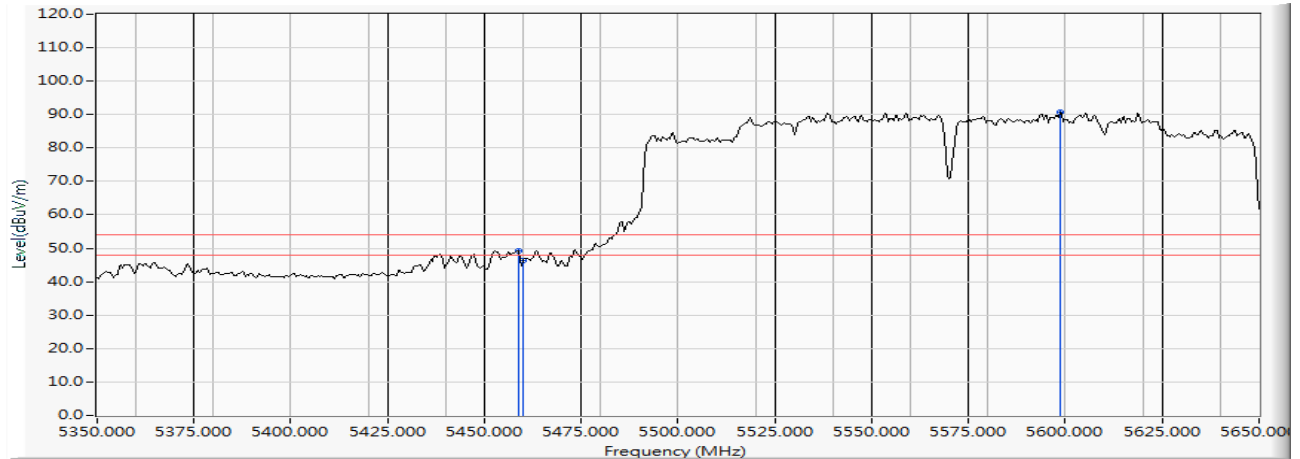


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.696	11.685	37.589	49.274	-4.726	54.000	AVERAGE
2		5460.000	11.703	34.744	46.447	-7.553	54.000	AVERAGE
3	*	5598.696	11.474	79.188	90.662	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

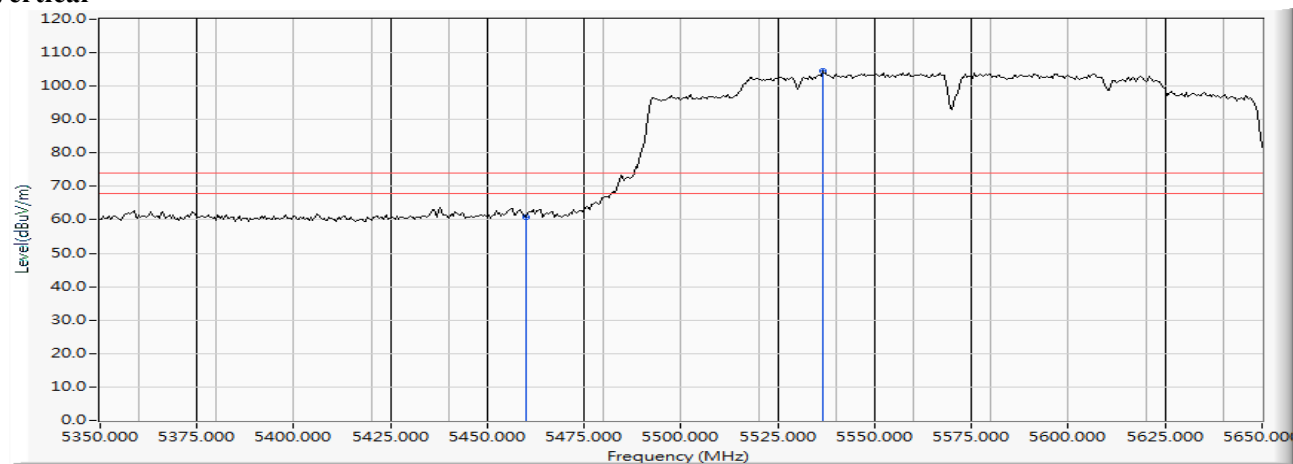
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	47.402	60.792	-13.208	74.000	PEAK
2	*	5536.522	13.442	91.077	104.519	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

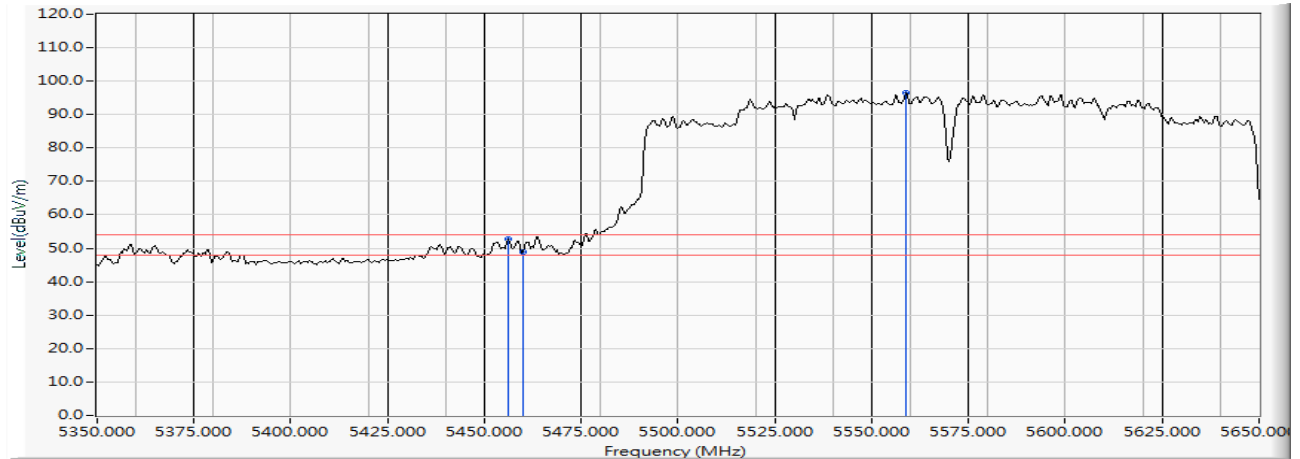Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5456.087	13.361	39.388	52.750	-1.250	54.000	AVERAGE
2		5460.000	13.390	35.594	48.984	-5.016	54.000	AVERAGE
3	*	5558.696	13.303	83.136	96.439	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Horizontal

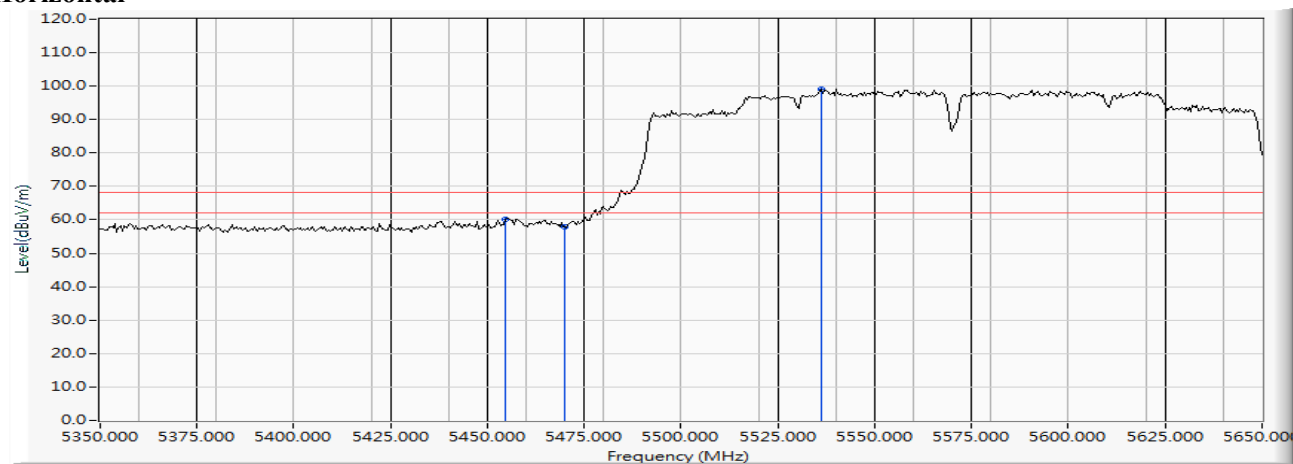

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.783	11.633	48.689	60.321	-7.899	68.220	PEAK
2		5470.000	11.838	46.059	57.897	-10.323	68.220	PEAK
3	*	5536.087	11.951	87.081	99.032	--	--	PEAK


Product : Intel® Wireless-AC 9260D2WL
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

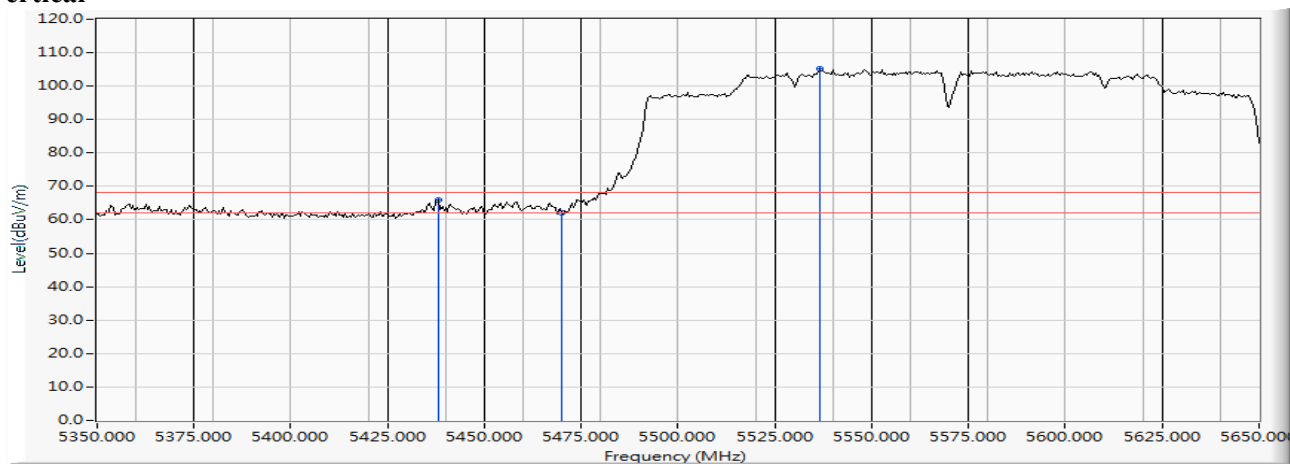Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5438.261	13.237	52.573	65.810	-2.410	68.220	PEAK
2		5470.000	13.462	48.534	61.996	-6.224	68.220	PEAK
3	*	5536.522	13.442	91.789	105.231	--	--	PEAK

5. Duty Cycle

5.1. Test Setup

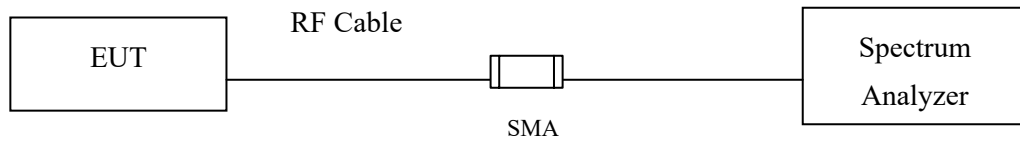

5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

5.3. Uncertainty

$\pm 2.31\text{msec}$

5.4. Test Result of Duty Cycle

Product : Intel® Wireless-AC 9260D2WL
Test Item : Duty Cycle
Test Mode : Mode 15: Transmit-SISO A

Duty Cycle Formula:


$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$

$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0362	2.0971	97.10	0.13
802.11n20	1.8942	1.9449	97.39	0.11
802.11n40	0.8870	0.9884	89.74	0.47
802.11ac80	0.4304	0.5029	85.59	0.68
802.11ac160	0.2565	0.2971	86.34	0.64

802.11a (SISO A)

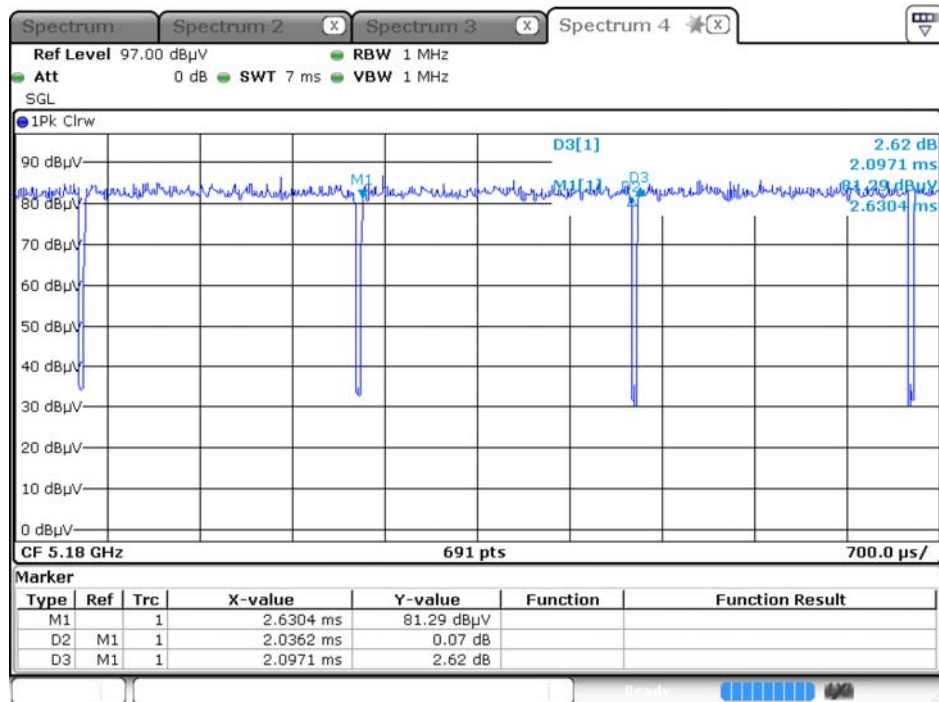


Date: 2.JAN.2007 03:57:04

802.11n20 (SISO A)

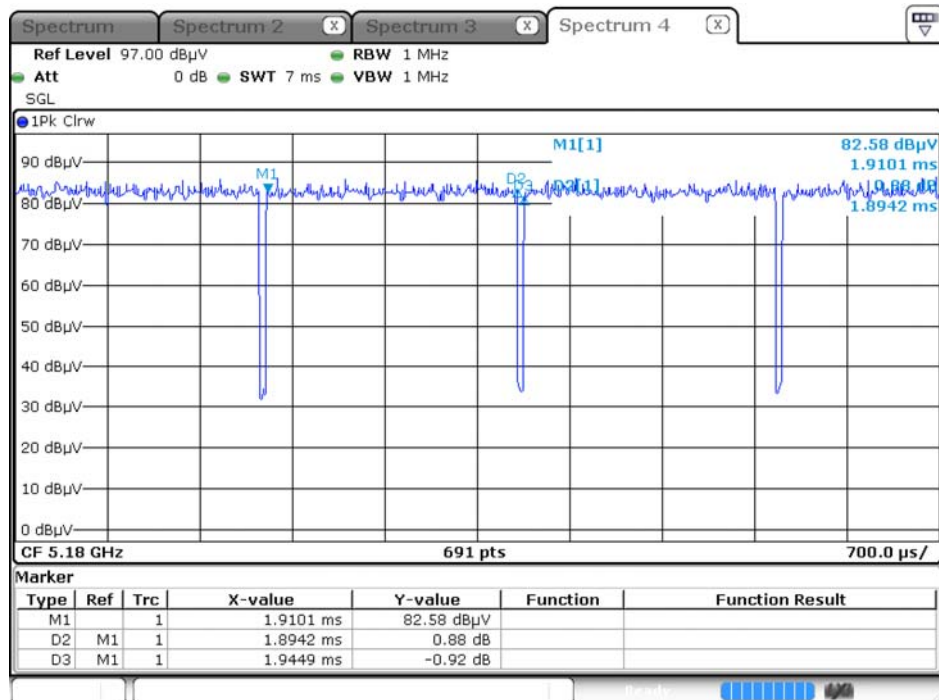


Date: 2.JAN.2007 04:08:42

802.11n40 (SISO A)

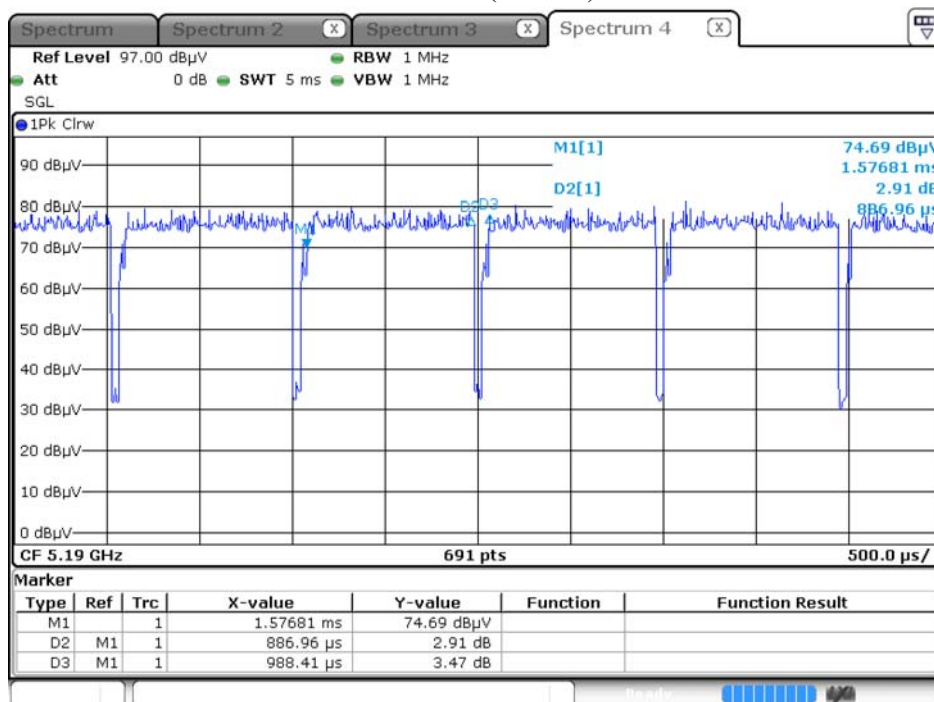


Date: 2.JAN.2007 05:23:39

802.11ac80 (SISO A)

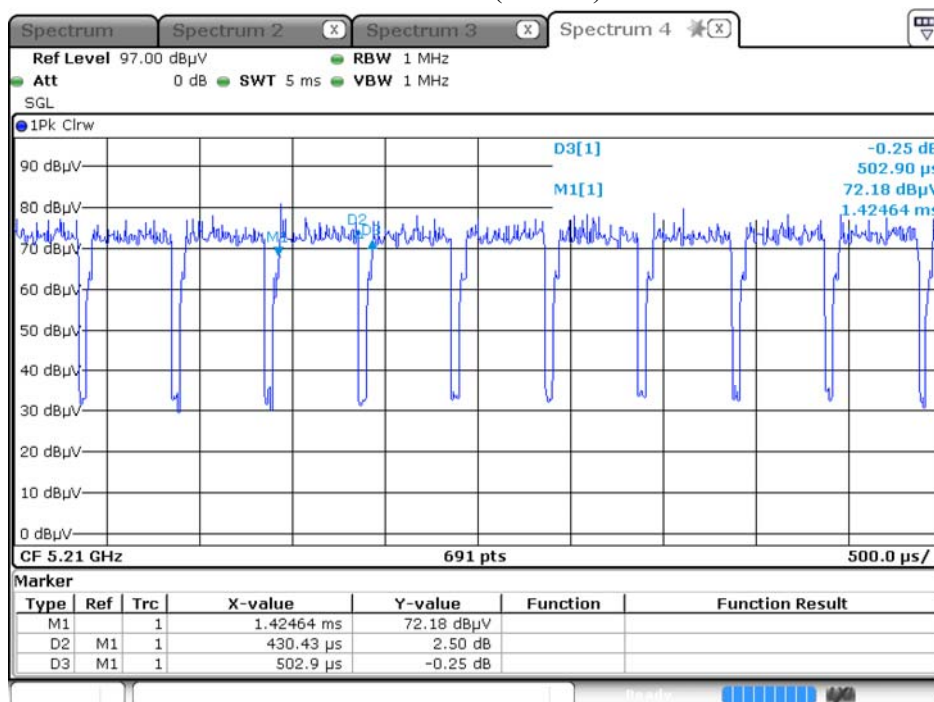

Date: 2.JAN.2007 05:36:42

802.11ac160 (SISO A)

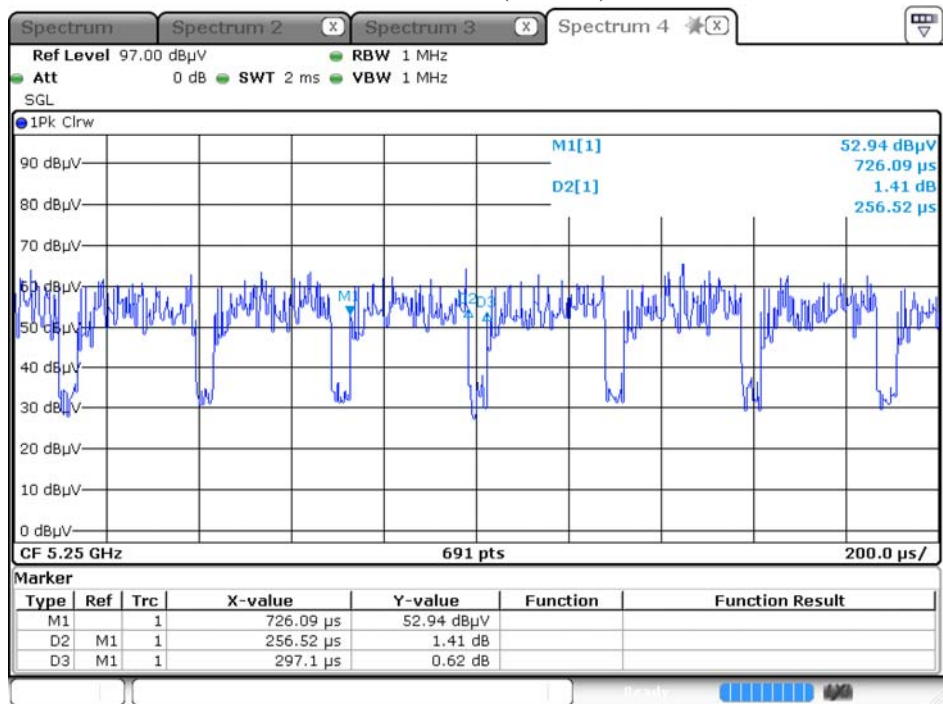

Date: 2. JAN. 2007 06:09:54

Product : Intel® Wireless-AC 9260D2WL
Test Item : Duty Cycle
Test Mode : Mode 16: Transmit-SISO B

Duty Cycle Formula:


$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$

$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0493	2.1101	97.12	0.13
802.11n20	1.8971	1.9478	97.40	0.11
802.11n40	0.9058	0.9855	91.91	0.37
802.11ac80	0.4275	0.5073	84.29	0.74
802.11ac160	0.2493	0.2986	83.50	0.78

802.11a (SISO B)

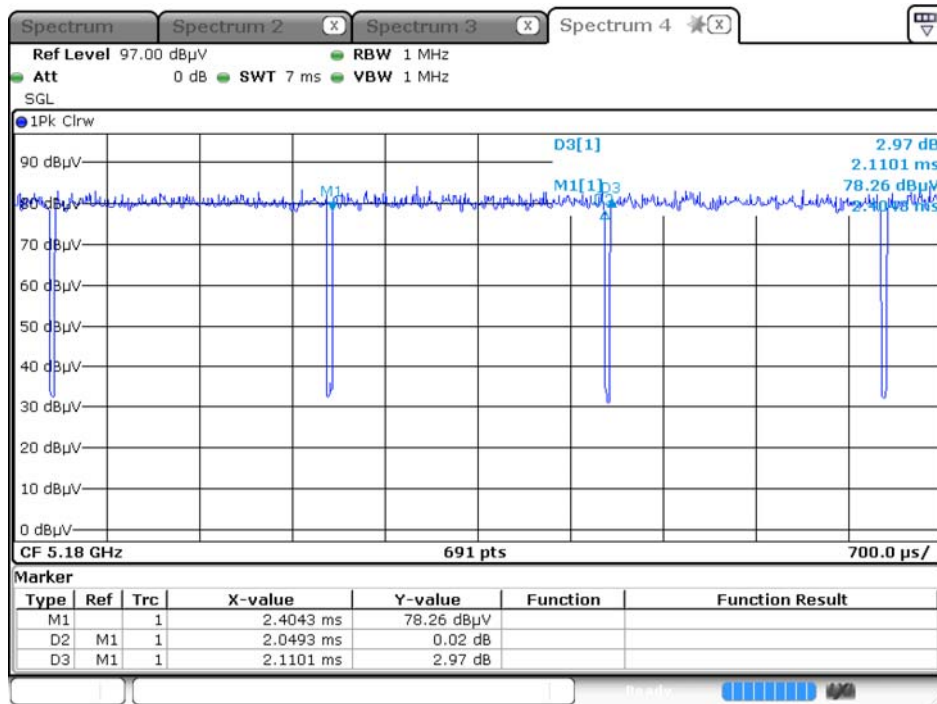


Date: 4.JAN.2007 00:46:08

802.11n20 (SISO B)

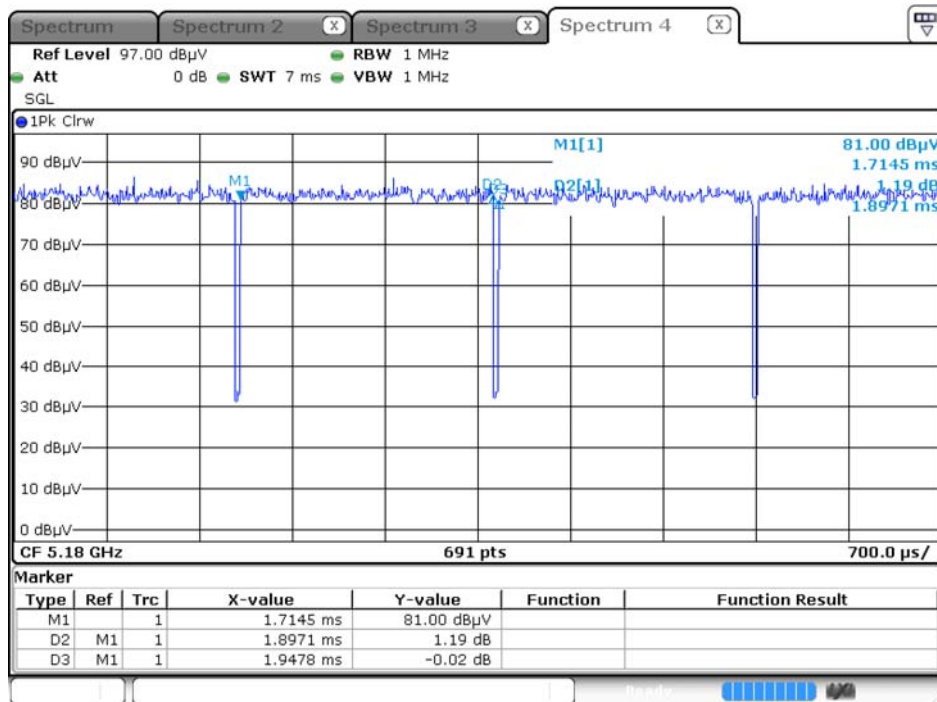


Date: 4.JAN.2007 00:55:33


802.11n40 (SISO B)

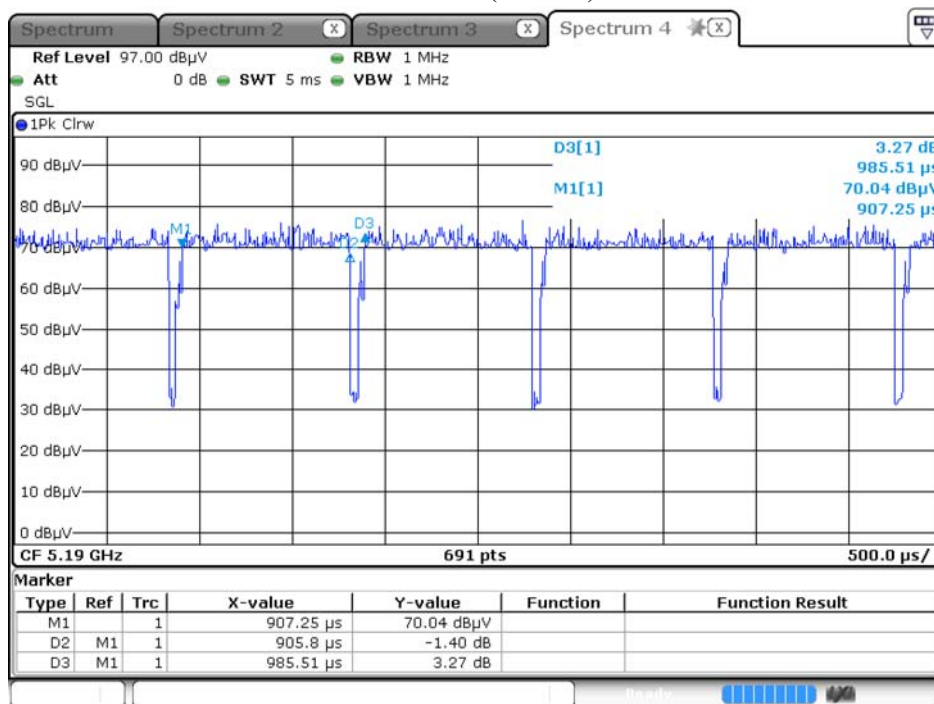

802.11ac80 (SISO B)

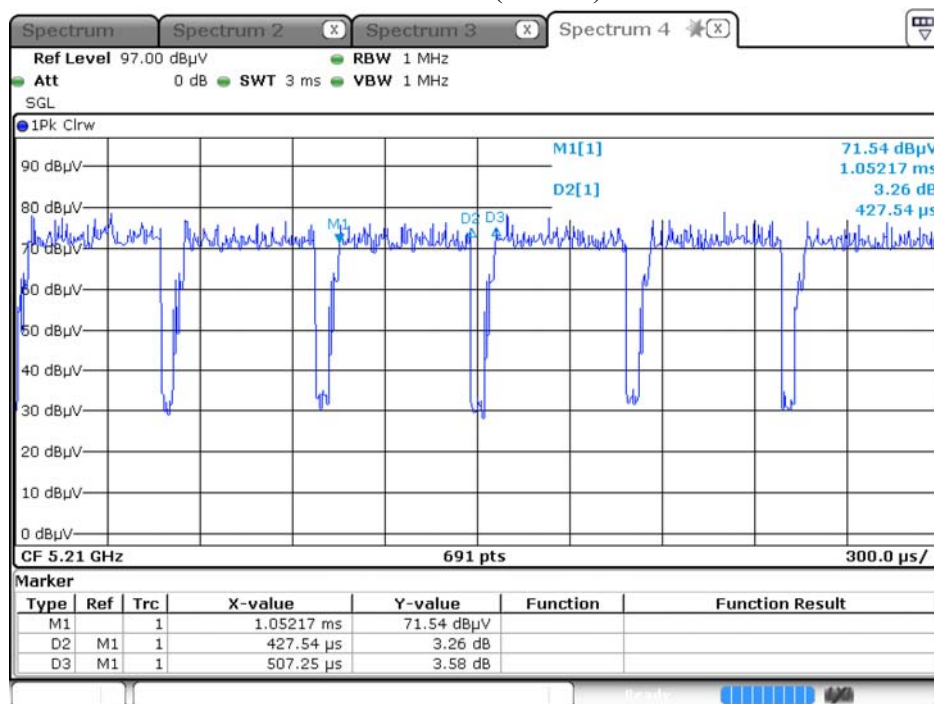

802.11ac160 (SISO B)

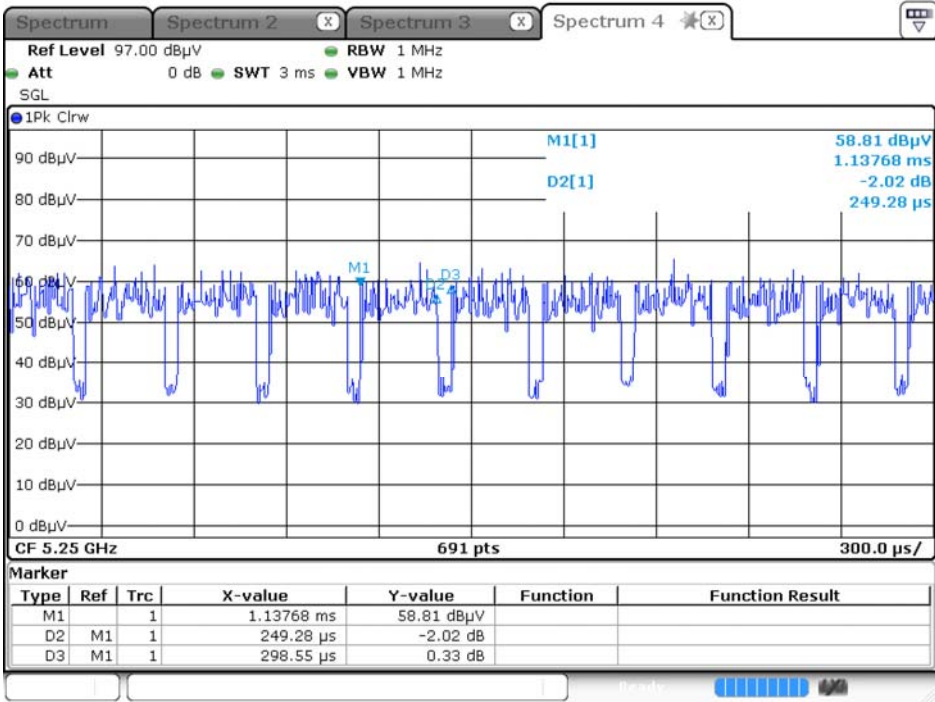

Date: 4.JAN.2007 02:19:13

Product : Intel® Wireless-AC 9260D2WL
Test Item : Duty Cycle
Test Mode : Mode 17: Transmit-MIMO

Duty Cycle Formula:


$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$

$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11n20	0.9710	1.0290	94.37	0.25
802.11n40	0.4565	0.5435	84.00	0.76
802.11ac80	0.2420	0.3464	69.87	1.56
802.11ac160	0.1508	0.2073	72.74	1.38

802.11n20 (MIMO)

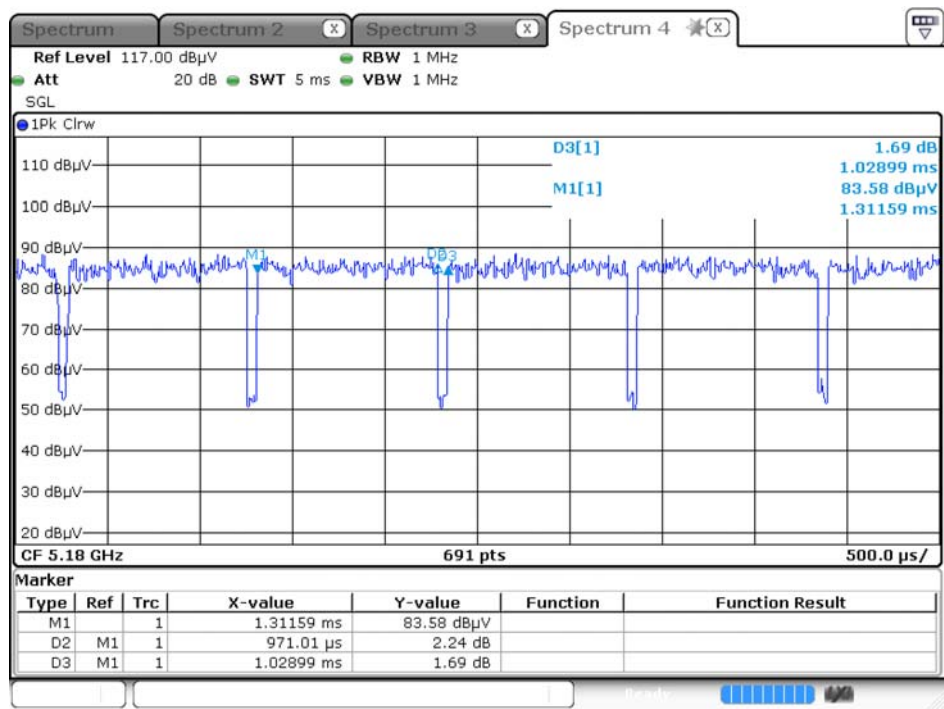


Date: 4.JAN.2007 10:02:42

802.11n40 (MIMO)

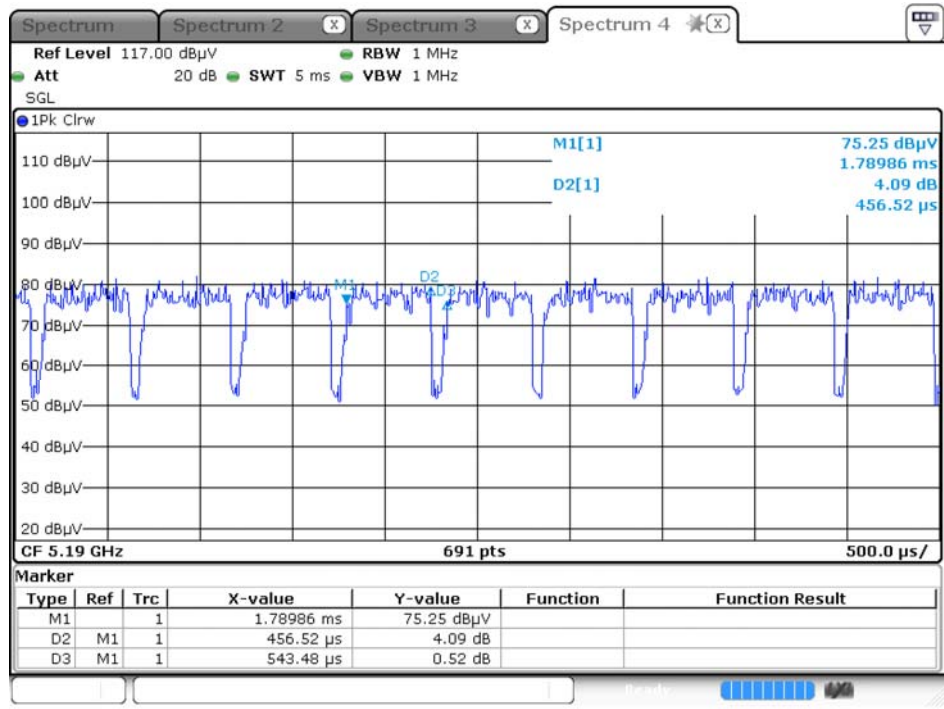


Date: 4.JAN.2007 10:13:52

802.11ac80 (MIMO)

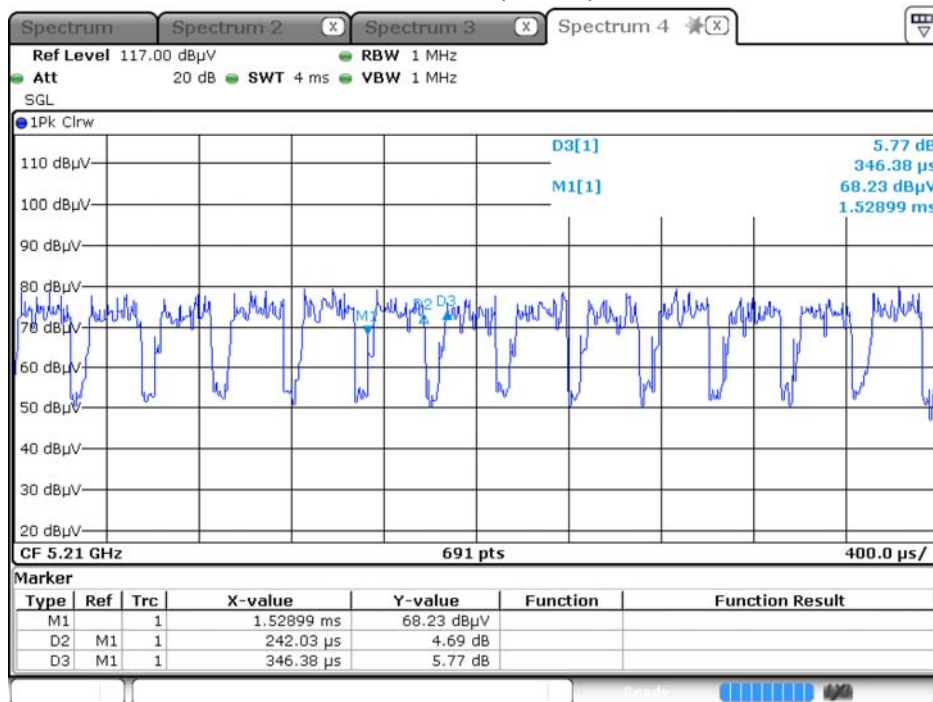

Date: 4.JAN.2007 10:16:55

802.11ac160 (MIMO)

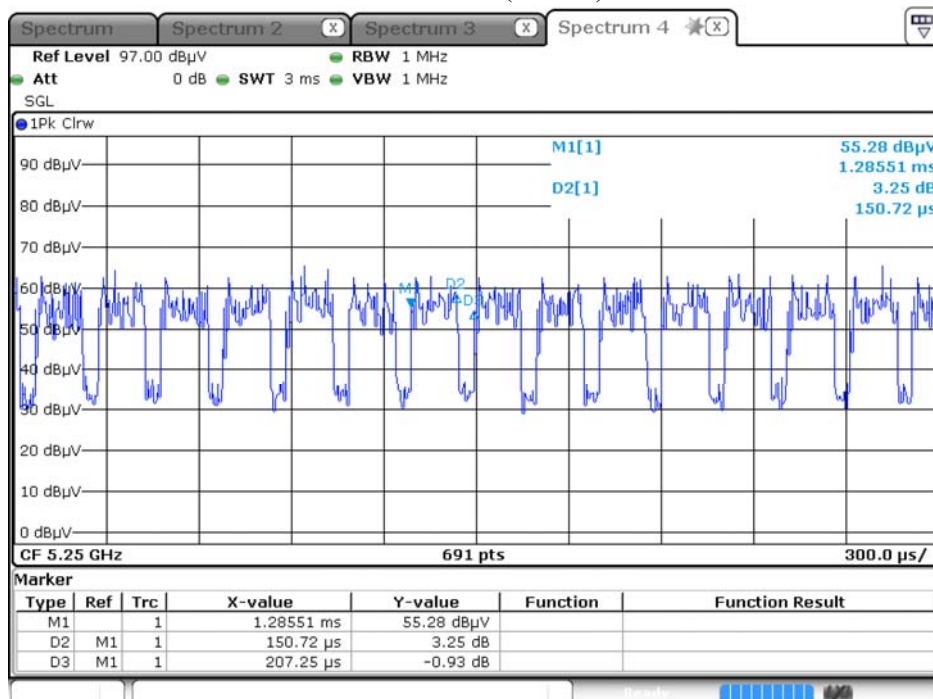

Date: 4.JAN.2007 10:53:34

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.