CERTIFICATE #3478.01

TEST REPORT

EUT Description	**WLAN and BT, 1x1 PCIe M.2 1216 adapter card**
Brand Name	**Intel® Wi-Fi 6 AX101**
Model Name	**AX101D2W**
FCC ID	**PD9AX101D2**
Date of Test Start/End	**2022-08-29 / 2022-09-12**
Features	**802.11ax, Dual Band, 1x1 Wi-Fi + Bluetooth® 5.1 Diversity Antenna** (see section 5)

Applicant	**Intel Mobile Communications**
Address	**100 Center Point Circle, Suite 200** **Columbia, South Carolina 29210** **USA**
Contact Person	**Steven Hackett**
Telephone/Fax/ Email	**steven.c.hackett@intel.com**

Reference Standards	**FCC CFR Title 47 Part 15 E** (see section 1)

Test Report identification	**220621-01.TR02**
Revision Control	**Rev. 00** **This test report revision replaces any previous test report revision** (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by	Reviewed by
Digitally signed by Khodor RIDA Date: 2022.09.19 20:39:28 +02'00'	Digitally signed by Ines KHARRAT Date: 2022.09.19 21:07:37 +02'00'
Khodor RIDA (Test Engineer Lead)	Ines KHARRAT (Technical Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods 3
2. General conditions, competences and guarantees 3
3. Environmental Conditions 3
4. Test samples 4
5. EUT Features 5
6. Remarks and comments 6
7. Test Verdicts summary 6
7.1. 802.11 A/N/AC/AX – U-NII- 4 6
8. Document Revision History 6
A.1 MEASUREMENT SYSTEM 7
A.2 TEST EQUIPMENT LIST 9
A.3 MEASUREMENT UNCERTAINTY EVALUATION 11
B.1 TEST CONDITIONS 12
B.2 TEST RESULTS TABLES 13
B.2.1 6DB & 99% BANDWIDTH 13
B.2.2 MAXIMUM OUTPUT POWER & MAXIMUM POWER SPECTRAL DENSITY 15
B.2.3 UNDESIRABLE EMISSION LIMITS : OUT OF BAND (CONDUCTED) 19
B.2.4 RADIATED SPURIOUS EMISSION 20
B.3 TEST RESULTS SCREENSHOT 37
B.3.1 6DB BANDWIDTH 37
B.3.2 99% BANDWIDTH 41
B.3.3 MAXIMUM OUTPUT POWER 45
B.3.4 MAXIMUM POWER SPECTRAL DENSITY (PSD) 49
B.3.5 UNDESIRABLE EMISSION LIMITS : OUT OF BAND (CONDUCTED) 53
B.3.6 UNDESIRABLE EMISSION LIMITS : OUT OF BAND PEAK (CONDUCTED) 59
C.1 TEST SETUP 63
C.2 TEST SAMPLE 65

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2021-05-03 online Edition 2. FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2020-10-01 Edition 3. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 4. FCC OET KDB 789033 D02 v02r01 - Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) devices part 15, subpart E 5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. 6. FCC OET KDB 291074 D01 v01 - General Requirements 7. FCC OET KDB 291074 D02 v01 - EMC Measurement 8. FCC OET KDB 291074 D03 v01 - QA General Questions and Answers 9. FCC OET KDB 291074 D04 v01 – UN5GHz Checklist v01

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	23.5ºC ± 0.6ºC
Humidity	41.1% ± 4.2%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200928-04.S09	RF module	AX101D2W	D8F8834C5810	2021-11-03	Used for 1-18 GHz Radiated Spurious Emission tests
	200928-02.S11	Adaptor	HrP M2 Adaptor JnP 1216	6961919-172	2020-10-27	
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	220225-03.S23	Extender	ADEXELEC	-	2022-03-14	
	170000-01.S13	Laptop	Latitude 5470	FT6LMC2	2017-05-30	
	200611-03.S24	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
	200611-03.S25	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
#02	200928-04.S09	RF module	AX101D2W	D8F8834C5810	2021-11-03	Used for 30 MHz-1 GHz and 18GHz-40GHz Radiated Spurious Emission tests
	200928-03.S01	Adaptor	HrP1 2230 Cfg 36.1	WFM:17B8587EA1	2020-10-02	
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	200611-03.S31	Extender	ADEXELEC	-	2020-08-19	
	200504-04.S07	Laptop	Latitude 5401	BVHLK13	2020-06-02	
	200611-03.S22	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
	200611-03.S23	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
#03	200928-04.S02	WiFi Module	AX101D2W	D8F8834C5C43	2020-11-03	RF Conducted
	210903-02.S53	Laptop	Latitude E5450	J71V562	2021-10-06	
	180717-03.S16	Extender	EXTENDER QNJ A1	6510818-183	2018-08-21	

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® Wi-Fi 6 AX101
Model Name	AX101D2W
Software Version	DRTU_02227_99.0.73
Driver Version	99.0.73.8
Prototype / Production	Production
Supported Radios	802.11b/g/n/ax: 2.4 GHz (2400.0 – 2483.5 MHz) 802.11a/n/ac/ax: 5.2 GHz (5150.0 – 5350.0 MHz) 5.6 GHz (5470.0 – 5725.0 MHz) 5.8 GHz (5725.0 – 5895.0 MHz) Bluetooth 5.1: 2.4 GHz (2400.0 – 2483.5 MHz)
Antenna Information	

Transmitter	Chain A – Diversity 1	Chain A – Diversity 2
Manufacturer	Intel	Intel
Antenna type	PIFA antenna	PIFA antenna
Part number	WRF-BR-PIFA-V3.2	WRF-BR-PIFA-V3.2
Declared antenna gain (dBi)	+5	+5

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report
2. Only the worst-case plot per 802.11 mode and test case measurements have been reported excepted for band edge measurements where all plots are reported.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII- 4

FCC part	Test name	Verdict
15.407 (a) (3)	Maximum output power	P
14.407 (e)	6dB Emission Bandwith	P
15.407 (a) (3)	Power spectral density	P
15.407 (b) (5)	Undesirable emissions limits: out of band (conducted)	P
15.407 (b) (3) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	V.Kaculini, K.Khatib	First Issue

Annex A. Test & System Description

A.1 Measurement System

Measurements were performed using the following setups, made in accordance to the general provisions of ANSI C63.10 2013.
The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

Conducted test setup

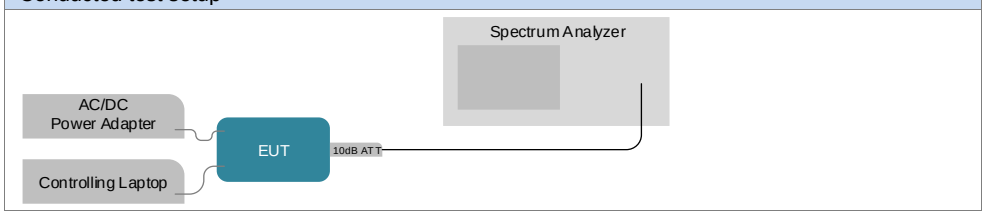

Radiated test setup

Radiated Setup 30 MHz - 1 GHz

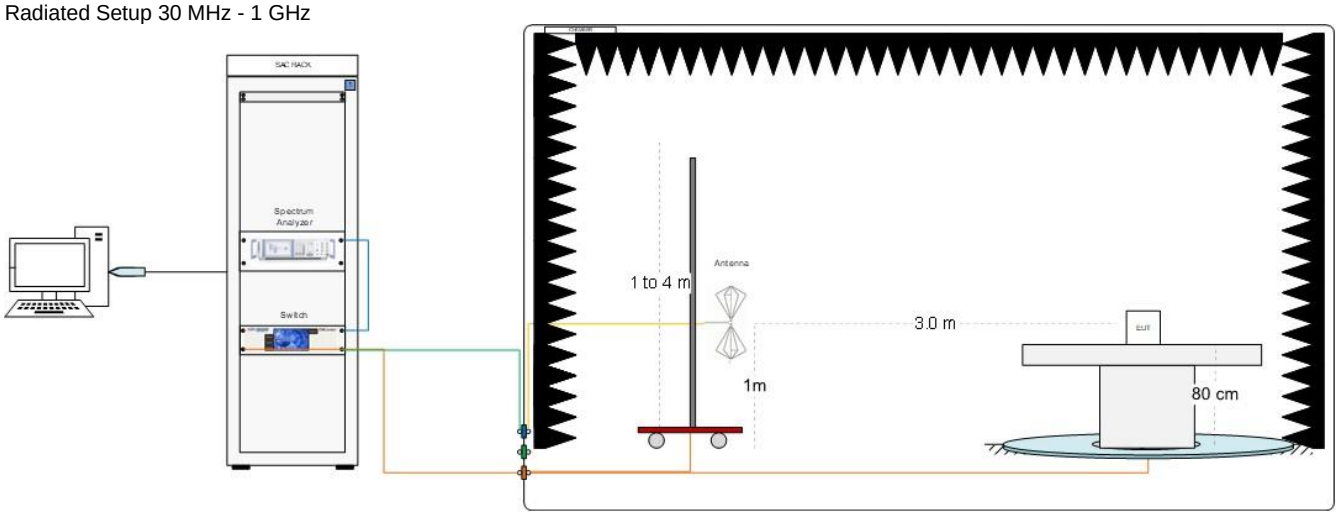

Radiated Setup 1 GHz – 9.5 GHz

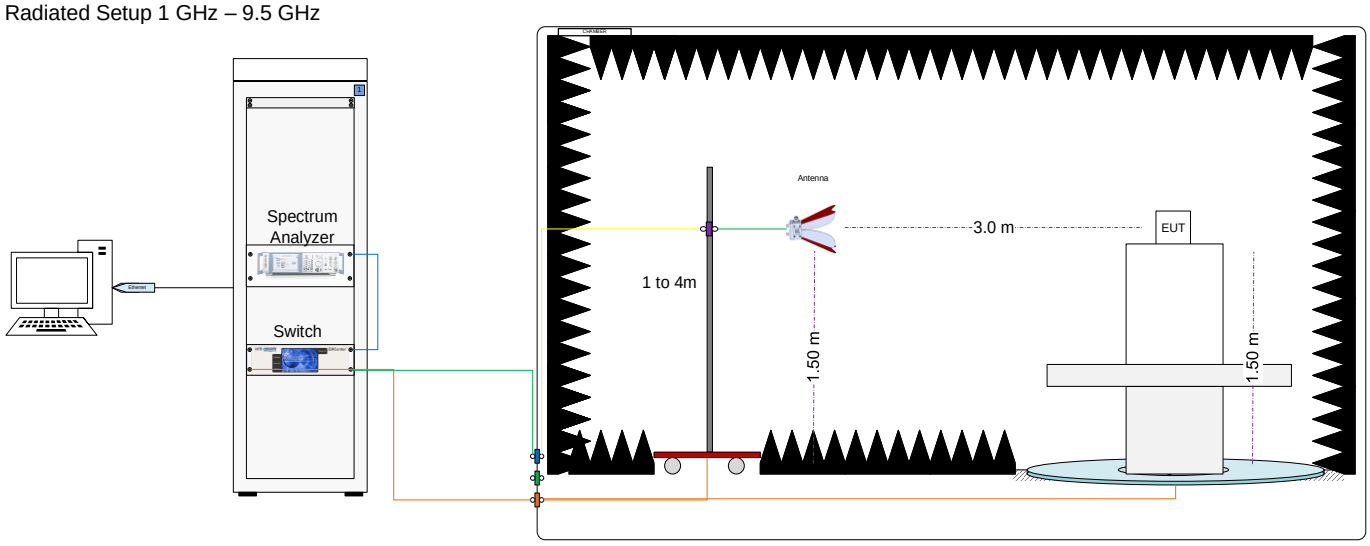

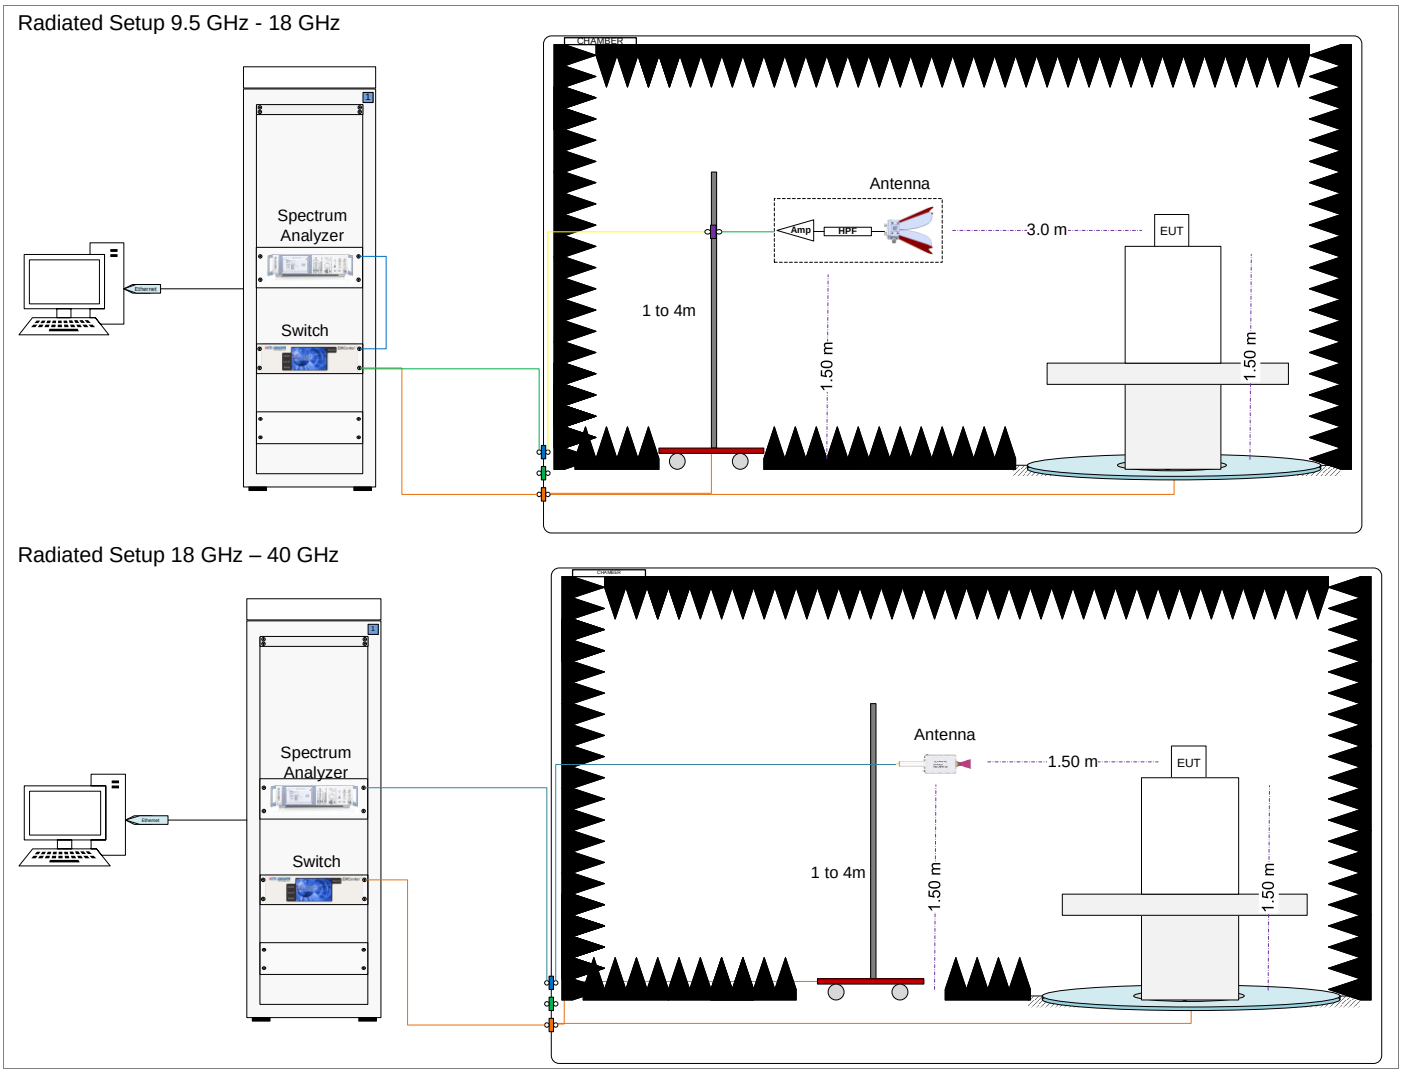

Sample Calculation

The spurious received voltage V(dBµV) in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

F (dB/m)= Rx Antenna Factor (dB/m) + Cable losses (dB) – Amplifiers Gain (dBi)
E (dBµV/m) = V(dBµV) + F (dB/m)

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{SpecLimit} = E_{Meas} + 20*\log(D_{Meas}/D_{SpecLimit})$$

where

$E_{SpecLimit}$ is the field strength of the emission at the distance specified by the limit, in dBµV/m
E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m
D_{Meas} is the measurement distance, in m
$D_{SpecLimit}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
265-000	Spectrum Analyzer	FSV30	101318	Rohde & Schwarz	2022-06-22	2024-06-22
019-000	RF cable 100cm	PE360-100CM	N/A	PASTERNACK	2022-09-02	2023-03-02
019-002	10dB Attenuator + MH4	N/A	N/A	N/A	2022-09-02	2023-03-02
322-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B89702	AVTECH	2021-09-02	2023-09-02
413-000	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
006-000	Anechoic chamber	FACT 3	5720	ETS Lindgren	2022-01-12	2024-01-12
006-001	Turntable	-	-	ETS Lindgren	N/A	N/A
006-008	Measurement Software v11.30.00	EMC32	100623	Rohde & Schwarz	N/A	N/A
147-000	Spectrum analyzer	FSW43	101847	Rohde & Schwarz	2020-11-02	2022-11-02
006-002	Switch & Positioning	EMC center	00159757	ETS Lindgren	N/A	N/A
006-011	Boresight antenna mast	BAM4.0-P	P/278/2890.01	Maturo	N/A	N/A
006-019	Biconical antenna 30 MHz – 1 GHz	UBAA9115 + BBVU9135 + DGA9552N	0286 + CH 9044	Schwarzbeck	2022-02-01	2024-02-01
056-000	Horn Antenna 3117 + Amplifier + HPF6	3117	00157736 + 00157993	ETS-Lindgren	2022-04-25	2024-04-25
007-008	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2021-08-05	2023-08-05
059-000	Double ridged horn antenna	3117-PA	00201542	ETS-Lindgren	2021-08-05	2023-08-05
006-059*	RF Cable 7.0m	R286304174	20.46.369	Radiall	2022-09-05	2023-03-05
006-051*	RF Cable 1.0m	CBL-1.5M-SMSM+	202879	Mini-Circuits	2022-09-05	2023-03-05
006-030*	RF Cable 1.2m	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	2022-09-05	2023-03-05
006-034*	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utilflex	2022-09-05	2023-03-05
026-018*	RF Cable 1.2m	0500990991200KE	18.23.179	Radiall	2022-09-05	2023-03-05
006-039*	RF Cable 2.5m	0500990992500KE	19.23.395	Radiall	2022-09-05	2023-03-05
365-000	Temperature & Humidity logger	RA12E-TH1-RAS	00-80-A3-E1-6E-55	Avtech	2021-03-08	2023-03-08

N/A: Not Applicable
*The equipment was not used during out of calibration period

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
007-000	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2021-09-14	2023-09-14
007-002	Turntable	-	-	ETS Lindgren	N/A	N/A
007-003	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
007-006	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
007-005	Measurement SW, V11.20.00	EMC32	100401	Rohde & Schwarz	N/A	N/A
127-000	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2021-01-15	2023-01-15
007-007	Double Ridge Horn (1-18GHz)	3117	00152266	ETS Lindgren	2022-03-29	2024-03-29
066-000	Horn Antenna 3117 + Amplifier + HPF9	3117	00169546 | ID 264-000 + SN 1	ETS-Lindgren	2022-07-14	2024-07-14
007-008	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2021-08-05	2023-08-05
059-000	Double ridged horn antenna	3117-PA	00201542	ETS-Lindgren	2021-08-05	2023-08-05
007-022*	RF Cable 1-18GHz, 1.5m	0501050991200GX	19.23.493	Radiall	2022-09-05	2023-03-05
007-020*	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	2022-09-05	2023-03-05
007-011*	RF Cable 1-18GHz – 6.5m	140-8500-11-51	001	Spectrum	2022-09-05	2023-03-05
007-015*	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	2022-09-05	2023-03-05
007-014*	RF Cable 18-40 GHz 6m	R286304009	1747364	Radiall	2022-09-05	2023-03-05
007-023*	RF Cable 1m DC-40GHz	PE360-100CM	-	Pasternack	2022-09-05	2023-03-05
007-018*	RF Cable 1-9.5GHz 1.2m	0500990991200KE	-	Radiall	2022-09-05	2023-03-05
325-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9B7C6	Avtech	2022-01-17	2024-01-17

N/A: Not Applicable
*The equipment was not used during out of calibration period

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
412-000	DRTU Power finder V2.0	-	-	Intel	NA	NA
139-000	Power Sensor	NRP-Z81	104383	Rohde & Schwarz	2021-04-07	2023-04-07
140-000	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2022-03-25	2024-03-25

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of k = 2 to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	±0.12	%
Power Spectral density	±1.47	dB
Occupied bandwidth	±2.07	%
Conducted Power	±1.03	dB
Conducted Spurious Emission <7 GHz	±1.67	dB
Radiated tests <1GHz	±6.24	dB
Radiated tests 1GHz – 40 GHz	±6.04	dB

Annex B. Test Results U-NII-4

The herein test results were performed by:

Test case measurement	Test Personnel
6dB and 99% Bandwidth	V.Kaculini
Maximum output power & Maximum PSD	V.Kaculini
Undesirable emission limits: out of band	V.Kaculini
Radiated spurious emissions	K.Khatib, R.Simonini

B.1 Test Conditions

For all modes, the EUT can transmit at both CHAIN A Diversity 1 and CHAIN A Diversity 2 RF outputs individually, but not simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
CHAIN A – Diversity 1/ Diversity 2	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
	802.11ax	20	HE0
		40	HE0
		80	HE0

B.2 Test Results Tables

B.2.1 6dB & 99% Bandwidth

Test limits

FCC part	Limits
15.407 (e)	For equipment operating in the band 5725-5895 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 6dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	CHAIN A DIV 1	169	5845	15.09	17.76
			173	5865	15.01	19.60
			177	5885	15.03	18.04
		CHAIN A DIV 2	169	5845	15.09	16.84
			173	5865	14.43	18.96
			177	5885	15.09	19.52
802.11n20	HT0	CHAIN A DIV 1	169	5845	15.35	19.84
			173	5865	15.08	19.80
			177	5885	15.70	17.92
		CHAIN A DIV 2	169	5845	16.31	19.64
			173	5865	14.98	19.60
			177	5885	15.11	19.36
802.11n40	HT0	CHAIN A DIV 1	167	5835	34.80	54.08
			175	5875	32.54	36.32
		CHAIN A DIV 2	167	5835	35.28	54.32
			175	5875	32.60	36.40
802.11ac80	VHT0	CHAIN A DIV 1	171	5855	62.40	77.92
		CHAIN A DIV 2			70.12	75.52

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11ax20	HE0	CHAIN A DIV 1	169	5845	17.28	19.24
			173	5865	17.20	20.20
			177	5885	16.33	19.68
		CHAIN A DIV 2	169	5845	16.12	19.28
			173	5865	15.84	19.12
			177	5885	17.78	18.96
802.11ax40	HE0	CHAIN A DIV 1	167	5835	32.20	49.92
			175	5875	35.06	37.60
		CHAIN A DIV 2	167	5835	34.11	50.32
			175	5875	34.09	37.92
802.11ax80	HE0	CHAIN A DIV 1	171	5855	73.92	76.96
		CHAIN A DIV 2			71.40	76.96

Max Value

See Section B.3.1, B.3.2 for the screenshot results.

B.2.2 Maximum output power & Maximum power spectral Density

Test limits

FCC part	Limits
15.407 (a) (3) (iii)	For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.
15.407 (a) (12)	Power spectral density measurement: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. Measurements in the 5.725-5.895 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method over the entire 99% occupied bandwidth according to section E) 2) d) (Method SA-2) of KDB 789033
The maximum power spectral density (PSD) was measured using the method according to section F) of KDB 789033.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	CHAIN A DIV1	94.9%
		CHAIN A DIV2	94.9%
802.11n20	HT0	CHAIN A DIV1	98.7%
		CHAIN A DIV2	98.7%
802.11ax20	HE0	CHAIN A DIV1	98.7%
		CHAIN A DIV2	98.7%
802.11n40	HT0	CHAIN A DIV1	98.7%
		CHAIN A DIV2	98.7%
802.11ax40	HE0	CHAIN A DIV1	98.7%
		CHAIN A DIV2	98.7%
802.11ac80	VHT0	CHAIN A DIV1	98.9%
		CHAIN A DIV2	98.9%
802.11ax80	HE0	CHAIN A DIV1	98.6%
		CHAIN A DIV2	98.6%

Maximum output power – U-NII-4 Channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Ouput Power [dBm]	Avg Max* Conducted Ouput Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Ouput Power [mW]
802.11a	6Mbps	169	5845	CHAIN A DIV 1	18.63	18.85	23.85	76.79
				CHAIN A DIV 2	18.11	18.33	23.33	68.12
		173	5865	CHAIN A DIV 1	18.95	19.17	24.17	82.66
				CHAIN A DIV 2	18.96	19.18	24.18	82.85
		177	5885	CHAIN A DIV 1	18.48	18.70	23.70	74.18
				CHAIN A DIV 2	18.75	18.97	23.97	78.94
802.11n20	HT0	169	5845	CHAIN A DIV 1	19.11	19.11	24.11	81.47
				CHAIN A DIV 2	19.15	19.15	24.15	82.22
		173	5865	CHAIN A DIV 1	18.94	18.94	23.94	78.34
				CHAIN A DIV 2	18.88	18.88	23.88	77.27
		177	5885	CHAIN A DIV 1	17.61	17.61	22.61	57.68
				CHAIN A DIV 2	18.68	18.68	23.68	73.79
802.11n40	HT0	167	5835	CHAIN A DIV 1	20.77	20.77	25.77	119.40
				CHAIN A DIV 2	20.79	20.79	25.79	119.95
		175	5875	CHAIN A DIV 1	17.97	17.97	22.97	62.66
				CHAIN A DIV 2	17.96	17.96	22.96	62.52
802.11ac80	VHT0	171	5855	CHAIN A DIV 1	17.80	17.80	22.80	60.26
				CHAIN A DIV 2	17.82	17.82	22.82	60.53

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Ouput Power [dBm]	Avg Max* Conducted Ouput Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Ouput Power [mW]
802.11ax20	HE0	169	5845	CHAIN A DIV 1	18.99	18.99	23.99	79.25
				CHAIN A DIV 2	18.97	18.97	23.97	78.89
		173	5865	CHAIN A DIV 1	19.37	19.37	24.37	86.50
				CHAIN A DIV 2	18.60	18.60	23.60	72.44
		177	5885	CHAIN A DIV 1	18.90	18.90	23.90	77.62
				CHAIN A DIV 2	17.95	17.95	22.95	62.37
802.11ax40	HE0	167	5835	CHAIN A DIV 1	20.81	20.81	25.81	120.50
				CHAIN A DIV 2	20.76	20.76	25.76	119.12
		175	5875	CHAIN A DIV 1	18.02	18.02	23.02	63.39
				CHAIN A DIV 2	18.44	18.44	23.44	69.82
802.11ax80	HE0	171	5855	CHAIN A DIV 1	17.80	17.80	22.80	60.26
				CHAIN A DIV 2	17.80	17.80	22.80	60.26

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

See Section B.3.3 for the screenshot results

Maximum Power Spectral Density (PSD) – U-NII-4 channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/MHz]	EIRP PSD [dBm/MHz]
802.11a	6Mbps	169	5845	CHAIN A DIV 1	4.74	4.83	7.84	12.84
				CHAIN A DIV 2	4.27	4.36	7.37	12.37
		173	5865	CHAIN A DIV 1	5.08	5.17	8.18	13.18
				CHAIN A DIV 2	5.02	5.11	8.12	13.12
		177	5885	CHAIN A DIV 1	4.62	4.71	7.72	12.72
				CHAIN A DIV 2	4.88	4.97	7.98	12.98
802.11n20	HT0	169	5845	CHAIN A DIV 1	5.04	5.04	8.05	13.05
				CHAIN A DIV 2	5.05	5.05	8.06	13.06
		173	5865	CHAIN A DIV 1	4.85	4.85	7.86	12.86
				CHAIN A DIV 2	4.81	4.81	7.82	12.82
		177	5885	CHAIN A DIV 1	3.60	3.60	6.61	11.61
				CHAIN A DIV 2	4.70	4.70	7.71	12.71
802.11n40	HT0	167	5835	CHAIN A DIV 1	3.35	3.35	6.36	11.36
				CHAIN A DIV 2	3.31	3.31	6.32	11.32
		175	5875	CHAIN A DIV 1	0.57	0.57	3.58	8.58
				CHAIN A DIV 2	0.54	0.54	3.55	8.55
802.11ac80	VHT0	171	5855	CHAIN A DIV 1	-2.55	-2.55	0.46	5.46
				CHAIN A DIV 2	-2.23	-2.23	0.78	5.78

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/MHz]	EIRP PSD [dBm/MHz]
802.11ax20	HE0	169	5845	CHAIN A DIV 1	4.83	4.83	7.84	12.84
				CHAIN A DIV 2	4.74	4.74	7.75	12.75
		173	5865	CHAIN A DIV 1	5.10	5.10	8.11	13.11
				CHAIN A DIV 2	4.36	4.36	7.37	12.37
		177	5885	CHAIN A DIV 1	4.65	4.65	7.66	12.66
				CHAIN A DIV 2	3.76	3.76	6.77	11.77
802.11ax40	HE0	167	5835	CHAIN A DIV 1	3.25	3.25	6.26	11.26
				CHAIN A DIV 2	3.17	3.17	6.18	11.18
		175	5875	CHAIN A DIV 1	0.46	0.46	3.47	8.47
				CHAIN A DIV 2	0.92	0.92	3.93	8.93
802.1ax80	HE0	171	5855	CHAIN A DIV 1	-2.29	-2.29	0.72	5.72
				CHAIN A DIV 2	-2.63	-2.63	0.38	5.38

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Note :PSD [dBm/500KHz] is the actual measurement done using RBW = 500KHz. To obtain the PSD [dBm/1MHz] a correction factor is applied: $10log\left(\frac{1MHz}{500kHz}\right) = +3.01dB$

See Section B.3.4. for the screenshot results

B.2.3 Undesirable emission limits : out of band (Conducted)

Test limits

FCC part	Limits
15.407 (b) (4)	All emisions below 5.725 GHz shall not exceed an e.i.r.p of −27 dBm/MHz at 5.65GHz increasing linearly to 10dBm/MHz at 5.7 GHz, and from 5.7GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72GHz, and from 5.72 GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.
15.407 (b) (5) (ii)	All emissions at or above 5.895GHz shall not exceed an e.i.r.p of -5dBm/MHz and shall decrease linearly to an e.i.r.p of -27dBm/MHz at or above 5.925GHz.
15.35 (b)	Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

For lower OOBE, Peak detector is used according to FCC OET KDB 789033 D02 v02r01.

For upper OOBE, RMS detector is used according to FCC OET KDB 291074 D02 v01 - EMC Measurement.

Integration method as described in KDB Publication 789033.3.d)(ii) can be used in order to optimize the power. In this report, the integration method is applied in the band 5895 - 5896MHz and compared with interpolation limit of curve (-5.367dBm/MHz EIRP) at 5895.5MHz.

The RBW is set to 100KHz according to the integration method, the applicable limit is updated accordingly (Shifted by 10dB)

Band Edge measurements above 5895 MHz should also include Peak plots to show compliance with 15.35(b) where the peak emissions must be limited to no more than 20 dB above the average limit.

See Section B.3.5. and B.3.6. for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

<table>
<tr><th>FCC part</th><th>Limits</th></tr>
<tr><td>15.407 (b) (5) (ii)</td><td>For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz: For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of −5 dBm/MHz and shall decrease linearly to an e.i.r.p. of −27 dBm/MHz at or above 5.925 GHz.</td></tr>
<tr><td>15.407 (b) (5) (iii)</td><td>For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of −27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.</td></tr>
<tr><td>15.209</td><td>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):
<table>
<tr><th>Freq Range (MHz)</th><th>Field Strength (µV/m)</th><th>Field Strength (dBµV/m)</th><th>Meas. Distance (m)</th></tr>
<tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr>
<tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr>
<tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr>
<tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr>
</table>
The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</td></tr>
</table>

Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360º and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the chapter B.1 and using the low, middle and high channels.

Test Results

30 MHz – 1 GHz, Radiated spurious emissions

Radiated Spurious – All modes

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dB	---
178.8	34.2	43.5	9.3	H
183.0	36.9	43.5	6.6	H
230.8	29.9	46.0	16.1	H

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

Radiated spurious – 1 GHz to 40 GHz

802.11a

802.11a, 6Mbps, Diversity 1

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1596.9	43.1	Peak	74.0	30.9	H
1596.9	31.9	Average	54.0	22.1	H
11686.4	53.9	Peak	74.0	20.1	V
11687.8	42.9	Average	54.0	11.1	V
17529.2	43.5	RMS	68.2	24.6	H
17544.3	53.0	Peak	88.2	35.1	H
23375.3	50.9	Peak	88.2	37.3	H
23387.1	41.8	RMS	68.2	26.4	H

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1596.9	44.3	Peak	74.0	29.7	H
1596.9	31.6	Average	54.0	22.4	H
9294.1	56.0	Peak	88.2	32.2	H
9294.6	45.2	RMS	68.2	23.0	H
11726.1	54.3	Peak	74.0	19.7	V
11726.5	45.8	Average	54.0	8.2	V
17591.1	42.1	RMS	68.2	26.1	H
17591.5	53.4	Peak	88.2	34.8	H
23457.0	49.1	Peak	88.2	39.1	H
23457.0	40.8	RMS	68.2	27.4	H

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1187.0	40.6	Peak	74.0	33.4	H
1187.5	33.4	Average	54.0	20.6	H
9405.1	55.0	Peak	74.0	19.0	V
9405.1	44.7	Average	54.0	9.3	V
11761.0	54.7	Peak	74.0	19.3	V
11770.4	45.0	Average	54.0	9.0	V
17661.4	42.7	RMS	68.2	25.5	H
17664.2	51.9	Peak	88.2	36.3	H
35309.1	44.3	RMS	68.2	23.9	H
35325.2	54.4	Peak	88.2	33.8	H

802.11a, 6Mbps, Diversity 2

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1187.5	40.5	Peak	74.0	33.5	V
1187.5	33.8	Average	54.0	20.2	H
5298.2	51.7	Peak	88.2	36.5	V
5298.2	41.9	RMS	68.2	26.3	V
11690.2	55.6	Peak	74.0	18.4	V
11693.0	45.2	Average	54.0	8.8	V
17535.8	43.9	RMS	68.2	24.3	H
17541.0	52.6	Peak	88.2	35.6	H
23376.8	49.9	Peak	88.2	38.4	H
23376.8	39.9	RMS	68.2	28.3	H

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1595.5	44.5	Peak	74.0	29.5	H
1595.5	31.1	Average	54.0	22.9	H
11722.8	54.5	Peak	74.0	19.6	V
11731.2	45.9	Average	54.0	8.1	V
17592.0	53.5	Peak	88.2	34.7	H
17596.7	42.3	RMS	68.2	25.9	H
23458.9	50.6	Peak	88.2	37.6	H
23460.4	41.2	RMS	68.2	26.9	V
35196.7	44.8	RMS	68.2	23.4	H
35207.9	55.4	Peak	88.2	32.8	H

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1680.9	41.7	Peak	74.0	32.3	V
1680.9	33.3	Average	54.0	20.7	V
11769.0	53.9	Peak	74.0	20.1	V
11771.9	46.1	Average	54.0	**7.9**	V
17651.5	43.5	RMS	68.2	24.7	H
17654.3	54.3	Peak	88.2	33.9	H
35301.3	45.3	RMS	68.2	22.9	H
35312.5	55.2	Peak	88.2	33.0	H

802.11n

802.11n20, HT0, Diversity 1

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1312.1	33.0	Average	54.0	21.0	V
1312.1	42.3	Peak	74.0	31.7	H
9353.6	45.5	Average	54.0	8.6	H
9354.6	56.7	Peak	74.0	17.3	H
11685.4	42.1	Average	54.0	11.9	V
11689.2	53.4	Peak	74.0	20.6	V
17528.7	43.0	RMS	68.2	25.2	H
17540.1	52.8	Peak	88.2	35.4	H
39650.0	54.2	Peak	74.0	19.8	H
39650.4	45.7	Average	54.0	8.3	H

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1312.6	42.0	Peak	74.0	32.0	V
1312.6	33.3	Average	54.0	20.7	V
9344.2	55.5	Peak	74.0	18.5	V
9344.6	45.1	Average	54.0	8.8	H
11727.9	54.2	Peak	74.0	19.8	V
11728.4	45.7	Average	54.0	8.3	V
17595.3	52.2	Peak	88.2	36.0	H
17600.5	42.6	RMS	68.2	25.6	H
39637.7	44.7	Average	54.0	9.3	H
39638.2	55.2	Peak	74.0	18.8	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1680.0	42.9	Peak	74.0	31.1	V
1680.0	33.3	Average	54.0	20.7	V
9313.5	55.2	Peak	74.0	18.8	H
9313.9	44.8	Average	54.0	9.2	V
11764.3	54.3	Peak	74.0	19.7	V
11769.0	45.7	Average	54.0	8.3	V
17654.8	42.1	RMS	68.2	26.1	H
17655.8	52.3	Peak	88.2	35.9	H
39645.6	55.5	Peak	74.0	18.6	V
39646.0	44.6	Average	54.0	9.4	H

802.11n20, HT0, Diversity 2

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1312.6	33.4	Average	54.0	20.6	H
1313.1	42.0	Peak	74.0	32.0	V
9306.9	56.4	Peak	74.0	17.6	V
9307.3	45.0	Average	54.0	9.0	H
11686.4	52.8	Peak	74.0	21.2	V
11686.4	45.5	Average	54.0	8.5	V
17529.7	52.8	Peak	88.2	35.4	H
17540.1	43.4	RMS	68.2	24.8	H
39627.0	44.3	Average	54.0	9.7	H
39627.0	55.6	Peak	74.0	18.4	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
2127.2	35.4	RMS	68.2	32.9	H
2131.0	47.6	Peak	88.2	40.6	H
11721.3	53.4	Peak	74.0	20.6	V
11730.3	46.3	Average	54.0	**7.7**	V
17598.1	42.1	RMS	68.2	26.1	H
17598.6	52.5	Peak	88.2	35.7	H
23460.9	50.0	Peak	88.2	38.2	V
23461.4	39.2	RMS	68.2	29.0	V
39679.3	43.9	Average	54.0	10.1	V
39679.3	55.7	Peak	74.0	18.3	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
2131.0	34.3	RMS	68.2	33.9	H
2131.4	48.8	Peak	88.2	39.4	H
9350.3	56.1	Peak	74.0	17.9	H
9350.3	44.9	Average	54.0	9.1	H
11769.5	42.5	Average	54.0	11.5	V
11770.0	51.8	Peak	74.0	22.2	V
17655.3	52.8	Peak	88.2	35.4	H
17655.3	43.0	RMS	68.2	25.2	H
39628.0	44.6	Average	54.0	9.4	V
39628.4	54.9	Peak	74.0	19.1	V

802.11n40, HT0, Diversity 1

CH167

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1311.7	42.7	Peak	74.0	31.3	H
1312.1	33.3	Average	54.0	20.7	V
9301.7	55.0	Peak	74.0	19.0	V
9301.7	45.4	Average	54.0	8.6	V
11661.8	50.8	Peak	74.0	23.2	H
11669.9	41.5	Average	54.0	12.5	V
17504.2	51.8	Peak	88.2	36.4	H
17515.5	40.8	RMS	68.2	27.4	H
35006.0	43.2	RMS	68.2	24.9	V
35021.2	53.8	Peak	88.2	34.4	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
9354.1	45.0	Average	54.0	9.0	V
9354.6	55.3	Peak	74.0	18.7	V
11749.7	52.8	Peak	74.0	21.2	V
11752.5	42.3	Average	54.0	11.7	V
17643.0	49.4	Peak	88.2	38.8	H
17643.0	40.6	RMS	68.2	27.6	H
39634.3	55.6	Peak	74.0	18.4	V
39635.8	45.1	Average	54.0	8.9	V

802.11n40, HT0, Diversity 2

CH167

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
9306.4	55.0	Peak	74.0	19.0	V
9306.9	45.0	Average	54.0	9.0	V
11662.3	51.2	Peak	74.0	22.8	V
11672.7	41.2	Average	54.0	12.8	V
17496.1	49.8	Peak	88.2	38.4	H
17496.1	40.9	RMS	68.2	27.3	H
39643.6	53.8	Peak	74.0	20.2	V
39643.6	45.4	Average	54.0	**8.6**	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
2126.7	48.0	Peak	88.2	40.2	H
2126.7	35.9	RMS	68.2	32.3	H
11749.2	52.9	Peak	74.0	21.1	V
11757.2	42.5	Average	54.0	11.5	V
17622.7	51.1	Peak	88.2	37.1	H
17637.8	40.4	RMS	68.2	27.8	H
39632.8	44.9	Average	54.0	9.1	V
39632.8	55.5	Peak	74.0	18.5	V

802.11ax

802.11ax20, HE0, Diversity 1

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1630.9	43.0	Peak	88.2	45.2	V
1631.4	35.0	RMS	68.2	33.2	V
11672.7	58.4	Peak	74.0	15.6	V
11672.7	52.3	Average	54.0	**1.7**	V
17509.4	51.6	RMS	68.2	16.6	H
17510.3	58.4	Peak	88.2	29.8	H
23344.5	50.6	Peak	88.2	37.6	H
23345.5	42.6	RMS	68.2	25.6	H
35020.7	53.9	Peak	88.2	34.3	H
35021.2	44.8	RMS	68.2	23.4	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1651.2	36.5	RMS	68.2	31.7	V
1651.7	44.2	Peak	88.2	44.0	V
11712.8	53.6	Peak	74.0	20.4	V
11712.8	43.6	Average	54.0	10.4	V
17569.8	56.2	Peak	88.2	32.0	H
17569.8	48.9	RMS	68.2	19.4	H
23426.2	42.5	RMS	68.2	25.7	V
23427.2	50.5	Peak	88.2	37.7	V
35139.0	44.6	RMS	68.2	23.6	H
35140.4	52.7	Peak	88.2	35.5	H

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1671.0	35.6	Average	54.0	18.4	V
1672.0	44.9	Peak	74.0	29.1	V
11753.0	45.9	Average	54.0	8.1	V
11753.4	55.2	Peak	74.0	18.8	V
17629.8	47.2	RMS	68.2	21.0	H
17630.2	55.6	Peak	88.2	32.6	H
35258.8	43.3	RMS	68.2	24.9	H
35259.2	53.4	Peak	88.2	34.8	H

802.11ax20, HE0, Diversity 2

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1630.9	43.1	Peak	88.2	45.1	H
1631.8	34.4	RMS	68.2	33.8	V
5596.6	54.5	Peak	88.2	33.7	H
5597.1	44.1	RMS	68.2	24.1	H
11672.7	51.8	Average	54.0	2.2	V
11673.6	59.2	Peak	74.0	14.8	V
17509.4	49.3	RMS	68.2	18.9	H
17509.8	56.9	Peak	88.2	31.3	H
23346.0	41.6	RMS	68.2	26.6	H
23346.5	50.8	Peak	88.2	37.4	H

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1651.2	44.3	Peak	88.2	43.9	V
1651.2	36.6	RMS	68.2	31.6	V
9351.2	54.5	Peak	74.0	19.5	V
9351.2	45.0	Average	54.0	9.0	V
11712.4	48.5	Peak	74.0	25.4	V
11712.4	39.2	Average	54.0	14.8	V
17570.3	57.0	Peak	88.2	31.2	H
17570.3	47.0	RMS	68.2	21.2	H
23425.2	42.9	RMS	68.2	25.3	V
23427.2	51.6	Peak	88.2	36.5	V
35138.5	53.3	Peak	88.2	34.9	H
35139.5	43.6	RMS	68.2	24.6	H

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1671.5	37.4	Average	54.0	16.6	V
1672.0	46.1	Peak	74.0	27.9	V
9323.9	56.1	Peak	74.0	17.9	H
9323.9	44.8	Average	54.0	9.2	H
11753.4	49.0	Peak	74.0	25.0	V
11753.4	40.3	Average	54.0	13.7	V
17628.8	55.5	Peak	88.2	32.7	H
17629.8	47.3	RMS	68.2	20.9	H
23504.9	49.4	Peak	88.2	38.8	V
23506.4	41.2	RMS	68.2	27.0	V
35259.7	43.6	RMS	68.2	24.6	H
35259.7	53.4	Peak	88.2	34.8	H

802.11ax40, HE0, Diversity 1

CH167

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1632.8	34.7	RMS	68.2	33.5	V
1633.2	42.7	Peak	88.2	45.5	V
9457.5	44.1	Average	54.0	9.9	H
9458.4	56.0	Peak	74.0	18.0	V
11676.0	41.3	Average	54.0	12.7	V
11677.4	49.7	Peak	74.0	24.3	V
17515.0	56.1	Peak	88.2	32.1	H
17515.0	46.5	RMS	68.2	21.7	H
35030.0	44.0	RMS	68.2	24.2	H
35030.9	53.8	Peak	88.2	34.4	H

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1672.9	36.7	Average	54.0	17.3	V
1673.4	45.3	Peak	74.0	28.7	V
9328.6	45.2	Average	54.0	8.8	H
9329.1	55.5	Peak	74.0	18.4	H
11756.8	47.0	Average	54.0	7.0	V
11757.2	57.5	Peak	74.0	16.5	V
17634.0	57.0	Peak	88.2	31.2	H
17635.0	49.5	RMS	68.2	18.7	H
35269.0	44.1	RMS	68.2	24.1	H
35271.0	53.6	Peak	88.2	34.6	H

802.11ax40, HE0, Diversity 2

CH167

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1632.8	34.7	RMS	68.2	33.5	V
1633.2	44.3	Peak	88.2	43.9	V
9338.5	44.9	Average	54.0	9.1	H
9339.0	55.4	Peak	74.0	18.6	H
11675.5	60.1	Peak	74.0	13.9	V
11676.5	51.7	Average	54.0	2.3	V
17514.1	49.1	RMS	68.2	19.1	H
17514.1	57.2	Peak	88.2	31.0	H
39636.3	44.3	Average	54.0	9.7	V
39636.3	55.1	Peak	74.0	18.9	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1672.9	36.8	Average	54.0	17.2	V
1673.9	44.1	Peak	74.0	29.9	V
9370.1	44.7	Average	54.0	9.3	V
9370.6	54.9	Peak	74.0	19.1	H
11755.8	57.0	Peak	74.0	17.1	V
11756.8	48.4	Average	54.0	**5.6**	V
17635.4	57.5	Peak	88.2	30.7	H
17635.4	50.4	RMS	68.2	17.8	H
35266.6	52.5	Peak	88.2	35.6	V
35268.5	43.6	RMS	68.2	24.6	V

802.11ax80, HE0, Diversity 1

CH171

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1654.0	44.6	Peak	88.2	43.6	V
1654.0	35.6	RMS	68.2	32.6	V
17813.9	49.6	Peak	74.0	24.4	V
17813.9	39.8	Average	54.0	14.2	H
39648.5	44.7	Average	54.0	**9.3**	V
39648.5	54.6	Peak	74.0	19.4	H

802.11ax80, HE0, Diversity 2

CH171

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1654.5	43.7	Peak	88.2	44.5	V
1654.5	35.2	RMS	68.2	33.0	V
17800.2	50.0	Peak	74.0	24.1	V
17800.2	39.4	Average	54.0	14.6	H
39657.3	44.3	Average	54.0	9.7	H
39657.3	55.2	Peak	74.0	18.8	V

802.11ac

802.11ac80, VHT0, Diversity 1

CH171

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
9301.7	55.8	Peak	74.0	18.2	H
9301.7	45.2	Average	54.0	8.8	H
11689.7	50.8	Peak	74.0	23.2	V
11689.7	41.4	Average	54.0	12.7	V
39739.4	43.4	Average	54.0	10.6	V
39739.4	55.5	Peak	74.0	18.5	V

802.11ac80, VHT0, Diversity 2

CH171

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
9301.2	45.7	Average	54.0	**8.3**	V
9301.7	56.3	Peak	74.0	17.7	V
11700.6	50.6	Peak	74.0	23.4	V
11700.6	41.1	Average	54.0	12.9	V
39622.1	44.5	Average	54.0	9.5	H
39622.1	55.0	Peak	74.0	19.0	H

B.3 Test Results Screenshot

B.3.1 6dB Bandwidth

ChainA - Div1, 802.11a, 6Mbps-CH169

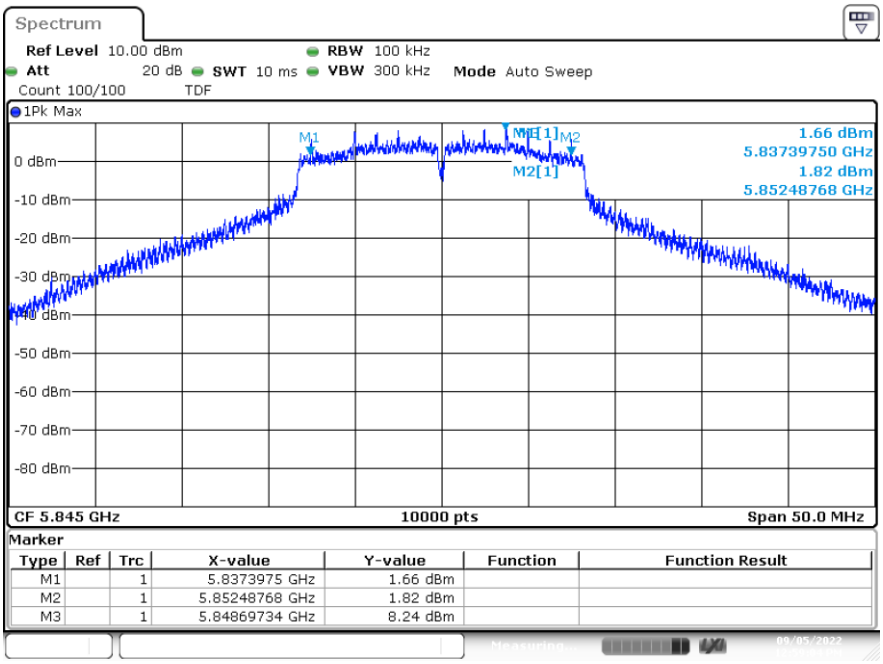

ChainA – Div2, 802.11n20, HT0-CH169

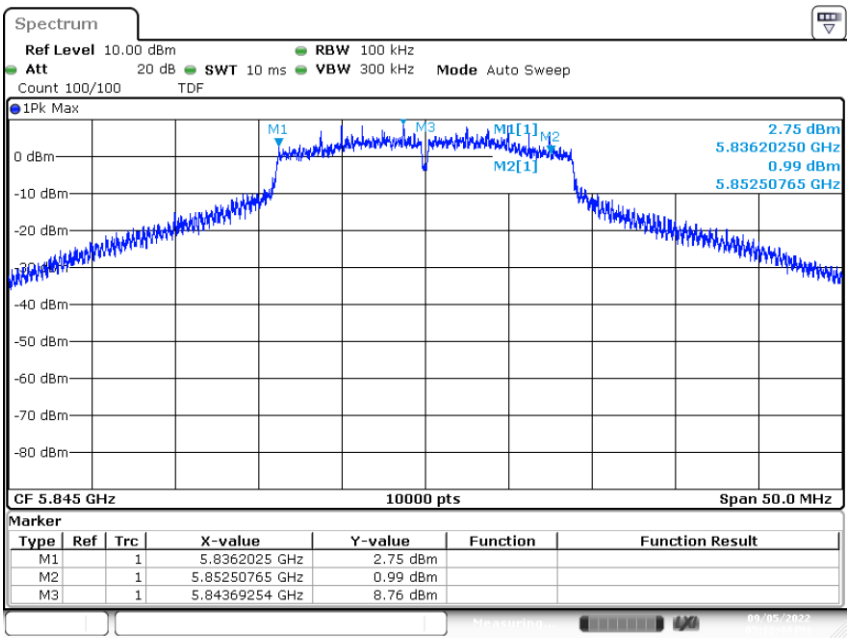

ChainA – Div2, 802.11n40, HT0-CH167

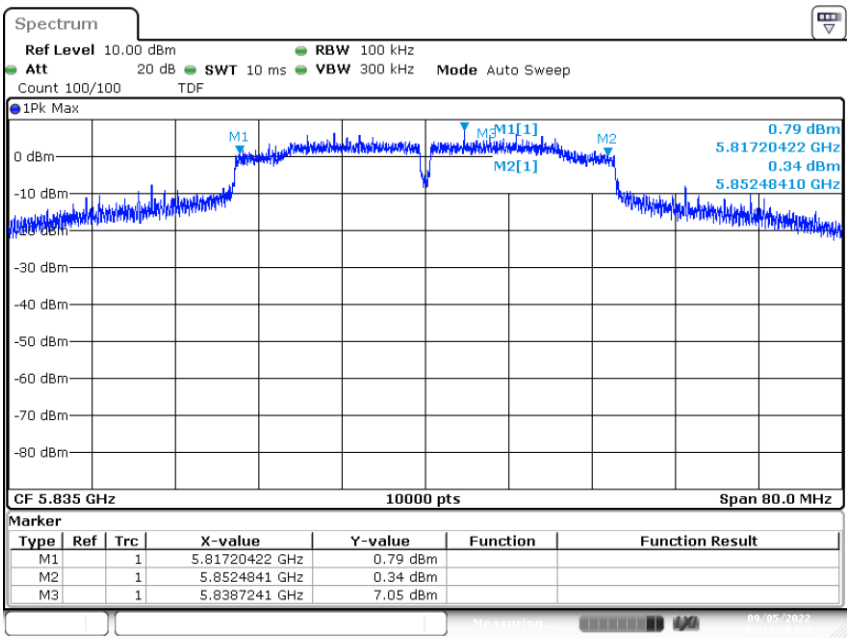

ChainA – Div2, 802.11ac80, VHT0-CH171

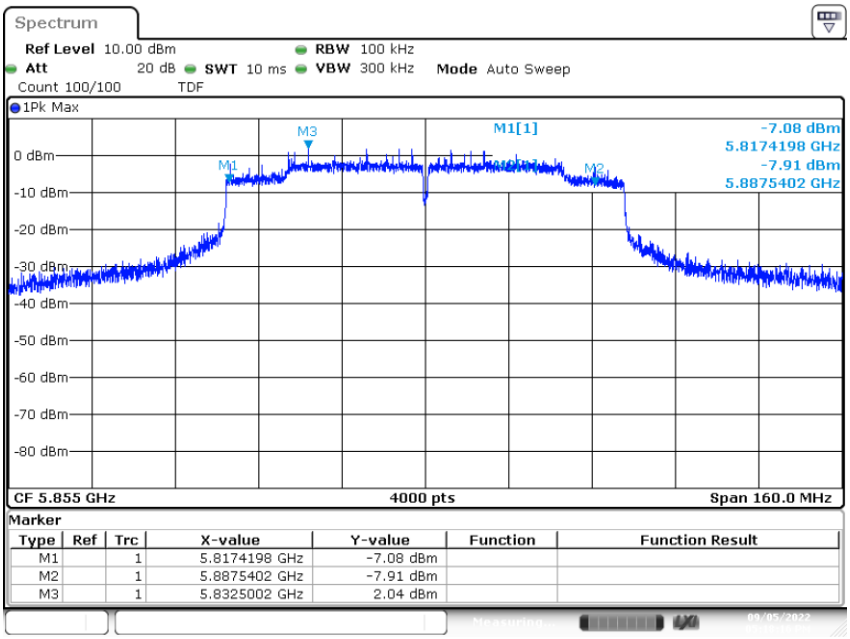

ChainA – Div2, 802.11ax20, HE0-CH177

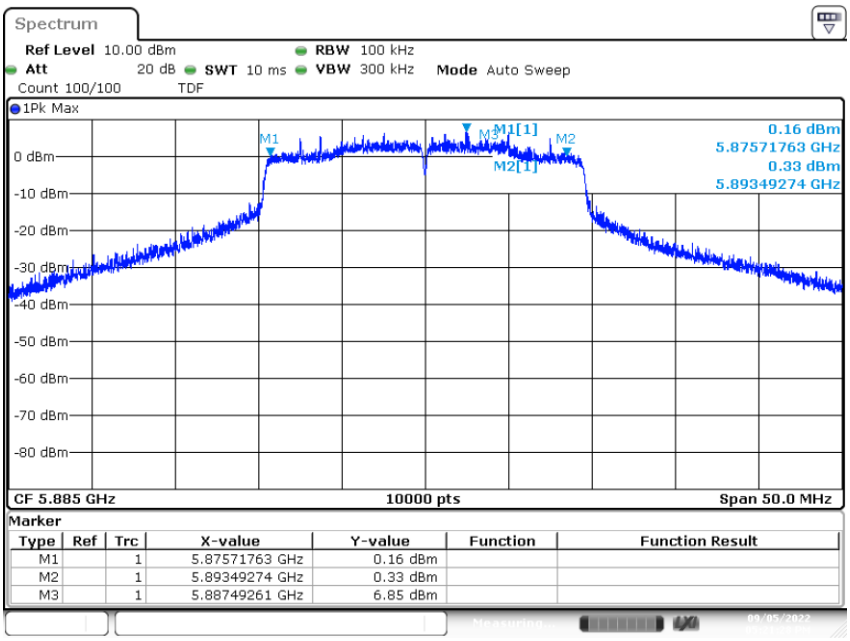

ChainA – Div1, 802.11ax40, HE0-CH175

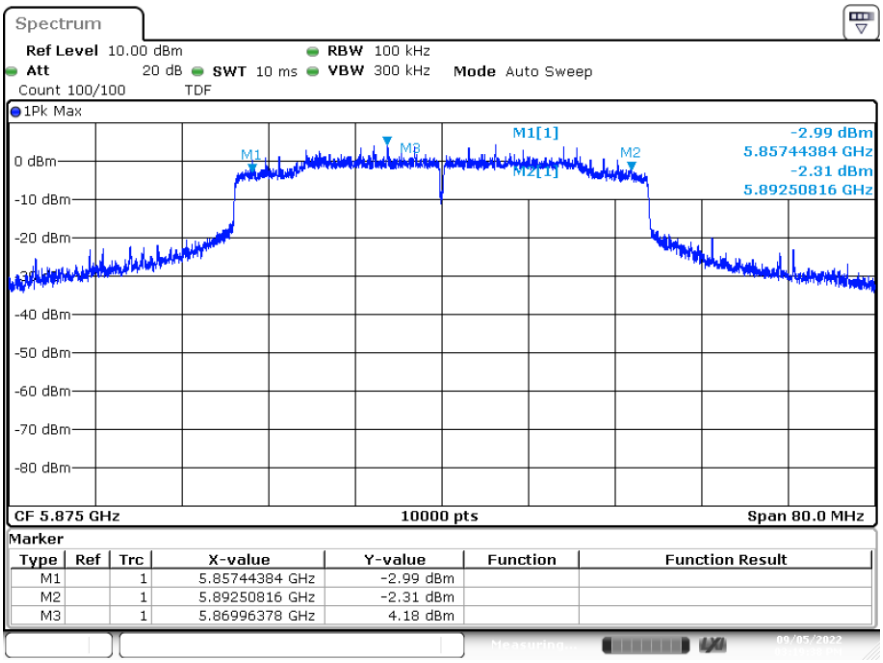

ChainA – Div1, 802.11ax80, HE0-CH171

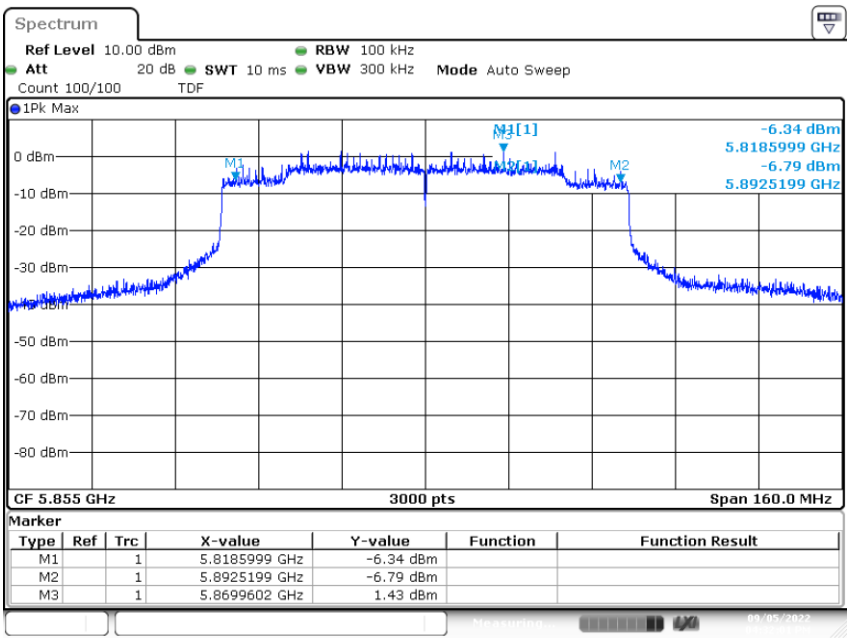

B.3.2 99% Bandwidth

ChainA – Div1, 802.11a, 6Mbps-CH173

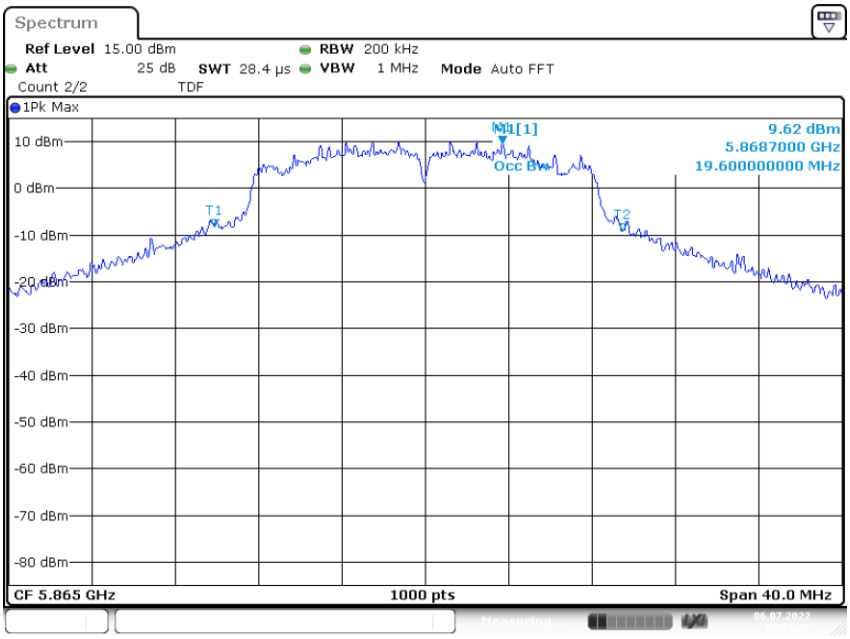

Date: 6.JUL.2022 19:53:32

ChainA – Div1, 802.11n20, HT0-CH169

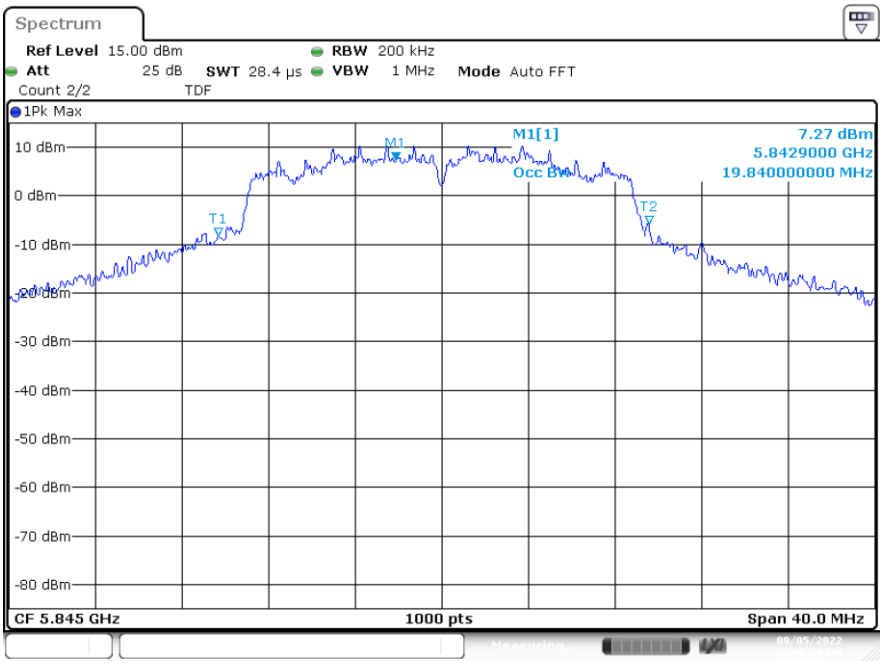

ChainA – Div2, 802.11n40, HT0-CH167

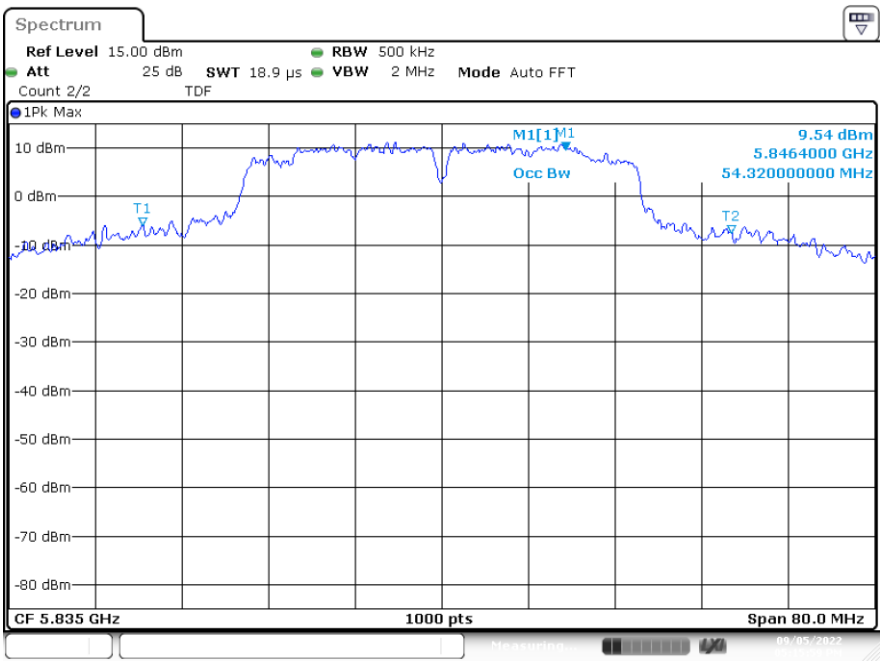

ChainA – Div1, 802.11ac80, VHT0-CH171

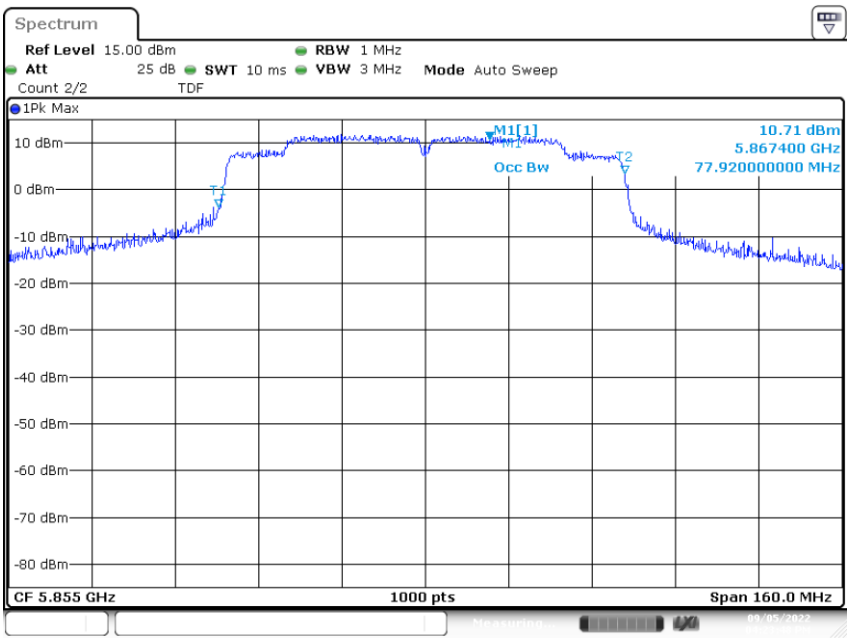

ChainA – Div1, 802.11ax20, HE0-CH173

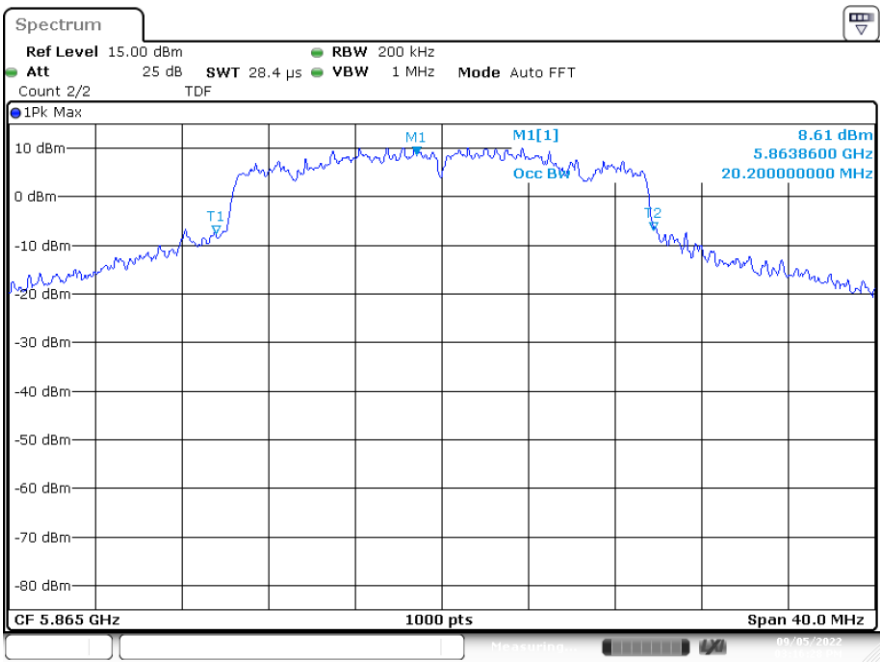

ChainA – Div2, 802.11ax40, HE0-CH167

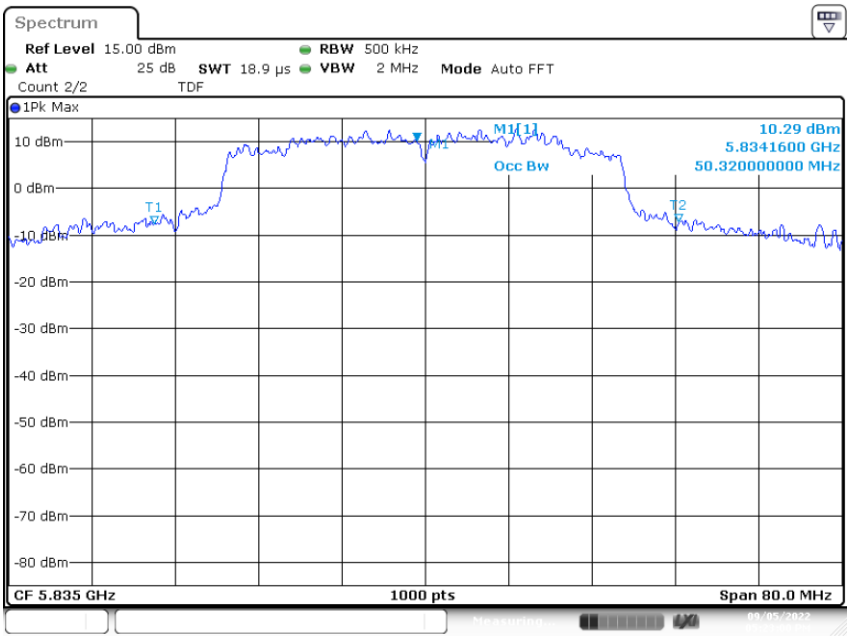

ChainA – Div1, 802.11ax80, HE0-CH171

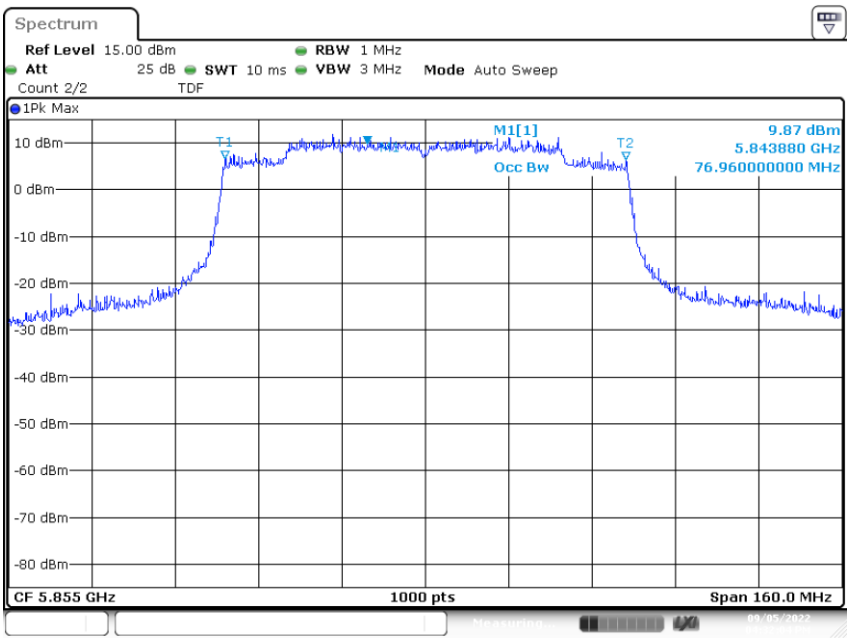

B.3.3 Maximum output power

ChainA – Div2, 802.11a, 6Mbps-CH173

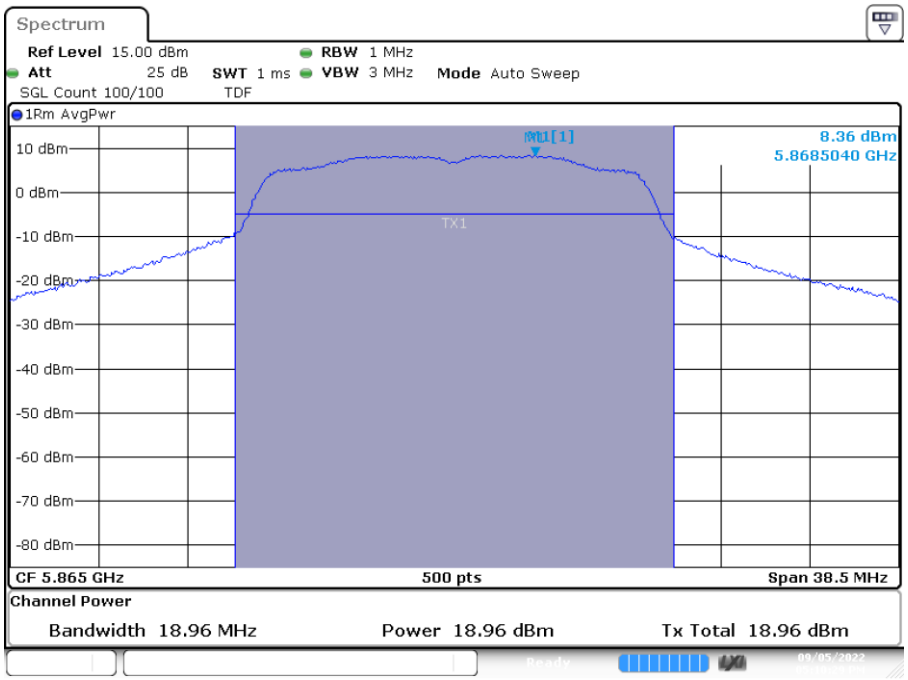

ChainA – Div2, 802.11n20, HT0-CH169

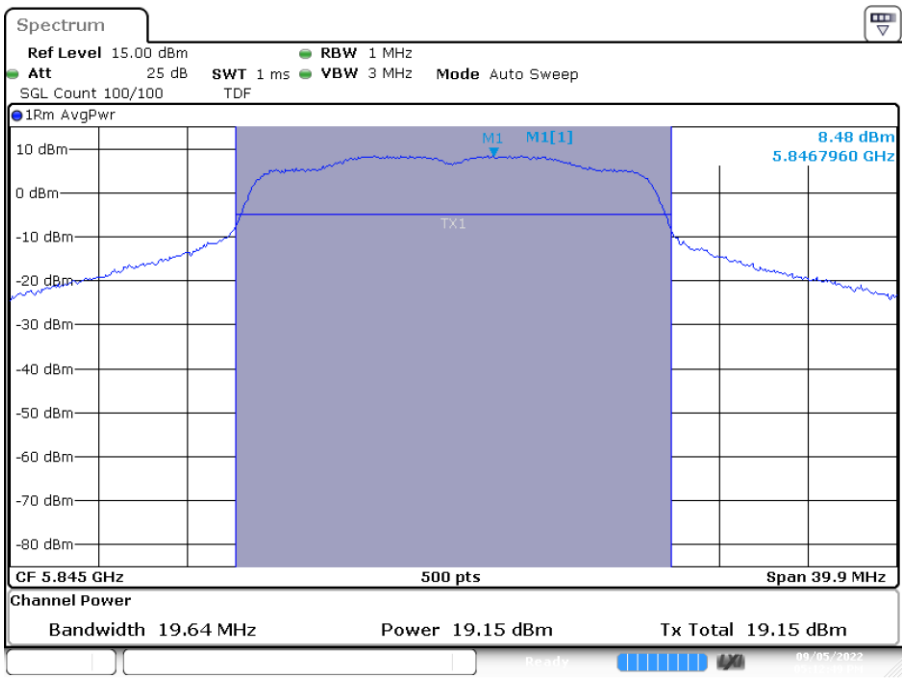

ChainA – Div2, 802.11n40, HT0-CH167

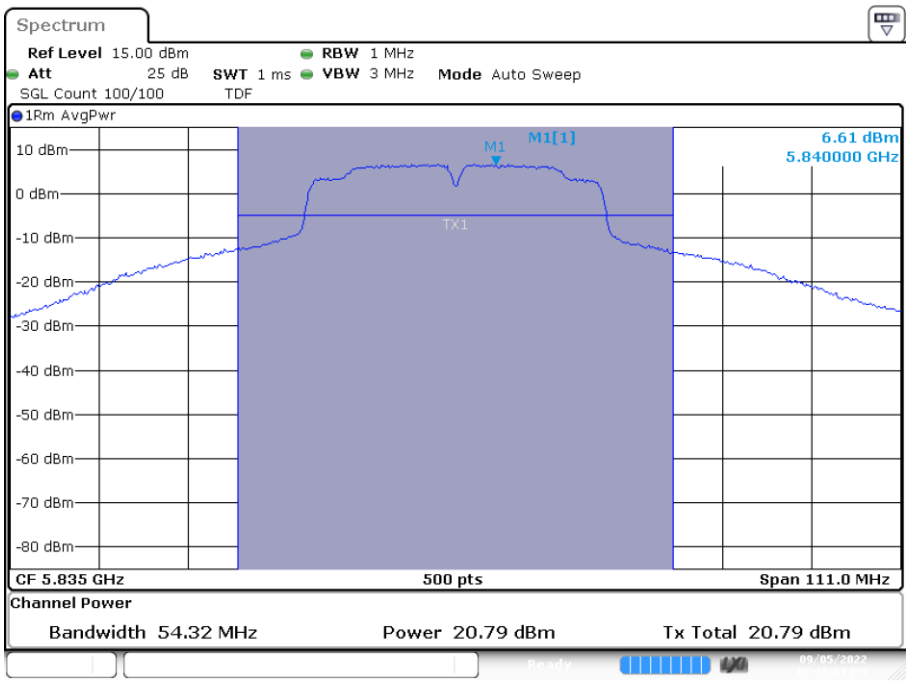

ChainA – Div2, 802.11ac80, VHT0-CH171

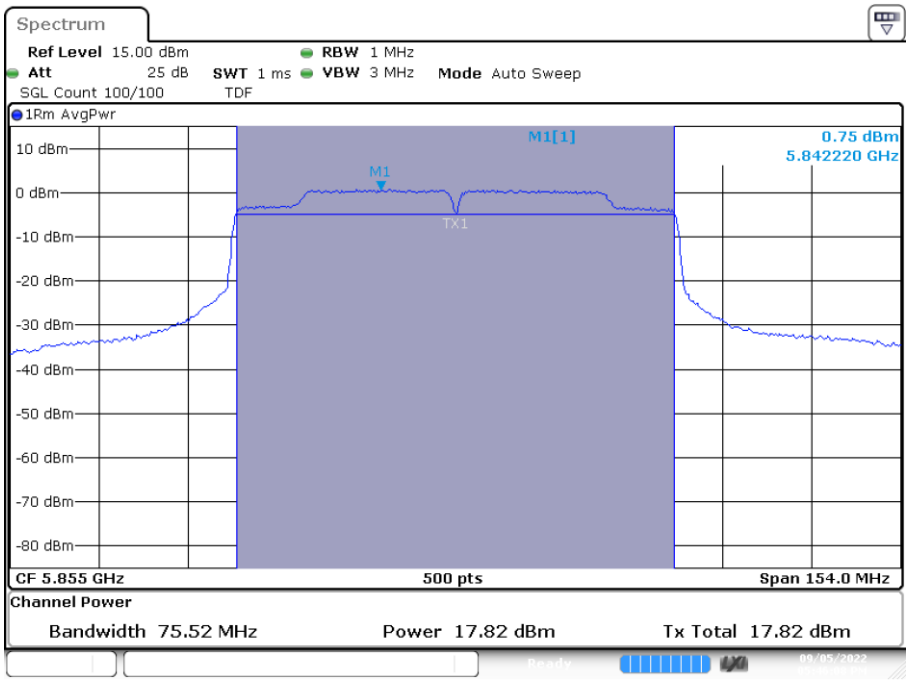

ChainA – Div1, 802.11ax20, HE0-CH173

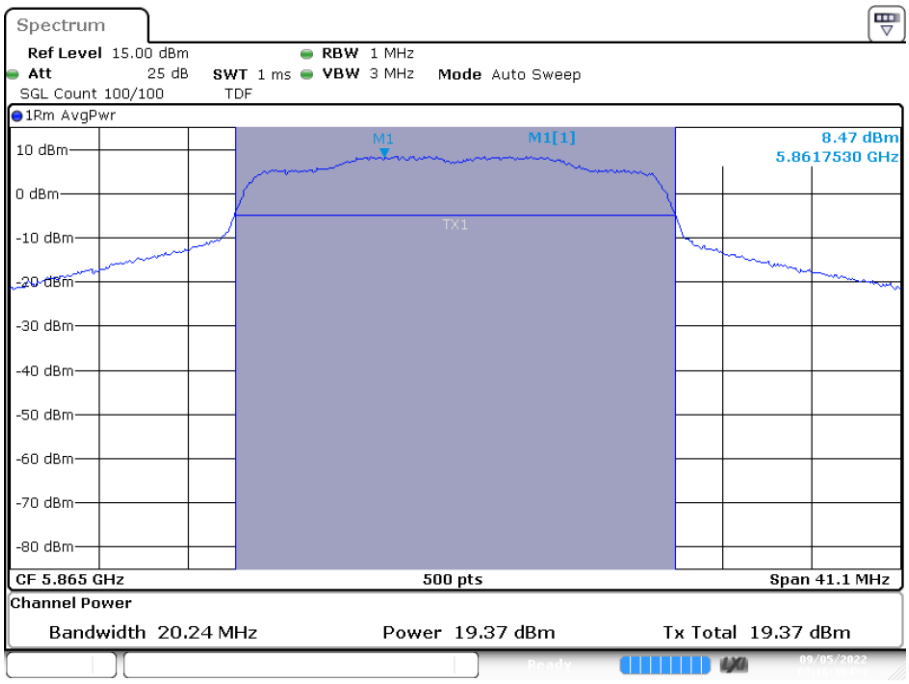

ChainA – Div1, 802.11ax40, HE0-CH167

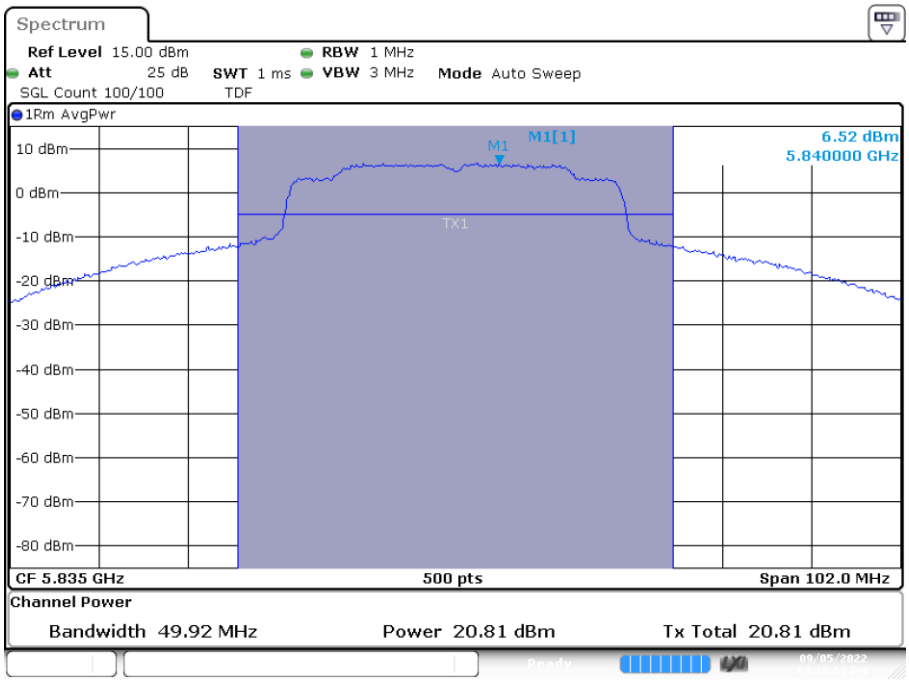

ChainA – Div1, 802.11ax80, HE0-CH171

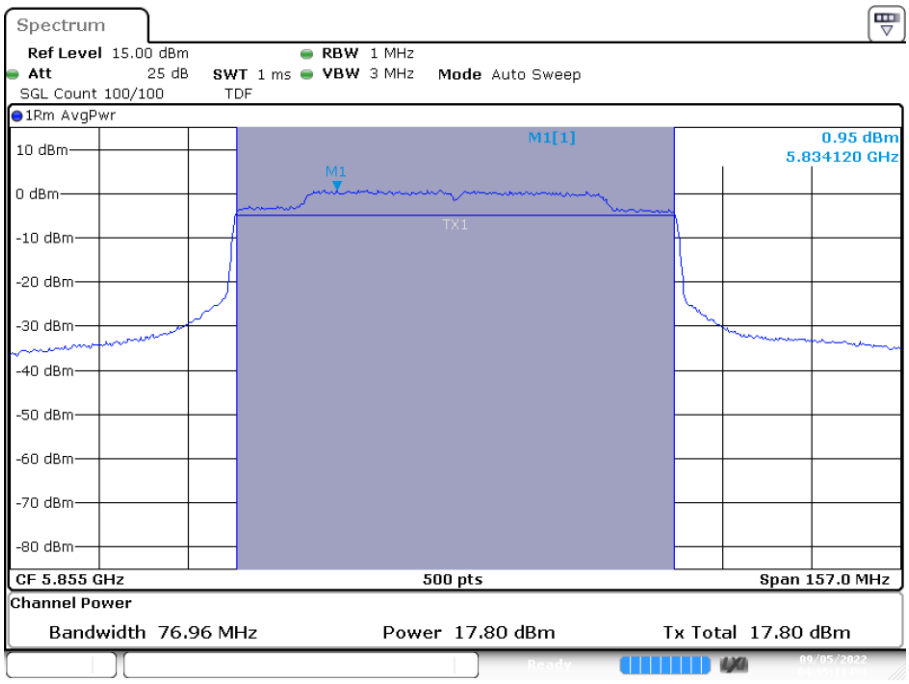

B.3.4 Maximum Power Spectral Density (PSD)

ChainA – Div1, 802.11a, 6Mbps-CH173

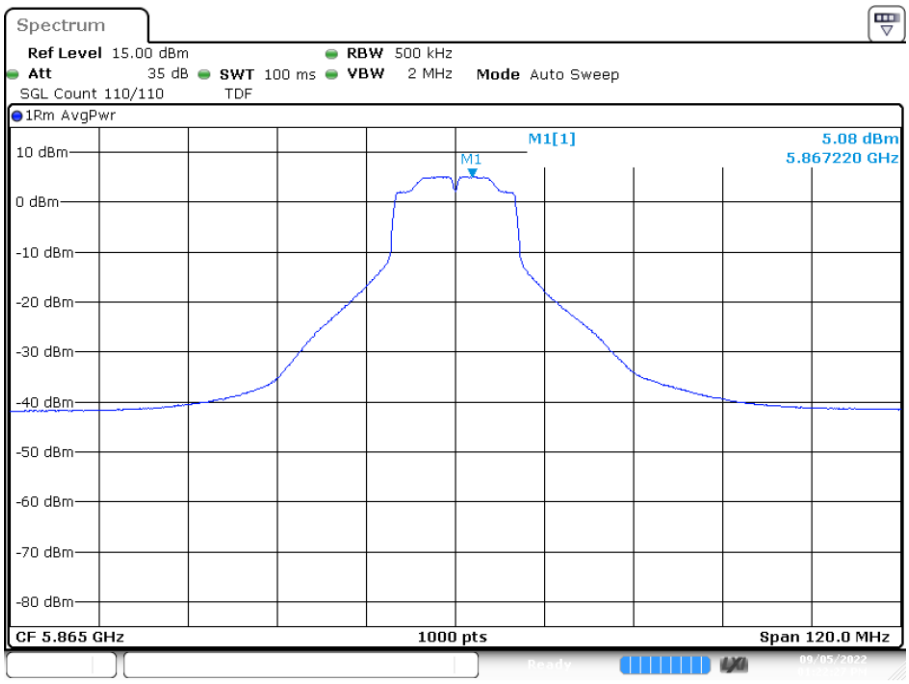

ChainA – Div2, 802.11n20, HT0-CH169

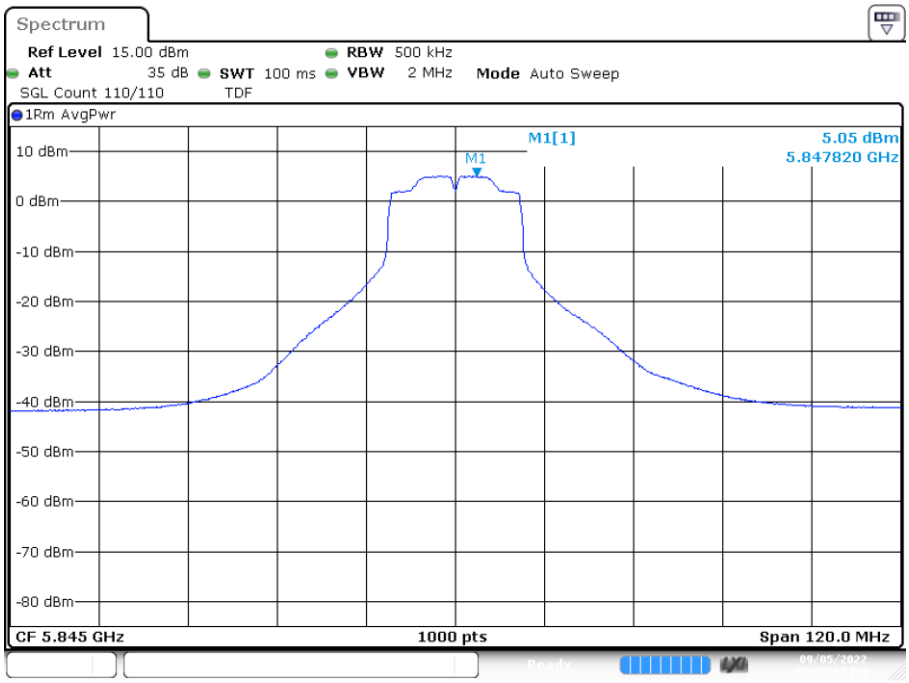

ChainA – Div1, 802.11n40, HT0-CH167

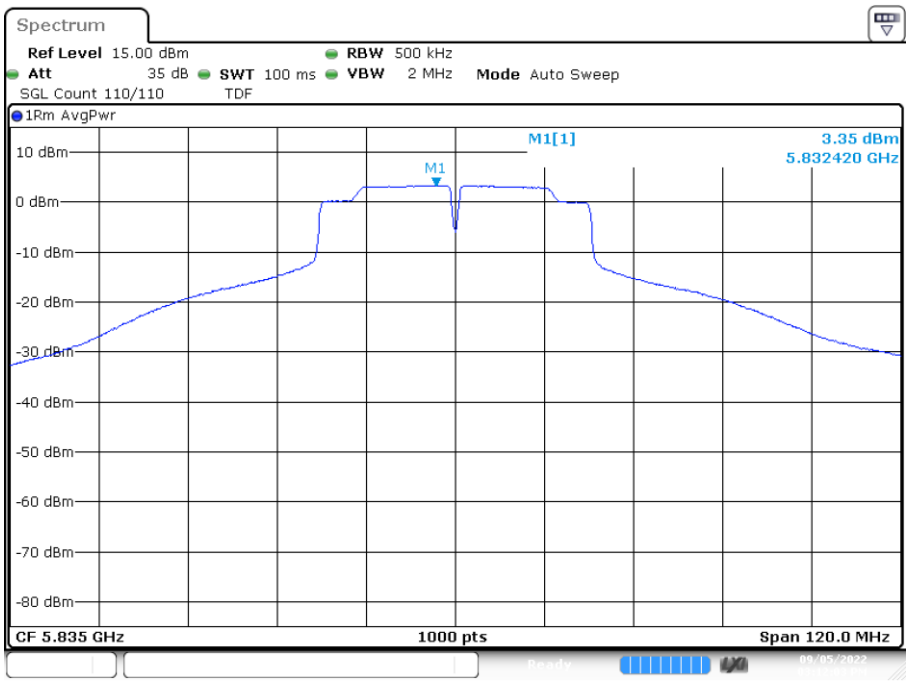

ChainA – Div2, 802.11ac80, VHT0-CH171

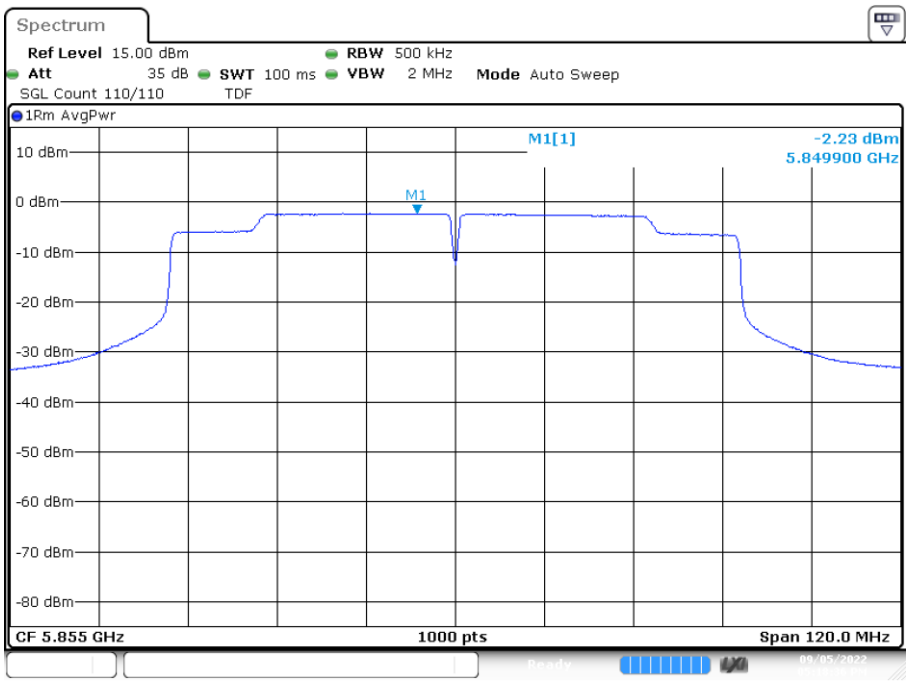

ChainA – Div1, 802.11ax20, HE0-CH173

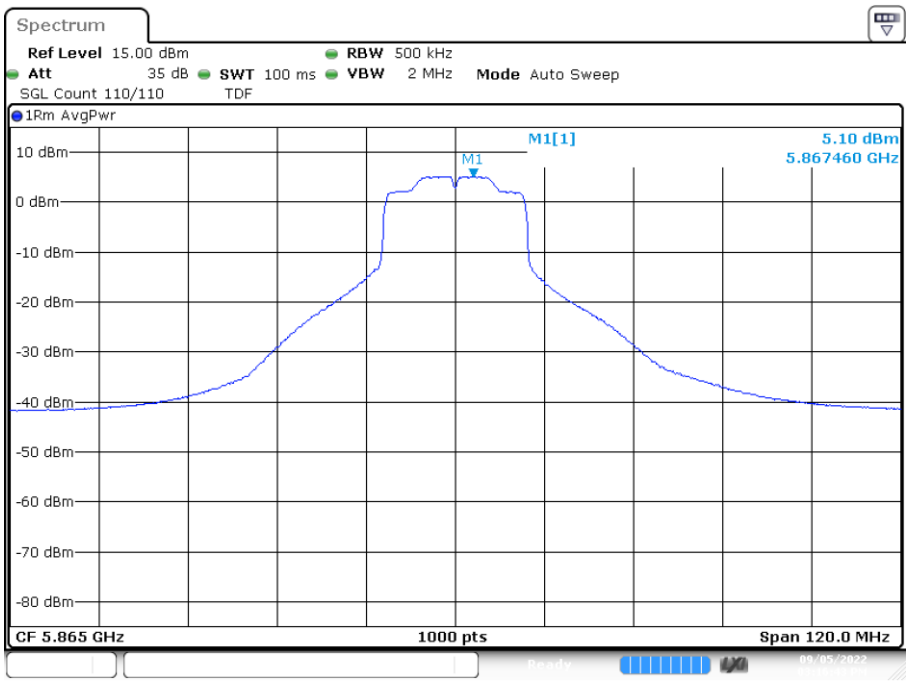

ChainA – Div1, 802.11ax40, HE0-CH167

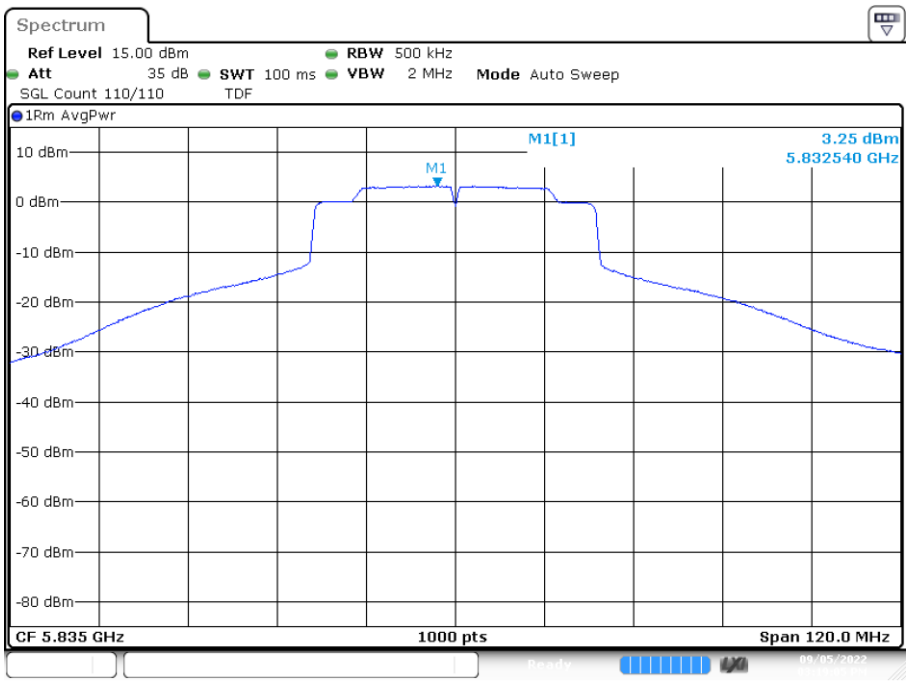

ChainA – Div1, 802.11ax80, HE0-CH171

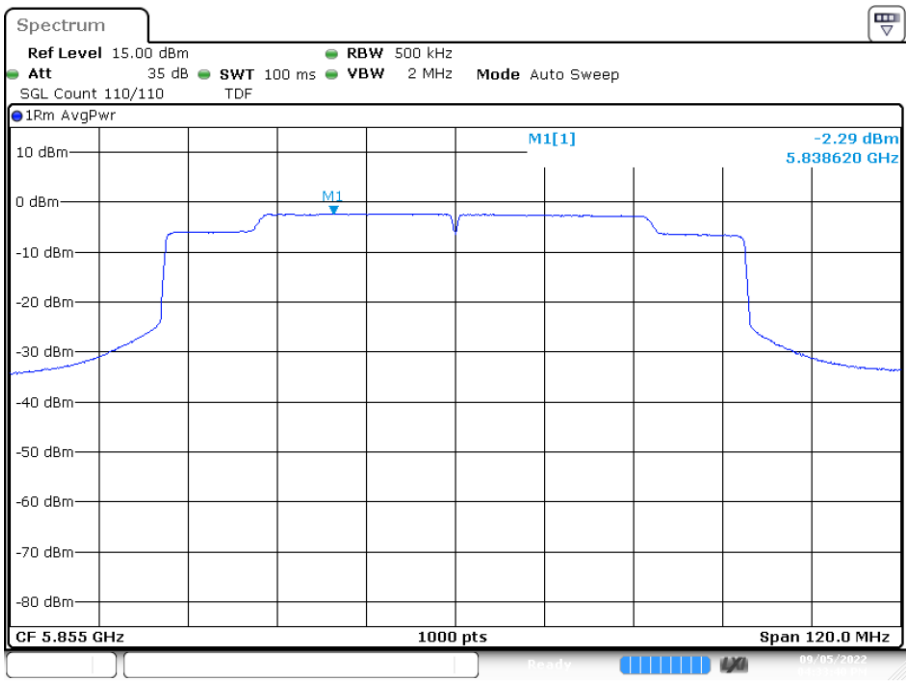

B.3.5 Undesirable emission limits : out of band (Conducted)

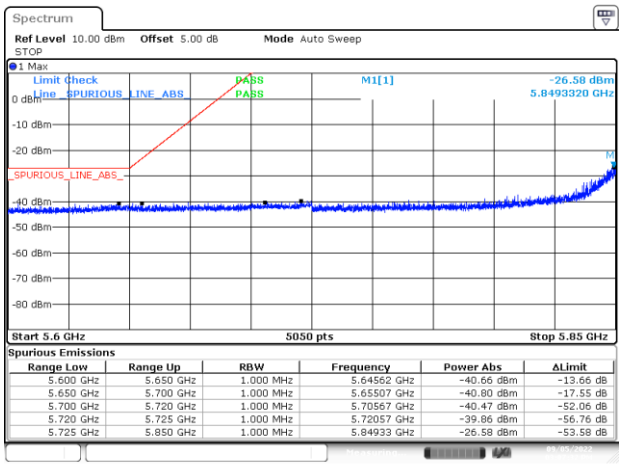

BE-NR-LOW, CHAIN A -DIV1, 802.11a20-6Mbps, Ch177

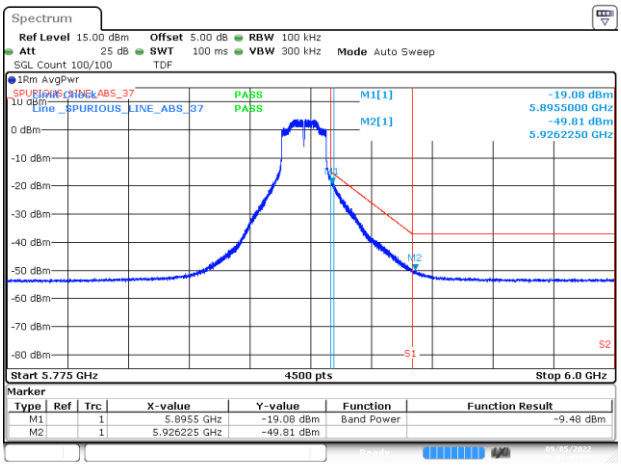

BE-NR-HIGH, CHAIN A – DIV1, 802.11a20-6Mbps, Ch177

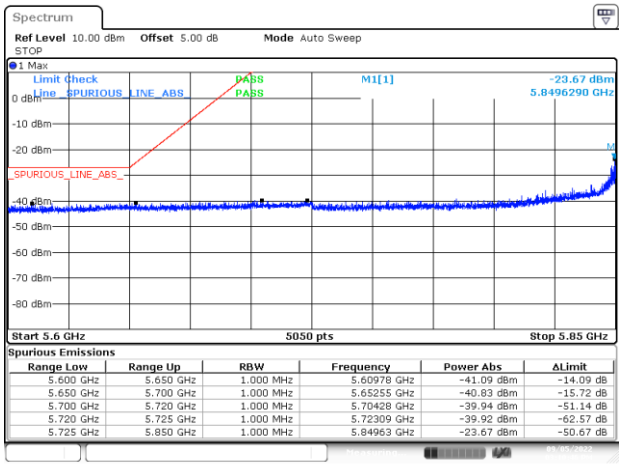

BE-NR-LOW, CHAIN A -DIV1, 802.11n20-HT0, Ch177

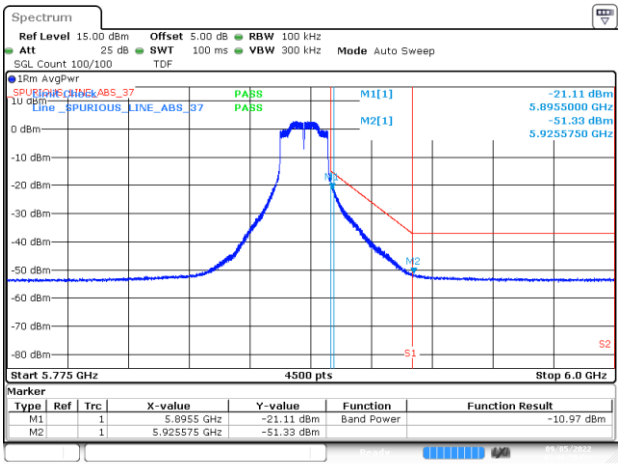

BE-NR-HIGH, CHAIN A – DIV1, 802.11n20-HT0, Ch177

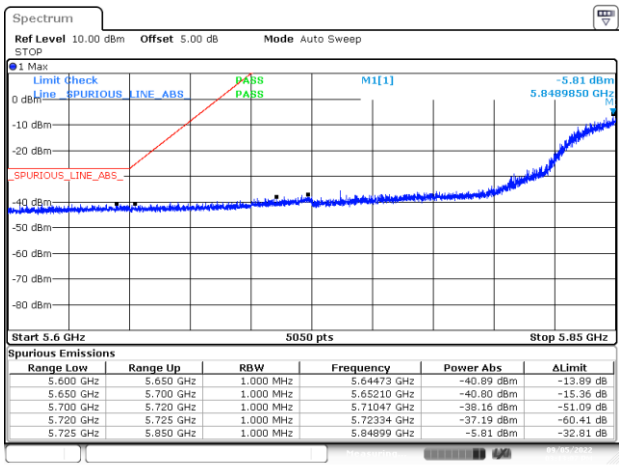

BE-NR-LOW, CHAIN A -DIV1, 802.11n40-HT0, Ch175

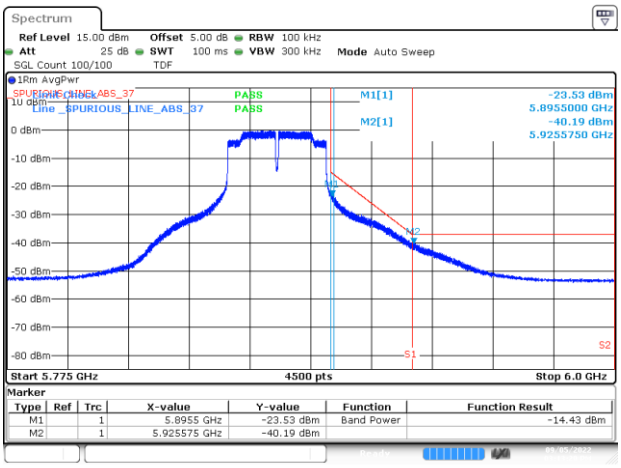

BE-NR-HIGH, CHAIN A – DIV1, 802.11n40-HT0, Ch175

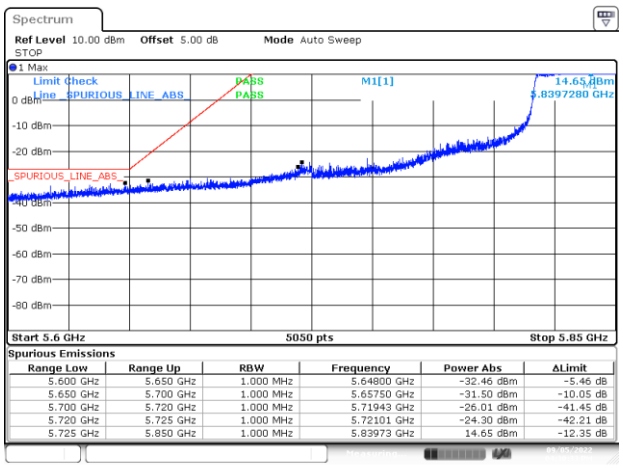

BE-NR-LOW, CHAIN A -DIV1, 802.11ac80-VHT0, Ch171

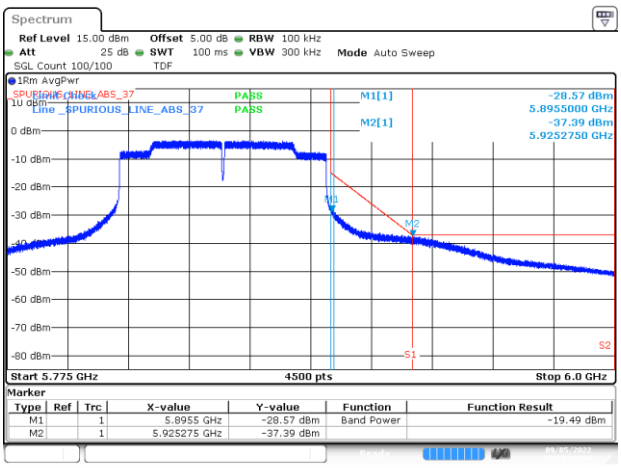

BE-NR-HIGH, CHAIN A – DIV1, 802.11ac80-VHT0, Ch171

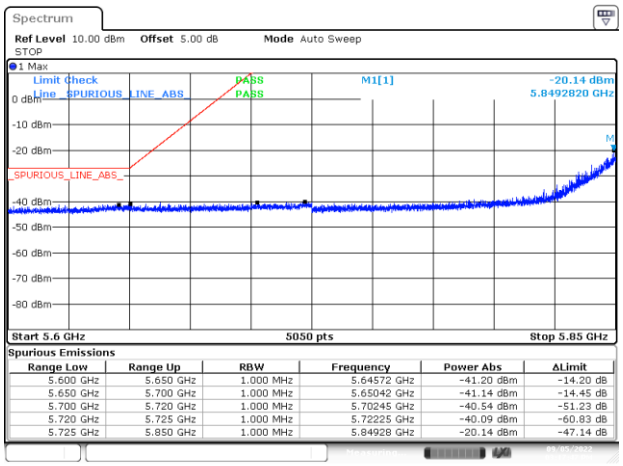

BE-NR-LOW, CHAIN A -DIV1, 802.11ax20-HE0, Ch177

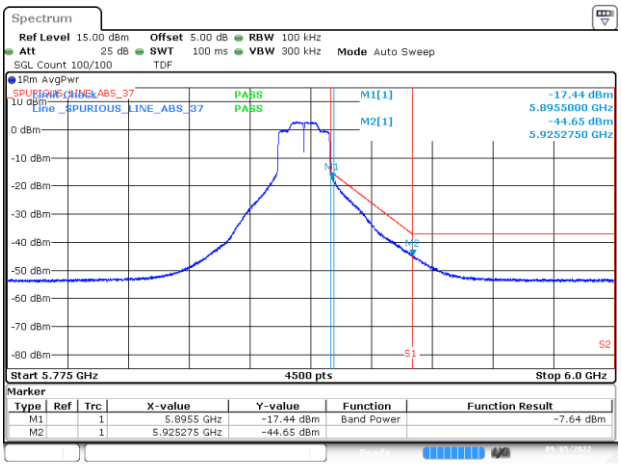

BE-NR-HIGH, CHAIN A – DIV1, 802.11ax20-HE0, Ch177

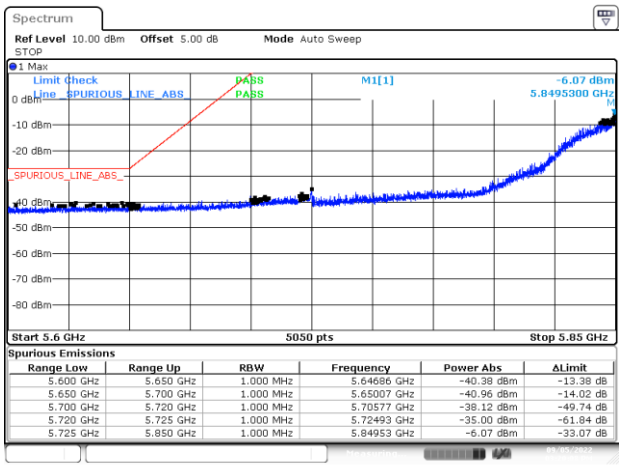

BE-NR-LOW, CHAIN A -DIV1, 802.11ax40-HE0, Ch175

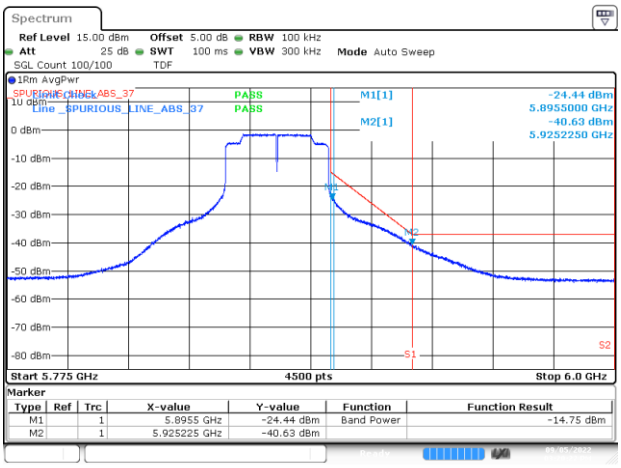

BE-NR-HIGH, CHAIN A – DIV1, 802.11ax40-HE0, Ch175

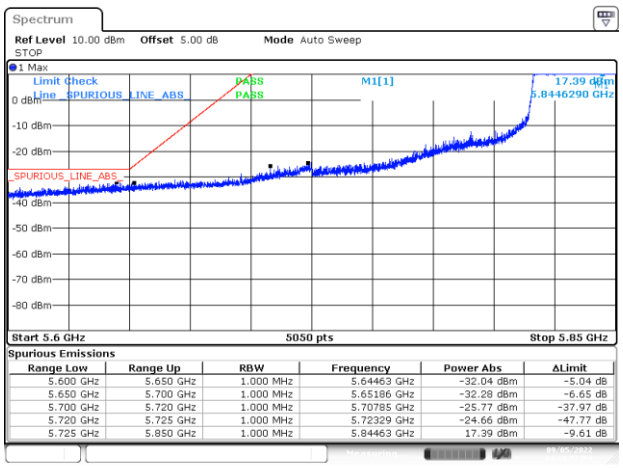

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
5.600 GHz	5.650 GHz	1.000 MHz	5.64463 GHz	-32.04 dBm	-5.04 dB
5.650 GHz	5.700 GHz	1.000 MHz	5.65186 GHz	-32.28 dBm	-6.65 dB
5.700 GHz	5.720 GHz	1.000 MHz	5.70785 GHz	-25.77 dBm	-37.97 dB
5.720 GHz	5.725 GHz	1.000 MHz	5.72329 GHz	-24.66 dBm	-47.77 dB
5.725 GHz	5.850 GHz	1.000 MHz	5.84463 GHz	17.39 dBm	-9.61 dB

BE-NR-LOW, CHAIN A -DIV1, 802.11ax80-HE0, Ch171

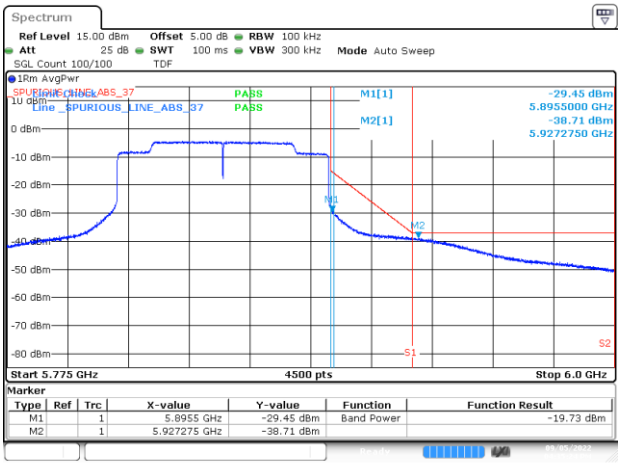

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.8955 GHz	-29.45 dBm	Band Power	-19.73 dBm
M2		1	5.927275 GHz	-38.71 dBm		

BE-NR-HIGH, CHAIN A – DIV1, 802.11ax80-HE0, Ch171

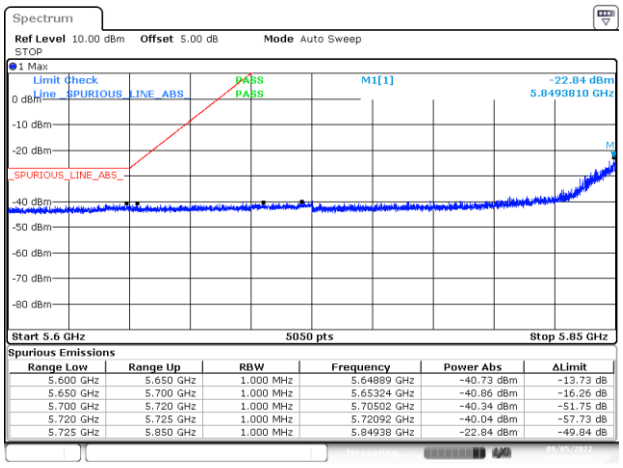

BE-NR-LOW, CHAIN A - DIV2, 802.11a20-6Mbps, Ch177

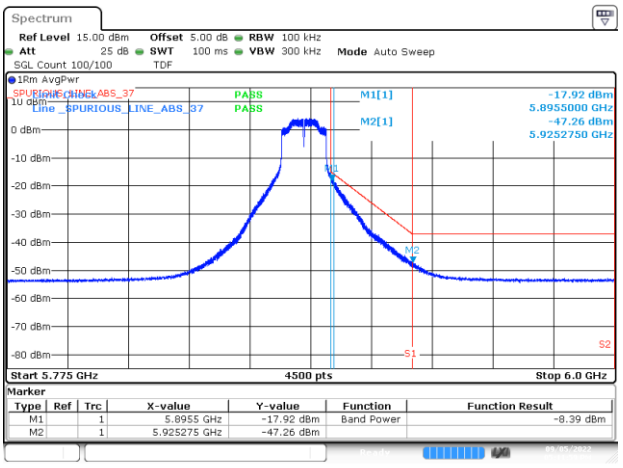

BE-NR-HIGH, CHAIN A - DIV2, 802.11a20-6Mbps, Ch177

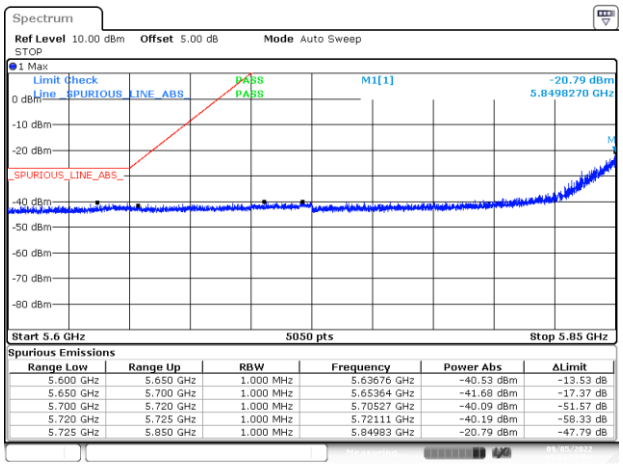

BE-NR-LOW, CHAIN A - DIV2, 802.11n20-HT0, Ch177

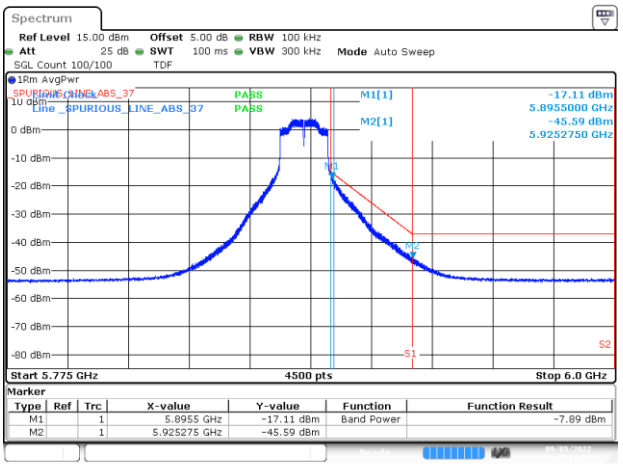

BE-NR-HIGH, CHAIN A - DIV2, 802.11n20-HT0, Ch177

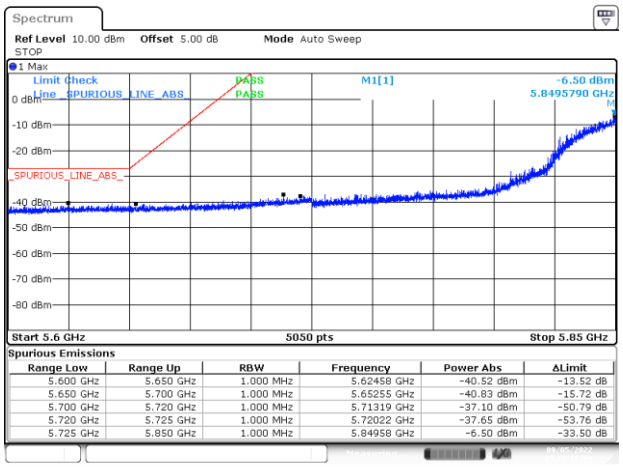

BE-NR-LOW, CHAIN A - DIV2, 802.11n40-HT0, Ch175

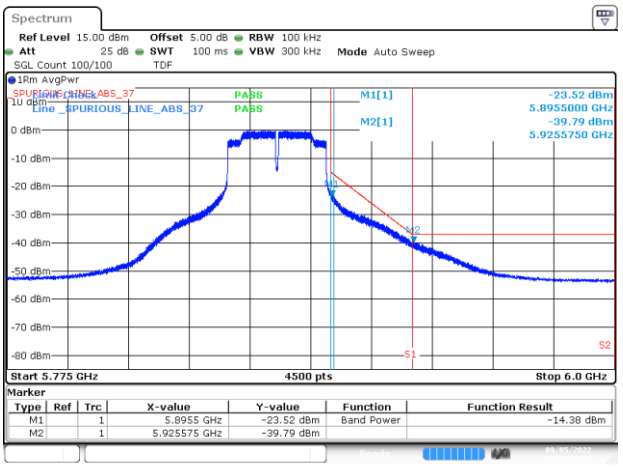

BE-NR-HIGH, CHAIN A - DIV2, 802.11n40-HT0, Ch175

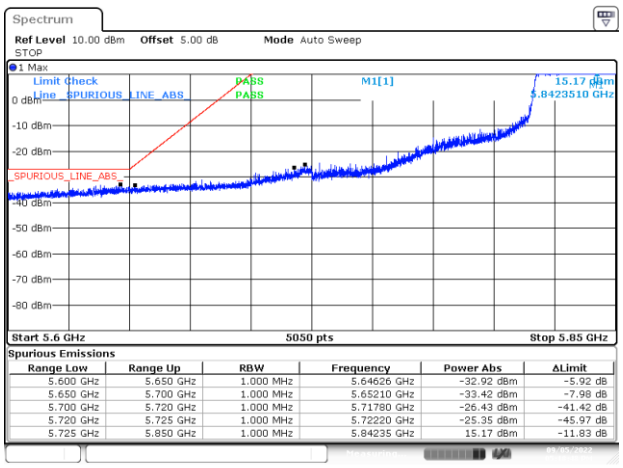

BE-NR-LOW, CHAIN A - DIV2, 802.11ac80-VHT0, Ch171

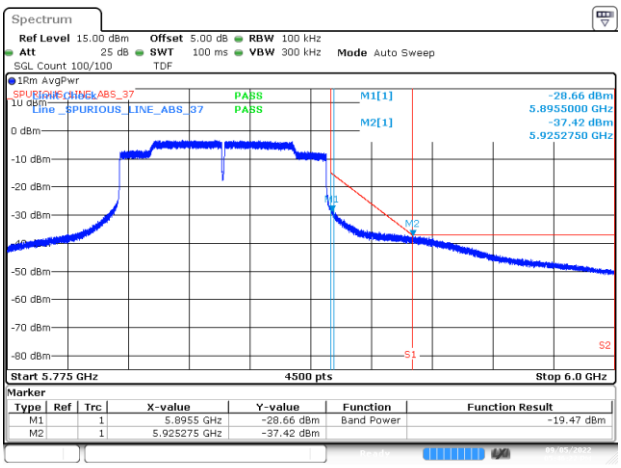

BE-NR-HIGH, CHAIN A - DIV2, 802.11ac80-VHT0, Ch171

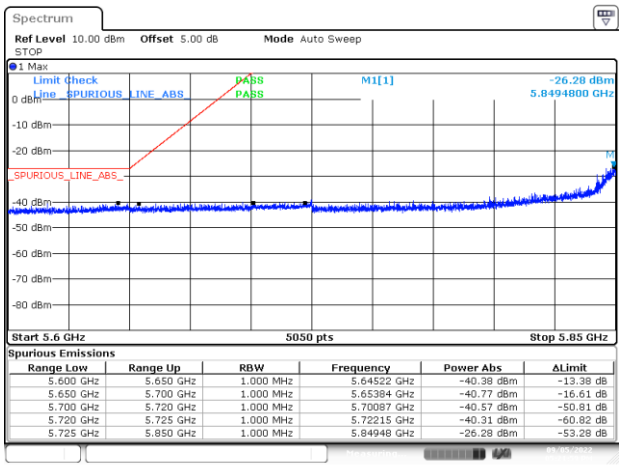

BE-NR-LOW, CHAIN A - DIV2, 802.11ax20-HE0, Ch177

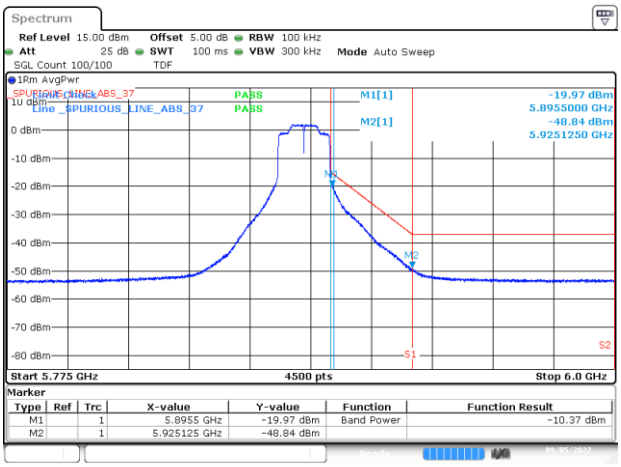

BE-NR-HIGH, CHAIN A - DIV2, 802.11ax20-HE0, Ch177

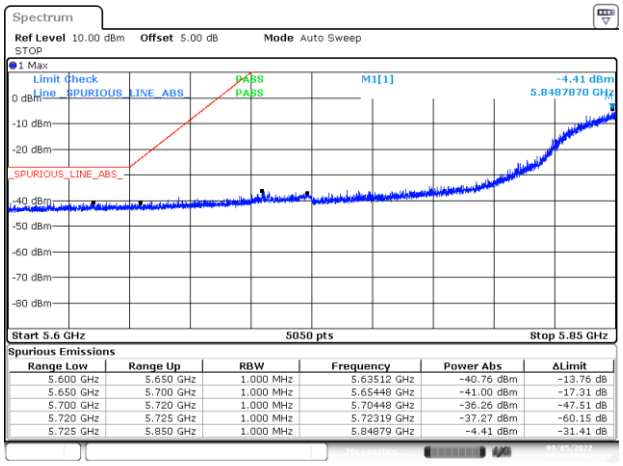

BE-NR-LOW, CHAIN A - DIV2, 802.11ax40-HE0, Ch175

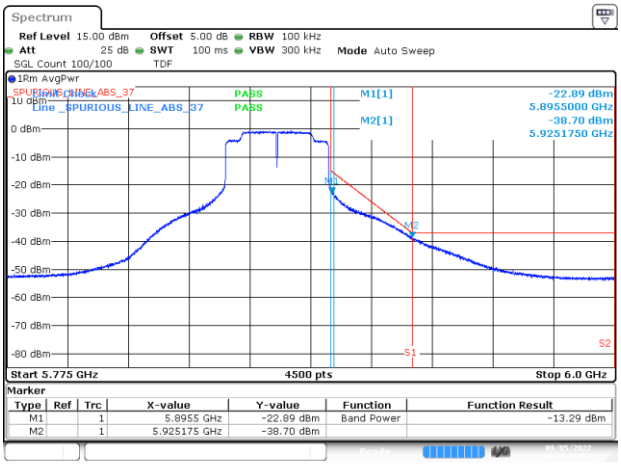

BE-NR-HIGH, CHAIN A - DIV2, 802.11ax40-HE0, Ch175

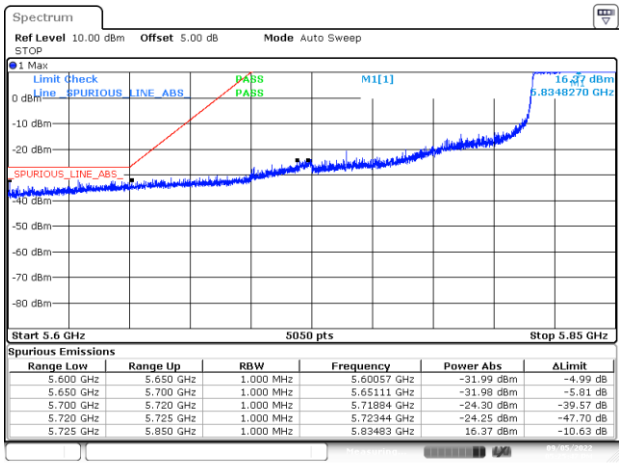

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
5.600 GHz	5.650 GHz	1.000 MHz	5.60057 GHz	-31.99 dBm	-4.99 dB
5.650 GHz	5.700 GHz	1.000 MHz	5.65111 GHz	-31.98 dBm	-5.81 dB
5.700 GHz	5.720 GHz	1.000 MHz	5.71884 GHz	-24.30 dBm	-39.57 dB
5.720 GHz	5.725 GHz	1.000 MHz	5.72344 GHz	-24.25 dBm	-47.70 dB
5.725 GHz	5.850 GHz	1.000 MHz	5.83483 GHz	16.37 dBm	-10.63 dB

BE-NR-LOW, CHAIN A - DIV2, 802.11ax80-HE0, Ch171

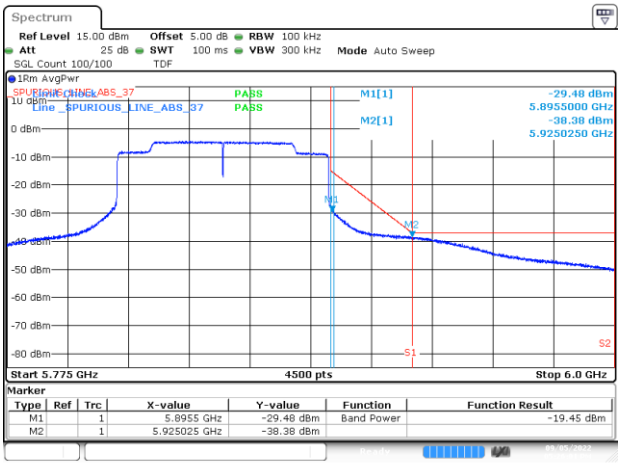

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.8955 GHz	-29.48 dBm	Band Power	-19.45 dBm
M2		1	5.925025 GHz	-38.38 dBm		

BE-NR-HIGH, CHAIN A - DIV2, 802.11ax80-HE0, Ch171

B.3.6 Undesirable emission limits : out of band Peak (Conducted)

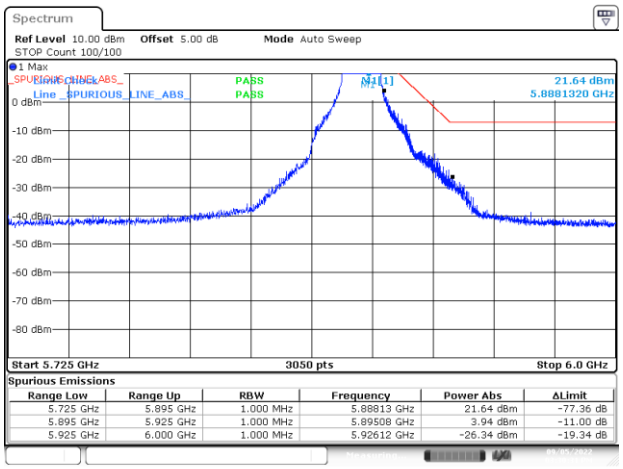

BE-NR-HIGH, CHAIN A - DIV1, 802.11a20-6Mbps, Ch177

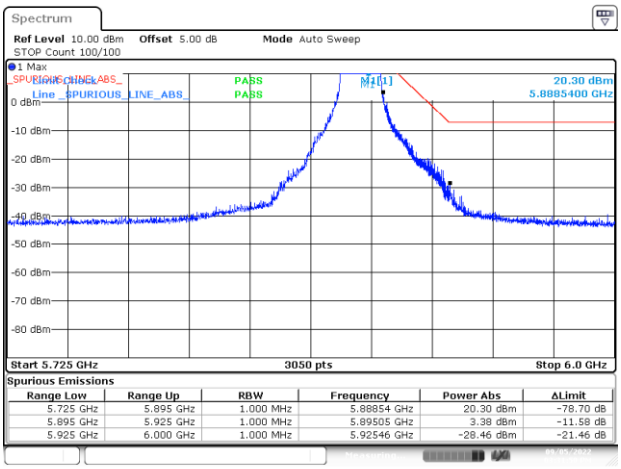

BE-NR-HIGH, CHAIN A - DIV1, 802.11n20-HT0, Ch177

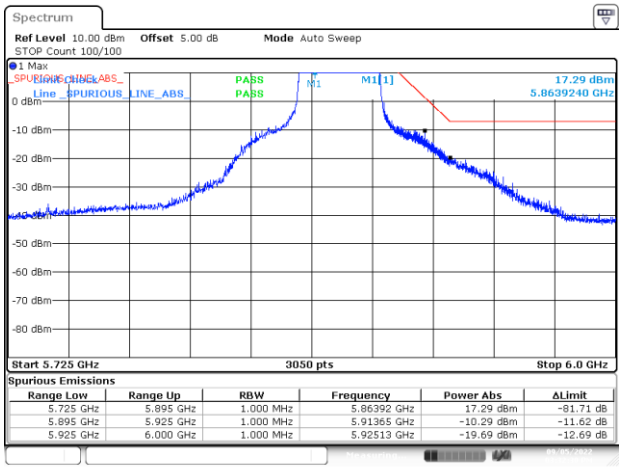

BE-NR-HIGH, CHAIN A - DIV1, 802.11n40-HT0, Ch175

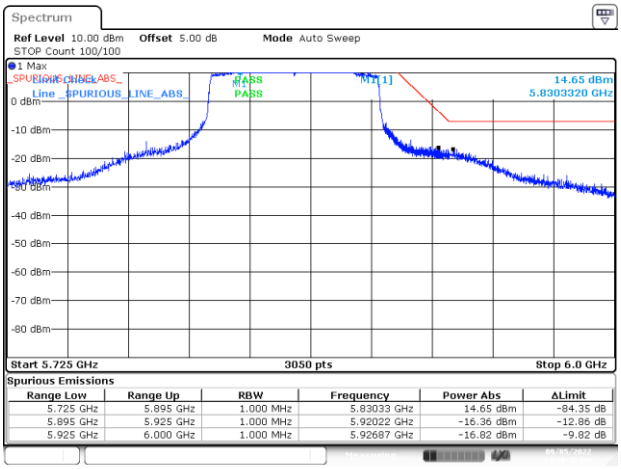

BE-NR-HIGH, CHAIN A - DIV1, 802.11ac80-VHT0, Ch171

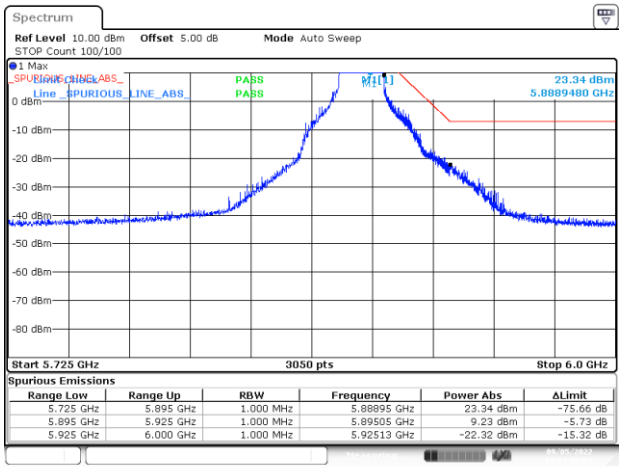

BE-NR-HIGH, CHAIN A - DIV1, 802.11ax20-HE0, Ch177

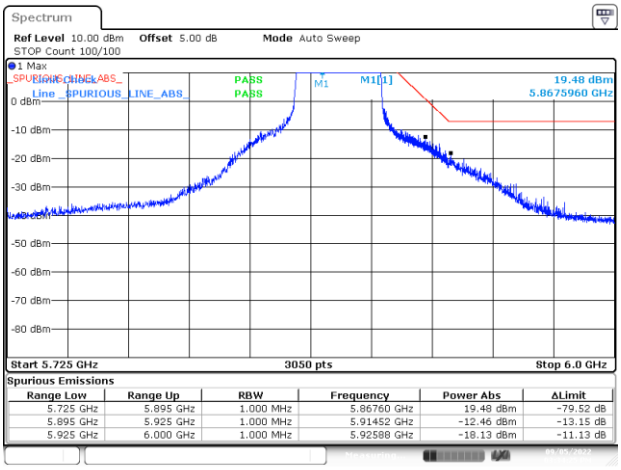

BE-NR-HIGH, CHAIN A - DIV1, 802.11ax40-HE0, Ch175

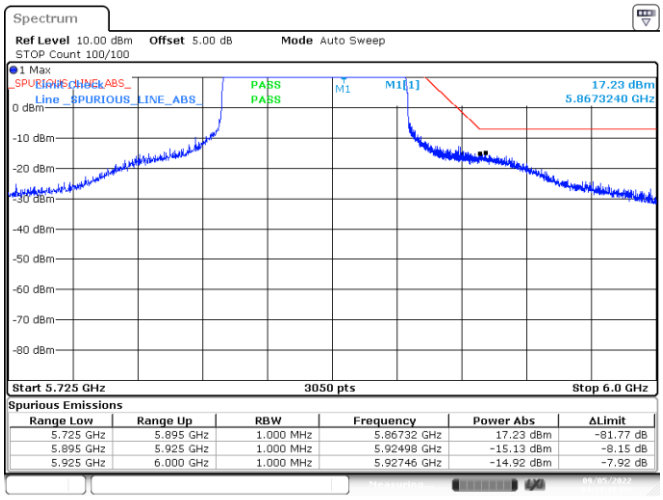

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
5.725 GHz	5.895 GHz	1.000 MHz	5.86732 GHz	17.23 dBm	-81.77 dB
5.895 GHz	5.925 GHz	1.000 MHz	5.92498 GHz	-15.13 dBm	-8.15 dB
5.925 GHz	6.000 GHz	1.000 MHz	5.92746 GHz	-14.92 dBm	-7.92 dB

BE-NR-HIGH, CHAIN A - DIV1, 802.11ax80-HE0, Ch171

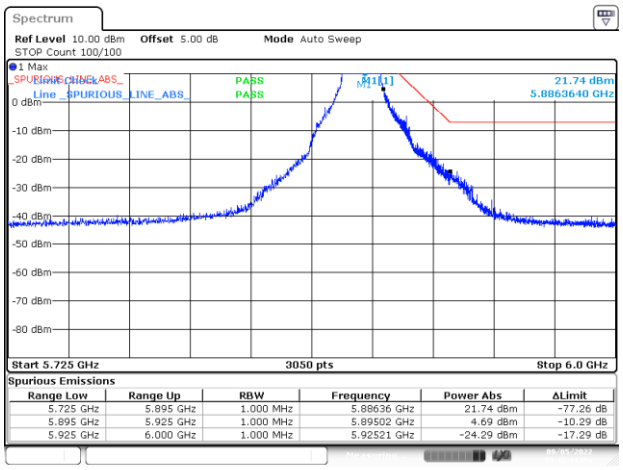

BE-NR-HIGH, CHAIN A - DIV2, 802.11a20-6Mbps, Ch177

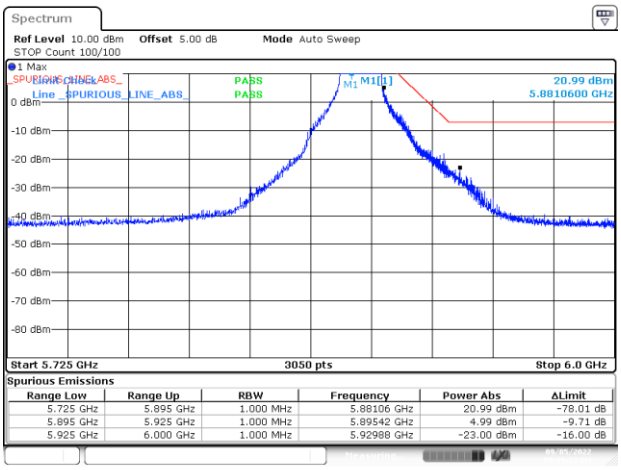

BE-NR-HIGH, CHAIN A - DIV2, 802.11n20-HT0, Ch177

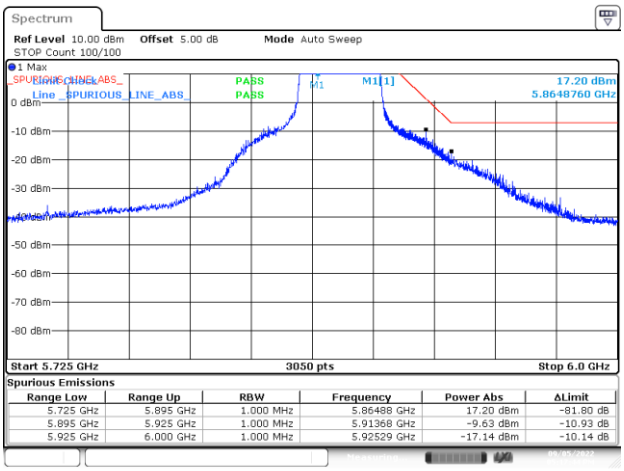

BE-NR-HIGH, CHAIN A - DIV2, 802.11n40-HT0, Ch175

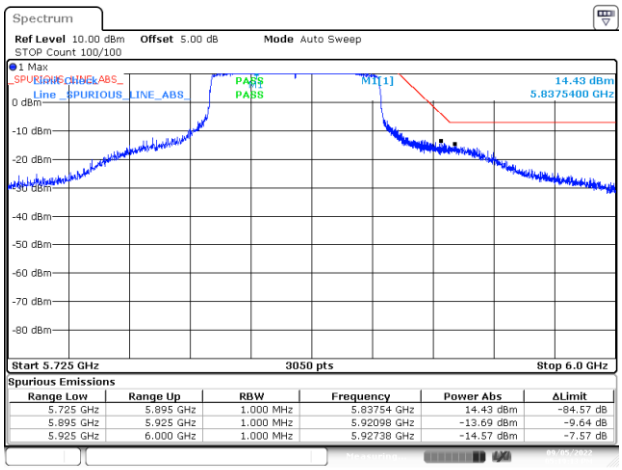

BE-NR-HIGH, CHAIN A - DIV2, 802.11ac80-VHT0, Ch171

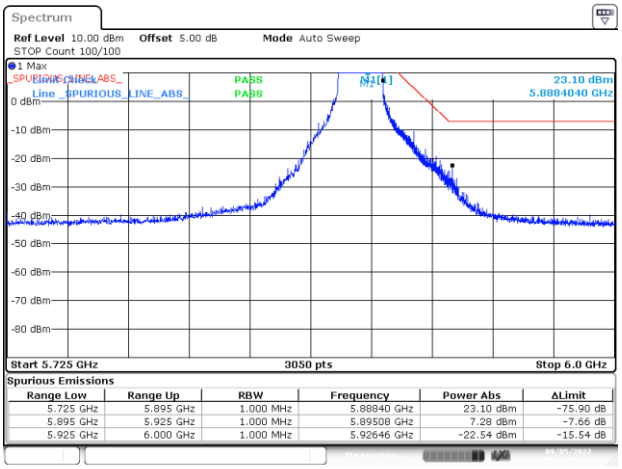

BE-NR-HIGH, CHAIN A - DIV2, 802.11ax20-HE0, Ch177

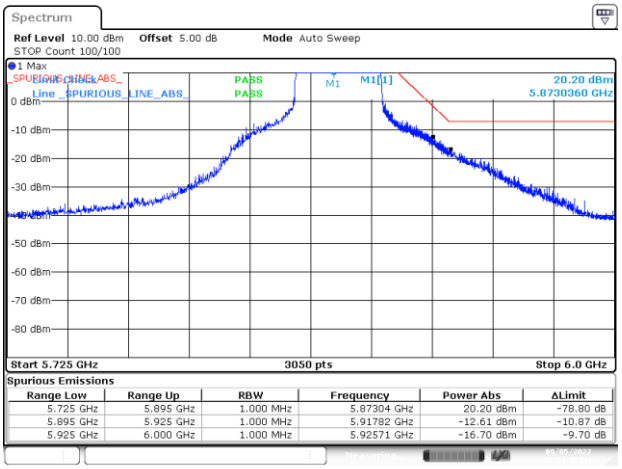

BE-NR-HIGH, CHAIN A - DIV2, 802.11ax40-HE0, Ch175

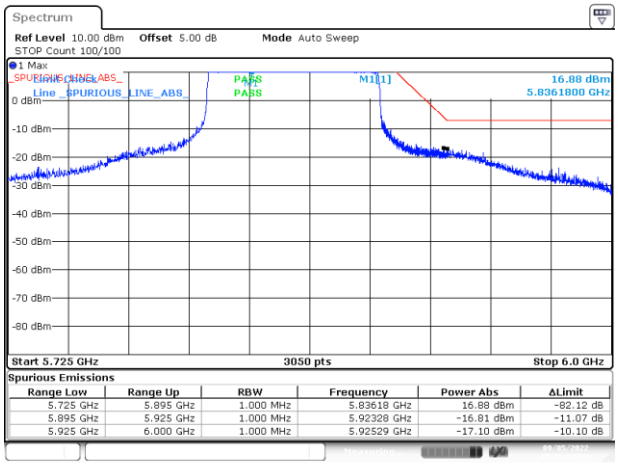

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
5.725 GHz	5.895 GHz	1.000 MHz	5.83618 GHz	16.88 dBm	-82.12 dB
5.895 GHz	5.925 GHz	1.000 MHz	5.92328 GHz	-16.81 dBm	-11.07 dB
5.925 GHz	6.000 GHz	1.000 MHz	5.92529 GHz	-17.10 dBm	-10.10 dB

BE-NR-HIGH, CHAIN A - DIV2, 802.11ax80-HE0, Ch171