

Test Report No.: <i>Prüfbericht-Nr.:</i>	NL22E26D 001	Order No.: <i>Auftrags-Nr.:</i>	1111986_020	Page 1 of 40 <i>Seite 1 von 40</i>
Client Reference No.: <i>Kunden-Referenz-Nr.:</i>	—	Order date: <i>Auftragsdatum:</i>	2022-03-31	
Client: <i>Auftraggeber:</i>	Intel Corporation SAS, Rue de Goa 425, 06600 Antibes,, France			
Test item: <i>Prüfgegenstand:</i>	Wireless Network Card			
Identification / Type No.: <i>Bezeichnung / Typ-Nr.:</i>	AX204NGW			
Order content: <i>Auftrags-Inhalt:</i>	Prüfung der elektromagnetischen Verträglichkeit EMV / Test of electromagnetic compatibility EMC			
Test specification: <i>Prüfgrundlage:</i>	Komplettprüfung / Complete test 47 CFR FCC Part 15 Subpart B ICES-003 (Issue 7)			
Date of receipt: <i>Wareneingangsdatum:</i>	14.03.2022			
Test sample No.: <i>Prüfmuster-Nr.:</i>	A003227034-001			
Testing period: <i>Prüfzeitraum:</i>	2022.04.04 - 2022.04.14			
Place of testing: <i>Ort der Prüfung:</i>	Nürnberg / Nuremberg			
Testing laboratory: <i>Prüflaboratorium:</i>	EMV Labor / EMC test lab			
Test result*: <i>Prüfergebnis*:</i>	PASS			
tested by: <i>geprüft von:</i>	 14.04.2022 Signiert von: Daniel Richter	authorized by: <i>genehmigt von:</i>	 19.04.2022 Signiert von: Patrick Reusch	
Date: <i>Datum:</i> 2022-04-19		Issue Date: <i>Ausstellungsdatum:</i> 2022-04-19		
Position / Stellung	Expert/Sachverständige(r)	Position / Stellung	Expert/Sachverständige(r)	
Other / Sonstiges:				
Condition of the test item at delivery: <i>Zustand des Prüfgegenstandes bei Anlieferung:</i>		Test item complete and undamaged <i>Prüfmuster vollständig und unbeschädigt</i>		
* Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested * Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. <i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i>				

Test Report No.: NL22E26D 001

Page 2 of 40

Remarks
Anmerkungen

1	The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request. <i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i> <i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i>
2	As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. <i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i>
3	Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report. <i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i>
4	The measurement uncertainty of the measurement procedures listed in this test report does not include the compliance of the respective limit values / operating conditions. For emission tests the requirements, CISPR 16-4-2 / EN 55016-4-2 (chapter 4.2) apply in their current form. For immunity tests, the specific dated requirements of the applied measurement and test procedures shall apply. <i>Die Messunsicherheit der in diesem Prüfbericht aufgeführten Messverfahren wird nicht in die Einhaltung der jeweiligen Grenzwerte / Betriebsbedingungen mit einbezogen. Für Emissionsprüfungen gelten die Anforderungen CISPR 16-4-2 / EN55016-4-2 (Kapitel 4.2) in aktueller Form. Für Störfestigkeitsprüfungen gelten die speziellen datierten Anforderungen der angewendeten Mess- und Prüfverfahren.</i>

Test Report No.: NL22E26D 001

Page 3 of 40

Remarks
Anmerkungen

- | | |
|----------|--|
| 5 | <p>Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards.
At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards.
Evaluation conditions deviating from these are documented separately in the respective chapters.</p> <p><i>Sofern mit dem Kunden keine abweichende Regelung getroffen wurde, wird eine Konformitätsbewertung grundsätzlich auf Basis der angewendeten Normen durchgeführt.
Auf Kundenwunsch wird die Aussage zur Konformität des in diesem Prüfbericht geprüften Produktes nach den Kriterien/Anforderungen der angewendeten Normen durchgeführt.
Davon abweichende Bewertungsbedingungen werden in den jeweiligen Kapiteln gesondert dokumentiert.</i></p> |
|----------|--|

Test Report No.: NL22E26D 001

Page 4 of 40

Product description

6	Identical types	—
7	Description	AX204NGW
8	Serial number	—
9	Manufacturer	identisch mit Auftraggeber / same as applicant
10	Rated voltage	Laptop powersupply: 120 V
11	Rated frequency	Laptop powersupply: 60 Hz
12	Rated current	—
13	Rated power consumption	—
14	Equipment type	Sonstiges/Other
15	Equipment categorie	Class B
16	Protection class	III - Schutzkleinspannung/Safety extra-low voltage
17	Hardware version	—
18	Software version	—
19	Dimensions	—
20	Weight	—
21	Other	Built inside extender, processed by laptop
22	Test sample obtaining:	☒ Sending by customer ☐ Sampling by TÜV Rheinland Group ☐ others:

Test Report No.: NL22E26D 001

Page 5 of 40

Product description

Picture 1



Picture 2



Test Report No.: NL22E26D 001

Page 6 of 40

Clause	Requirements – Tests	Measuring results - Remarks	Result																																
23	Conducted voltage emissions FCC Part 15 Subpart B section 15.107 ICES-003 (Issue 7) section 3.2.1	<i>Details in protocol number:</i> 1271 <i>Operating mode:</i> Continuous Operation <i>EUT:</i> AX204NGW (A003227034-001) <i>Terminals:</i> Netzleitung / Supply line <i>Remarks:</i> —	P ☒ F ☐ N/A ☐ N/T ☐																																
Limits 47 CFR FCC Part 15 Subpart B section §15.107 Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges. <table><tr><th>Frequency [MHz]</th><th>Quasi-peak [dB(µV)]</th><th>Average [dB(µV)]</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr></table> *Decreases linearly with the logarithm of the frequency. ICES-003 section 3.2.1 <table><tr><th>Frequency [MHz]</th><th>Class A Quasi-peak [dBµV]</th><th>Class A Average [dBµV]</th><th>Class B Quasi-peak [dBµV]</th><th>Class B Average [dBµV]</th></tr><tr><td>0.15 – 0.5</td><td>79</td><td>66</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5 – 5</td><td>73</td><td>60</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>73</td><td>60</td><td>60</td><td>50</td></tr></table> *Decreases linearly with the logarithm of the frequency.				Frequency [MHz]	Quasi-peak [dB(µV)]	Average [dB(µV)]	0.15 – 0.5	66 to 56*	56 to 46*	0.5 – 5	56	46	5 – 30	60	50	Frequency [MHz]	Class A Quasi-peak [dBµV]	Class A Average [dBµV]	Class B Quasi-peak [dBµV]	Class B Average [dBµV]	0.15 – 0.5	79	66	66 to 56*	56 to 46*	0.5 – 5	73	60	56	46	5 – 30	73	60	60	50
Frequency [MHz]	Quasi-peak [dB(µV)]	Average [dB(µV)]																																	
0.15 – 0.5	66 to 56*	56 to 46*																																	
0.5 – 5	56	46																																	
5 – 30	60	50																																	
Frequency [MHz]	Class A Quasi-peak [dBµV]	Class A Average [dBµV]	Class B Quasi-peak [dBµV]	Class B Average [dBµV]																															
0.15 – 0.5	79	66	66 to 56*	56 to 46*																															
0.5 – 5	73	60	56	46																															
5 – 30	73	60	60	50																															

Test Report No.: NL22E26D 001

Page 7 of 40

Clause	Requirements – Tests	Measuring results - Remarks	Result
	Method of measurement of conducted emission <i>Floor-standing equipment was placed on a non-conducting support (up to 15 cm) over the reference ground plane. Tabletop equipment was placed on a table at a height of 0.8 m above the reference ground plane. All equipment was minimum 0.4 m away from the conducting walls of a shielded room. The Artificial Mains Network (AMN) was placed 0.8 m away from the boundary of the unit under test and bonded to the ground reference plane. All other units of the EUT and associated equipment were at least 0.8 m from the AMN. Supporting units were connected to other AMN if necessary. A pre-scan was made with peak and average-detector on all mains lines at the output of the AMN. The whole required frequency range was investigated for maximum conducted interferences. After data reduction, a final measurement of the highest emissions was made with quasi-peak and average detector with a measurement time of at least 1 s per single frequency.</i>		
24	Radiated disturbance 47 CFR FCC Part 15 Section 15.109 ICES-003 (Issue 7) section 3.2.2	<i>Details in protocol number:</i> 1277 <i>Operating mode:</i> Standby <i>EUT:</i> AX204NGW (A003227034-001) <i>Terminals:</i> Gehäuse / Enclosure <i>Remarks:</i> —	P ☒ F ☐ N/A ☐ N/T ☐
25	Radiated disturbance (> 1 GHz) 47 CFR FCC Part 15 Section 15.109 ICES-003 (Issue 7) section 3.2.2	<i>Details in protocol number:</i> 1557 <i>Operating mode:</i> Standby <i>EUT:</i> AX204NGW (A003227034-001) <i>Terminals:</i> Gehäuse / Enclosure <i>Remarks:</i> —	P ☒ F ☐ N/A ☐ N/T ☐

Test Report No.: NL22E26D 001

Page 8 of 40

Clause	Requirements – Tests	Measuring results - Remarks	Result																																								
26	Radiated disturbance (> 1 GHz) 47 CFR FCC Part 15 Section 15.109 ICES-003 (Issue 7) section 3.2.2	<i>Details in protocol number:</i> 1558 <i>Operating mode:</i> Standby <i>EUT:</i> AX204NGW (A003227034-001) <i>Terminals:</i> Gehäuse / Enclosure <i>Remarks:</i> —	P ☒ F ☐ N/A ☐ N/T ☐																																								
Limits 47 CFR FCC Part 15 Subpart B section §15.109 Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values <table><tr><th>Frequency [MHz]</th><th>Quasi-peak [dB(µV)/m]</th></tr><tr><td>30 – 88</td><td>40</td></tr><tr><td>88 – 216</td><td>43.5</td></tr><tr><td>216 – 960</td><td>46</td></tr><tr><td>Above 960</td><td>54</td></tr></table> Note: For frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified, there also is a limit on the peak level of the radio frequency emissions which is 20 dB above the maximum permitted average emission limit. (see § 15.35 Measurement detector functions and bandwidths) ICES-003 section 3.2.2 Radiated emissions limits (30 MHz to 1 GHz) <table><tr><th>Frequency [MHz]</th><th>Class A (3 m) Quasi-peak [dB(µV)/m]</th><th>Class A (10 m) Quasi-peak [dB(µV)/m]</th><th>Class B (3 m) Quasi-peak [dB(µV)/m]</th><th>Class B (10 m) Quasi-peak [dB(µV)/m]</th></tr><tr><td>30 – 88</td><td>50.0</td><td>40.0</td><td>40.0</td><td>30.0</td></tr><tr><td>88 – 216</td><td>54.0</td><td>43.5</td><td>43.5</td><td>33.1</td></tr><tr><td>216 – 230</td><td>56.9</td><td>46.4</td><td>46.0</td><td>35.6</td></tr><tr><td>230 – 960</td><td>57.0</td><td>47.0</td><td>47.0</td><td>37.0</td></tr><tr><td>960 – 1000</td><td>60.0</td><td>49.5</td><td>54.0</td><td>43.5</td></tr></table>				Frequency [MHz]	Quasi-peak [dB(µV)/m]	30 – 88	40	88 – 216	43.5	216 – 960	46	Above 960	54	Frequency [MHz]	Class A (3 m) Quasi-peak [dB(µV)/m]	Class A (10 m) Quasi-peak [dB(µV)/m]	Class B (3 m) Quasi-peak [dB(µV)/m]	Class B (10 m) Quasi-peak [dB(µV)/m]	30 – 88	50.0	40.0	40.0	30.0	88 – 216	54.0	43.5	43.5	33.1	216 – 230	56.9	46.4	46.0	35.6	230 – 960	57.0	47.0	47.0	37.0	960 – 1000	60.0	49.5	54.0	43.5
Frequency [MHz]	Quasi-peak [dB(µV)/m]																																										
30 – 88	40																																										
88 – 216	43.5																																										
216 – 960	46																																										
Above 960	54																																										
Frequency [MHz]	Class A (3 m) Quasi-peak [dB(µV)/m]	Class A (10 m) Quasi-peak [dB(µV)/m]	Class B (3 m) Quasi-peak [dB(µV)/m]	Class B (10 m) Quasi-peak [dB(µV)/m]																																							
30 – 88	50.0	40.0	40.0	30.0																																							
88 – 216	54.0	43.5	43.5	33.1																																							
216 – 230	56.9	46.4	46.0	35.6																																							
230 – 960	57.0	47.0	47.0	37.0																																							
960 – 1000	60.0	49.5	54.0	43.5																																							

Test Report No.: NL22E26D 001

Page 9 of 40

Clause	Requirements – Tests	Measuring results - Remarks	Result
--------	----------------------	-----------------------------	--------

Radiated emission limits at 3 m distance (at and above 1 GHz)

Frequency [GHz]	Class A Average [dB(μV)/m]	Class A Peak [dB(μV)/m]	Class B Average [dB(μV)/m]	Class B Peak [dB(μV)/m]
1 – F _M	60	80	54	74

The highest measurement frequency, F_M, in GHz, shall be determined as

Highest internal frequency (F _x)	Highest measurement frequency (F _M)
F _x ≤ 108 MHz	1 GHz
108 MHz < F _x ≤ 500 MHz	2 GHz
500 MHz < F _x ≤ 1 GHz	5 GHz
F _x > 1 GHz	5 x F _x up to a maximum of 40 GHz

F_x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.

Test Report No.: NL22E26D 001

Page 10 of 40

Clause	Requirements – Tests	Measuring results - Remarks	Result
--------	----------------------	-----------------------------	--------

Method of measurement of radiated emission

Measurements were made in a 10-meter semi-anechoic chamber that complies to ANSI C63.4:2014. Floor-standing equipment was placed on a non-conducting support (0.1 ± 0.01) m over the reference ground plane. Tabletop equipment was placed on a table at a height of (0.8 ± 0.05) m above the reference ground plane. Preliminary measurements were performed with a receiver employing a peak detector at an antenna to EUT distance of 10 m or 3 m (as defined in the standard). The EUT was rotated in 45° steps for frequencies below 1 GHz and 22.5° steps for frequencies over 1GHz about its azimuth to determine the position of the highest emissions. The measurement antenna was adjusted between 1 m and 4 m above ground to find the maximum signal strength. These measurements were done and in both horizontal and vertical polarizations. After this, final measurements with a receiver employing a quasi-peak detector for frequencies below 1 GHz and with a peak and an average detector for frequencies above 1 GHz were performed by rotating the EUT by 360° and adjusting the receive antenna height from 1 m to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity. For frequencies over 1 GHz floor absorbers were used between antenna and EUT to fulfil the SVSWR requirements.

The whole required frequency range was investigated for maximum radiated interferences. After data reduction, a final measurement of the highest emissions was made with quasi-peak, peak and average detector with a measurement time of at least 1 s per single frequency.

The emission limits are calculated from the field strength limit of this section using this formula:

$$Emission\ level\left(\frac{dB\mu V}{m}\right) = 20\log Emission\ level\left(\frac{\mu V}{m}\right)$$

When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade as per §15.31(f)(1). For this documentation a distance extrapolation factor was added to the limit that was calculated using this formula:

$$Emission\ limit_{new}\left(\frac{dB\mu V}{m}\right) = Emission\ limit_{old} + 20\log\left(\frac{d_1}{d_2}\right)$$

Where

d_1 : old distance (e. g. 3 m)

d_2 : new distance (e. g. 10 m)

The field strength is calculated by adding the antenna factor and cable loss. The basic equation with a sample calculation is as follows:

$$E = U + AF + CA$$

Where

E : Field strength

U : Receiver reading

AF : Antenna factor

CA : Cable loss

For example:

Frequency (MHz)	Receiver reading U (dBμV)	Correction antenna factor AF + cable loss CA (dB)	Field strength E (dBμV/m)
320	15.9	15.8	31.7

ADDITIONAL DOCUMENTATION

Table of Contents

Accreditations & Endorsements	12
Applied basic standards	12
Equipment used during test	13
Input/Output ports	14
Internal operating frequencies.....	14
Operating modes.....	14
Special EMC measures.....	14
EUT configuration	15
Conducted emission (9kHz – 30 MHz) acc. ANSI C63.4.....	15
Field strength measurement (9 kHz – 30 MHz) with loop antenna Field strength measurement (30 MHz – 1000 MHz) with log-per antenna acc. ANSI C63.4	15
Field strength measurement (>1 GHz) horn antenna acc. ANSI C63.4	16
Climatic conditions	16
Statement of the measurement uncertainty	18
Example for interpretation of measuring results	19
Conducted voltage emissions	20
Radiated disturbance	24
Radiated disturbance (> 1 GHz)	28
Radiated disturbance (> 1 GHz)	32
Picture 1: Conducted voltage emissions.....	36
Picture 2: Radiated disturbance	37
Picture 3: Radiated disturbance (> 1 GHz)	38
Picture 4: Radiated disturbance (> 1 GHz)	39
Change history	40

ADDITIONAL DOCUMENTATION

27 Accreditations & Endorsements

28 US Federal Communications Commission

TUV Rheinland LGA Products GmbH located at, Tillystraße 2, 90431 Nuremberg is recognized by the Bundesnetzagentur (Federal Network Agency for Electricity, Gas, Telecommunications, Post and Railway) as conformity assessment body.

FCC designation number	DE0016
Bundesnetzagentur registration number	BNetzA-CAB-17/21-16

29 Applied basic standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Title 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2014 (Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz)
- ICES-003:2020 (Issue 7) (Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement)

The test setup and test was done according to ANSI C63.4-2014.

Appendix to Test Report No.: NL22E26D 001

Page 13 of 40

ADDITIONAL DOCUMENTATION

30 Equipment used during test

Equipment under test

Product type	Manufacturer	Model	Comments
Wireless Network Card	identisch mit Auftraggeber / same as applicant	AX204NGW	—
Auxiliary Equipment / Peripherals			
Product type	Manufacturer	Model	Comments
Laptop	DELL	—	Controlling/Monitoring
Smartphone	Samsung	Galaxy S10	Monitoring

Appendix to Test Report No.: NL22E26D 001

Page 14 of 40

ADDITIONAL DOCUMENTATION

31 Input/Output ports

Name	Type*	Cable length	Shielded	Comments
Enclosure	N/E	—	—	None
DC Supply	DC	—	—	None
* AC = AC Power Port DC = DC Power Port N/E = Non-Electrical I/O = Signal Input or Output Port (Not Involved in Process Control) TP = Telecommunication Ports				

32 Internal operating frequencies

Frequency	Description
2.4 GHz ISM Band	BT/Wifi
5 GHz Wifi Band	Wifi
5.725 – 5.875 GHz	Broadband Data Transmitting

33 Operating modes

No.	Description
1	Continuous Operation
2	Standby

For details see the corresponding protocol

34 Special EMC measures

—

ADDITIONAL DOCUMENTATION

35 EUT configuration


The test setup was made in accordance with mentioned EMC standards.

Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").

Details of test setup or adjustments are (particularly) shown inside the photo documentation.


As far as not mentioned otherwise these statements are valid for all following tests.

36 Conducted emission (9kHz – 30 MHz) acc. ANSI C63.4

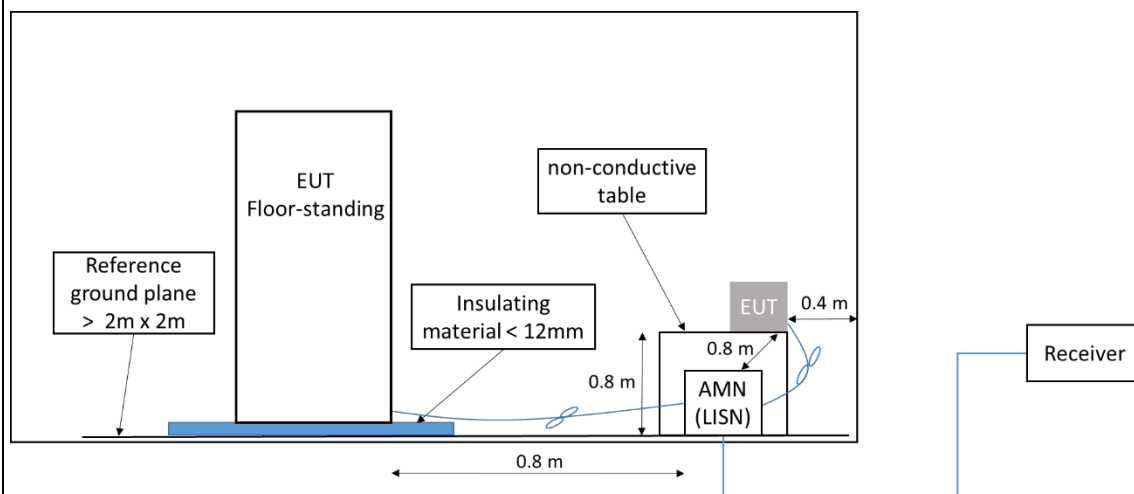


37 Field strength measurement (9 kHz – 30 MHz) with loop antenna Field strength measurement (30 MHz – 1000 MHz) with log-per antenna acc. ANSI C63.4

ADDITIONAL DOCUMENTATION

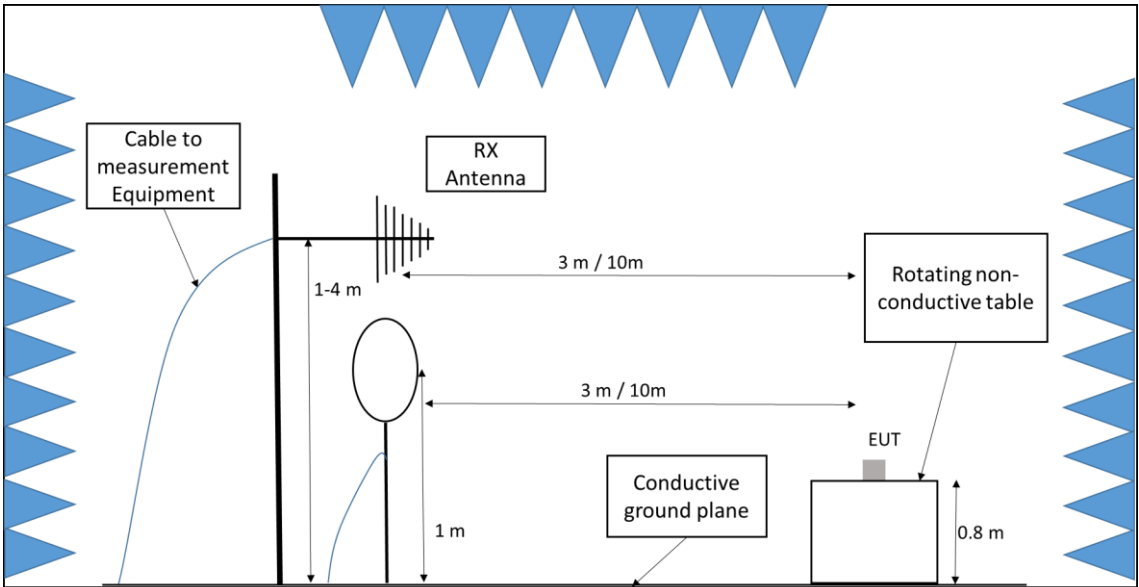

38 Field strength measurement (>1 GHz) horn antenna acc. ANSI C63.4

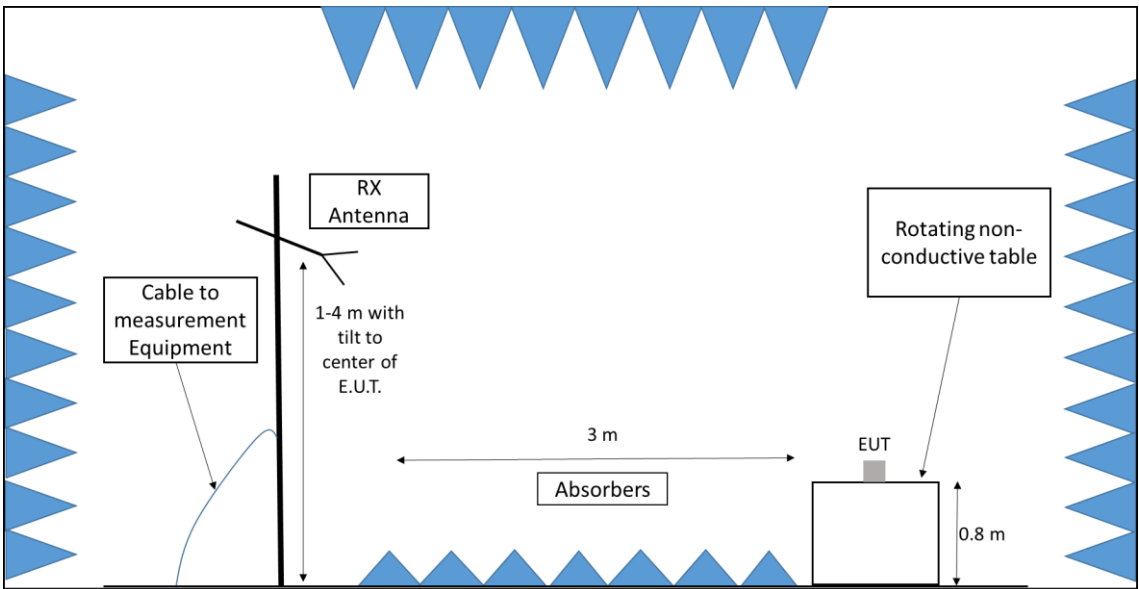

39 Climatic conditions

Appendix to Test Report No.: NL22E26D 001

Page 17 of 40

ADDITIONAL DOCUMENTATION

Ambient Temperature	15 - 35 °C
Relative Humidity	30 - 60 %
Air pressure	860 - 1060 mbar

ADDITIONAL DOCUMENTATION

40 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.


The manufacturer has the sole responsibility of continued compliance of the device.

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Measurement procedure	U _{Lab}
Measurement of conducted emissions at the power supply connection to LISN in the frequency range 9k-150kHz (CISPR Band A)	2.3 dB
Measurement of conducted emissions at the power supply connection to LISN in the frequency range 150k-30MHz (CISPR Band B) with 150 ohm Delta LISN	3.3 dB
Measurement of conducted emissions at the power supply connection to LISN in the frequency range 150k-30MHz (CISPR Band B)	2.2 dB
Measurement of conducted emissions at the power supply connection to voltage probes in the frequency range 9k-30MHz (CISPR Band A and B)	2.0 dB
Measurement of conducted emissions at telecommunication connection to ISN in the frequency range 150k-30MHz (CISPR Band B) ISN CAT 5	3.3 dB
Measurement of conducted emissions at the telecommunication connection to ISN in the frequency range 150k-30MHz (CISPR Band B) ISN CAT 6 Shielded	2.6 dB
Measurement of conducted emissions at the telecommunications connection to current clamps in the frequency range 150k-30MHz (CISPR Band B)	2.2 dB
Measurement of interference power in the frequency range 30-300MHz (CISPR Band C)	2.9 dB
Measurement of interference power in the frequency range 30-300MHz (CISPR Band C) CDNE	2.6 dB

ADDITIONAL DOCUMENTATION

41 Example for interpretation of measuring results

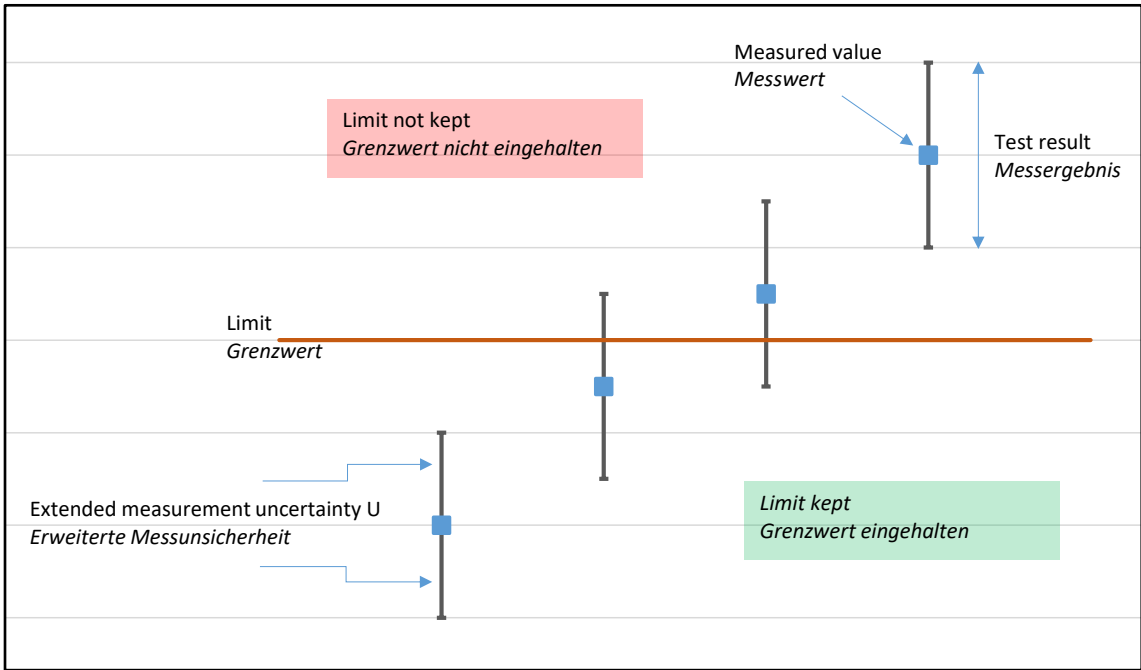

Measured value	Limit	Extended measurement uncertainty (k=2)	Test result
48.9 dBµV @ 16.5 MHz	50 dBµV	2.2 dB	46.7 dBµV – 51.1 dBµV

Appendix to Test Report No.: NL22E26D 001

Page 20 of 40

ADDITIONAL DOCUMENTATION

Protocol number		<u>1271</u>
Conducted voltage emissions		PASS
Applied Standard	FCC Part 15 Subpart B section 15.107 ICES-003 (Issue 7) section 3.2.1	
Test method	CISPR 16-2-1	
Test sample No.	A003227034-001	
Model	AX204NGW	
Tested terminals	Netzleitung / Supply line	
Supply voltage	120 V AC	
Operating mode	Continuous Operation	
Test setup	nach Norm (siehe Foto) / according to standard (see picture)	
EMC measures	—	
Remarks	—	
Temperature (°C)	14 - 25	
Humidity (% rH)	30 - 60	
Air pressure (mbar)	860 - 1060	
Test Software	BAT-EMC 2021.0.15.2	
Tested by	Richter	
Test date	2022-04-07	

Appendix to Test Report No.: NL22E26D 001

Page 21 of 40

ADDITIONAL DOCUMENTATION

Used test equipment					
Type	Manufacturer	Model	ID	Last calibration	Next calibration
LISN	Rohde & Schwarz	ESH2-Z5	2731908	2021-06-23	2024-06-23
Limiter	Rohde & Schwarz	ESH3-Z2	2732546	2021-02-11	2023-02-11
Receiver	Rohde & Schwarz	ESU 8	2728148	2021-11-03	2022-11-03
Commutation relay	MTS Systemtechnik	KRM4-5811-T-S1	2730174	---	---
Shielded room	TDK	SR 2	—	---	---

Test parameter of Conducted voltage emissions

#1271

Sample number:A003227034-001

Model name:AX204NGW

Subrange 1 (Phase 1)	150 kHz ... 30 MHz
IF Bandwidth	9 kHz
Step Size	2.25 kHz
Sweep Time	10 ms
Subrange 2 (Neutral)	150 kHz ... 30 MHz
IF Bandwidth	9 kHz
Step Size	2.25 kHz
Sweep Time	10 ms

ADDITIONAL DOCUMENTATION


Graphical presentation of Conducted voltage emissions

#1271


Sample number: A003227034-001

Model name: AX204NGW

Conducted voltage emissions (Phase 1)

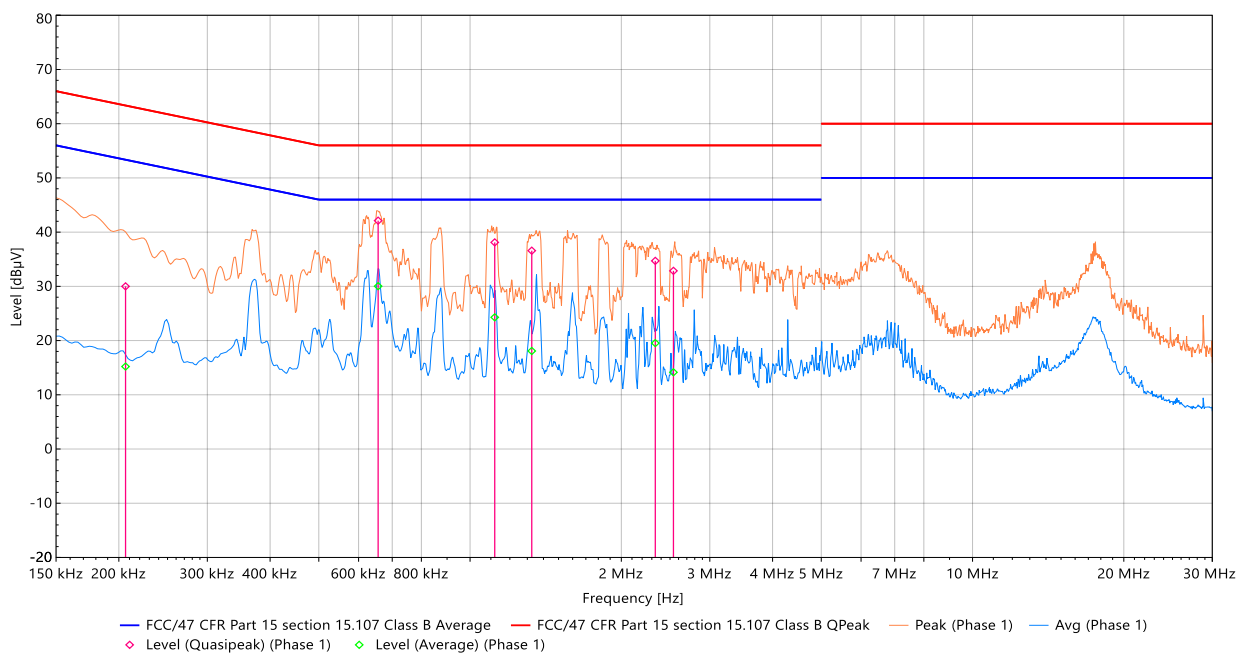

Conducted voltage emissions (Neutral)

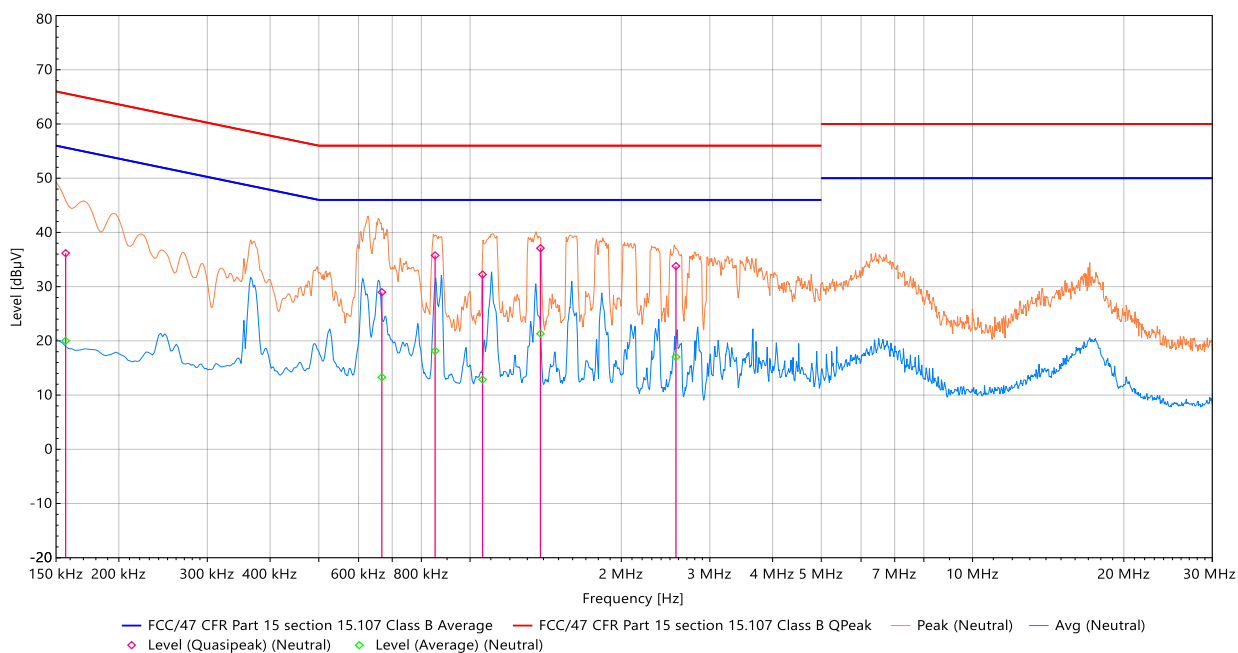

Appendix to Test Report No.: NL22E26D 001

Page 23 of 40

ADDITIONAL DOCUMENTATION

Measurement data of Conducted voltage emissions

#1271

Sample number:A003227034-001

Model name:AX204NGW

Source	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Margin (dB)	Line	M. time (s)	Comments	Correction (dB)
Quasipeak	0.206	30.00	63.35	-33.35	Phase 1	1	Pass	10.04
Quasipeak	0.656	42.12	56.00	-13.88	Phase 1	1	Pass	10.05
Quasipeak	1.120	38.11	56.00	-17.89	Phase 1	1	Pass	10.15
Quasipeak	1.327	36.58	56.00	-19.42	Phase 1	1	Pass	10.15
Quasipeak	2.337	34.70	56.00	-21.30	Phase 1	1	Pass	10.15
Quasipeak	2.540	32.86	56.00	-23.14	Phase 1	1	Pass	10.15
Quasipeak	0.157	36.17	65.63	-29.46	Neutral	1	Pass	10.04
Quasipeak	0.667	28.97	56.00	-27.03	Neutral	1	Pass	10.05
Quasipeak	0.852	35.76	56.00	-20.24	Neutral	1	Pass	10.05
Quasipeak	1.059	32.24	56.00	-23.76	Neutral	1	Pass	10.05
Quasipeak	1.381	37.09	56.00	-18.91	Neutral	1	Pass	10.07
Quasipeak	2.569	33.79	56.00	-22.21	Neutral	1	Pass	10.13
Average	0.206	15.21	53.35	-38.15	Phase 1	1	Pass	10.04
Average	0.656	30.03	46.00	-15.97	Phase 1	1	Pass	10.05
Average	1.120	24.29	46.00	-21.71	Phase 1	1	Pass	10.15
Average	1.327	18.08	46.00	-27.92	Phase 1	1	Pass	10.15
Average	2.337	19.53	46.00	-26.47	Phase 1	1	Pass	10.15
Average	2.540	14.15	46.00	-31.85	Phase 1	1	Pass	10.15
Average	0.157	20.01	55.63	-35.62	Neutral	1	Pass	10.04
Average	0.667	13.29	46.00	-32.71	Neutral	1	Pass	10.05
Average	0.852	18.15	46.00	-27.85	Neutral	1	Pass	10.05
Average	1.059	12.86	46.00	-33.14	Neutral	1	Pass	10.05
Average	1.381	21.32	46.00	-24.68	Neutral	1	Pass	10.07
Average	2.569	17.04	46.00	-28.96	Neutral	1	Pass	10.13

Remarks:

Margin value = Measurement value – Limit value

Appendix to Test Report No.: NL22E26D 001

Page 24 of 40

ADDITIONAL DOCUMENTATION

Protocol number		<u>1277</u>
Radiated disturbance		PASS
Applied Standard	47 CFR FCC Part 15 Section 15.109 ICES-003 (Issue 7) section 3.2.2	
Test method	ANSI C63.4-2014	
Test sample No.	A003227034-001	
Model	AX204NGW	
Tested terminals	Gehäuse / Enclosure	
Supply voltage	120 V AC	
Operating mode	Standby	
Test setup	nach Norm (siehe Foto) / according to standard (see picture)	
EMC measures	—	
Remarks	—	
Temperature (°C)	15 - 35	
Humidity (% rH)	30 - 60	
Air pressure (mbar)	860 - 1060	
Test Software	BAT-EMC 2021.0.15.2	
Tested by	Richter	
Test date	2022-04-07	

Appendix to Test Report No.: NL22E26D 001

Page 25 of 40

ADDITIONAL DOCUMENTATION

Used test equipment

Type	Manufacturer	Model	ID	Last calibration	Next calibration
Turntable	INN-CO	CO 3000	2869231	---	---
Antenna mast	INN-CO	CO 3000	2869231	---	---
Receiver	Rohde & Schwarz	ESU 8	2728844	2021-12-23	2022-12-23
Anechoic chamber	Siemens	SAC 10 (NSA 30-1000MHz)	2729645	2020-06-19	2022-06-19
Antenna	Schwarzbeck	VULB 9168	2728787	2019-09-24	2022-09-24

Test parameter of Radiated disturbance

#1277

Sample number:A003227034-001

Model name:AX204NGW

Subrange 1 (Horizontal)	30 MHz ... 1 GHz
IF Bandwidth	120 kHz
Step Size	30 kHz
Sweep Time	20 ms
Subrange 2 (Vertical)	30 MHz ... 1 GHz
IF Bandwidth	120 kHz
Step Size	30 kHz
Sweep Time	20 ms

Appendix to Test Report No.: NL22E26D 001

Page 26 of 40

ADDITIONAL DOCUMENTATION


Graphical presentation of Radiated disturbance

#1277


Sample number: A003227034-001

Model name: AX204NGW

#1-30MHz-1G (Horizontal)

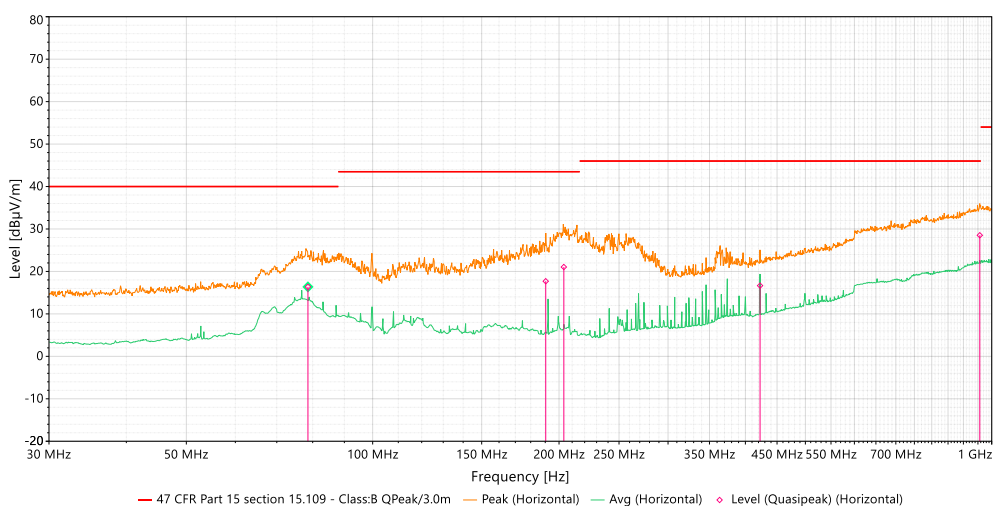

#2-30MHz-1G (Vertical)

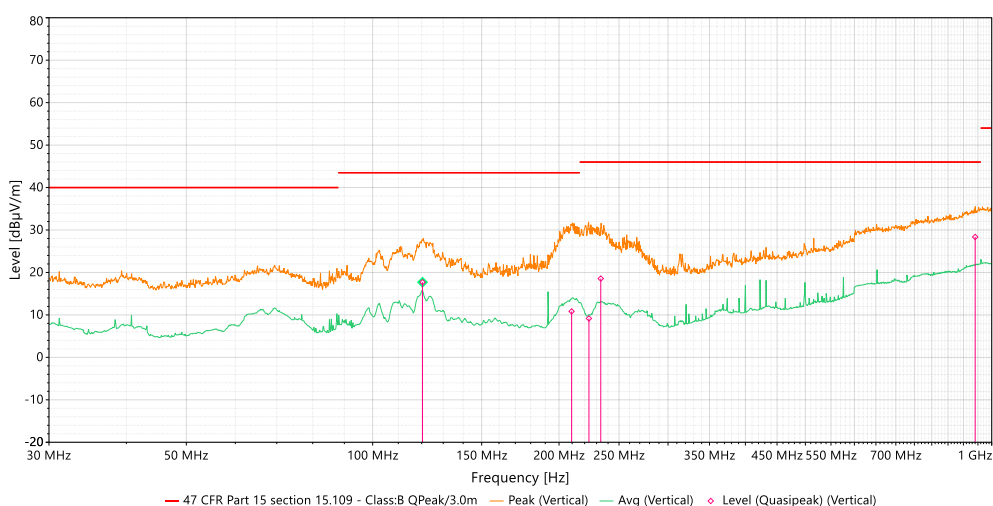

Appendix to Test Report No.: NL22E26D 001

Page 27 of 40

ADDITIONAL DOCUMENTATION

Measurement data of Radiated disturbance

#1277

Sample number:A003227034-001

Model name:AX204NGW

Source	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarity	Azimuth (°)	Height (m)	M. time (s)	Comments	Correction (dB)
Quasipeak	78.600	16.36	40.00	-23.64	H	178.6	3.90	1	Pass	10.75
Quasipeak	190.350	17.69	43.50	-25.81	H	263.2	1.45	1	Pass	12.07
Quasipeak	203.610	21.04	43.50	-22.46	H	47.4	2.33	1	Pass	11.49
Quasipeak	422.460	16.65	46.00	-29.35	H	199.0	2.00	1	Pass	19.01
Quasipeak	956.610	28.52	46.00	-17.48	H	232.2	2.00	1	Pass	28.62
Quasipeak	120.360	17.70	43.50	-25.80	V	107.8	1.04	1	Pass	12.83
Quasipeak	209.580	10.83	43.50	-32.67	V	139.0	2.07	1	Pass	11.49
Quasipeak	223.530	9.16	46.00	-36.84	V	143.2	1.89	1	Pass	11.55
Quasipeak	233.580	18.56	46.00	-27.44	V	68.5	2.00	1	Pass	12.48
Quasipeak	940.320	28.36	46.00	-17.64	V	125.4	3.67	1	Pass	28.55

Remarks:

Margin value = Measurement value – Limit value

Appendix to Test Report No.: NL22E26D 001

Page 28 of 40

ADDITIONAL DOCUMENTATION

Protocol number		<u>1557</u>
Radiated disturbance (> 1 GHz)		PASS
Applied Standard	47 CFR FCC Part 15 Section 15.109 ICES-003 (Issue 7) section 3.2.2	
Test method	ANSI C63.4-2014	
Test sample No.	A003227034-001	
Model	AX204NGW	
Tested terminals	Gehäuse / Enclosure	
Supply voltage	120 V AC	
Operating mode	Standby	
Test setup	nach Norm (siehe Foto) / according to standard (see picture)	
EMC measures	—	
Remarks	—	
Temperature (°C)	15 - 35	
Humidity (% rH)	30 - 60	
Air pressure (mbar)	860 - 1060	
Test Software	BAT-EMC 2021.0.15.2	
Tested by	Richter	
Test date	2022-04-06	

Appendix to Test Report No.: NL22E26D 001

Page 29 of 40

ADDITIONAL DOCUMENTATION

Used test equipment

Type	Manufacturer	Model	ID	Last calibration	Next calibration
Preamplifier	Schwarzbeck	BBV 9718B	2888179	2021-10-13	2023-10-13
Turntable	INN-CO	CO3000	2732515	---	---
Antenna	EMCO	3115	2728607	2020-02-10	2023-02-10
Receiver	Rohde & Schwarz	ESI 40	2728600	2020-09-21	2022-09-21
Antenna mast	Maturo	NCD	2733253	---	---
Anechoic chamber	TDK	SAC 10 (SVSWR 1-40GHz)	2766607	2020-04-03	2023-04-03

Test parameter of Radiated disturbance (> 1 GHz)

#1557

Sample number:A003227034-001

Model name:AX204NGW

Subrange 1 (Horizontal)	1 GHz ... 18 GHz
IF Bandwidth	1 MHz
Step Size	500 kHz
Sweep Time	1 ms
Subrange 2 (Vertical)	1 GHz ... 18 GHz
IF Bandwidth	1 MHz
Step Size	500 kHz
Sweep Time	1 ms

ADDITIONAL DOCUMENTATION


Graphical presentation of Radiated disturbance (> 1 GHz)

Sample number: A003227034-001


Model name: AX204NGW

#1557

#1-1GHz-18GHz(Horizontal)

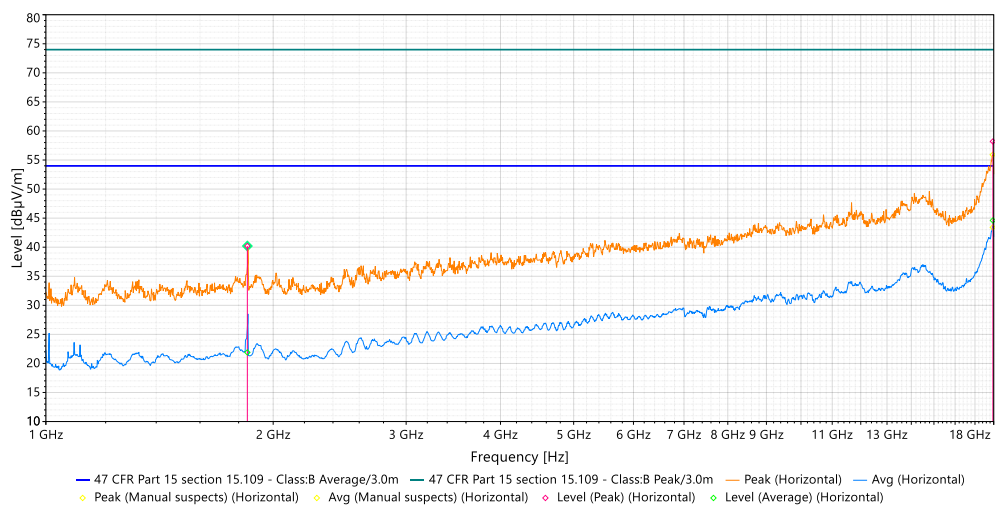

#2-1GHz-18GHz(Vertical)

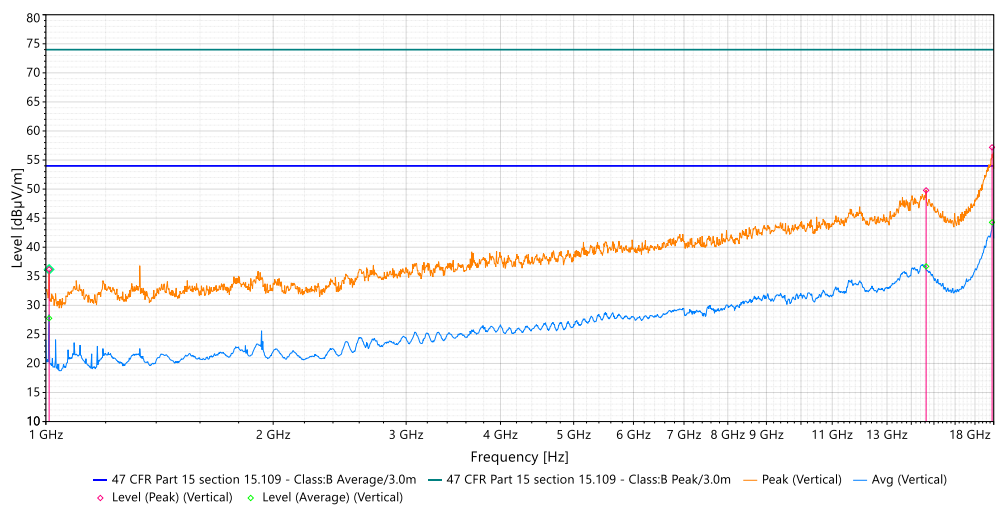

Appendix to Test Report No.: NL22E26D 001

Page 31 of 40

ADDITIONAL DOCUMENTATION

Measurement data of Radiated disturbance (> 1 GHz)

#1557

Sample number:A003227034-001

Model name:AX204NGW

Source	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarity	Azimuth (°)	Height (m)	M. time (s)	Comments	Correction (dB)
Peak	1848.500	40.20	74.00	-33.80	H	194.6	1.92	1	Pass	-3.93
Peak	17955.000	58.19	74.00	-15.81	H	0.0	1.00	1	Pass	28.49
Peak	1010.000	36.18	74.00	-37.82	V	194.4	1.86	1	Pass	-8.31
Peak	14647.000	49.78	74.00	-24.22	V	360.0	1.10	1	Pass	18.33
Peak	17910.000	57.18	74.00	-16.82	V	153.0	1.72	1	Pass	28.25

Source	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarity	Azimuth (°)	Height (m)	M. time (s)	Comments	Correction (dB)
Average	1848.500	21.90	54.00	-32.10	H	194.6	1.92	1	Pass	-3.93
Average	17955.000	44.60	54.00	-9.40	H	0.0	1.00	1	Pass	28.49
Average	1010.000	27.77	54.00	-26.23	V	194.4	1.86	1	Pass	-8.31
Average	14647.000	36.70	54.00	-17.30	V	360.0	1.10	1	Pass	18.33
Average	17910.000	44.28	54.00	-9.72	V	153.0	1.72	1	Pass	28.25

Remarks:

Margin value = Measurement value – Limit value

Appendix to Test Report No.: NL22E26D 001

Page 32 of 40

ADDITIONAL DOCUMENTATION

Protocol number		<u>1558</u>
Radiated disturbance (> 1 GHz)		PASS
Applied Standard	47 CFR FCC Part 15 Section 15.109 ICES-003 (Issue 7) section 3.2.2	
Test method	ANSI C63.4-2014	
Test sample No.	A003227034-001	
Model	AX204NGW	
Tested terminals	Gehäuse / Enclosure	
Supply voltage	120 V AC	
Operating mode	Standby	
Test setup	nach Norm (siehe Foto) / according to standard (see picture)	
EMC measures	—	
Remarks	—	
Temperature (°C)	15 - 35	
Humidity (% rH)	30 - 60	
Air pressure (mbar)	860 - 1060	
Test Software	BAT-EMC 2021.0.15.2	
Tested by	Richter	
Test date	2022-04-06	

Appendix to Test Report No.: NL22E26D 001

Page 33 of 40

ADDITIONAL DOCUMENTATION

Used test equipment

Type	Manufacturer	Model	ID	Last calibration	Next calibration
Antenna	Schwarzbeck Mess-Elektronik	BBHA 9170	2723744	2020-04-29	2023-04-29
Preamplifier	Schwarzbeck	BBV 9721	2731379	2020-12-21	2022-12-21
Turntable	INN-CO	CO3000	2732515	---	---
Receiver	Rohde & Schwarz	ESI 40	2728600	2020-09-21	2022-09-21
Antenna mast	Maturo	NCD	2733253	---	---
Anechoic chamber	TDK	SAC 10 (SVSWR 1-40GHz)	2766607	2020-04-03	2023-04-03

Test parameter of Radiated disturbance (> 1 GHz)

#1558

Sample number:A003227034-001

Model name:AX204NGW

Subrange 1 (Horizontal)	18 GHz ... 36 GHz
IF Bandwidth	1 MHz
Step Size	500 kHz
Sweep Time	1 ms
Subrange 2 (Vertical)	18 GHz ... 36 GHz
IF Bandwidth	1 MHz
Step Size	500 kHz
Sweep Time	1 ms

ADDITIONAL DOCUMENTATION


Graphical presentation of Radiated disturbance (> 1 GHz)

#1558


Sample number: A003227034-001

Model name: AX204NGW

#1- 18GHz-36GHz (Horizontal)

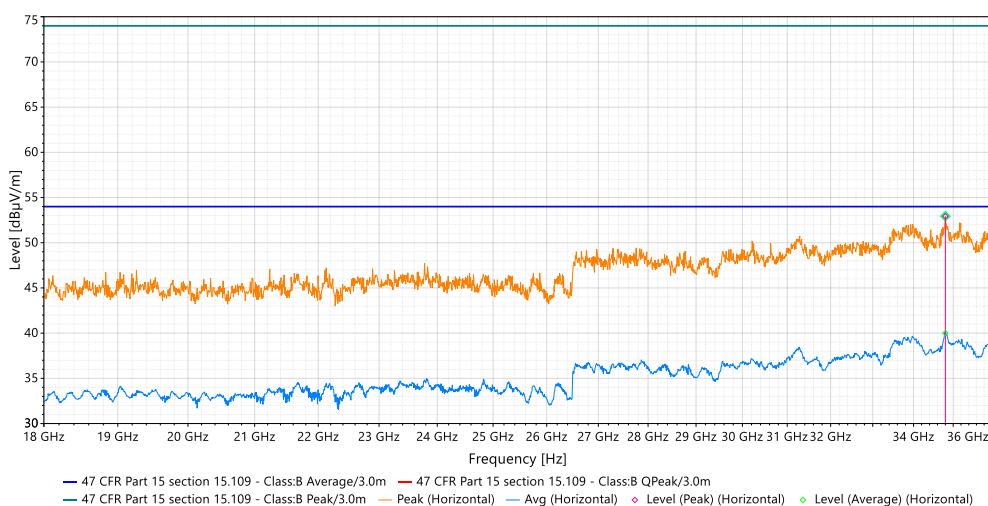

#2- 18GHz-36GHz (Vertical)

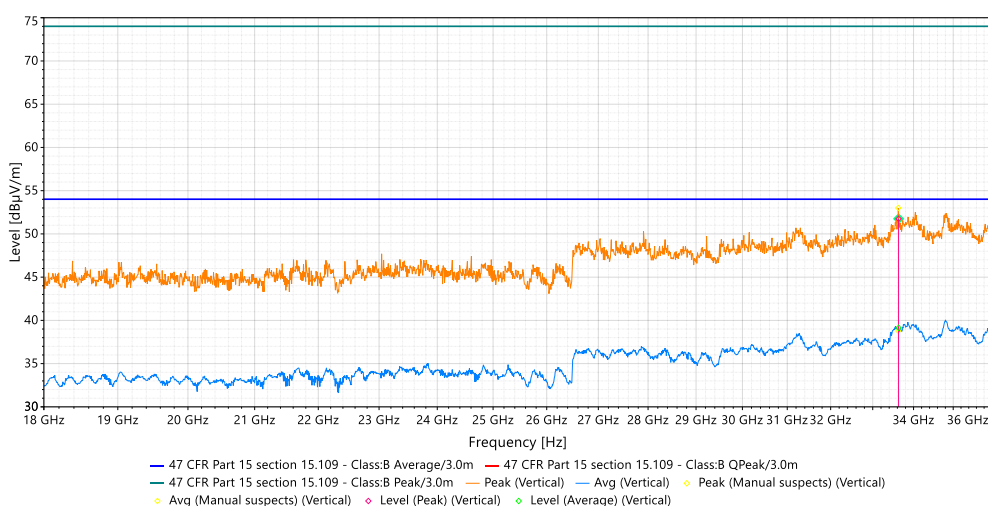

Appendix to Test Report No.: NL22E26D 001

Page 35 of 40

ADDITIONAL DOCUMENTATION

Measurement data of Radiated disturbance (> 1 GHz)

#1558

Sample number:A003227034-001

Model name:AX204NGW

Source	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarity	Azimuth (°)	Height (m)	M. time (s)	Comments	Correction (dB)
Peak	34800.000	52.93	74.00	-21.07	H	179.0	1.06	1	Pass	22.48
Peak	33629.500	51.75	74.00	-22.25	V	303.7	1.96	1	Pass	19.80

Source	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarity	Azimuth (°)	Height (m)	M. time (s)	Comments	Correction (dB)
Average	34800.000	40.01	54.00	-13.99	H	179.0	1.06	1	Pass	22.48
Average	33629.500	39.14	54.00	-14.86	V	303.7	1.96	1	Pass	19.80

Remarks:

Margin value = Measurement value – Limit value

PHOTO DOCUMENTATION

42 Picture 1: Conducted voltage emissions



PHOTO DOCUMENTATION

43 Picture 2: Radiated disturbance

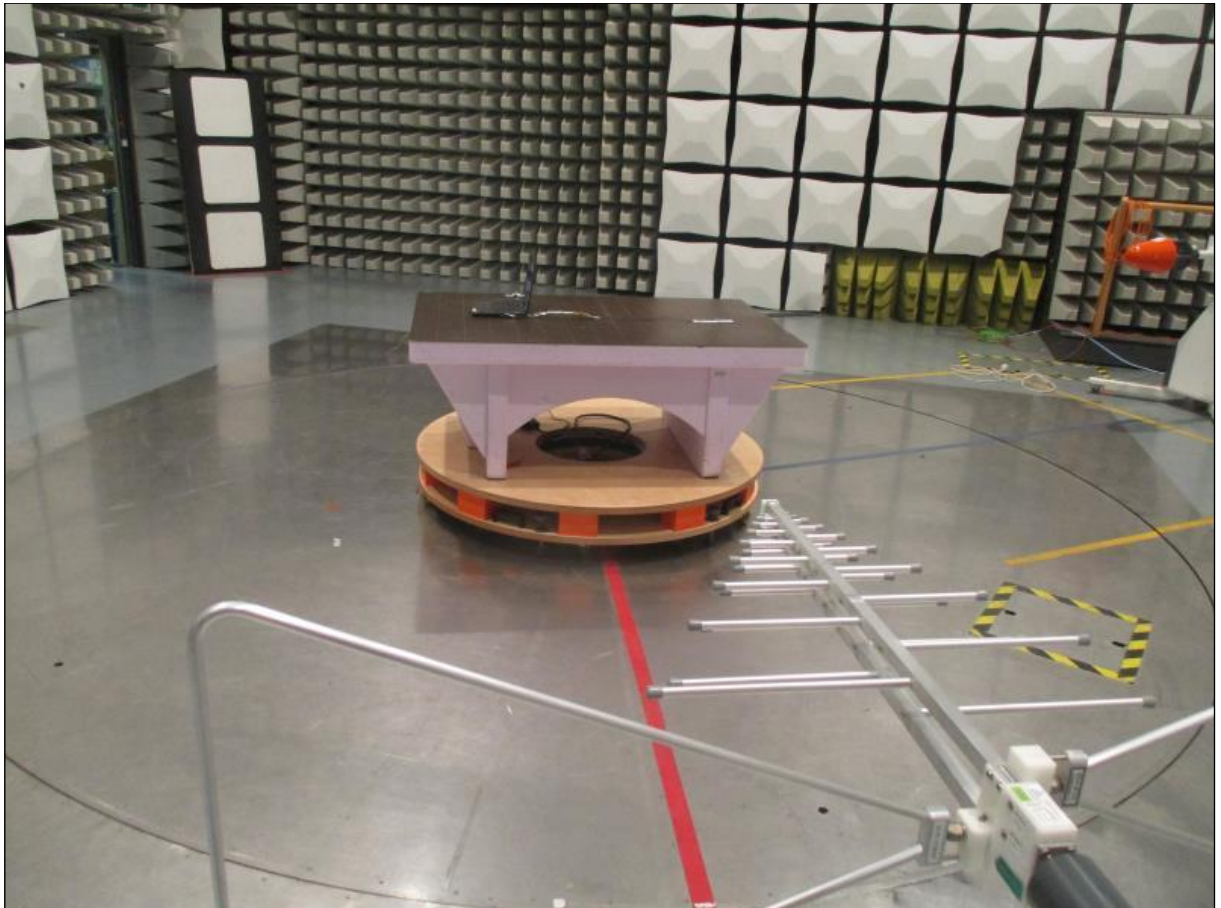


PHOTO DOCUMENTATION

44 Picture 3: Radiated disturbance (> 1 GHz)


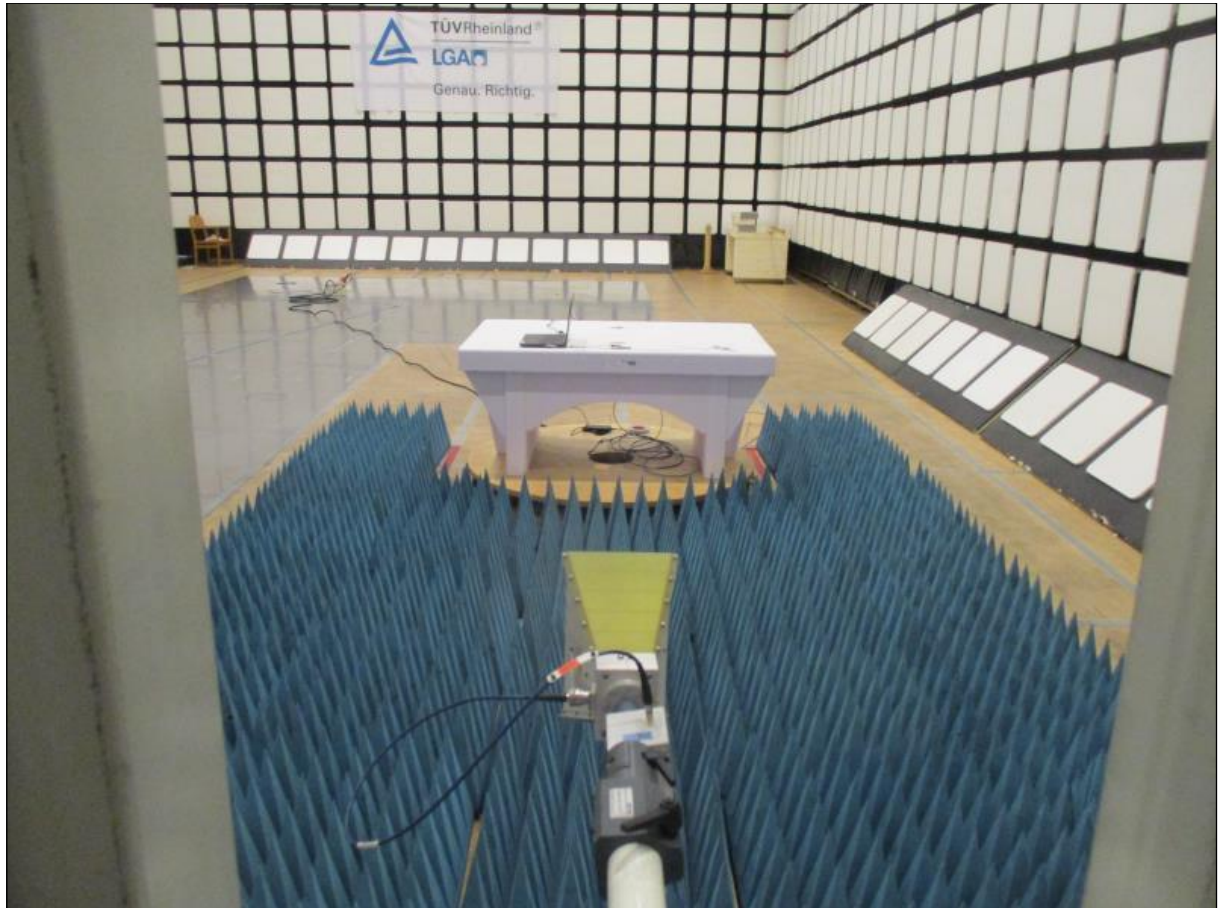


PHOTO DOCUMENTATION

45 Picture 4: Radiated disturbance (> 1 GHz)

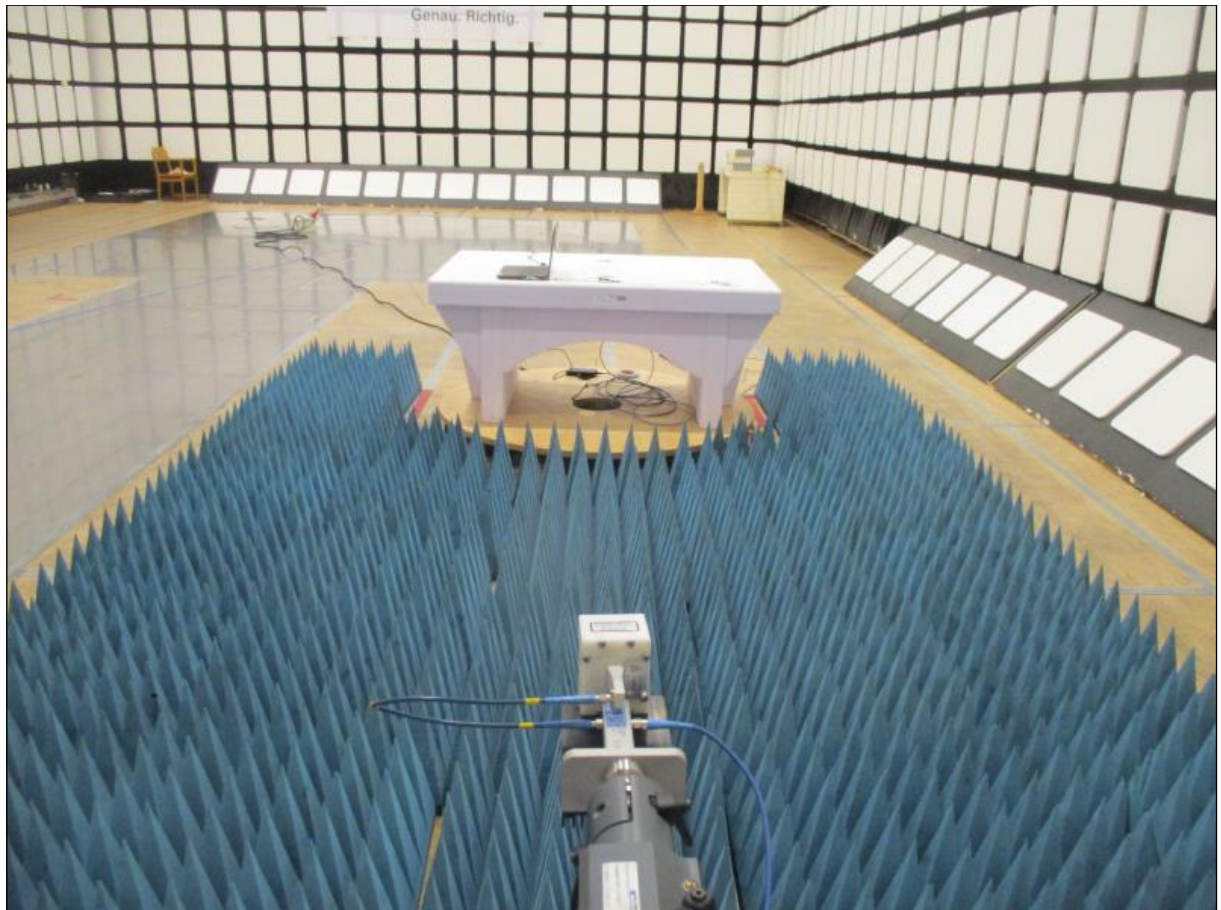

Appendix to Test Report No.: NL22E26D 001

Page 40 of 40

REVISION HISTORY

46

Change history

Rev. No.	List of changes	Date Author
001	First edition (NL22E26D 001)	2022-04-14 Daniel Richter

End of test report