

Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.



REMINDERS

- Product information in this catalog is as of October 2014. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that TAIYO YUDEN CO., LTD. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact TAIYO YUDEN CO., LTD. for further details of product specifications as the individual specification is available.

- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact TAIYO YUDEN CO., LTD. for more detail in advance.

Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel").

It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.

- Please note that TAIYO YUDEN CO., LTD. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. TAIYO YUDEN CO., LTD. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

REFLOW

A F △ 2 1 6 M 2 4 5 0 0 1 — T

2 Electrode Code	
△	With Plating

△=Blank space

AH 212M Type, AF 216M Type Diagram showing the AH 212M Type, AF 216M Type. It is a rectangular profile with dimensions L (length), W (width), and T (thickness). The end view shows a rectangular shape with a small circular feature on the top surface.	AH 316M Type Diagram showing the AH 316M Type. It is a rectangular profile with dimensions L (length), W (width), and T (thickness). The end view shows a rectangular shape with a small circular feature on the top surface.	AH 083F Type Diagram showing the AH 083F Type. It is a rectangular profile with dimensions L (length), W (width), and T (thickness). The end view shows a rectangular shape with a small circular feature on the top surface. The diagram also includes a 'Feed mark' and 'Direction mark'.
AH 104F Type Diagram showing the AH 104F Type. It is a rectangular profile with dimensions L (length), W (width), and T (thickness). The end view shows a rectangular shape with a small circular feature on the top surface. The diagram also includes a 'Feed mark' and 'Direction mark'.	AH 104N Type Diagram showing the AH 104N Type. It is a rectangular profile with dimensions L (length), W (width), and T (thickness). The end view shows a rectangular shape with a small circular feature on the top surface. The diagram also includes a 'Feed mark' and 'Direction mark'.	AH 086M Type Diagram showing the AH 086M Type. It is a rectangular profile with dimensions L (length), W (width), and T (thickness). The end view shows a rectangular shape with a small circular feature on the top surface. The diagram also includes a 'Feed mark' and 'Direction mark'.

Type	L	W	T	E	a	b	c	Standard Quantity (pcs) Embossed Tape
AF 216M	2.5±0.2	1.6±0.2	1.6±0.2	0.5±0.3	—	—	—	2000
AH212M	2 ^{+0.3} _{-0.1}	1.25±0.2	0.85±0.2	0.5±0.3	—	—	—	4000
AH 316M	3.2±0.15	1.6±0.15	0.5±0.1	0.5±0.2	—	1.0 min.	—	3000
AH 083F	8±0.3	3±0.3	1±0.3	—	3.1±0.3	1±0.3	1.15±0.3	1000
AH 104F	10±0.3	4±0.3	1±0.3	—	2.5±0.3	1±0.3	1±0.3	2000
AH 104N	10±0.3	4±0.3	1±0.3	—	3±0.3	0.8±0.3	1.5±0.3	
AH 086M	8±0.3	6±0.3	1±0.3	—	1.8±0.2	1±0.3	—	1000

Unit : mm (inch)


Applications	Ordering Code	External Dimensions (mm)	Center Frequency (MHz)
GPS	AH 316M157501	3.2×1.6×0.5	1575
W-LAN (2.4GHz) Bluetooth® WiMAX (2.5GHz) ZigBee	AF 216M245001	2.5×1.6×1.6	2450
	AH 212M245001	2.0×1.25×0.85	2450
	AH 316M245001	3.2×1.6×0.5	2450
	AH 083F245001	8.0×3.0×1.0	2450
	AH 104F2450S1	10.0×4.0×1.0	2450
	AH 104F2650S1	10.0×4.0×1.0	2650
W-LAN(2.4GHz / 5GHz)	AH 104N2450D1	10.0×4.0×1.0	2450/5400
UWB & WiMAX(3.5GHz)	AH 086M555003	8.0×6.0×1.0	5550

HIGH FREQUENCY PRODUCTS


ELECTRICAL CHARACTERISTICS·TYPICAL CHARACTERISTICS

Typical Characteristics on Taiyo Yuden evaluation board


●AH 316M157501




Typical characteristics of VSWR

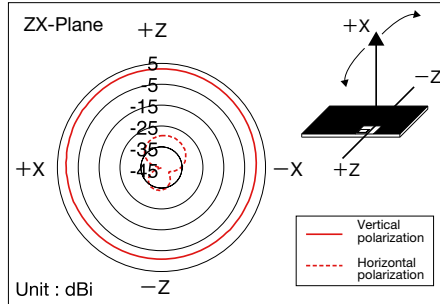


Typical characteristics of radiation pattern (@1.575GHz)

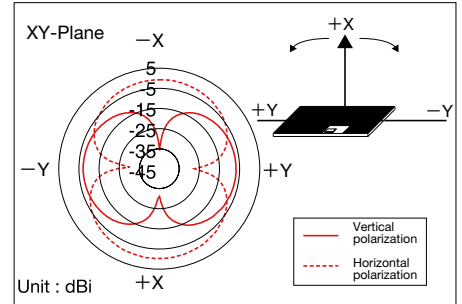


●AF 216M245001




Typical characteristics of VSWR

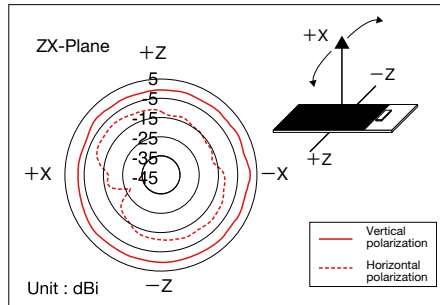


Typical characteristics of radiation pattern (@2.45GHz)

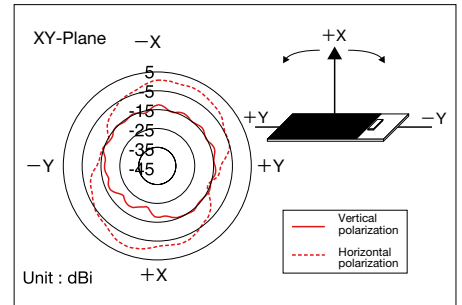


●AH 212M245001




Typical characteristics of VSWR

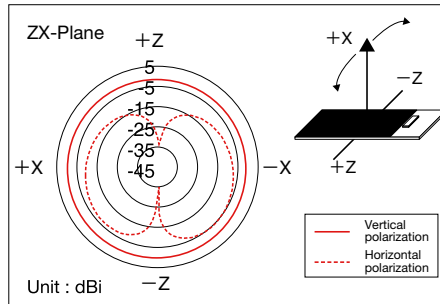


Typical characteristics of radiation pattern (@2.45GHz)

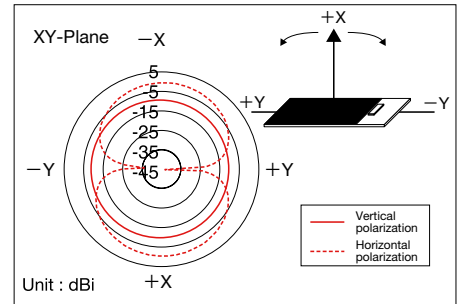


●AH 316M245001




Typical characteristics of VSWR

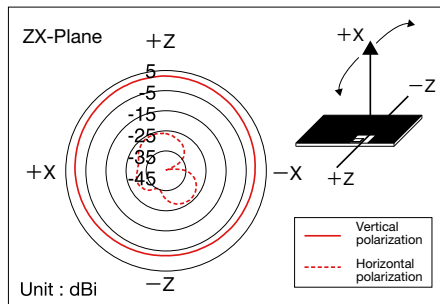


Typical characteristics of radiation pattern (@2.45GHz)

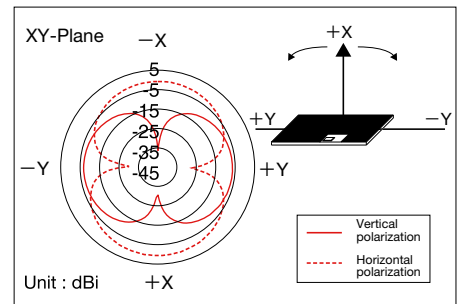


●AH 083F245001



Typical characteristics of VSWR

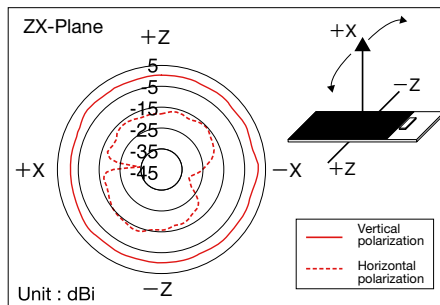


Typical characteristics of radiation pattern (@2.45GHz)

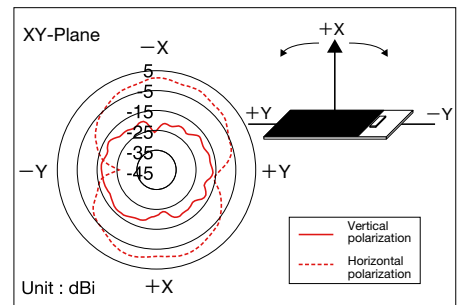


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

Typical Characteristics on Taiyo Yuden evaluation board

● AH 104F2450S1




Typical characteristics of VSWR

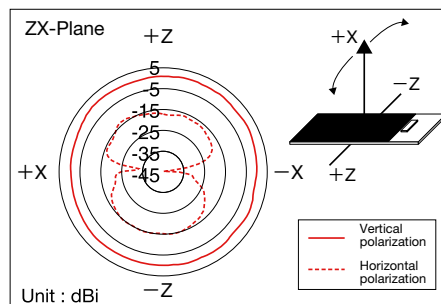


Typical characteristics of radiation pattern (@2.45GHz)


● AH 104N2450D1




Typical characteristics of VSWR (2GHz band)

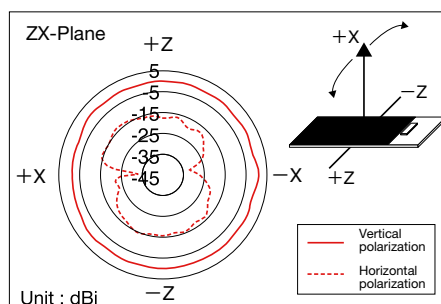

Typical characteristics of radiation pattern (@2.45GHz)




Typical characteristics of VSWR (5GHz band)

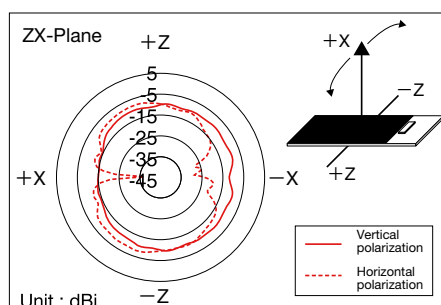


Typical characteristics of radiation pattern (@5.25GHz)

● AH 086M555003



Typical characteristics of VSWR

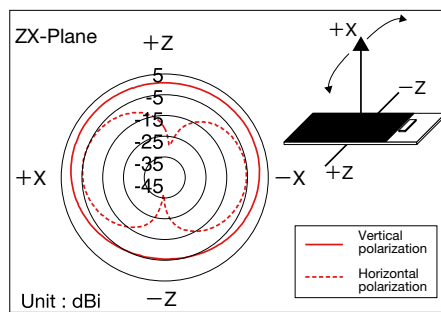

Typical characteristics of radiation pattern (@3.96GHz)

CHIP ANTENNAS


PACKAGING

①Minimum Quantity

Type	Standard Quantity (pcs) Embossed Tape
AF216M, AF816M, AH104F, AH104N	2000
AH316M	3000
AH083F, AH086M	1000
AH212M	4000


②Tape Material

● Embossed Tape

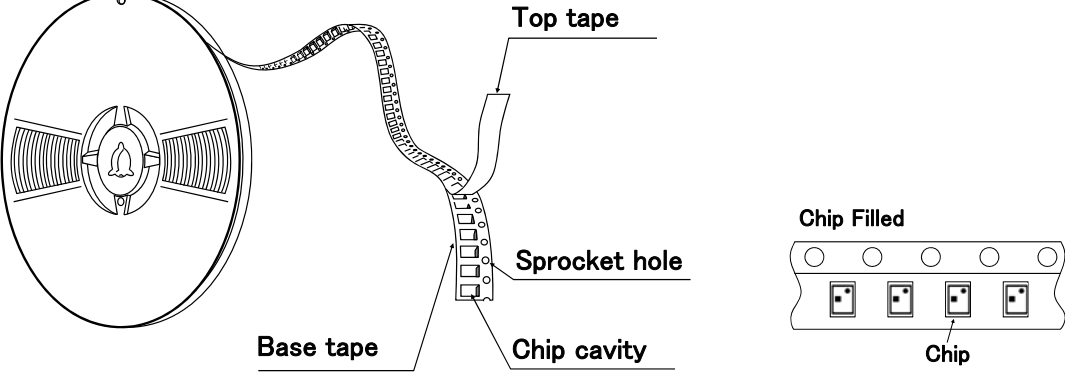

③Taping Dimensions

● Embossed Tape

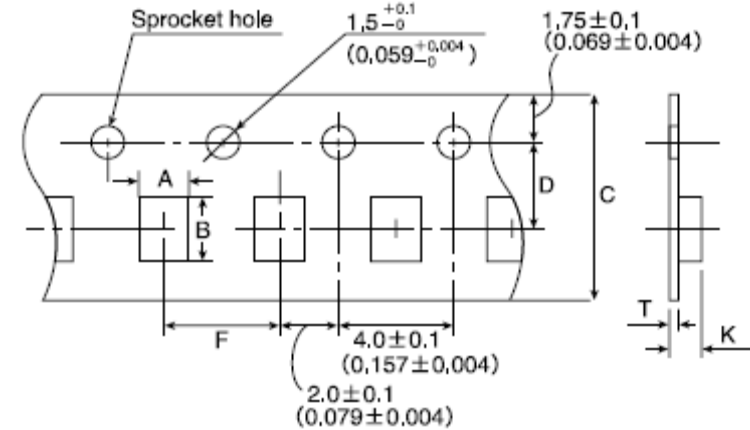


Type	Chip Cavity		Tape Widthness		Insertion Pitch	Tape Thickness max.	
	A	B	C	D		K	T
AF216M	1.85±0.2 (0.073±0.008)	2.75±0.2 (0.108±0.008)	8±0.2 (0.315±0.008)	3.5±0.1 (0.138±0.004)	4±0.1 (0.157±0.004)	1.95 (0.077)	0.3 (0.012)
AF816M	1.95±0.2 (0.077±0.008)	8.4±0.2 (0.331±0.008)	16±0.3 (0.630±0.012)	7.5±0.1 (0.296±0.004)	4±0.1 (0.157±0.004)	2.05 (0.081)	0.35 (0.014)
AH316M	1.9±0.2 (0.075±0.008)	3.5±0.2 (0.138±0.008)	8±0.2 (0.315±0.008)	3.5±0.1 (0.138±0.004)	4±0.1 (0.157±0.004)	0.85 (0.033)	0.3 (0.012)
AH083F	3.35±0.2 (0.132±0.008)	8.35±0.2 (0.329±0.008)	16±0.3 (0.630±0.012)	7.5±0.1 (0.295±0.004)	8±0.1 (0.315±0.004)	1.55 (0.061)	0.3 (0.012)
AH104F, AH104N	4.35±0.2 (0.171±0.008)	10.35±0.2 (0.407±0.008)	24±0.3 (0.945±0.012)	11.5±0.1 (0.435±0.004)	8±0.1 (0.315±0.004)	1.55 (0.061)	0.3 (0.012)
AH086M	6.25±0.2 (0.246±0.008)	8.26±0.2 (0.325±0.008)	16±0.3 (0.630±0.012)	7.5±0.1 (0.296±0.004)	12±0.1 (0.473±0.004)	1.3 (0.051)	0.3 (0.012)
AH212M	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	8±0.3 (0.315±0.012)	3.5±0.1 (0.138±0.004)	4±0.1 (0.157±0.004)	1.5 (0.059)	0.3 (0.012)


Unit : mm (inch)

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) .

④Leader and Blank Portion

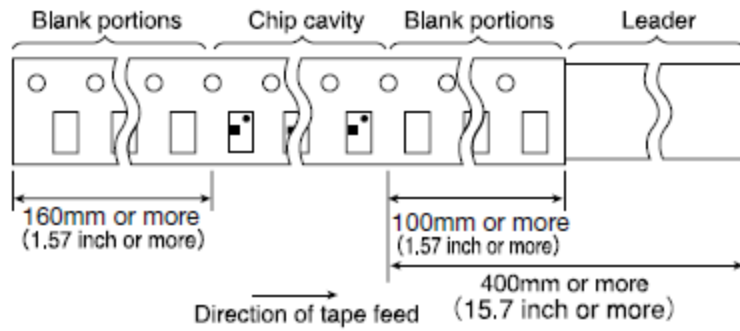

⑤Reel size

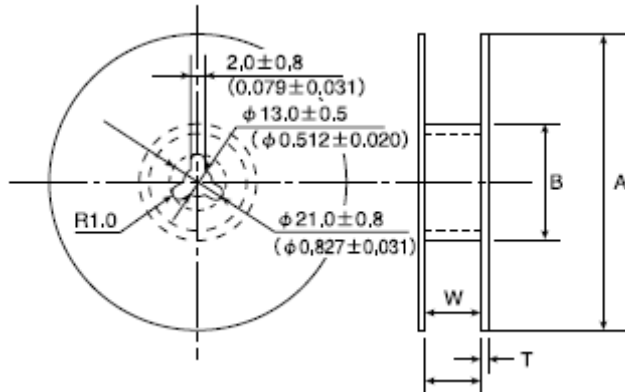


Type	A	B	W	T
AF216M, AH212M	178±2.0	50 min.	10.0±1.5	3.0 max.
AH316M	(7.0±0.08)	(2.0 min.)	(0.394±0.06)	(0.12 max.)
AF816M	178±2.0	50 min.	17.0±1.0	2.5 max.
AH083F	(7.0±0.08)	(2.0 min.)	(0.67±0.04)	(0.1 max.)
AH104F	330±2.0	100±1.0	25.5±1.0	3.0 max.
AH104N	(13.0±0.08)	(3.94±0.04)	(1.0±0.04)	(0.12 max.)
AH086M	330±2.0	100±1.0	17.0±1.0	2.5 max.
	(13.0±0.08)	(3.94±0.04)	(0.67±0.04)	(0.1 max.)

Unit : mm (inch)

⑥Top Tape Strength

The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.

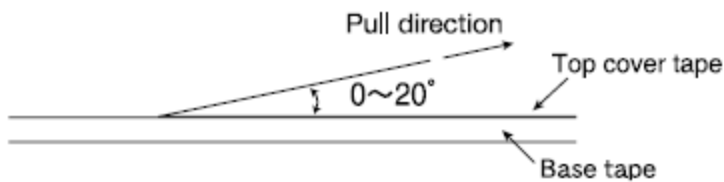

CHIP ANTENNAS

■ RELIABILITY DATA

1. Operating Temperature Range

Specified Value	−20~+80°C
-----------------	-----------

2. Storage Temperature Range

Specified Value	−40~+85°C
-----------------	-----------

Test Methods and Remarks	※with being taped, −20~+40°C
--------------------------	------------------------------

3. Solderability

Specified Value	At least 90% of immersed terminal surface is covered by new solder.
-----------------	---

Test Methods and Remarks	Solder temperature	: 230±5°C
	Duration	: 3±1 sec.
	Preconditioning	: Preheating at 150°C after immersion into flux.

4. Thermal Shock

Specified Value	Shall satisfy required VSWR value of individual specifications for each item.
-----------------	---

Test Methods and Remarks	1 hour of recovery after 10 times of 30min.immersion alternately at −40°C and 85°C of temperature, followed by evaluating electrical characteristics.
--------------------------	---

5. High Temperature Storage Test

Specified Value	Shall satisfy required VSWR value of individual specifications for each item.
-----------------	---

Test Methods and Remarks	1 hour of recovery under standard condition after 96 hours recovery with 85°C of temperature, followed by evaluating electrical characteristics.
--------------------------	--

6. Low Temperature Storage Test

Specified Value	Shall satisfy required VSWR value of individual specifications for each item.
-----------------	---

Test Methods and Remarks	1 hour of recovery under standard condition after 96 hours recovery with −40°C of temperature, followed by evaluating electrical characteristics.
--------------------------	---

7. Humidity Storage Test

Specified Value	Shall satisfy required VSWR value of individual specifications for each item.
-----------------	---

Test Methods and Remarks	1 hour of recovery under standard condition after 96 hours recovery with 60°C of temperature, 90~95% relative humidity followed by evaluating electrical characteristics.
--------------------------	---

8. Resistance to Reflow

Specified Value	Shall satisfy required VSWR value of individual specifications for each item.
-----------------	---

Test Methods and Remarks	Two times of reflow soldering by recommended profile attached, followed by evaluating electrical characteristics.
--------------------------	---

CHIP ANTENNAS

PRECAUTIONS

1. PCB Design

Precautions

◆Land pattern design

Please do not arrange the surface and inside layer pattern near the antenna mounting area.

Technical Considerations

◆Land pattern design

Land pattern dimension examples and recommended antenna land pattern

AF216M/816M

Unit : mm

Land for input terminal

Land for NC terminal

※1: Please don't arrange the surface and inside layer pattern near the antenna mounting area.
(Please refer to our company Evaluation board.)

※2: Prescribes soldering area by a resist.

AH316M

Unit : mm

Land for input terminal

Land for GND terminal

Type	Dimensions		
	L	P	A
AF216M	2.5	1.5	3
AF816M	8	7	5
AH212M	2	1	3

Unit : mm

AH083F

Unit : mm

Land for input terminal

Land for GND terminal

Land for NC terminal

AH104F

Unit : mm

Land for input terminal

Land for GND terminal

Land for NC terminal

AH104N

Unit : mm

Land for input terminal

Land for NC terminal

AH086M

Unit : mm

Land for input terminal

Land for NC terminal

2. Soldering

Technical Considerations

◆Conditions of Reflow soldering (for reference)

- Pb Free Reflow Profile
- Reflow profile

Temperature (°C)

Duration (seconds)

Preheating 150°C 60sec. Min.

Heating above 230°C 40sec. Max.

Peak 260°C Max. Within 10sec.

Slow cooling

temperature (°C)

temperature pattern of reflow furnace

peak temperature 220°C~240°C

215°C

Duration (seconds)

about 60 55~75 20~30

※ Components should be preheated to within 100 to 130°C from soldering temperature.

※ Assured to be reflow soldering for 2 times.

Note : The above profiles are the maximum allowable soldering condition, therefore these profiles are not always recommended.

3. Storage Conditions

Precautions

◆ Storage conditions

1. The Products should not be used in the following environments :

- exposure to special gases such as (C12, NH3, SOx, NOx)
- exposure to volatile gas or inflammable gas
- exposure to a lot of dust
- exposure to water or condensation
- exposure to direct sunlight or freezing

2. The Products should be kept in the following conditions :

- Temperature : $-10\sim+40^{\circ}\text{C}$
- Humidity : 70%RH max.

3. The products should be used within 6 months after delivery. In case of storage over 6 months, solderability shall be checked before actual usage.

■ Please contact our offices for further details of specifications.

All of the standard values listed here are subject to change without notice due to technical improvements.

Therefore, please check the specifications carefully before use.