



## EXHIBIT Q – Radiated Emissions Data


FCC ID# PG6BA0T

| Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets                       |                                       |                                |                          | Rev 3.4<br>10/11/00 |
|-----------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|--------------------------|---------------------|
| EUT:                                                                                    | Serial Number:<br><b>75103203-210</b> | Job Number:<br><b>MICR0001</b> | Date:<br><b>10/19/00</b> |                     |
| Manufacturer:<br><b>Micro Systems Engineering, Inc</b>                                  | Test Engineer:<br><b>Rod Peloquin</b> | Job Site:<br><b>EV01</b>       |                          |                     |
| Customer Reference Number:                                                              | Software:                             | Power:                         |                          |                     |
| Comments:<br>EUT in test fixture at 1.5m above ground plane, EUT in horizontal polarity |                                       |                                |                          |                     |
|        |                                       | Temperature (°C):<br><b>22</b> | % Humidity:<br><b>41</b> |                     |
|                                                                                         |                                       |                                |                          |                     |


### FCC 95.635 Radiated Specification Limit (3 meter)

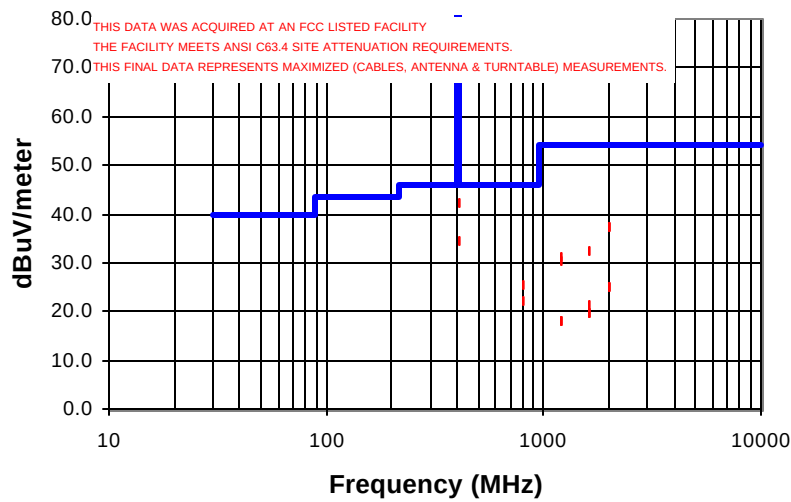

| Frequency (MHz) | Reading (dBuV) | Detector | Antenna Factor (dB/m) | Antenna Polarity | Preamplifier Gain (dB) | Cable Loss (dB) | Turntable Azimuth (degrees) | Antenna Height (meters) | Adjusted Level (dBuV/m) | Spec. Limit (dBuV/m) | Margin (dB) | Comment              |
|-----------------|----------------|----------|-----------------------|------------------|------------------------|-----------------|-----------------------------|-------------------------|-------------------------|----------------------|-------------|----------------------|
| 403.572         | 56.2           | PK       | 16.1                  | HBLG             | 31.3                   | 1.1             | 49.0                        | 1.3                     | 42.1                    | 85.2                 | -43.1       | transmit frequency   |
| 403.574         | 48.4           | PK       | 16.1                  | VBLG             | 31.3                   | 1.1             | 57.0                        | 1.1                     | 34.3                    | 85.2                 | -50.9       | transmit frequency   |
| 807.157         | 34.4           | PK       | 22.1                  | HBLG             | 32.7                   | 1.6             | 89.0                        | 1.0                     | 25.4                    | 46.0                 | -20.7       |                      |
| 807.161         | 31.3           | PK       | 22.1                  | VBLG             | 32.7                   | 1.6             | 4.0                         | 1.3                     | 22.3                    | 46.0                 | -23.7       |                      |
| 1210.737        | 39.7           | PK       | 23.8                  | HHRN             | 35.2                   | 2.2             | 0.0                         | 1.5                     | 30.5                    | 54.0                 | -23.6       | No detectable signal |
| 1210.737        | 27.2           | AV       | 23.8                  | VHRN             | 35.2                   | 2.2             | 48.0                        | 1.3                     | 18.0                    | 54.0                 | -36.1       | No detectable signal |
| 1210.737        | 40.3           | PK       | 23.8                  | VHRN             | 35.2                   | 2.2             | 48.0                        | 1.3                     | 31.1                    | 54.0                 | -23.0       | No detectable signal |
| 1210.737        | 27.2           | AV       | 23.8                  | HHRN             | 35.2                   | 2.2             | 0.0                         | 1.5                     | 18.0                    | 54.0                 | -36.0       | No detectable signal |
| 1614.316        | 39.7           | PK       | 25.2                  | HHRN             | 34.6                   | 2.2             | 53.0                        | 1.5                     | 32.5                    | 54.0                 | -21.6       | No detectable signal |
| 1614.316        | 28.6           | PK       | 25.2                  | VHRN             | 34.6                   | 2.2             | 0.0                         | 1.4                     | 21.4                    | 54.0                 | -32.7       | No detectable signal |
| 1614.316        | 26.9           | AV       | 25.2                  | HHRN             | 34.6                   | 2.2             | 53.0                        | 1.5                     | 19.7                    | 54.0                 | -34.4       | No detectable signal |
| 1614.316        | 26.9           | AV       | 25.2                  | VHRN             | 34.6                   | 2.2             | 0.0                         | 1.2                     | 19.7                    | 54.0                 | -34.4       | No detectable signal |
| 2017.895        | 39.2           | PK       | 26.9                  | HHRN             | 31.1                   | 2.5             | 0.0                         | 1.0                     | 37.5                    | 54.0                 | -16.5       | No detectable signal |
| 2017.895        | 39.1           | PK       | 26.9                  | VHRN             | 31.1                   | 2.5             | 0.0                         | 1.5                     | 37.4                    | 54.0                 | -16.6       | No detectable signal |
| 2017.895        | 26.8           | AV       | 26.9                  | HHRN             | 31.1                   | 2.5             | 0.0                         | 1.0                     | 25.1                    | 54.0                 | -29.0       | No detectable signal |
| 2017.895        | 26.8           | AV       | 26.9                  | VHRN             | 31.1                   | 2.5             | 0.0                         | 1.5                     | 25.1                    | 54.0                 | -28.9       | No detectable signal |

| Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets                     |                                       |                                |                          | Rev 3.4<br>10/11/00 |
|---------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|--------------------------|---------------------|
| EUT:                                                                                  | Serial Number:<br><b>75103203-210</b> | Job Number:<br><b>MICR0001</b> | Date:<br><b>10/19/00</b> |                     |
| Manufacturer:<br><b>Micro Systems Engineering, Inc</b>                                | Test Engineer:<br><b>Rod Peloquin</b> | Job Site:<br><b>EV01</b>       |                          |                     |
| Customer Reference Number:                                                            | Software:                             | Power:                         |                          |                     |
| Comments:<br>EUT in test fixture at 1.5m above ground plane, EUT in vertical polarity |                                       |                                |                          |                     |
|      |                                       | Temperature (°C):<br><b>22</b> | % Humidity:<br><b>41</b> |                     |
|                                                                                       |                                       |                                |                          |                     |

### FCC 95.635 Radiated Specification Limit (3 meter)

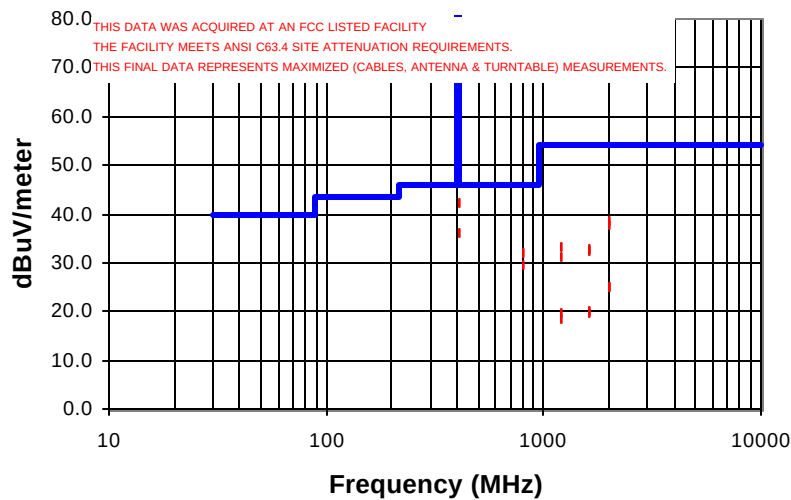


| Frequency (MHz) | Reading (dBuV) | Detector | Antenna Factor (dB/m) | Antenna Polarity | Preamplifier Gain (dB) | Cable Loss (dB) | Turntable Azimuth (degrees) | Antenna Height (meters) | Adjusted Level (dBuV/m) | Spec. Limit (dBuV/m) | Margin (dB) | Comment              |
|-----------------|----------------|----------|-----------------------|------------------|------------------------|-----------------|-----------------------------|-------------------------|-------------------------|----------------------|-------------|----------------------|
| 403.572         | 50.1           | PK       | 16.1                  | VBLG             | 31.3                   | 1.1             | 287.0                       | 1.9                     | 36.0                    | 85.2                 | -49.2       | transmit frequency   |
| 403.577         | 56.2           | PK       | 16.1                  | HBLG             | 31.3                   | 1.1             | 8.0                         | 1.3                     | 42.1                    | 85.2                 | -43.1       | transmit frequency   |
| 807.149         | 38.5           | PK       | 22.1                  | VBLG             | 32.7                   | 1.6             | 2.0                         | 1.4                     | 29.5                    | 46.0                 | -16.5       |                      |
| 807.162         | 40.9           | PK       | 22.1                  | HBLG             | 32.7                   | 1.6             | 352.0                       | 1.5                     | 31.9                    | 46.0                 | -14.2       |                      |
| 1210.737        | 42.3           | PK       | 23.8                  | VHRN             | 35.2                   | 2.2             | 18.0                        | 1.3                     | 33.1                    | 54.0                 | -20.9       |                      |
| 1210.737        | 29.0           | AV       | 23.8                  | VHRN             | 35.2                   | 2.2             | 18.0                        | 1.3                     | 19.8                    | 54.0                 | -34.2       |                      |
| 1210.737        | 40.4           | PK       | 23.8                  | HHRN             | 35.2                   | 2.2             | 15.0                        | 1.4                     | 31.2                    | 54.0                 | -22.9       |                      |
| 1210.737        | 27.8           | AV       | 23.8                  | HHRN             | 35.2                   | 2.2             | 15.0                        | 1.4                     | 18.6                    | 54.0                 | -35.5       |                      |
| 1614.316        | 39.8           | PK       | 25.2                  | VHRN             | 34.6                   | 2.2             | 30.0                        | 1.2                     | 32.6                    | 54.0                 | -21.4       |                      |
| 1614.316        | 27.5           | AV       | 25.2                  | VHRN             | 34.6                   | 2.2             | 30.0                        | 1.2                     | 20.3                    | 54.0                 | -33.7       |                      |
| 1614.316        | 39.9           | PK       | 25.2                  | HHRN             | 34.6                   | 2.2             | 1.0                         | 1.0                     | 32.7                    | 54.0                 | -21.3       | No detectable signal |
| 1614.316        | 26.8           | AV       | 25.2                  | HHRN             | 34.6                   | 2.2             | 1.0                         | 1.0                     | 19.6                    | 54.0                 | -34.5       | No detectable signal |
| 2017.895        | 40.3           | PK       | 26.9                  | VHRN             | 31.1                   | 2.5             | 0.0                         | 1.5                     | 38.6                    | 54.0                 | -15.5       | No detectable signal |
| 2017.895        | 26.8           | AV       | 26.9                  | VHRN             | 31.1                   | 2.5             | 0.0                         | 1.5                     | 25.1                    | 54.0                 | -29.0       | No detectable signal |
| 2017.895        | 39.4           | PK       | 26.9                  | HHRN             | 31.1                   | 2.5             | 0.0                         | 1.5                     | 37.7                    | 54.0                 | -16.3       | No detectable signal |
| 2017.895        | 26.8           | AV       | 26.9                  | HHRN             | 31.1                   | 2.5             | 0.0                         | 1.5                     | 25.1                    | 54.0                 | -29.0       | No detectable signal |

Tek

Ref Lv1 105.0dBuV

10dB/

Atten 20dB

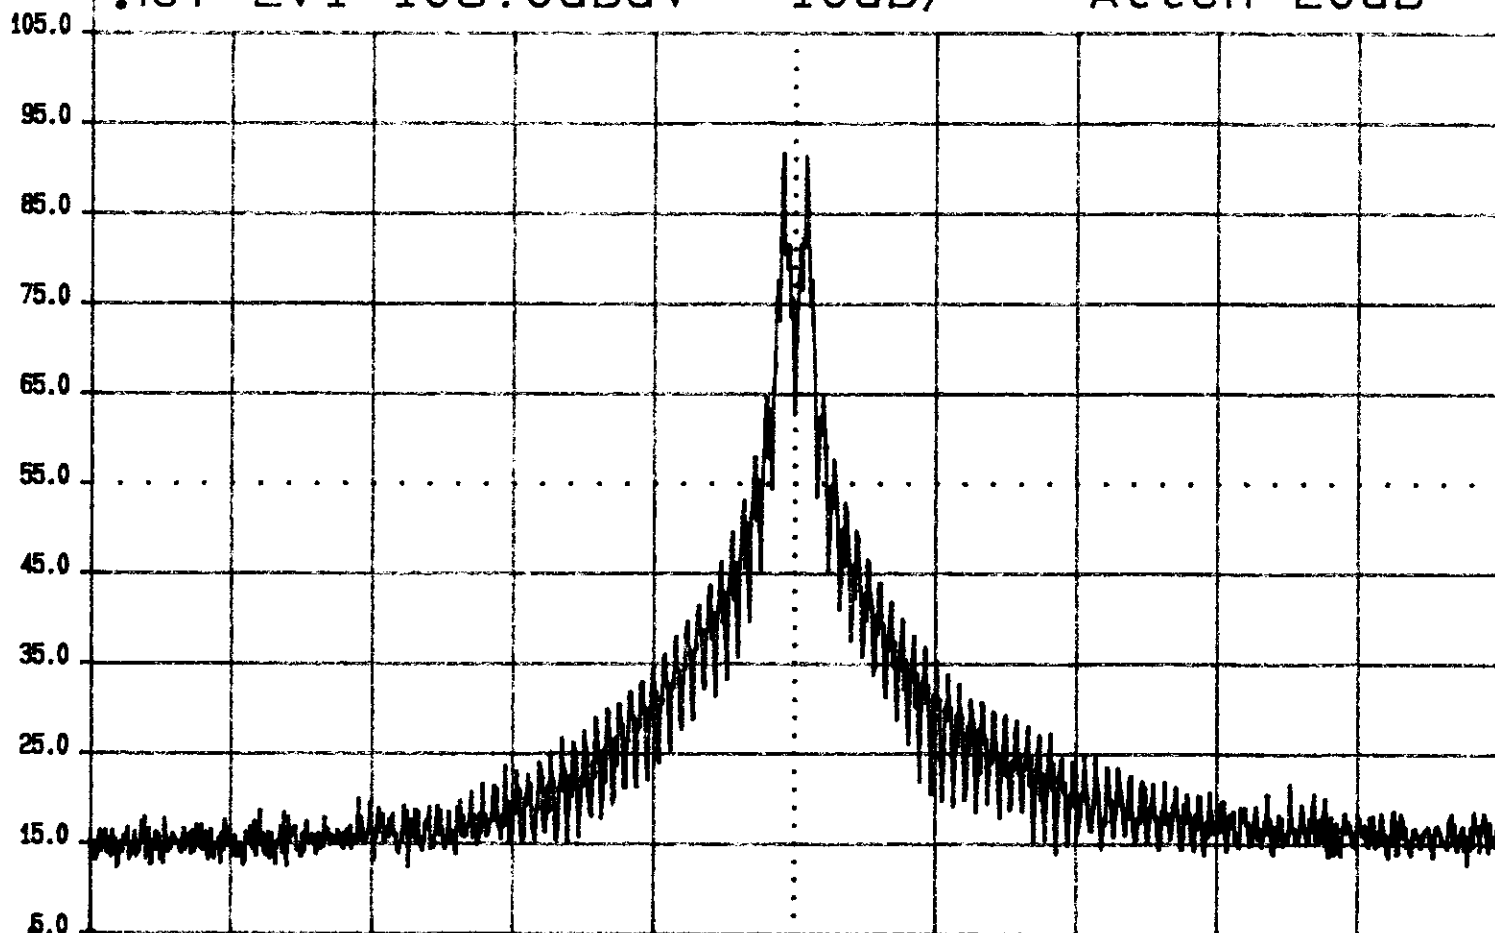

Freq 403.613 1MHz

Span 500kHz

ResBW 300Hz

VidBW 300Hz

SWP 32S

LEVEL

SPAN

SWP 32S

Knob 2

Knob 1

KEYPAD

Tektronix


2784

Tek

Ref Lv1 105.0dBuV

10dB/

Atten 20dB

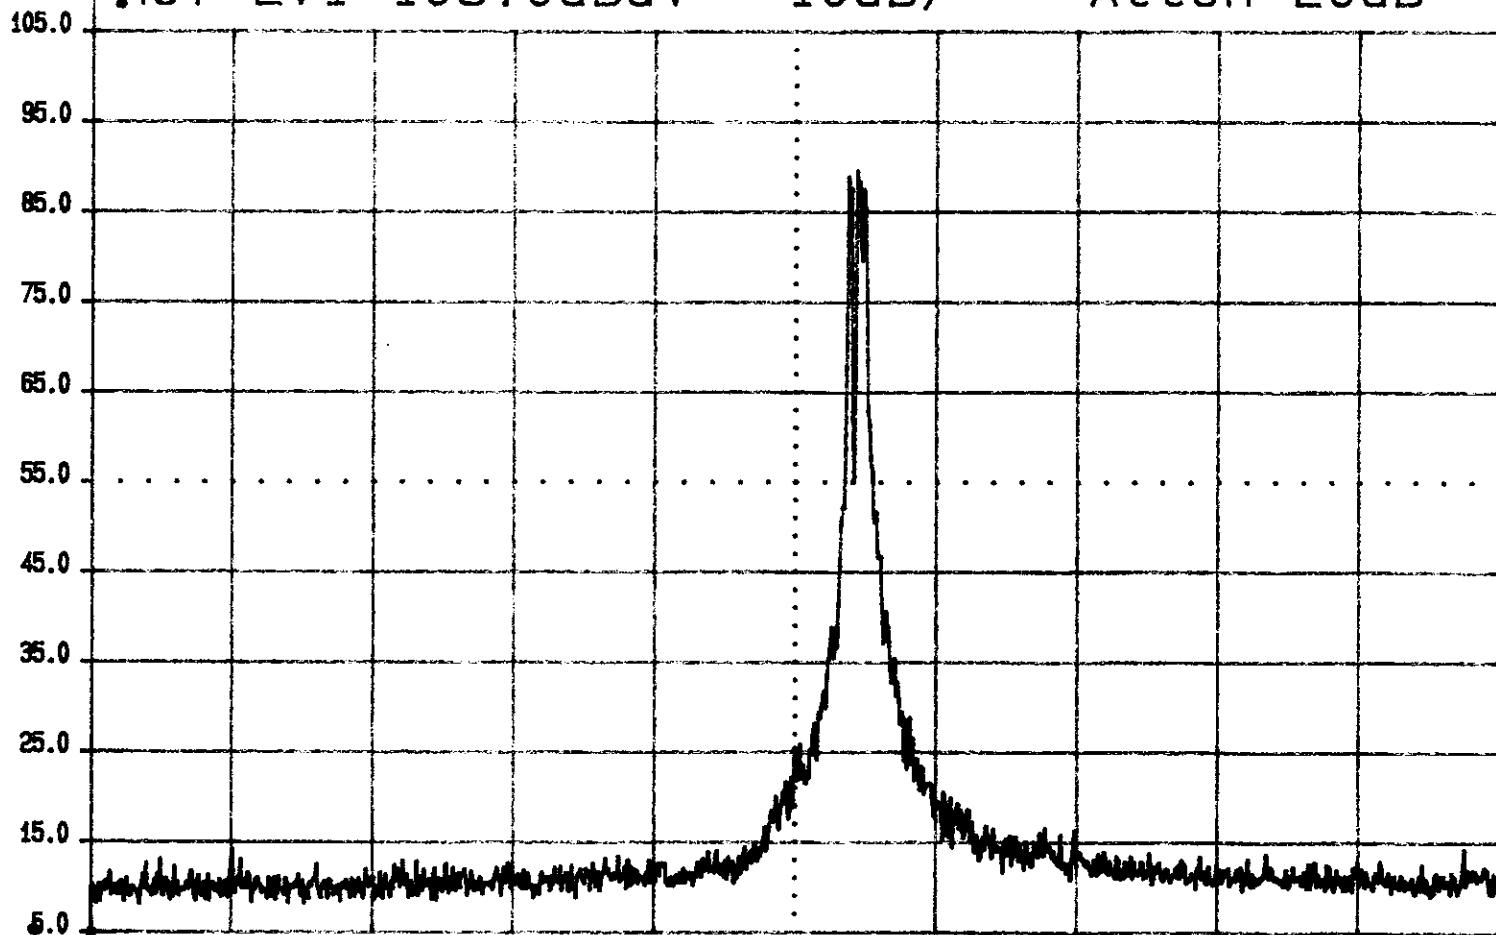

402.000MHz

to

405.000MHz

ResBW 300Hz

VidBW 300Hz

SWP 190S

LEVEL

SPAN

Stop 405.000MHz

KnOB 2

KnOB 1

KEYPAD

Tektronix


2784

Tek

Ref Lv1 105.0dBuV

10dB/

Atten 20dB

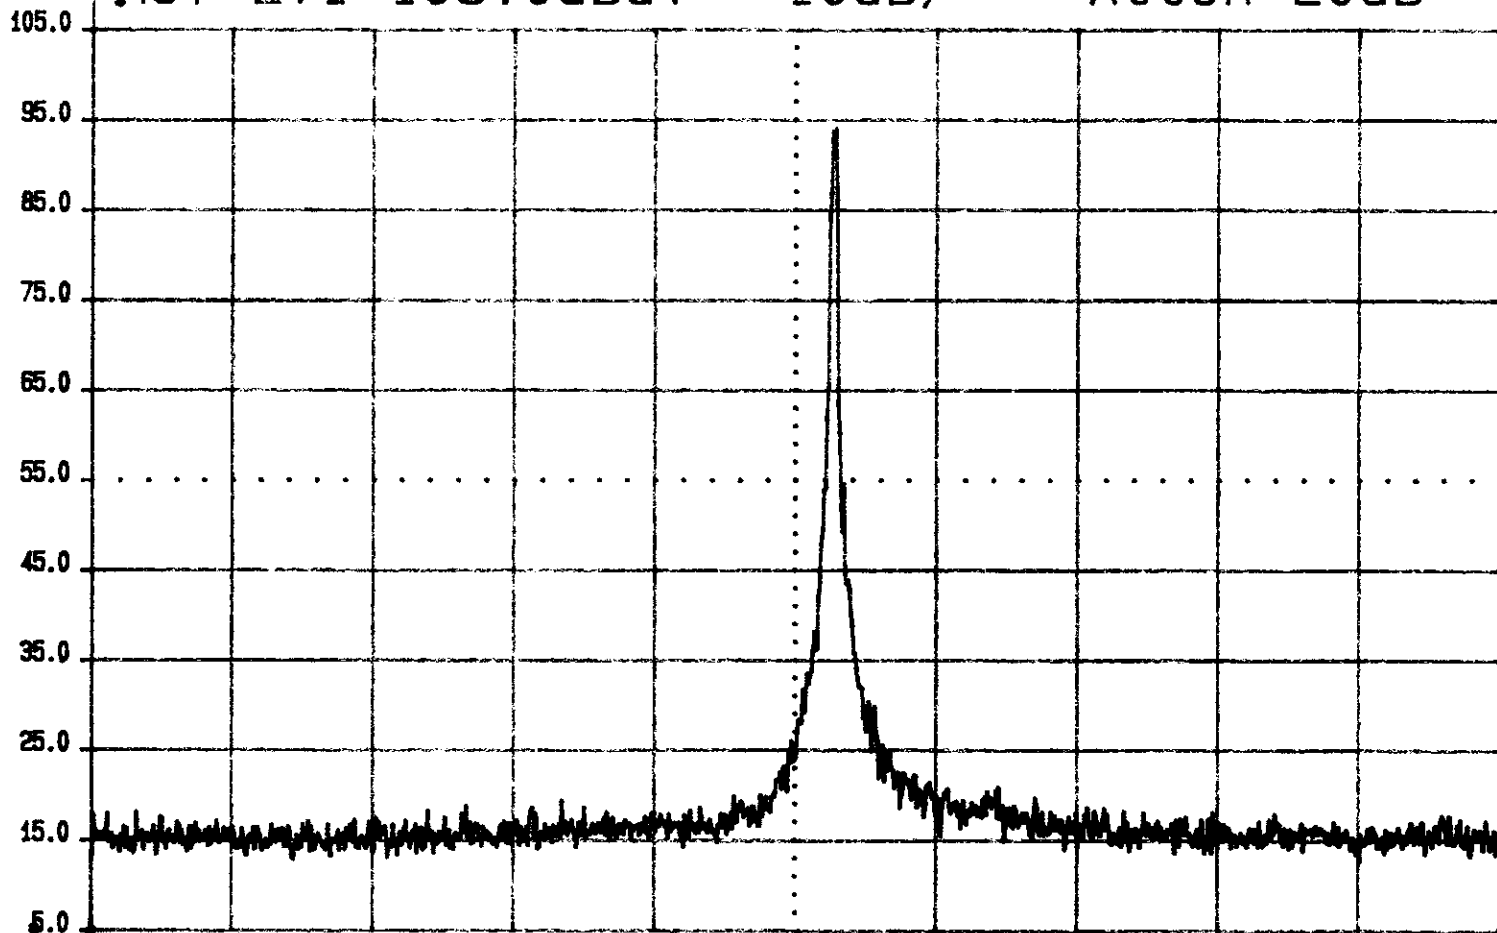

401.500MHz

to

405.500MHz

ResBW 1kHz

VidBW 1kHz

SWP 23S

LEVEL

SPAN

ResBW 1kHz

KnOB 2

KnOB 1

KEYPAD

Tektronix


2784

# Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4  
10/11/00

|                                                                                         |                                       |                                |                          |
|-----------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|--------------------------|
| EUT:<br><b>Philos DR-T</b>                                                              | Serial Number:<br><b>75103203-210</b> | Job Number:<br><b>MICR0001</b> | Date:<br><b>10/19/00</b> |
| Manufacturer:<br><b>Micro Systems Engineering, Inc</b>                                  | Test Engineer:<br><b>Rod Peloquin</b> | Job Site:<br><b>EV01</b>       |                          |
| Customer Reference Number:                                                              | Software:                             | Power:                         |                          |
| Comments:<br>EUT in test fixture at 1.5m above ground plane, EUT in horizontal polarity |                                       |                                |                          |
| <i>Rod Peloquin</i>                                                                     |                                       | Temperature (°C):<br><b>22</b> | % Humidity:<br><b>41</b> |
|                                                                                         |                                       | Run #01                        |                          |

## FCC 95.635 Radiated Specification Limit (3 meter)

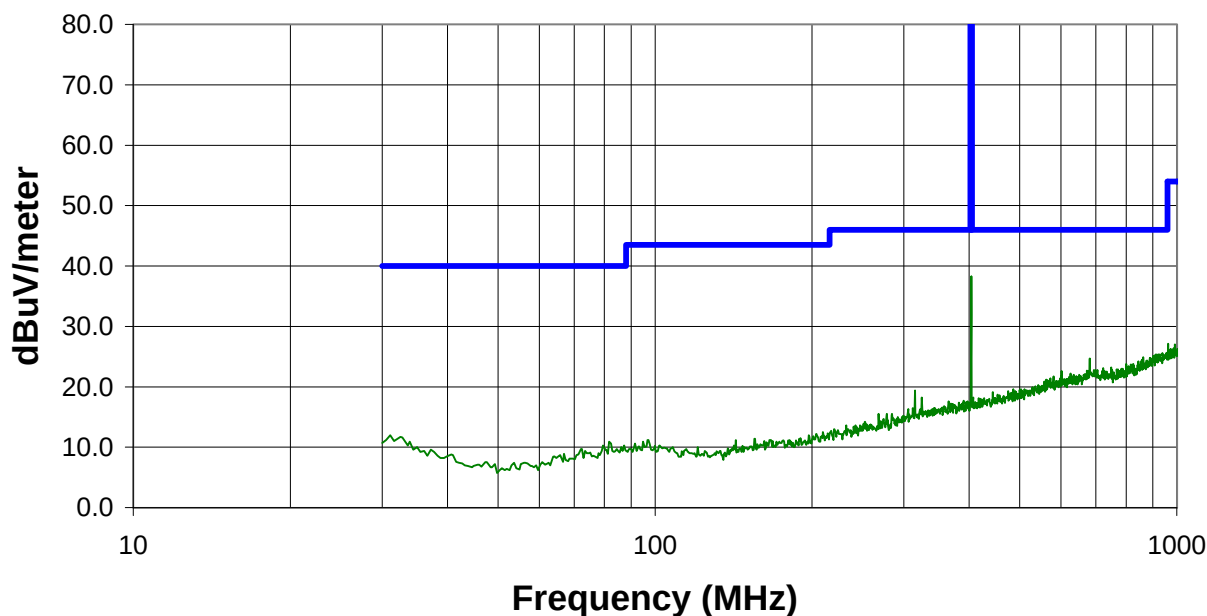


| Frequency (MHz) | Meter Reading (dBuV) | Antenna Polarity | Correction Factor (dB/m) | Adjusted Level (dBuV/meter) | Specification Limit (dBuV/meter) | Margin (dB) |
|-----------------|----------------------|------------------|--------------------------|-----------------------------|----------------------------------|-------------|
| 959.898         | 31.9                 | Hor.             | -6.2                     | 25.7                        | 46.0                             | -20.3       |
| 938.954         | 32.2                 | Hor.             | -6.6                     | 25.6                        | 46.0                             | -20.4       |
| 954.573         | 31.9                 | Hor.             | -6.3                     | 25.6                        | 46.0                             | -20.4       |
| 921.205         | 32.2                 | Ver.             | -6.8                     | 25.4                        | 46.0                             | -20.6       |
| 912.685         | 32.3                 | Hor.             | -6.9                     | 25.4                        | 46.0                             | -20.6       |
| 927.950         | 32.1                 | Ver.             | -6.7                     | 25.4                        | 46.0                             | -20.6       |
| 952.443         | 31.6                 | Ver.             | -6.3                     | 25.3                        | 46.0                             | -20.7       |
| 948.184         | 31.5                 | Hor.             | -6.3                     | 25.2                        | 46.0                             | -20.8       |
| 940.374         | 31.8                 | Ver.             | -6.6                     | 25.2                        | 46.0                             | -20.8       |
| 907.716         | 32.1                 | Ver.             | -6.9                     | 25.2                        | 46.0                             | -20.8       |
| 901.326         | 32.2                 | Hor.             | -7.1                     | 25.1                        | 46.0                             | -20.9       |
| 941.084         | 31.6                 | Hor.             | -6.6                     | 25.0                        | 46.0                             | -21.0       |
| 956.703         | 31.2                 | Hor.             | -6.2                     | 25.0                        | 46.0                             | -21.0       |
| 957.413         | 31.2                 | Ver.             | -6.2                     | 25.0                        | 46.0                             | -21.0       |
| 950.669         | 31.3                 | Ver.             | -6.3                     | 25.0                        | 46.0                             | -21.0       |
| 862.278         | 32.8                 | Hor.             | -7.9                     | 24.9                        | 46.0                             | -21.1       |
| 947.119         | 31.2                 | Ver.             | -6.3                     | 24.9                        | 46.0                             | -21.1       |
| 944.634         | 31.2                 | Hor.             | -6.4                     | 24.8                        | 46.0                             | -21.2       |
| 933.984         | 31.4                 | Ver.             | -6.6                     | 24.8                        | 46.0                             | -21.2       |
| 887.837         | 32.2                 | Ver.             | -7.4                     | 24.8                        | 46.0                             | -21.2       |

# Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4  
10/11/00

|                                                                                                |                                       |                                |                          |
|------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|--------------------------|
| EUT:<br><b>Philos DR-T</b>                                                                     | Serial Number:<br><b>75103203-210</b> | Job Number:<br><b>MICR0001</b> | Date:<br><b>10/19/00</b> |
| Manufacturer:<br><b>Micro Systems Engineering, Inc</b>                                         | Test Engineer:<br><b>Rod Peloquin</b> | Job Site:<br><b>EV01</b>       |                          |
| Customer Reference Number:                                                                     | Software:                             | Power:                         |                          |
| Comments:<br><b>EUT in test fixture at 1.5m above ground plane, EUT in horizontal polarity</b> |                                       |                                |                          |
| <i>Rod Peloquin</i>                                                                            |                                       | Temperature (°C):<br><b>22</b> | % Humidity:<br><b>41</b> |
|                                                                                                |                                       | Run #04                        |                          |

## FCC 95.635 Radiated Specification Limit (3 meter)

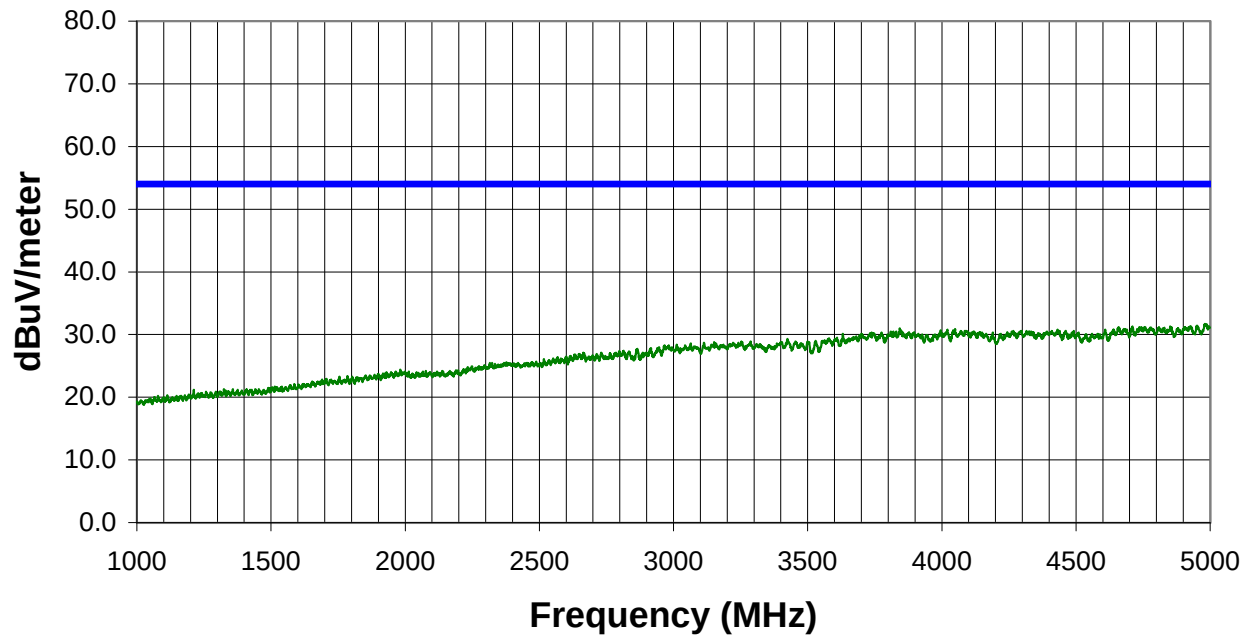


| Frequency (MHz) | Meter Reading (dBuV) | Antenna Polarity | Correction Factor (dB/m) | Adjusted Level (dBuV/meter) | Specification Limit (dBuV/meter) | Margin (dB) |
|-----------------|----------------------|------------------|--------------------------|-----------------------------|----------------------------------|-------------|
| 4980.500        | 28.9                 | Ver.             | 2.8                      | 31.7                        | 54.0                             | -22.3       |
| 4984.500        | 28.8                 | Ver.             | 2.8                      | 31.6                        | 54.0                             | -22.4       |
| 4978.000        | 28.8                 | Ver.             | 2.8                      | 31.6                        | 54.0                             | -22.4       |
| 4986.500        | 28.8                 | Ver.             | 2.8                      | 31.6                        | 54.0                             | -22.4       |
| 4987.500        | 28.8                 | Ver.             | 2.8                      | 31.6                        | 54.0                             | -22.4       |
| 4952.500        | 28.7                 | Ver.             | 2.7                      | 31.4                        | 54.0                             | -22.6       |
| 4949.500        | 28.7                 | Ver.             | 2.7                      | 31.4                        | 54.0                             | -22.6       |
| 4999.500        | 28.6                 | Ver.             | 2.8                      | 31.4                        | 54.0                             | -22.6       |
| 4925.000        | 28.6                 | Ver.             | 2.7                      | 31.3                        | 54.0                             | -22.7       |
| 4951.500        | 28.6                 | Ver.             | 2.7                      | 31.3                        | 54.0                             | -22.7       |
| 4929.000        | 28.6                 | Ver.             | 2.7                      | 31.3                        | 54.0                             | -22.7       |
| 4996.000        | 28.5                 | Hor.             | 2.8                      | 31.3                        | 54.0                             | -22.7       |
| 4850.500        | 28.9                 | Ver.             | 2.4                      | 31.3                        | 54.0                             | -22.7       |
| 4710.000        | 29.1                 | Ver.             | 2.2                      | 31.3                        | 54.0                             | -22.7       |
| 4992.500        | 28.5                 | Ver.             | 2.8                      | 31.3                        | 54.0                             | -22.7       |
| 4906.000        | 28.7                 | Ver.             | 2.5                      | 31.2                        | 54.0                             | -22.8       |
| 4903.000        | 28.7                 | Hor.             | 2.5                      | 31.2                        | 54.0                             | -22.8       |
| 4920.000        | 28.5                 | Ver.             | 2.7                      | 31.2                        | 54.0                             | -22.8       |

# Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4  
10/11/00

|                                                                                       |                                       |                                |                          |
|---------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|--------------------------|
| EUT:<br><b>Philos DR-T</b>                                                            | Serial Number:<br><b>75103203-210</b> | Job Number:<br><b>MICR0001</b> | Date:<br><b>10/19/00</b> |
| Manufacturer:<br><b>Micro Systems Engineering, Inc</b>                                | Test Engineer:<br><b>Rod Peloquin</b> | Job Site:<br><b>EV01</b>       |                          |
| Customer Reference Number:                                                            | Software:                             | Power:                         |                          |
| Comments:<br>EUT in test fixture at 1.5m above ground plane, EUT in vertical polarity |                                       |                                |                          |
| <i>Rod Peloquin</i>                                                                   |                                       | Temperature (°C):<br><b>22</b> | % Humidity:<br><b>41</b> |
|                                                                                       |                                       | Run #05                        |                          |

## FCC 95.635 Radiated Specification Limit (3 meter)

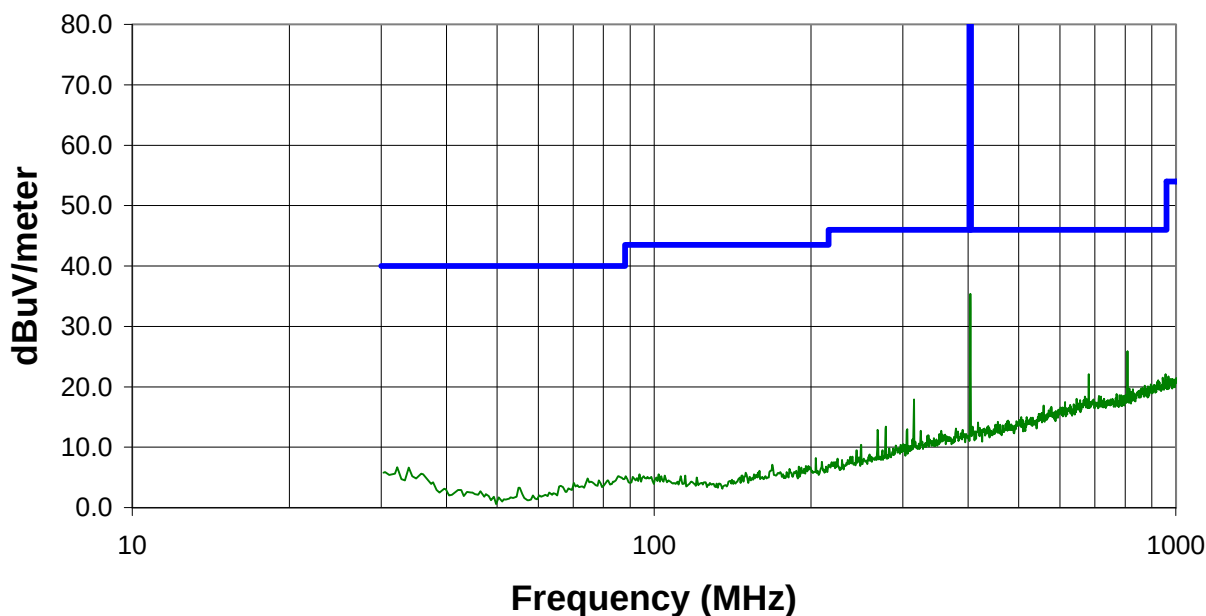


| Frequency (MHz) | Meter Reading (dBuV) | Antenna Polarity | Correction Factor (dB/m) | Adjusted Level (dBuV/meter) | Specification Limit (dBuV/meter) | Margin (dB) |
|-----------------|----------------------|------------------|--------------------------|-----------------------------|----------------------------------|-------------|
| 807.611         | 34.9                 | Hor.             | -9.0                     | 25.9                        | 46.0                             | -20.1       |
| 681.238         | 31.5                 | Ver.             | -9.4                     | 22.1                        | 46.0                             | -23.9       |
| 955.283         | 28.3                 | Hor.             | -6.2                     | 22.1                        | 46.0                             | -23.9       |
| 943.924         | 27.9                 | Hor.             | -6.4                     | 21.5                        | 46.0                             | -24.5       |
| 925.465         | 27.8                 | Hor.             | -6.7                     | 21.1                        | 46.0                             | -24.9       |
| 951.733         | 27.3                 | Hor.             | -6.3                     | 21.0                        | 46.0                             | -25.0       |
| 944.634         | 27.2                 | Ver.             | -6.4                     | 20.8                        | 46.0                             | -25.2       |
| 921.205         | 27.6                 | Ver.             | -6.8                     | 20.8                        | 46.0                             | -25.2       |
| 957.413         | 27.0                 | Hor.             | -6.2                     | 20.8                        | 46.0                             | -25.2       |
| 930.435         | 27.4                 | Hor.             | -6.7                     | 20.7                        | 46.0                             | -25.3       |
| 959.188         | 26.8                 | Ver.             | -6.2                     | 20.6                        | 46.0                             | -25.4       |
| 922.625         | 27.3                 | Ver.             | -6.8                     | 20.5                        | 46.0                             | -25.5       |
| 895.646         | 27.6                 | Ver.             | -7.2                     | 20.4                        | 46.0                             | -25.6       |
| 942.504         | 27.0                 | Hor.             | -6.6                     | 20.4                        | 46.0                             | -25.6       |
| 928.305         | 27.1                 | Hor.             | -6.7                     | 20.4                        | 46.0                             | -25.6       |
| 908.426         | 27.2                 | Ver.             | -6.9                     | 20.3                        | 46.0                             | -25.7       |
| 910.911         | 27.2                 | Hor.             | -6.9                     | 20.3                        | 46.0                             | -25.7       |
| 906.296         | 27.2                 | Hor.             | -7.0                     | 20.2                        | 46.0                             | -25.8       |
| 948.184         | 26.5                 | Ver.             | -6.3                     | 20.2                        | 46.0                             | -25.8       |
| 871.863         | 27.9                 | Ver.             | -7.7                     | 20.2                        | 46.0                             | -25.8       |

# Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4  
10/11/00

|                                                                                       |                                       |                                |                          |
|---------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|--------------------------|
| EUT:<br><b>Philos DR-T</b>                                                            | Serial Number:<br><b>75103203-210</b> | Job Number:<br><b>MICR0001</b> | Date:<br><b>10/19/00</b> |
| Manufacturer:<br><b>Micro Systems Engineering, Inc</b>                                | Test Engineer:<br><b>Rod Peloquin</b> | Job Site:<br><b>EV01</b>       |                          |
| Customer Reference Number:                                                            | Software:                             | Power:                         |                          |
| Comments:<br>EUT in test fixture at 1.5m above ground plane, EUT in vertical polarity |                                       |                                |                          |
|      |                                       | Temperature (°C):<br><b>22</b> | % Humidity:<br><b>41</b> |
|                                                                                       |                                       | Run #06                        |                          |

## FCC 95.635 Radiated Specification Limit (3 meter)

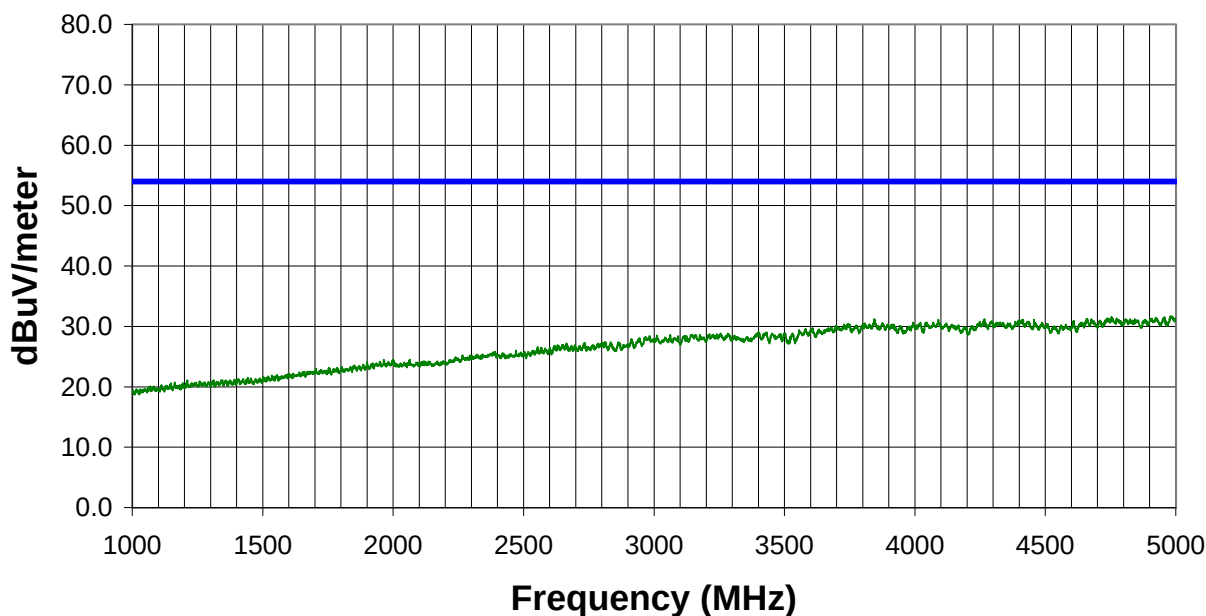

| Frequency (MHz) | Meter Reading (dBuV) | Antenna Polarity | Correction Factor (dB/m) | Adjusted Level (dBuV/meter) | Specification Limit (dBuV/meter) | Margin (dB) |
|-----------------|----------------------|------------------|--------------------------|-----------------------------|----------------------------------|-------------|
| 4979.500        | 28.9                 | Hor.             | 2.8                      | 31.7                        | 54.0                             | -22.3       |
| 4984.500        | 28.9                 | Hor.             | 2.8                      | 31.7                        | 54.0                             | -22.3       |
| 4754.000        | 29.2                 | Hor.             | 2.4                      | 31.6                        | 54.0                             | -22.4       |
| 4987.500        | 28.8                 | Hor.             | 2.8                      | 31.6                        | 54.0                             | -22.4       |
| 4957.000        | 28.8                 | Hor.             | 2.7                      | 31.5                        | 54.0                             | -22.5       |
| 4980.500        | 28.7                 | Hor.             | 2.8                      | 31.5                        | 54.0                             | -22.5       |
| 4922.500        | 28.7                 | Hor.             | 2.7                      | 31.4                        | 54.0                             | -22.6       |
| 4953.500        | 28.7                 | Ver.             | 2.7                      | 31.4                        | 54.0                             | -22.6       |
| 4925.500        | 28.7                 | Hor.             | 2.7                      | 31.4                        | 54.0                             | -22.6       |
| 4908.000        | 28.7                 | Hor.             | 2.6                      | 31.3                        | 54.0                             | -22.7       |
| 4958.000        | 28.6                 | Hor.             | 2.7                      | 31.3                        | 54.0                             | -22.7       |
| 4952.000        | 28.6                 | Ver.             | 2.7                      | 31.3                        | 54.0                             | -22.7       |
| 4757.000        | 28.9                 | Hor.             | 2.4                      | 31.3                        | 54.0                             | -22.7       |
| 4993.500        | 28.5                 | Hor.             | 2.8                      | 31.3                        | 54.0                             | -22.7       |
| 4995.000        | 28.5                 | Hor.             | 2.8                      | 31.3                        | 54.0                             | -22.7       |
| 4990.500        | 28.5                 | Hor.             | 2.8                      | 31.3                        | 54.0                             | -22.7       |
| 4976.500        | 28.5                 | Hor.             | 2.8                      | 31.3                        | 54.0                             | -22.7       |
| 4773.000        | 28.9                 | Hor.             | 2.4                      | 31.3                        | 54.0                             | -22.7       |
| 4739.000        | 29.0                 | Hor.             | 2.3                      | 31.3                        | 54.0                             | -22.7       |
| 4736.000        | 29.0                 | Hor.             | 2.3                      | 31.3                        | 54.0                             | -22.7       |