







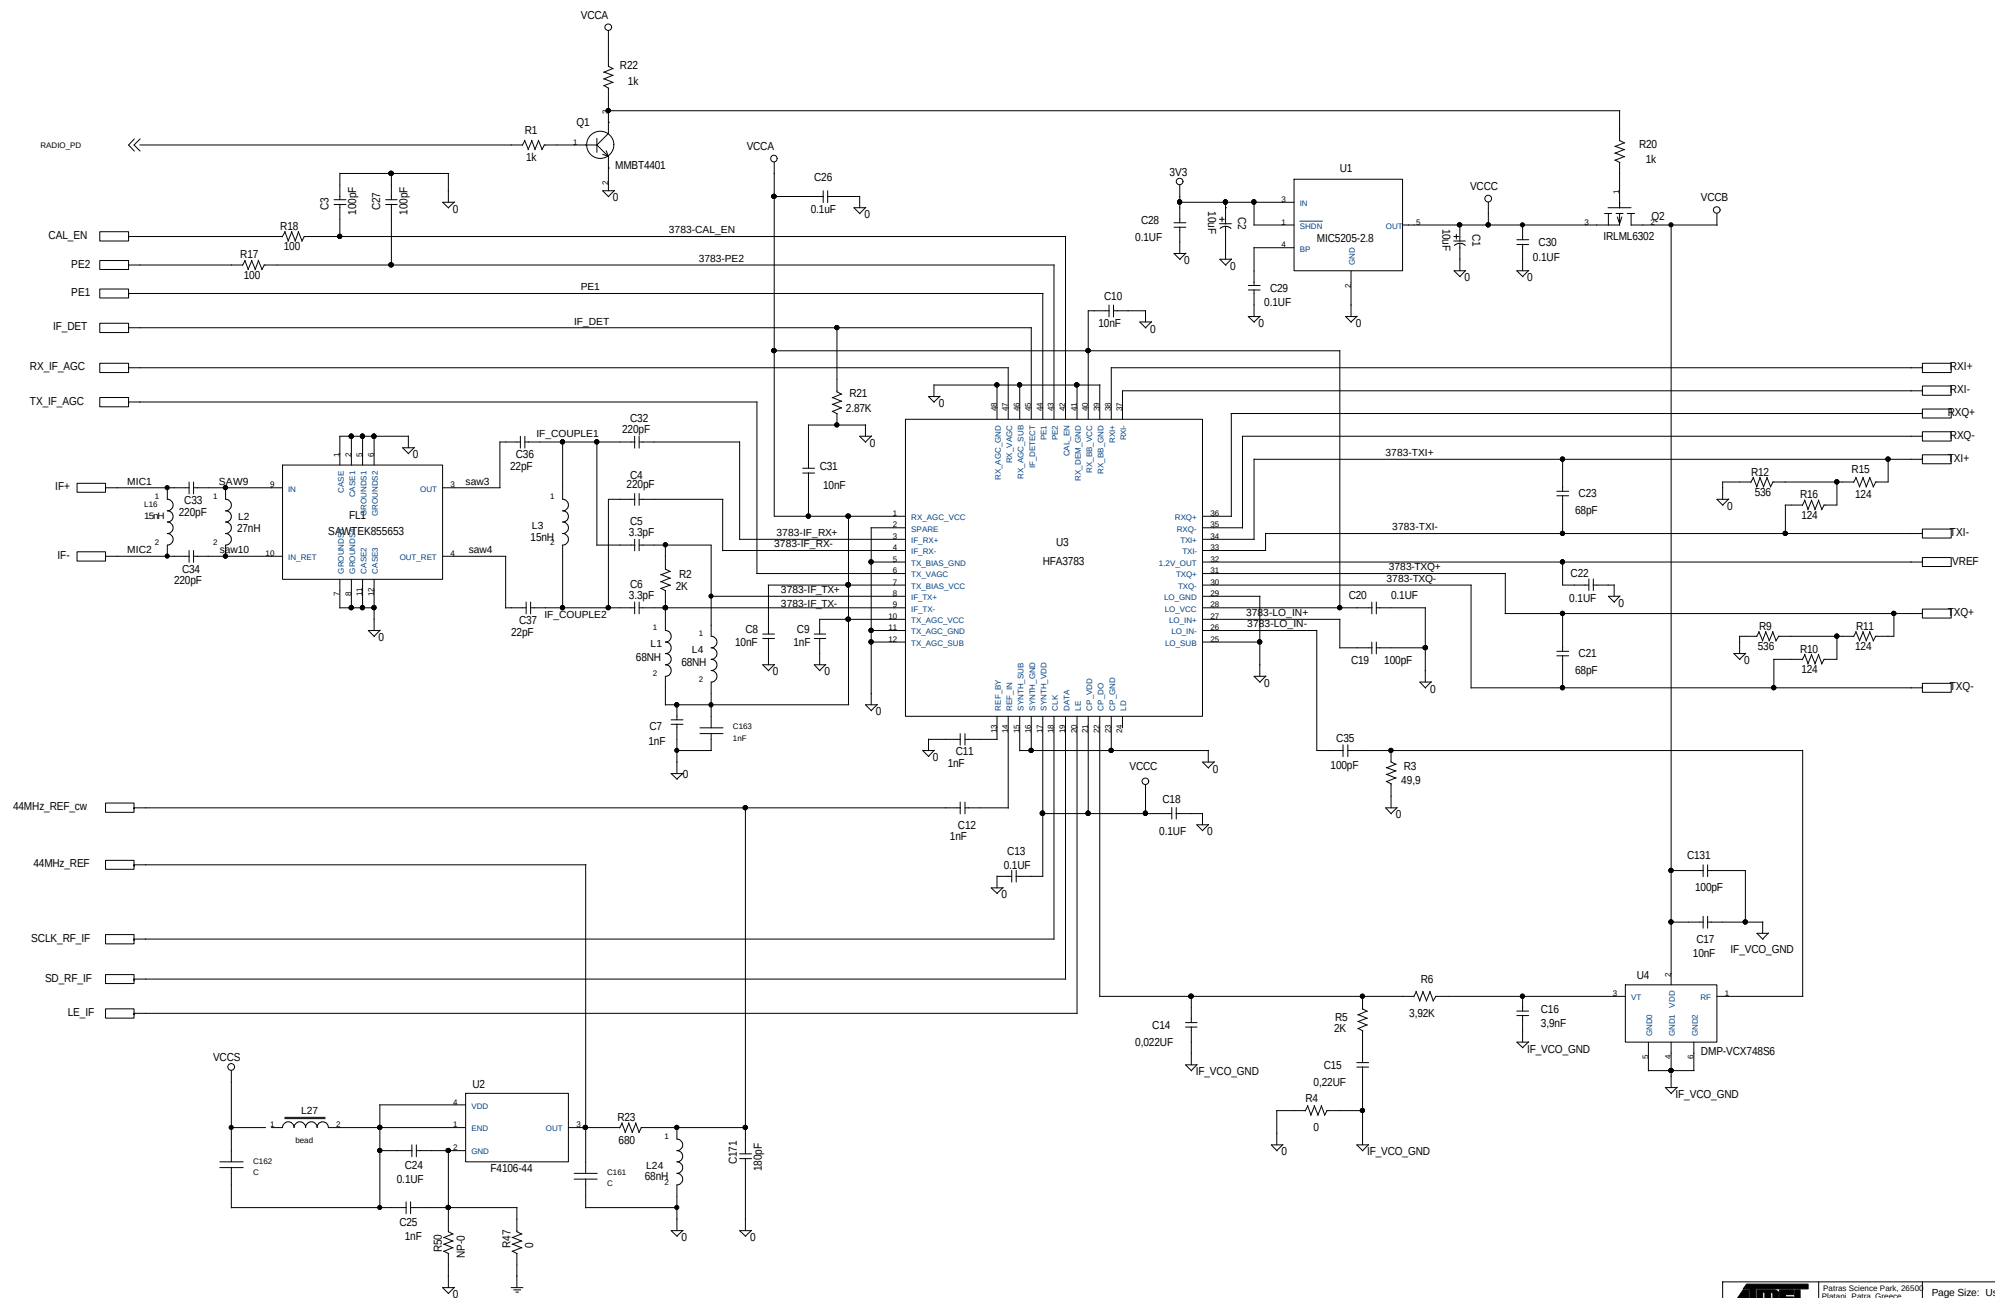


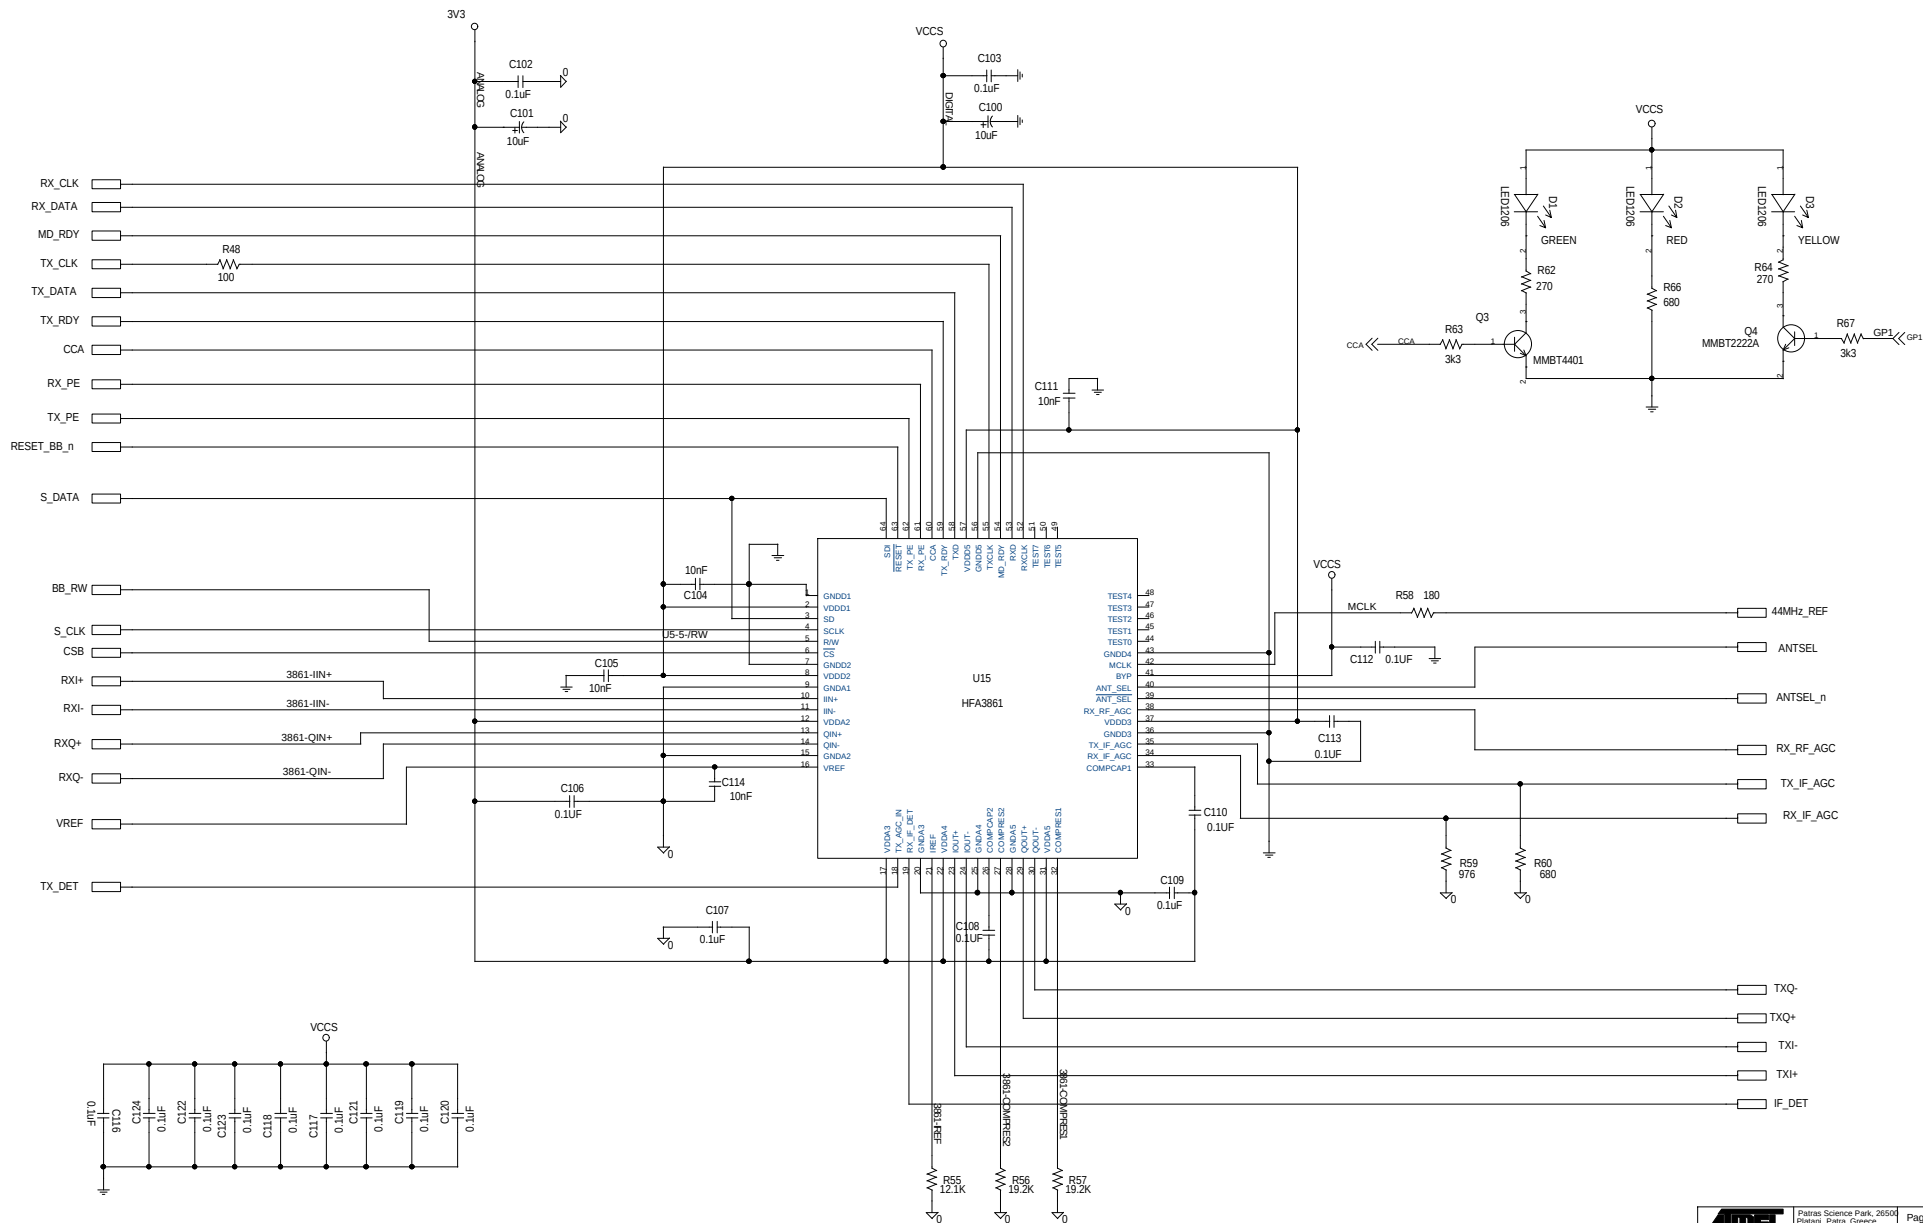

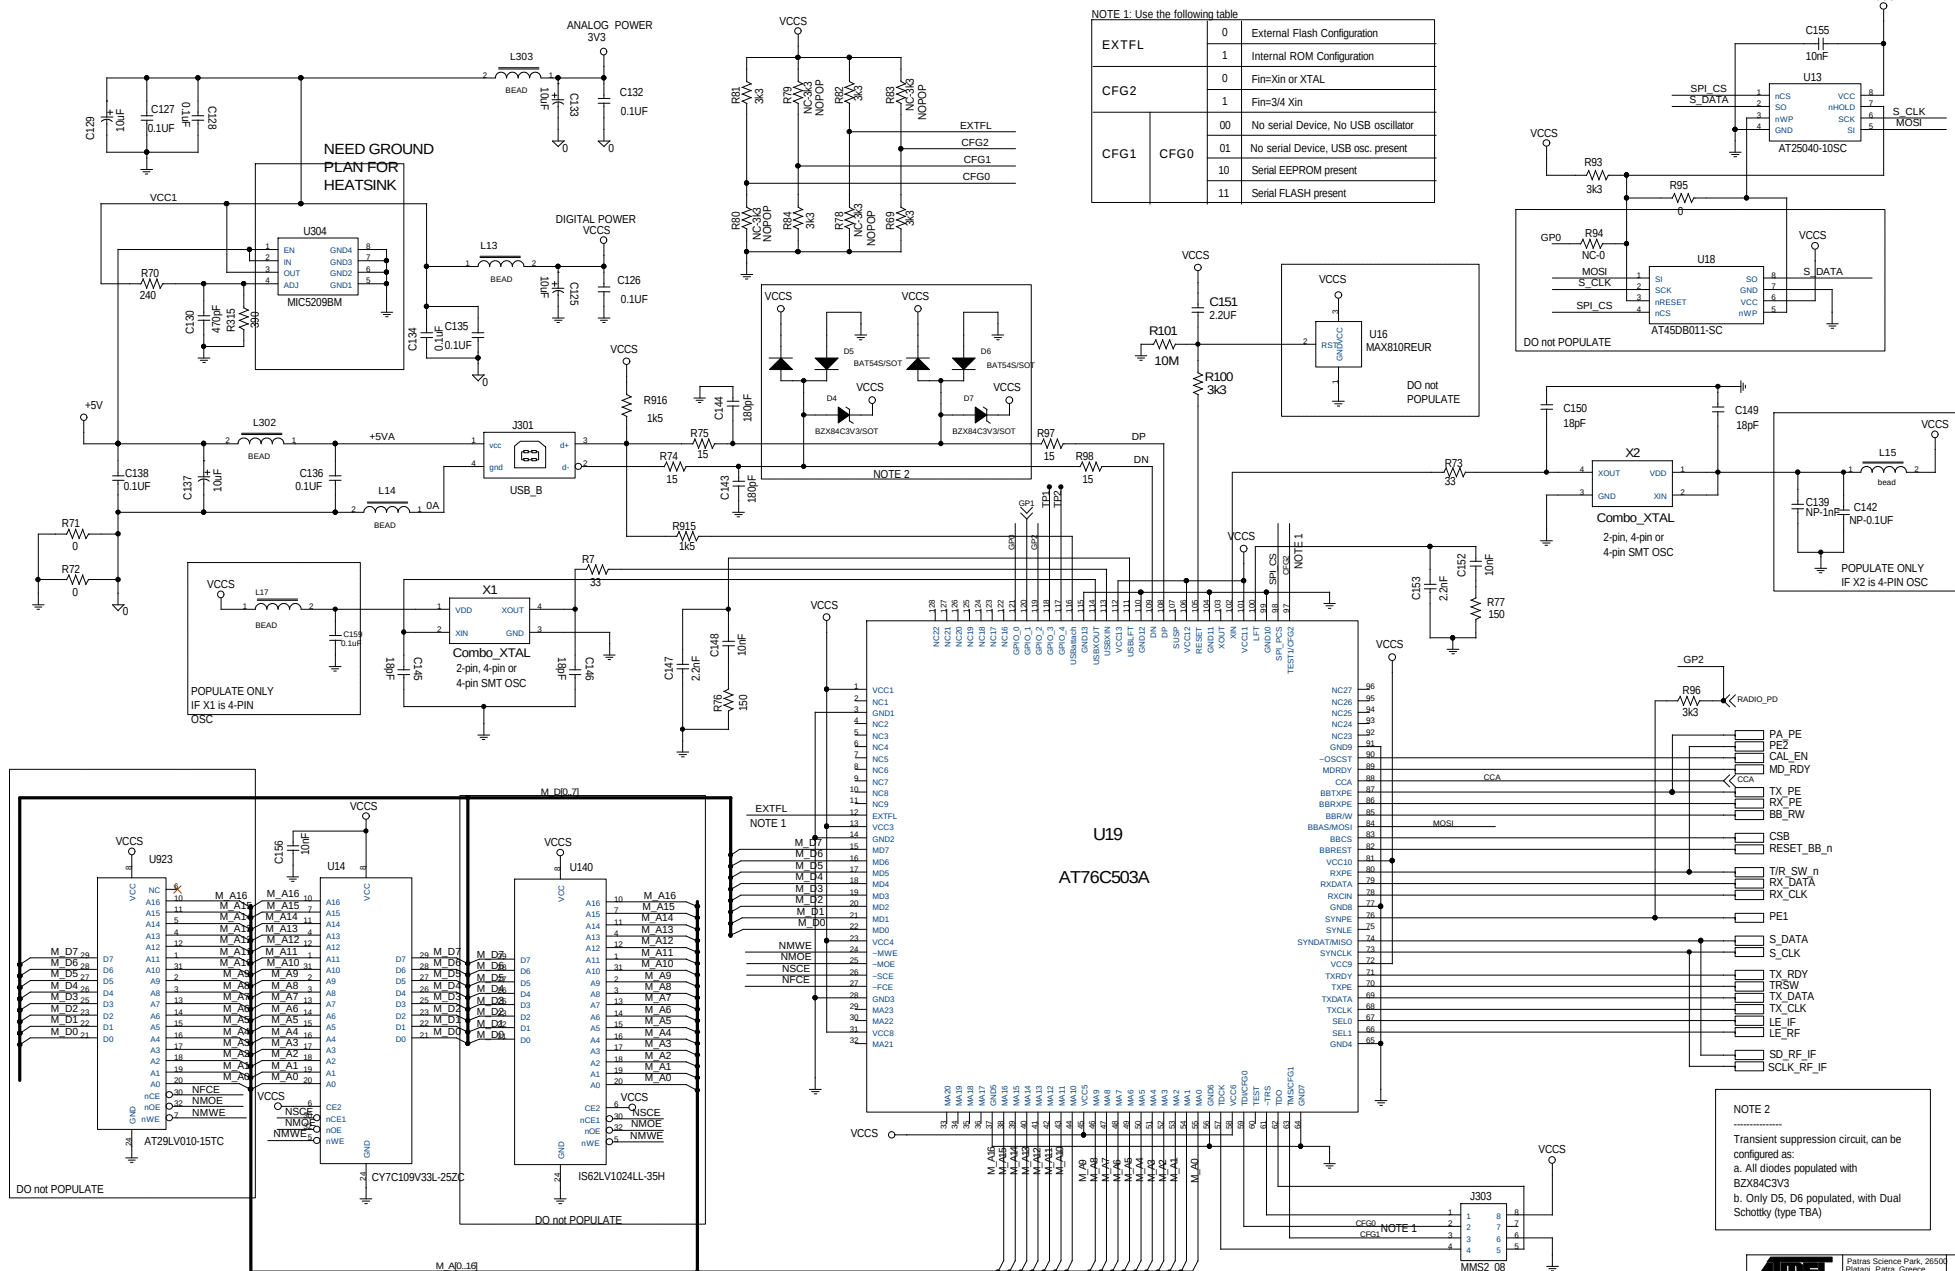

NOTE 1: Use the following table

|       |      |                                        |
|-------|------|----------------------------------------|
| EXTFL | 0    | External Flash Configuration           |
|       | 1    | Internal ROM Configuration             |
| CFG2  | 0    | Fin=Xin or XTAL                        |
|       | 1    | Fin=3/4 Xin                            |
| CFG1  | CFG0 | 00 No serial Device, No USB oscillator |
|       |      | 01 No serial Device, USB osc. present  |
|       |      | 10 Serial EEPROM present               |
|       |      | 11 Serial FLASH present                |

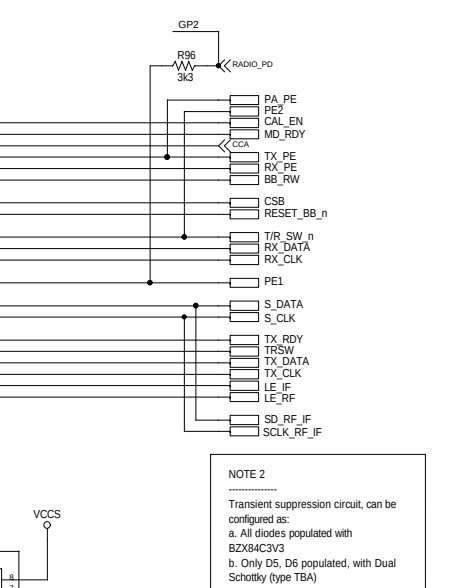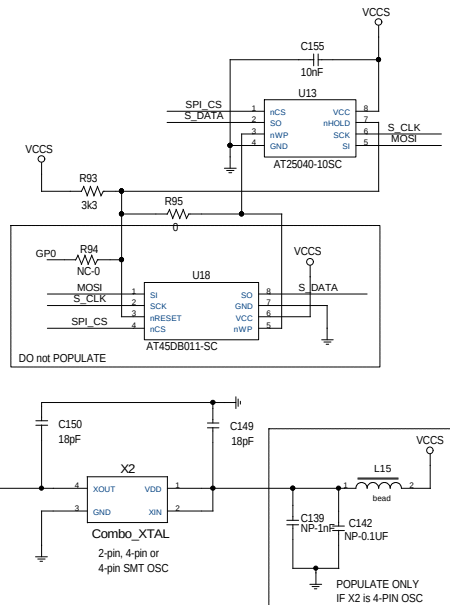

NOTE 2  
Transient suppression circuit, can be configured as:  
a. All diodes populated with BZX84C3V3  
b. Only D5, D6 populated, with Dual Schottky (type TBA)