



montena
montena emc sa

MACHINERY - COMPONENTS - TECHNOLOGY

EMC Test laboratory accredited by the Swiss Federal Office of Metrology
Laboratoire d'essai de CEM accrédité par l'Office Fédéral de Métrologie (Suisse)
Durch das Eidgenössische Amt für Messwesen (Schweiz) akkreditiertes EMV-Prüflabor

Registration number
Numéro d'accréditation : **STS 024**
Akkreditierungsnummer



Schweizerischer Prüfstellendienst
Service suisse d'essai
Servizio di prova in svizzera
Swiss testing service

Report no:
Rapport no: **12'596**
Bericht Nr:

Title: **Electromagnetic Compatibility Tests of the RF-
Titre: Identification system OIS-W for determination of
Titel: compliance with FCC part 15, subpart C**

Date of test:
Date de l'essai: **January 12 and 15, 2001**
Prüfdatum:

Customer:
Client: **Baumer Electric AG**
Kunde:

Test place: **montena emc sa**
Lieu de l'essai: **CH-1728 Rossens**
Prüfört:

Test performed by
Essai effectué par :
Prüfer

Mr. Jacques Ding

Test report prepared by
Rapport d'essai préparé par :
Berichterstatter

Mr. Jacques Ding

Test report controled and approved by
Rapport d'essai contrôlé et approuvé par :
Prüfbescheinigung

Mr. Erich Staub

Rossens, 2000-01-23

(Issue Date / Date d'édition / Ausstelldatum)

Main language / Langue principale / Hauptsprache: english / français / Deutsch

This report may be reproduced in full, partial reproduction may be made only with the written consent of montena emc sa. The present document results from tests on a specimen and does not prejudice to the conformity of all the manufactured products.

Ce rapport d'essai peut être reproduit en entier, une reproduction partielle ne peut être faite qu'avec l'autorisation écrite de montena emc sa. Le présent document résulte d'essais sur un spécimen. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé.

Dieser Prüfbericht darf nur als Ganzes vervielfältigt werden. Auszüge dürfen nur mit schriftlicher Genehmigung von montena emc sa reproduziert werden. Dieser Bericht beinhaltet die Prüfergebnisse eines Mustergerätes. Es kann daraus nicht auf die Übereinstimmung der Seriegeräte mit dem Mustergerät geschlossen werden.

montena emc sa

CH-1728 Rossens - phone ++41 (0)26/411 93 33 - fax ++41 (0)26/411 93 30 - <http://www.montena.com>

Contents / Table des matières / Inhaltsverzeichnis

	<i>Page/Page/Seite</i>
1. Summary of test results / Résumé des résultats d'essais / Zusammenfassung der Prüfergebnisse	3
2. Client / Client / Kunde.....	4
3. Equipment under test / Equipement à l'essai / Prüfling.....	4
4. Test conditions / Conditions d'essai / Testbedingungen	5
5. Persons present / Personnes présentes / Anwesende Personen.....	5

Emission Tests / Essais d'émission / Störaussendungsmessungen

- Mains terminal interference voltage / Tension perturbatrice aux bornes d'alimentation / Störspannung auf den Energieversorgungsleitungen 6.1 - 6.3
- Radiated electromagnetic field / Champ électromagnétique rayonné / Störfeldstärke 7.1 - 7.17

Appendixes / Annexes / Anhänge

- Photos of the test set-ups / Photos des montages d'essai / Fotos der Prüfaufbauten 8.1 - 8.2
- Technical documentation / Documentation technique / Technische Dokumentation..... 9.1 – 9.10

Total number of pages

Nombre total de pages du rapport: 37

Total Anzahl Seiten

1. Summary of test results / Résumé des résultats d'essais / Zusammenfassung der Prüfergebnisse

- ☒ Pass / Réussi / Bestanden
☐ Fail / Pas réussi / Nicht bestanden
☐ Not applicable to this type of product / pas applicable à ce type de produit / nicht anwendbar für diese Produktart
☐ No test / Pas d'essai / Nicht geprüft

Test Type / Type d'essai / Art der Prüfung	Result / Résultat / Ergebnis
<i>Emission / Emission / Störaussendung</i> FCC, part C	
Mains terminal interference voltage § 15.207 Tension perturbatrice aux bornes d'alimentation § 15.207 Störspannung auf den Energieversorgungsleitungen § 15.207	✓
Radiated electromagnetic field § 15.209, 15.249 Champ perturbateur § 15.209, 15.249 Störfeldstärke § 15.209, 15.249	✓

The equipment is conform to all requirements of the standards:
 L'appareil répond à toutes les exigences fixées dans les normes :
 Das Gerät entspricht sämtlichen Anforderungen der Normen :

FCC part C: § 15.207, 15.209 and 15.249

No. / No. / Nr. : **12'596**

Date/Date/Datum : **January 12 and 15, 2001**

Title/Titre/Titel : **Electromagnetic Compatibility Tests of the RF-
Identification system OIS-W for determination of
compliance with FCC part 15, subpart C**



Page/Page/Seite **4 / 37**


2. Client / Client / Kunde

Client name and address Nom et adresse du client Name und Adresse des Kunden	<i>Baumer Electric AG Hummelstrasse 17 CH-8500 Frauenfeld</i>
Contact Person / Responsable / Kontaktperson	<i>Mr. Reto Peter</i>
Telephone / Téléphone / Telefon	<i>++41 52 728 15 87</i>
Fax / Télécopieur / Telefax	<i>++41 52 728 11 44</i>
Mandate no / Mandat no / Auftrag Nr.	<i>98-3899</i>

3. Equipment under test / Equipement à l'essai / Prüfling

Manufacturer name and address Nom et adresse du fabricant Name und Adresse des Herstellers	<i>Baumer Electric AG Hummelstrasse 17 CH-8500 Frauenfeld</i>
Contact Person / Responsable / Kontaktperson	<i>Mr. Reto Peter</i>
Telephone / Téléphone / Telefon	<i>++41 52 728 15 87</i>
Fax / Télécopieur / Telefax	<i>++41 52 728 11 44</i>
Product name / Nom du produit / Produktname	<i>OIS-W WR 300/303</i>
Product description / Description du produit / Produktbeschreibung	<i>RF-Identification System</i>
Production country / Pays de fabrication / Ursprungsland	<i>Switzerland</i>
Product type / Type du produit / Typ des Produktes	<i>Rev. 1 Part 128494</i>
Serial no / No. de série / Seriennummer	<i>1-9933-0020</i>
Modifications before the tests Modifications apportées avant les essais Vor den Prüfungen angebrachte Änderungen	<i>none</i>
Technical documentation Documentation technique Technische Dokumentation	<i>s. report 11'982 (HF – Unit) and p. 9.1 9.10</i>

No. / No. / Nr. : **12'596**



Date/Date/Datum : **January 12 and 15, 2001**

Page/Page/Seite **5 / 37**

Title/Titre/Titel : **Electromagnetic Compatibility Tests of the RF-
Identification system OIS-W for determination of
compliance with FCC part 15, subpart C**

4. Test conditions / Conditions d'essai / Testbedingungen

Temperature / Température / Temperatur:

20 – 22 °C

Pression / Pression / Druck:

1008 – 1020 hPa

Relative humidity / Humidité relative / Relative Luftfeuchtigkeit:

40 – 50 %

Test period / Date des essais / Datum der Prüfungen:

5. Persons present / Personnes présentes / Anwesende Personen

Test Engineer(s) / Ingénieur(s) d'essai / Prüfsingenieur(e) :

Mr. Jacques Ding

Other(s) / Autre(s) / Andere :

Name / Nom / Name

Company / Société / Firma



Measurement of the conducted disturbances 450 kHz - 30 MHz


Standard: United States: 47 CFR "Code of Federal Regulations" - Telecommunication
☐ FCC Part 15, Subpart B: Unintentional Radiators: § 15.107 (a) and (b)
☒ FCC Part 15, Subpart C: Intentional Radiators: § 15.207 and
☐ class A ☐ class B

Test site: ☐ anechoic chamber (ferrites) ☒ anechoic chamber (foam)
☐ shielded room ☐ laboratory
☐ open test site ☐

Test precision: ± 3.5 dB

Test method: The conducted disturbance on the supply line is measured from 450 kHz to 30 MHz using a spectrum analyser and a line impedance substitution network (LISN). The measurement of the radio frequency voltage between each power line and ground at the power terminals is carried out successively. Only the maximum of all the values is displayed. The peak values are recorded continuously on the graph. The values that exceed the limits are remeasured manually with the quasi-peak and the average detector of a measuring receiver. These values are indicated at the bottom of the graph.
 If the quasi-peak (QP) values exceed the limits in § 15.107 (a) and (b), and the difference of the measured quasi-peak value and the average value is 6 dB or more, that emission is considered to be broadband. In this case the QP level may be reduced by 13 dB for comparison to the limits.
 As an additional alternative to § 15.107 (a) and (b) digital devices may be shown to comply with the Standards contained in the CISPR Pub. 22 (1985) and the associated Standards.

Test set-up (example):

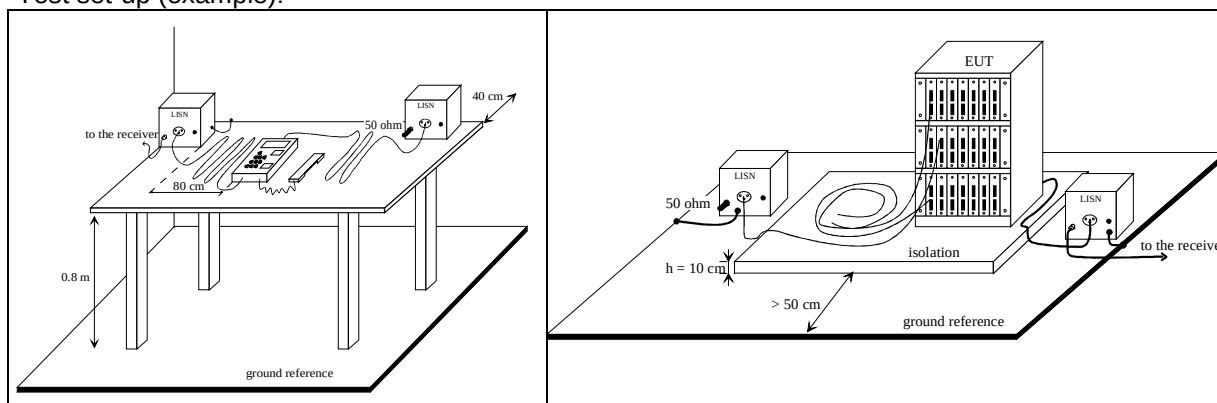

☒ Table-top equipment

☐ Floor-standing equipment

Test equipment:

☒ Spectrum analyser	☒ 88-14	☐ 90-26	☐ 94-24
☐ Receiver	☐ 85-12	☐ 90-11	☐ 94-34
☐ LISN	☐ 85-13	☐ 90-08	☐ 94-36 ☐ 00-43
☒ LISN	☒ 94-40	☐ 95-12	☐
☒ Printer	☐ 99-33	☒ 92-30	☐
☒ Protection 10 dB	in LISN		
☐			
☐			


Results: ☒ complies ☐ does not comply ☐ not applicable ☐ not done

Measurement Type : Voltage Interference
Wire : Neutral



6.2

Equipment Under Test : WR 300/ 303
Set-Up : s. photo
Operating Conditions : sweeping
Remarks : 15.207

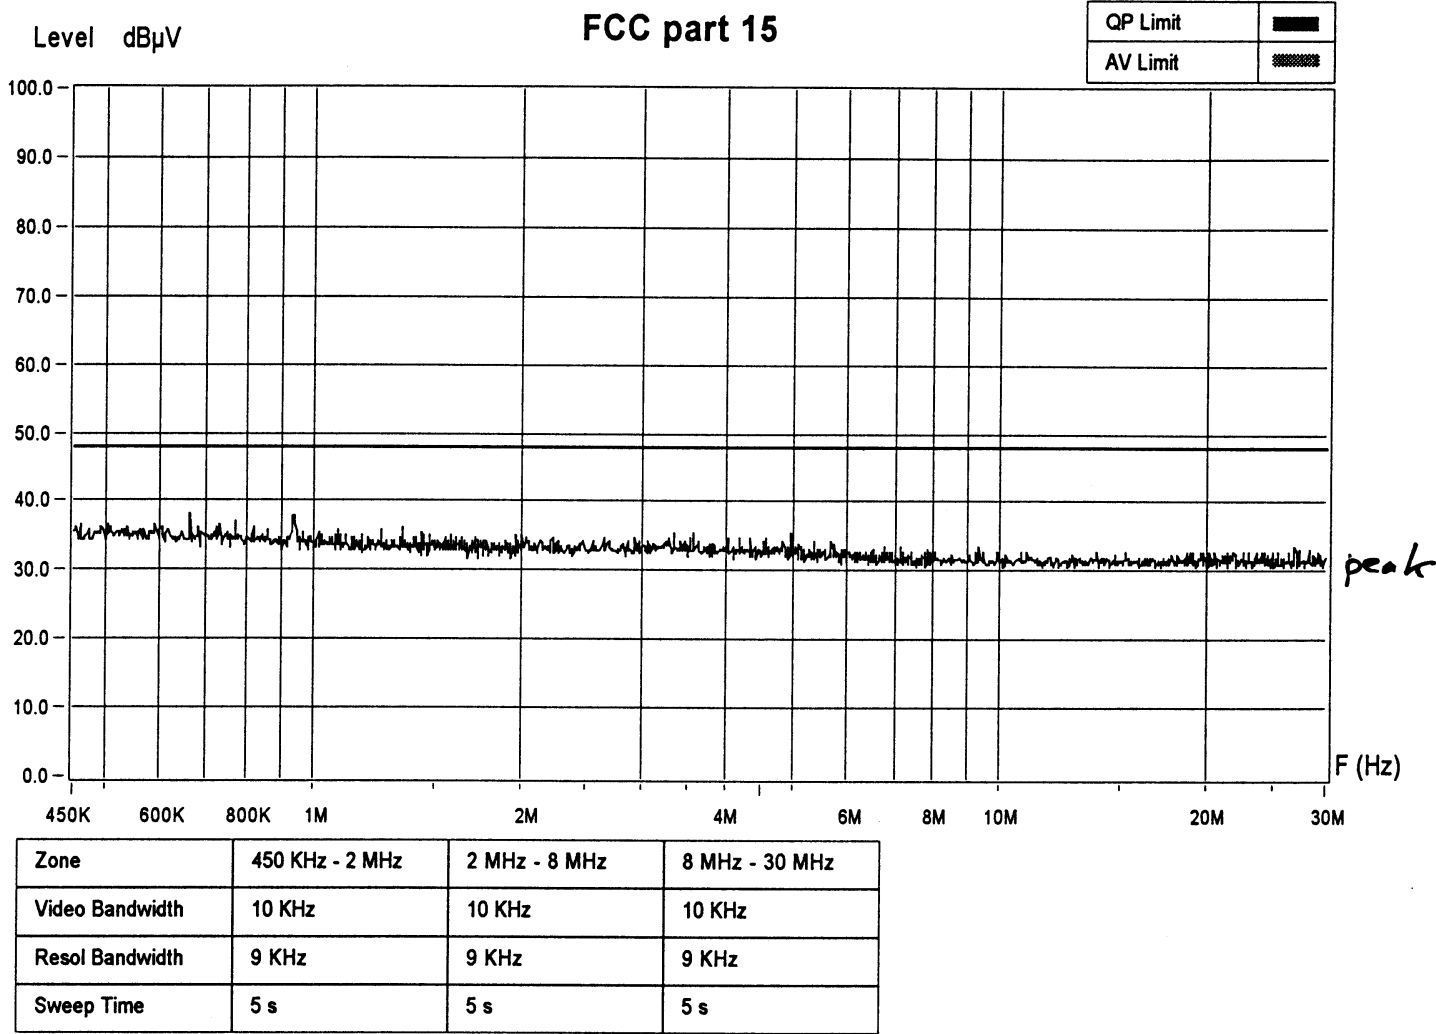


Measurement Type : Voltage Interference
Wire : Line 1



6.3

Equipment Under Test : WR 300/ 303
Set-Up : s. photo
Operating Conditions : sweeping
Remarks : <i>f 15.207</i>

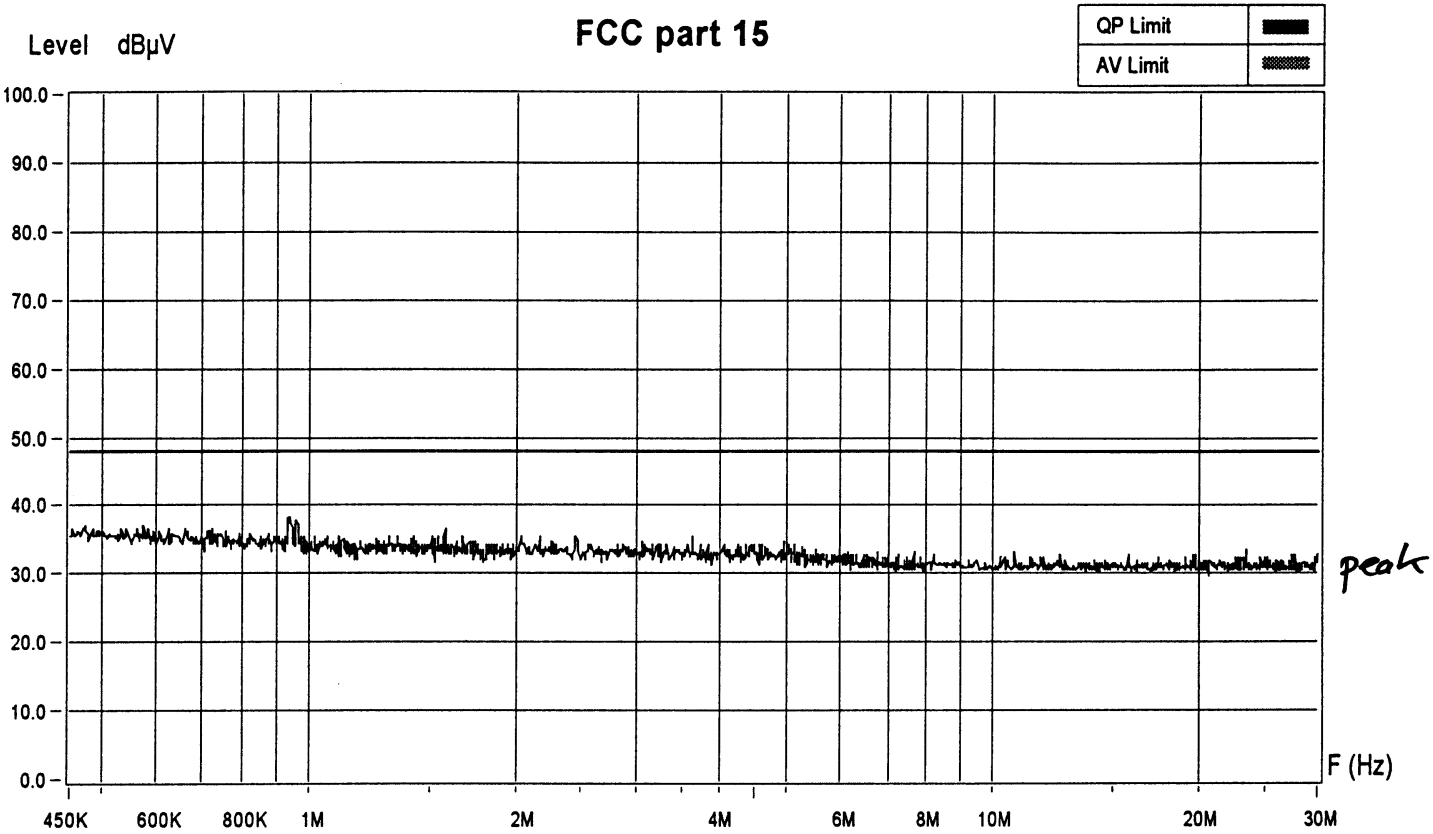

Zone	450 KHz - 2 MHz	2 MHz - 8 MHz	8 MHz - 30 MHz
Video Bandwidth	10 KHz	10 KHz	10 KHz
Resol Bandwidth	9 KHz	9 KHz	9 KHz
Sweep Time	5 s	5 s	5 s

Operator : Ding
15.01.01 08:32



Radiated electromagnetic field

Standard: United States: 47 CFR "Code of Federal Regulations" - Telecommunication
☐ FCC Part 15, Subpart B: Unintentional Radiators
☒ FCC Part 15, Subpart C: Intentional Radiators
☐ class A ☐ class B §15.33 frequency range of radiated meas.:
 from MHz to MHz
☐ §15.209 ☐ §15.....

Distance: ☐ 30 m ☒ 10 m ☐ 3 m ☐


Test site: ☒ anechoic chamber (foam) ☐ open test site
☐ anechoic chamber (ferrite) ☐

Test precision: ± 4.6 dB

Position of EUT: 0.8 m (Height of equipment under test above floor)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and an antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbance appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding the limits are remeasured manually giving quasi-peak values and average values using a receiver and these measurements are indicated under the graph. The limit must be respected in quasi-peak values (QP) up to 1 GHz and in average values (AV) above 1 GHz. The 6 dB bandwidth of the spectrum analyser is adjusted to 100 kHz from 30 to 1000 MHz and 1 MHz above 1 GHz.

Test set-up (example):

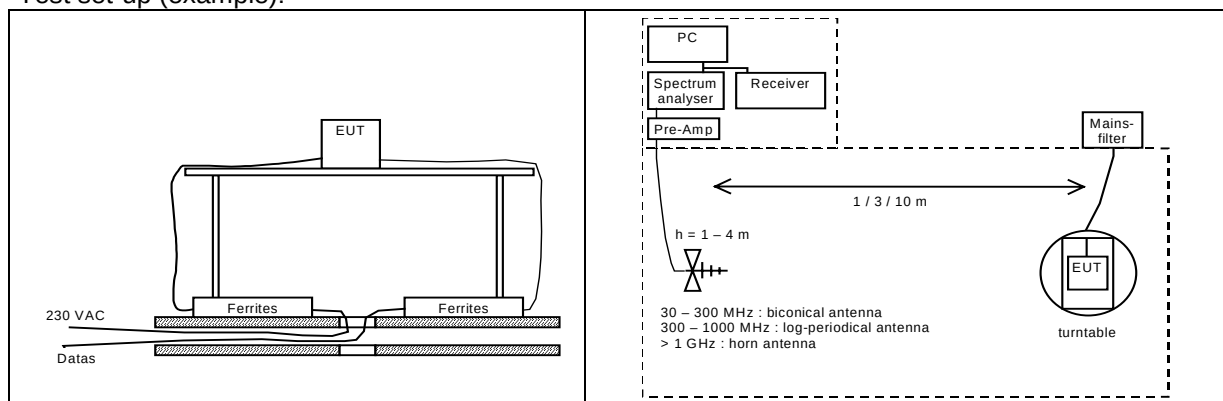


Test equipment:

☒ Spectrum analyser	☒ 88-14	☐ 90-26	☐ 94-24		
☐ Receiver (CISPR 16)	☐ 85-04	☐ 90-43	☐ 94-35		
☐ Preamplifier	☐ 88-05	☐ 90-01	☐ 90-42	☐ 95-86	
☐ Antenna (biconical)	☐ 82-02	☐ 87-05	☐ 87-16	☐ 91-05	☐ 94-37
☐ Antenna (log-per)	☐ 88-20	☐ 90-30	☐ 91-35	☐ 94-64	☐
☐ Antenna (bilog)	☐ 94-03	☐			
☐ Antenna (horn)	☐ 90-24	☐ 90-29	☐ 98-12	☐ 98-13	☐
☐ Printer	☐ 99-33	☐			
☒ Rod antenna	☒ 91-18				

Results: ☒ complies ☐ does not comply ☐ not applicable ☐ not done

7.2

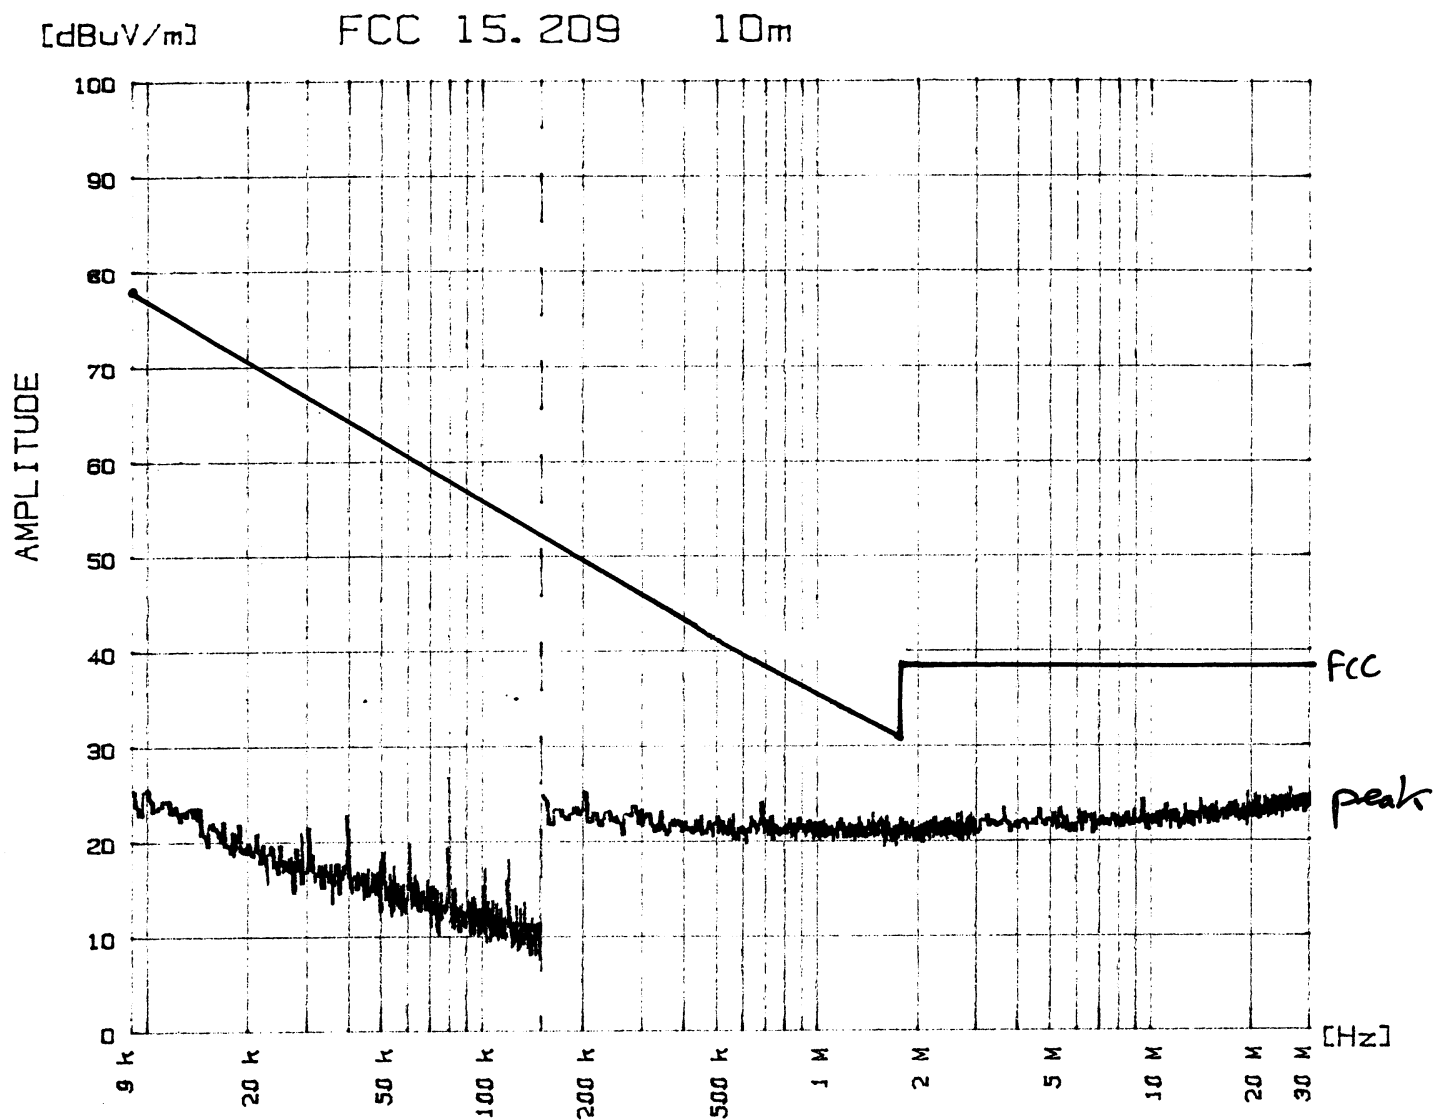

Type of measurement
 Mesure effectuée : radiated field

Equipment under test
 Appareil mesuré : OES-W 303/300

Set-up
 Configuration : photo

Operating conditions
 Fonctionnement : sweeping

Remarks
 Remarques :

Date/Date : 2001-1-12
 Time/Heure :
 Operator/Collaborateur : S. Diny



Radiated electromagnetic field

Standard: United States: 47 CFR "Code of Federal Regulations" - Telecommunication
☐ FCC Part 15, Subpart B: Unintentional Radiators
☒ FCC Part 15, Subpart C: Intentional Radiators
☐ class A ☐ class B §15.33 frequency range of radiated meas.:
 from MHz to MHz
☒ §15.209 ☐ §15.....

Distance: ☐ 30 m ☒ 10 m ☐ 3 m ☐


Test site: ☐ anechoic chamber (foam) ☐ open test site
☒ anechoic chamber (ferrite) ☐

Test precision: ± 4.6 dB

Position of EUT: 0.8 m (Height of equipment under test above floor)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and an antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbance appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding the limits are remeasured manually giving quasi-peak values and average values using a receiver and these measurements are indicated under the graph. The limit must be respected in quasi-peak values (QP) up to 1 GHz and in average values (AV) above 1 GHz. The 6 dB bandwidth of the spectrum analyser is adjusted to 100 kHz from 30 to 1000 MHz and 1 MHz above 1 GHz.

Test set-up (example):

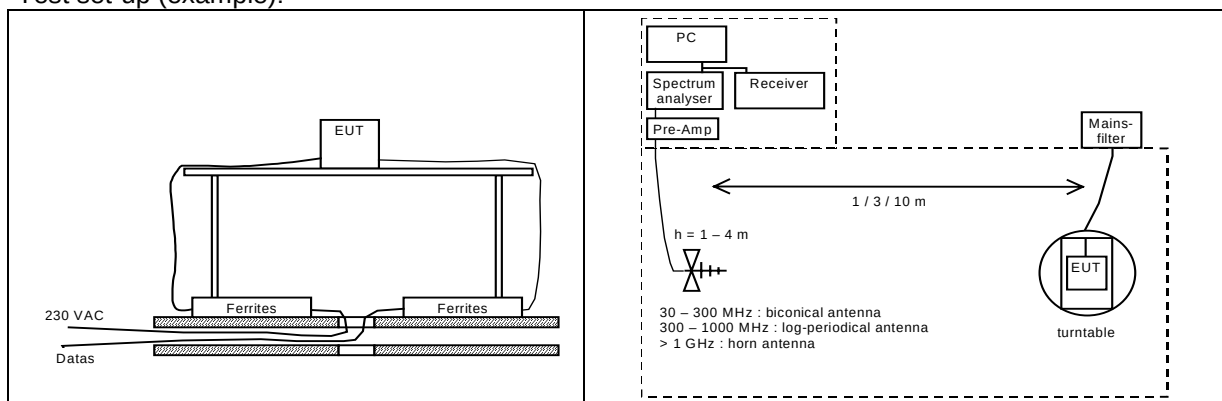

Test equipment:

☒ Spectrum analyser	☐ 88-14	☒ 90-26	☐ 94-24		
☐ Receiver (CISPR 16)	☐ 85-04	☐ 90-43	☐ 94-35		
☒ Preamplifier	☐ 88-05	☒ 90-01	☐ 90-42	☐ 95-86	
☐ Antenna (biconical)	☐ 82-02	☐ 87-05	☐ 87-16	☐ 91-05	☐ 94-37
☐ Antenna (log-per)	☐ 88-20	☐ 90-30	☐ 91-35	☐ 94-64	☐
☒ Antenna (bilog)	☒ 94-03	☐			
☐ Antenna (horn)	☐ 90-24	☐ 90-29	☐ 98-12	☐ 98-13	☐
☒ Printer	☒ 99-33	☐			
☐					


Results: ☒ complies ☐ does not comply ☐ not applicable ☐ not done

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0-360°
Antenna Height : 1-4 m
Equipment Under Test : WR 300/303
Set-Up : s. photo
Operating Conditions : sweeping
Remarks :



montena
montena emc sa

7.4

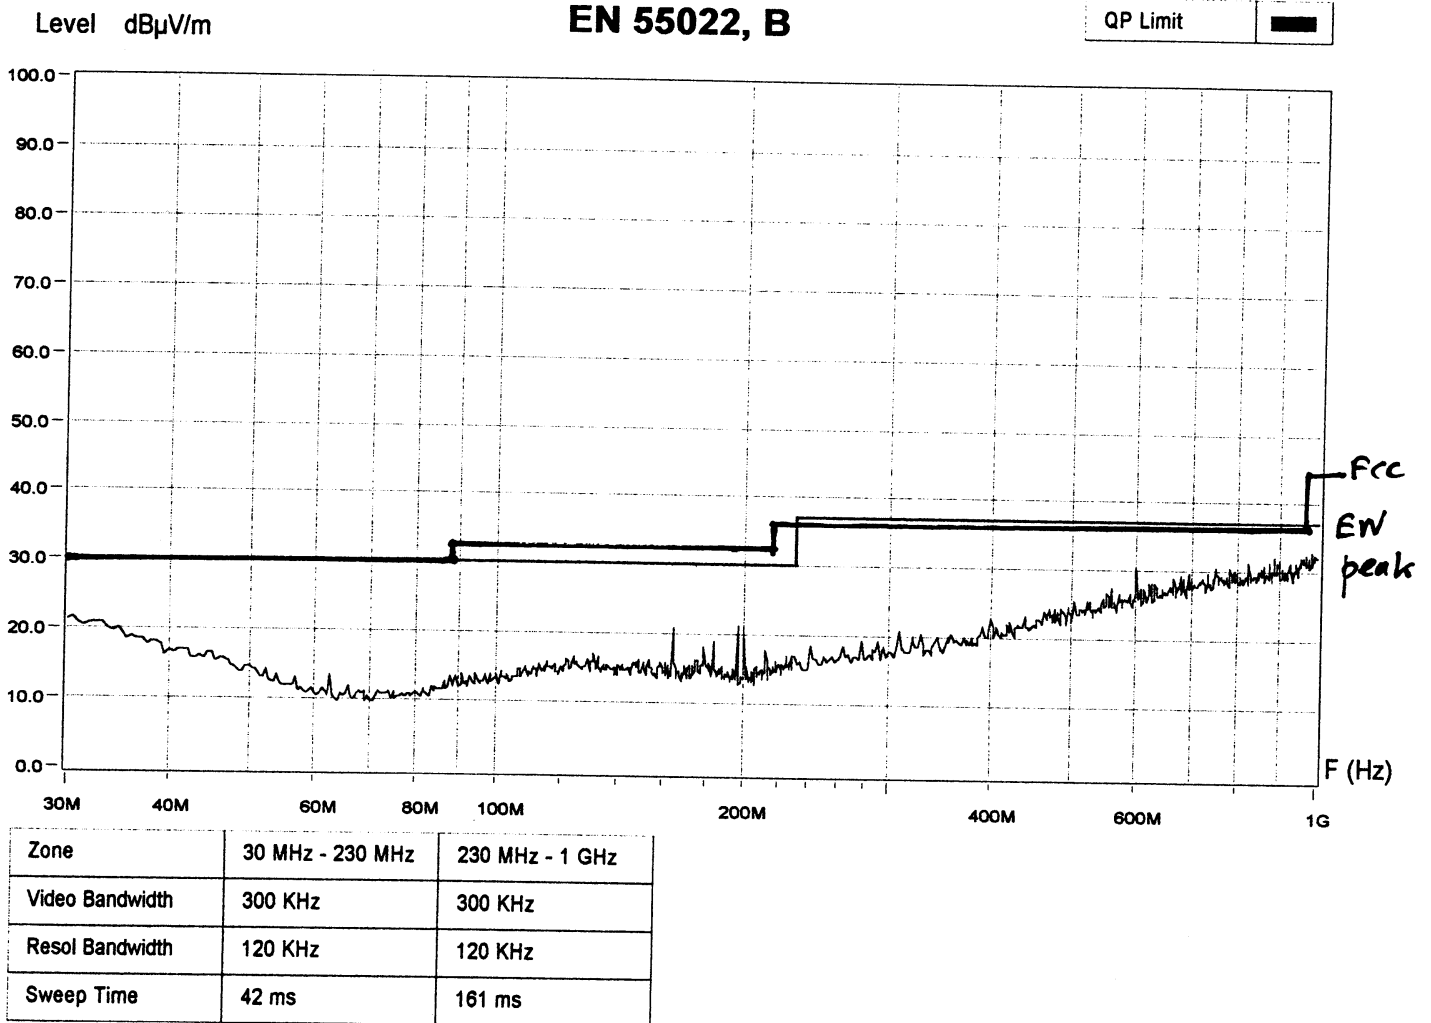

Operator : Ding

12.01.2001

17.28 h

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0-360°
Antenna Height : 1-4 m



montena
montena emc sa


7.5

Equipment Under Test : WR 300/303
Set-Up : s. photo
Operating Conditions : sweeping
Remarks :

Level dB μ V/m

EN 55022, B

QP Limit

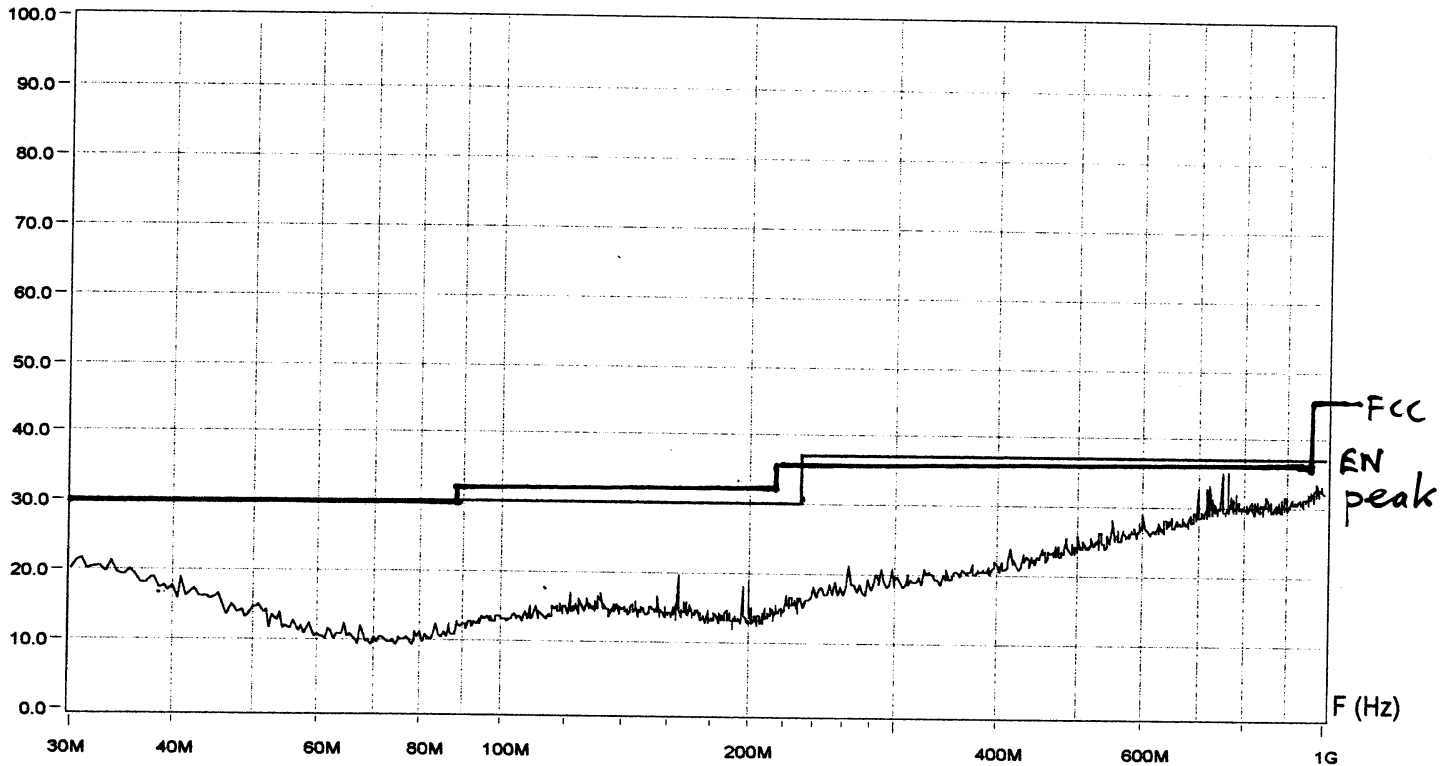

Zone	30 MHz - 230 MHz	230 MHz - 1 GHz
Video Bandwidth	300 KHz	300 KHz
Resol Bandwidth	120 KHz	120 KHz
Sweep Time	42 ms	161 ms

Operator : Ding

12.01.2001

17.34 h



Radiated electromagnetic field

Standard: United States: 47 CFR "Code of Federal Regulations" - Telecommunication
☐ FCC Part 15, Subpart B: Unintentional Radiators
☒ FCC Part 15, Subpart C: Intentional Radiators
☐ class A ☐ class B §15.33 frequency range of radiated meas.:
 from MHz to MHz
☒ §15.209 ☒ §15.249

Distance: ☐ 30 m ☐ 10 m ☒ 3 m ☐


Test site: ☒ anechoic chamber (foam) ☐ open test site
☐ anechoic chamber (ferrite) ☐

Test precision: ± 4.6 dB

Position of EUT: 0.8 m (Height of equipment under test above floor)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and an antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbance appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding the limits are remeasured manually giving quasi-peak values and average values using a receiver and these measurements are indicated under the graph. The limit must be respected in quasi-peak values (QP) up to 1 GHz and in average values (AV) above 1 GHz. The 6 dB bandwidth of the spectrum analyser is adjusted to 100 kHz from 30 to 1000 MHz and 1 MHz above 1 GHz.

Test set-up (example):

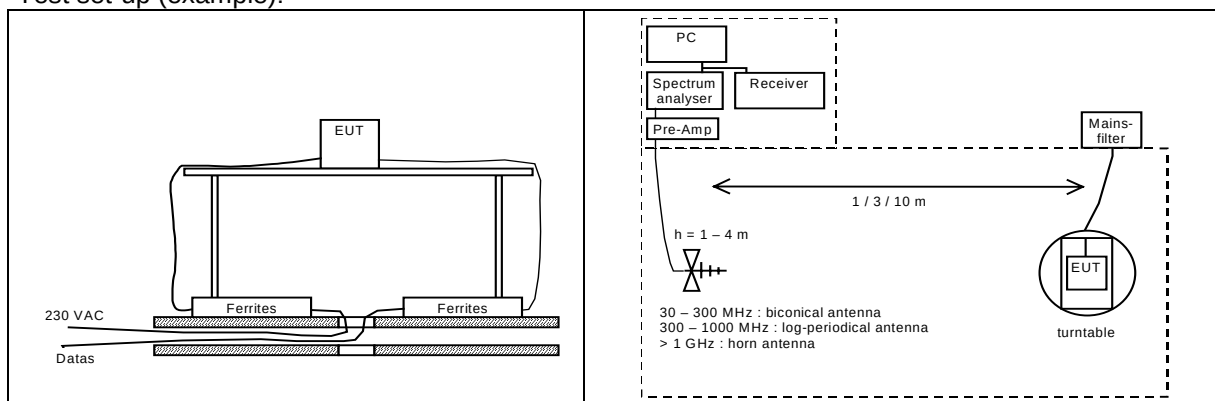


Test equipment:

☒ Spectrum analyser	☒ 88-14	☐ 90-26	☐ 94-24		
☐ Receiver (CISPR 16)	☐ 85-04	☐ 90-43	☐ 94-35		
☒ Preamplifier	☐ 88-05	☐ 90-01	☐ 90-42	☒ 97-08	
☐ Antenna (biconical)	☐ 82-02	☐ 87-05	☐ 87-16	☐ 91-05	☐ 94-37
☐ Antenna (log-per)	☐ 88-20	☐ 90-30	☐ 91-35	☐ 94-64	☐
☐ Antenna (bilog)	☐ 94-03	☐			
☒ Antenna (horn)	☒ 90-24	☐ 90-29	☐ 98-12	☐ 98-13	☐
☒ Printer	☐ 99-33	☒ 92-30			
☐					

Results: ☒ complies ☐ does not comply ☐ not applicable ☐ not done

7.7

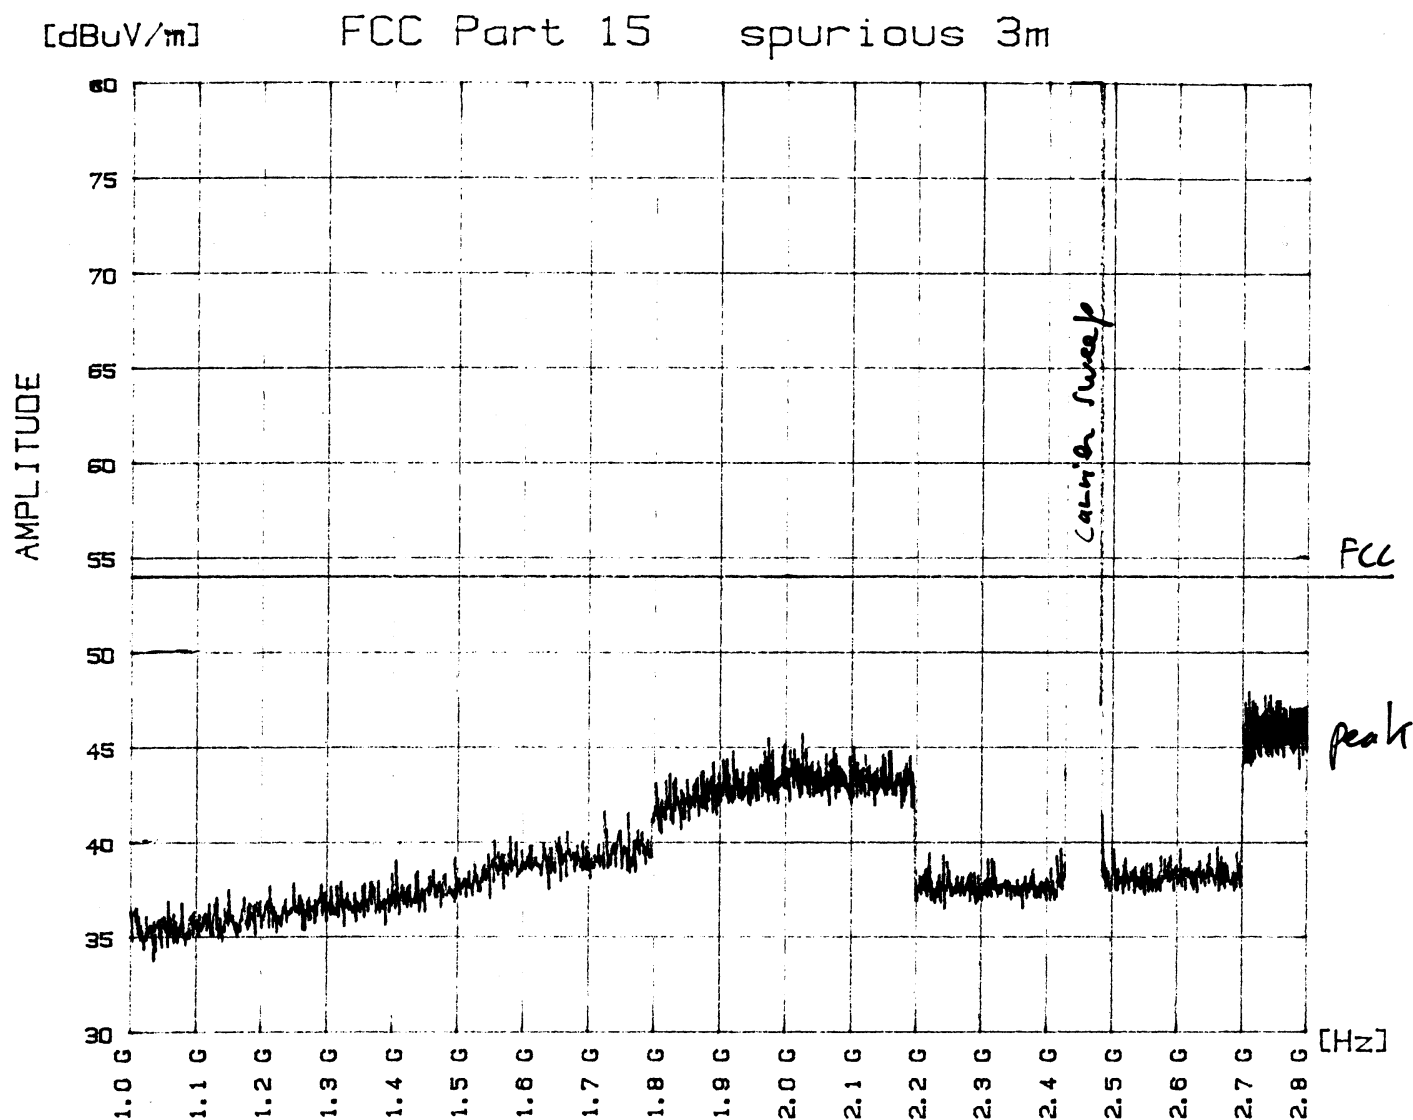

Type of measurement
Mesure effectuée : radiated field

Equipment under test
Appareil mesuré : WR303 / WR300


Set-up
Configuration : 1 photo

Operating conditions
Fonctionnement : sweeping

Remarks
Remarques : vertical pol.

Date/Date : 2001-1-15
Time/Heure : 12:12
Operator/Collaborateur : D. Ding

7.8

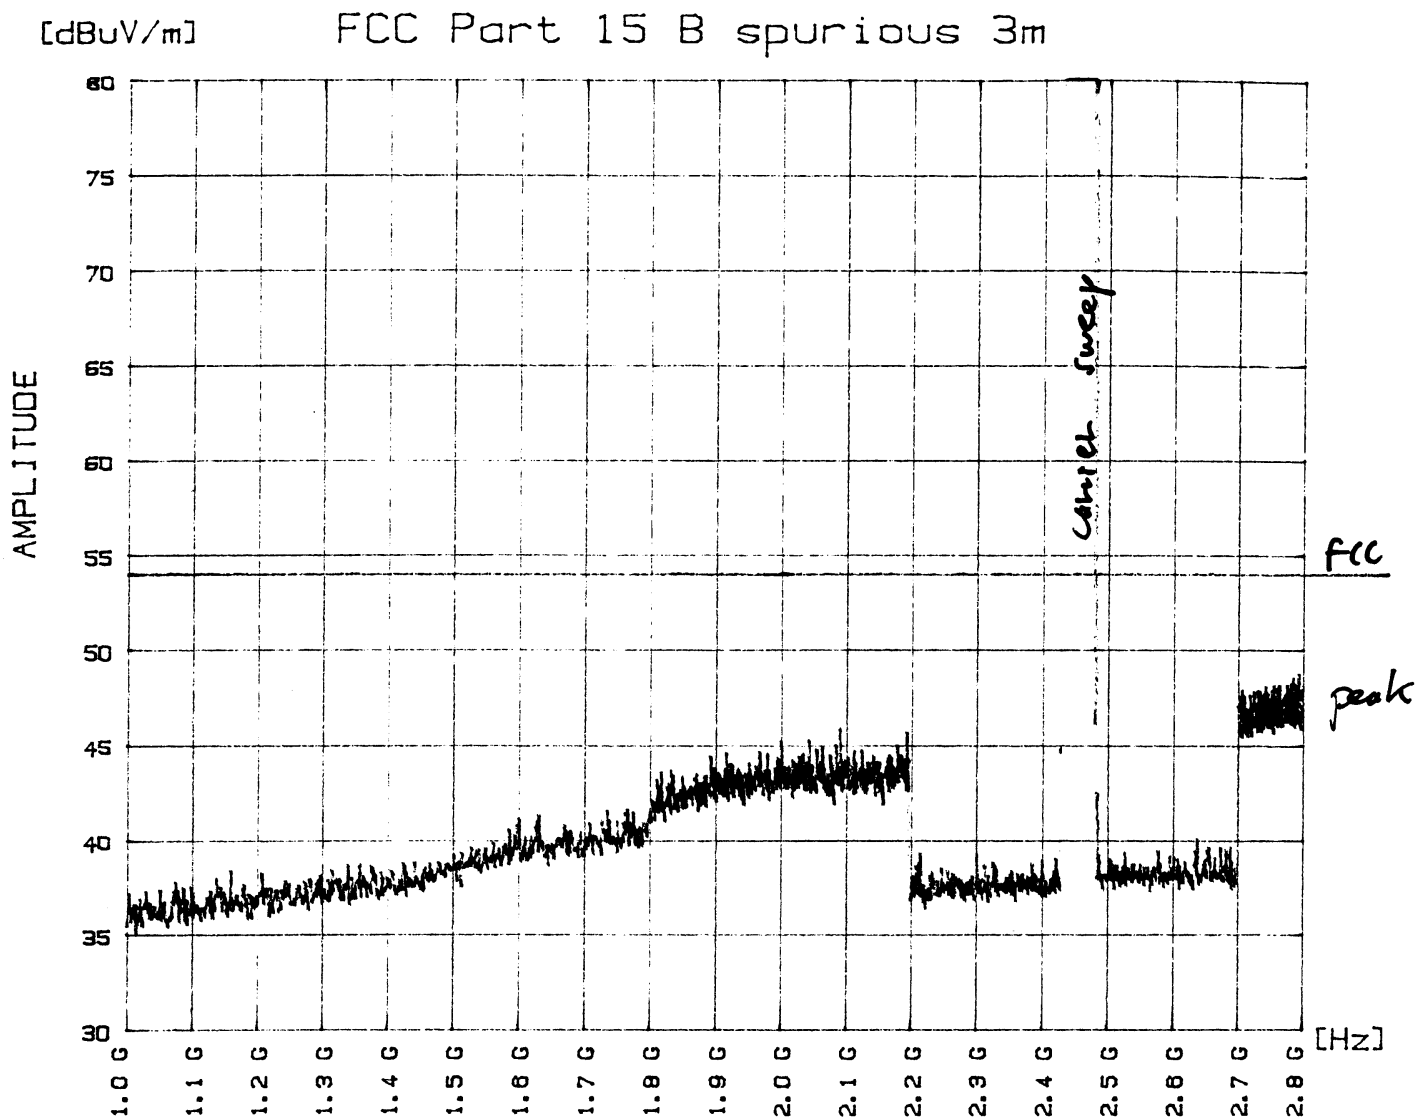

Type of measurement

Mesure effectuée : radiated field

Equipment under test

Appareil mesuré : W12303/ 300

Set-up

Configuration : 5 phas

Operating conditions

Fonctionnement : sweeping

Remarks

Remarques : horizontal pol.

Date/Date

Time/Heure

Operator/Collaborateur

: 2001-1-15: J. Riny



Radiated electromagnetic field

Standard: United States: 47 CFR "Code of Federal Regulations" - Telecommunication
☐ FCC Part 15, Subpart B: Unintentional Radiators
☒ FCC Part 15, Subpart C: Intentional Radiators
☐ class A ☐ class B §15.33 frequency range of radiated meas.:
 from MHz to MHz
☒ §15.209 ☐ §15.249

Distance: ☐ 30 m ☐ 10 m ☒ 3 m ☐


Test site: ☒ anechoic chamber (foam) ☐ open test site
☐ anechoic chamber (ferrite) ☐

Test precision: ± 4.6 dB

Position of EUT: 0.8 m (Height of equipment under test above floor)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and an antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbance appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding the limits are remeasured manually giving quasi-peak values and average values using a receiver and these measurements are indicated under the graph. The limit must be respected in quasi-peak values (QP) up to 1 GHz and in average values (AV) above 1 GHz. The 6 dB bandwidth of the spectrum analyser is adjusted to 100 kHz from 30 to 1000 MHz and 1 MHz above 1 GHz.

Test set-up (example):

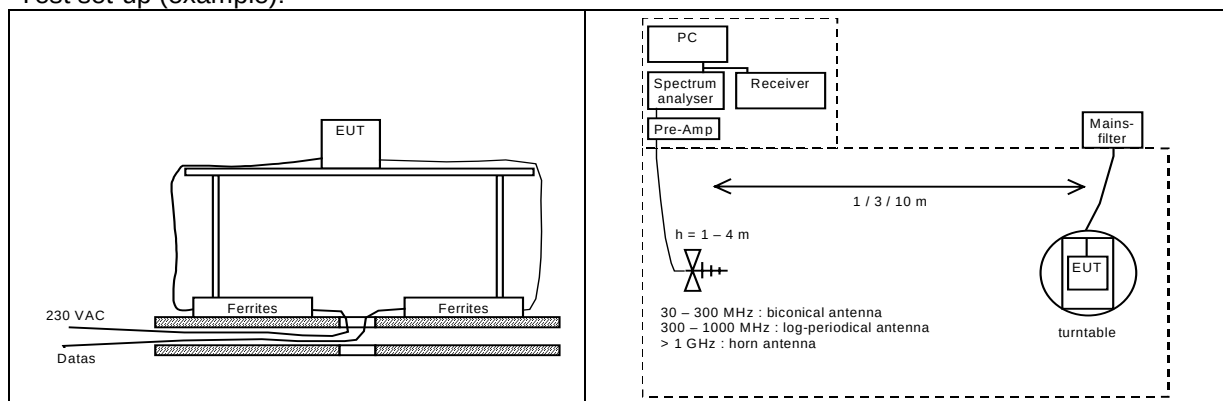


Test equipment:

☒ Spectrum analyser	☒ 88-14	☐ 90-26	☐ 94-24		
☐ Receiver (CISPR 16)	☐ 85-04	☐ 90-43	☐ 94-35		
☒ Preamplifier	☐ 88-05	☐ 90-01	☐ 90-42	☐ 92-39	
☐ Antenna (biconical)	☐ 82-02	☐ 87-05	☐ 87-16	☐ 91-05	☐ 94-37
☐ Antenna (log-per)	☐ 88-20	☐ 90-30	☐ 91-35	☐ 94-64	☐
☐ Antenna (bilog)	☐ 94-03	☐			
☒ Antenna (horn)	☒ 90-24	☐ 90-29	☐ 98-12	☐ 98-13	☐
☒ Printer	☐ 99-33	☐ 92-30			
☐					

Results: ☒ complies ☐ does not comply ☐ not applicable ☐ not done

7.10

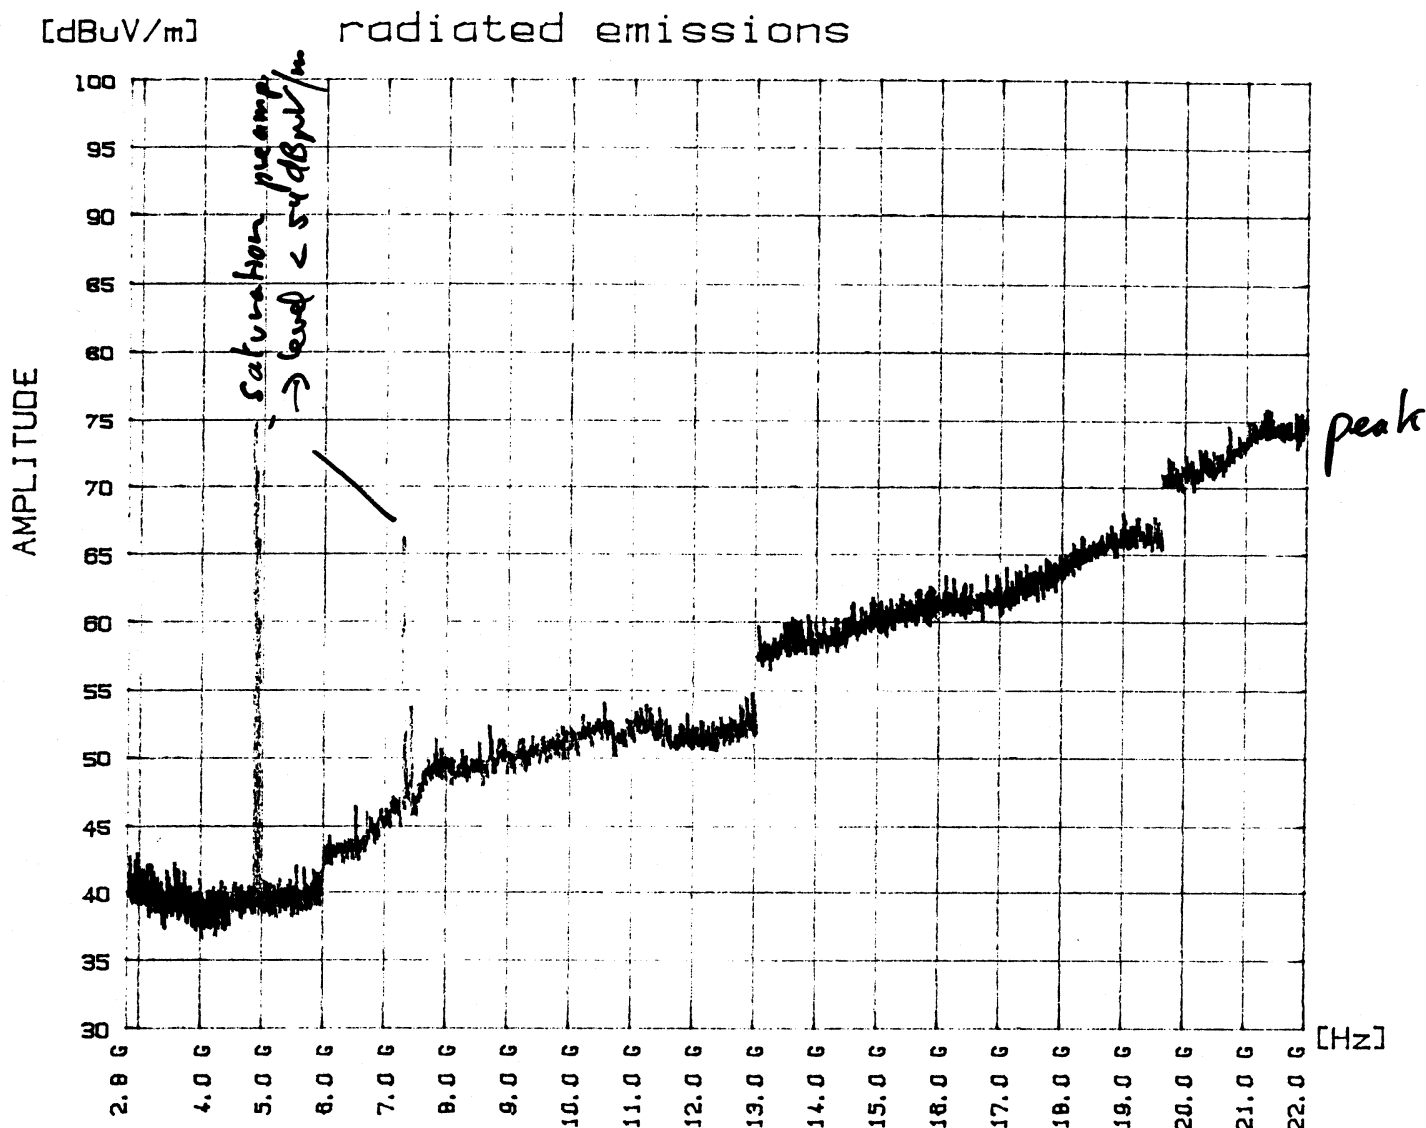

Type of measurement
Mesure effectuée : radiated field

Equipment under test
Appareil mesuré : 025-W


Set-up
Configuration :

Operating conditions
Fonctionnement : sweeping

Remarks
Remarques : 3m Vertical with preamp.

Date/Date : 2001-1-12
Time/Heure :
Operator/Collaborateur : D. Ring

7.11

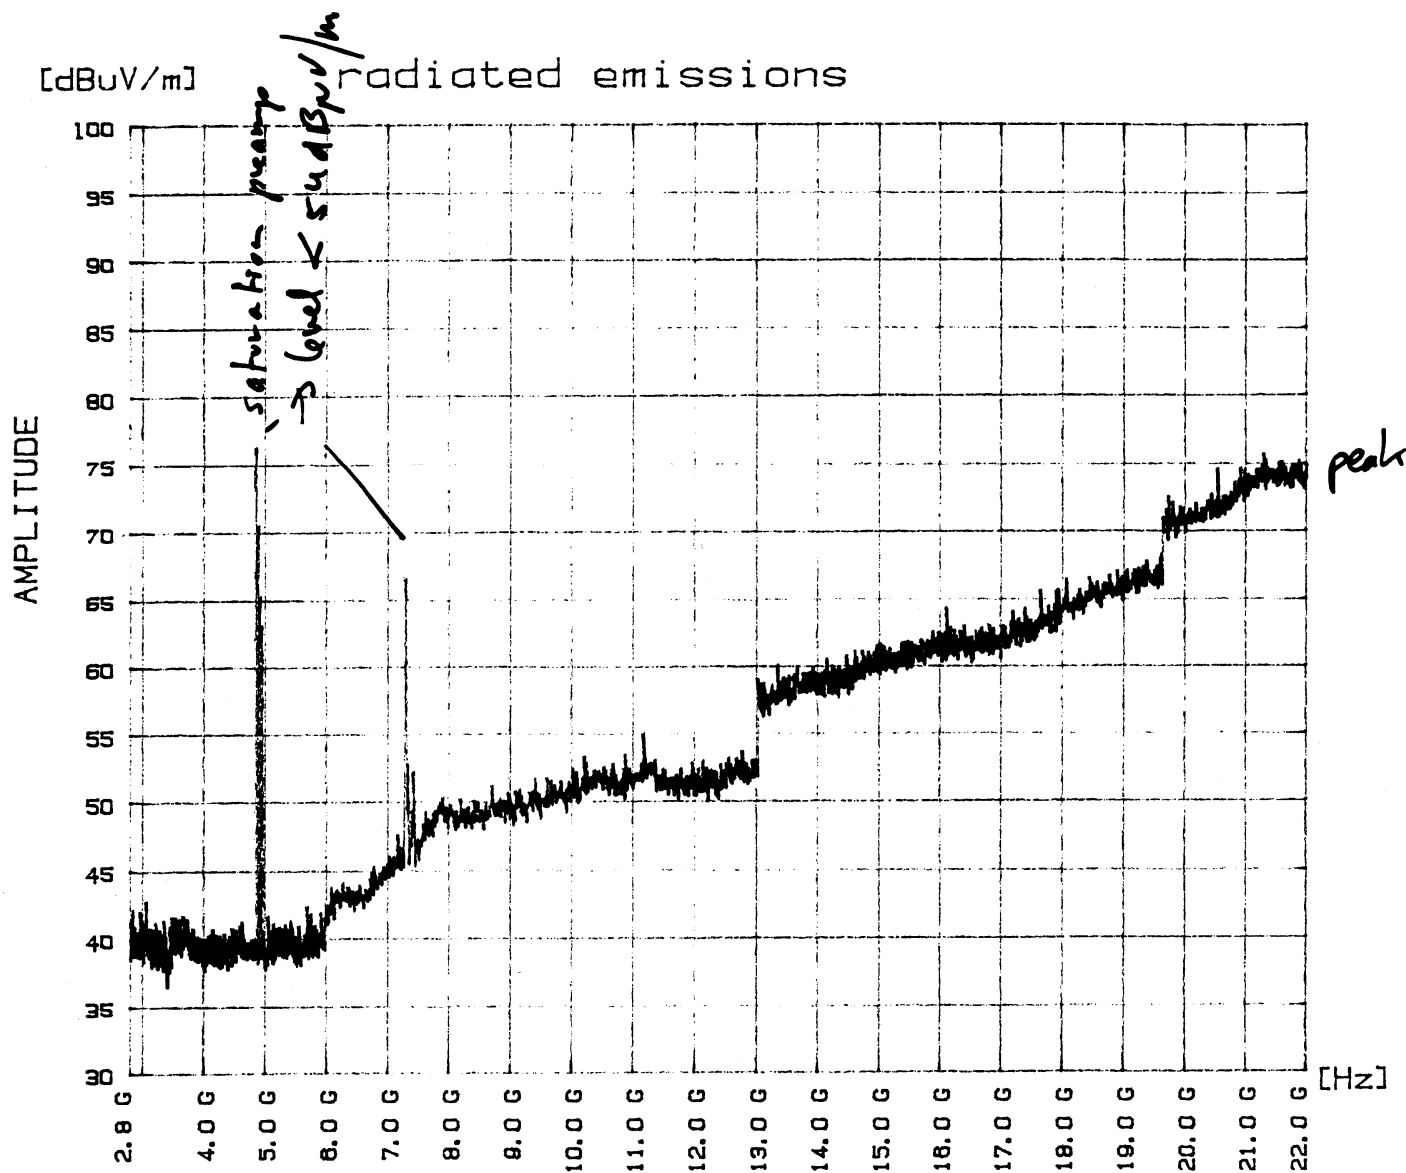

Type of measurement
Mesure effectuée : radiated field

Equipment under test
Appareil mesuré : OIS-W 300/303


Set-up
Configuration : S. photo

Operating conditions
Fonctionnement : sweeping

Remarks
Remarques : 3 m. horizontal with preamp.


Date/Date : 2001-1-12
Time/Heure :
Operator/Collaborateur : S. Ring

*ATTEN 0dB MKR 89.67dBμV
RL 97.0dBμV 10dB/ 2.4365GHz

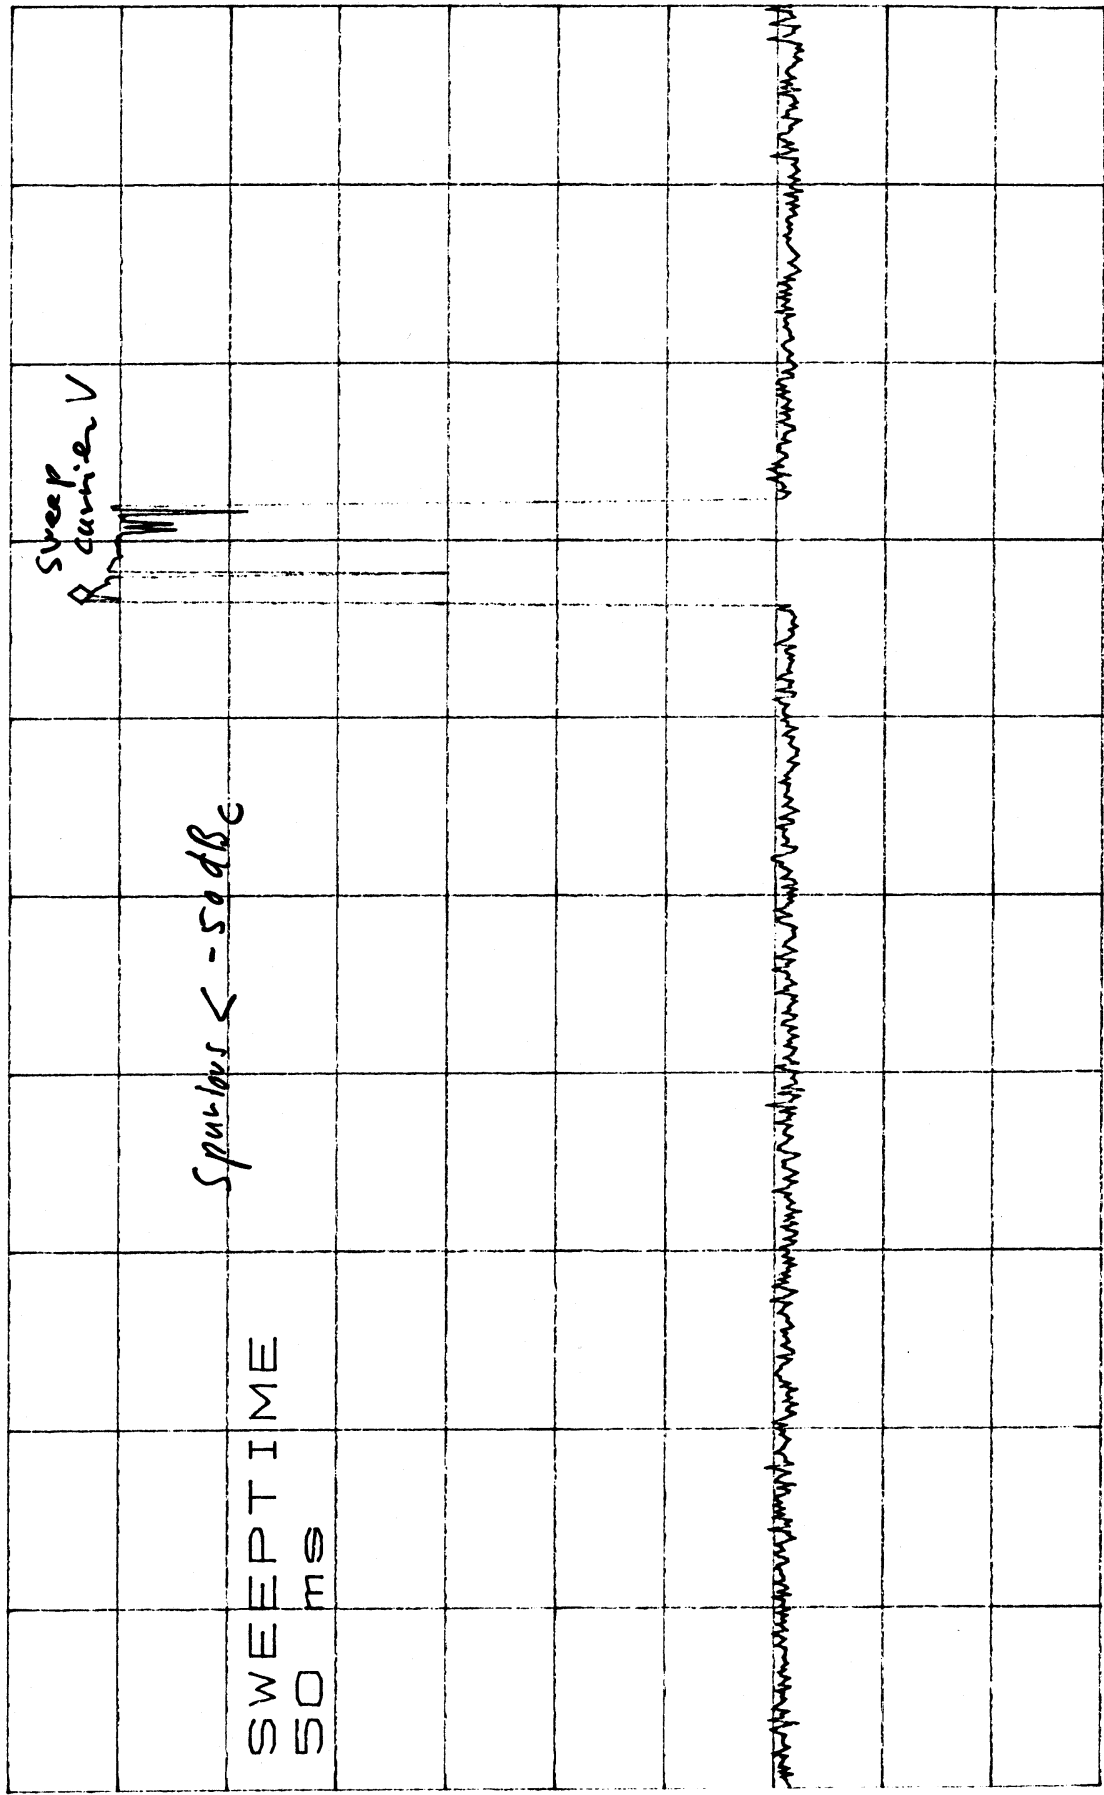

START 1.8000GHz STOP 2.7500GHz
*RBW 300kHz VBW 300kHz SWP 50ms

*ATTEN 0dB MKR 35.00dBμV V
 RL 97.0dBμV 10dB/ 17.44GHz

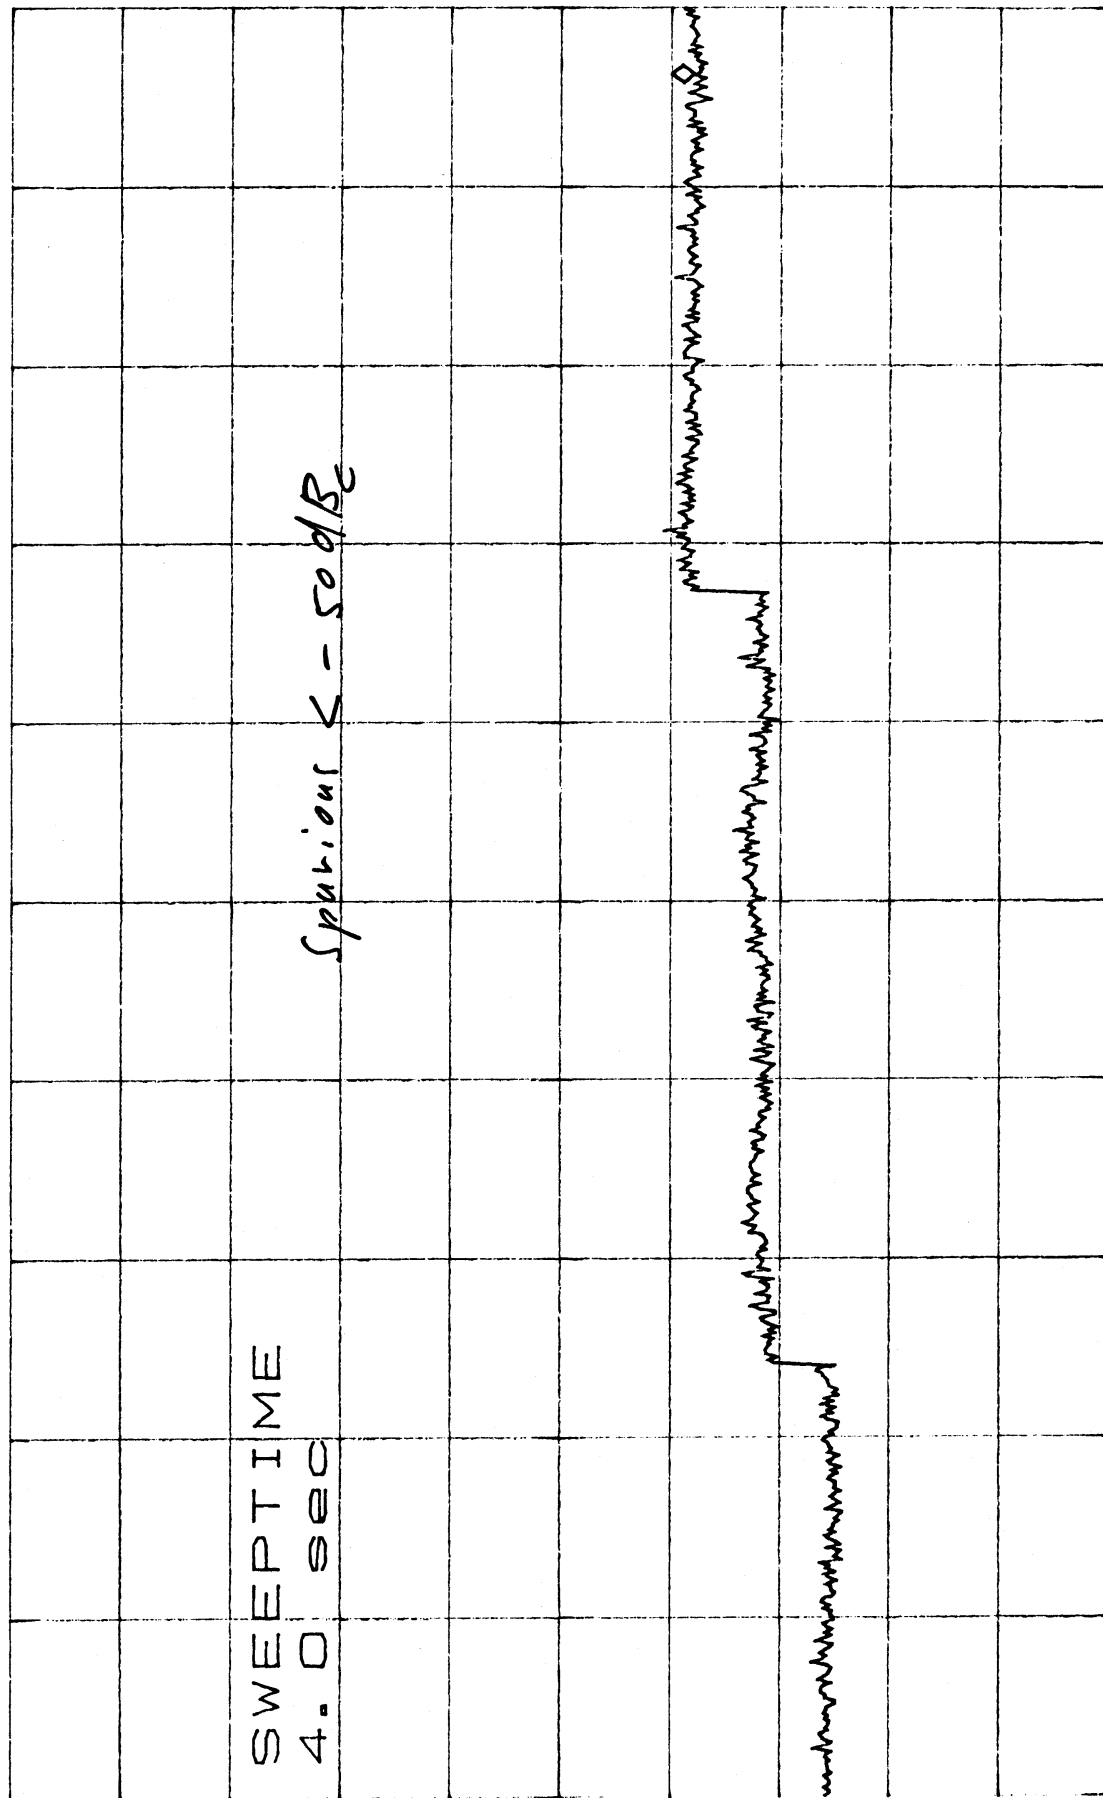

START 2.75GHz STOP 18.00GHz
 *RBW 100kHz VBW 100kHz SWP 4.0sec

*ATTEN 0dB


MKR 39.00dBμV

RL 97.0dBμV

10dB/

21.853GHz

V

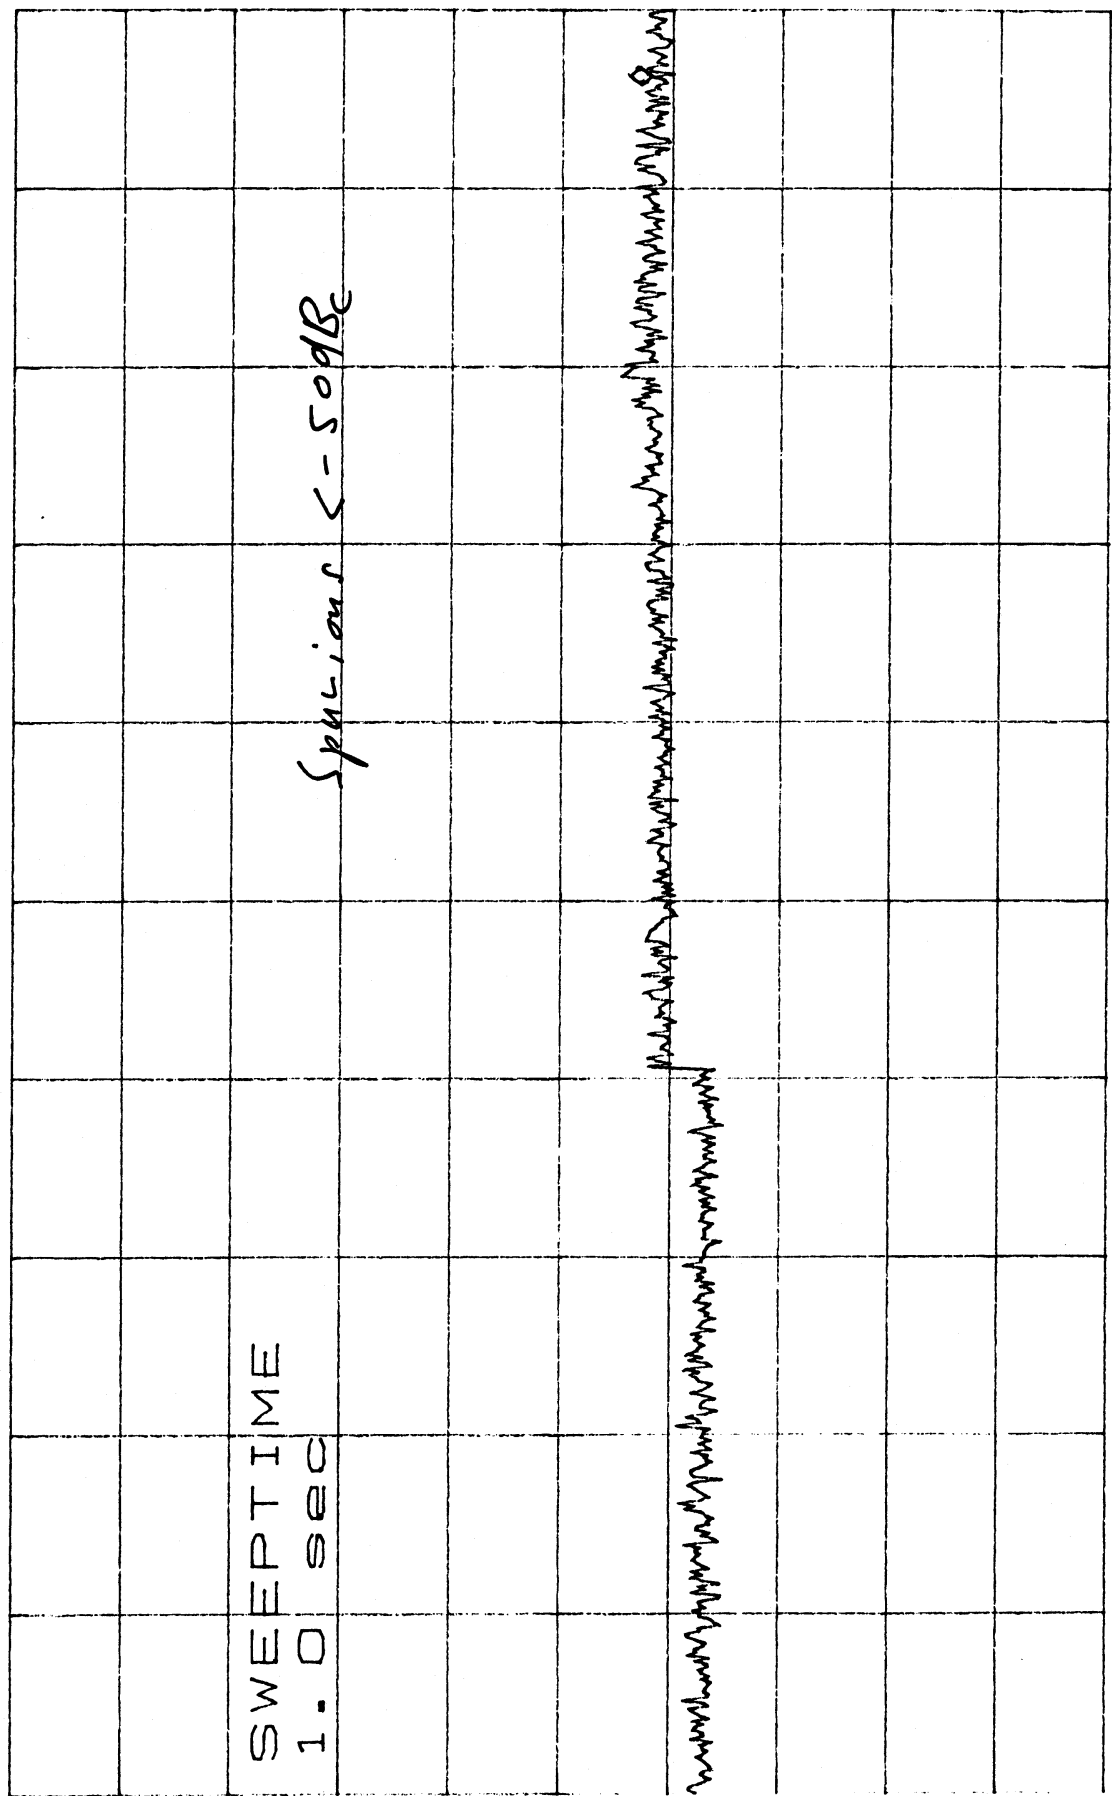

START 18.000GHz


STOP 22.000GHz

*RBW 100kHz

VBW 100kHz

SWP 1.0sec


*ATTEN 0dB MKR 91.67dBμV A
 RL 97.0dBμV 2.4333GHz 10dB/

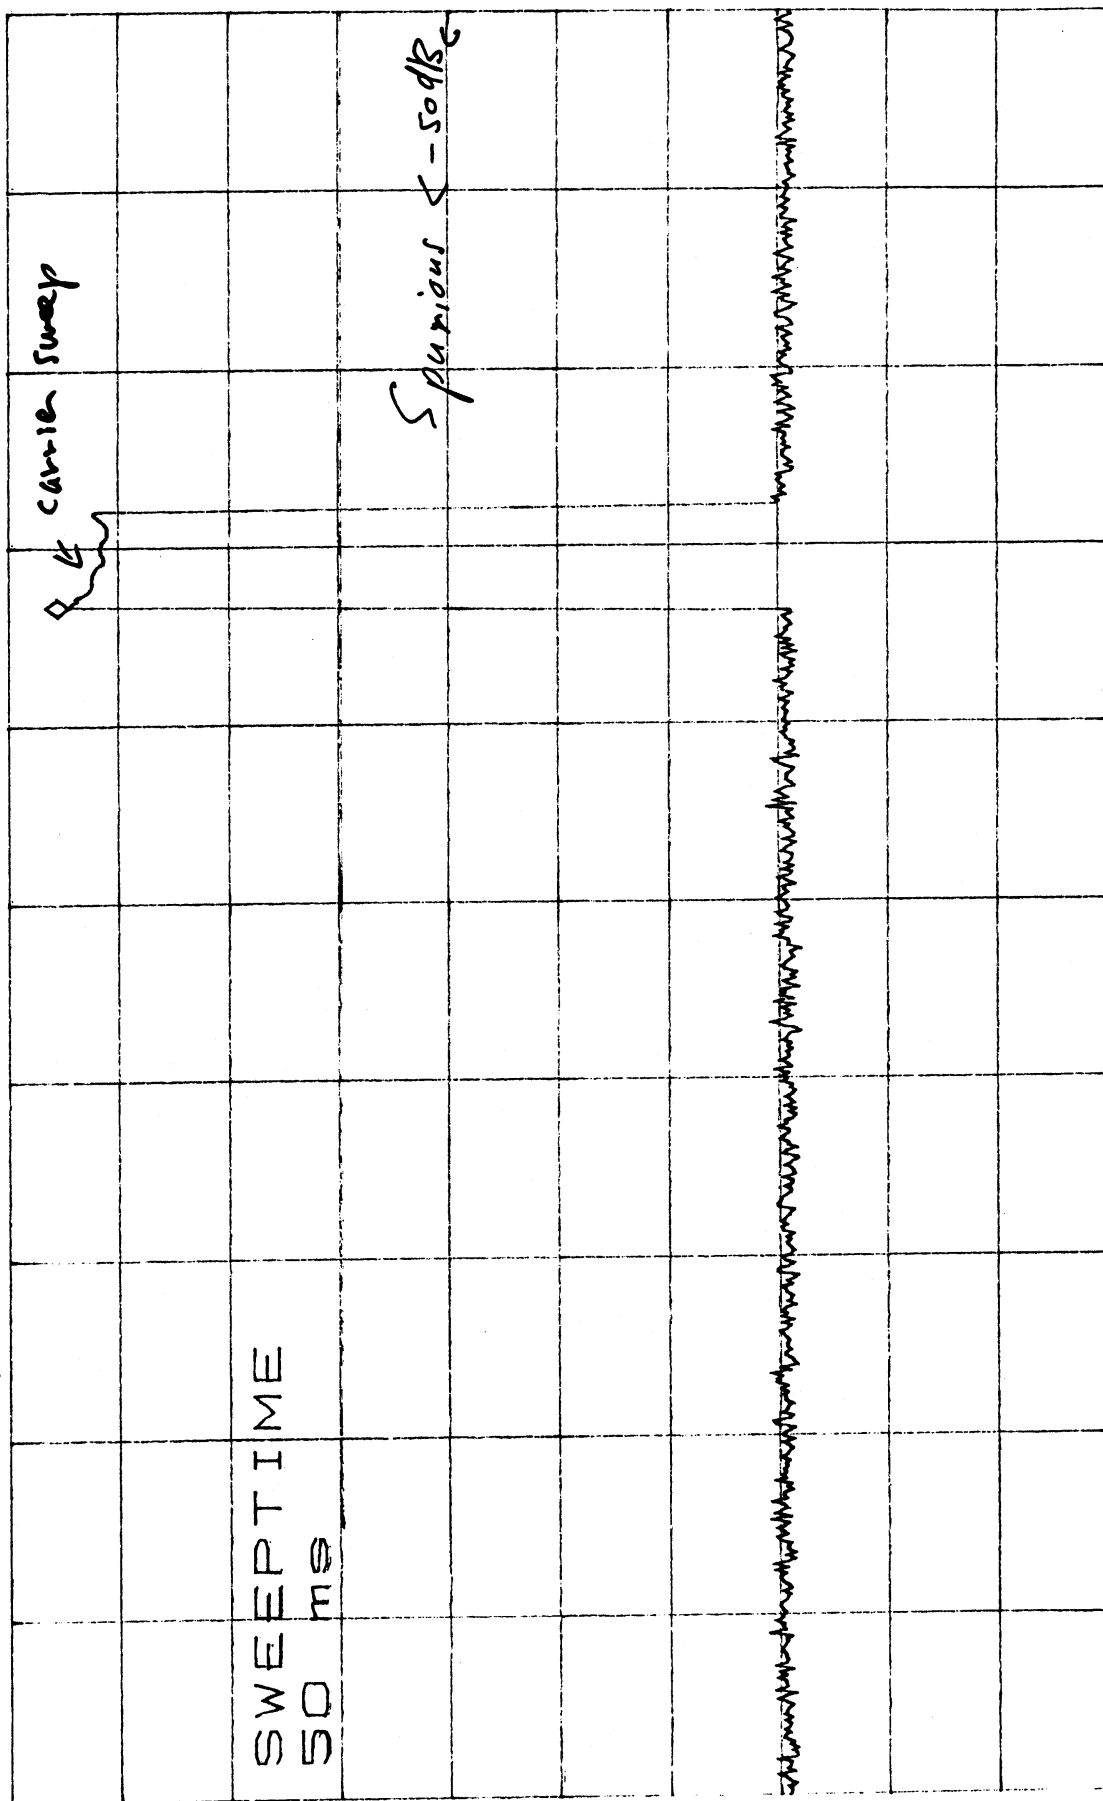

D S

START 1.8000GHz STOP 2.7500GHz
 *RBW 300kHz VBW 300kHz SWP 50ms


*ATTEN 0dB MKR 38.83dB μ V H
RL 97.0dB μ V 17.44GHz

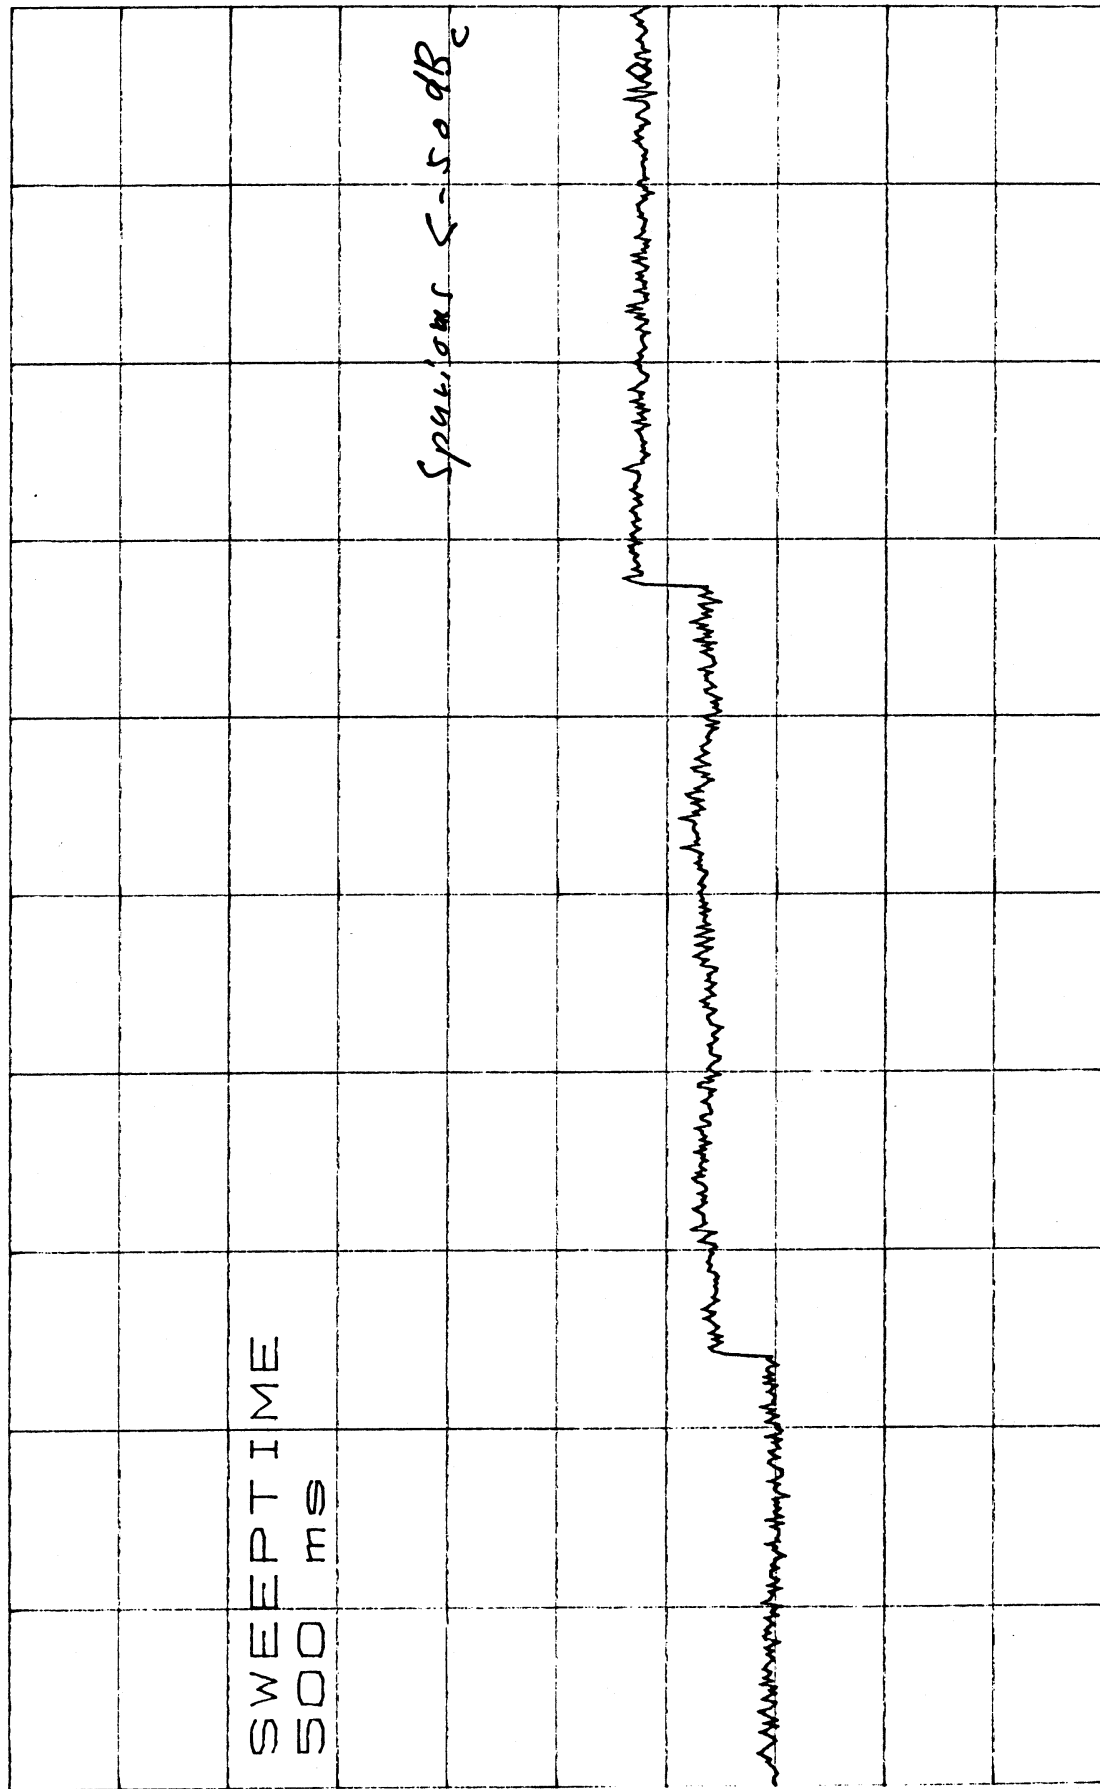

D S

START 2.75GHz STOP 18.00GHz
*RBW 300kHz VBW 300kHz SWP 500ms

*ATTEN 0dB MKR 39.17dBμV
 RL 97.0dBμV 10dB/ 21.853GHz H

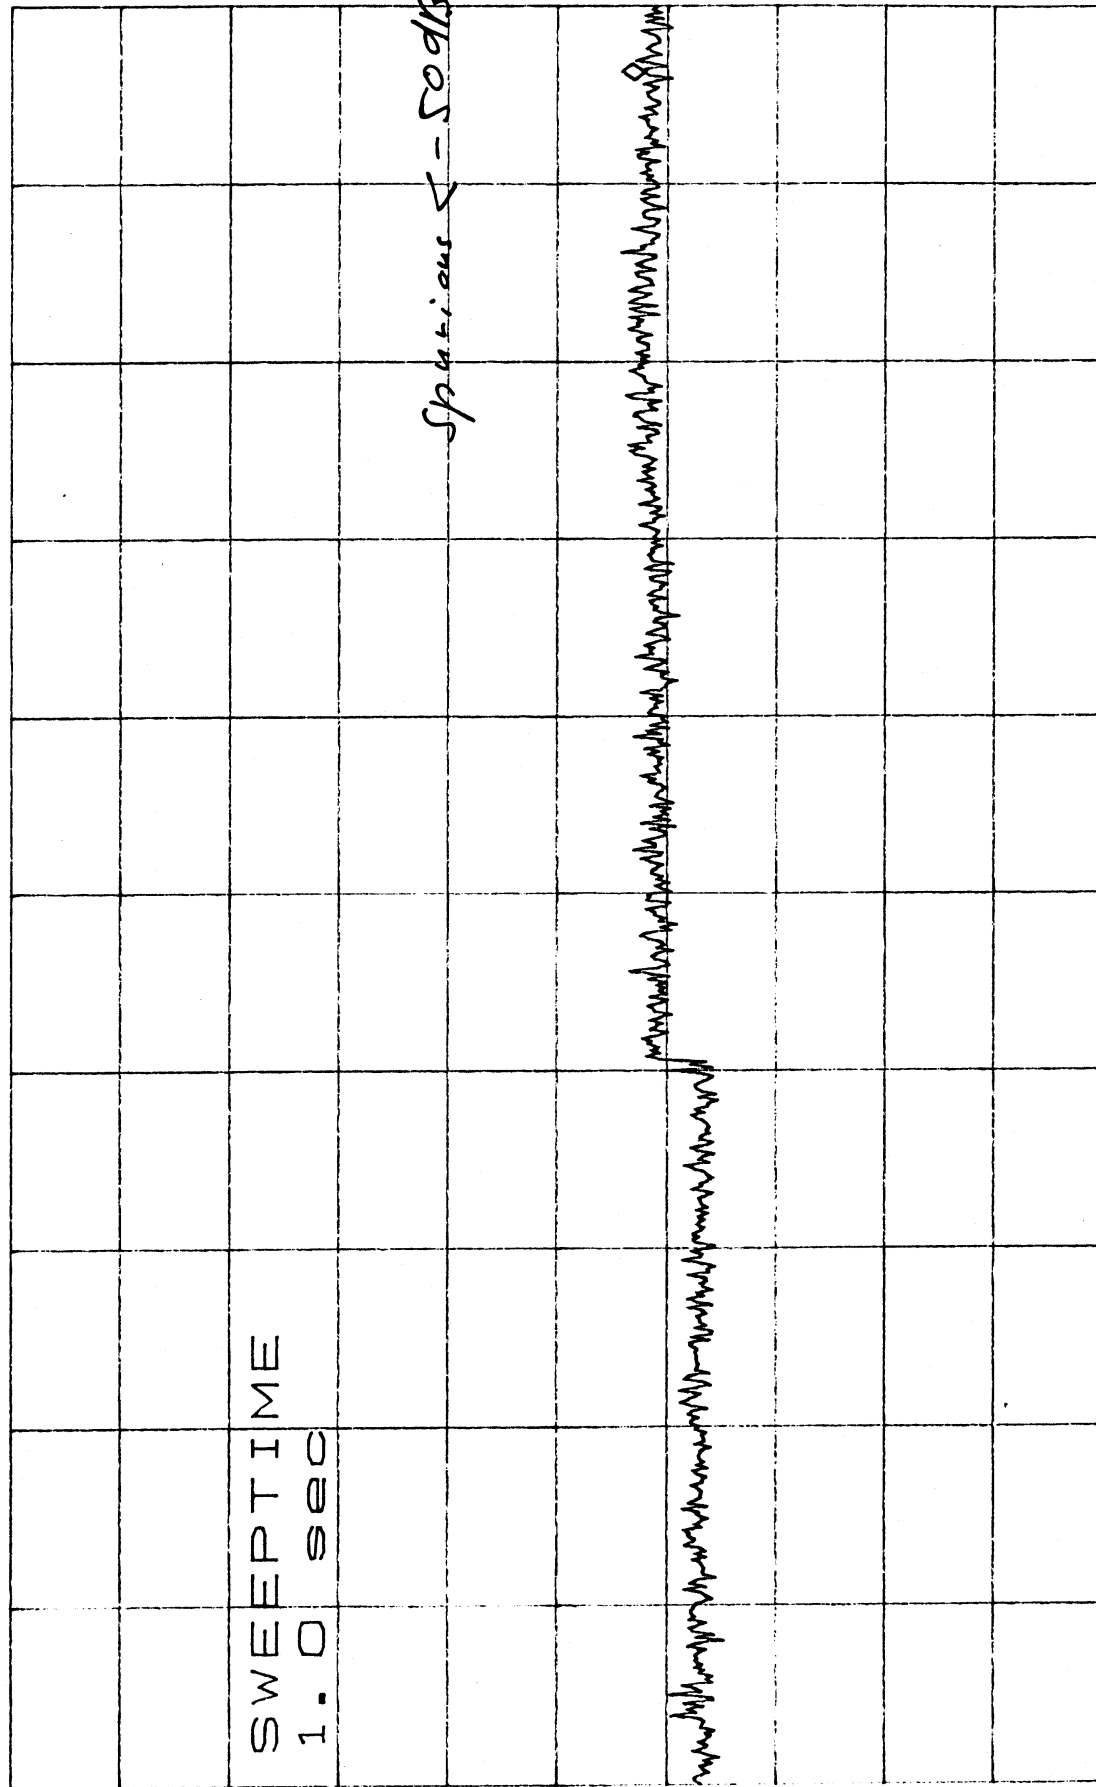

□ S

START 18.000GHz STOP 22.000GHz
 *RBW 100kHz VBW 100kHz SWP 1.0sec



Photo 1

Measurement of radiated field
(9 kHz...30 MHz)



Photo 2

Measurement of radiate field
($f > 2.5$ GHz)

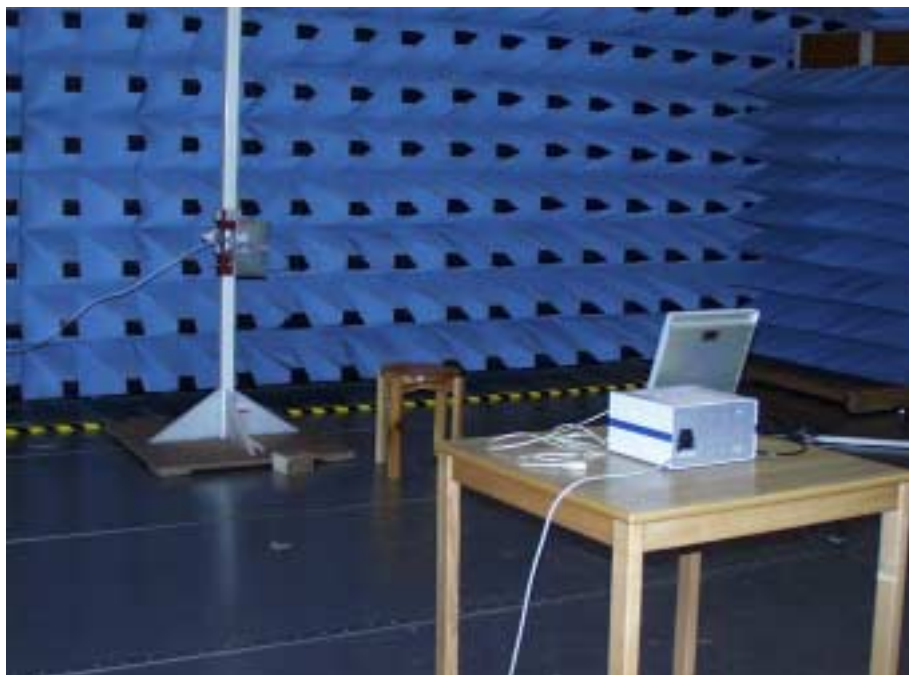


Photo 3

Measurement of radiated field
($1 \text{ GHz} < f < 2.5 \text{ GHz}$)



Photo 4

Measurement of radiate field
(30 MHz < f < 1 GHz)



Photo 5


Measurement of conducted
emissions



23. Nov. 1998

Mean Well Means Quality Switching Power Supplies

善意的標誌。品質的執著

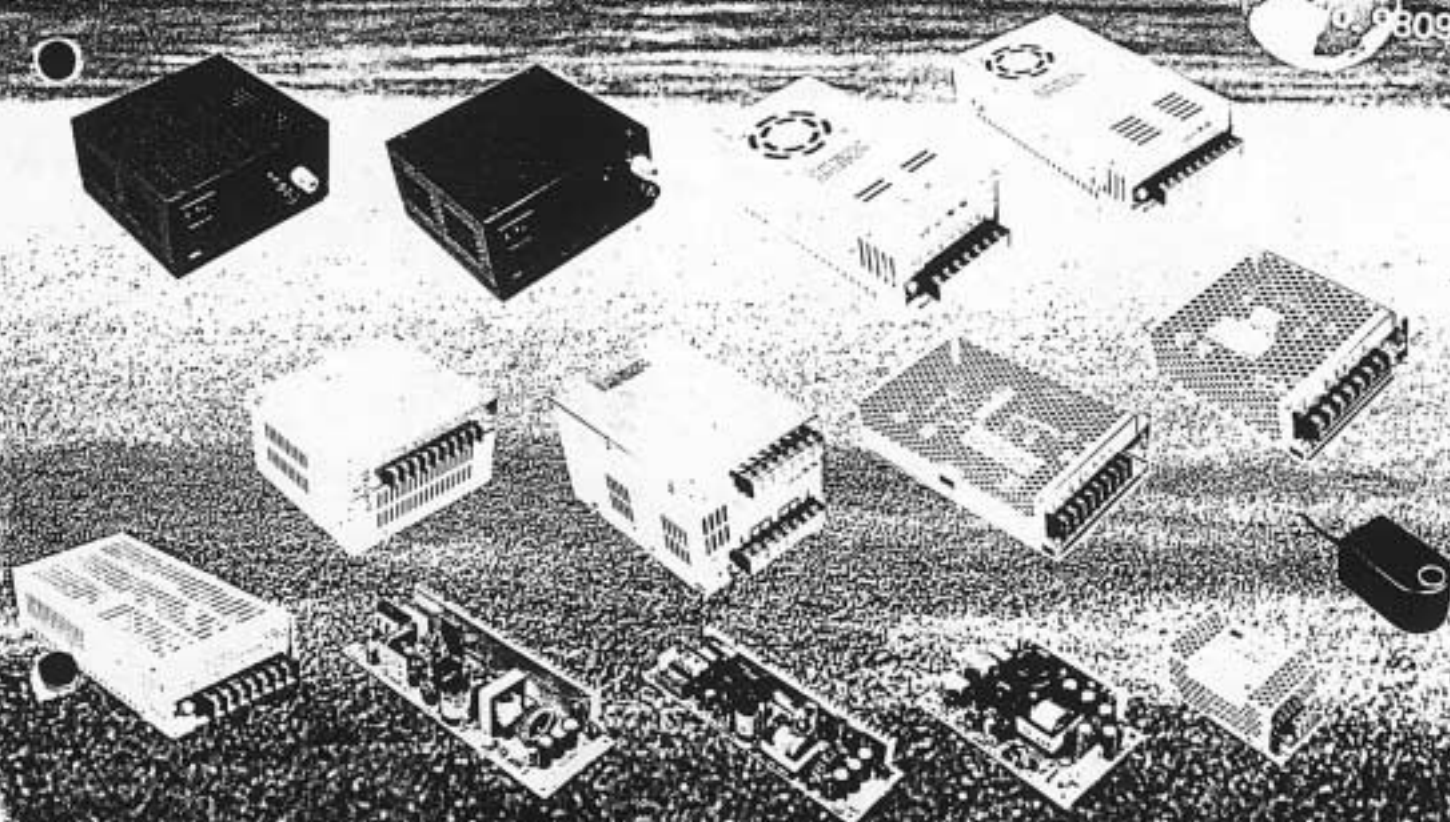




Enclosed Switching Power Supply—Single Output 1

15W Single Output Switching Power Supply

- Low cost, high reliability
- High efficiency, low working temp.
- Built in EMI filter, low ripple noise
- Compact size, light weight
- 100% full load burn-in test
- ISO-9001 certified manufacturer
- Short circuit/ over load protected
- International AC input selected
- 1 year warranty

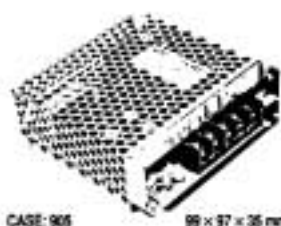

CASE: 905 99 × 97 × 35 mm

Input voltage.....	85—132VAC/ 170—264VAC selected by SW.
Input frequency.....	47-63Hz
Inrush current.....	cold start, 15A/ 115V, 30A/ 230V
Output voltage.....	refer to below table (±10% ADJ.)
Overload protection.....	105%—150% output foldback limiting
Setup, rise, hold up time.....	200ms, 100ms, 30ms
Withstand voltage.....	V/P-O/P: 1.5KV, V/P-FG: 1.5KV, 1min.
Working temp.....	0-50°C @100%, -10°C @80%, 60°C @60%
Safety standards.....	design refer to UL 1012 requirement
EMC standards.....	design refer to FCC part 15 J
Connection.....	5P/ 9.5mm pitch terminal block
Weight.....	0.3kgs
Packing.....	60PCS/ 1.2CUFT

Stock No	Type No	Output	Tol.	R&N	Effi.	P.P.
10001	S-15-5	5V, 3A	±2%	50mV	65%	31
10002	S-15-12	12V, 1.3A	±1%	50mV	68%	31
10003	S-15-24	24V, 0.7A	±1%	50mV	73%	31

25W Single Output Switching Power Supply

- Low cost, high reliability
- High efficiency, low working temp.
- Built in EMI filter, low ripple noise
- Compact size, light weight
- 100% full load burn-in test
- ISO-9001 certified manufacturer
- Short circuit/ over load/ over voltage protected
- Universal AC input/ full range
- Approvals: UL/ TUV/ CE
- 2 years warranty




CASE: 905 99 × 97 × 35 mm

Input voltage.....	85—264VAC universal input
Input frequency.....	47-63Hz
Inrush current.....	cold start, 15A/ 115V, 30A/ 230V
Output voltage.....	refer to below table (±10% ADJ.)
Overload protection.....	105%—150% output pulsing mode
Over voltage protection.....	115%—135% of output voltage
Setup, rise, hold up time.....	800ms, 50ms, 10ms/ 115VAC 300ms, 50ms, 80ms/ 230VAC
Withstand voltage.....	V/P-O/P: 3KV, V/P-FG: 1.5KV, 1min.
Working temp.....	0-50°C @100%, -10°C @80%, 60°C @60%
Safety standards.....	UL 1012, TUV EN60950
EMC standards.....	(EN55022), IEC801-2, 3, 4, IEC555-2
Connection.....	5P/ 9.5mm pitch terminal block
Weight.....	0.37kgs
Packing.....	60PCS/ 1.2CUFT

Stock No	Type No	Output	Tol.	R&N	Effi.	P.P.
10011	S-25-5	5V, 5A	±2%	50mV	73%	50
10012	S-25-12	12V, 2.1A	±1%	100mV	79%	50
10013	S-25-15	15V, 1.7A	±1%	100mV	80%	50
10014	S-25-24	24V, 1.1A	±1%	100mV	83%	50

35W Single Output Switching Power Supply

- Low cost, high reliability
- High efficiency, low working temp.
- Built in EMI filter, low ripple noise
- Compact size, light weight
- 100% full load burn-in test
- ISO-9001 certified manufacturer
- Short circuit/ over load protected
- International AC input selected
- 1 year warranty

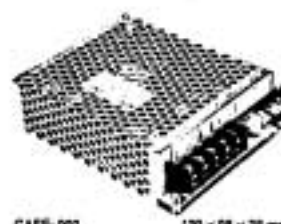

CASE: 903 129 × 98 × 38 mm

Input voltage.....	85—132VAC/ 170—264VAC selected by SW.
Input frequency.....	47-63Hz
Inrush current.....	cold start, 15A/ 115V, 30A/ 230V
Output voltage.....	refer to below table (±10% ADJ.)
Overload protection.....	105%—150% output foldback limiting
Setup, rise, hold up time.....	200ms, 100ms, 30ms
Withstand voltage.....	V/P-O/P: 1.5KV, V/P-FG: 1.5KV, 1min.
Working temp.....	0-50°C @100%, -10°C @80%, 60°C @60%
Safety standards.....	design refer to UL 1012 requirement
EMC standards.....	design refer to FCC part 15 J
Connection.....	5P/ 9.5mm pitch terminal block
Weight.....	0.4kgs
Packing.....	45PCS/ 1.2CUFT

Stock No	Type No	Output	Tol.	R&N	Effi.	P.P.
10021	S-35-5	5V, 7A	±2%	75mV	70%	39
10022	S-35-12	12V, 3A	±1%	100mV	76%	39
10023	S-35-15	15V, 2.4A	±1%	100mV	78%	39
10024	S-35-24	24V, 1.5A	±1%	100mV	78%	39

40W Single Output Switching Power Supply

- Low cost, high reliability
- High efficiency, low working temp.
- Built in EMI filter, low ripple noise
- Compact size, light weight
- 100% full load burn-in test
- ISO-9001 certified manufacturer
- Short circuit/over load/ over voltage protected
- Universal AC input/ full range
- Approvals: UL/ TUV/ CE
- 2 years warranty



CASE: 903 129 × 98 × 38 mm

Input voltage.....	85—264VAC universal input
Input frequency.....	47-63Hz
Inrush current.....	cold start, 25A/ 115V, 50A/ 230V
Output voltage.....	refer to below table (±10% ADJ.)
Overload protection.....	105%—150% output pulsing mode
Over voltage protection.....	115%—135% of output voltage
Setup, rise, hold up time.....	800ms, 50ms, 15ms/ 115VAC 300ms, 50ms, 80ms/ 230VAC
Withstand voltage.....	V/P-O/P: 3KV, V/P-FG: 1.5KV, 1min.
Working temp.....	0-50°C @100%, -10°C @80%, 60°C @60%
Safety standards.....	UL 1012, TUV EN60950
EMC standards.....	(EN55022), IEC801-2, 3, 4, IEC555-2
Connection.....	5P/ 9.5mm pitch terminal block
Weight.....	0.45kgs
Packing.....	45PCS/ 1.2CUFT



Stock No	Type No	Output	Tol.	R&N	Effi.	P.P.
10031	S-40-5	5V, 8A	±2%	75mV	72%	57
10032	S-40-12	12V, 3.5A	±1%	100mV	77%	57
10033	S-40-15	15V, 2.8A	±1%	100mV	77%	57
10034	S-40-24	24V, 1.8A	±1%	100mV	79%	57



We are an ISO-9001 certified company since 1994.



Quality Control Procedure


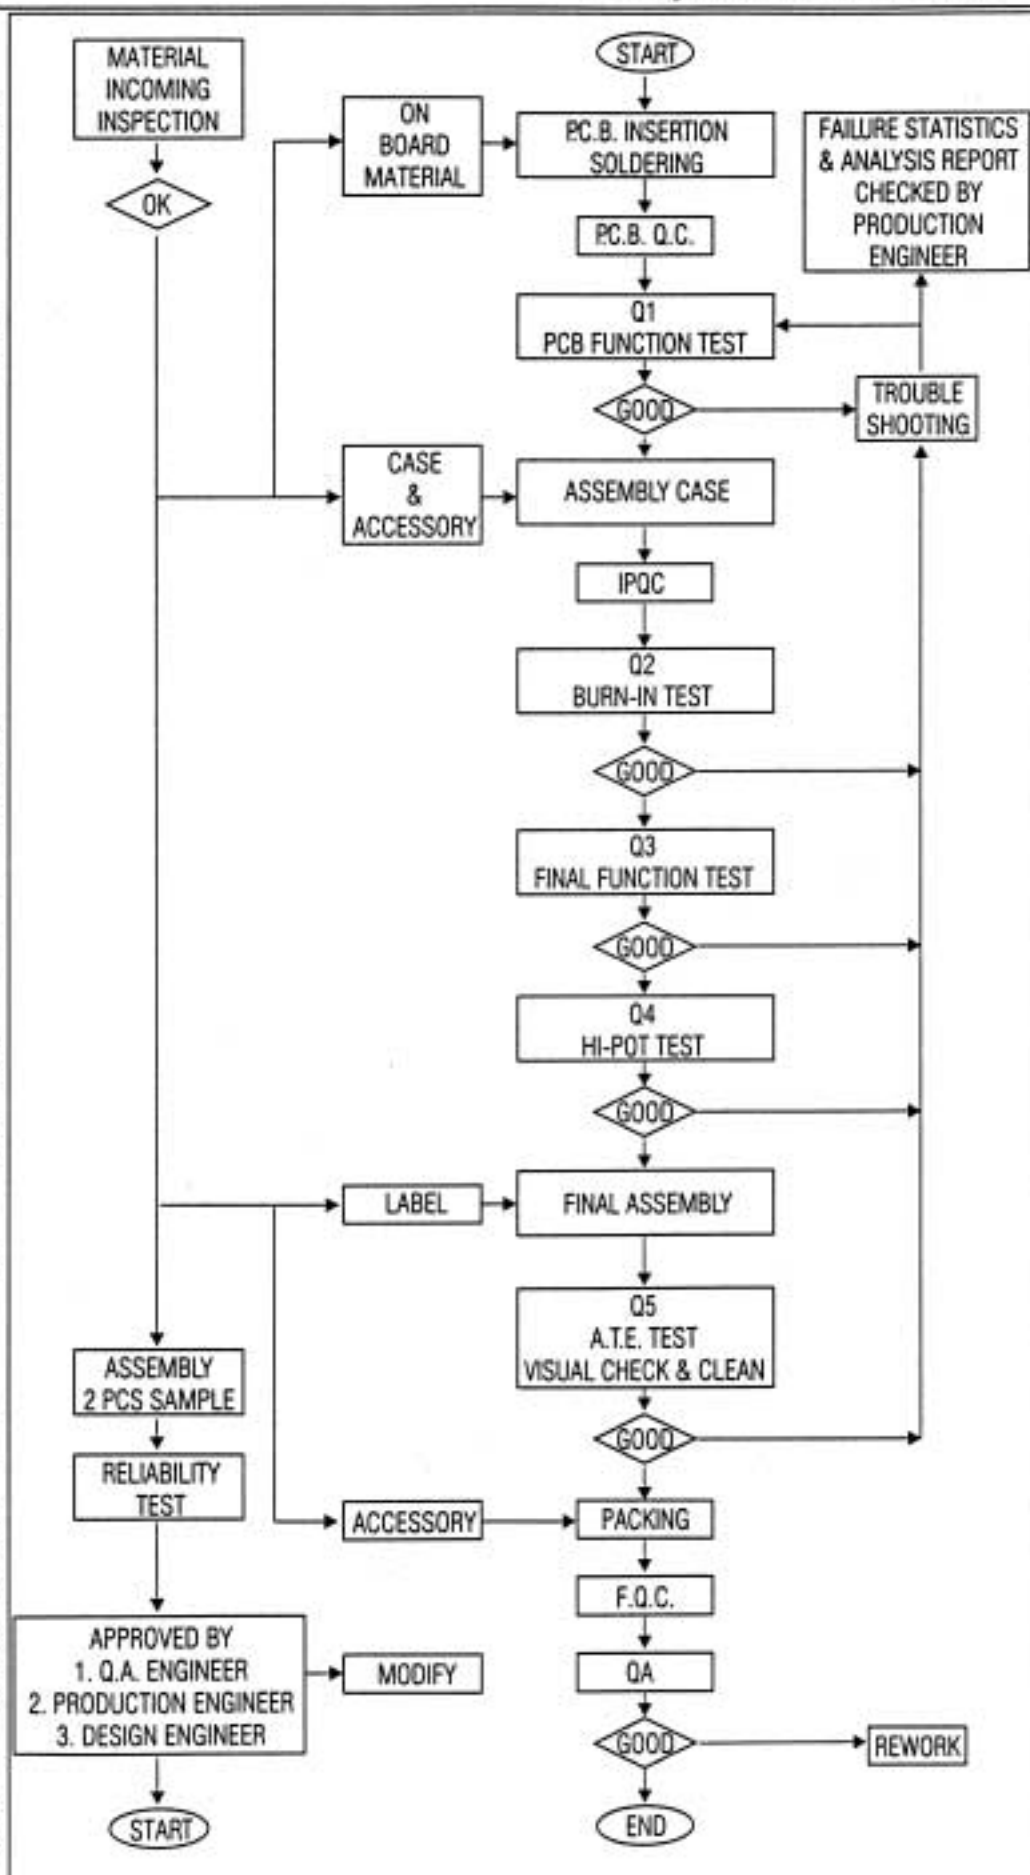
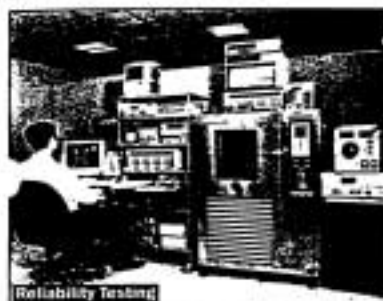


All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization.

Alle Rechte vorbehalten. Weitergabe sowie Vervielfältigung dieser Unterlagen, Vervielfältigung und Weiterleitung ihrer Inhalte nicht gestattet, soweit nicht schriftlich zugestanden.

150 mm

PRO R00023

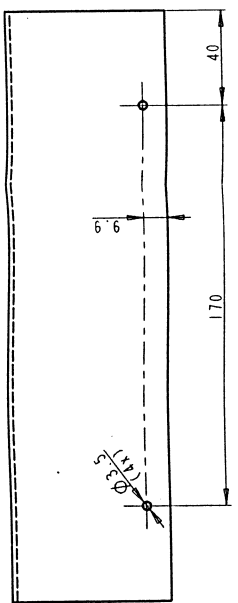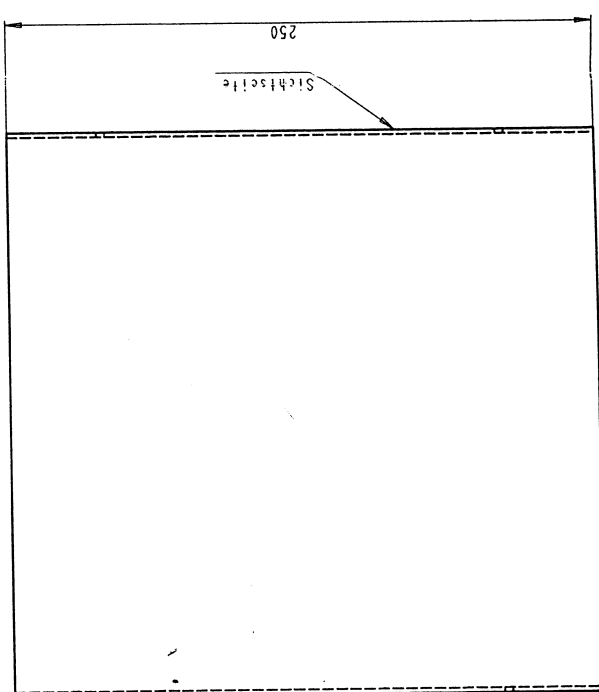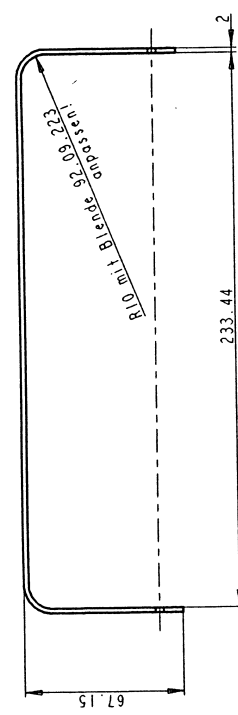

Pulverbeschichtet SFS RAL 7035
Innenseite darf farbbeibel haben


Mat.: Alu roh m. F. 2,0mm MB-081		Oberfl.: Pulverbeschichtet SFS RAL 7035		Maßstab 1:2	Freimaßtoleranz 
Nichttoleriererte Masse: ±0,2					
Datum				Ahnf. Zeichnung:	
Index				Gezeichnet: 13.1.2000 Fad.	
Visum				Geprüft:	
Ander				Gesehen:	

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization.

Alle Rechte vorbehalten. Weitergabe sowie Vervielfältigung dieser Unterlagen, Vervielfältigung ihres Inhalts nicht gestattet, soweit nicht schriftlich zugestanden.

150 mm

PRO R00023

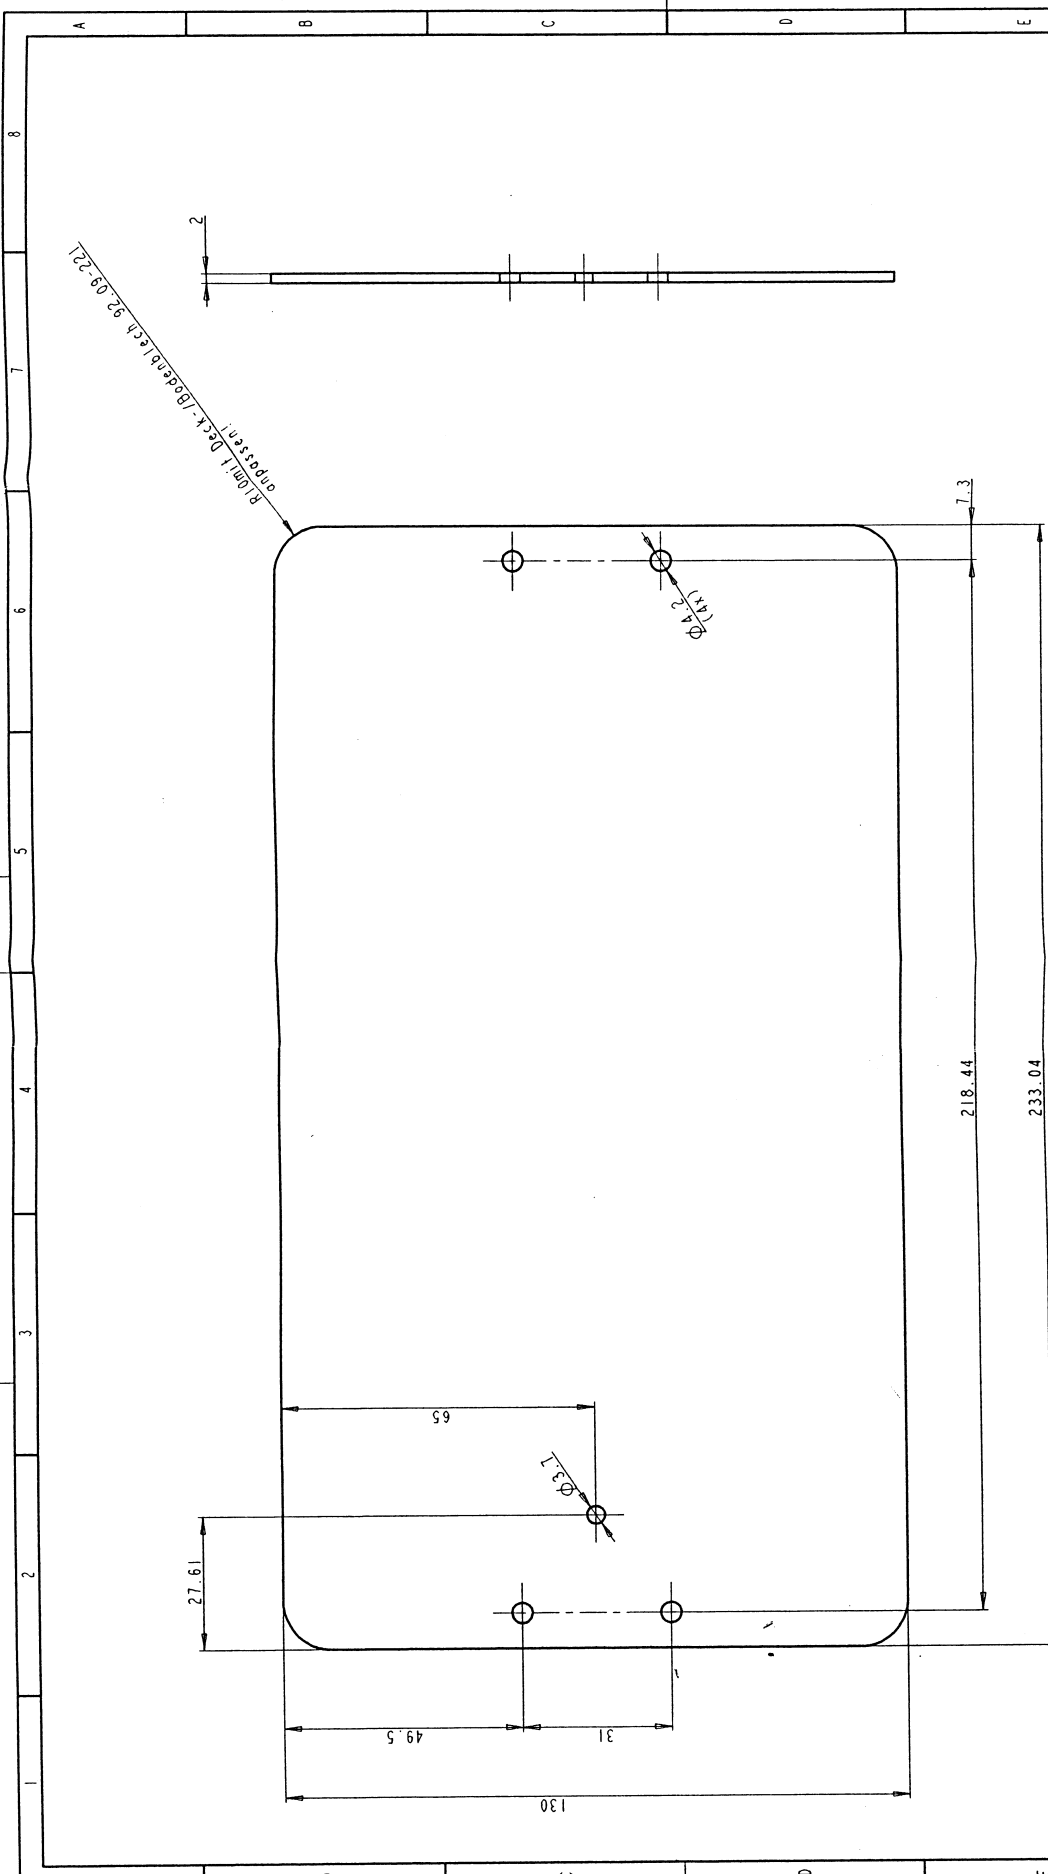

Mat.: Alu elox. m.F. 2,0mm MB-005	Oberfl.: (Material ist farbl. elox.)	Maßstab 1:1	Freimaßtoleranz
Nichttoleriererte Masse: $\pm 0,2$			
Datum			Ähnl. Zeichnung:
Index			Gezeichnet: T3 I. 2000 Fod.
Visum			Geprüft:
			Geschen:


TRENew		Rückplatte I2 233,04x130	
alte Zeichnungs-Nr.:	Index	neue Zeichnungs-Nr.:	Index
		92.09.221	a

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization.

Alle Rechte vorbehalten. Weitergabe und Vervielfältigung dieser Unterlagen, sowie schriftliche Mitteilung nicht gestattet, soweit nicht schriftlich zugestanden.

150 mm

230

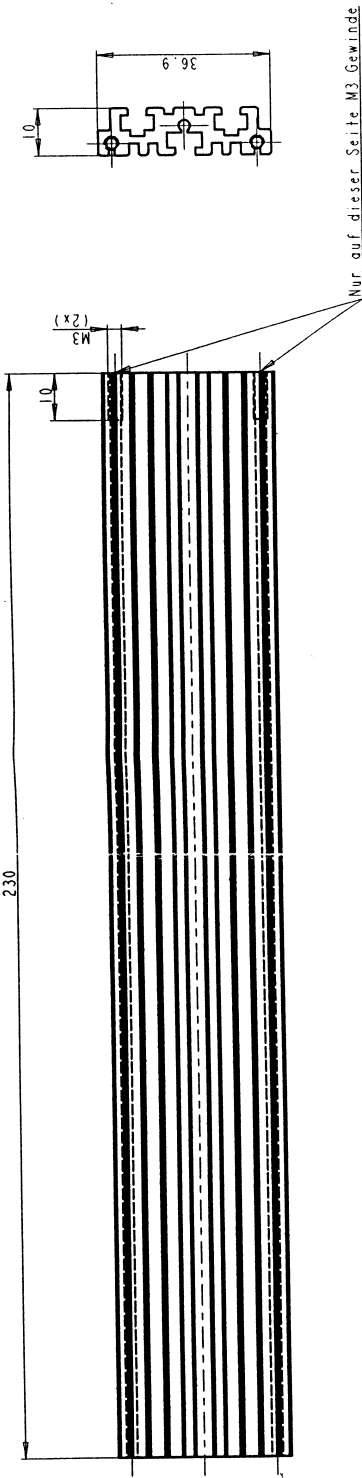


Mat.: MR-712		Oberfl.: roh		Maßstab 1:1		Freimaßtoleranz		Ähnl. Zeichnung:	
Nichttoleriererte Masse: $\pm 0,2$								Gezeichnet: 14.1.2000 Fad	
Datum								Geprüft:	
Index								Gesehen:	
Ange									
Visum									

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization.

Alle Rechte vorbehalten. Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht schriftlich zugestanden.

R10 mit Boden-/Deckschale
92.09.220 anpassen

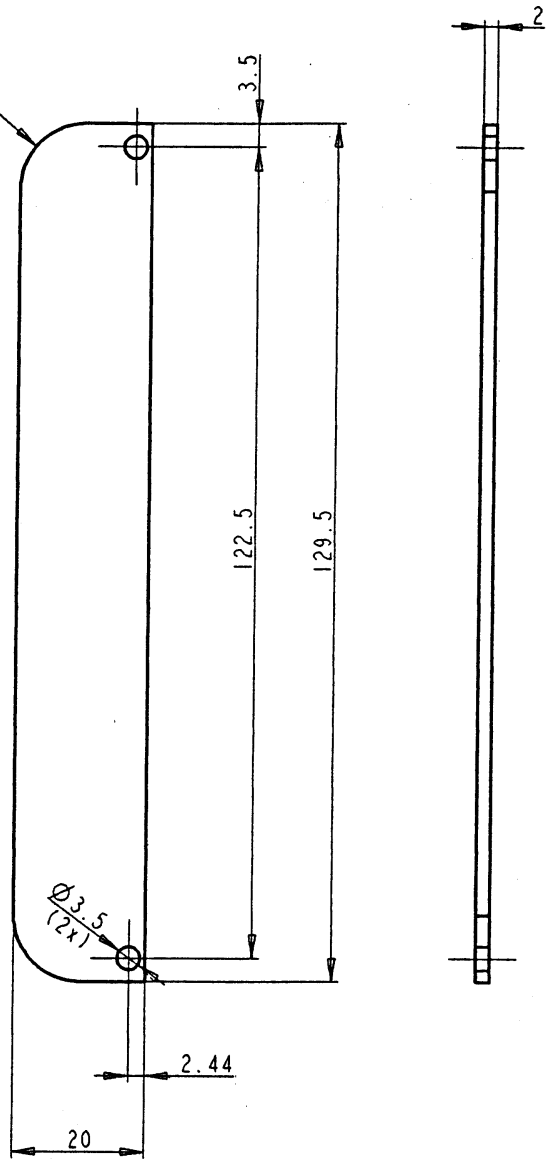


Pulverbeschichtet RAL 7035


Mat.: Alu roh m.F. 2,0mm MB-081				Oberfl.: Pulverbesch. SFS RAL 7035				Maßstab 1:1		Freimaßtoleranz				
Nichttolerierete Masse: ±0,2										Ähnl. Zeichnung:				
Änder.	Datum										Gezeichnet: 17.1.2000 Fad.			
	Index										Geprüft:			
	Visum										Gesehen:			
TRENEW									Blende					
alte Zeichnungs-Nr.:						Index		neue Zeichnungs-Nr.:				92.09.223		Index a

PRO A4

Alle Rechte vorbehalten. Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht schriftlich zugestanden.

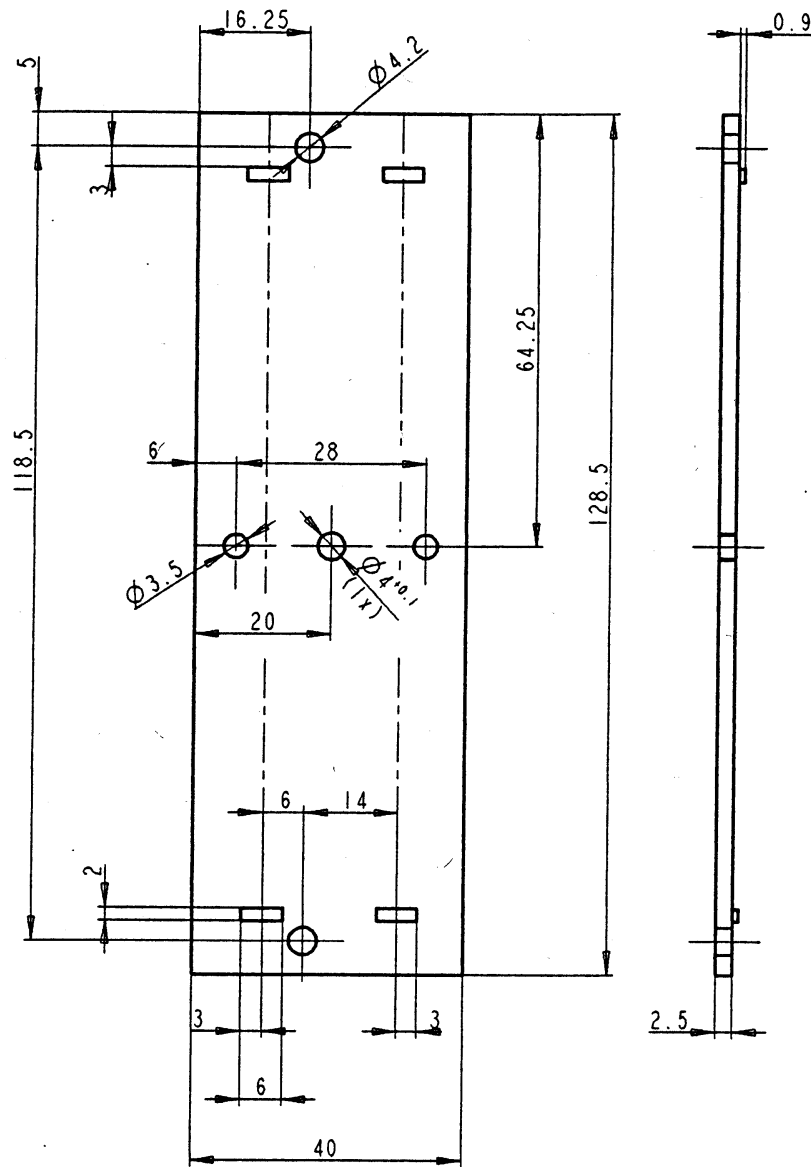


H2-1025/15750 M4x10 (1x)



Mat.: Alu roh m.F. 2.0mm MB-08		Oberfl.: roh		Maßstab 1:1		Freimaßtoleranz			
Nichttolerierte Masse: ±0,2						Ähnl. Zeichnung:			
Änder.	Datum								Gezeichnet: 17.1.2000 Fad.
	Index								Geprüft:
	Visum								Gesehen:
TRENEW						Befestigungsblech			
alte Zeichnungs-Nr.:				Index	neue Zeichnungs-Nr.:				Index
					92.09.225				a

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization.

Alle Rechte vorbehalten. Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht schriftlich zugestanden.

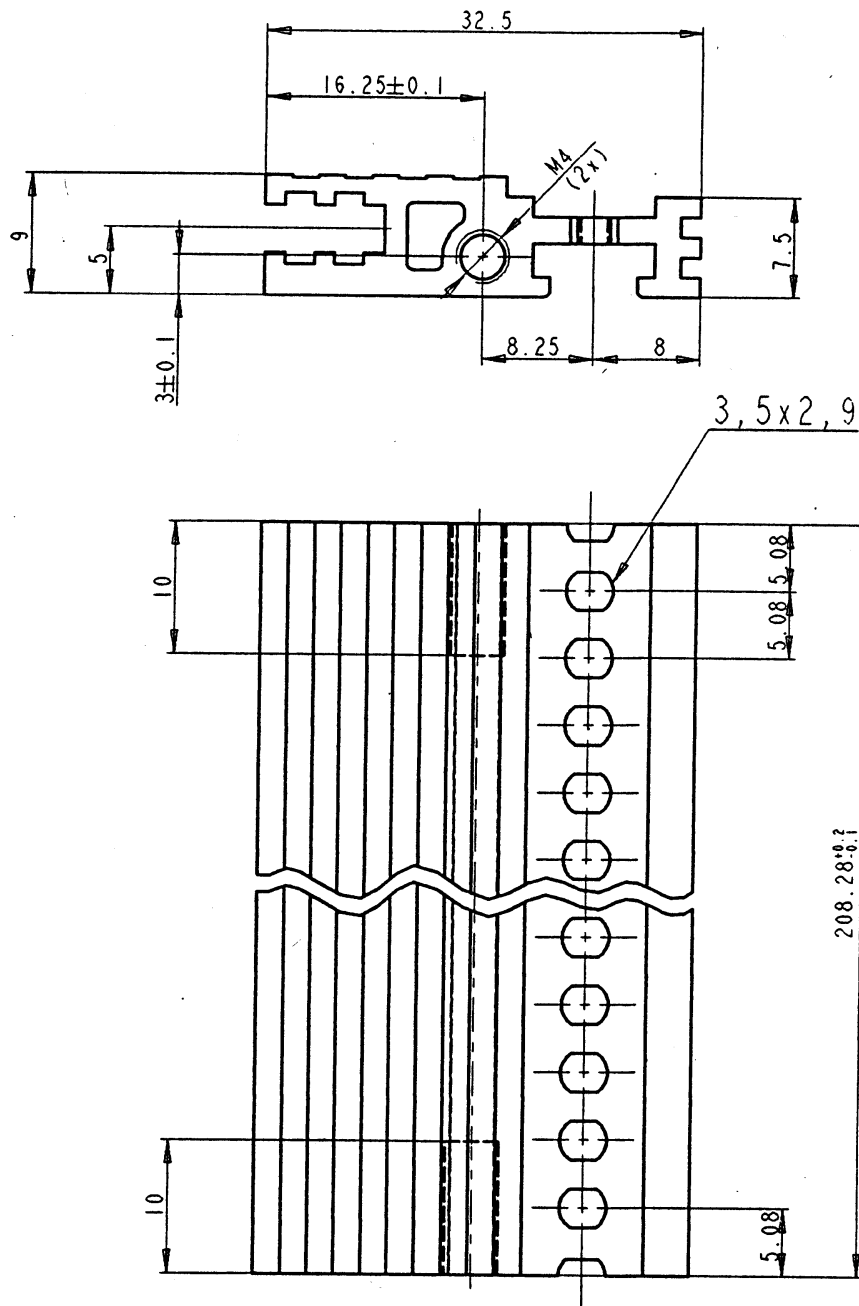


Mat.: 31-753R		Oberfl.: roh		Maßstab 2:1		Freimaßtoleranz			
Nichttolerierete Masse: ±0,2								Ähnl. Zeichnung:	
Ander.	Datum							Gezeichnet:	17.1.2000 Fad.
	Index							Geprüft:	
	Visum							Gesehen:	
TRENEW						Innenlängsprofil 4ITE			
alte Zeichnungs-Nr.:				Index		neue Zeichnungs-Nr.:			92.09.226
									Index a

PRO A4

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization.

Alle Rechte vorbehalten. Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht schriftlich zugestanden.

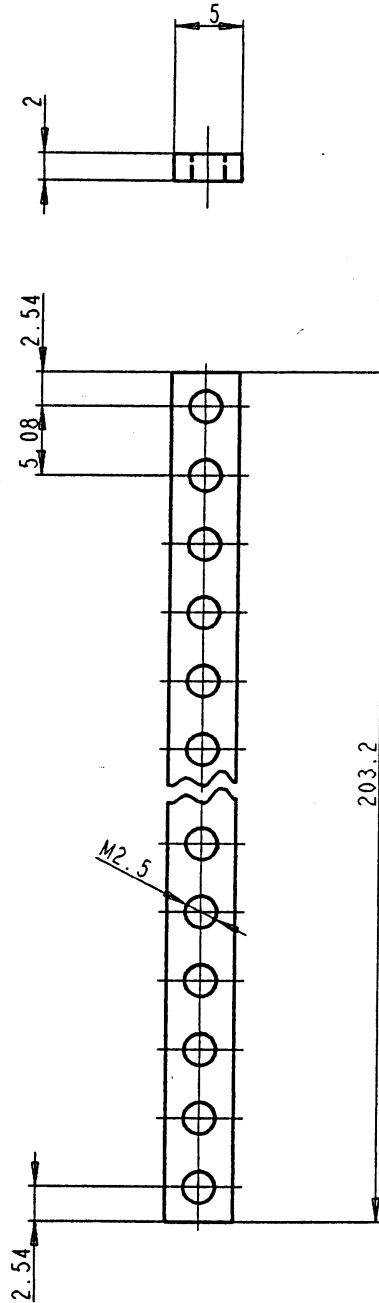

Mat.: Stahl		Oberfl.: blau verzinkt		Maßstab 2:1		Freimaßtoleranz			
Nichttolerierete Masse: $\pm 0,2$								Ähnl. Zeichnung:	
Ander.	Datum							Gezeichnet:	18.1.2000 Fad.
	Index							Geprüft:	
	Visum							Gesehen:	
TRENEW		Gewindestreifen M2,5 40TE							
alte Zeichnungs-Nr.:				Index	neue Zeichnungs-Nr.:				Index
					92.09.227				a

PRO A4