Emissions
Test Report

EUT Name: Wireless Residential Gateway

Model No.: 5268AC

CFR 47 Part 15.407 2013 and RSS 210: 2010

Prepared for:

Mark Rieger
Pace Americas
310 Providence Mine Road, Ste. 200
Nevada City, CA 95959
Tel: (530) 274-5440
Fax: (530) 273-6340

Prepared by:

TUV Rheinland of North America, Inc.
1279 Quarry Lane, Ste. A
Pleasanton, CA 94566
Tel: (925) 249-9123
Fax: (925) 249-9124
http://www.tuv.com/

Report/Issue Date: 16 May 2014
Report Number: 31153119.004
Project Number: 0000118910
Revision Number 0

Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	05/16/2014	Original Document	N/A

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer:	Pace Americas 310 Providence Mine Road, Ste. 200 Nevada City, CA 95959 (530) 274-5440
Requester / Applicant:	Mark Rieger
Name of Equipment:	Wireless Residential Gateway
Model No.	5268AC
Type of Equipment:	Intentional Radiator
Application of Regulations:	CFR 47 Part 15.407 2013 and RSS 210: 2010
Test Dates:	April 10, 2014 to April 28, 2014

Guidance Documents:

Emissions: ANSI C63.10-2009, KDB 789033 D01 General UNII Test Procedure v01r03, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 644545 D01 Guidance for IEEE 802.11ac v01r02.

Test Methods:

Emissions: ANSI C63.10-2009, KDB 789033 D01 General UNII Test Procedure v01r03. KDB 644545 D01 Guidance For IEEE 802.11ac v01r02.

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Jeremy Luong	05/16/2014	Conan Boyle	05/16/2014
Test Engineer	Date	Laboratory Signature	Date

Testing Cert #3331.02 **US5254** **2932M-1**

1 Executive Summary 7

1.1 Scope 7

1.2 Purpose 7

1.3 Summary of Test Results 8

1.4 Special Accessories 8

1.5 Equipment Modifications 8

2 Laboratory Information 9

2.1 Accreditations & Endorsements 9

2.1.1 US Federal Communications Commission 9
2.1.2 A2LA 9
2.1.3 Canada – Industry Canada 9
2.1.4 Japan – VCCI 9
2.1.5 Acceptance by Mutual Recognition Arrangement 10

2.2 Test Facilities 10

2.2.1 Emission Test Facility 10
2.2.2 Immunity Test Facility 10

2.3 Measurement Uncertainty 11

2.3.1 Sample Calculation – radiated & conducted emissions 11
2.3.2 Measurement Uncertainty 11
Measurement Uncertainty Immunity 12

2.4 Calibration Traceability 12

3 Product Information 13

3.1 Product Description 13

3.2 Equipment Configuration 13

3.3 Operating Mode 13

3.4 Unique Antenna Connector 14

3.4.1 Results 14

4 Emissions 15

4.1 Output Power Requirements 15

4.1.1 Test Method 15
4.1.2 Results 16

4.2 Occupied Bandwidth 59

4.2.1 Test Method 59
4.2.2 Results 60

4.3 Peak Excursion 109

4.3.1 Test Method 109
4.3.2 Results 110

4.4 Power Spectral Density 146

4.4.1 Test Method 146
4.4.2 Results 147

4.5 Transmitter Spurious Emissions 161

4.5.1 Test Methodology 161
4.5.2 Transmitter Spurious Emission Limit 162
4.5.3 Test Results 162
4.5.4 Sample Calculation 232

4.6 AC Conducted Emissions 233
4.6.1 Test Methodology 233
4.6.2 Test Results 233

4.7 Frequency Stability 238
4.7.1 Test Methodology 238
4.7.2 Manufacturer Declaration 238
4.7.3 Limit 239
4.7.4 Test results 239

4.8 Voltage Variation 241
4.8.1 Test Methodology 241
4.8.2 Test results 241

4.9 Maximum Permissible Exposure 243
4.9.1 Test Methodology 243
4.9.2 RF Exposure Limit 243
4.9.3 EUT Operating Condition 244
4.9.4 Classification 244
4.9.5 Test Results 244
4.9.6 Sample Calculation 244

5 Test Equipment Use List 245

5.1 Equipment List 245

6 EMC Test Plan 246

6.1 Introduction 246

6.2 Customer 246

6.3 Equipment Under Test (EUT) 247

6.4 Test Specifications 252

Table 1: Summary of Test Results 8
Table 2: RF Output Power at the Antenna Port – Test Results 16
Table 3: Average Output Power at the Antenna Port – Reference Only 19
Table 4: Occupied Bandwidth – Test Results 60
Table 5: Peak Excursion – Test Results 110
Table 6: Power Spectral Density – Test Results 147
Table 7: Transmit Spurious Emission at Band-Edge Requirements 163
Table 8: AC Conducted Emissions – Test Results 233
Table 9: Frequency Stability – Test Results 239
Table 10: Voltage Variation – Test Results 241
Table 11: Customer Information 246
Table 12: Technical Contact Information 246
Table 13: EUT Specifications 247
Table 14: EUT Channel Power Specifications 249
Table 15: Interface Specifications 249
Table 16: Supported Equipment 250
Table 17: Description of Sample used for Testing 250
Table 18: Description of Test Configuration used for Radiated Measurement. 250
Table 19: Final Test Mode for 5470 - 5725 Band includes Band Crossing Channels 250
Table 20: Test Specifications 252

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.407 2013 and RSS 210: 2010 based on the results of testing performed on April 10, 2014 to April 28, 2014 on the Wireless Residential Gateway Model 5268AC manufactured by Pace Americas This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

This report will document the result for operating frequency band 5470 MHz to 5725 MHz with additional band-crossing signal into 5725 MHz to 5825 MHz band.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.4:2003/ ANSI C63.10:2009	Test Limit	Measured Value	Result
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.407 (b) RSS-GEN Sect.7.2.3, RSS 210 Sect. A.9.2	Class B	- 4.91 dB (Margin)	**Complied**
Restricted Bands of Operation	CFR47 15.205, RSS 210 Sect.2.6	Class B		**Complied**
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.7.2.2	Class B	- 16.04 dB (Margin)	**Complied**
Occupied Bandwidth	CFR47 15.407 (a), RSS GEN Sect.4.4.1	Na	26dB BW: 22.834MHz 99% BW: 16.898 MHz	**Complied**
Maximum Output Power	CFR47 15.407 (a), RSS 210 Sect. A.9.2	21.92 dBm	21.26 dBm	**Complied**
Peak Power Spectral Density	CFR47 15.407 (a), RSS 210 Sect. A.9.2	8.92 dBm/MHz	8.647dBm/MHz	**Complied**
Peak Excursion Ratio	CFR47 15.407 (a)(6)	< 13 dB	- 4.29 dB (margin)	**Complied**
Conducted Emission – Antenna Port	CFR47 15.407 (b), RSS 210 Sect.6.2.2	< -27 dBm/MHz	Note 2	**Complied**
Frequency Stability	CFR47 15.407 (g), RSS GEN Sect. 4.7.	±20 ppm	8.98 ppm	**Complied**
RF Exposure - General Population	CFR47 15.247 (i), 2.1091	1.0 mW/cm^2	0.21388 mW/cm2	**Complied**

Note: 1. Test limit was accounted for the maximum directional gain antenna.
2. Meet restricted band emission requirements.
3. This report will document band 5470 MHz to 5825 MHz with band-crossing signals.

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 A2LA

TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005 and ISO 9002 (Lab Code 3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada

TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0031

VCCI Registration No. for Santa Clara: A-0032

2.1.5 Acceptance by Mutual Recognition Arrangement

The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code 3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-kΩ resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-kΩ resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

Field Strength (dBμV/m) = RAW - AMP + CBL + ACF

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu V/m = 10^{\frac{dB\mu V/m}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

25 dBuV/m + 17.5 dB – 20 dB + 1.0 dB = 23.5 dBuV/m

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	**U_{lab}**	**U_{cispr}**
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 40 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is ± 5.0%.	Per CISPR 16-4-2 Methods

Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is ± 8.2%.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is ± 2.9%.	Per IEC 61000-4-8

Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is ± 2.6%.
The estimated combined standard uncertainty for surge immunity measurements is ± 2.6%.
The estimated combined standard uncertainty for voltage variation and interruption measurements is ± 1.74%.

Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is ± 3.88 Hz
The estimated combined standard uncertainty for carrier power measurements is ± 1.59 dB.
The estimated combined standard uncertainty for adjacent channel power measurements is ± 1.47 dB.
The estimated combined standard uncertainty for modulation frequency response measurements is ± 0.46 dB.
The estimated combined standard uncertainty for transmitter conducted emission measurements is ± 4.01 dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005.

3 Product Information

3.1 Product Description

Pace Americas 5268AC is a residential gateway that provides an 802.11 a/b/g/n/ac Wi-Fi access point and ethernet switch function for connecting personal computers and other in-home networked devices to the service provider's network. The 5168AC features:

- Bonded ADSL2+/VDSL2
- Gigabit Ethernet WAN
- HomePNA 3.1 coax port
- 4 Gigabit Ethernet LAN ports
- 5GHZ 802.11n 4x4 MIMO Wi-Fi
- 2.4GHZ 802.11n 2x2 MIMO Wi-Fi
- 2 FXS (VoIP) Lines
- USB Host Port

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Wireless Residential Gateway has 4 internal fixed antennas. All antennas are integrated on the PCB. There is no external antenna connection available.

Antenna	Peak Gain (dBi)
1	1.95
2	2.27
3	1.83
4	2.03
Total Directional gain is +8.08 dBi.	

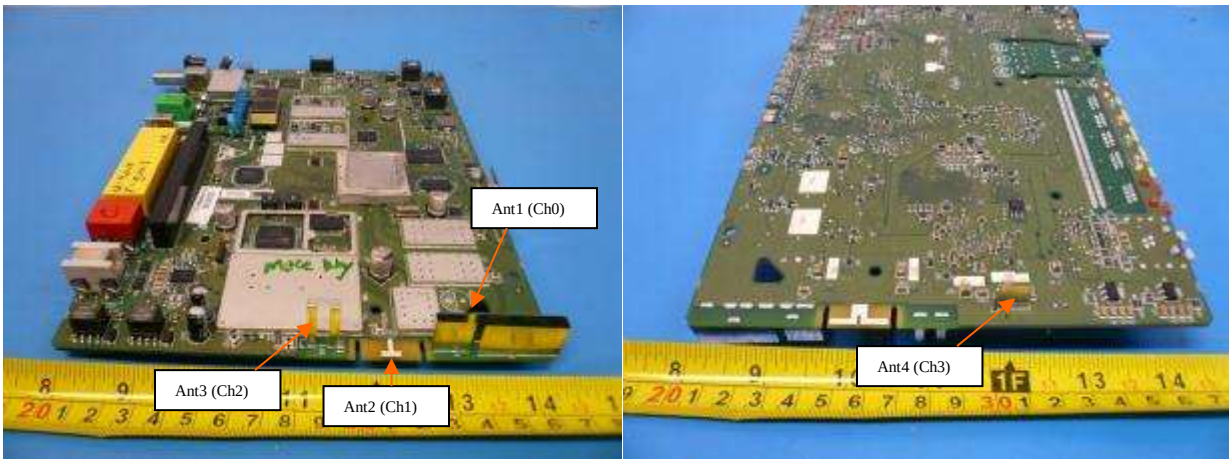

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.407: 2013 and RSS 210 Annex 9: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power deLinering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.407 (a):2012 and RSS 210 A9.2: 2010.

The maximum transmitted powers are

Band 5150-5250 MHz:50 mW or 4 dBm + 10Log B.

Band 5250-5350 MHz, 5470-5725 MHz:250 mW or 11 dBm + 10Log B.

Band 5725-5825 MHz:1 W or 17 dBm + 10Log B. Where B is 26 dB Bandwidth.

4.1.1 **Test Method**

The ANSI C63.10-2009 Section 6.10.3.1 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/ chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each mode on the sample, S/N 121404000111, per CFR47 Part 15.407(a): 2012 and RSS 210 A.9.2; 5470 MHz to 5725 MHz. The worst mode results indicated below.

Test Setup:

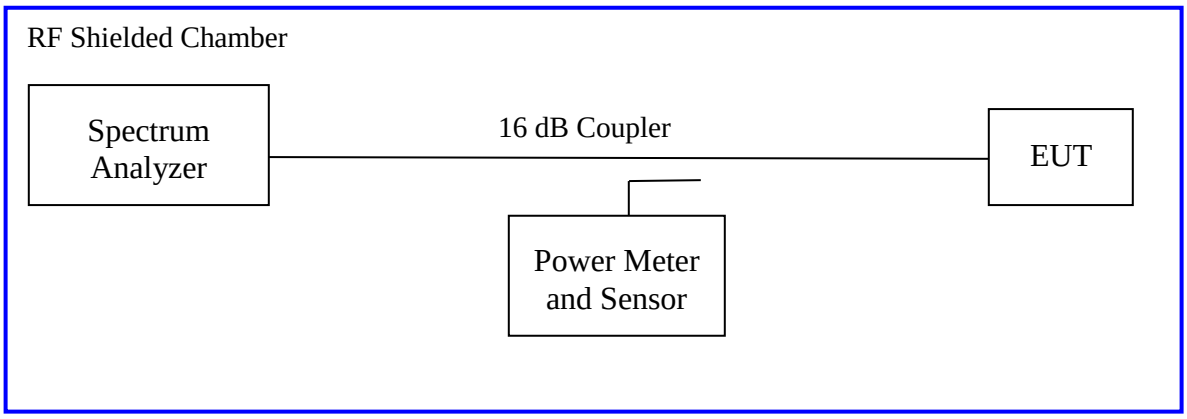

Method SA-2 of "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices" applies since the EUT continuously transmit with duty cycle less 100%.

The duty cycle, CF = 10Log(1/duty cycle), was applied.

The crossing band channels for VHT20, VHT40, and VHT80 measured using the KDB 644545 D01 Guidance for IEEE802.11ac v01r02 Section F (2).

Each chain was measured individually and applied the measure-and-sum approach per KDB66291.
All chains will be on at all time and beam performing. Per CFR47 Part 15.407 (a) (1), the limit is reduced for every dBi gain exceeding 6 dBi. The adjusted limit is 21.92 dBm for UNII2c since the total directional gain is 8.08 dBi. For the crossing band channel, the UNII3 is based on 17 dBm + 10Log B.

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement				**Test Date:** April 21, 2014				
Antenna Type: Integrated				**Power Setting:** See test plan				
Directional Antenna Gain: + 8.08 dBi				**Signal State:** Modulated.				
Ambient Temp.: 23 °C				**Relative Humidity:**34%				
802.11a, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5500	21.92	14.11	13.61	13.55	13.79	0.04	19.84	-2.08
5580	21.92	13.57	13.55	13.59	13.27	0.04	19.56	-2.36
5700	21.92	12.97	12.22	11.96	13.90	0.04	18.89	-3.03
Note: The highest output power was observed at 802.11a, 6Mbps, 4 Data Streams at 99% duty cycle. Power Setting was 15 dBm.								
802.11n HT20, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5500	21.92	13.64	13.76	13.90	13.71	0.09	19.86	-2.05
5580	21.92	14.21	13.43	13.69	13.19	0.09	19.75	-2.17
5700	21.92	13.27	12.14	11.90	13.49	0.09	18.87	-3.05
Note: The highest output power was observed at MCS0, 4 Data Streams at 98% duty cycle. Power Setting was15 dBm.								

802.11n HT40, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5510	21.92	14.94	15.26	14.99	15.03	0.18	21.26	-0.66
5550	21.92	15.38	14.91	14.97	14.92	0.18	21.25	-0.67
5670	21.92	14.20	14.36	14.36	13.61	0.18	20.34	-1.58
Note: The highest output power was observed at MCS0, 4 Data Streams at 96% duty cycle. Power Setting was 16 dBm.								
802.11ac VHT20, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5500	21.92	13.55	13.74	13.86	14.05	0.09	19.91	-2.01
5580	21.92	14.15	13.41	13.47	13.20	0.09	19.68	-2.24
5700	21.92	13.35	11.80	12.12	13.67	0.09	18.92	-3.00
Note: The highest output power was observed at MCS0, 4 Data Streams at 98% duty cycle. Power Setting was 15 dBm.								
802.11ac VHT40 Mode, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5510	21.92	14.83	14.86	15.19	14.93	0.13	21.11	-0.81
5550	21.92	15.16	14.80	15.18	15.17	0.13	21.24	-0.68
5670	21.92	14.68	14.05	13.92	13.56	0.13	20.22	-1.70
Note: The highest output power was observed at MCS0, 4 Data Streams at 97% duty cycle. Power Setting was 16 dBm.								
802.11ac VHT80 Mode, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5530	21.92	14.63	14.80	14.67	14.92	0.32	21.09	-0.83
Note: The highest output power was observed at MCS0, 4 Data Streams at 93% duty cycle. Power Setting was 16 dBm.								

Band Crossing Channel Per KDB 644545 D01								
802.11ac VHT20, 4x4, (5720 MHz)								
Operating Band	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
UNII2c	21.15	12.57	10.55	10.70	12.72	0.09	17.86	-3.29
UNII3	23.61	7.48	5.10	5.55	7.47	0.09	12.64	-10.97
Combined	21.92	13.74	11.64	11.86	13.85	0.09	19.00	-2.92
Note: 1.The highest output power was observed at MCS0, 4 Data Streams at 98% duty cycle. Power Setting was 15 dBm. 2. The UNII 2c and UNII3 limit took into account of UNII 26dB bandwidth and antenna gain.								

802.11ac VHT40 Mode, 4x4, (5710 MHz)								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
UNII2c	21.92	14.17	12.31	12.86	14.22	0.13	19.62	-2.30
UNII3	22.55	4.67	2.37	3.03	4.71	0.13	9.97	-12.59
Combined	21.92	14.63	12.73	13.29	14.68	0.13	20.07	-1.85
Note: 1. The highest output power was observed at MCS0, 4 Data Streams at 97% duty cycle. Power Setting was 16 dBm. 2. The UNII 2c and UNII3 limit took into account of UNII 26dB bandwidth and antenna gain.								
802.11ac VHT80 Mode, 4x4, (5690 MHz)								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
UNII2c	21.92	14.22	13.52	13.49	13.05	0.32	19.93	-1.99
UNII3	23.31	1.41	0.22	-0.02	0.2	0.32	6.83	-16.48
Combined	21.92	14.44	13.72	13.68	13.27	0.32	20.13	-1.79
Note: 1.The highest output power was observed at MCS0, 4 Data Streams at 93% duty cycle. Power Setting was 16 dBm. 2. The UNII 2c and UNII3 limit took into account of UNII 26dB bandwidth and antenna gain.								

Table 3: Average Output Power at the Antenna Port – Reference Only

Test Conditions: Conducted Measurement				**Test Date:** April 21, 2014				
Antenna Type: Integrated				**Power Setting:** See test plan				
Directional Antenna Gain: + 8.08 dBi				**Signal State:** Modulated.				
Ambient Temp.: 23 °C				**Relative Humidity:**34%				
802.11a, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5500	N/A	15.03	14.56	14.49	14.73	0.04	20.77	N/A
5580	N/A	14.34	14.33	14.33	14.02	0.04	20.32	N/A
5700	N/A	14.20	13.51	13.21	15.18	0.04	20.15	N/A
Note: The highest output power was observed at 802.11a, 6Mbps, 4 Data Streams at 99% duty cycle. Power Setting was 15 dBm.								
802.11n HT20, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5500	N/A	14.60	14.71	14.86	14.66	0.09	20.82	N/A
5580	N/A	15.06	14.31	14.31	14.08	0.09	20.56	N/A
5700	N/A	14.65	13.48	13.19	14.86	0.09	20.21	N/A
Note: The highest output power was observed at MCS0, 4 Data Streams at 98% duty cycle. Power Setting was 15 dBm.								
802.11n HT40, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5510	N/A	15.94	16.23	15.97	15.99	0.18	22.23	N/A
5550	N/A	16.27	15.76	15.76	15.76	0.18	22.09	N/A
5670	N/A	15.59	15.72	15.72	14.99	0.18	21.71	N/A
Note: The highest output power was observed at MCS0, 4 Data Streams at 96% duty cycle. Power Setting was 16 dBm.								

802.11ac VHT20, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5500	N/A	14.65	14.73	14.90	15.03	0.09	20.94	N/A
5580	N/A	15.09	14.31	14.31	14.08	0.09	20.57	N/A
5700	N/A	15.35	13.37	13.81	15.37	0.09	20.67	N/A
5720	N/A	14.26	13.16	13.40	15.00	0.09	20.13	N/A
Note: The highest output power was observed at MCS0, 4 Data Streams at 98% duty cycle. Power Setting was 15 dBm.								
802.11ac VHT40, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5510	N/A	15.67	15.76	16.15	15.84	0.13	22.01	N/A
5550	N/A	16.05	15.61	15.61	16.00	0.13	21.98	N/A
5670	N/A	16.43	15.79	15.60	15.31	0.13	21.96	N/A
5710	N/A	15.44	14.45	14.79	16.06	0.13	21.38	N/A
Note: The highest output power was observed at MCS0, 4 Data Streams at 97% duty cycle. Power Setting was 16 dBm.								
802.11ac VHT80, 4x4								
Operating Channel	**Limit [dBm]**	**Ch0 [dBm]**	**Ch1 [dBm]**	**Ch2 [dBm]**	**Ch3 [dBm]**	**CF [dB]**	**Total Power [dBm]**	**Margin [dB]**
5530	N/A	15.57	15.67	15.56	15.81	0.32	21.99	N/A
5690	N/A	15.25	15.40	15.40	14.77	0.32	21.55	N/A
Note: The highest output power was observed at MCS0, 4 Data Streams at 93% duty cycle. Power Setting was 16 dBm.								

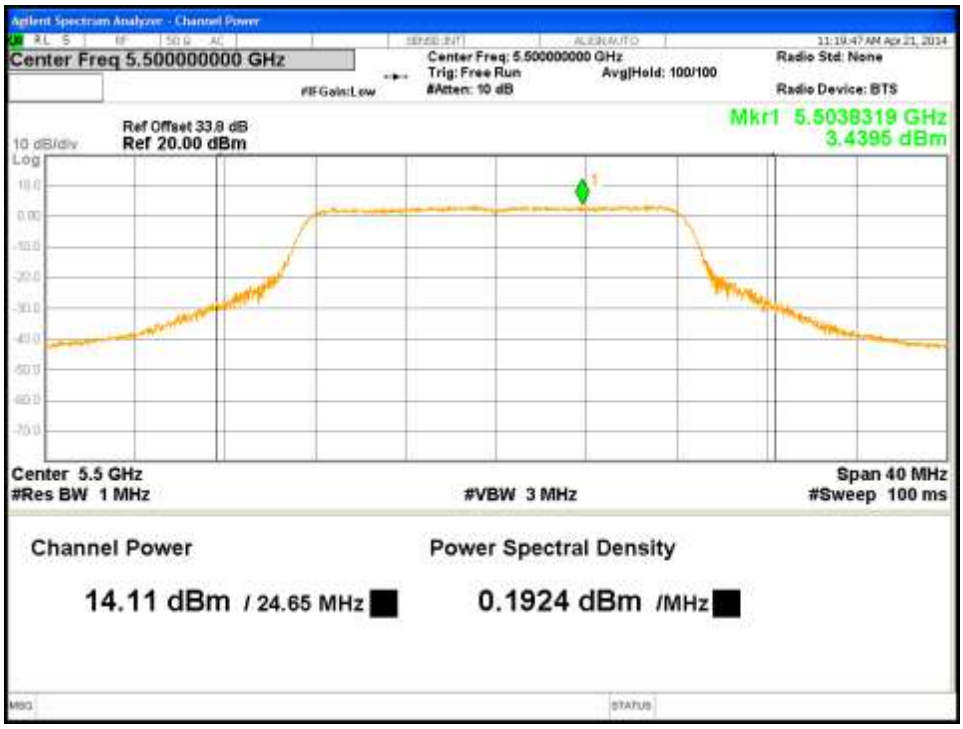

Figure 1: Maximum Conducted Output Power-5500MHz-11a-6Mbps-Ch0

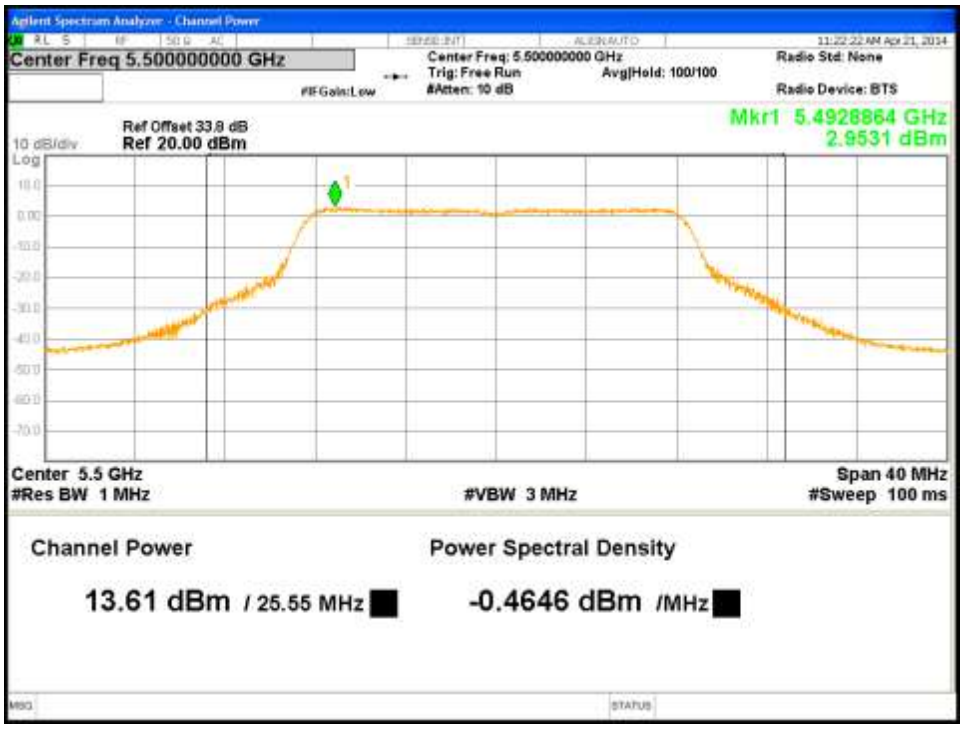

Figure 2: Maximum Conducted Output Power-5500MHz-11a-6Mbps-Ch1

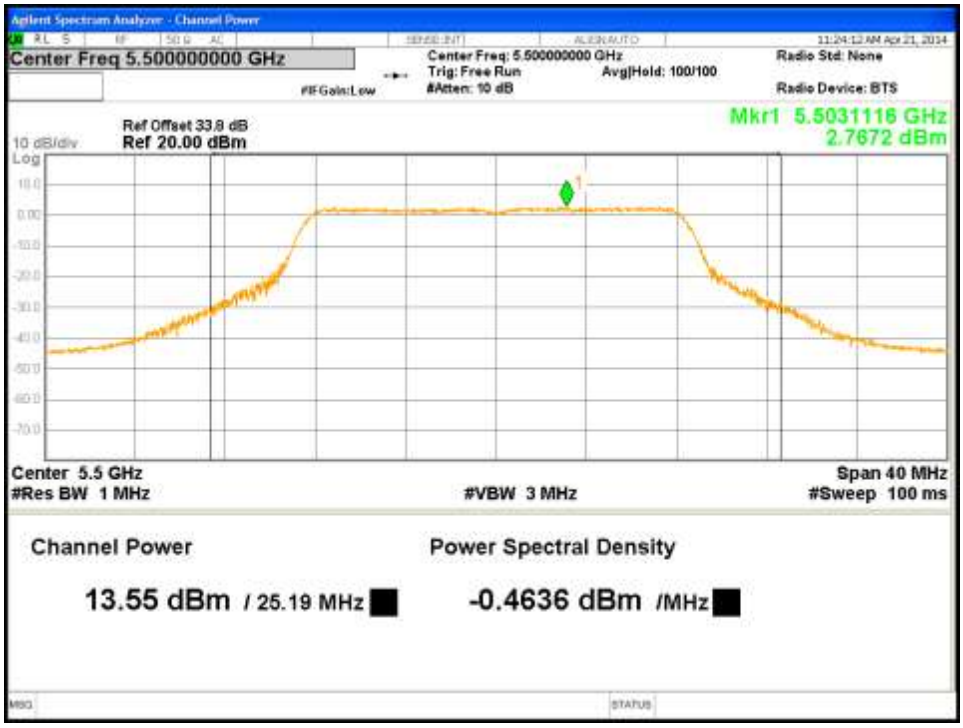

Figure 3: Maximum Conducted Output Power-5500MHz-11a-6Mbps-Ch2

Figure 4: Maximum Conducted Output Power-5500MHz-11a-6Mbps-Ch3

Figure 5: Maximum Conducted Output Power-5580MHz-11a-6Mbps-Ch0

Figure 6: Maximum Conducted Output Power-5580MHz-11a-6Mbps-Ch1

Figure 7: Maximum Conducted Output Power-5580MHz-11a-6Mbps-Ch2

Figure 8: Maximum Conducted Output Power-5580MHz-11a-6Mbps-Ch3

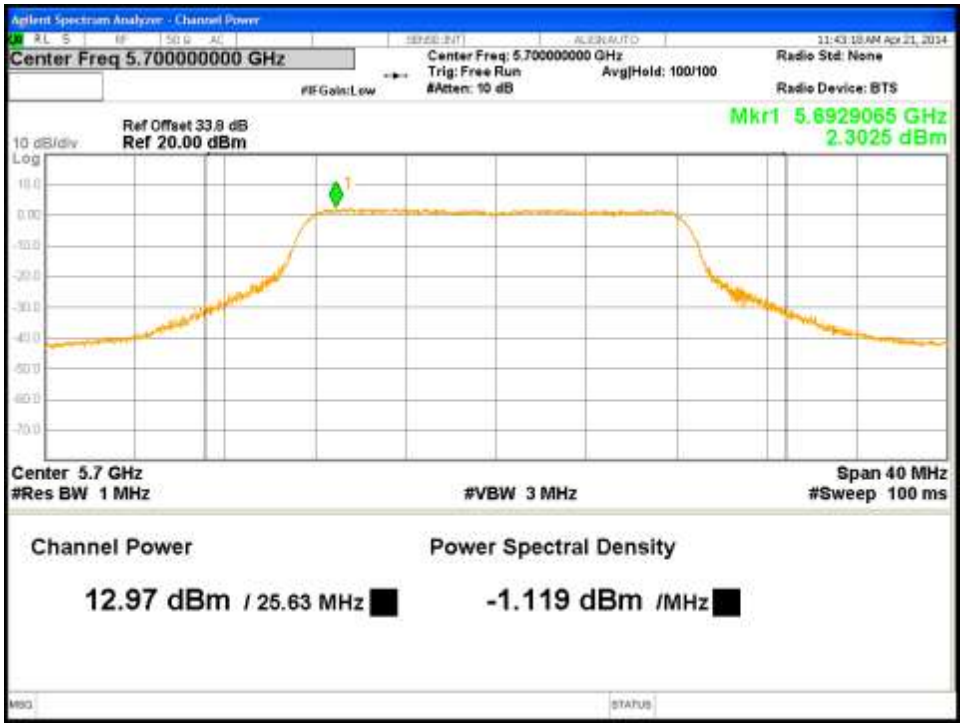

Figure 9: Maximum Conducted Output Power-5700MHz-11a-6Mbps-Ch0

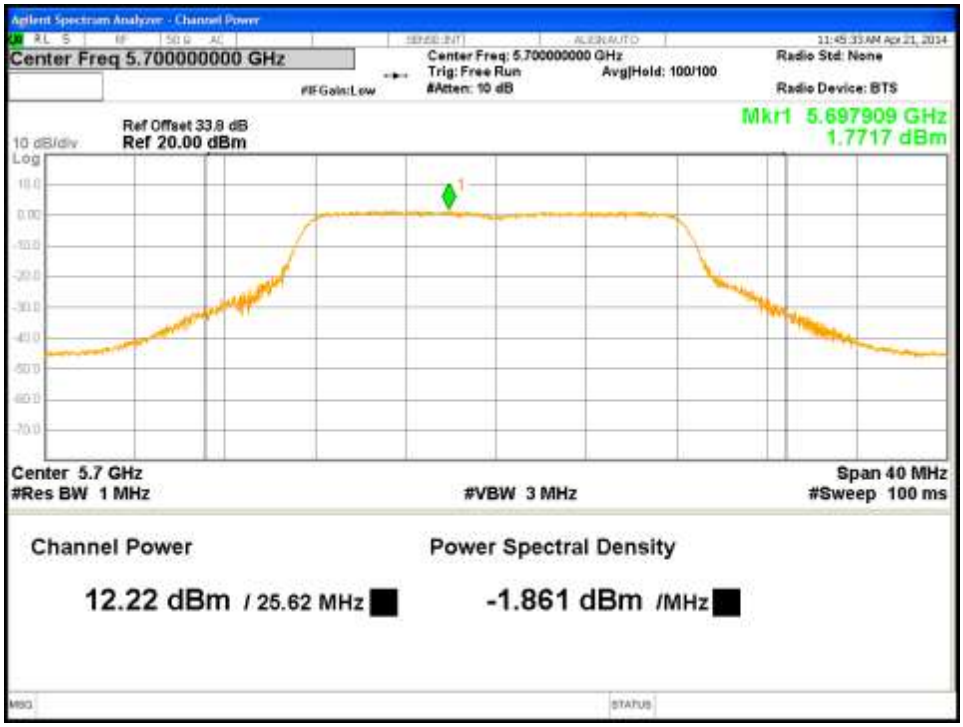

Figure 10: Maximum Conducted Output Power-5700MHz-11a-6Mbps-Ch1

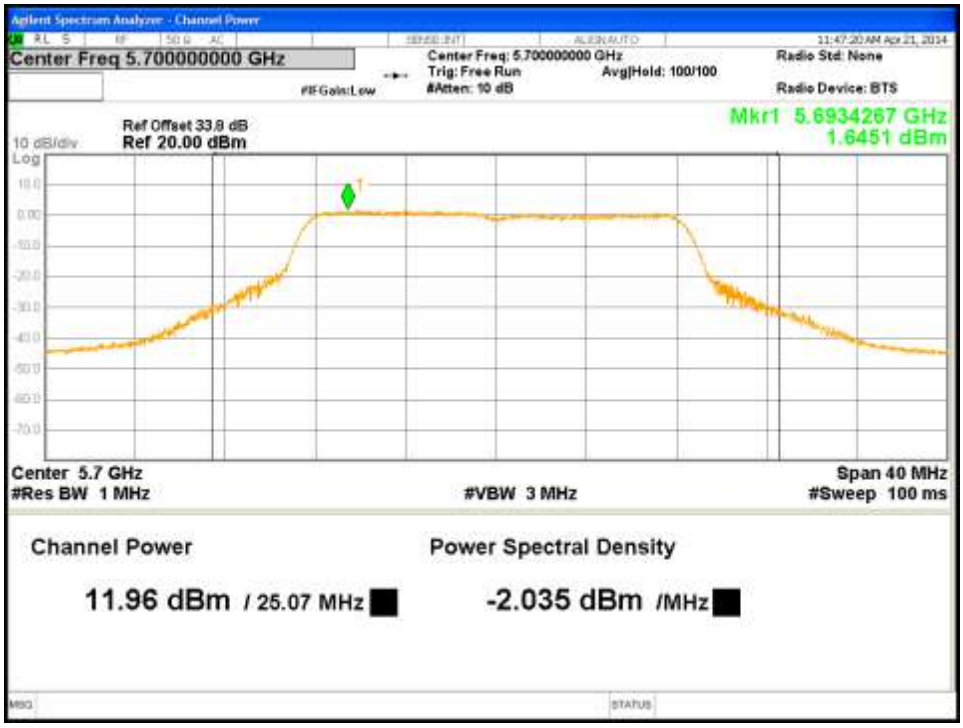

Figure 11: Maximum Conducted Output Power-5700MHz-11a-6Mbps-Ch2

Figure 12: Maximum Conducted Output Power-5700MHz-11a-6Mbps-Ch3

Figure 13: Maximum Conducted Output Power-5500MHz-HT20-MCS0-Ch0

Figure 14: Maximum Conducted Output Power-5500MHz-HT20-MCS0-Ch1

Figure 15: Maximum Conducted Output Power-5500MHz-HT20-MCS0-Ch2

Figure 16: Maximum Conducted Output Power-5500MHz-HT20-MCS0-Ch3

Figure 17: Maximum Conducted Output Power-5580MHz-HT20-MCS0-Ch0

Figure 18: Maximum Conducted Output Power-5580MHz-HT20-MCS0-Ch1

Figure 19: Maximum Conducted Output Power-5580MHz-HT20-MCS0-Ch2

Figure 20: Maximum Conducted Output Power-5580MHz-HT20-MCS0-Ch3

Figure 21: Maximum Conducted Output Power-5700MHz-HT20-MCS0-Ch0

Figure 22: Maximum Conducted Output Power-5700MHz-HT20-MCS0-Ch1

Figure 23: Maximum Conducted Output Power-5700MHz-HT20-MCS0-Ch2

Figure 24: Maximum Conducted Output Power-5700MHz-HT20-MCS0-Ch3

Figure 25: Maximum Conducted Output Power-5510MHz-HT40-MCS0-Ch0

Figure 26: Maximum Conducted Output Power-5510MHz-HT40-MCS0-Ch1

Figure 27: Maximum Conducted Output Power-5510MHz-HT40-MCS0-Ch2

Figure 28: Maximum Conducted Output Power-5510MHz-HT40-MCS0-Ch3

Figure 29: Maximum Conducted Output Power-5550MHz-HT40-MCS0-Ch0

Figure 30: Maximum Conducted Output Power-5550MHz-HT40-MCS0-Ch1

Figure 31: Maximum Conducted Output Power-5550MHz-HT40-MCS0-Ch2

Figure 32: Maximum Conducted Output Power-5550MHz-HT40-MCS0-Ch3

Figure 33: Maximum Conducted Output Power-5670MHz-HT40-MCS0-Ch0

Figure 34: Maximum Conducted Output Power-5670MHz-HT40-MCS0-Ch1

Figure 35: Maximum Conducted Output Power-5670MHz-HT40-MCS0-Ch2

Figure 36: Maximum Conducted Output Power-5670MHz-HT40-MCS0-Ch3

Figure 37: Maximum Conducted Output Power-5500MHz-VHT20-MCS0-Ch0

Figure 38: Maximum Conducted Output Power-5500MHz-VHT20-MCS0-Ch1

Figure 39: Maximum Conducted Output Power-5500MHz-VHT20-MCS0-Ch2

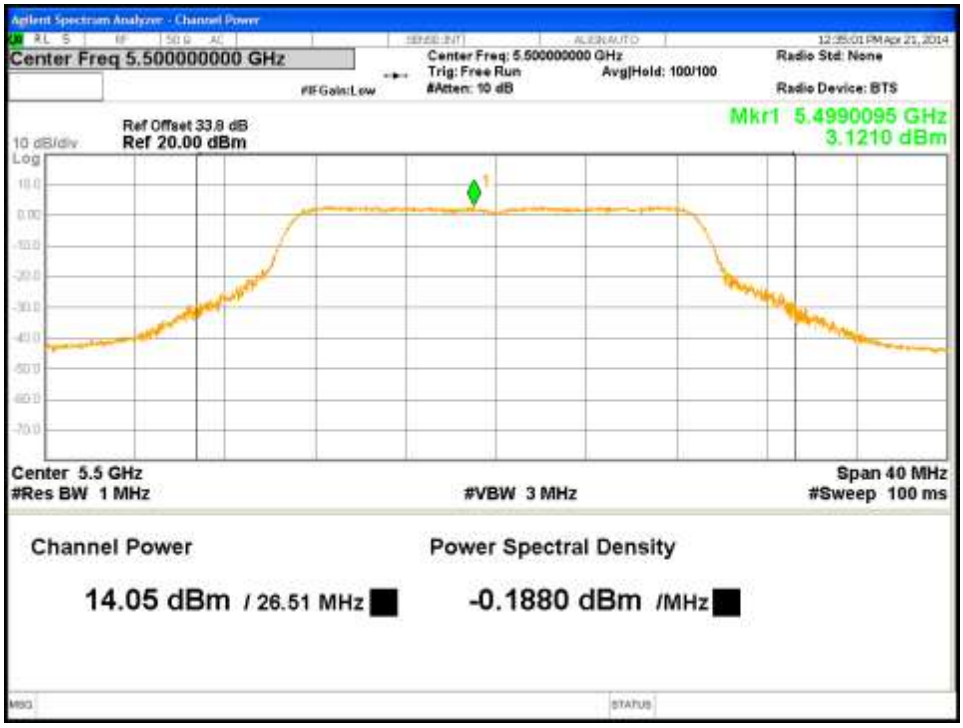

Figure 40: Maximum Conducted Output Power-5500MHz-VHT20-MCS0-Ch3

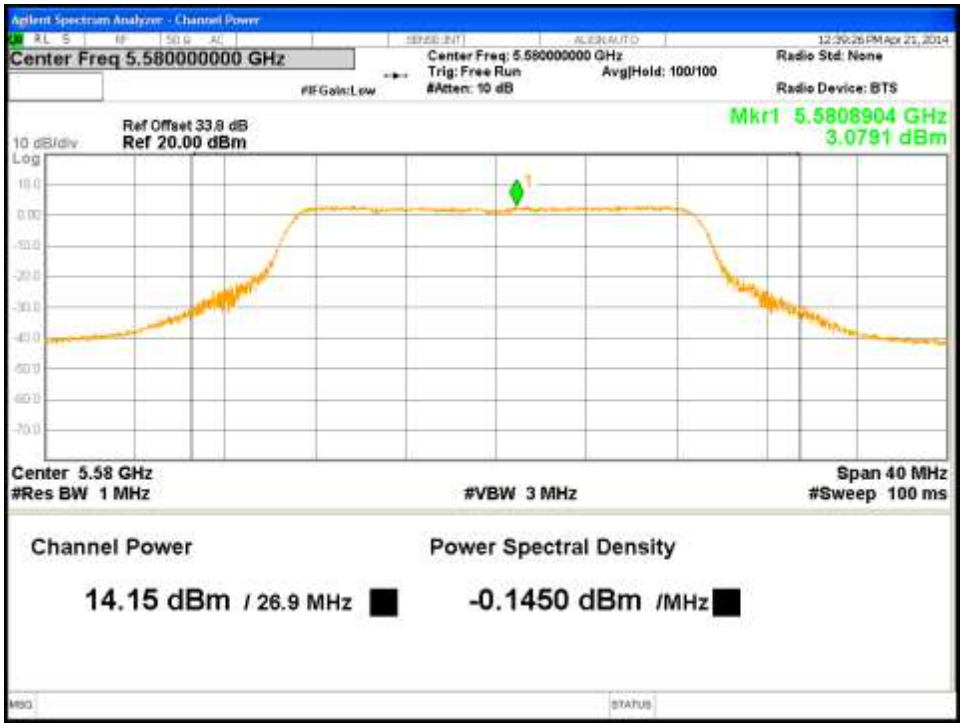

Figure 41: Maximum Conducted Output Power-5580MHz-VHT20-MCS0-Ch0

Figure 42: Maximum Conducted Output Power-5580MHz-VHT20-MCS0-Ch1

Figure 43: Maximum Conducted Output Power-5580MHz-VHT20-MCS0-Ch2

Figure 44: Maximum Conducted Output Power-5580MHz-VHT20-MCS0-Ch3

Figure 45: Maximum Conducted Output Power-5700MHz-VHT20-MCS0-Ch0

Figure 46: Maximum Conducted Output Power-5700MHz-VHT20-MCS0-Ch1

Figure 47: Maximum Conducted Output Power-5700MHz-VHT20-MCS0-Ch2

Figure 48: Maximum Conducted Output Power-5700MHz-VHT20-MCS0-Ch3

Figure 49: Maximum Conducted Output Power-5510MHz-VHT40-MCS0-Ch0

Figure 50: Maximum Conducted Output Power-5510MHz-VHT40-MCS0-Ch1

Figure 51: Maximum Conducted Output Power-5510MHz-VHT40-MCS0-Ch2

Figure 52: Maximum Conducted Output Power-5510MHz-VHT40-MCS0-Ch3

Figure 53: Maximum Conducted Output Power-5550MHz-VHT40-MCS0-Ch0

Figure 54: Maximum Conducted Output Power-5550MHz-VHT40-MCS0-Ch1

Figure 55: Maximum Conducted Output Power-5550MHz-VHT40-MCS0-Ch2

Figure 56: Maximum Conducted Output Power-5550MHz-VHT40-MCS0-Ch3

Figure 57: Maximum Conducted Output Power-5670MHz-VHT40-MCS0-Ch0

Figure 58: Maximum Conducted Output Power-5670MHz-VHT40-MCS0-Ch1

Figure 59: Maximum Conducted Output Power-5670MHz-VHT40-MCS0-Ch2

Figure 60: Maximum Conducted Output Power-5670MHz-VHT40-MCS0-Ch3

Figure 61: Maximum Conducted Output Power-5530MHz-VHT80-MCS0-Ch0

Figure 62: Maximum Conducted Output Power-5530MHz-VHT80-MCS0-Ch1

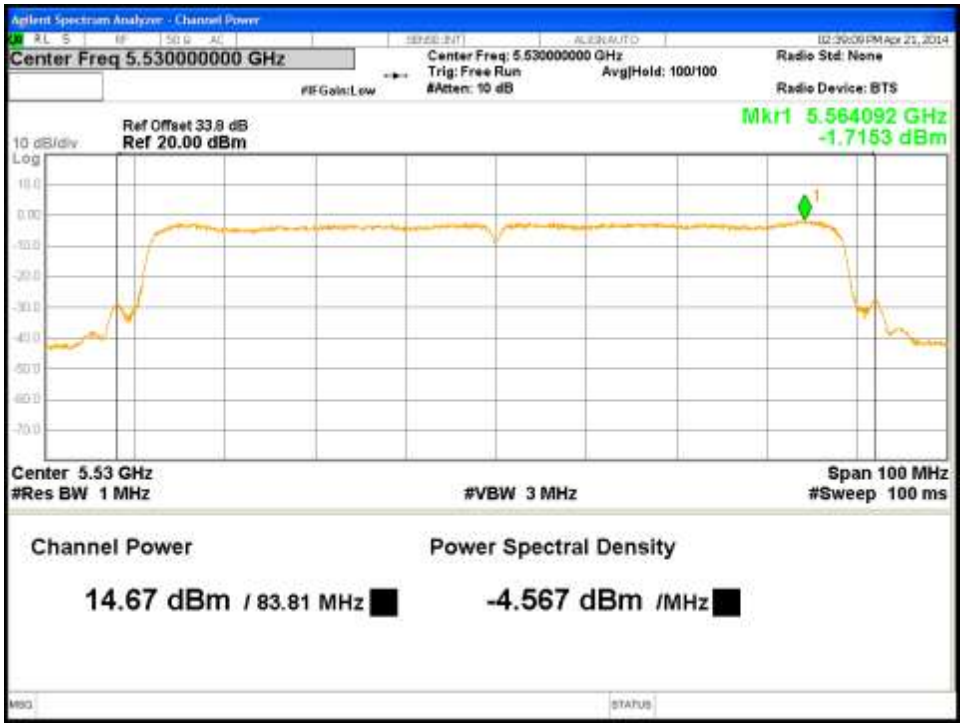

Figure 63: Maximum Conducted Output Power-5530MHz-VHT80-MCS0-Ch2

Figure 64: Maximum Conducted Output Power-5530MHz-VHT80-MCS0-Ch3

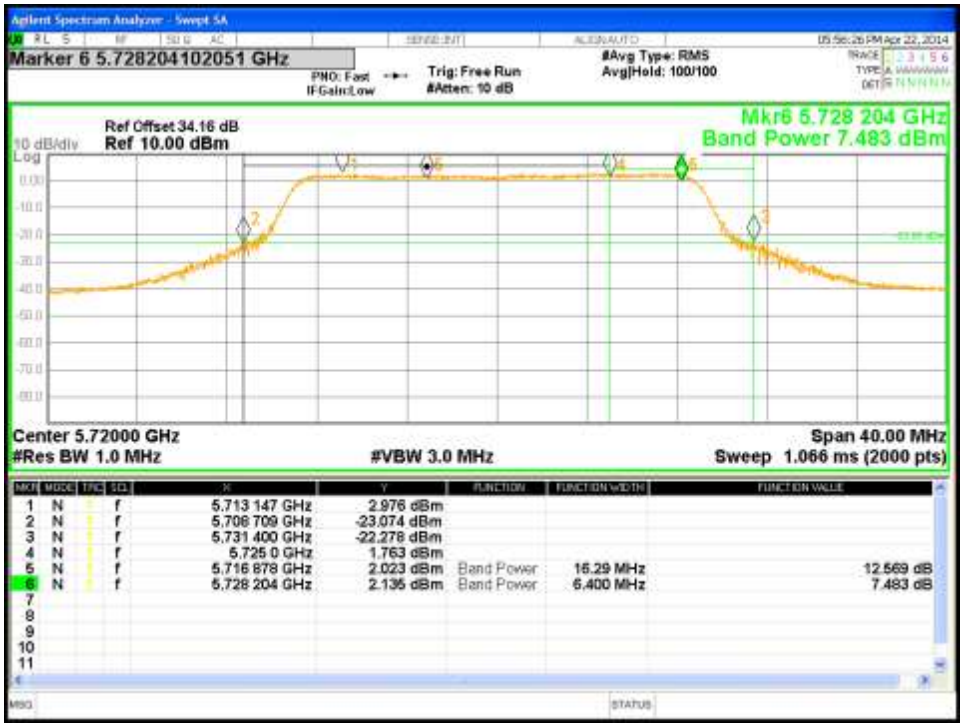

Figure 65: Maximum Conducted Output Power-5720MHz-VHT20-MCS0-Ch0

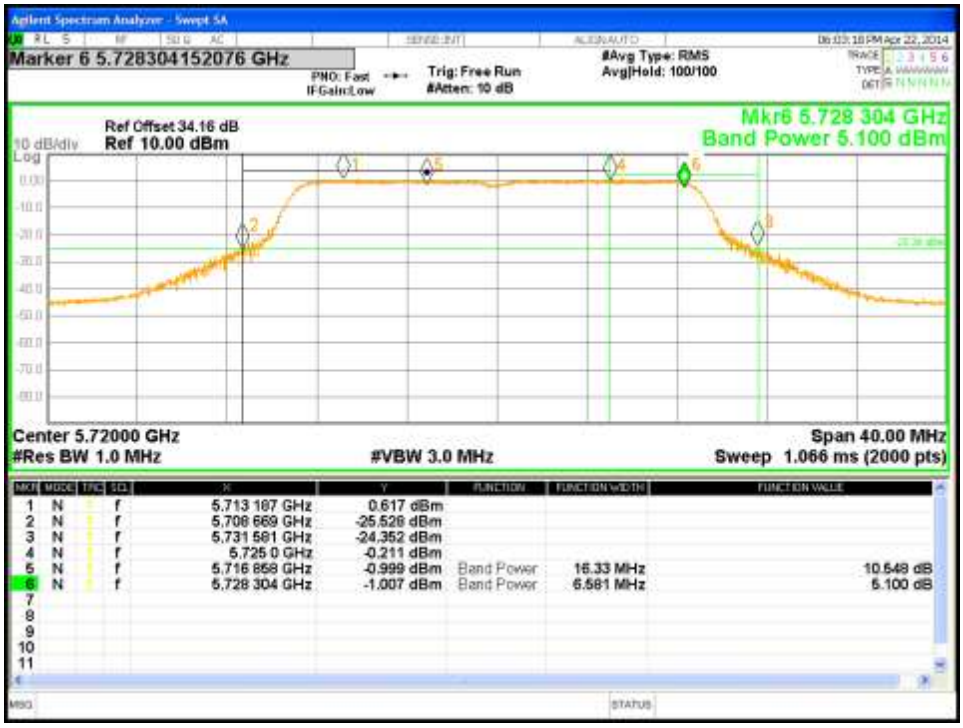

Figure 66: Maximum Conducted Output Power-5720MHz-VHT20-MCS0-Ch1

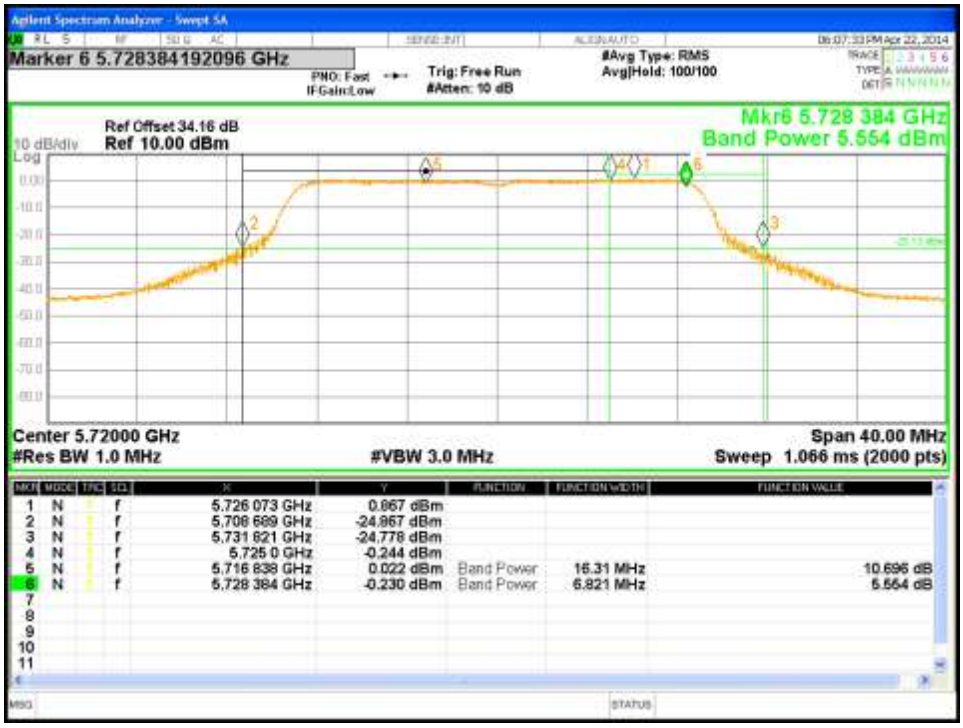

Figure 67: Maximum Conducted Output Power-5720MHz-VHT20-MCS0-Ch2

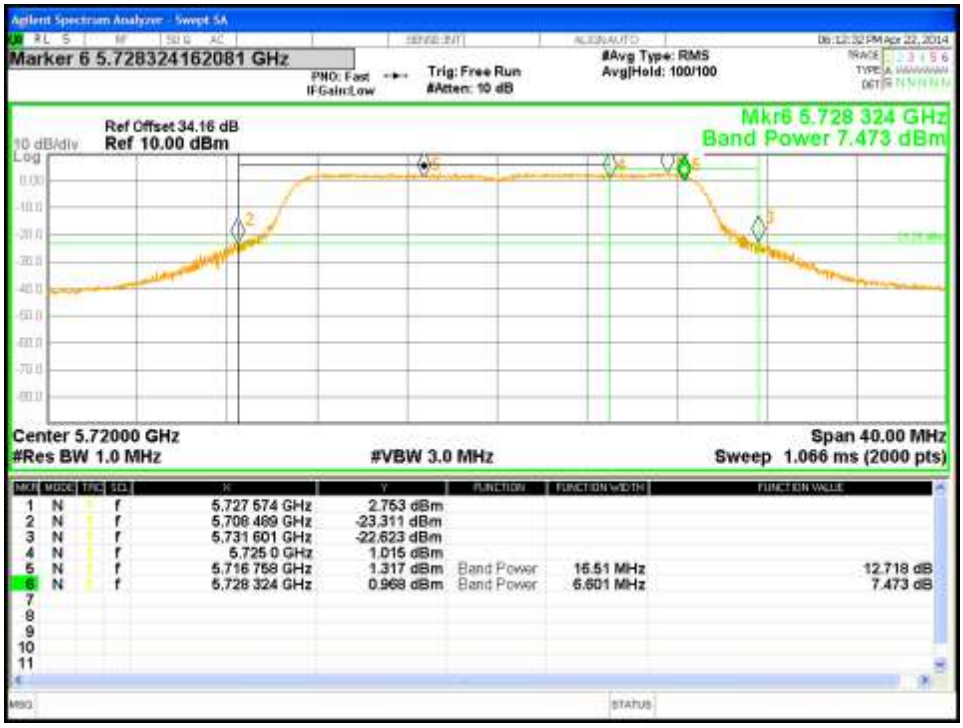

Figure 68: Maximum Conducted Output Power-5720MHz-VHT20-MCS0-Ch3

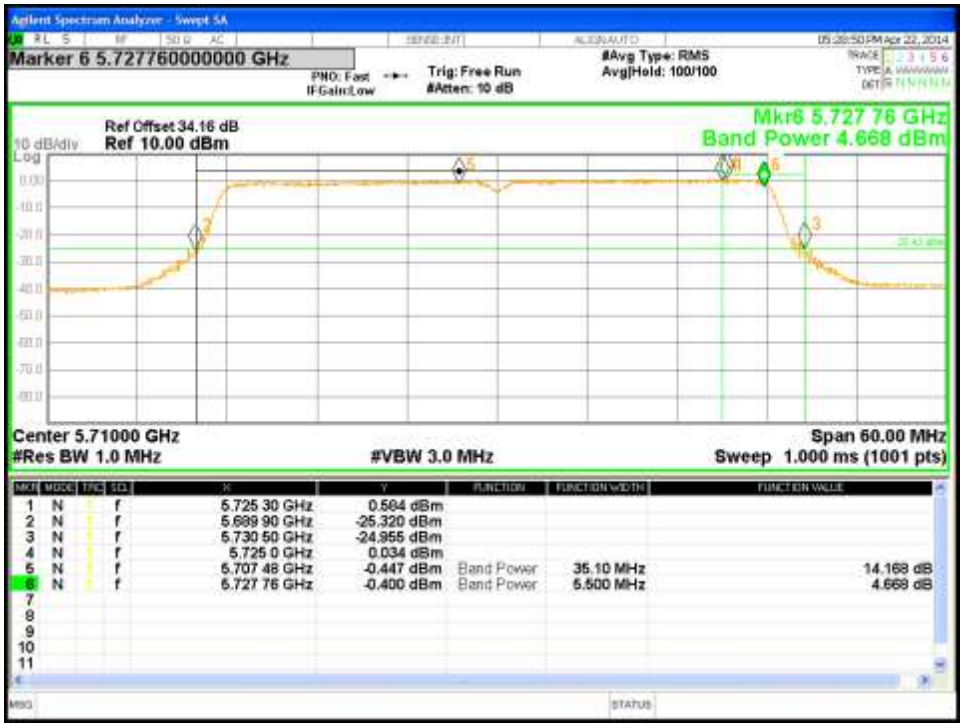

Figure 69: Maximum Conducted Output Power-5710MHz-VHT40-MCS0-Ch0

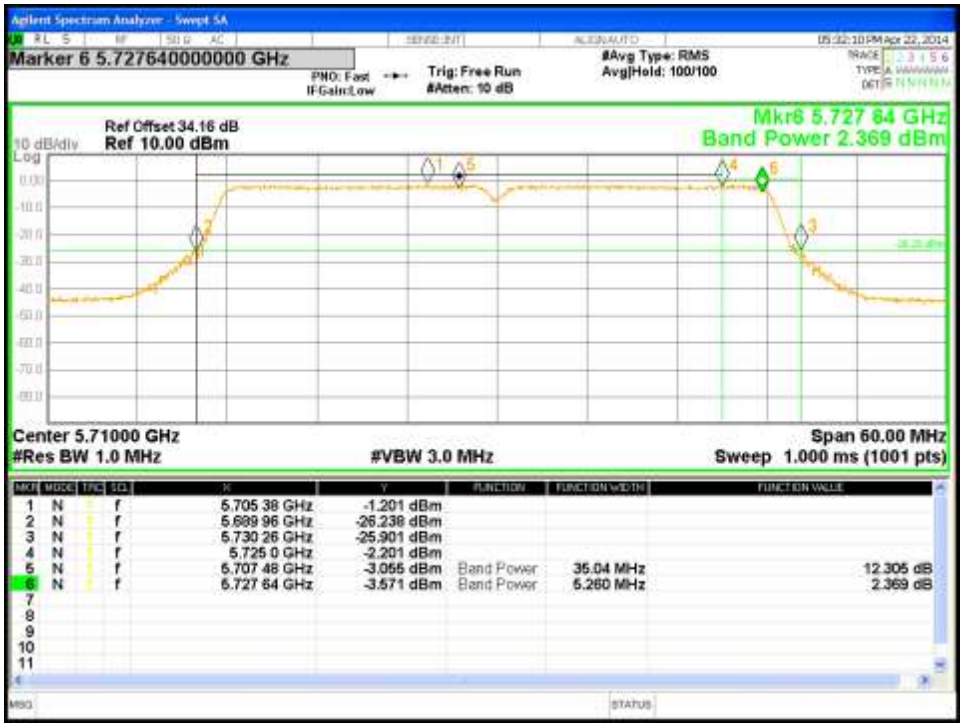

Figure 70: Maximum Conducted Output Power-5710MHz-VHT40-MCS0-Ch1

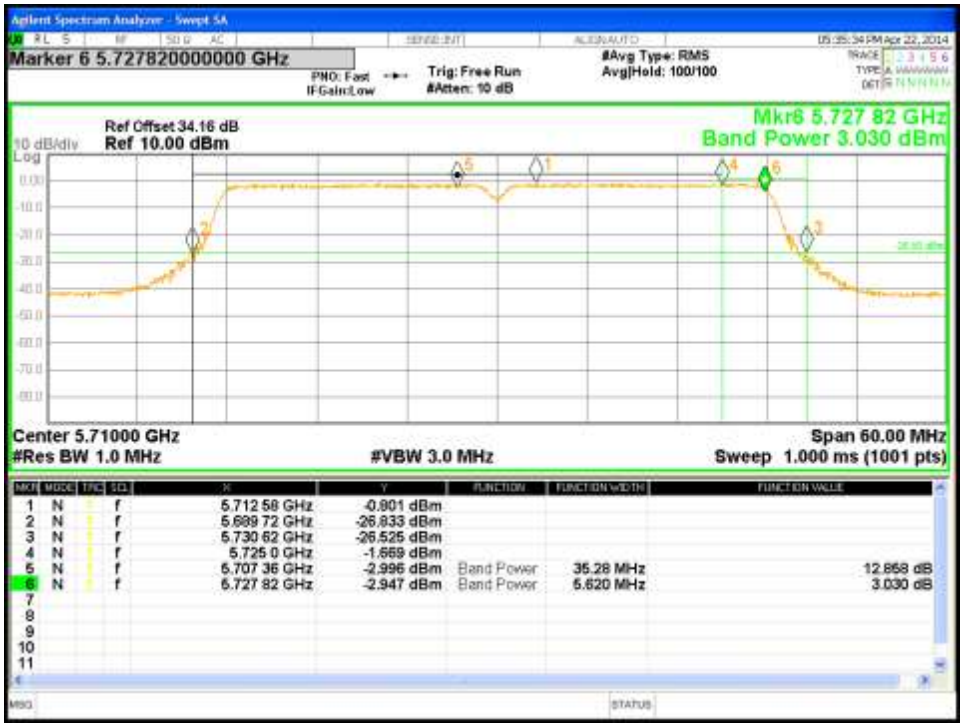

Figure 71: Maximum Conducted Output Power-5710MHz-VHT40-MCS0-Ch2

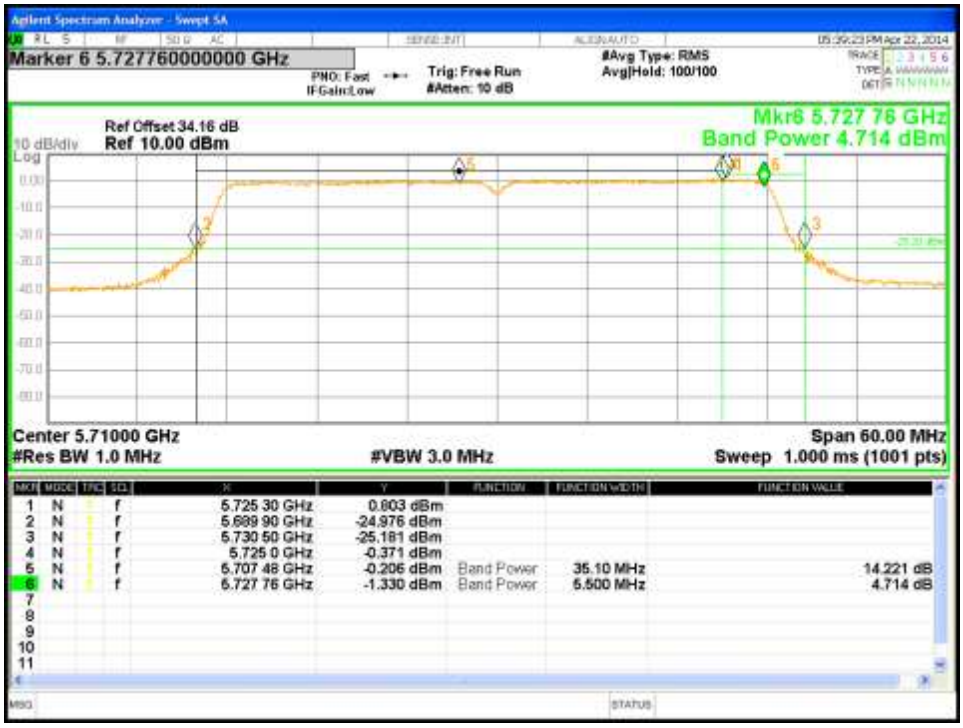

Figure 72: Maximum Conducted Output Power-5710MHz-VHT40-MCS0-Ch3

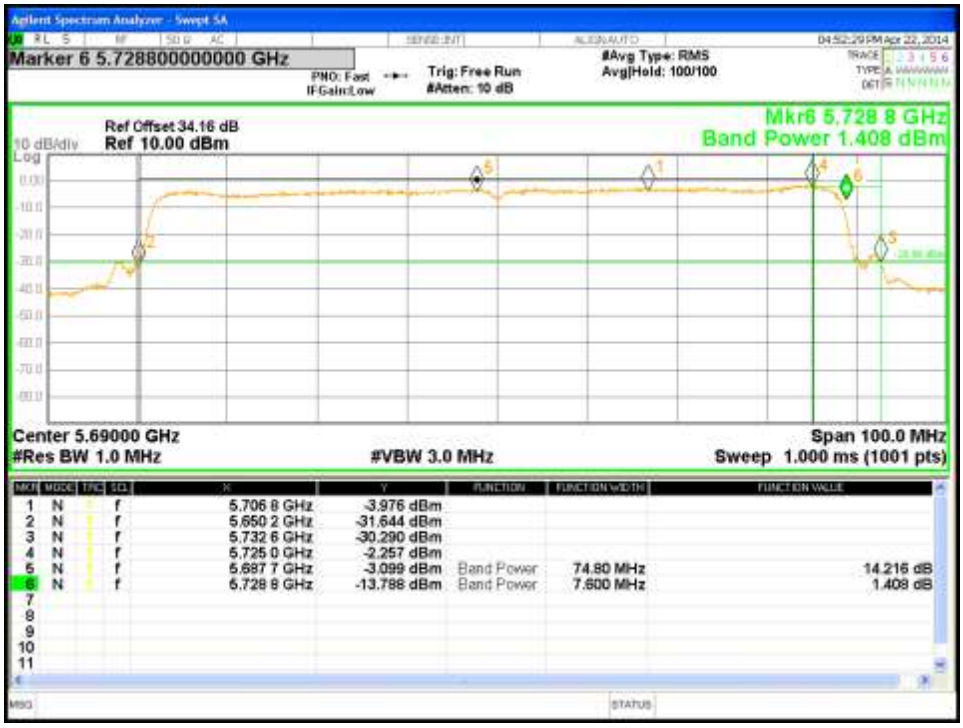

Figure 73: Maximum Conducted Output Power-5690MHz-VHT80-MCS0-Ch0

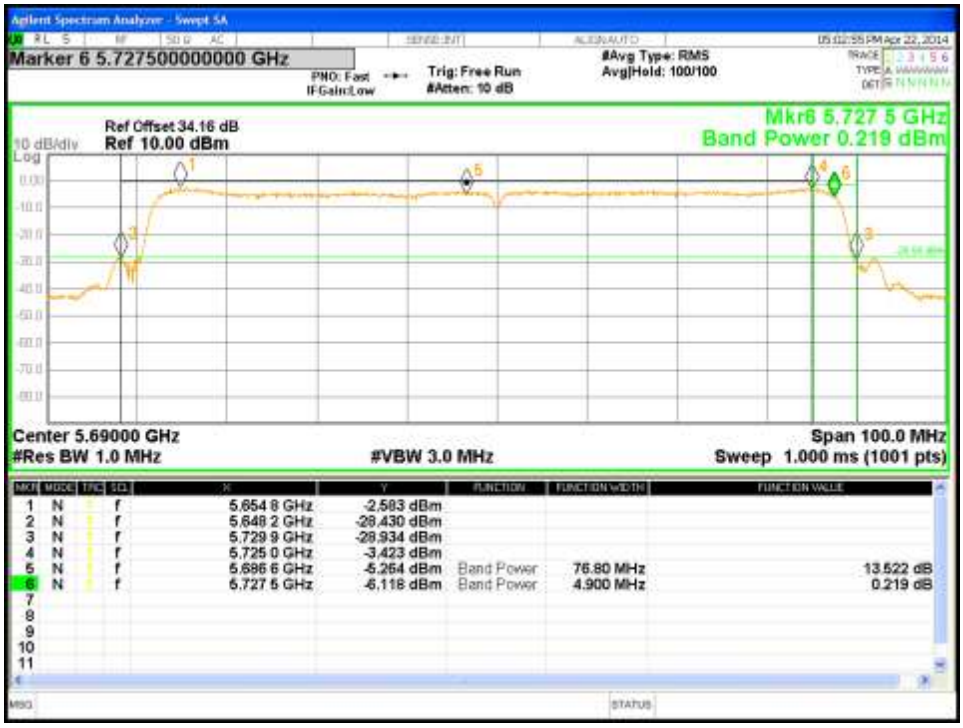

Figure 74: Maximum Conducted Output Power-5690MHz-VHT80-MCS0-Ch1

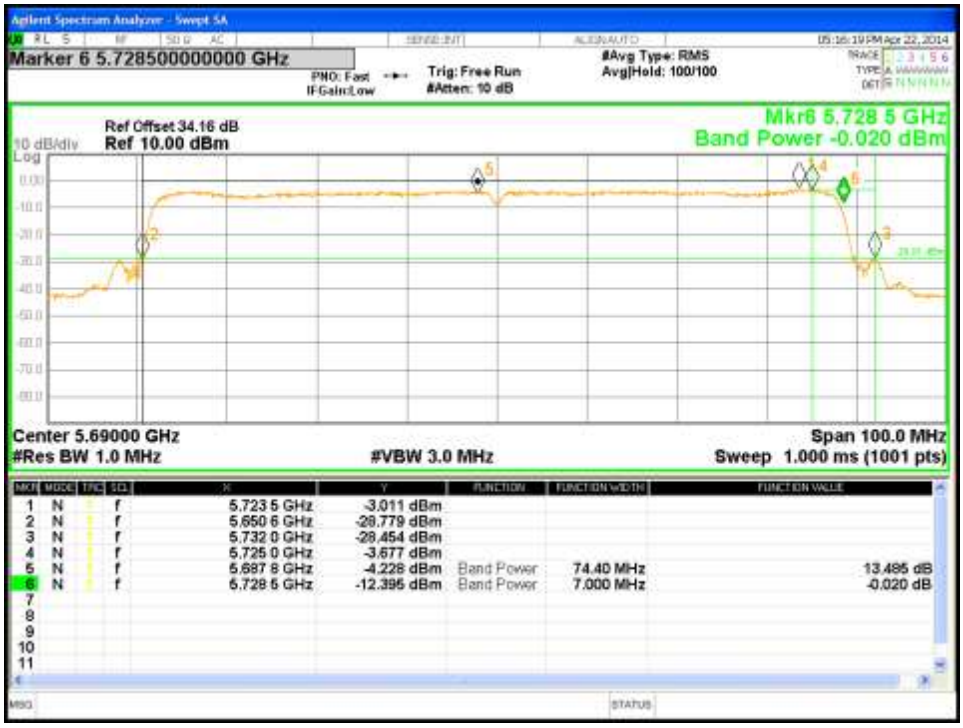

Figure 75: Maximum Conducted Output Power-5690MHz-VHT80-MCS0-Ch2

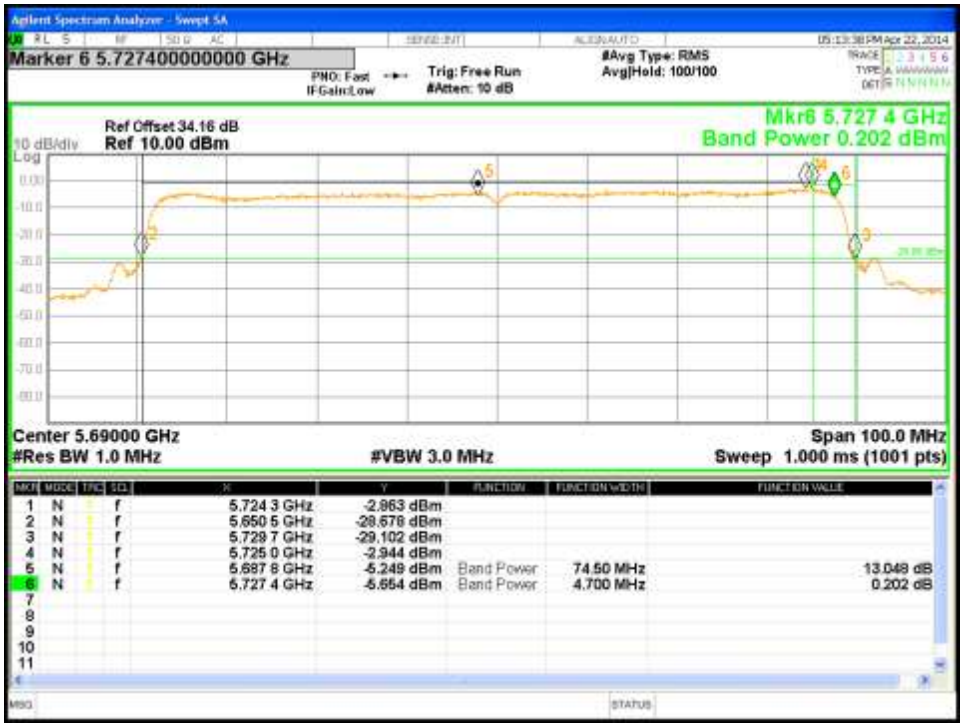

Figure 76: Maximum Conducted Output Power-5690MHz-VHT80-MCS0-Ch3

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The 26 dB bandwidth is defined the bandwidth of 26 dBr from highest transmitted level of the fundamental frequency.

There is no restriction limits for the bandwidth. The 26 dB bandwidth was used to determine the limit for maximum conducted output power per CFR47 Part 15.407(a).

To obtain the tighter limit,

4.2.1 **Test Method**

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.407(a) 2012 and RSS Gen Sect. 4.4.1:2010. The preliminary investigation was performed to find the narrowest 26 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 5470 MHz to 5725 MHz on the sample, S/N 121404000111. The results indicated below.

Test Setup:

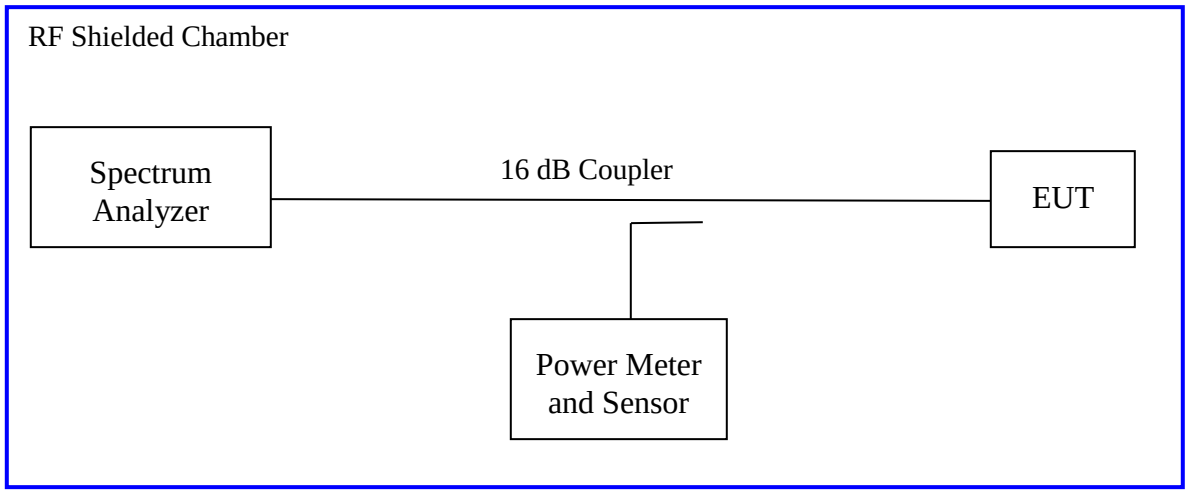

The crossing band channels for VHT20, VHT40, and VHT80 measured using the KDB 644545 D01 Guidance for IEEE802.11ac v01r02. Section F (1).

4.2.2 Results

These occupied bandwidth measurements were taken for references only.

Table 4: Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement				**Test Date:** April 29, 2014				
Antenna Type: Integrated				**Power Setting:** See test plan				
Directional Antenna Gain: + 8.08 dBi				**Signal State:** Modulated.				
Ambient Temp.: 23 °C				**Relative Humidity:**31%				
Bandwidth (MHz) for 802.11a								
Freq. (MHz)	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
5500	16.899	17.034	16.927	17.026	22.963	23.589	23.275	23.839
5580	16.968	17.035	16.943	16.957	23.190	23.518	23.330	23.677
5700	16.953	16.941	16.953	16.898	23.310	23.273	22.834	23.532
Note: The bandwidth was measured at 6 Mbps for 802.11a mode.								
Bandwidth (MHz) for 802.11n HT20								
Freq. (MHz)	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
5500	18.246	18.241	18.265	18.218	24.616	24.754	24.541	24.650
5580	18.250	18.223	18.261	18.207	24.469	24.826	24.515	24.730
5700	18.269	18.225	18.266	18.251	24.525	24.801	24.540	24.660
Note: The bandwidth was measured at 6.5 Mbps for 802.11n HT20 mode.								
Bandwidth (MHz) for 802.11n HT40								
Freq. (MHz)	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
5510	36.571	36.514	36.513	36.523	42.748	42.718	42.841	42.763
5550	36.526	36.512	36.500	36.525	42.754	42.806	42.822	42.638
5670	36.517	36.563	36.523	36.580	42.770	42.908	42.790	42.923
Note: The bandwidth was measured at 13.5 Mbps for 802.11n HT40 mode.								

Bandwidth (MHz) for 802.11ac VHT20								
Freq. (MHz)	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
5500	18.293	18.223	18.324	18.201	24.594	24.627	24.580	24.667
5580	18.310	18.201	18.313	18.189	24.617	24.899	24.570	24.651
5700	18.313	18.197	18.317	18.228	24.675	24.513	24.529	24.427
Note: The bandwidth was measured for 802.11ac VHT20 mode at MCS0.								
Bandwidth (MHz) for 802.11ac VHT40								
Freq. (MHz)	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
5510	36.571	36.644	36.532	36.628	42.827	43.207	42.804	43.010
5550	36.543	36.633	36.518	36.644	42.819	43.014	42.680	42.955
5670	36.522	36.683	36.521	36.697	42.823	43.164	42.763	43.240
Note: The bandwidth was measured for 802.11ac VHT40 mode at MCS0.								
Bandwidth (MHz) for 802.11ac VHT80								
Freq. (MHz)	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
5530	75.403	75.402	75.436	75.446	84.103	84.220	84.394	84.518
Note: The bandwidth was measured for 802.11ac VHT80 mode at MCS0.								

Band Crossing Channel Per KDB 644545 D01								
Bandwidth (MHz) for 802.11ac VHT20 (5720 MHz)								
Band	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
UNII2c	14.168	14.108	14.168	14.048	16.820	16.940	16.820	16.700
UNII3	4.349	4.289	4.349	4.349	7.480	7.570	7.390	7.570
Total	18.517	18.397	18.517	18.397	24.300	24.510	24.210	24.270
Note: The bandwidth was measured for 802.11ac VHT20 mode at MCS0.								
Bandwidth (MHz) for 802.11ac VHT40 (5710 MHz)								
Band	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
UNII2c	33.287	33.487	33.287	33.487	35.780	36.080	36.110	36.02
UNII3	3.387	3.387	3.387	3.387	6.340	5.800	5.950	6.250
Total	36.673	36.874	36.673	36.874	42.120	41.880	42.060	42.270
Note: The bandwidth was measured for 802.11ac VHT40 mode at MCS0.								
Bandwidth (MHz) for 802.11ac VHT80 (5690 MHz)								
Band	**99% Bandwidth (MHz)**				**26 dB Bandwidth (MHz)**			
	Ch0	**Ch1**	**Ch2**	**Ch3**	**Ch0**	**Ch1**	**Ch2**	**Ch3**
UNII2c	72.776	72.976	72.778	72.778	76.840	77.140	77.140	76.790
UNII3	2.976	2.776	2.776	2.776	7.200	7.250	6.900	7.100
Total	75.752	75.751	75.553	75.553	84.040	84.390	84.040	83.890
Note: The bandwidth was measured for 802.11ac VHT80 mode at MCS0.								

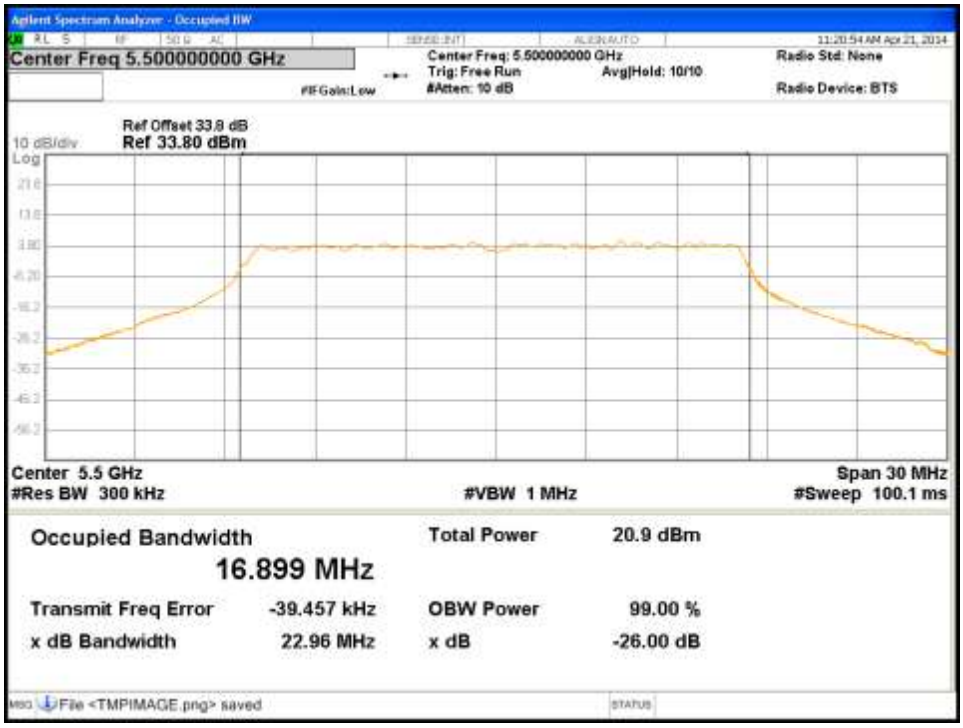

Figure 77: Occupied Bandwidth-5500MHz-11a-6Mbps-Ch0

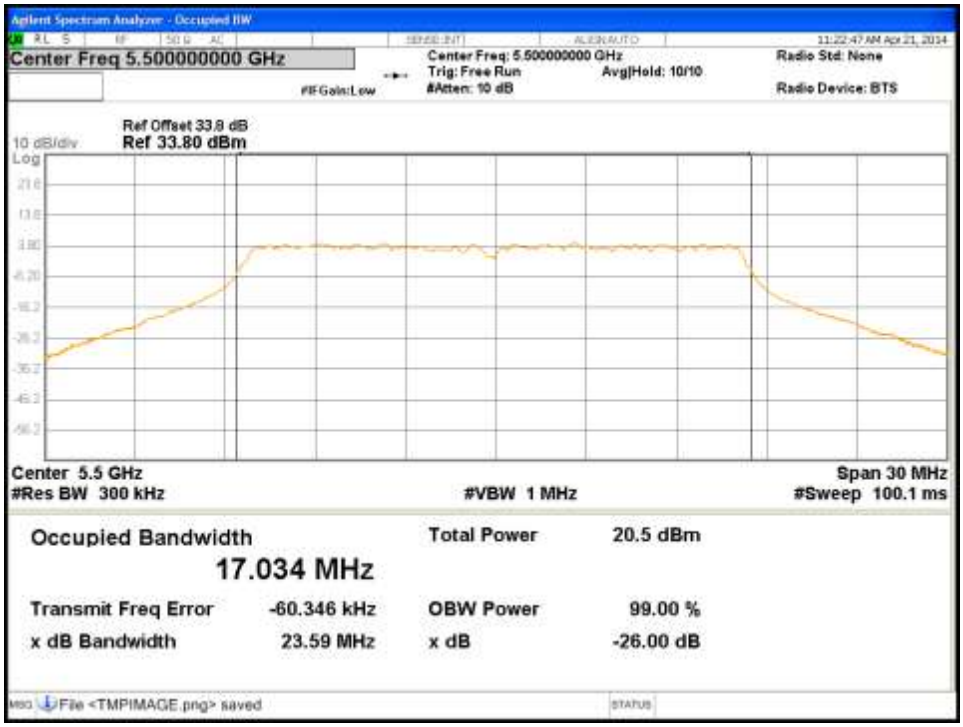

Figure 78: Occupied Bandwidth-5500MHz-11a-6Mbps-Ch1

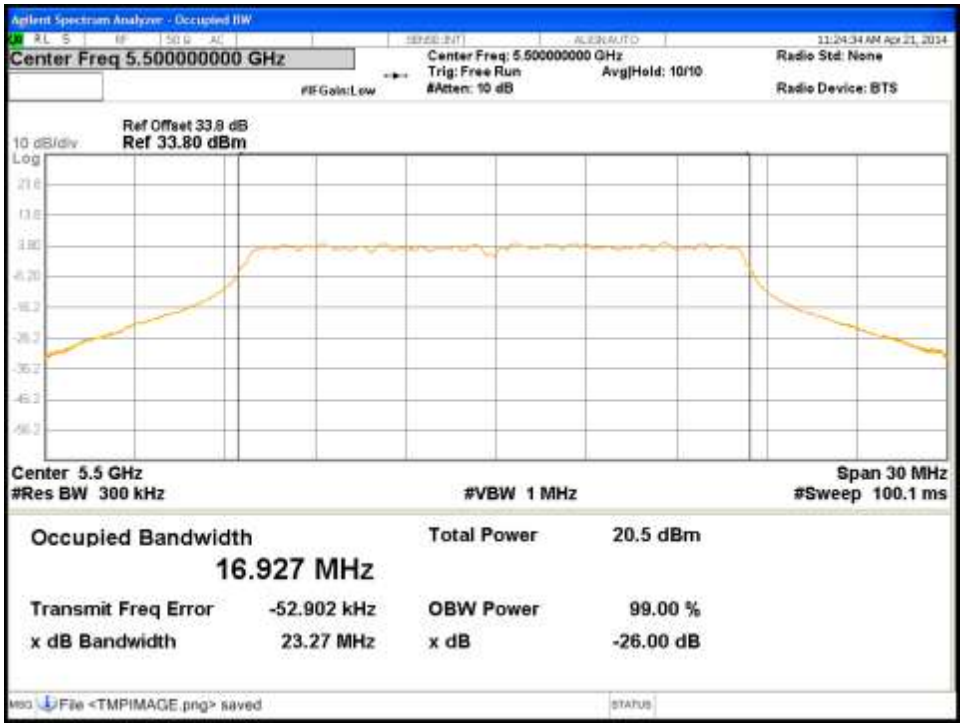

Figure 79: Occupied Bandwidth-5500MHz-11a-6Mbps-Ch2

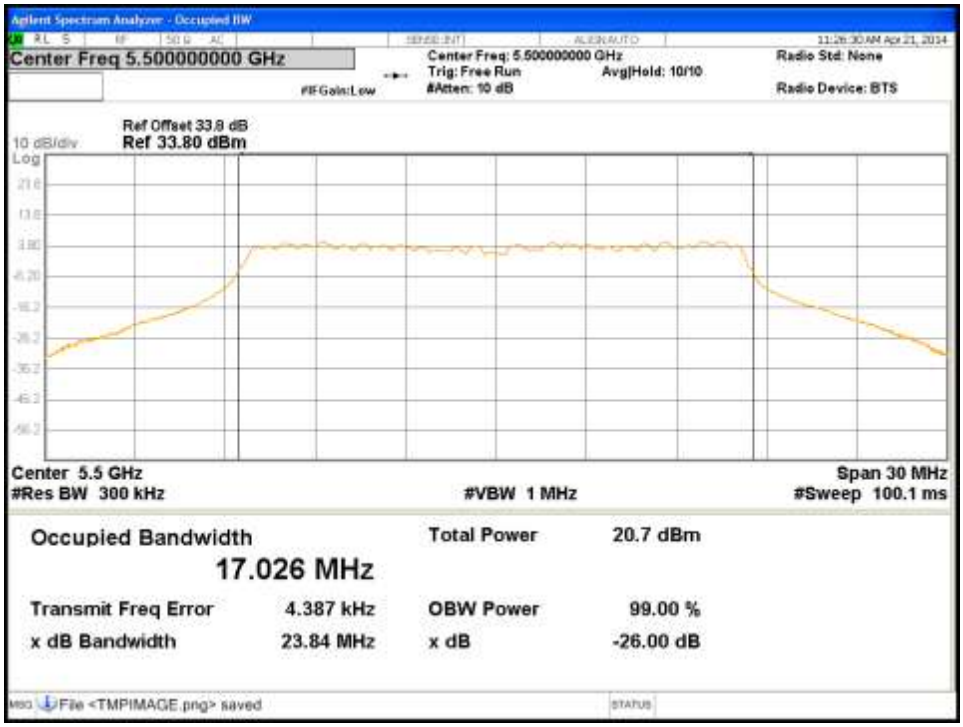

Figure 80: Occupied Bandwidth-5500MHz-11a-6Mbps-Ch3

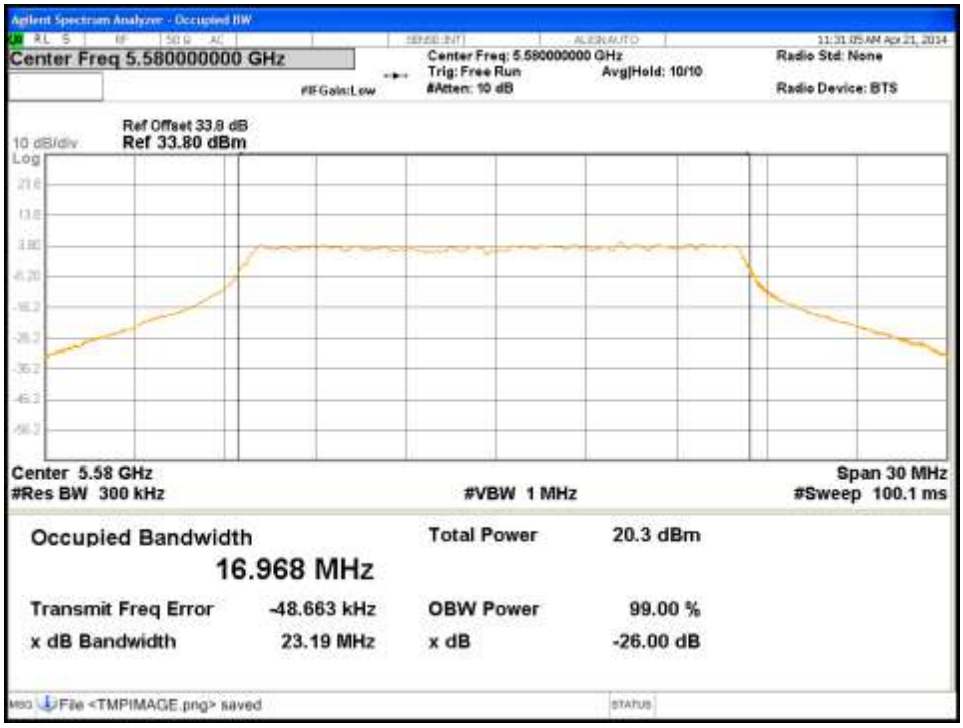

Figure 81: Occupied Bandwidth-5580MHz-11a-6Mbps-Ch0

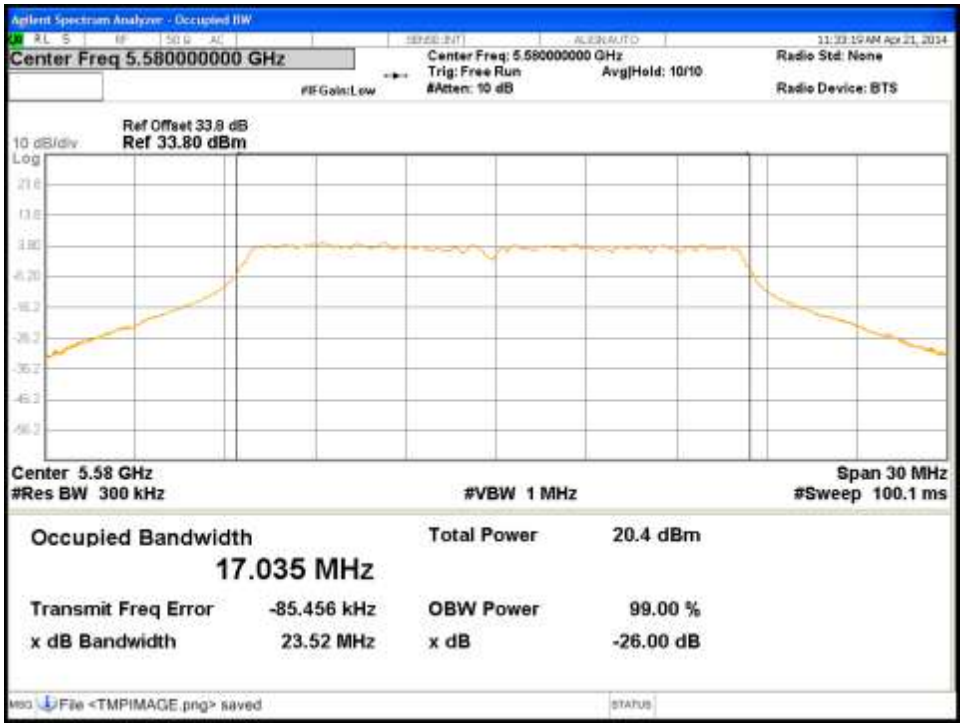

Figure 82: Occupied Bandwidth-5580MHz-11a-6Mbps-Ch1

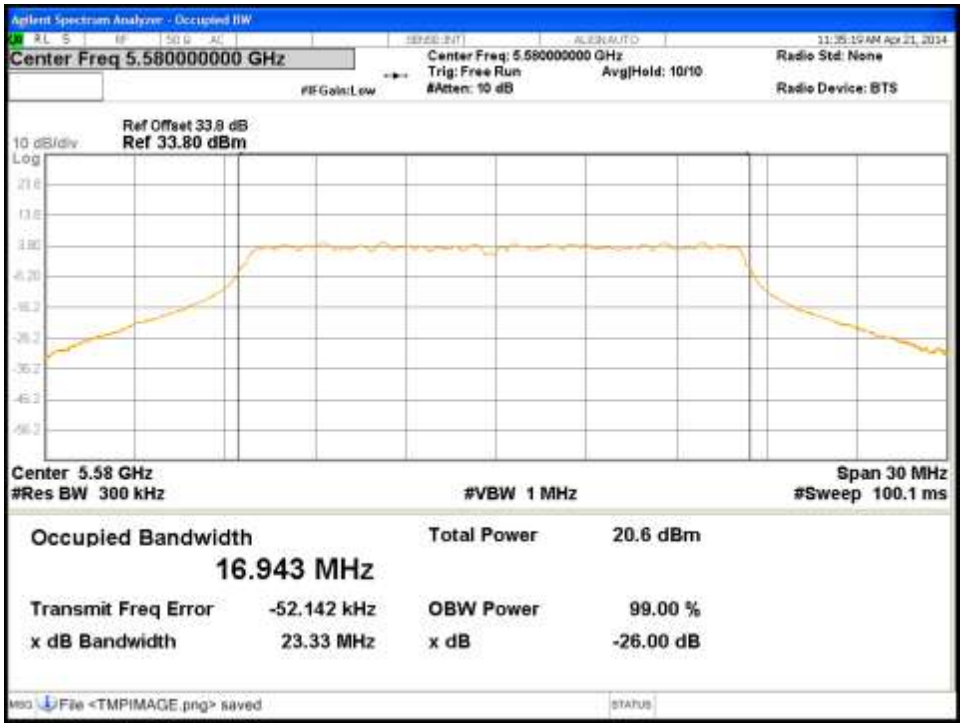

Figure 83: Occupied Bandwidth-5580MHz-11a-6Mbps-Ch2

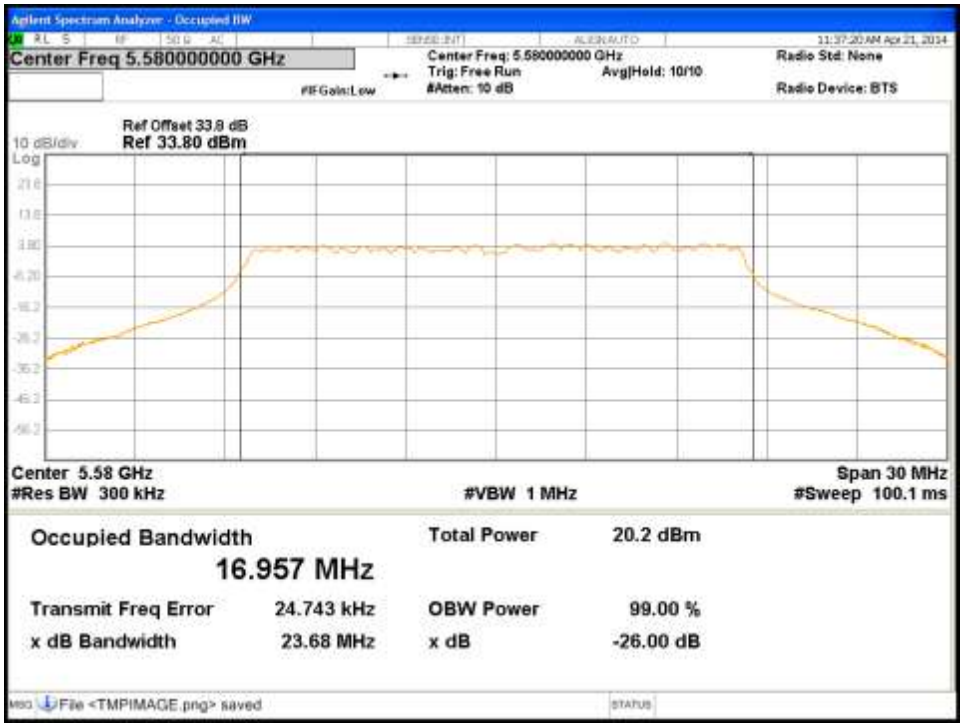

Figure 84: Occupied Bandwidth-5580MHz-11a-6Mbps-Ch3

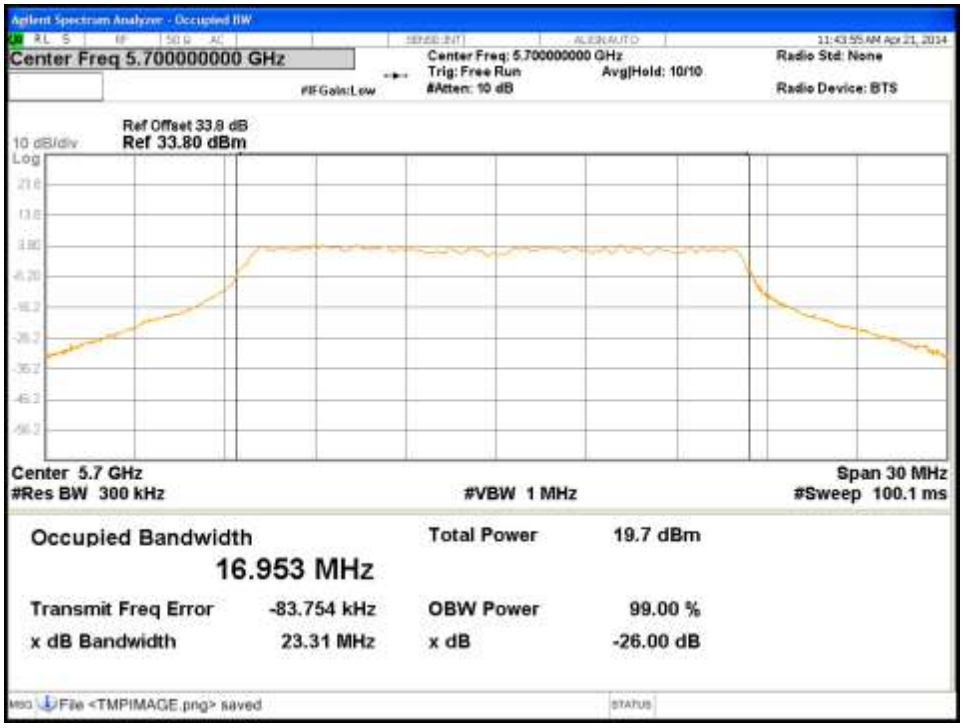

Figure 85: Occupied Bandwidth-5700MHz-11a-6Mbps-Ch0

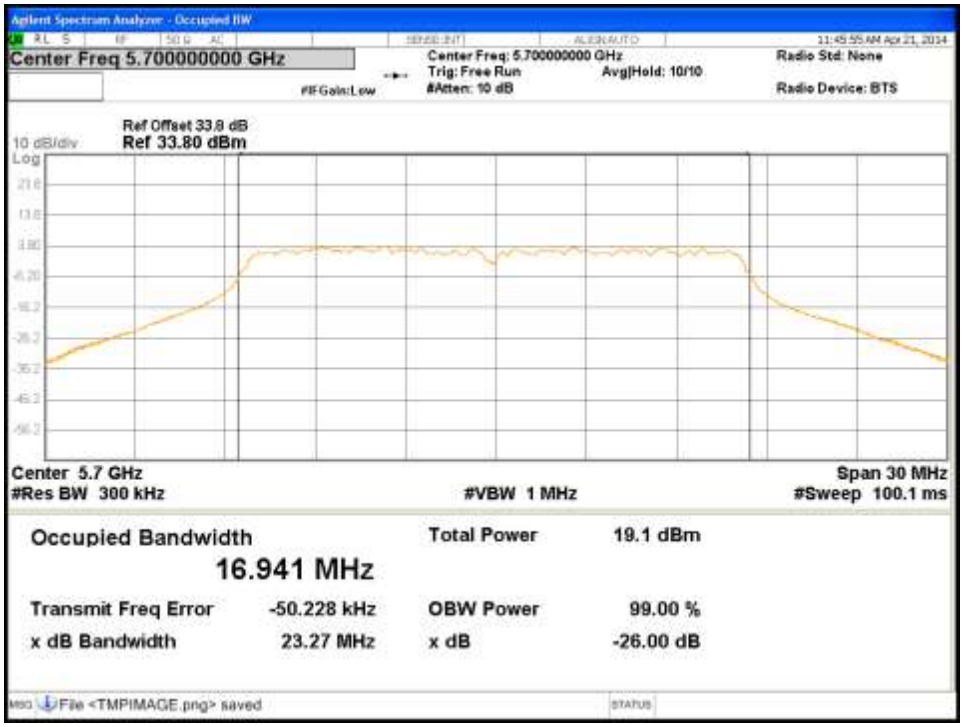

Figure 86: Occupied Bandwidth-5700MHz-11a-6Mbps-Ch1

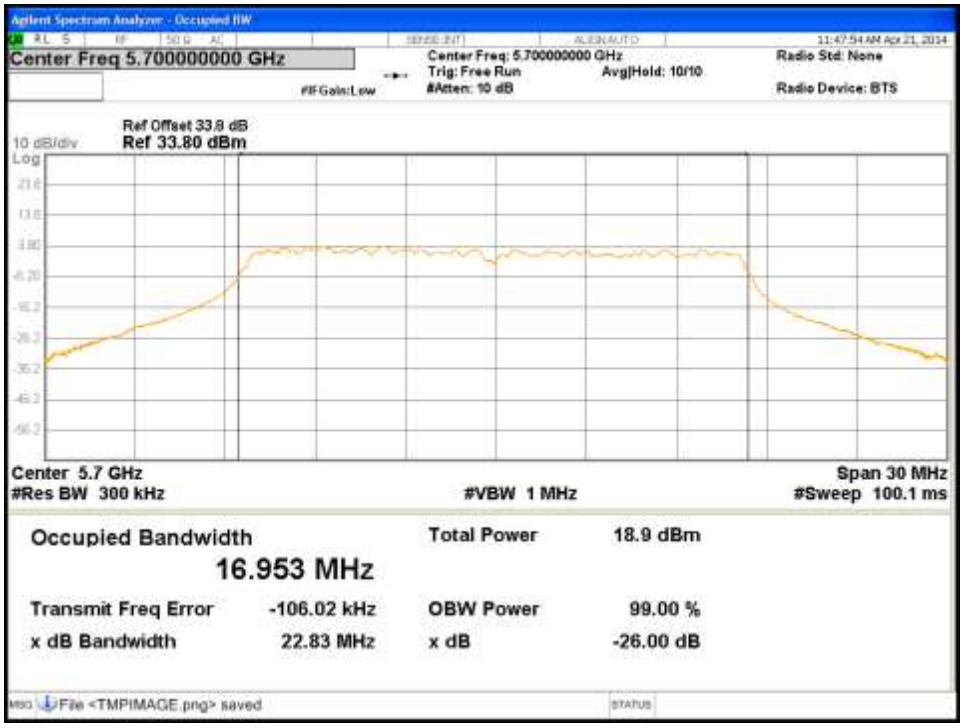

Figure 87: Occupied Bandwidth-5700MHz-11a-6Mbps-Ch2

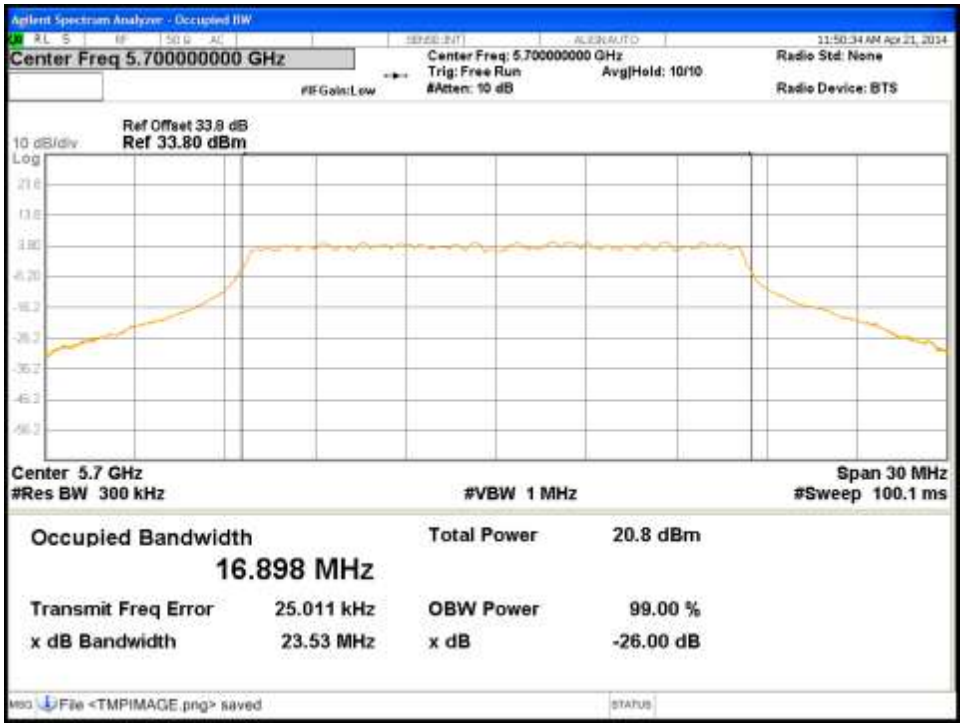

Figure 88: Occupied Bandwidth-5700MHz-11a-6Mbps-Ch3

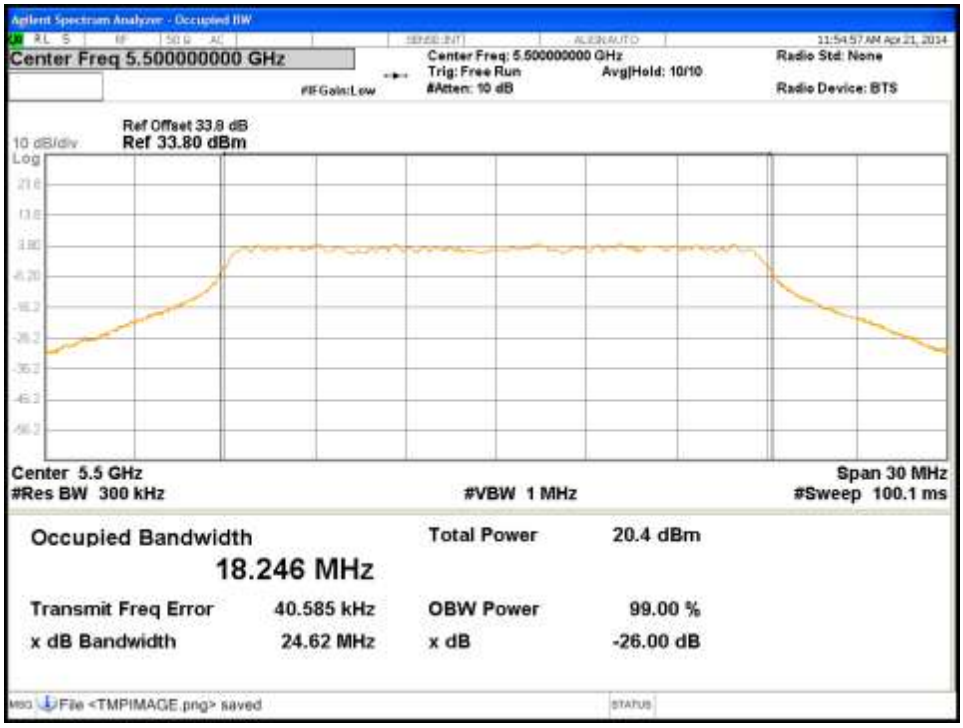

Figure 89: Occupied Bandwidth-5500MHz-HT20-MCS0-Ch0

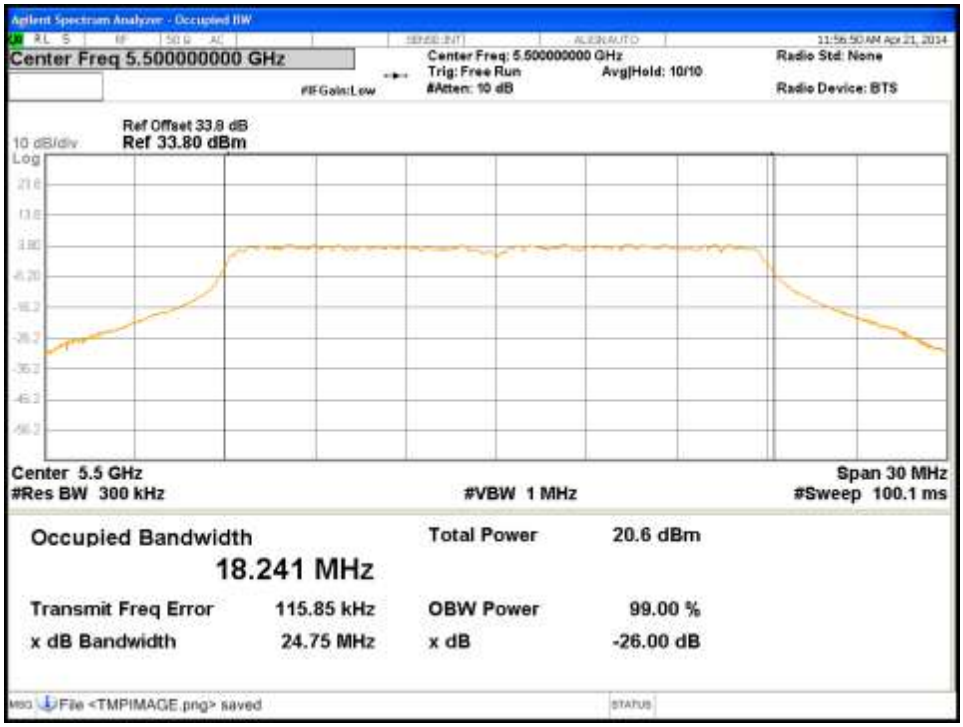

Figure 90: Occupied Bandwidth-5500MHz-HT20-MCS0-Ch1

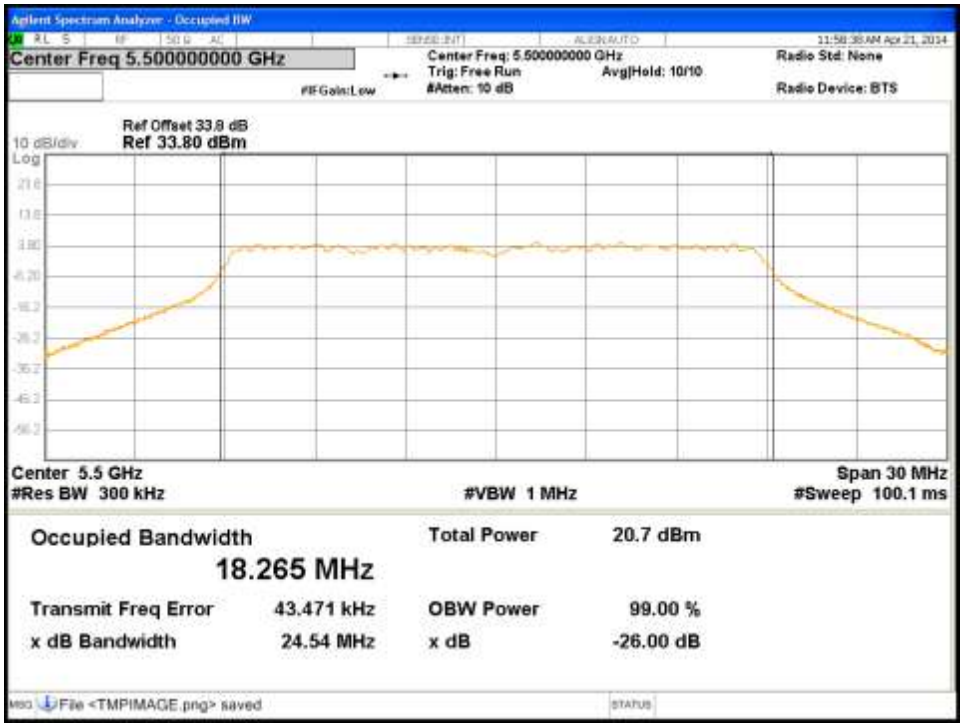

Figure 91: Occupied Bandwidth-5500MHz-HT20-MCS0-Ch2

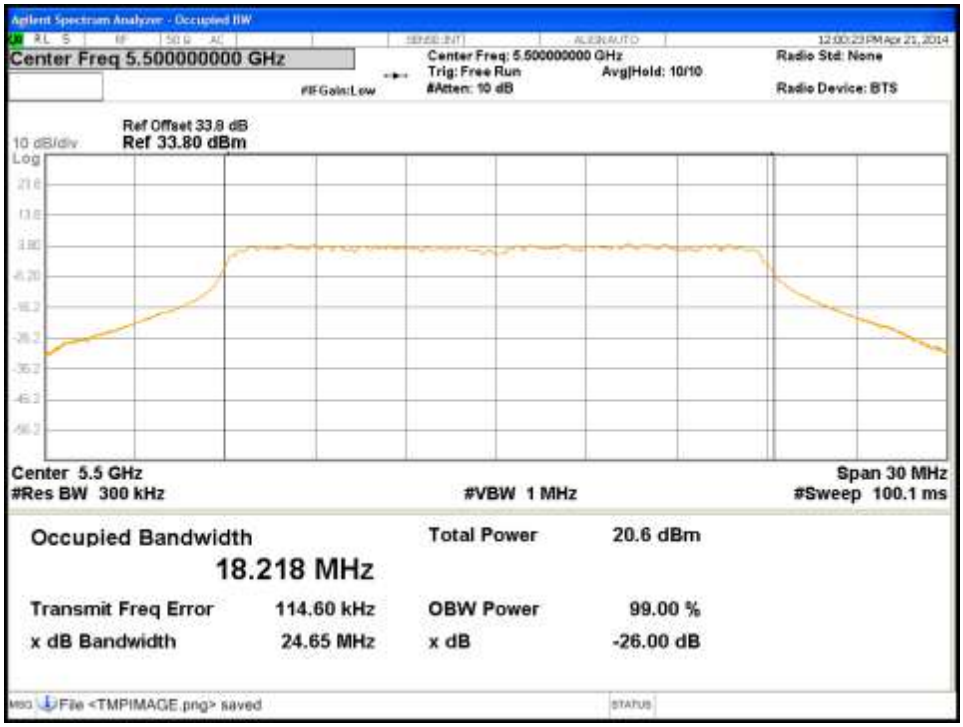

Figure 92: Occupied Bandwidth-5500MHz-HT20-MCS0-Ch3

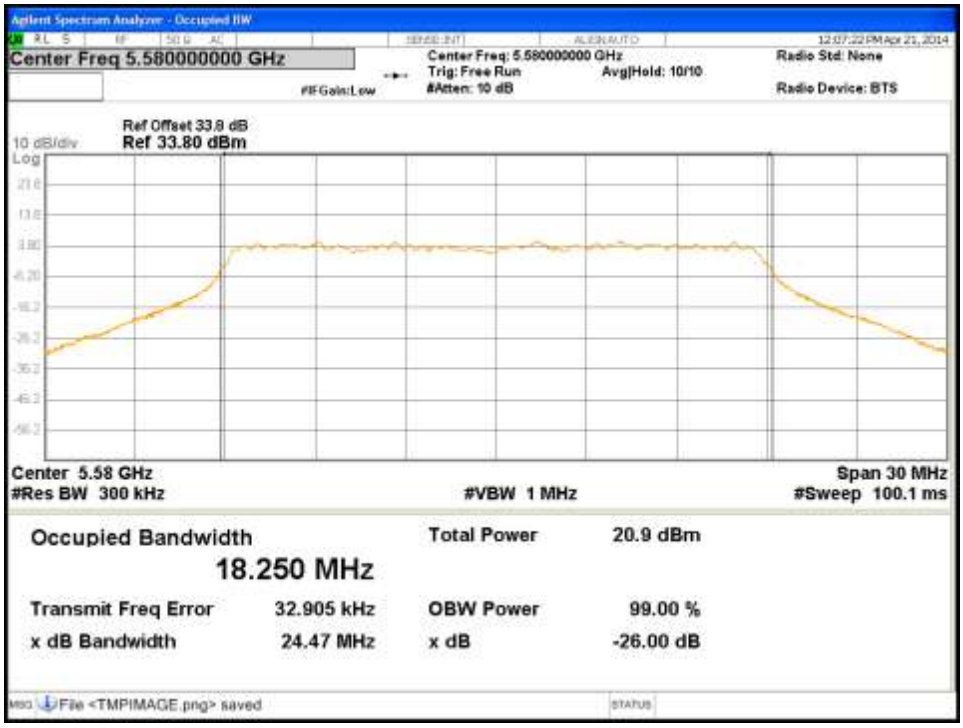

Figure 93: Occupied Bandwidth-5580MHz-HT20-MCS0-Ch0

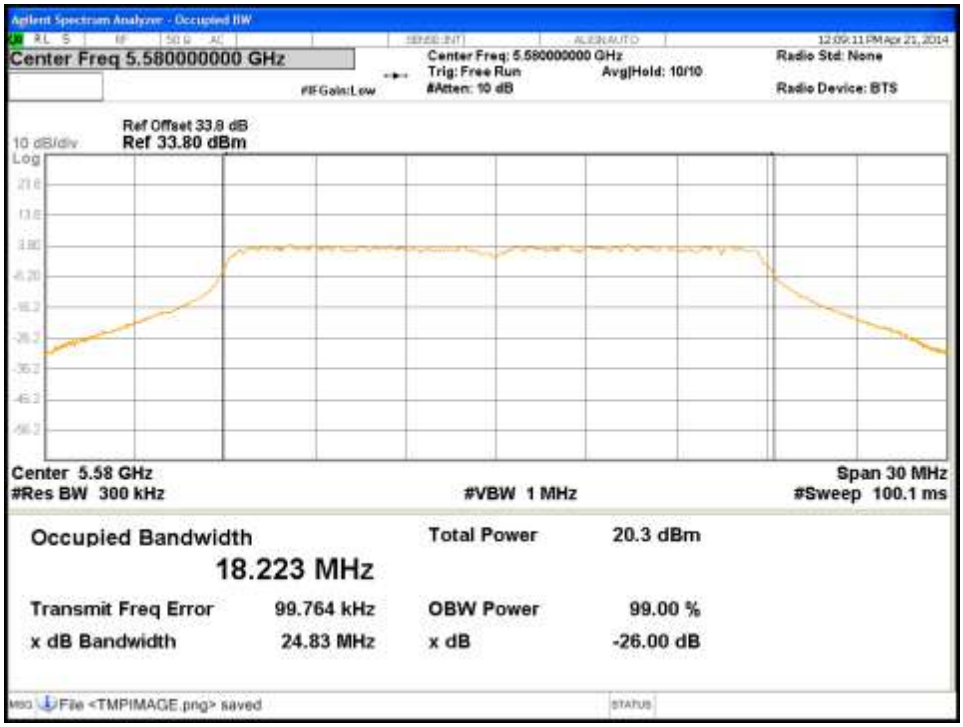

Figure 94: Occupied Bandwidth-5580MHz-HT20-MCS0-Ch1

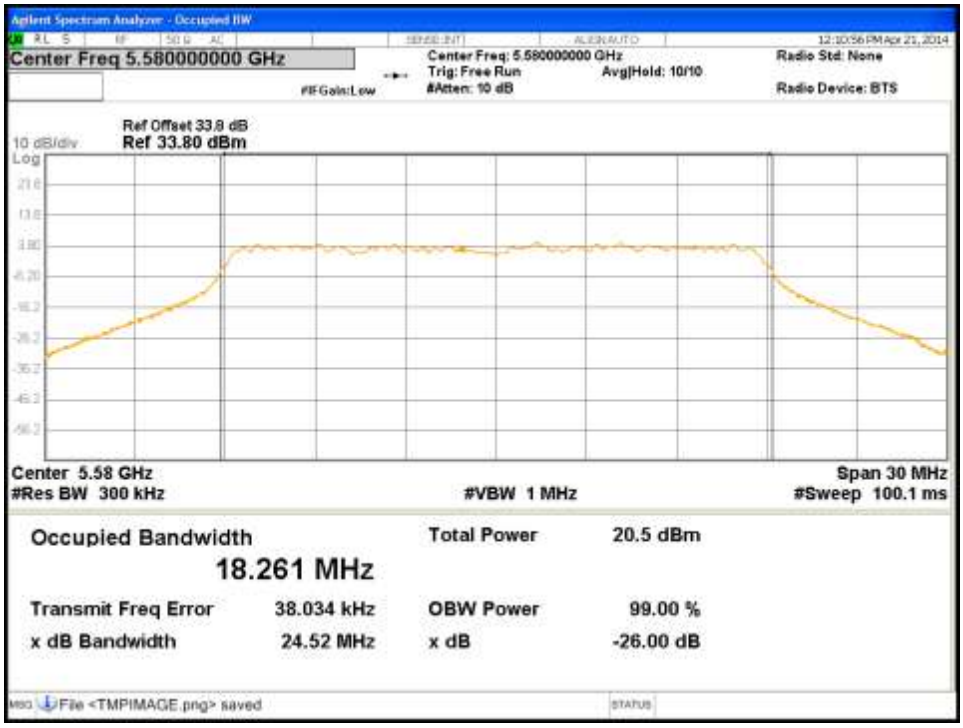

Figure 95: Occupied Bandwidth-5580MHz-HT20-MCS0-Ch2

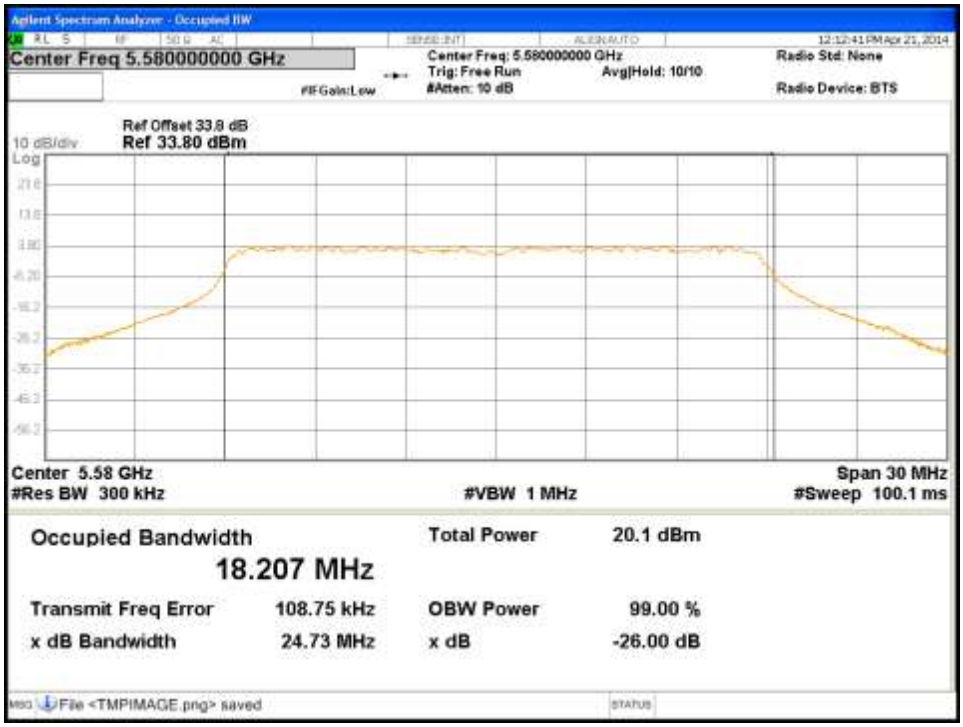

Figure 96: Occupied Bandwidth-5580MHz-HT20-MCS0-Ch3

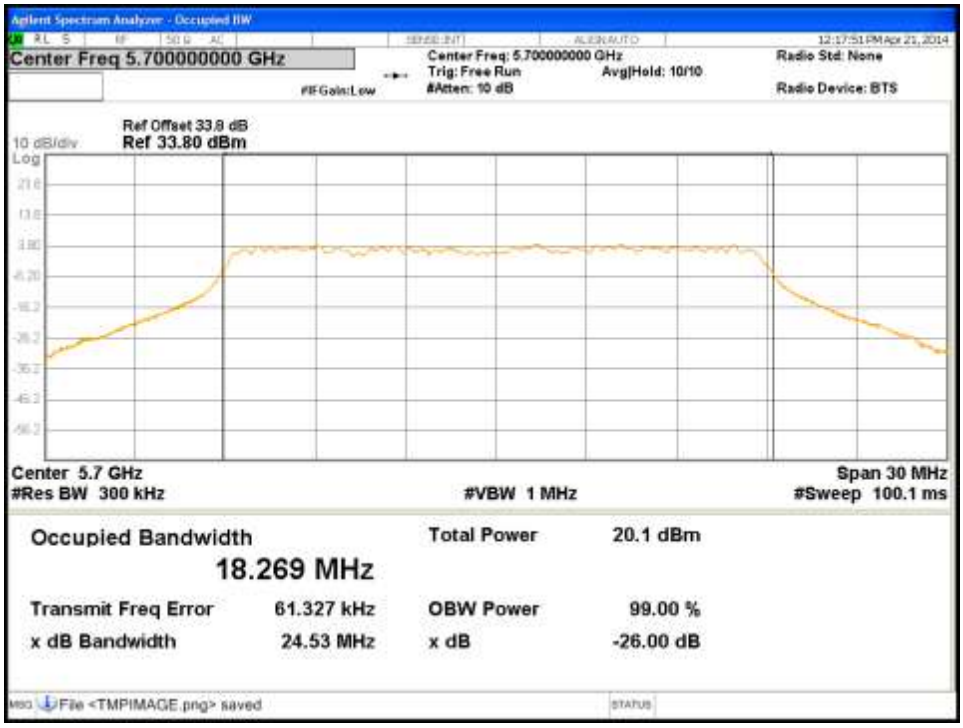

Figure 97: Occupied Bandwidth-5700MHz-HT20-MCS0-Ch0

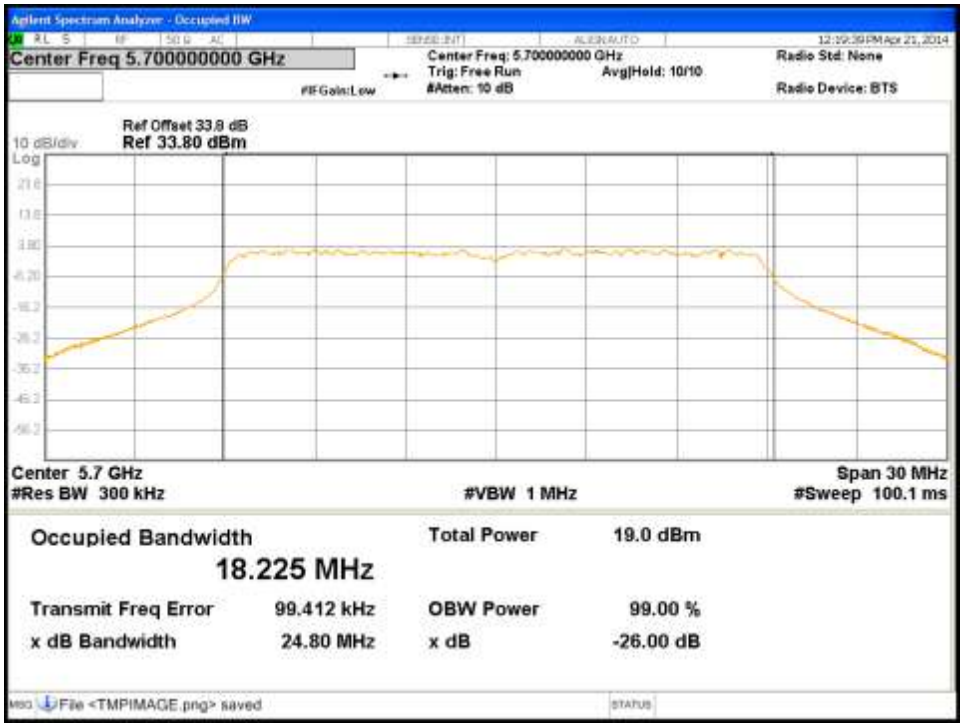

Figure 98: Occupied Bandwidth-5700MHz-HT20-MCS0-Ch1

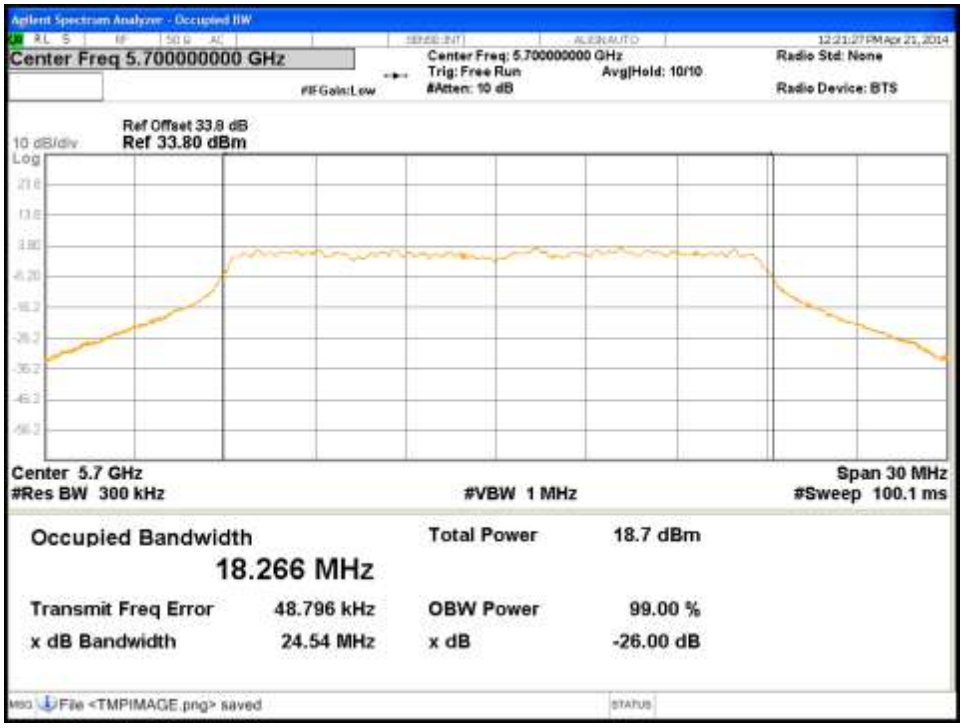

Figure 99: Occupied Bandwidth-5700MHz-HT20-MCS0-Ch2

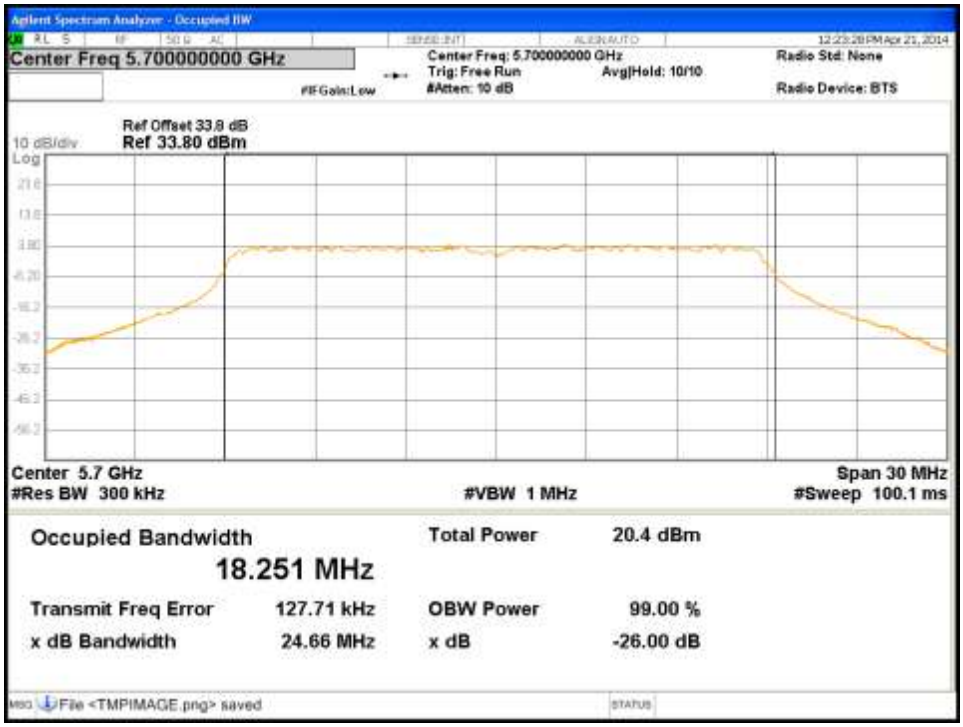

Figure 100: Occupied Bandwidth-5700MHz-HT20-MCS0-Ch3

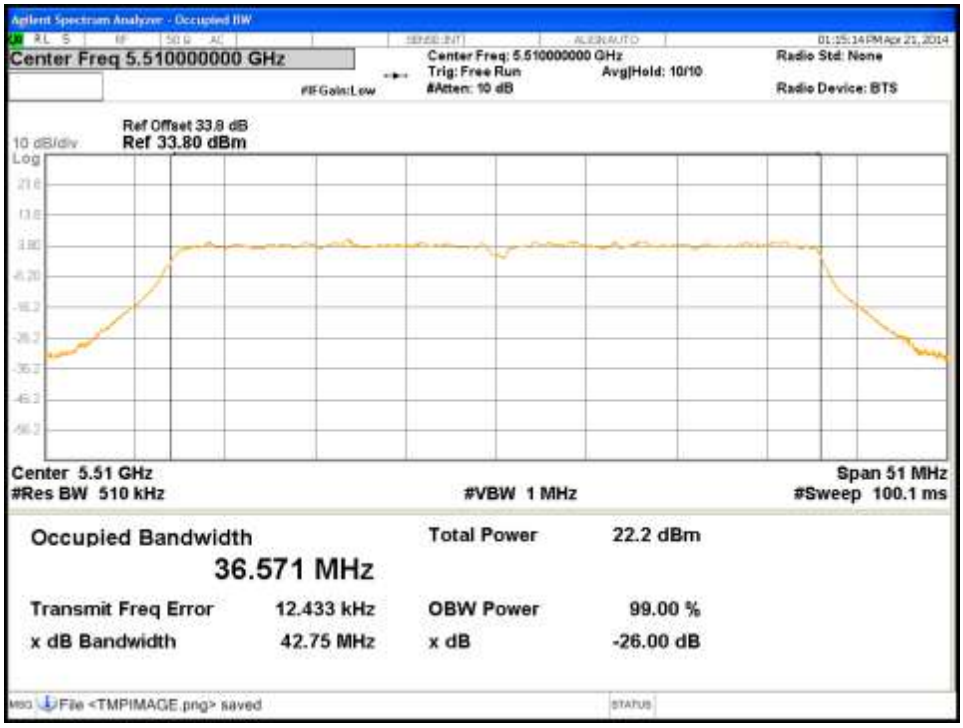

Figure 101: Occupied Bandwidth-5510MHz-HT40-MCS0-Ch0

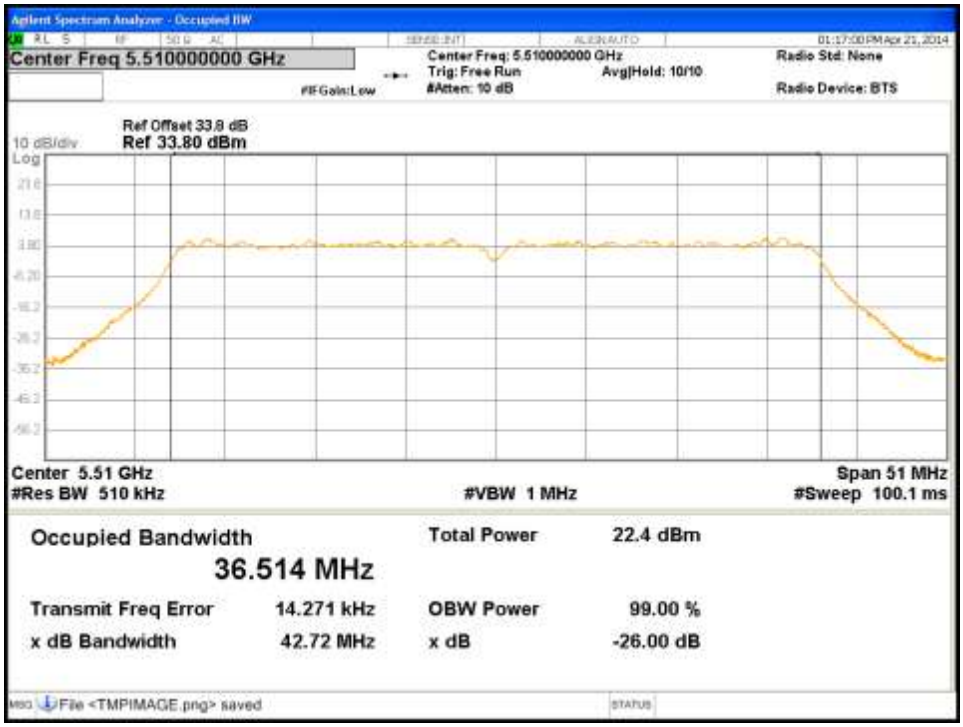

Figure 102: Occupied Bandwidth-5510MHz-HT40-MCS0-Ch1

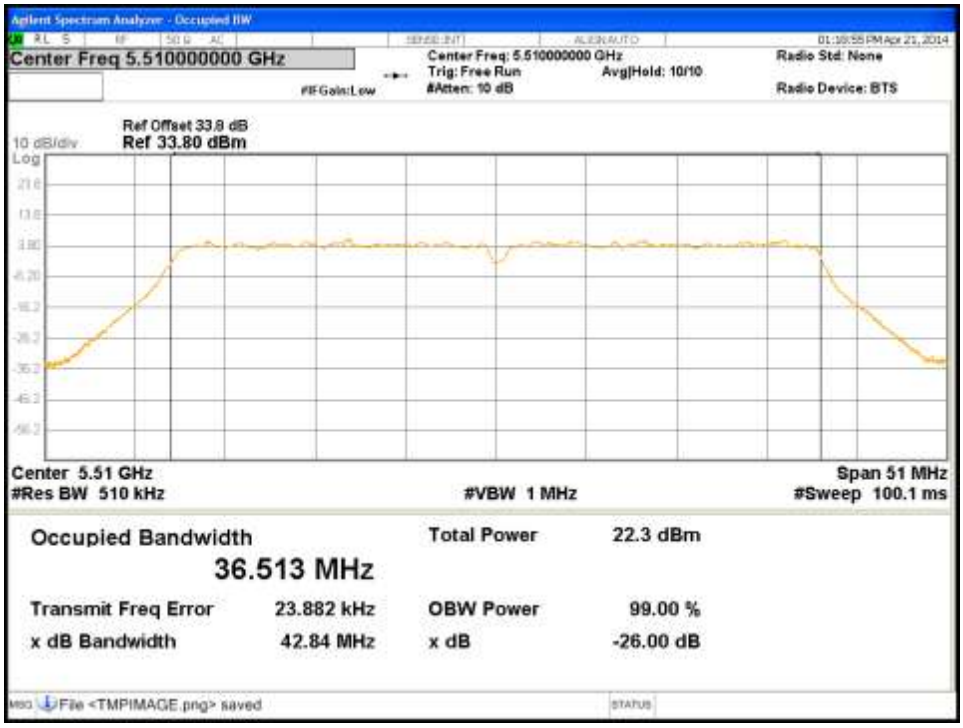

Figure 103: Occupied Bandwidth-5510MHz-HT40-MCS0-Ch2

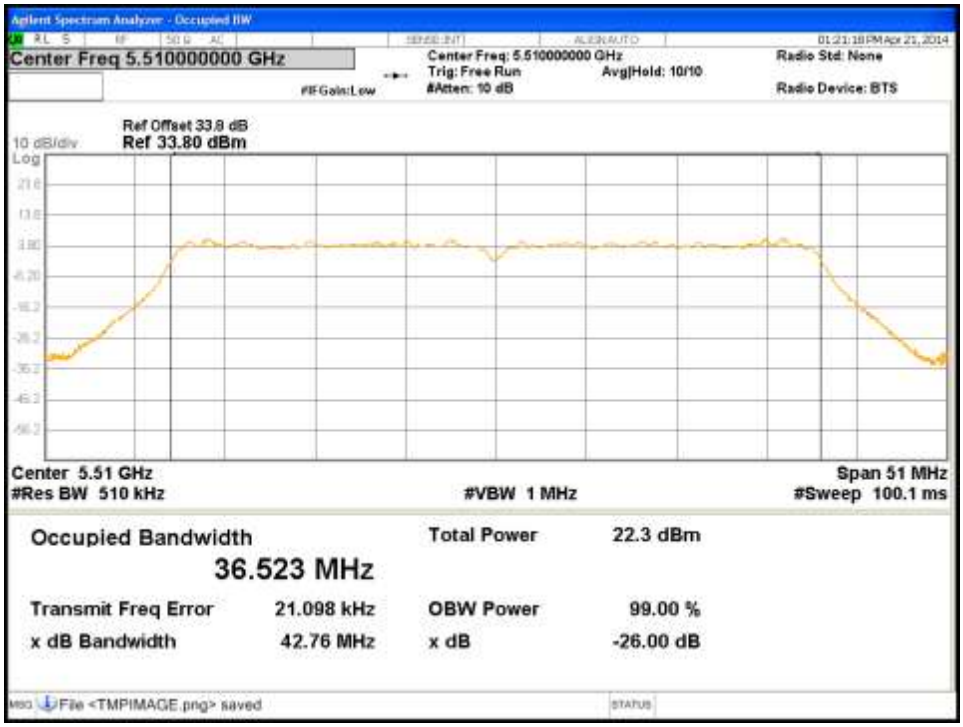

Figure 104: Occupied Bandwidth-5510MHz-HT40-MCS0-Ch3

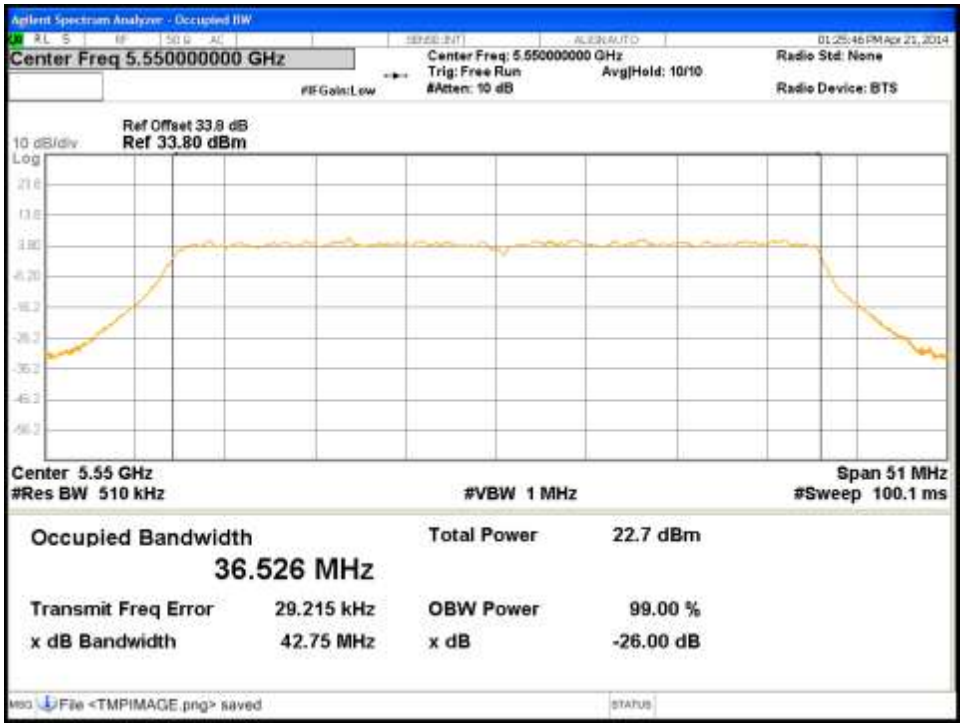

Figure 105: Occupied Bandwidth-5550MHz-HT40-MCS0-Ch0

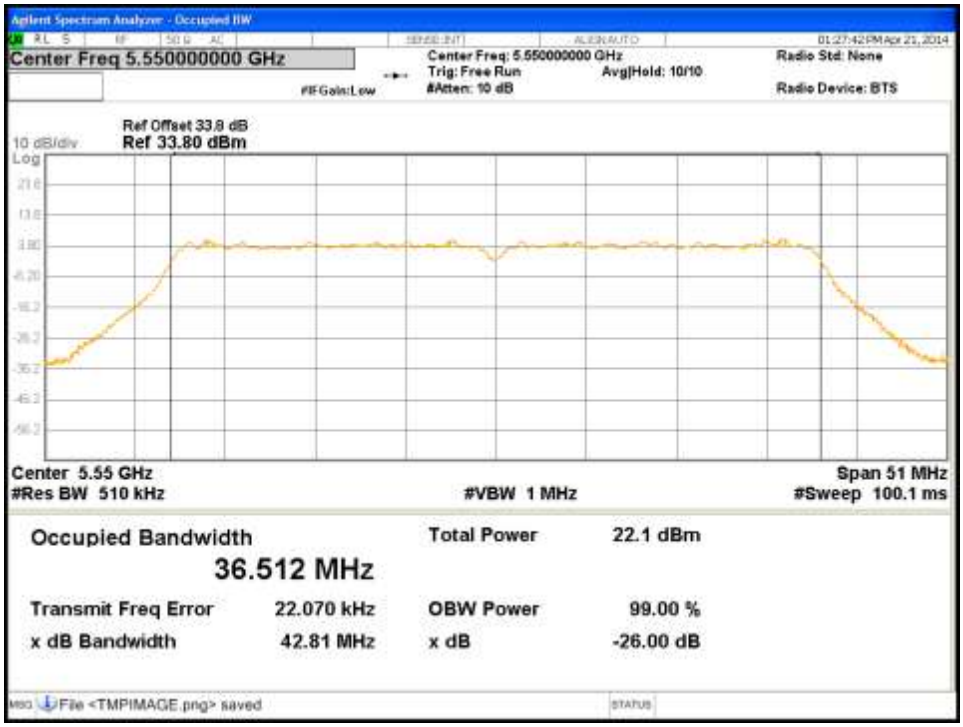

Figure 106: Occupied Bandwidth-5550MHz-HT40-MCS0-Ch1

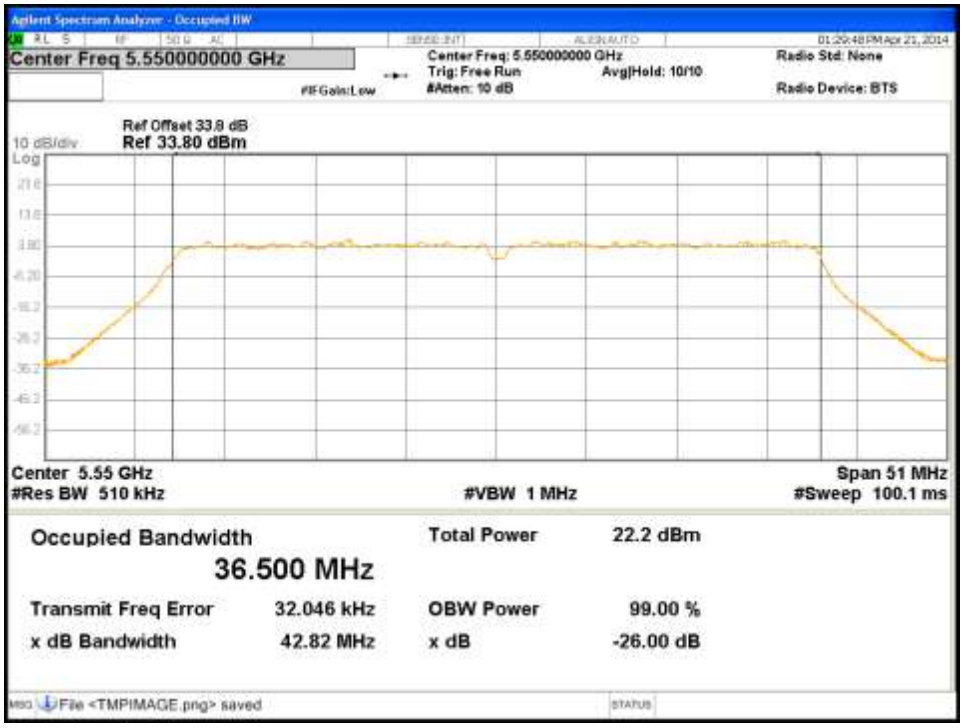

Figure 107: Occupied Bandwidth-5550MHz-HT40-MCS0-Ch2

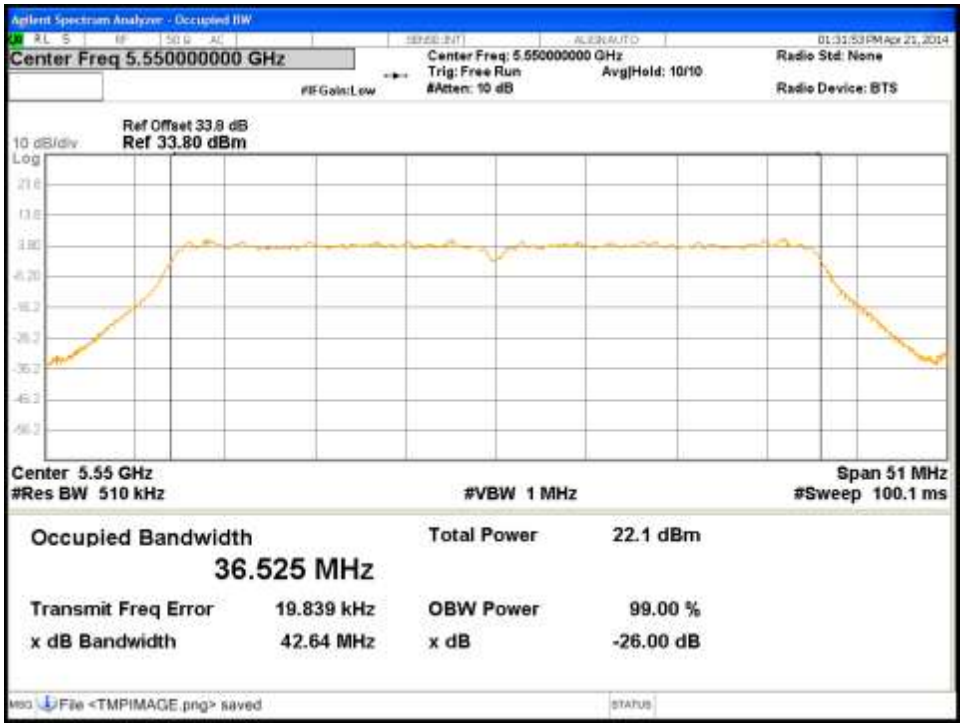

Figure 108: Occupied Bandwidth-5550MHz-HT40-MCS0-Ch3

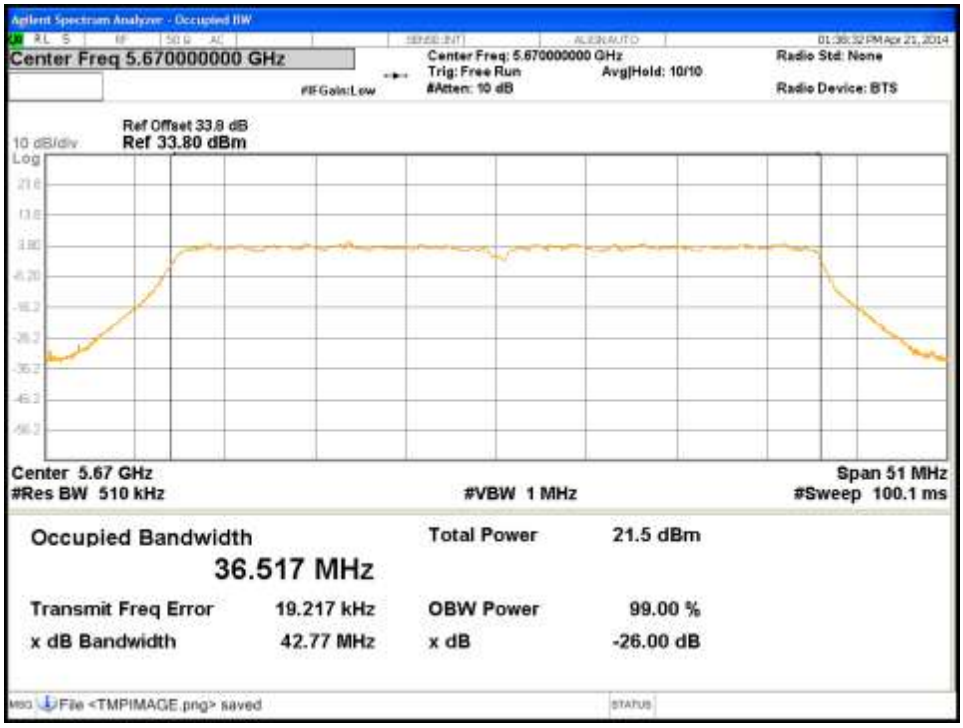

Figure 109: Occupied Bandwidth-5670MHz-HT40-MCS0-Ch0

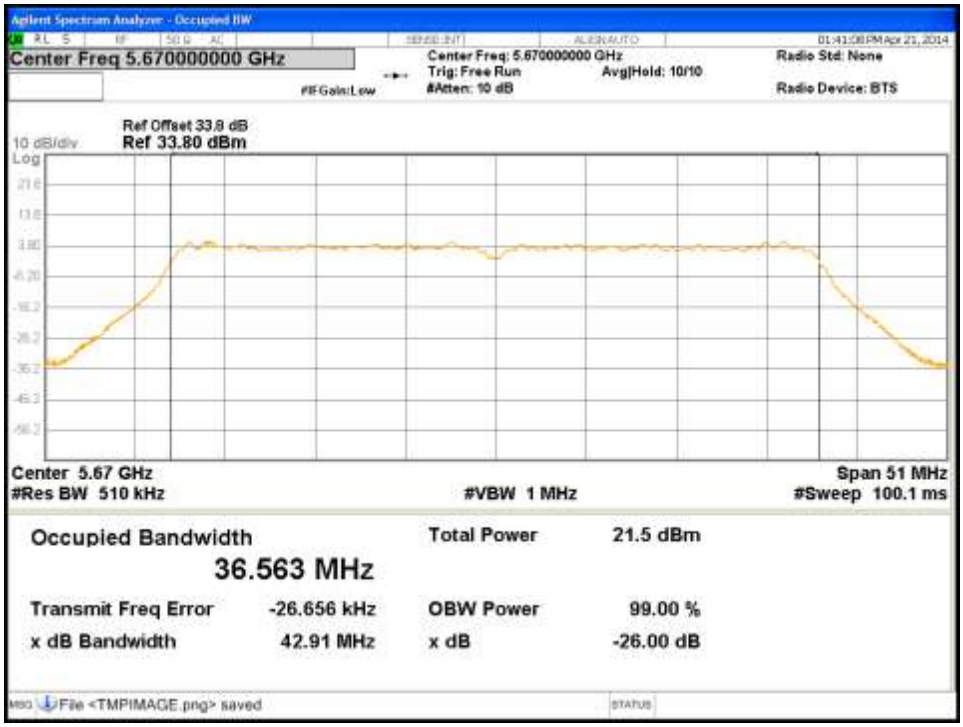

Figure 110: Occupied Bandwidth-5670MHz-HT40-MCS0-Ch1

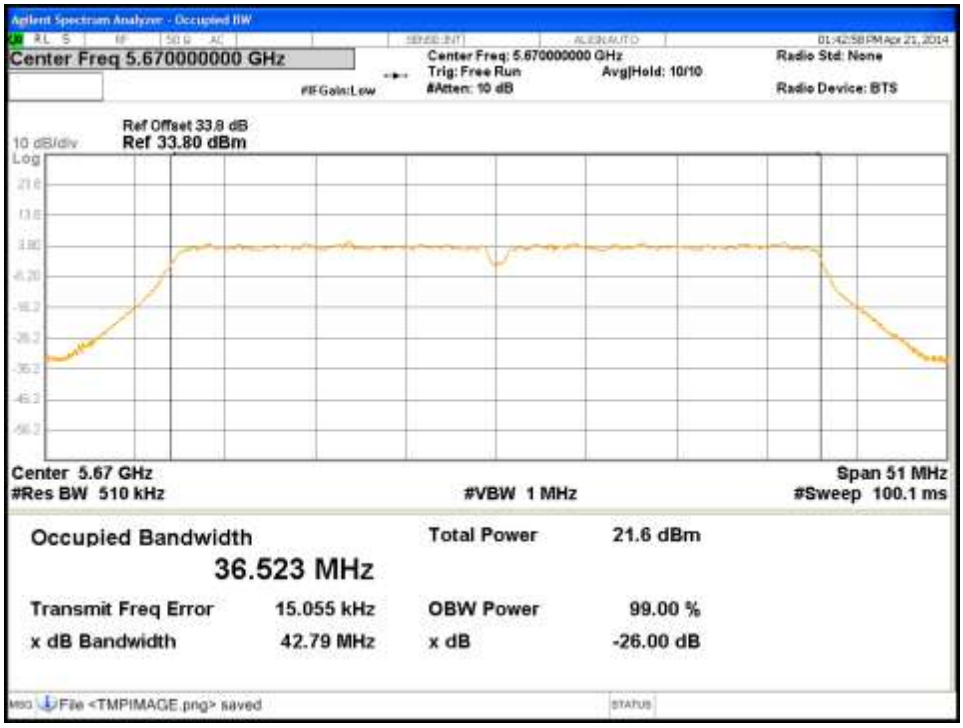

Figure 111: Occupied Bandwidth-5670MHz-HT40-MCS0-Ch2

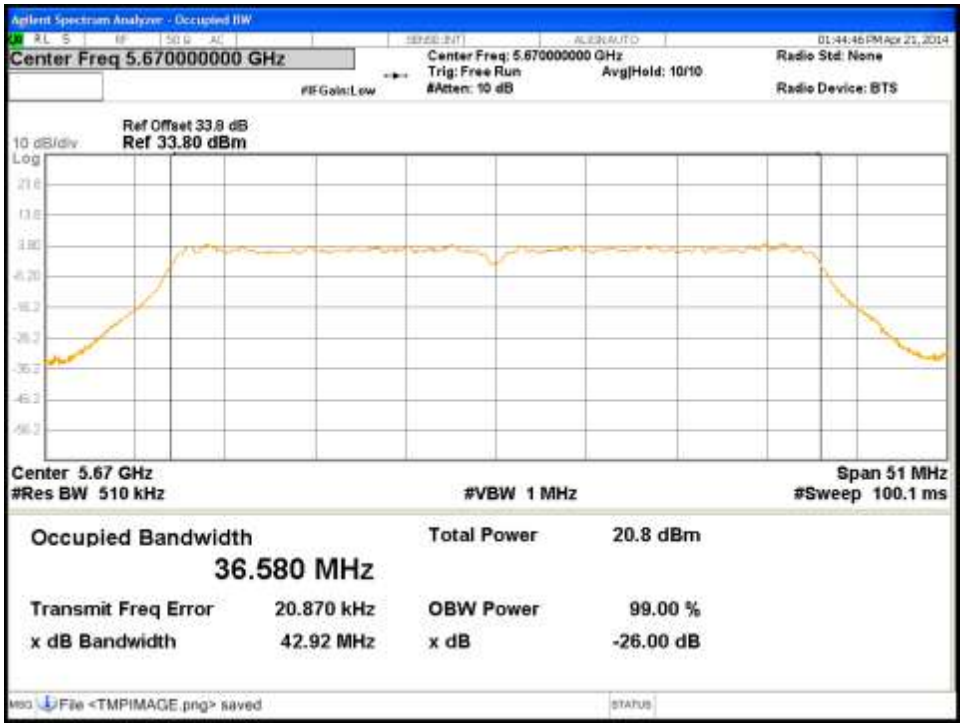

Figure 112: Occupied Bandwidth-5670MHz-HT40-MCS0-Ch3

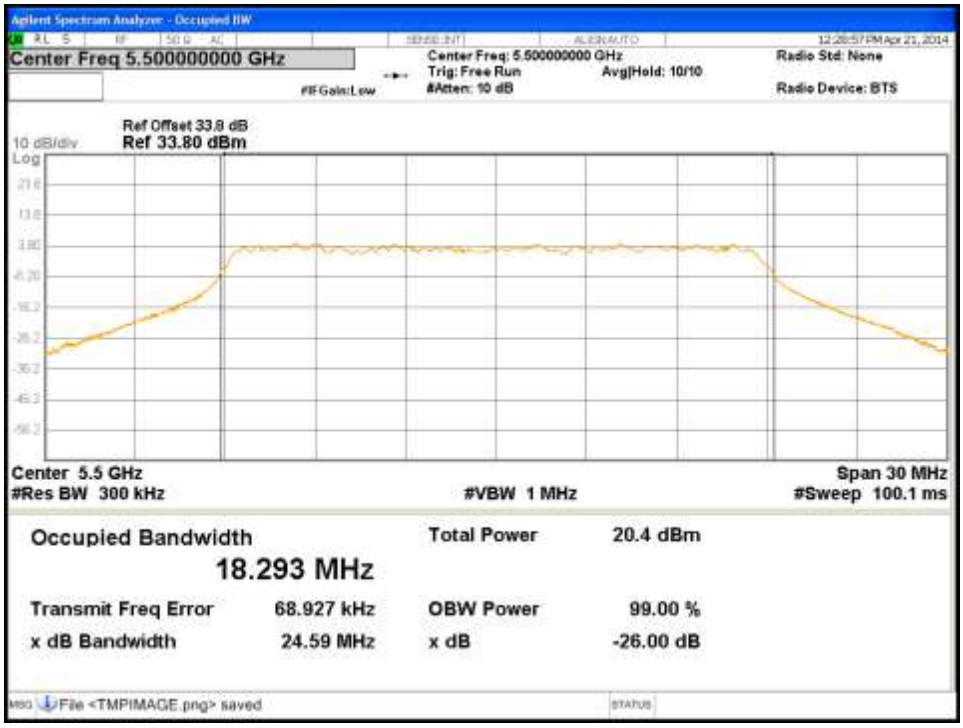

Figure 113: Occupied Bandwidth-5500MHz-VHT20-MCS0-Ch0

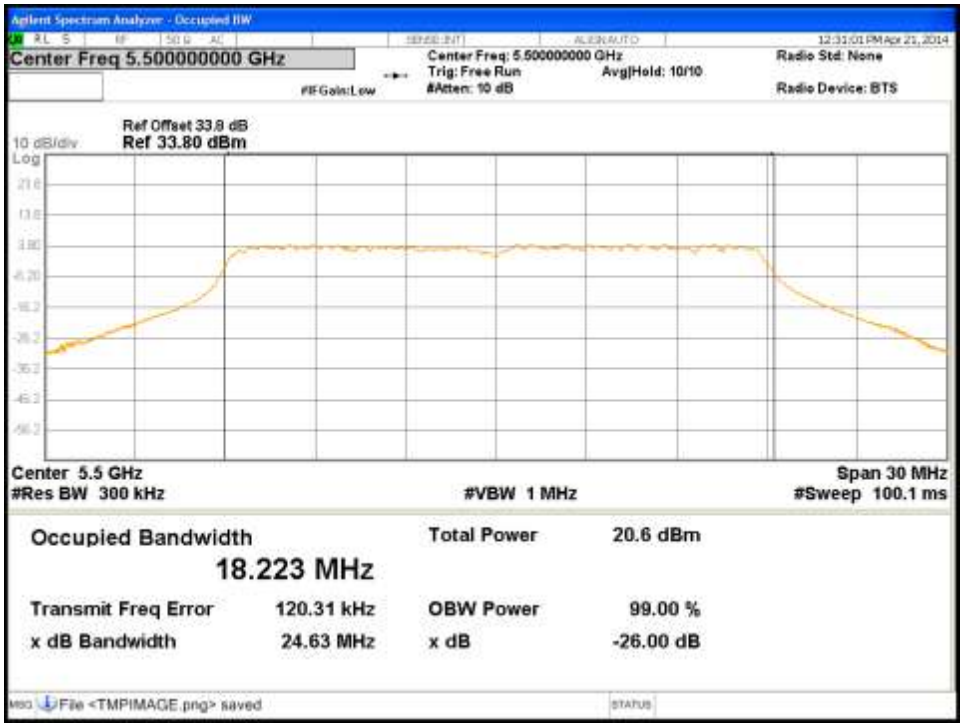

Figure 114: Occupied Bandwidth-5500MHz-VHT20-MCS0-Ch1

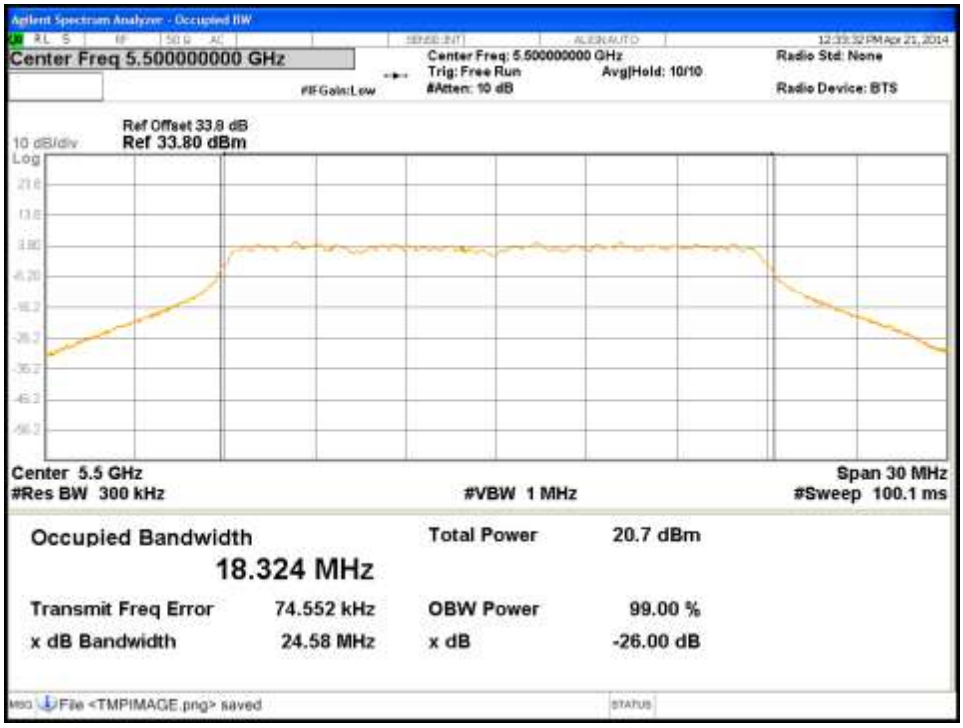

Figure 115: Occupied Bandwidth-5500MHz-VHT20-MCS0-Ch2

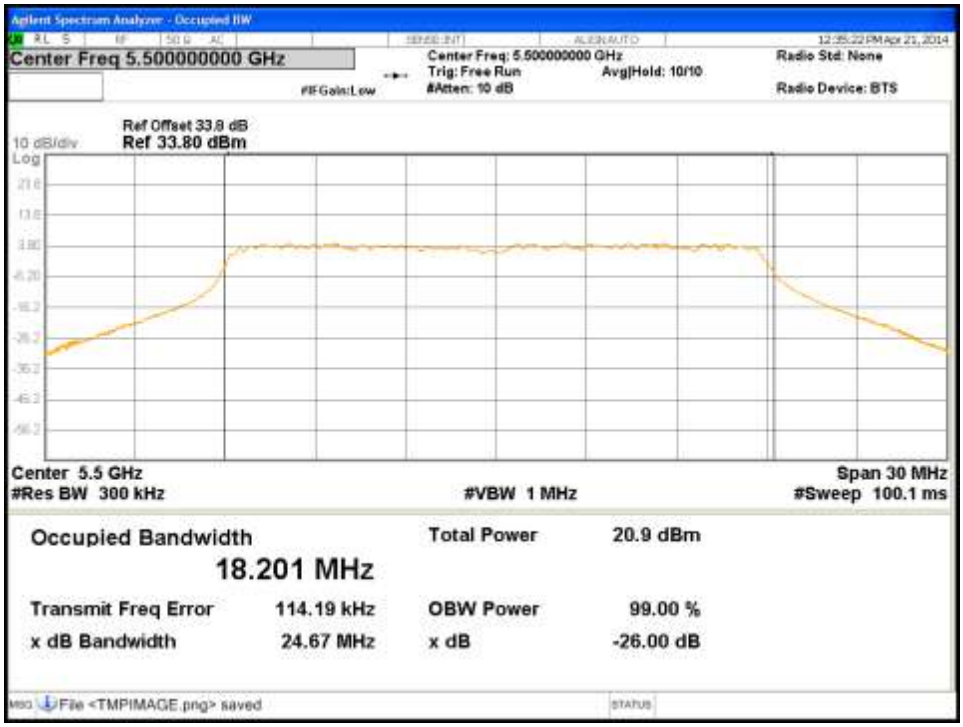

Figure 116: Occupied Bandwidth-5500MHz-VHT20-MCS0-Ch3

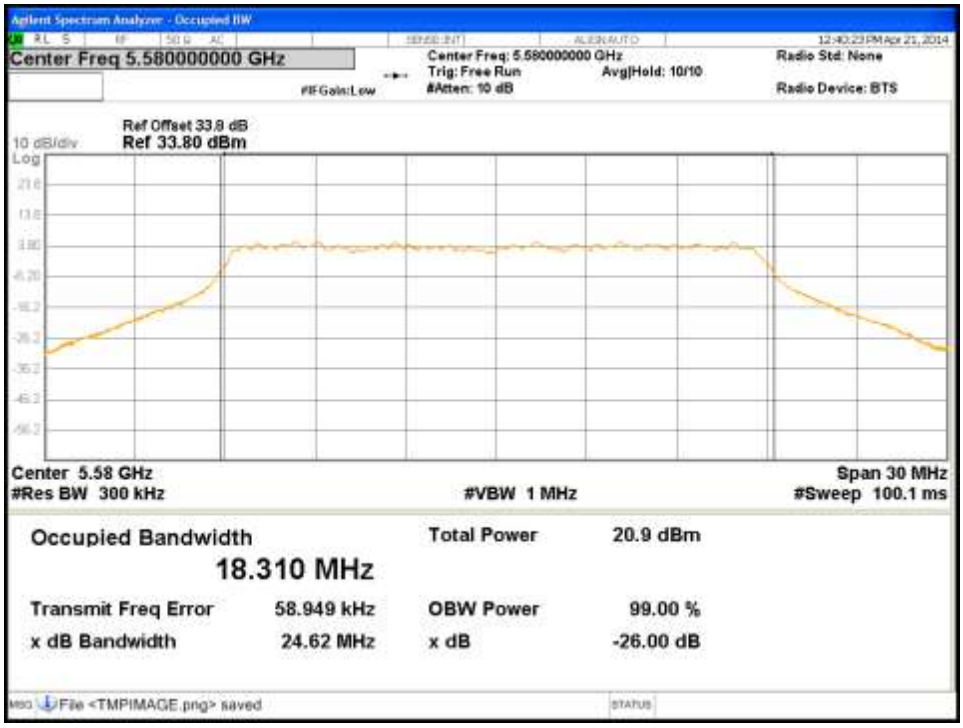

Figure 117: Occupied Bandwidth-5580MHz-VHT20-MCS0-Ch0

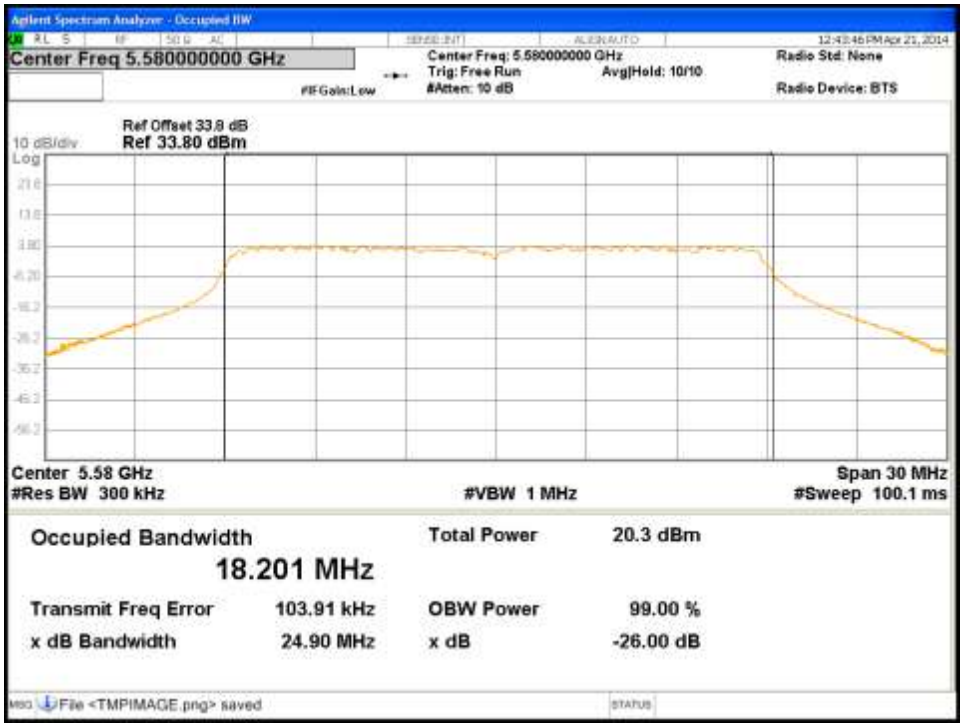

Figure 118: Occupied Bandwidth-5580MHz-VHT20-MCS0-Ch1

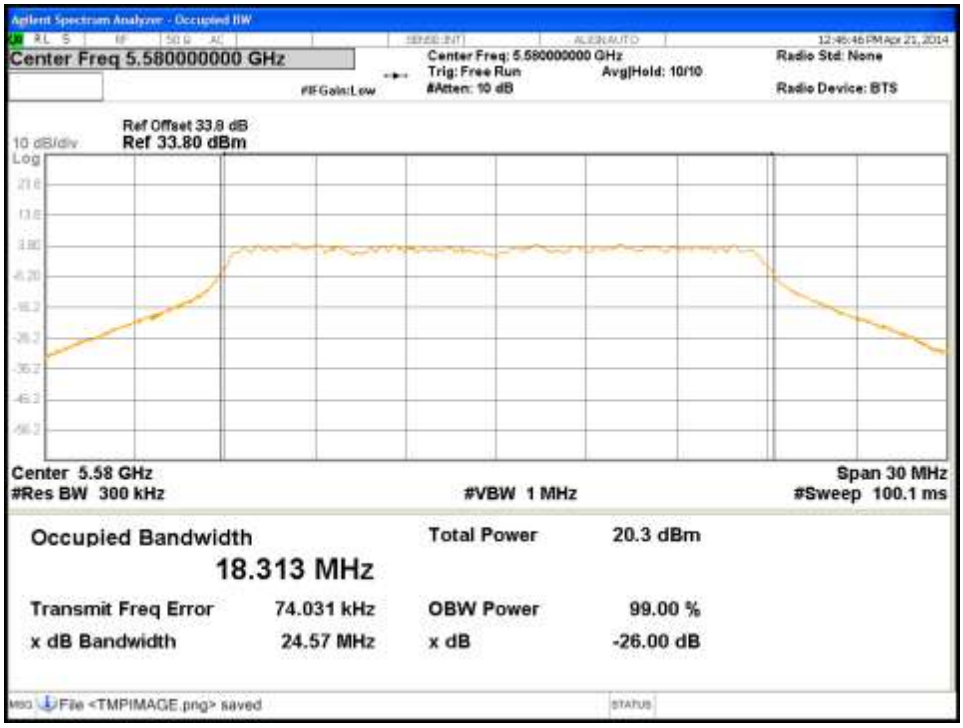

Figure 119: Occupied Bandwidth-5580MHz-VHT20-MCS0-Ch2

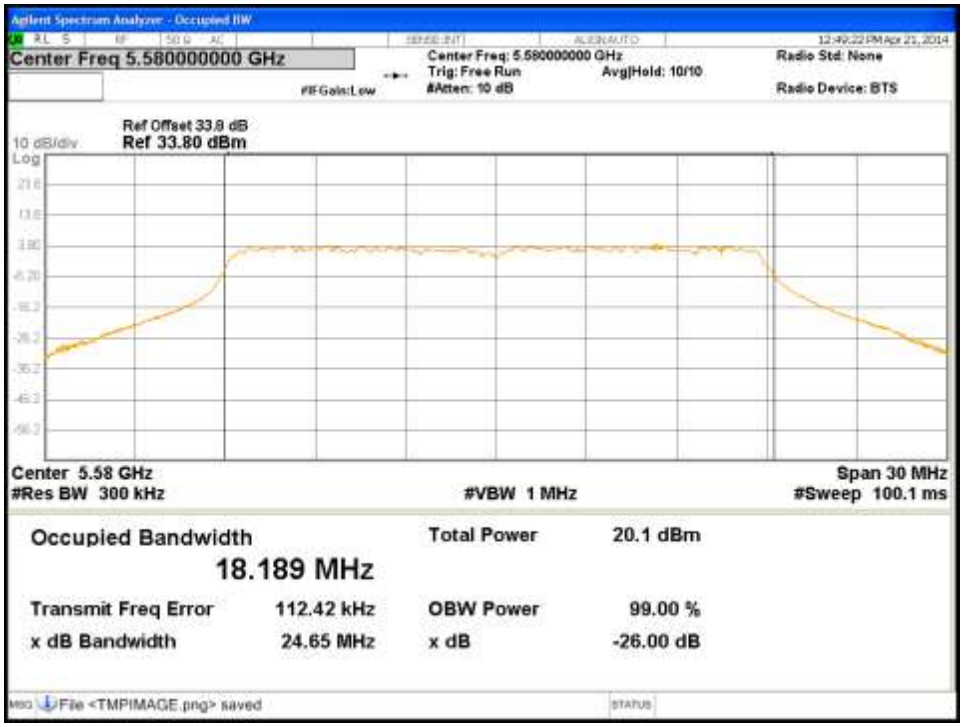

Figure 120: Occupied Bandwidth-5580MHz-VHT20-MCS0-Ch3

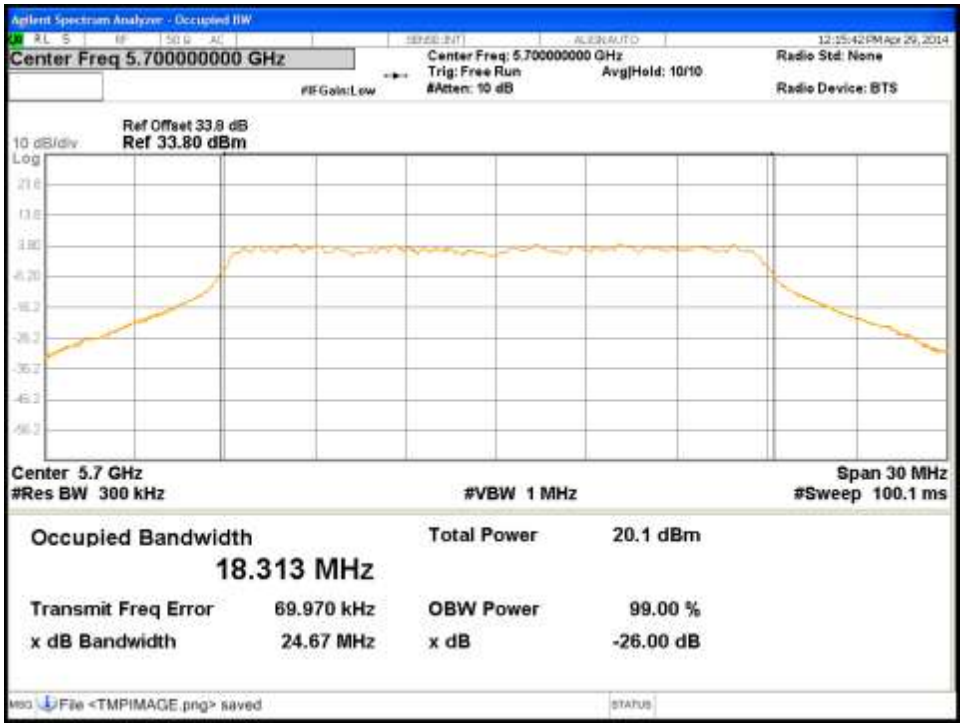

Figure 121: Occupied Bandwidth-5700MHz-VHT20-MCS0-Ch0

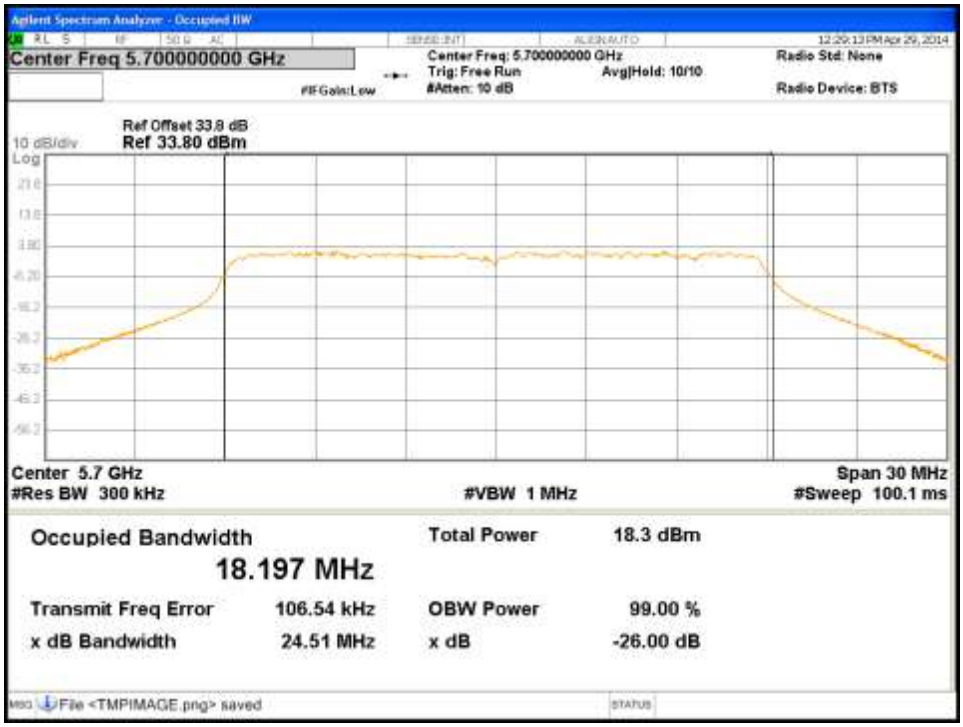

Figure 122: Occupied Bandwidth-5700MHz-VHT20-MCS0-Ch1

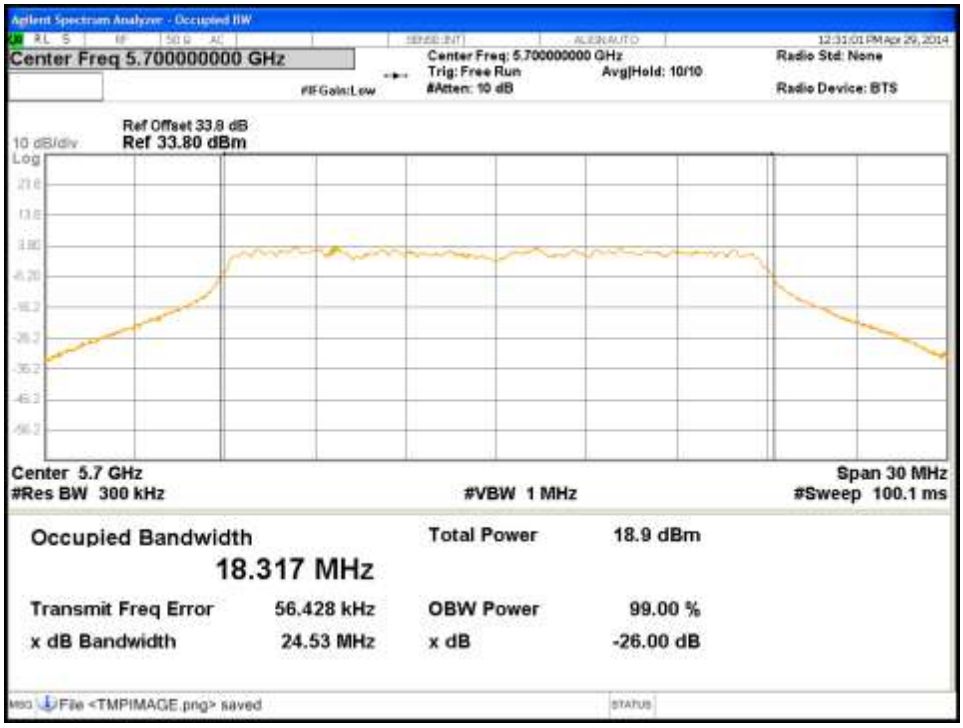

Figure 123: Occupied Bandwidth-5700MHz-VHT20-MCS0-Ch2

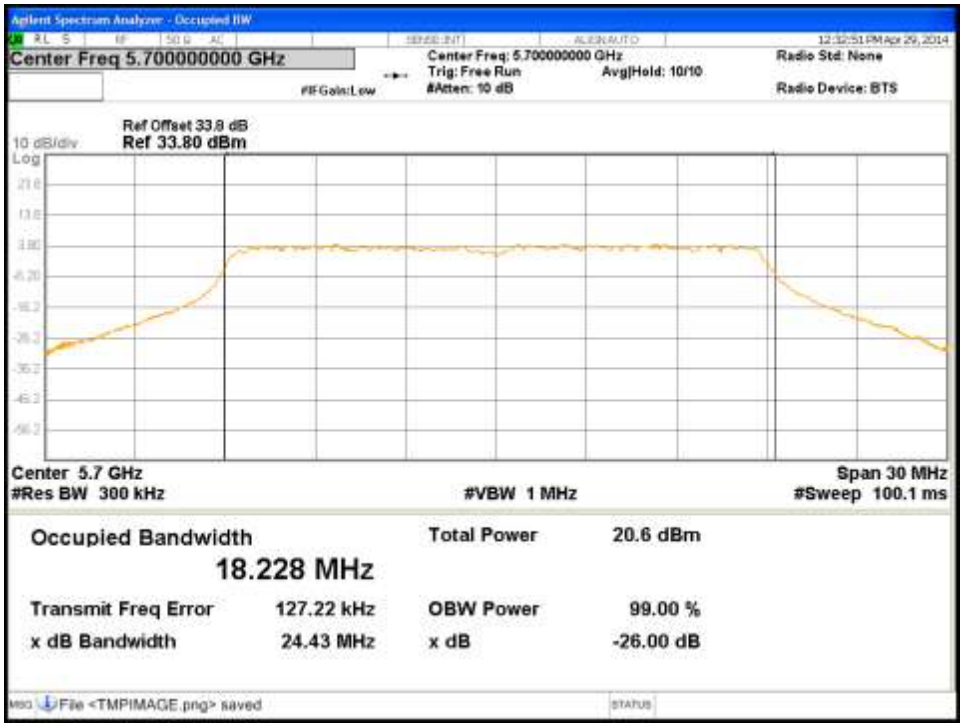

Figure 124: Occupied Bandwidth-5700MHz-VHT20-MCS0-Ch3

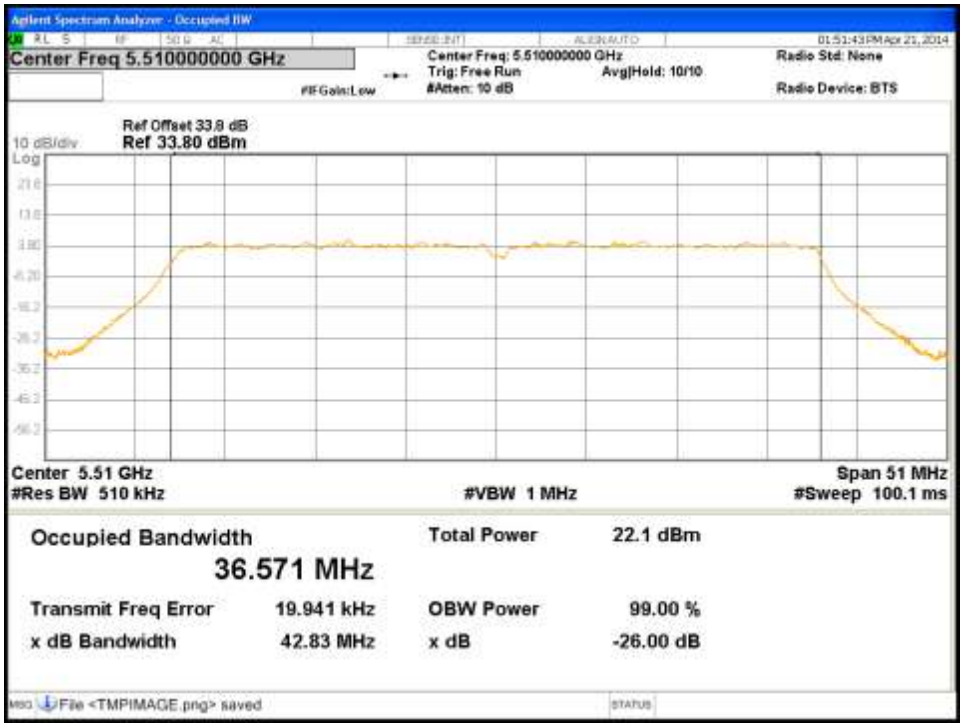

Figure 125: Occupied Bandwidth-5510MHz-VHT40-MCS0-Ch0

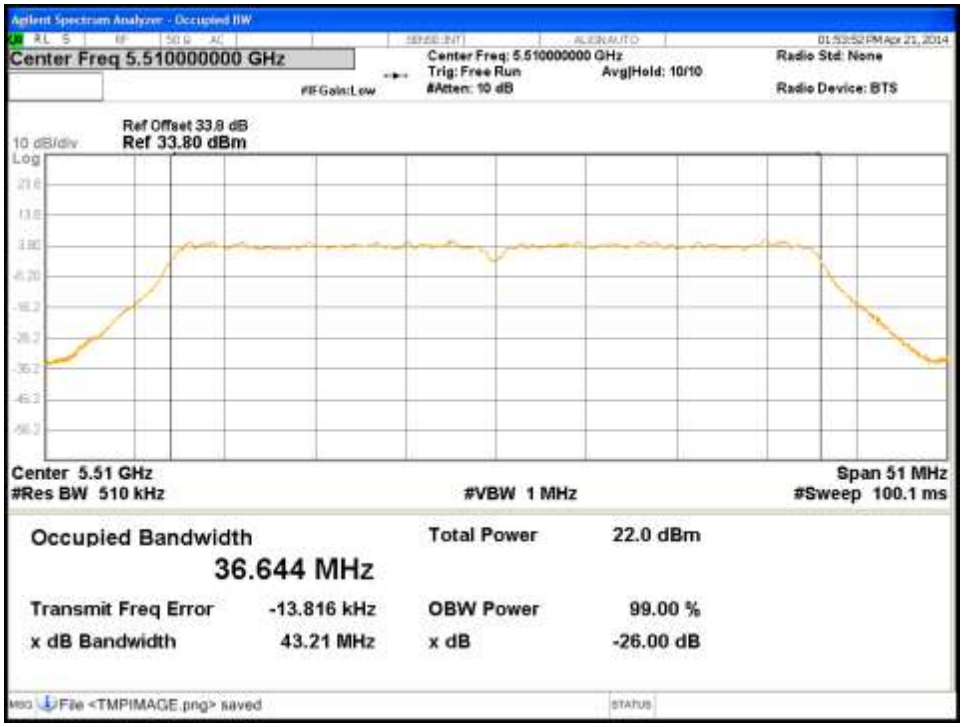

Figure 126: Occupied Bandwidth-5510MHz-VHT40-MCS0-Ch1

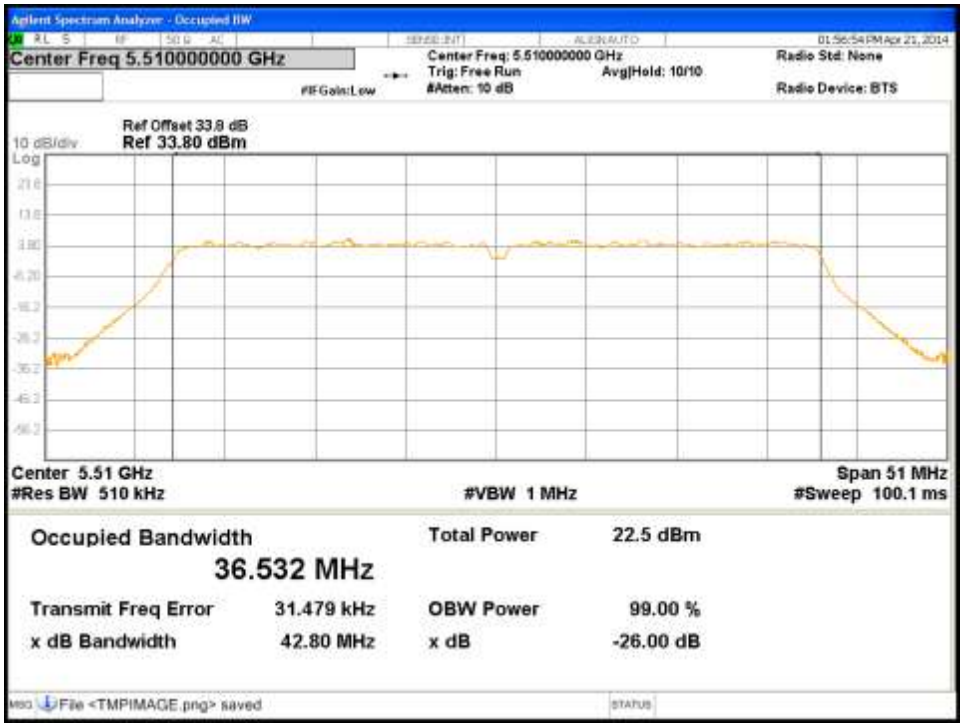

Figure 127: Occupied Bandwidth-5510MHz-VHT40-MCS0-Ch2

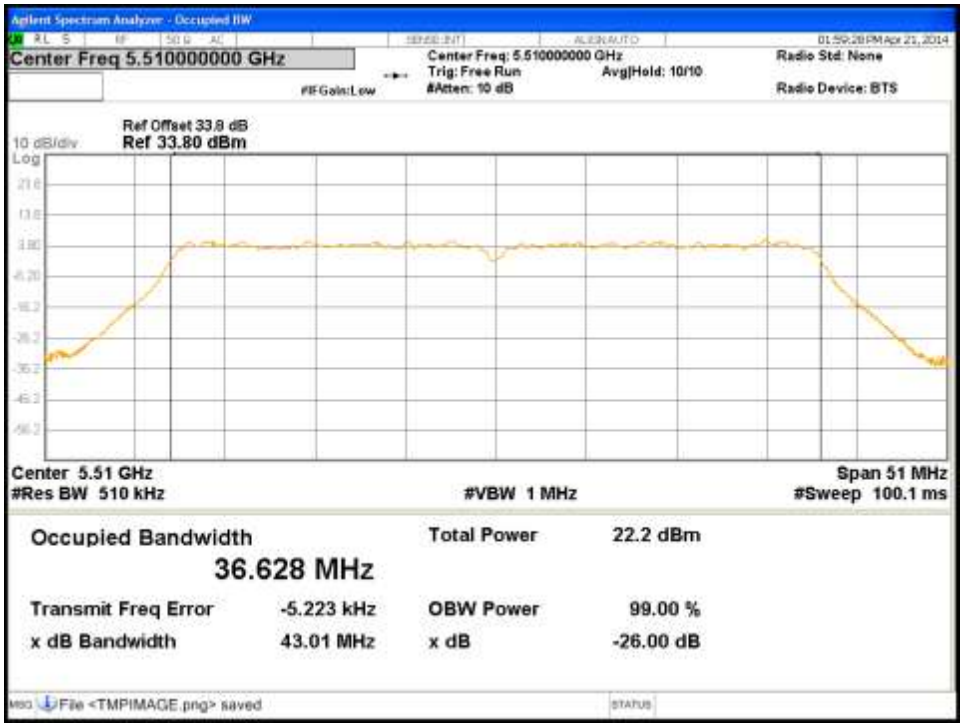

Figure 128: Occupied Bandwidth-5510MHz-VHT40-MCS0-Ch3

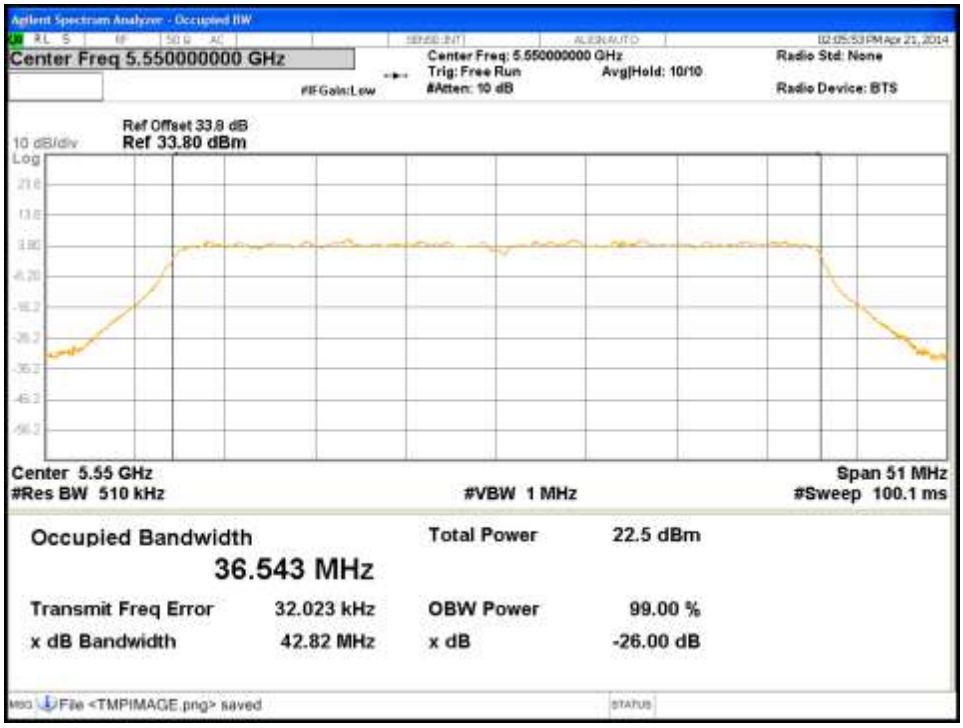

Figure 129: Occupied Bandwidth-5550MHz-VHT40-MCS0-Ch0

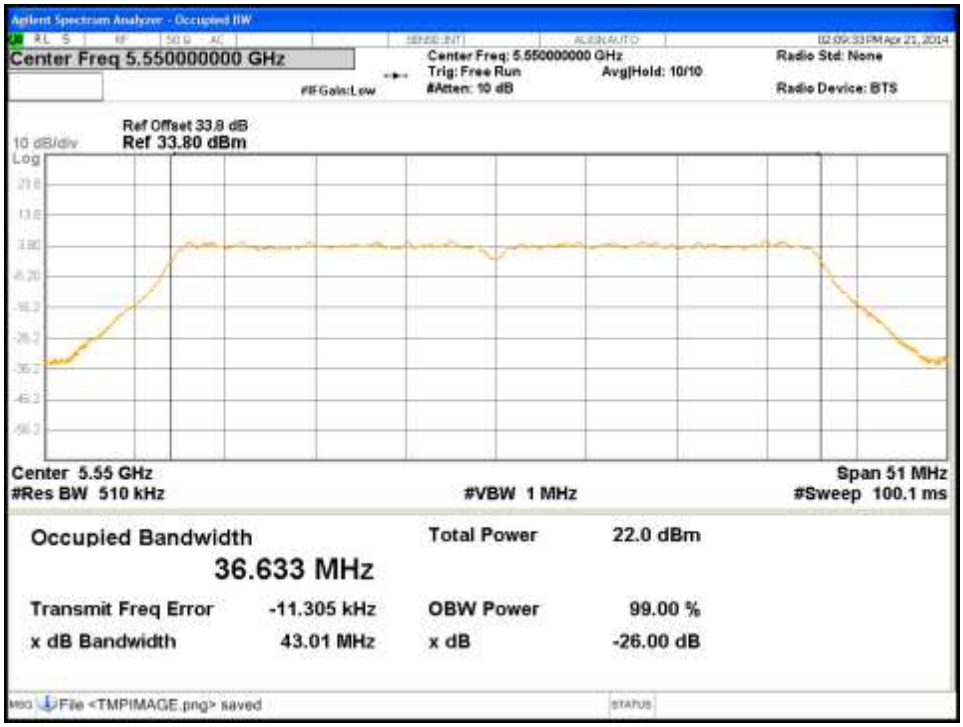

Figure 130: Occupied Bandwidth-5550MHz-VHT40-MCS0-Ch1

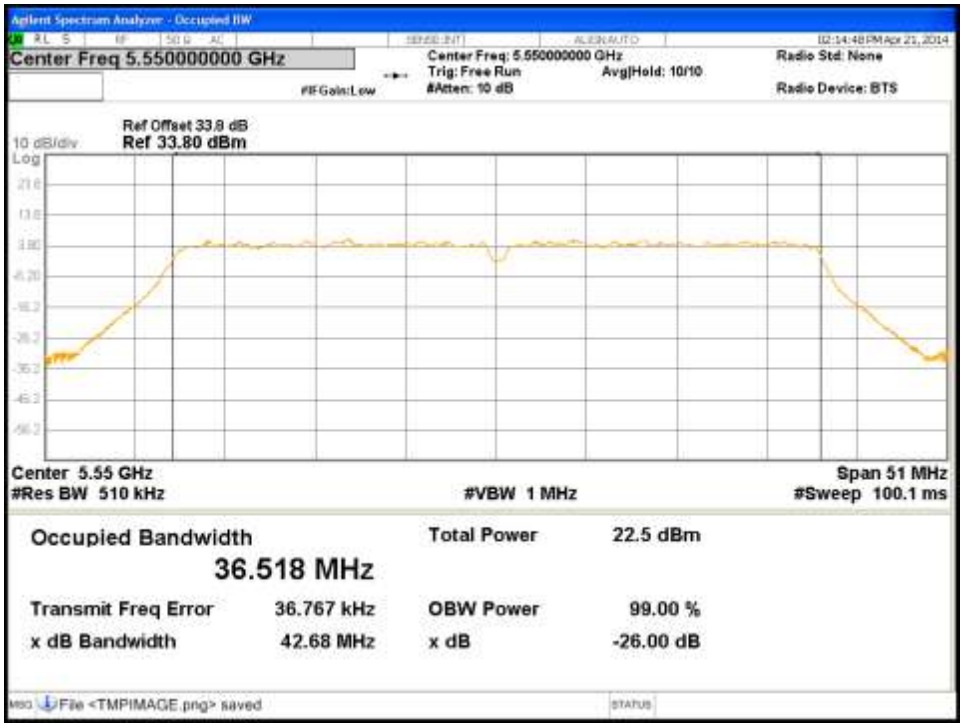

Figure 131: Occupied Bandwidth-5550MHz-VHT40-MCS0-Ch2

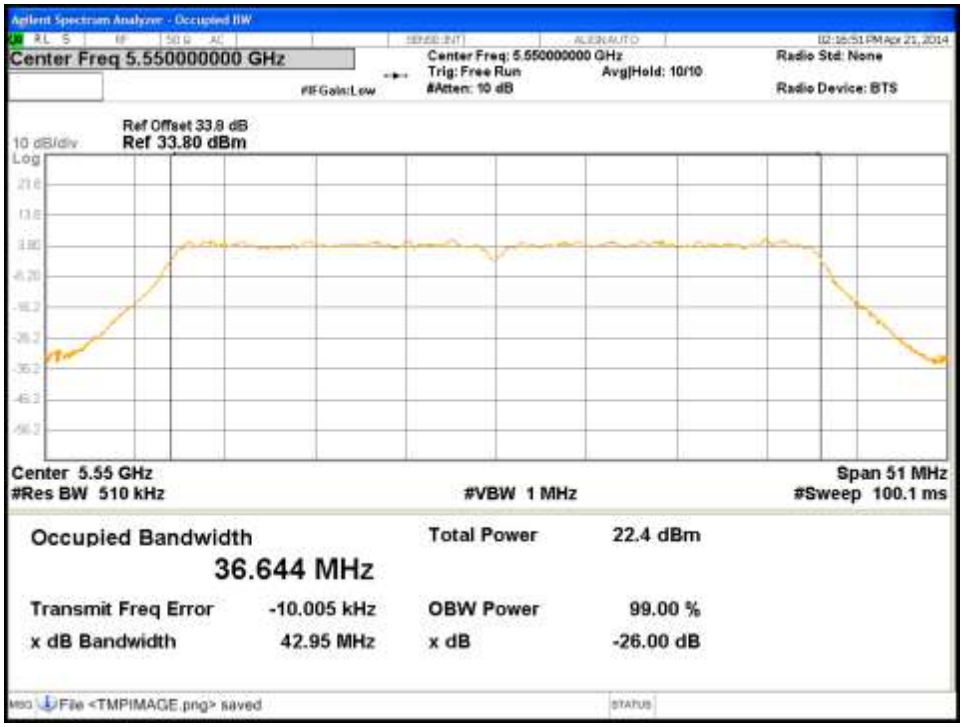

Figure 132: Occupied Bandwidth-5550MHz-VHT40-MCS0-Ch3

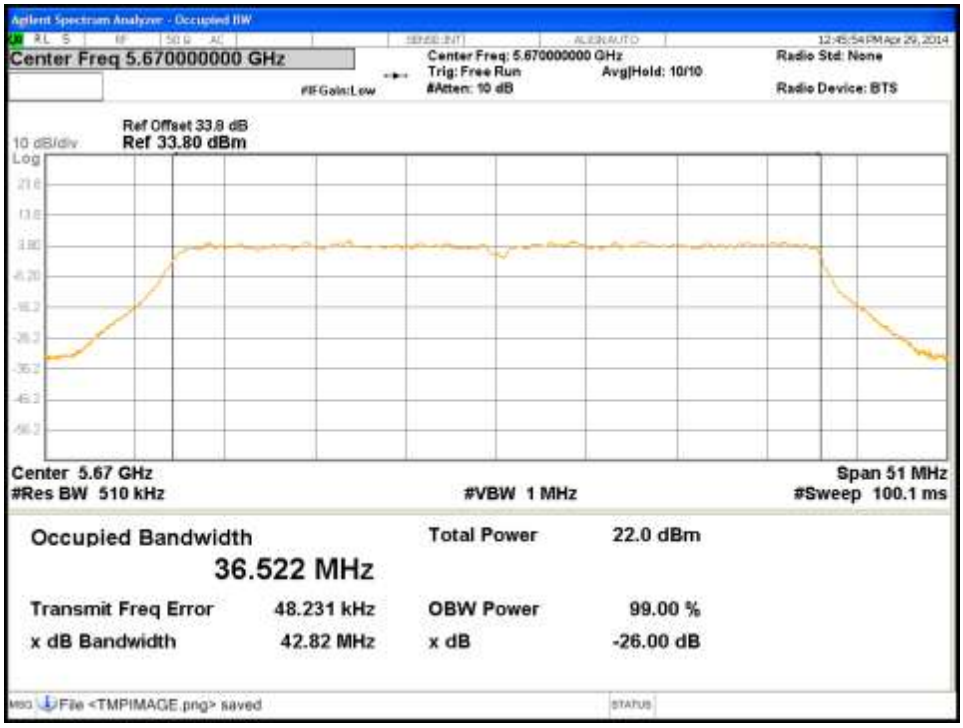

Figure 133: Occupied Bandwidth-5670MHz-VHT40-MCS0-Ch0

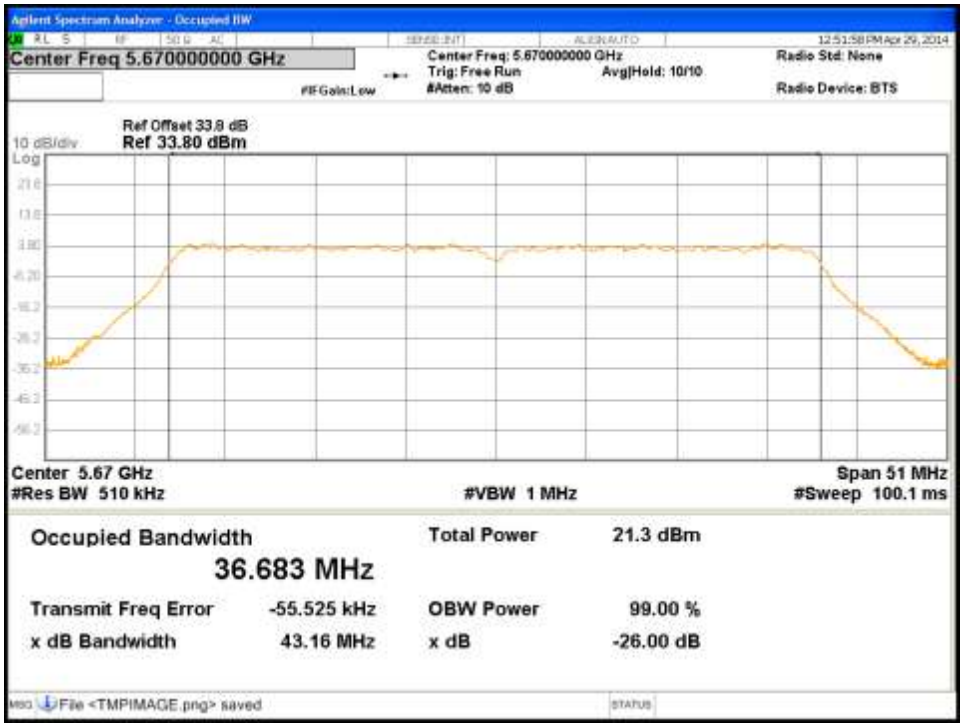

Figure 134: Occupied Bandwidth-5670MHz-VHT40-MCS0-Ch1

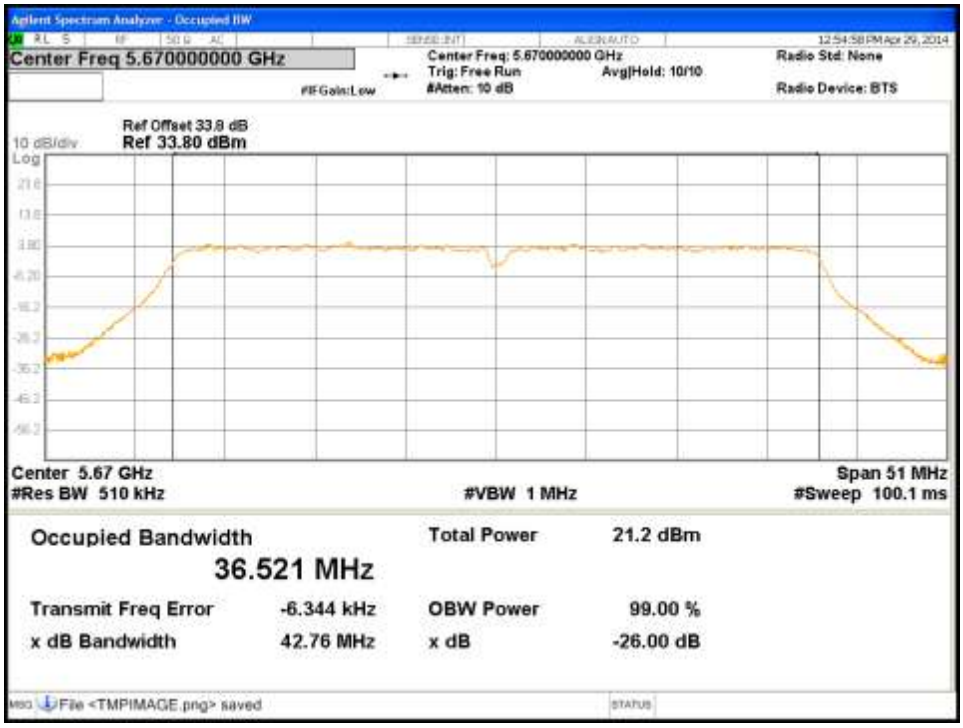

Figure 135: Occupied Bandwidth-5670MHz-VHT40-MCS0-Ch2

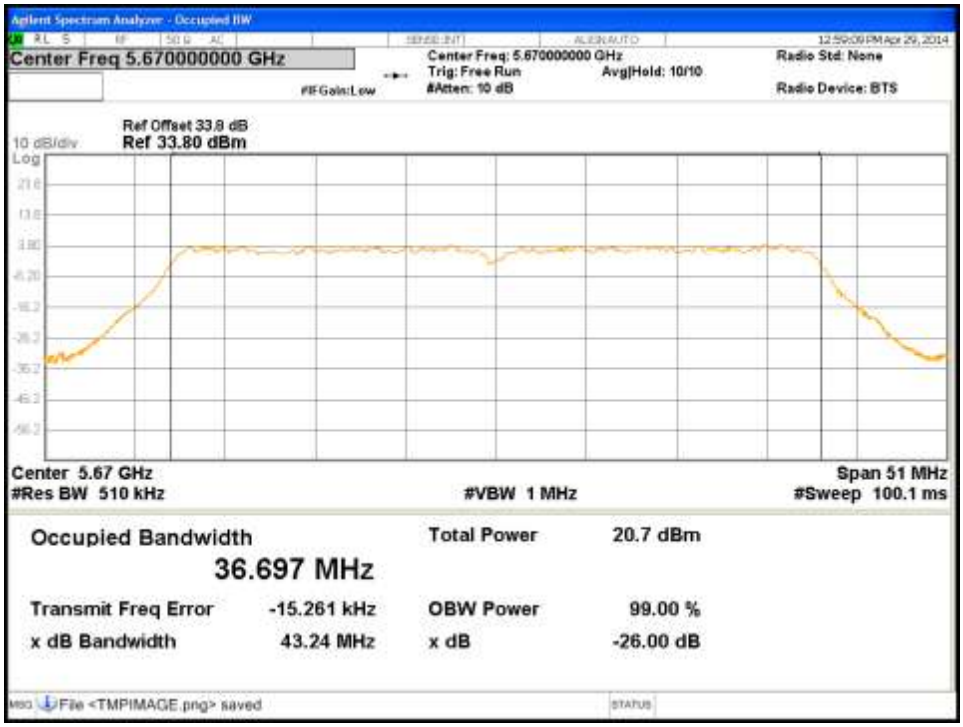

Figure 136: Occupied Bandwidth-5670MHz-VHT40-MCS0-Ch3

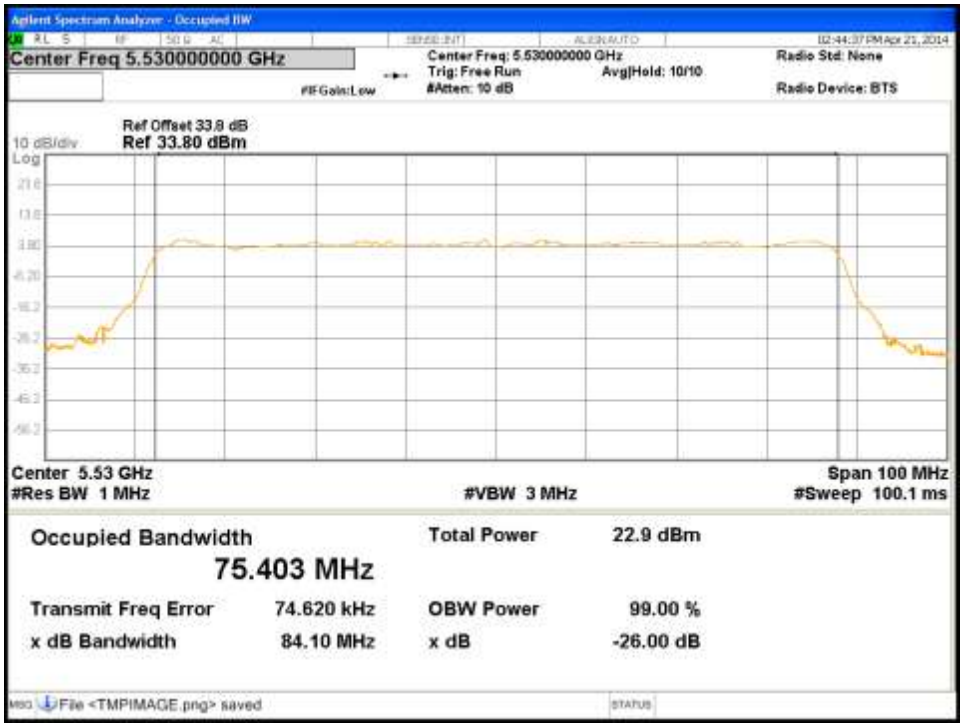

Figure 137: Occupied Bandwidth-5530MHz-VHT80-MCS0-Ch0

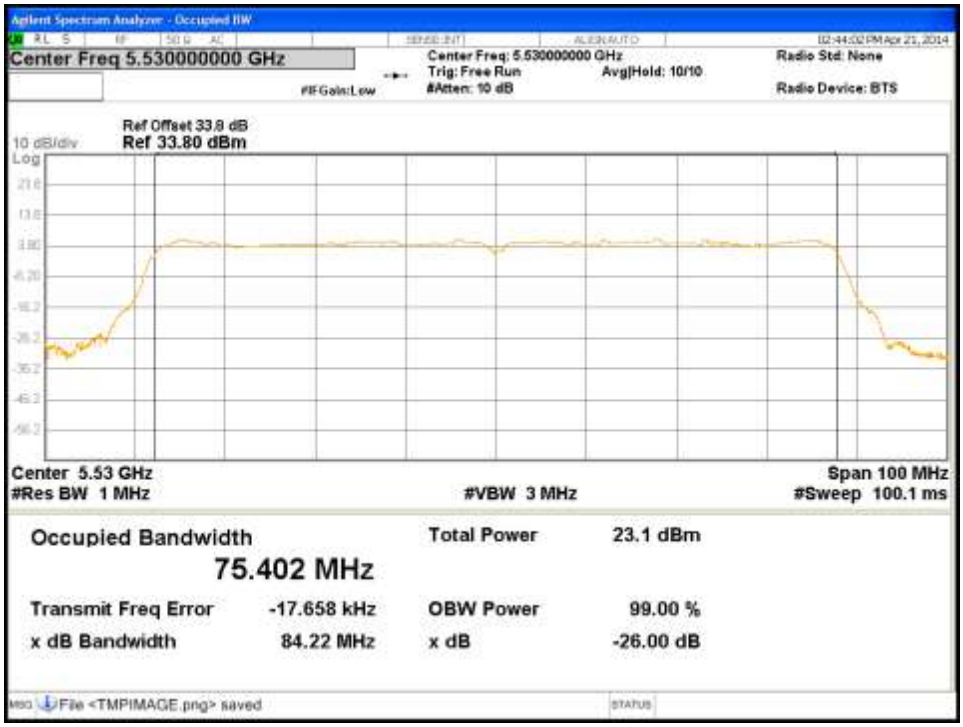

Figure 138: Occupied Bandwidth-5530MHz-VHT80-MCS0-Ch1

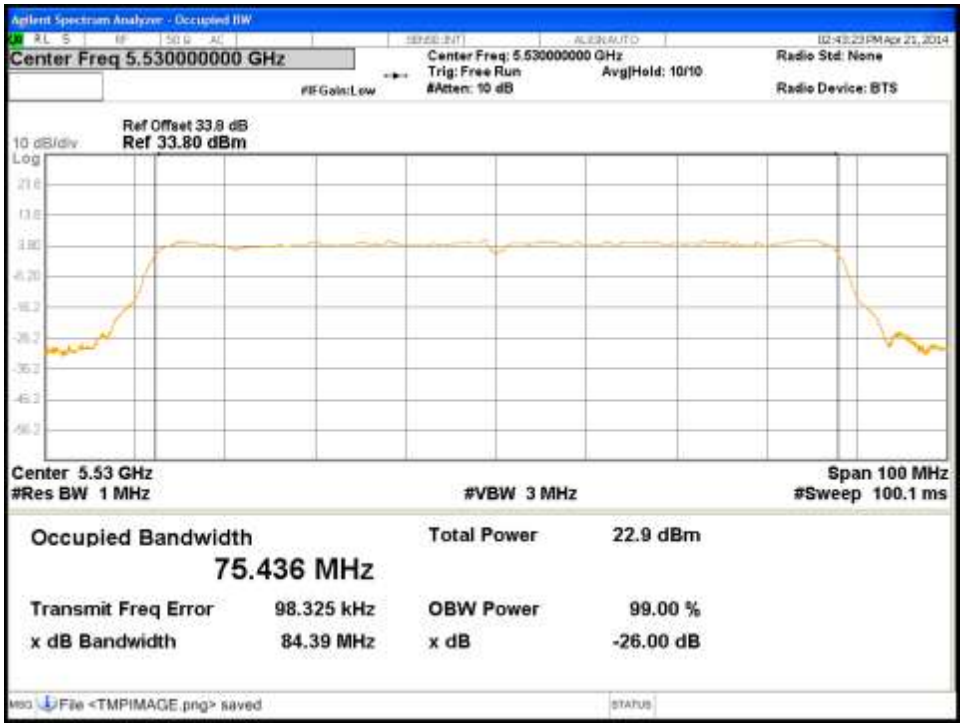

Figure 139: Occupied Bandwidth-5530MHz-VHT80-MCS0-Ch2

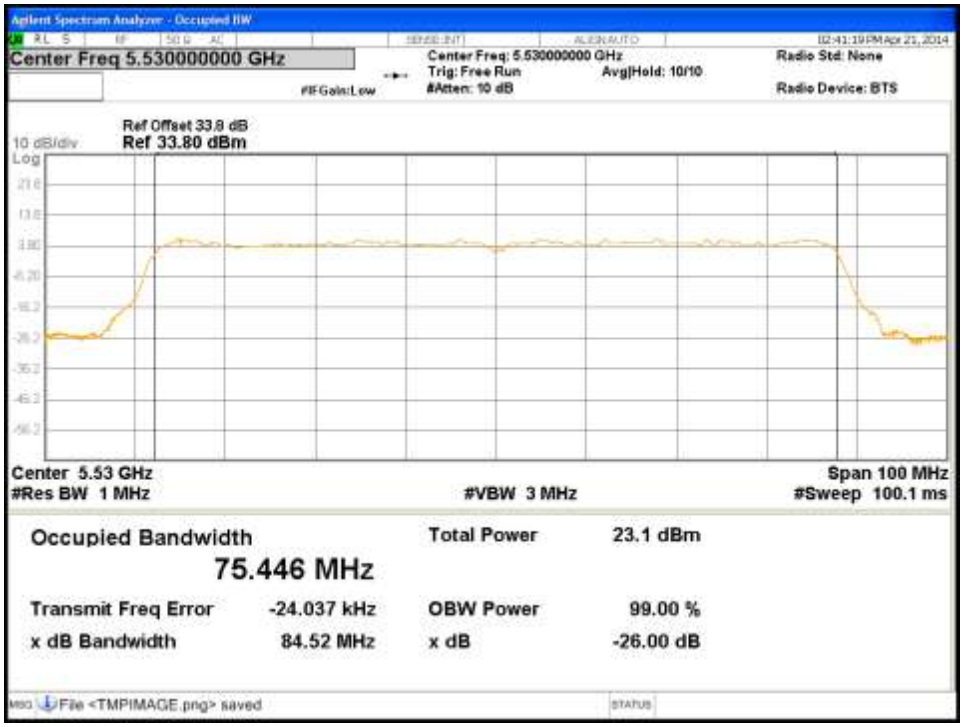

Figure 140: Occupied Bandwidth-5530MHz-VHT80-MCS0-Ch3

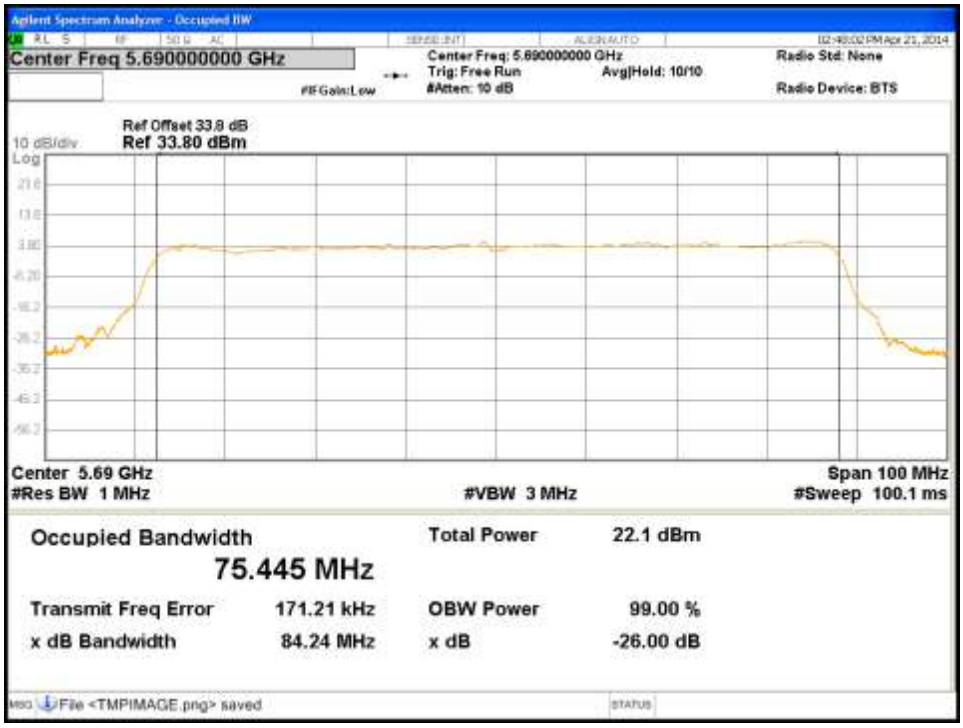

Figure 141: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch0

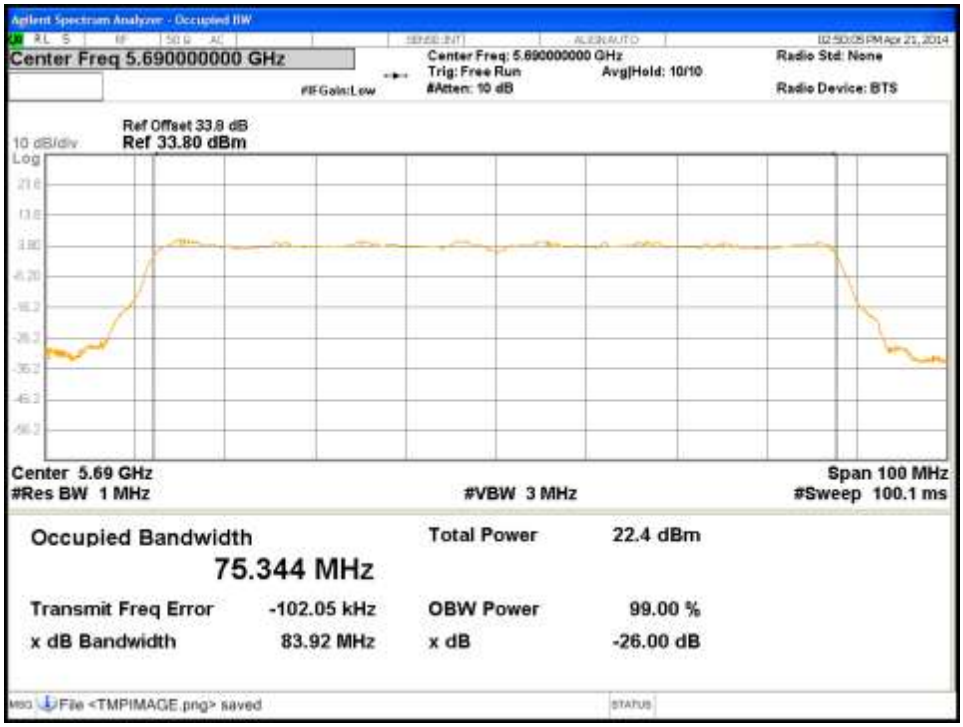

Figure 142: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch1

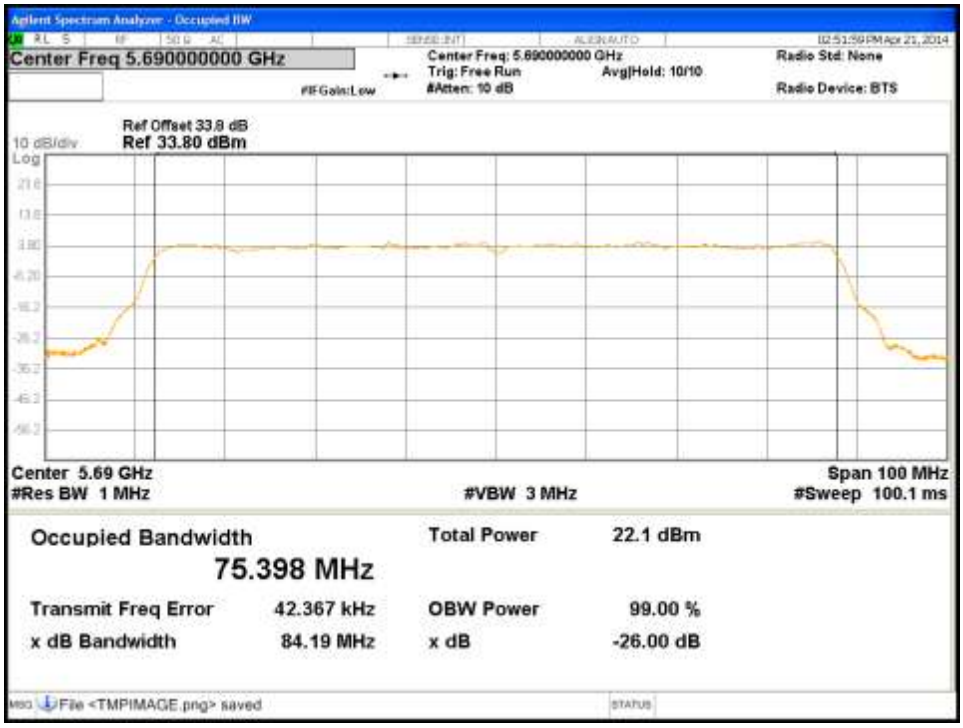

Figure 143: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch2

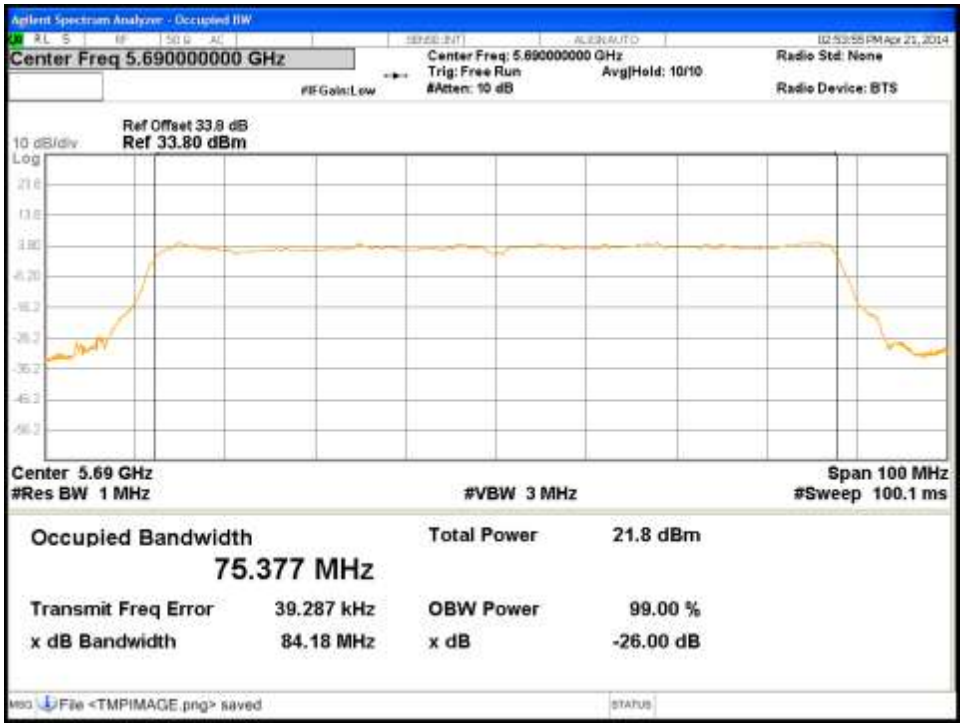

Figure 144: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch3

Figure 145: Occupied Bandwidth-5720MHz-VHT20-MCS0-Ch0

Figure 146: Occupied Bandwidth-5720MHz-VHT20-MCS0-Ch1

Figure 147: Occupied Bandwidth-5720MHz-VHT20-MCS0-Ch2

Figure 148: Occupied Bandwidth-5720MHz-VHT20-MCS0-Ch3

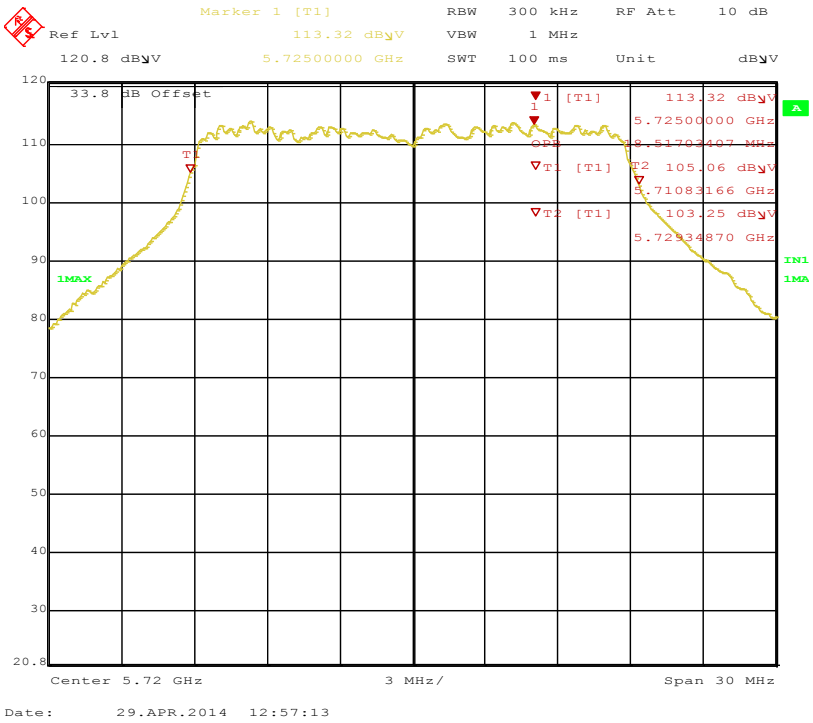

Figure 149: 99% Bandwidth-5720MHz-VHT20-MCS0-Ch0

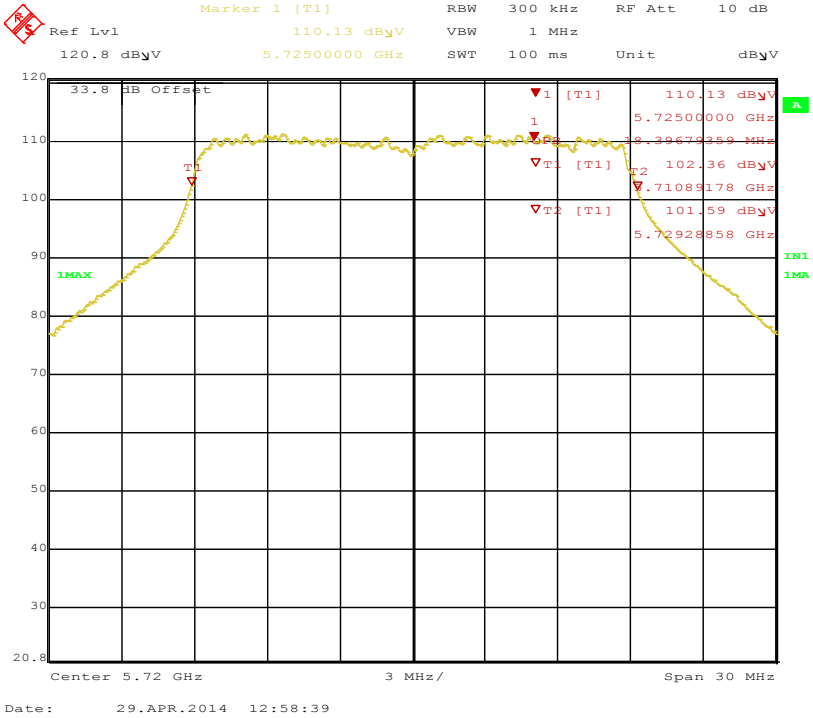

Figure 150: 99% Bandwidth-5720MHz-VHT20-MCS0-Ch1

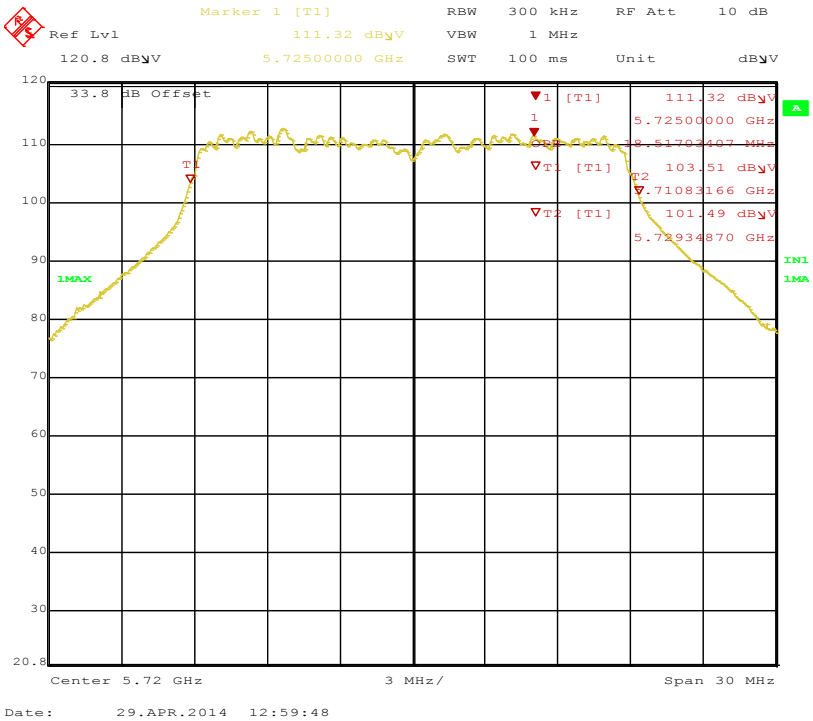

Figure 151: 99% Bandwidth-5720MHz-VHT20-MCS0-Ch2

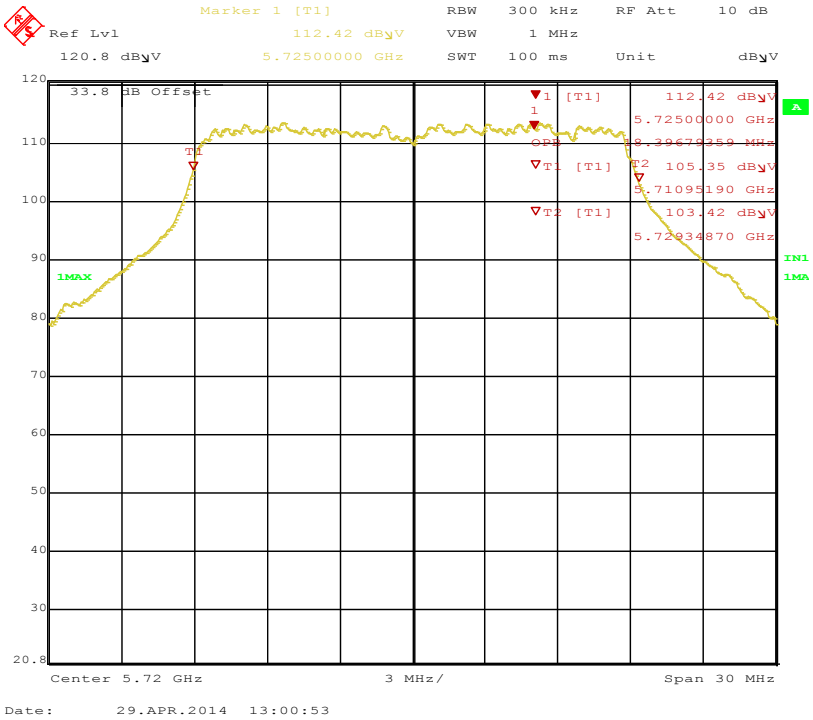

Figure 152: 99% Bandwidth-5720MHz-VHT20-MCS0-Ch3

Figure 153: Occupied Bandwidth-5710MHz-VHT40-MCS0-Ch0

Figure 154: Occupied Bandwidth-5710MHz-VHT40-MCS0-Ch1

Figure 155: Occupied Bandwidth-5710MHz-VHT40-MCS0-Ch2

Figure 156: Occupied Bandwidth-5710MHz-VHT40-MCS0-Ch3

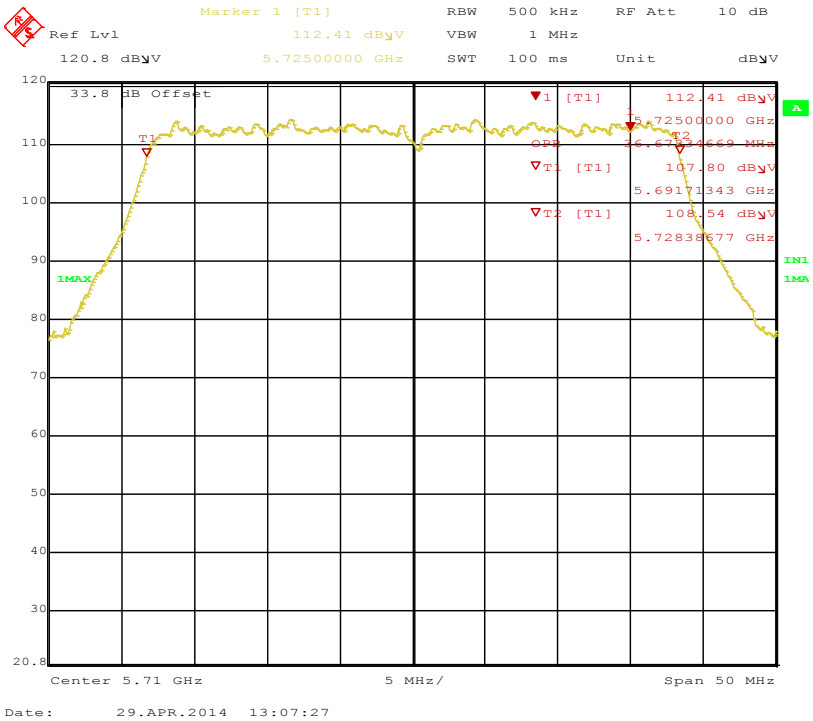

Figure 157: 99% Bandwidth-5710MHz-VHT40-MCS0-Ch0

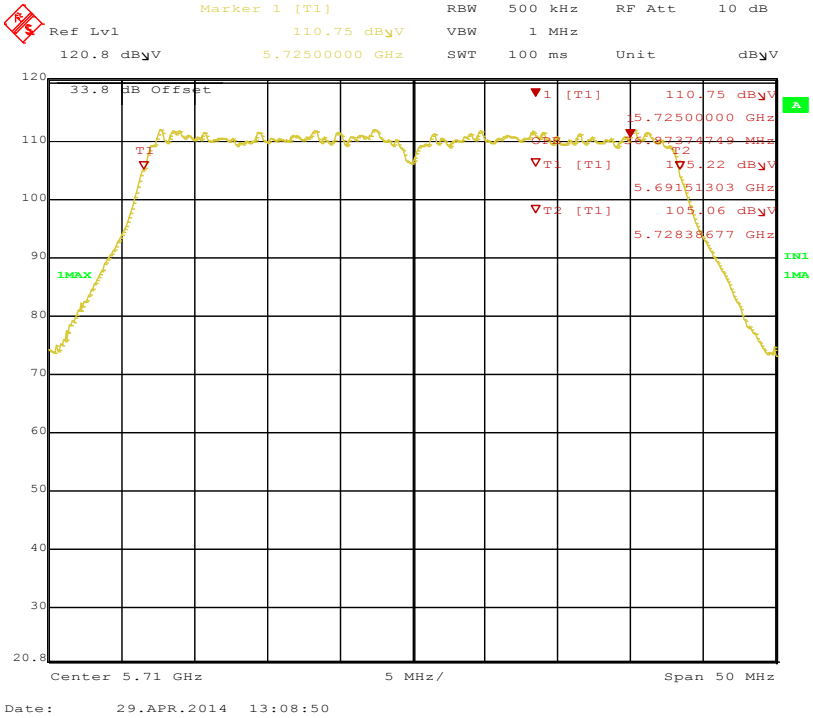

Figure 158: 99% Bandwidth-5710MHz-VHT40-MCS0-Ch1

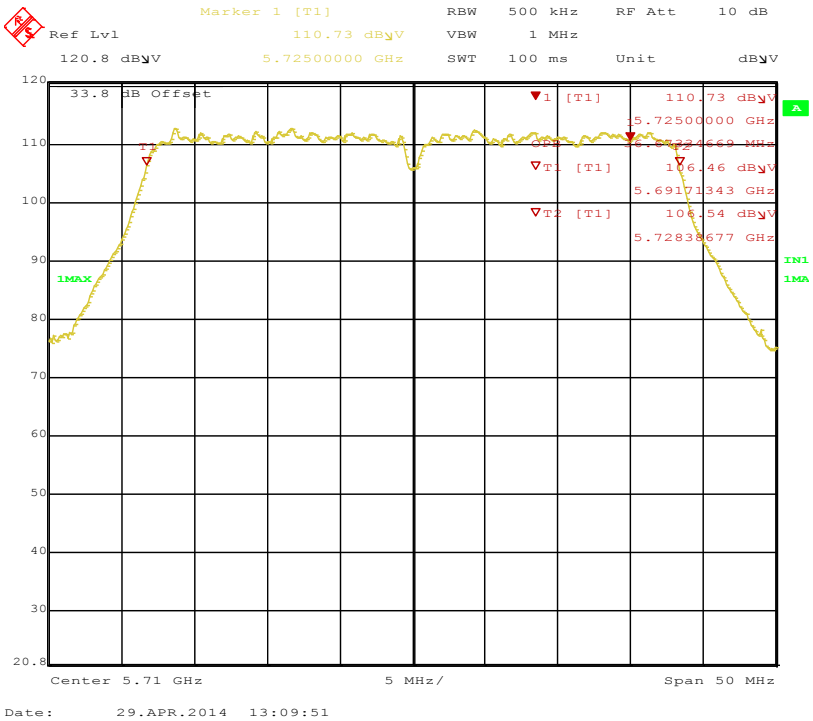

Figure 159: 99% Bandwidth-5710MHz-VHT40-MCS0-Ch2

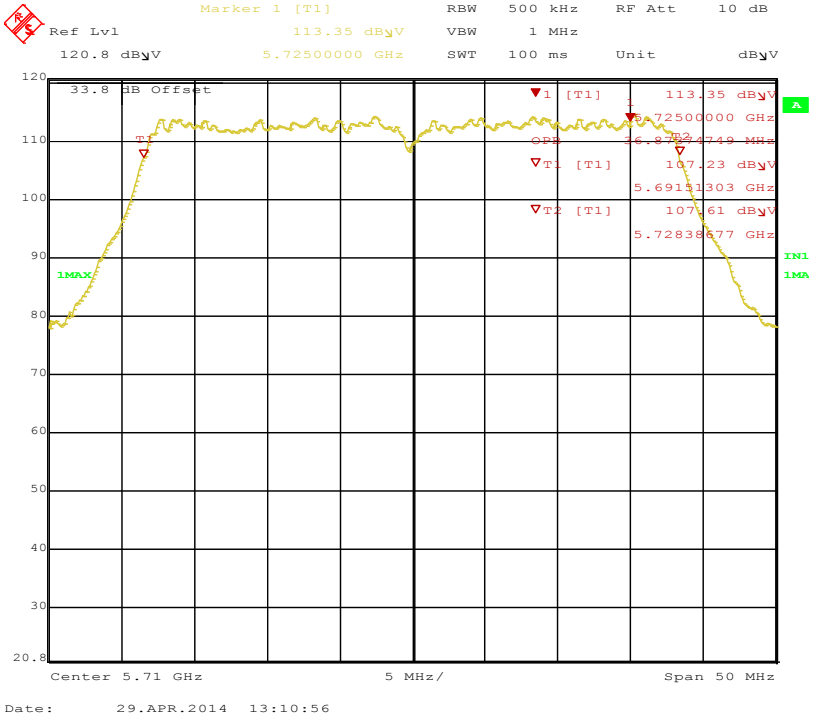

Figure 160: 99% Bandwidth-5710MHz-VHT40-MCS0-Ch3

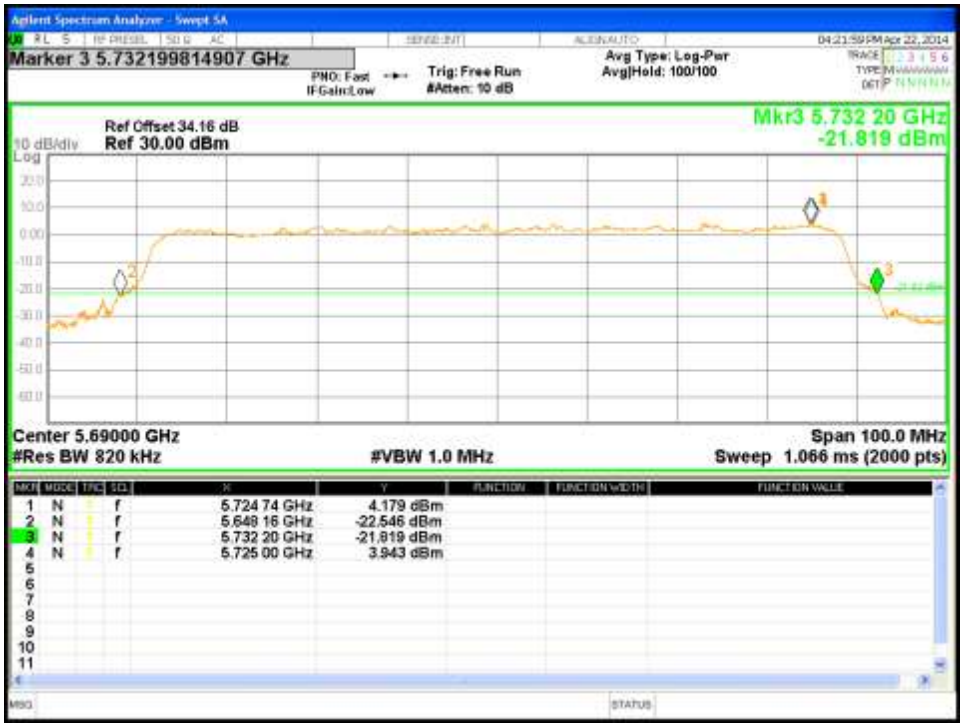

Figure 161: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch0

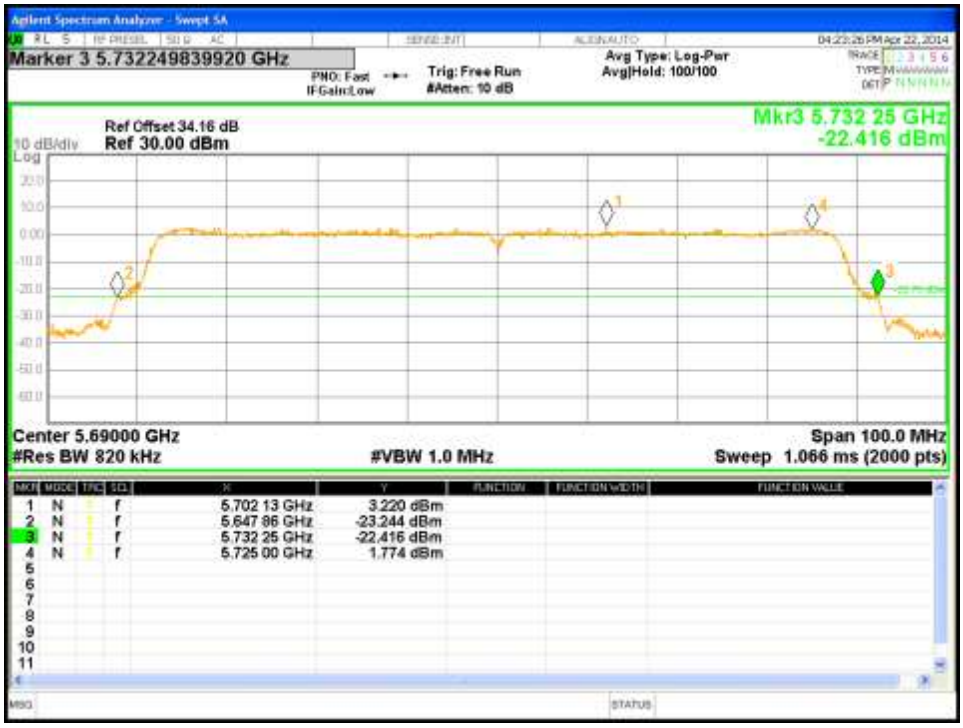

Figure 162: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch1

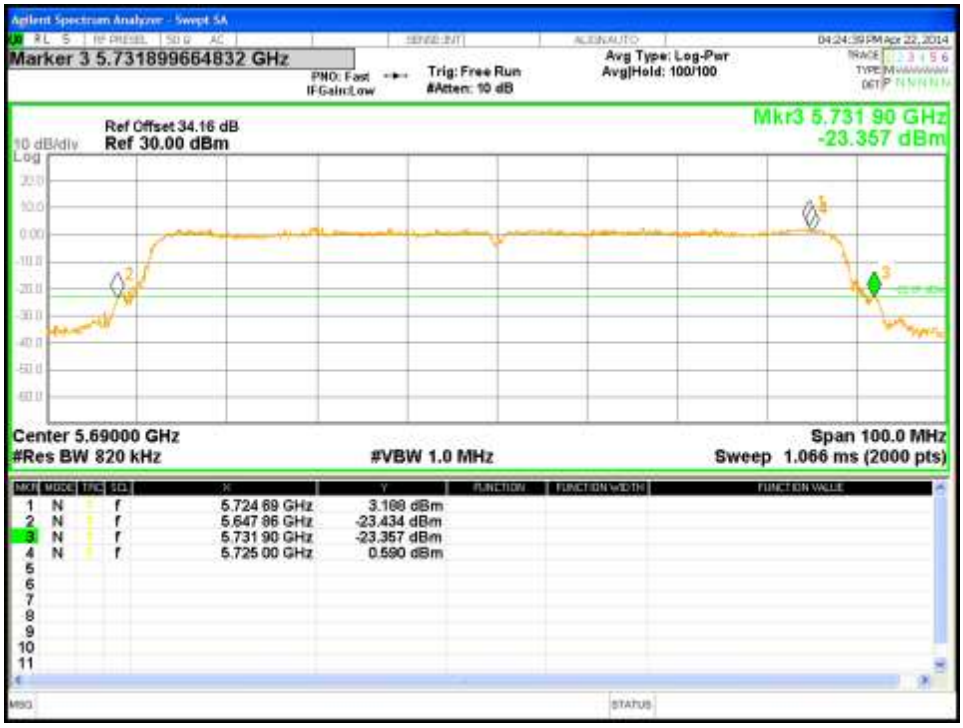

Figure 163: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch2

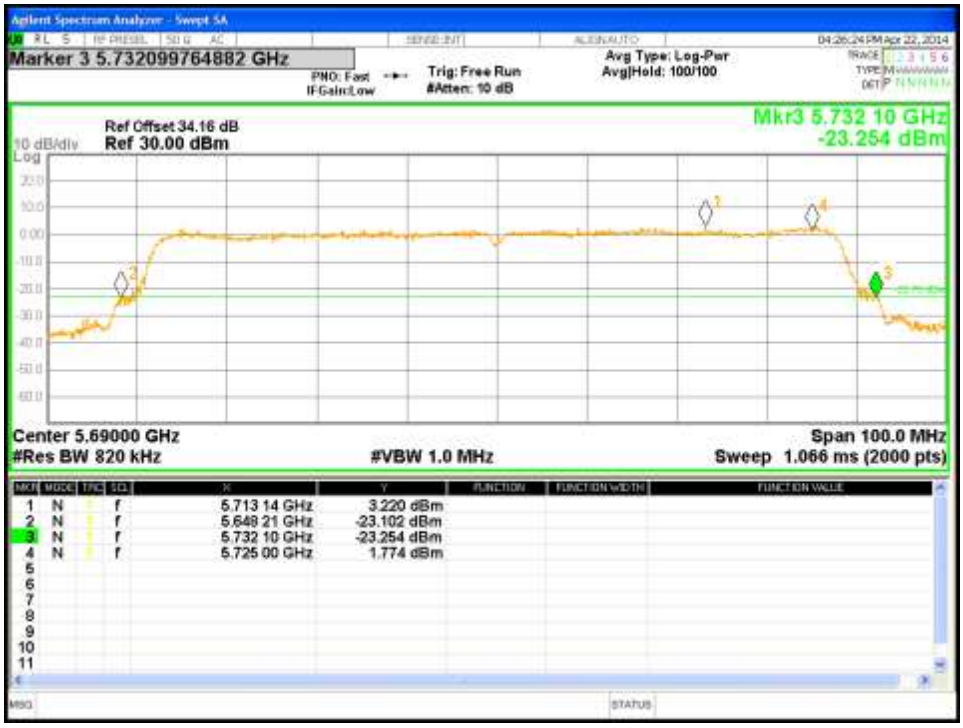

Figure 164: Occupied Bandwidth-5690MHz-VHT80-MCS0-Ch3

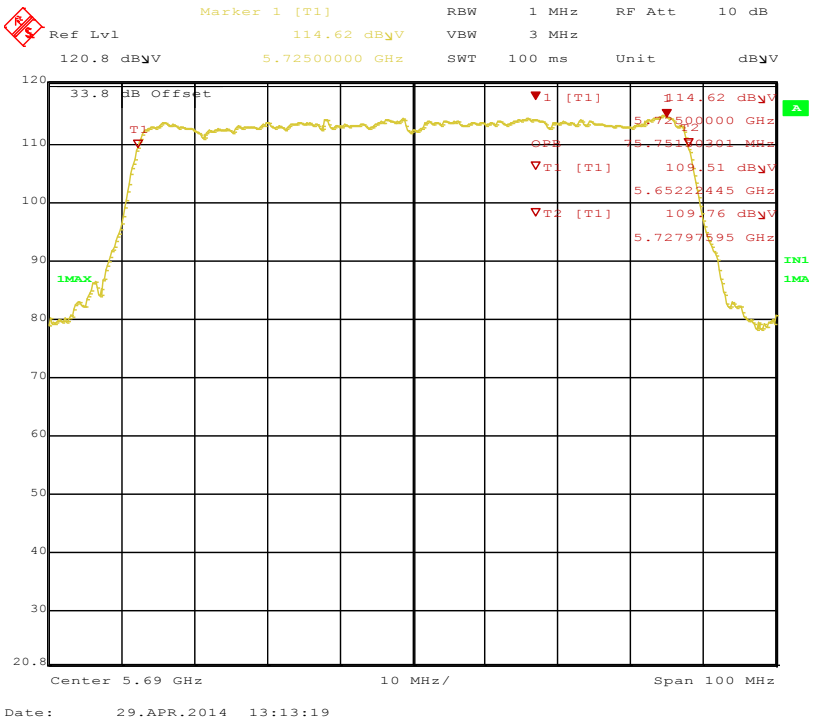

Figure 165: 99% Bandwidth-5690MHz-VHT80-MCS0-Ch0

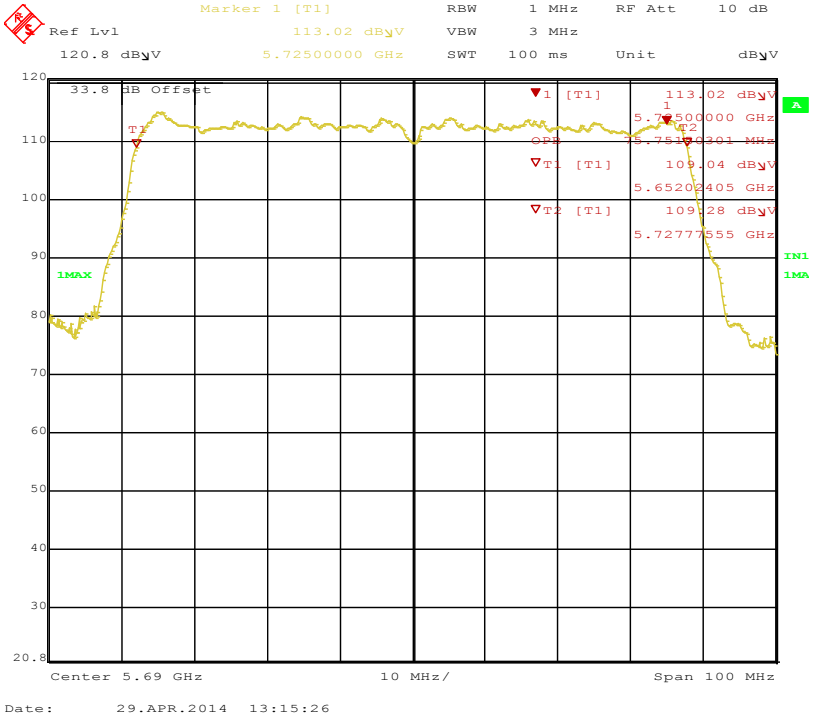

Figure 166: 99% Bandwidth-5690MHz-VHT80-MCS0-Ch1

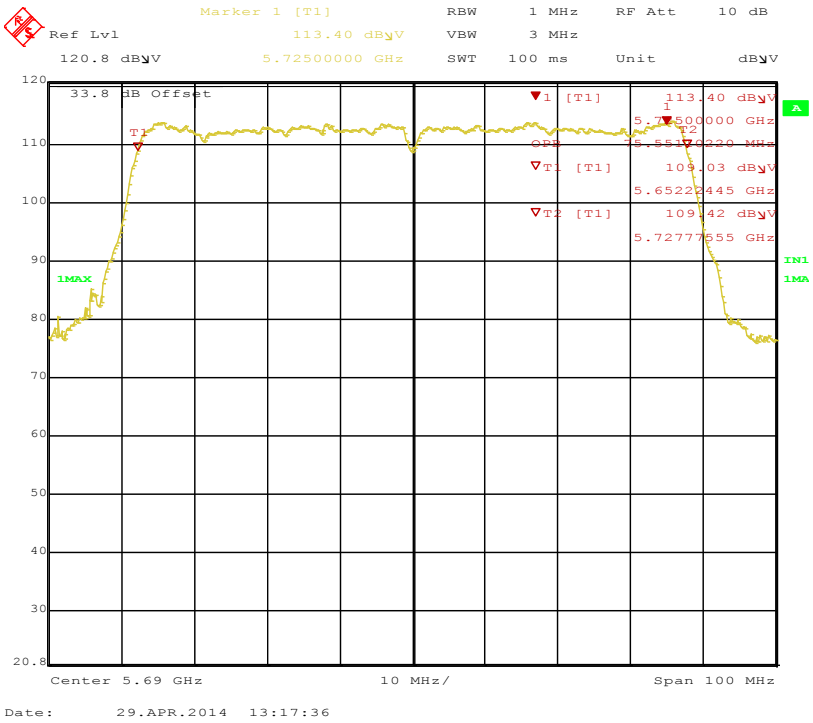

Figure 167: 99% Bandwidth-5690MHz-VHT80-MCS0-Ch2

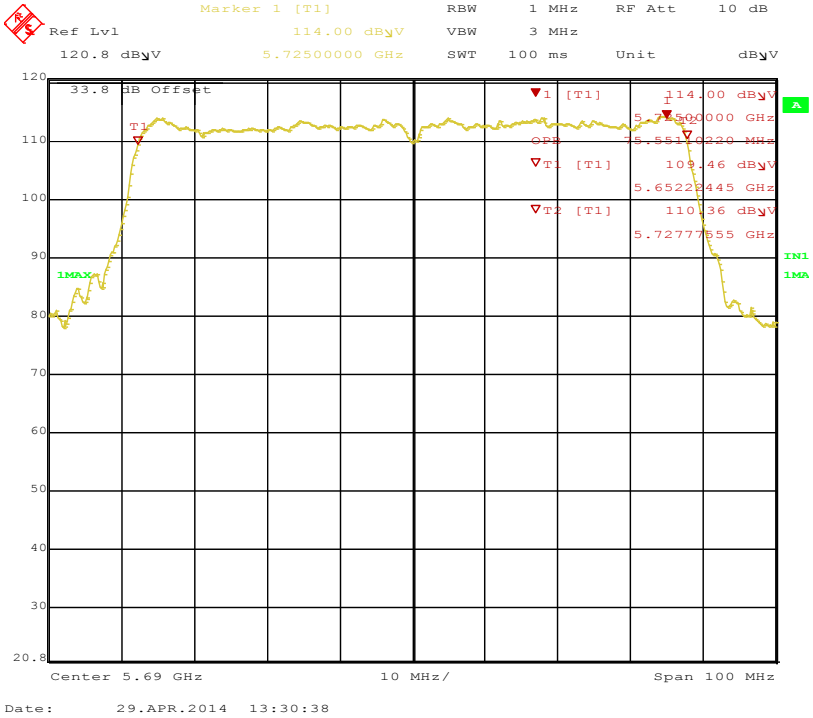

Figure 168: 99% Bandwidth-5690MHz-VHT80-MCS0-Ch3

4.3 Peak Excursion

According to the CFR47 Part 15.407 (a)(6), the ratio of the peak excursion of the modulation envelope(measured suing a peak hold function) to the maximum conducted output power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

4.3.1 **Test Method**

The ANSI C63.10-2009 Section 6.10.4 conducted method was used to measure the peak excursion.

The measurement was performed with modulation per CFR47 Part 15.407 (a) (6). This test was conducted on 3 channels in each operating mode in frequency range 5470 MHz to 5725 MHz with band crossing channel on the test sample, S/N 121404000111. The worst sample result indicated below.
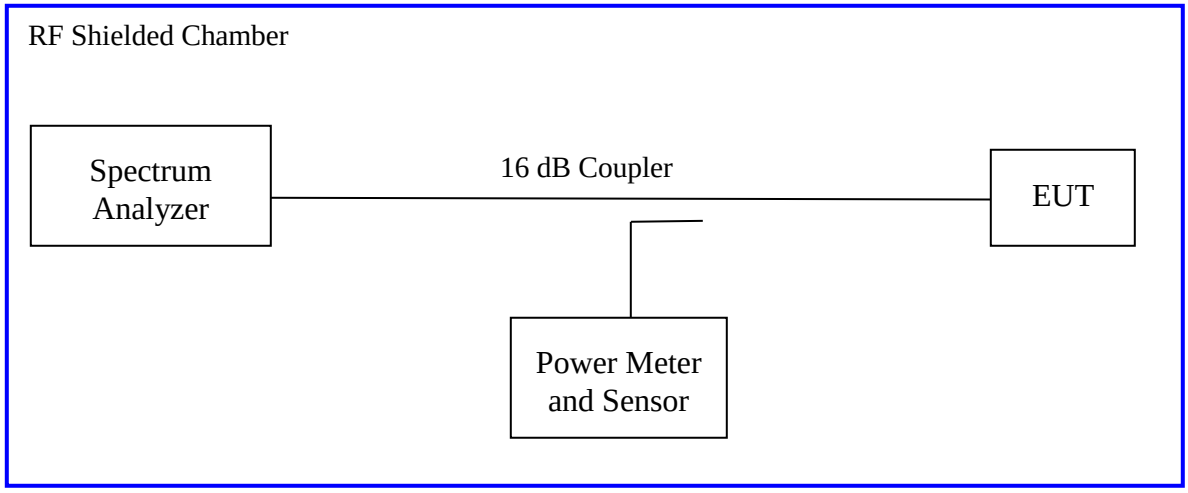
Test Setup: