

FCC PART 15 Subpart C

EMI MEASUREMENT AND TEST REPORT

For

Axesstel, Inc.

6305 Lusk Blvd.
San Diego, CA 92121

FCC ID: PH7VZ1-3DWCB-B

2003-08-19

This Report Concerns: ☒ Permissive Change Report	Equipment Type: Cordless Phone
Test Engineer: Benjamin Jin / 	
Report Number: R0307295	
Test Date: 2003-08-04	
Reviewed By: Ling Zhang / 	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE	4
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	5
1.4 TEST METHODOLOGY	5
1.5 TEST FACILITY	5
1.6 TEST EQUIPMENT LIST	6
1.7 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	6
1.8 EXTERNAL I/O CABLING LIST AND DETAILS	6
1.9 POWER SUPPLY INFORMATION.....	7
2 - SYSTEM TEST CONFIGURATION.....	8
2.1 DESCRIPTION OF TEST CONFIGURATION	8
2.2 EQUIPMENT MODIFICATIONS	8
2.3 CONFIGURATION OF TEST SYSTEM.....	8
2.4 TEST SETUP BLOCK DIAGRAM	9
3 - SUMMARY OF TEST RESULTS.....	10
4 - CONDUCTED OUTPUT POWER MEASUREMENT.....	11
4.1 STANDARD APPLICABLE	11
4.2 MEASUREMENT PROCEDURE.....	11
4.3 MEASUREMENT RESULT	11
5 - 6 DB BANDWIDTH.....	14
5.1 STANDARD APPLICABLE	14
5.2 MEASUREMENT PROCEDURE.....	14
5.3 MEASUREMENT DATA.....	14
6 - SPURIOUS EMISSION.....	17
6.1 STANDARD APPLICABLE	17
6.2 MEASUREMENT PROCEDURE.....	17
6.3 MEASUREMENT DATA.....	17
7 - 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT.....	21
7.1 STANDARD APPLICABLE	21
7.2 MEASUREMENT PROCEDURE.....	21
7.3 TEST RESULTS	21
8 - POWER SPECTRAL DENSITY.....	24
8.1 STANDARD APPLICABLE	24
8.2 MEASUREMENT PROCEDURE.....	24
8.3 TEST RESULTS	24
9 - ANTENNA REQUIREMENT.....	27
9.1 STANDARD APPLICABLE	27
9.2 ANTENNA CONNECTED CONSTRUCTION	27
10 - RF SAFETY REQUIREMENTS TO 2.1091	28
11 - SPURIOUS RADIATED EMISSION DATA	29
11.1 MEASUREMENT UNCERTAINTY	29
11.2 EUT SETUP.....	29
11.3 SPECTRUM ANALYZER SETUP	29
11.4 TEST PROCEDURE	30
11.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	30
11.6 SUMMARY OF TEST RESULTS	30
11.7 RADIATED EMISSION TEST DATA FOR BASE, 900MHZ TO 10GHZ, 3 METERS	31
12 - CONDUCTED EMISSIONS	33

12.1 MEASUREMENT UNCERTAINTY	33
12.2 EUT SETUP	33
12.3 SPECTRUM ANALYZER SETUP	33
12.4 TEST PROCEDURE	33
12.5 SUMMARY OF TEST RESULTS	34
12.6 CONDUCTED EMISSIONS TEST DATA	34
12.7 PLOT OF CONDUCTED EMISSIONS TEST DATA	34

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The Axesstel, Inc.'s product, FCC ID: PH7VZ1-3DWCB-B or the "EUT" as referred to in this report is a hybrid cordless/cellular phone. The EUT is the base part of the cordless phone which measures approximately 6.1"L x 6.5"W x 5.5"H.

* The test data gathered is from typical production samples provided by the manufacturer.

1.2 Objective


This report is prepared on behalf of Axesstel, Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A, B, and C of the Federal Communication Commissions rules.

This permissive change application has the following modifications:

1. These are the descriptions of the modifications.

Item	Part	Purpose	Revision	Remark
ESD Diode	Base Charge	ESD improvement	D110, D111, D112, D113	Add
Coil	Base Charge	ESD improvement	L108, L109 1mH Bulk Type	Add
Chip Cap'	Base Logic	By pass capacitor	C162, C163 100pF	Add

2. Layout change due to the component addition and for ESD (Electric Shock Damage) improvement is as in the following diagram.

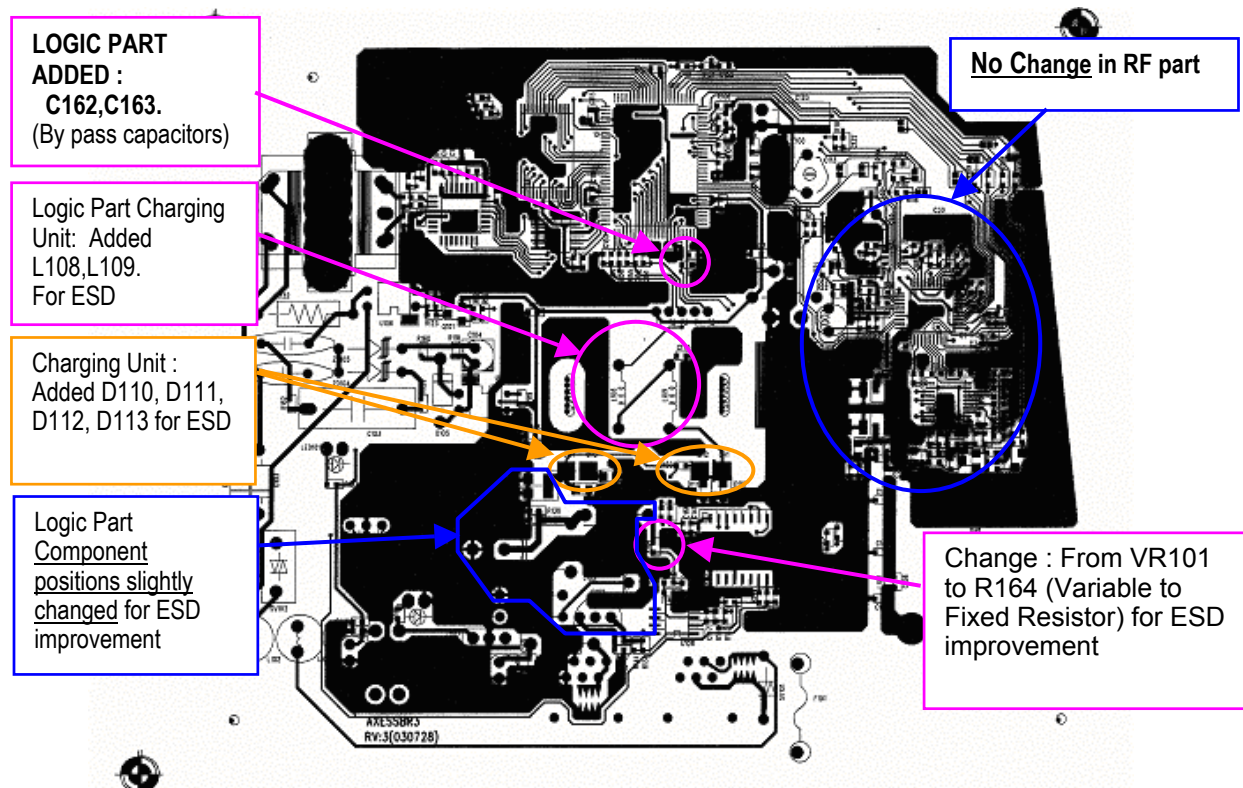

The objective of the manufacturer is to demonstrate compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power density, 100 kHz Bandwidth of Band Edges Measurement, and Conducted and Spurious Radiated Emission.

1.3 Related Submittal(s)/Grant(s)

The original grant was issued on 2003-05-29, please refer to BACL report R0304032 for more details.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 –1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22: 1997, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2517A01610	2003-10-30
HP	Spectrum Analyzer	8593A	29190A00242	2004-05-01
HP	Amplifier	8447E	1937A01054	2004-05-01
HP	Quasi-Peak Adapter	85650A	2521A00718	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-05-01
Com-Power	LISN	LI-200	12005	2004-03-28
Com-Power	LISN	LI-200	12008	2004-03-28
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Log Periodic Antenna	AB-900	15049	2004-05-01
Rohde & Schwarz	EMI Test Receiver	ESPI	1147 8007 07	2003-12-03
Agilent	Spectrum Analyzer (9KHz – 40GHz)	8564E	08303	2004-08-01
Agilent	Spectrum Analyzer (9KHz – 50GHz)	8565EC	06042	2004-05-03
HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2004-03-14
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-31

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY (NIST).

1.7 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
IBM	Notebook	Iseries	N/A	DoC
TELTONE CORP.	Simulator	TLS-3B-01	80071	DOC
Tak Fi	Telephone	T106B	N/A	N/A

1.8 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded Telephone Cable	2.0	RJ11 Port/EUT	Telephone Simulator RJ11 Port
None-Shielded Telephone Cable	2.0	RJ11 Port/Simulator	Telephone RJ11 Port/Panasonic

1.9 Power Supply Information

Manufacturer	Description	Model	Serial Number	FCC ID
Seung Jin Electronics	AC/DC Adapter	E132996	None	DOC

2 - SYSTEM TEST CONFIGURATION

2.1 Description of Test Configuration


The EUT was configured for testing in a typical fashion (as normally used by a typical user).

Base being tested: The Cordless Telephone – Base was placed on the wooden table. The Low, middle, and high channels were tested. The base was connected to the line simulator and an AC adapter via its Tel Line and power ports, respectively. The base was transmitting and receiving from the handset. The conducted as well as radiated data were taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the 2.3.


2.2 Equipment Modifications

No modification(s) was made by BACL Corp. to ensure the EUT complies with the applicable limits and standards.

2.3 Configuration of Test System

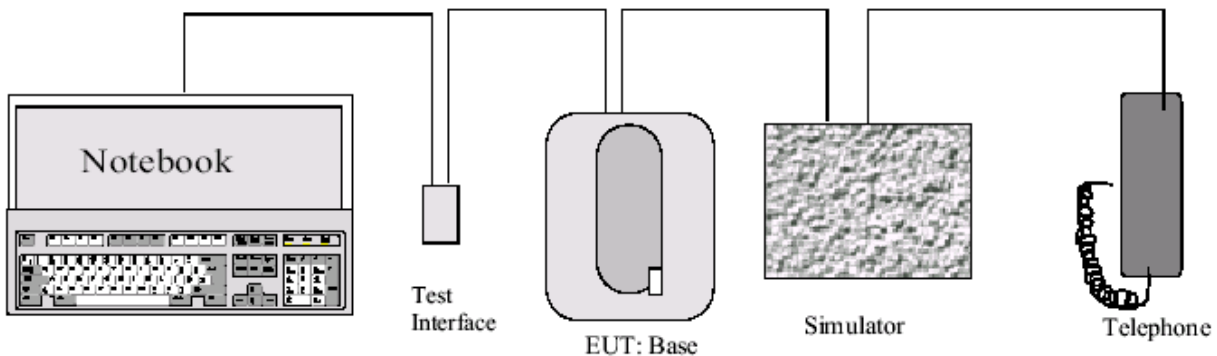

2.4 Test Setup Block Diagram

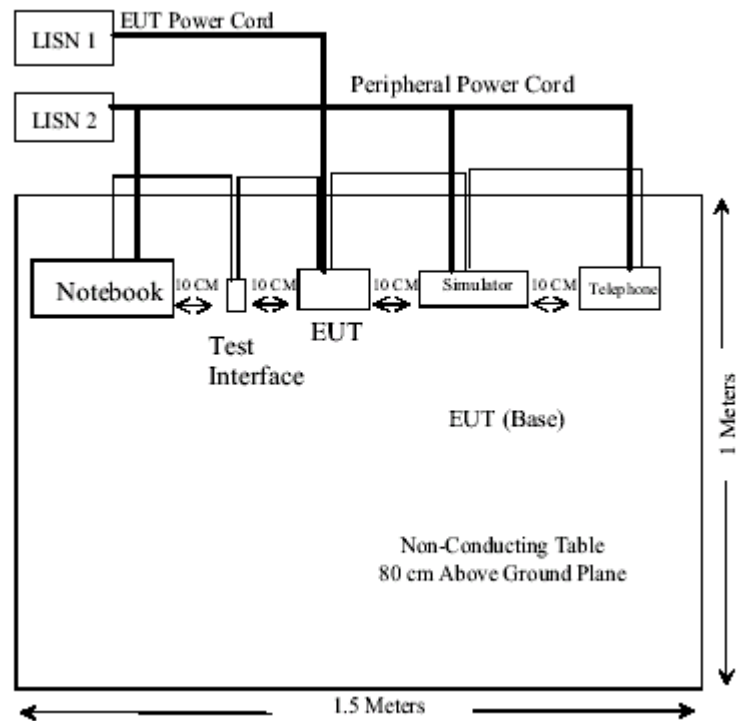

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	Section Reference
§ 15.205	Restricted Bands	Compliant	Section 11
§15.203	Antenna Requirement	Compliant	Section 9
§15.207 (a)	Conducted Emission	Compliant	Section 12
§15.209 (f)	Spurious Emission	Compliant	Section 6, 11
§15.247 (a) (2)	6 dB Bandwidth	Compliant	Section 5
§15.247 (b) (3)	Peak Output Power	Compliant	Section 4
§15.247 (b) (5)	RF Exposure	Compliant	Section 10
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edges	Compliant	Section 7
§15.247 (d)	Peak Power Spectral Density	Compliant	Section 8
§ 15.214 (c)	Privacy Statement	Compliant	Label
§ 15.214 (d)	Security Code	Compliant	Manual

4 - CONDUCTED OUTPUT POWER MEASUREMENT

4.1 Standard Applicable

According to §15.247(b) (3), for systems using digital modulation, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.



4.2 Measurement Procedure


1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4.3 Measurement Result

Please refer to the attached pictures for more information.

Unit	Channel	Output Power (dBm)	Output Power (W)	Standard (W)	Result
Base	Low	18.00	0.063	$\leq 1\text{W}$	Compliant
Base	Mid	17.83	0.061	$\leq 1\text{W}$	Compliant
Base	High	17.67	0.058	$\leq 1\text{W}$	Compliant

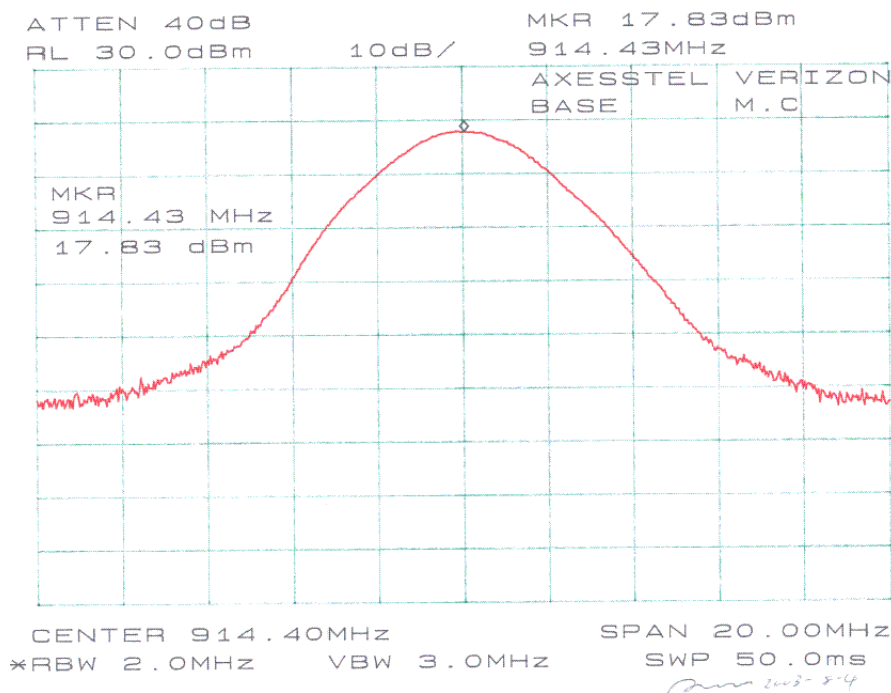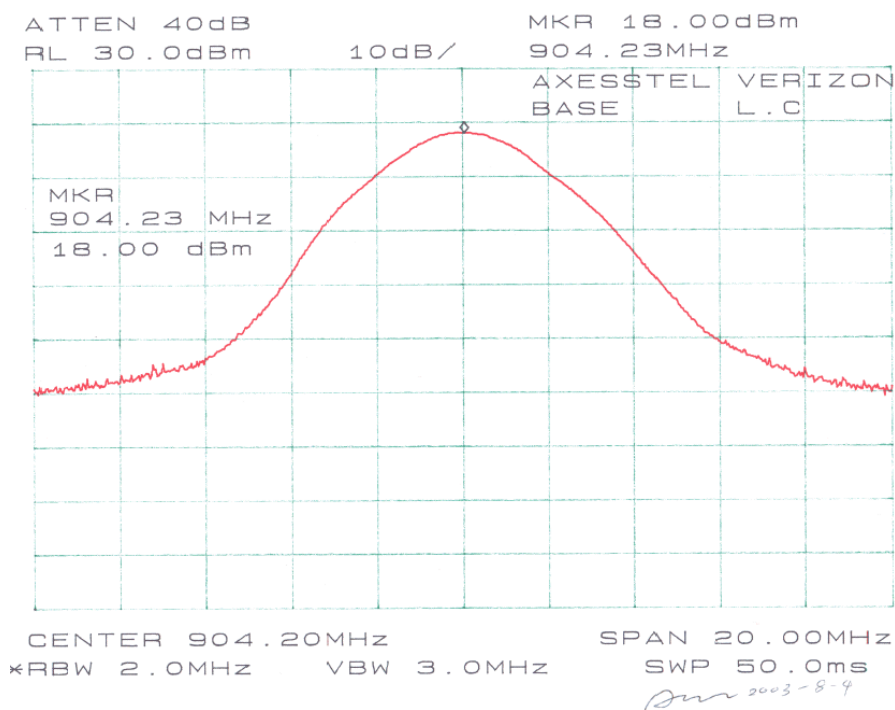

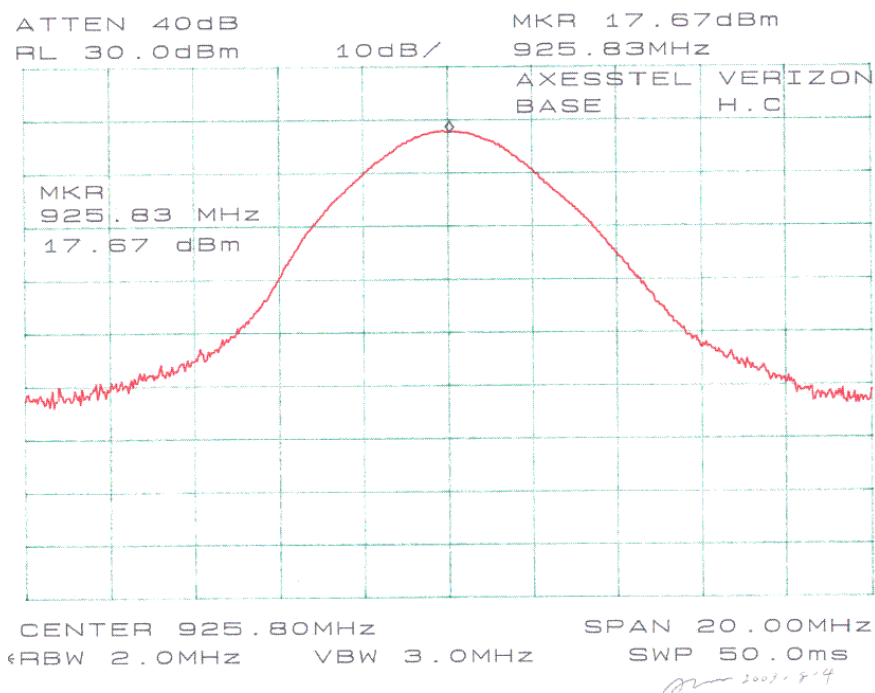

5 - 6 DB BANDWIDTH

5.1 Standard Applicable

According to §15.247(a)(2), for digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.



5.2 Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

5.3 Measurement Data

Please refer to the following pages.

Unit	Channel	6 DB Bandwidth (MHz)	6 DB Bandwidth (kHz)	Standard (kHz)	Result
Base	Low	1.57	1570	≥ 500	Compliant
Base	Mid	1.53	1530	≥ 500	Compliant
Base	High	1.57	1570	≥ 500	Compliant

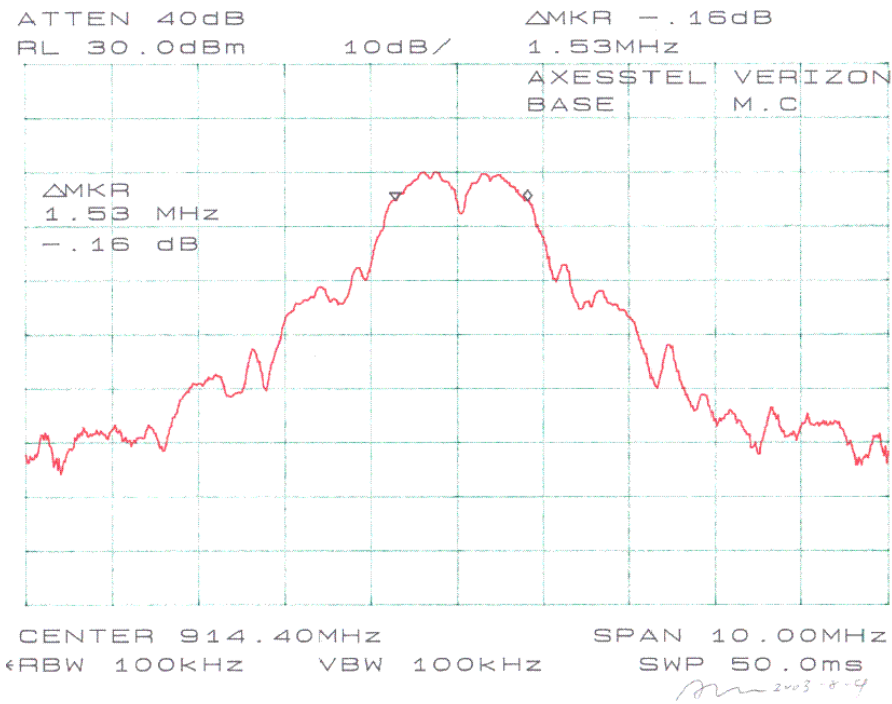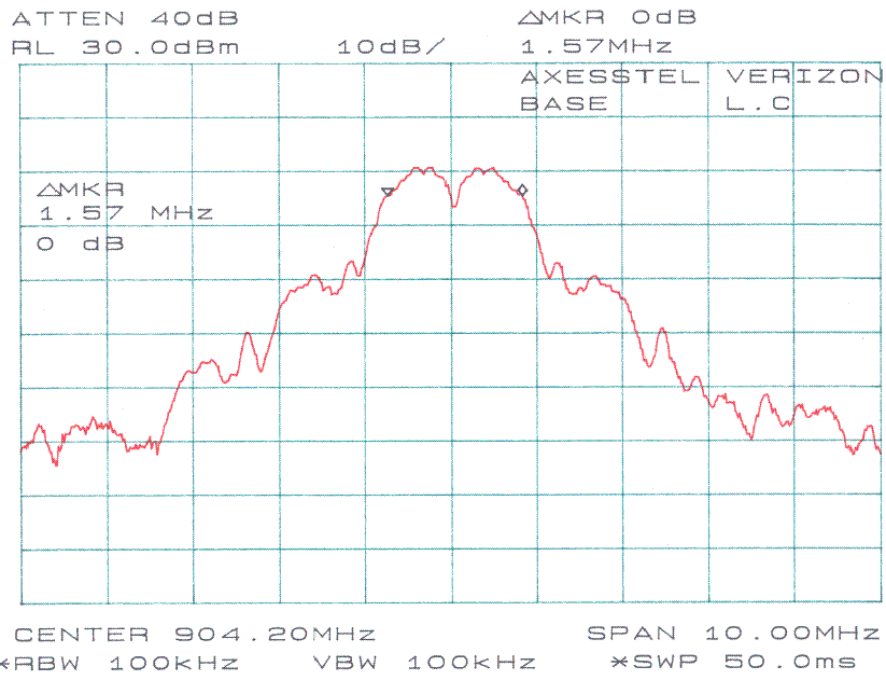

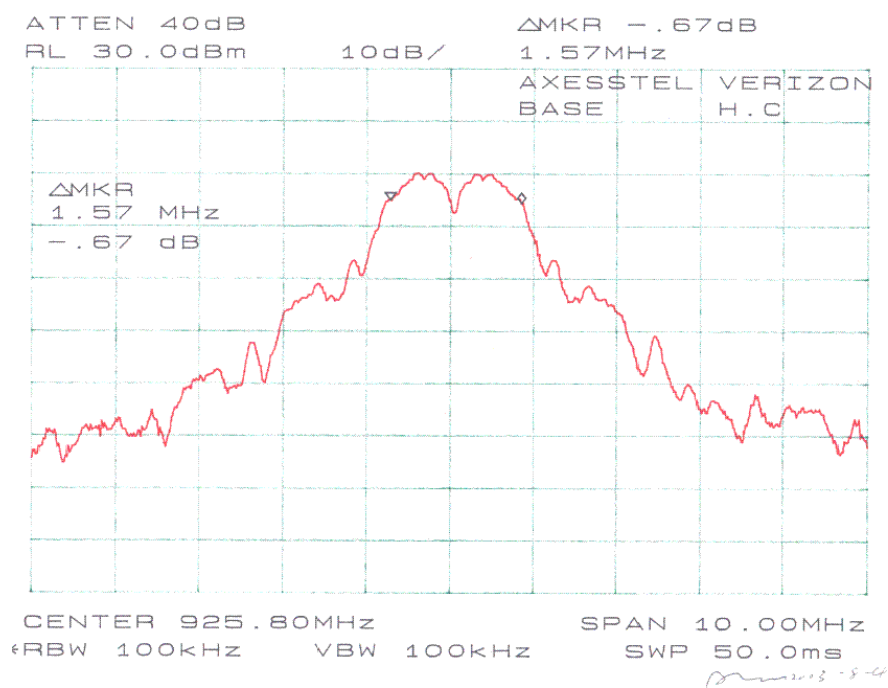

6 - SPURIOUS EMISSION

6.1 Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.



6.2 Measurement Procedure



1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.



6.3 Measurement Data

Please refer to the following pages.

Spurious Emission	Test Result (Base)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant

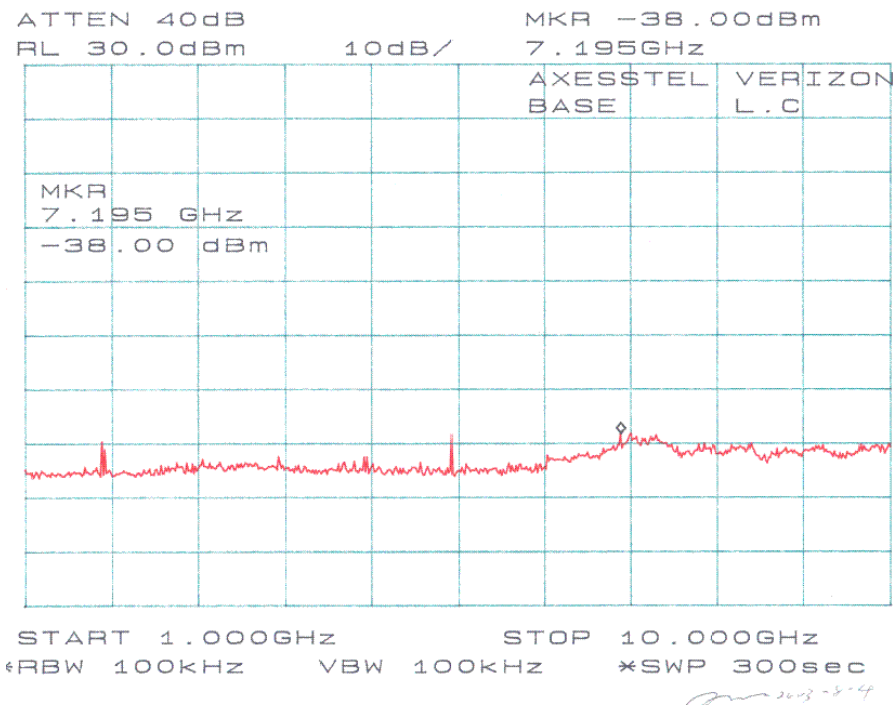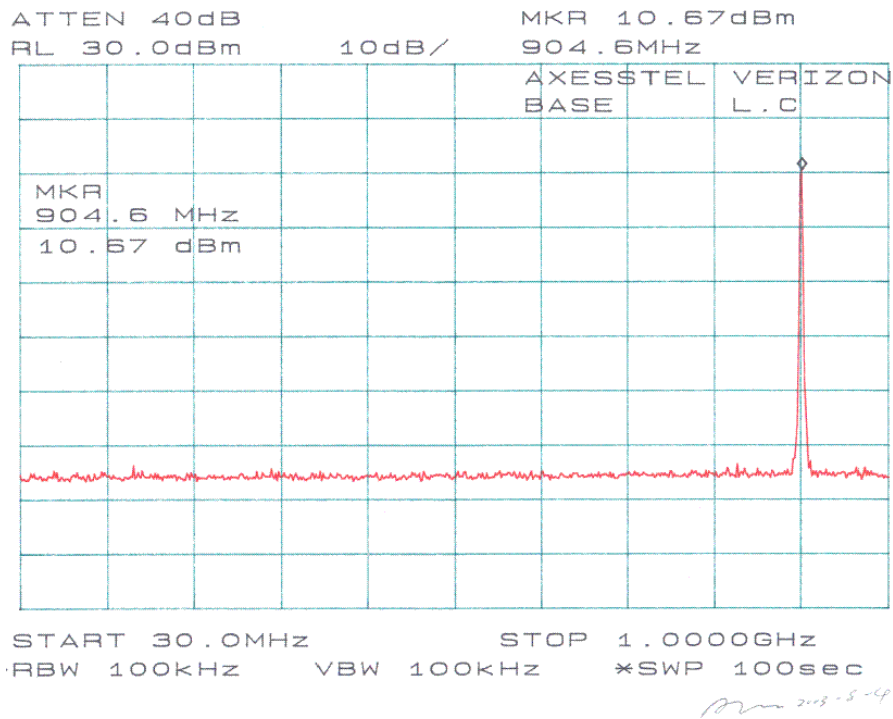

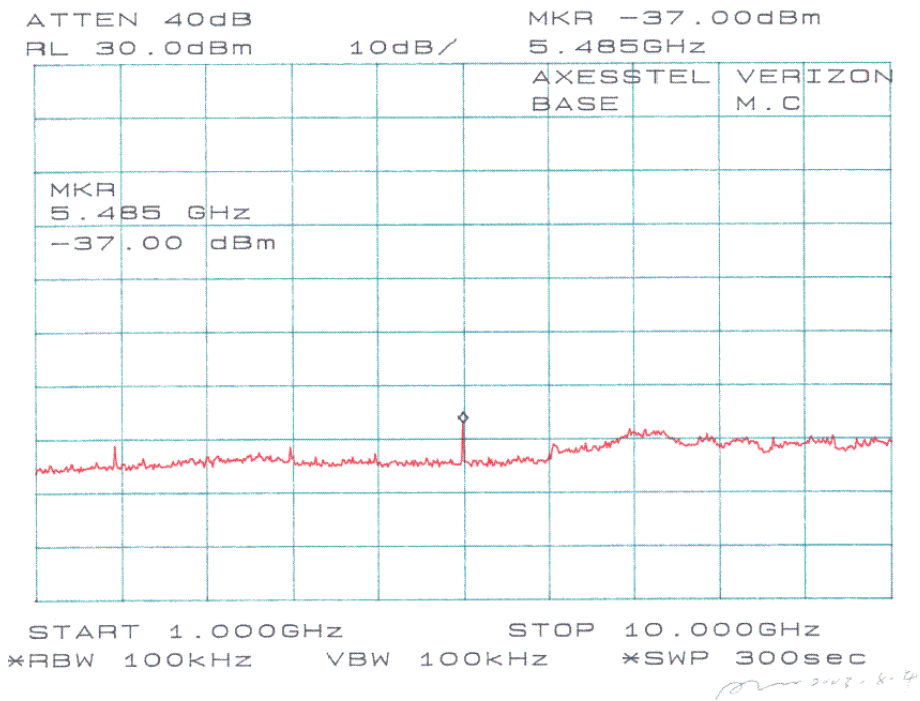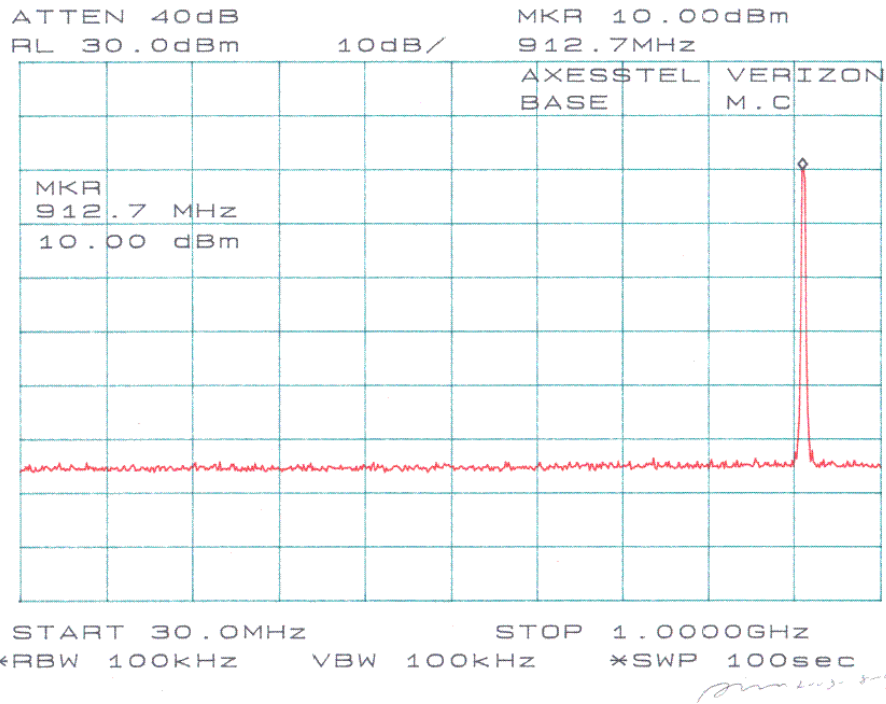

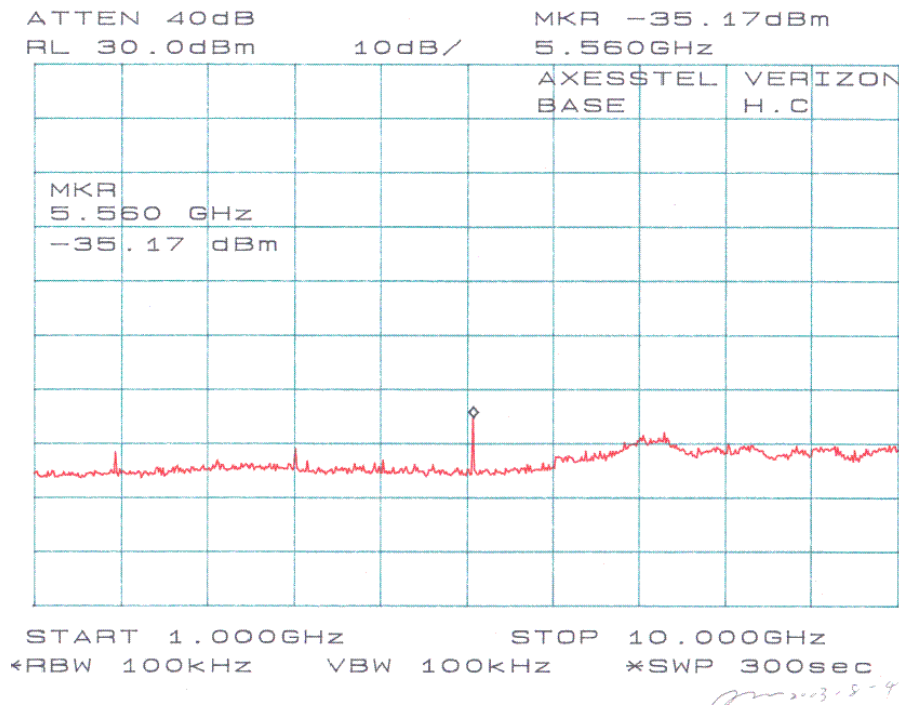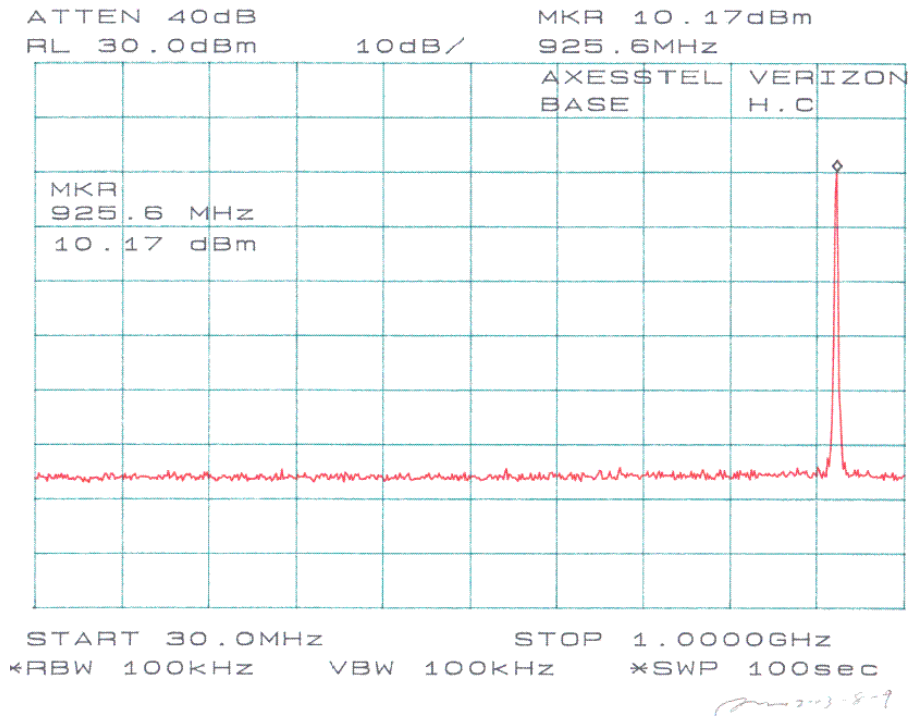

7 - 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT

7.1 Standard Applicable

According to §15.247(c), if *any* 100 kHz bandwidth outside these frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, must also comply wit the radiated emission limits specified in § 15.209(a).



7.2 Measurement Procedure



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 Test Results

Please refer to the following pages.

Band Edge Bandwidth	Test Result (Base)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant

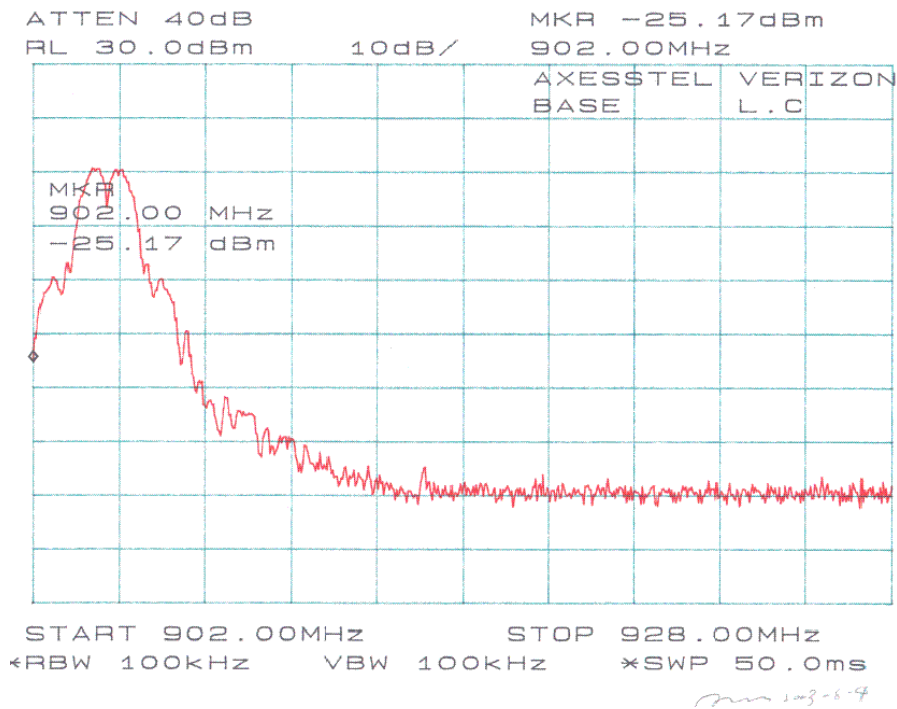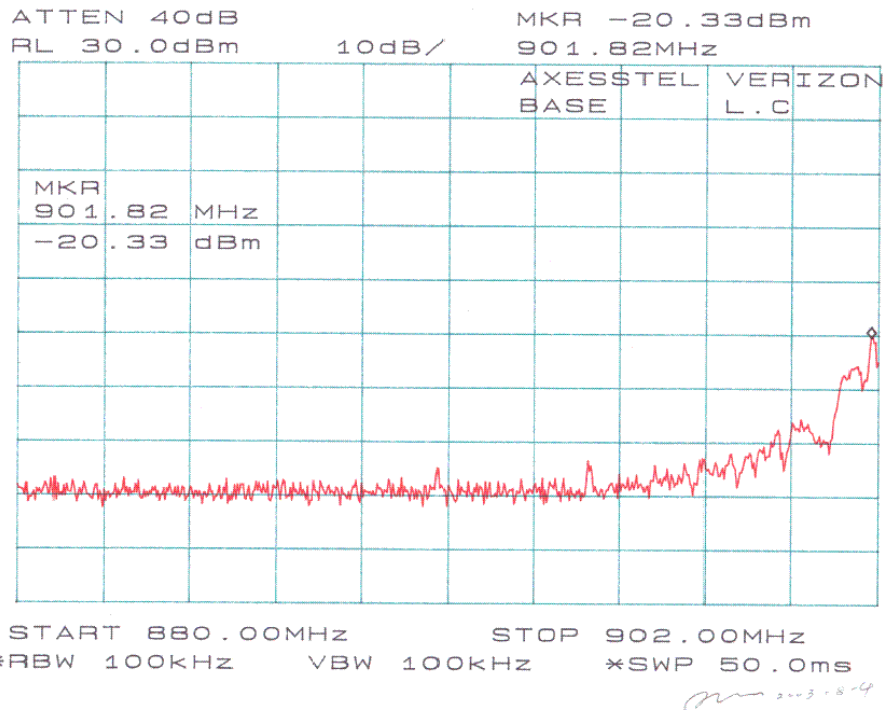

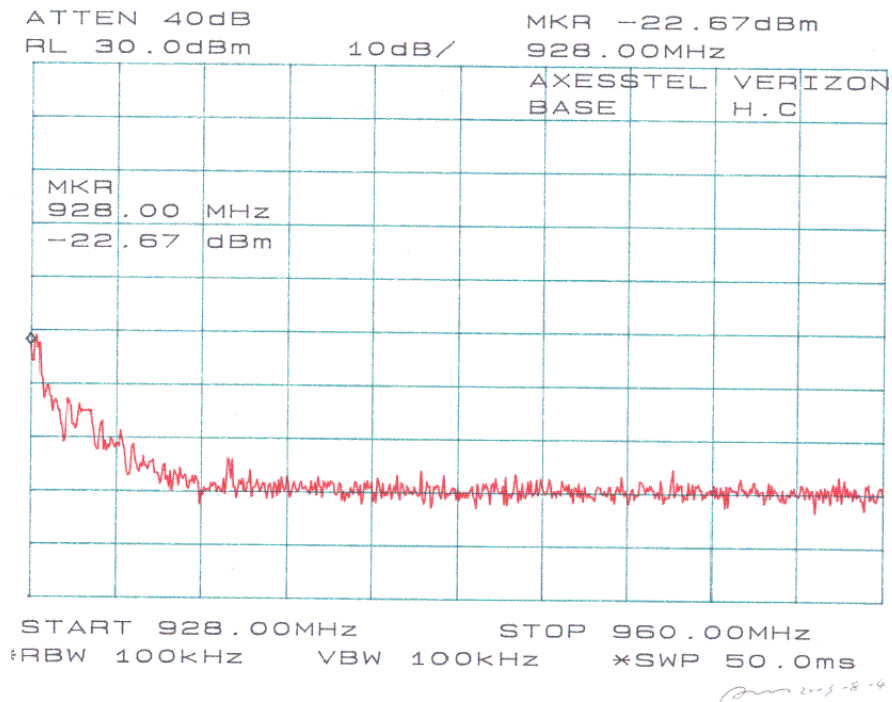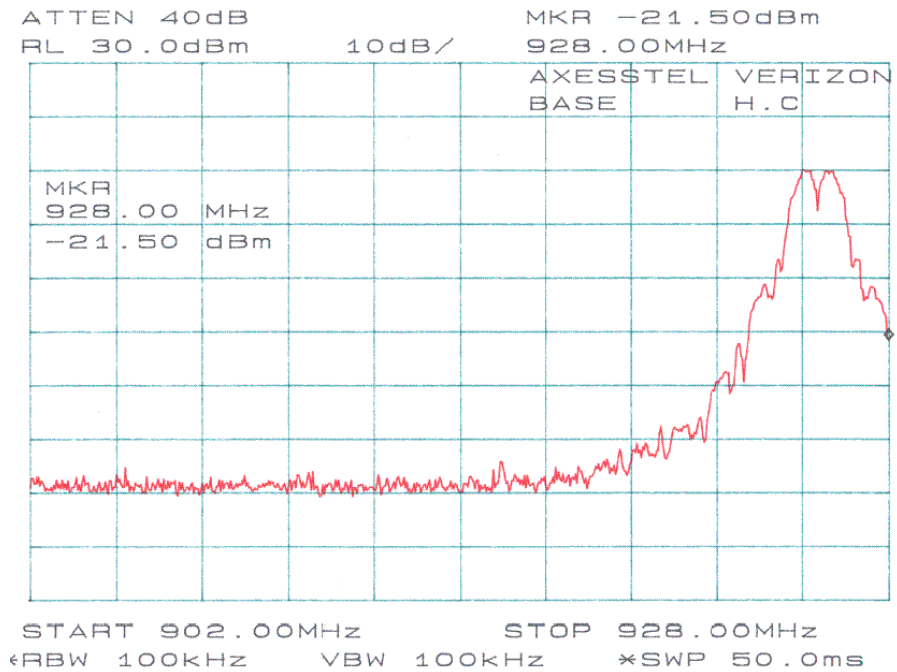

8 - POWER SPECTRAL DENSITY

8.1 Standard Applicable

According to §15.247 (d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



8.2 Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

8.3 Test Results

Please refer to the following plot(s).

Power Density	Test Result (Base)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant

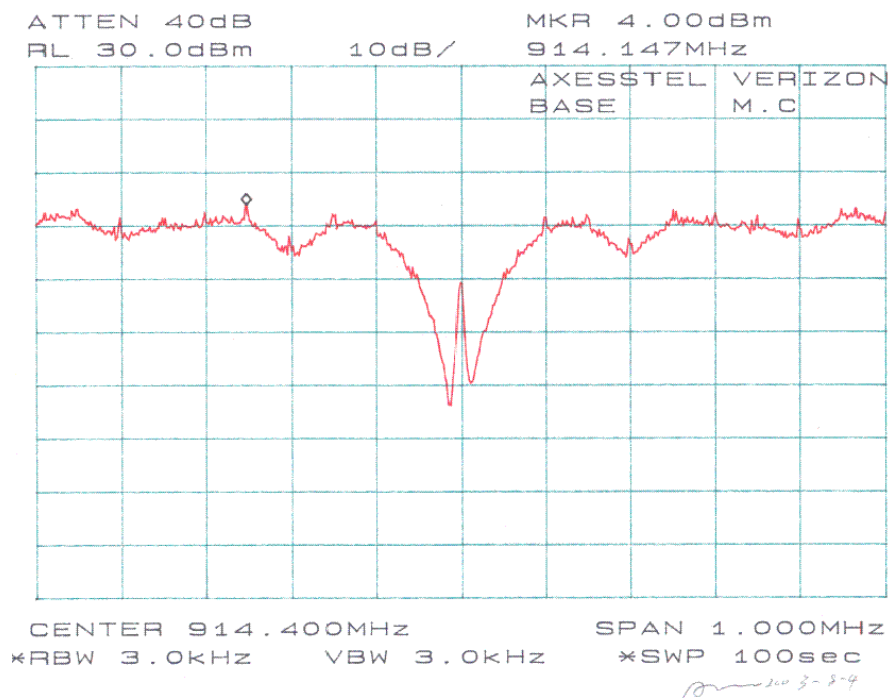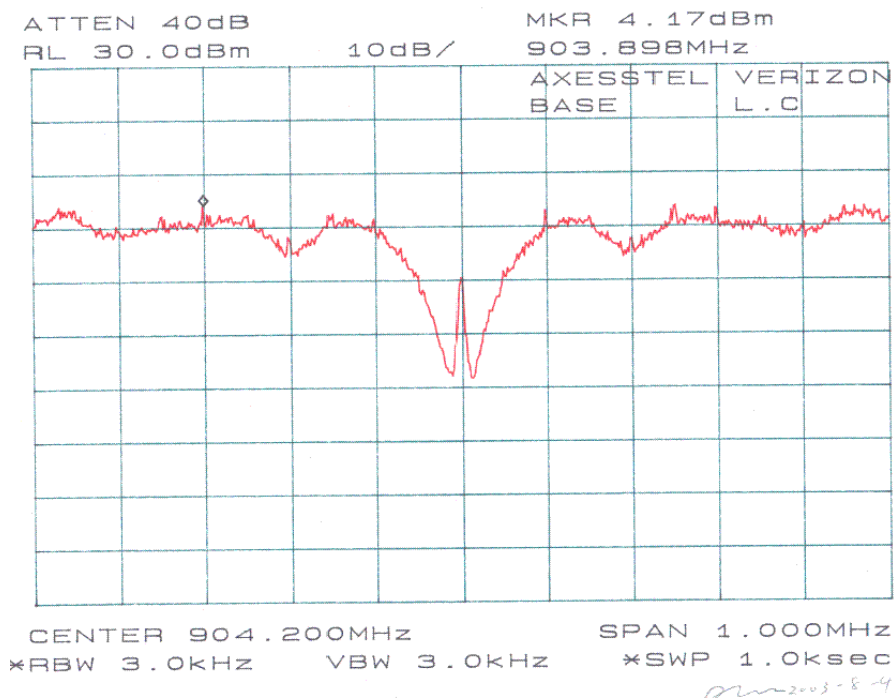

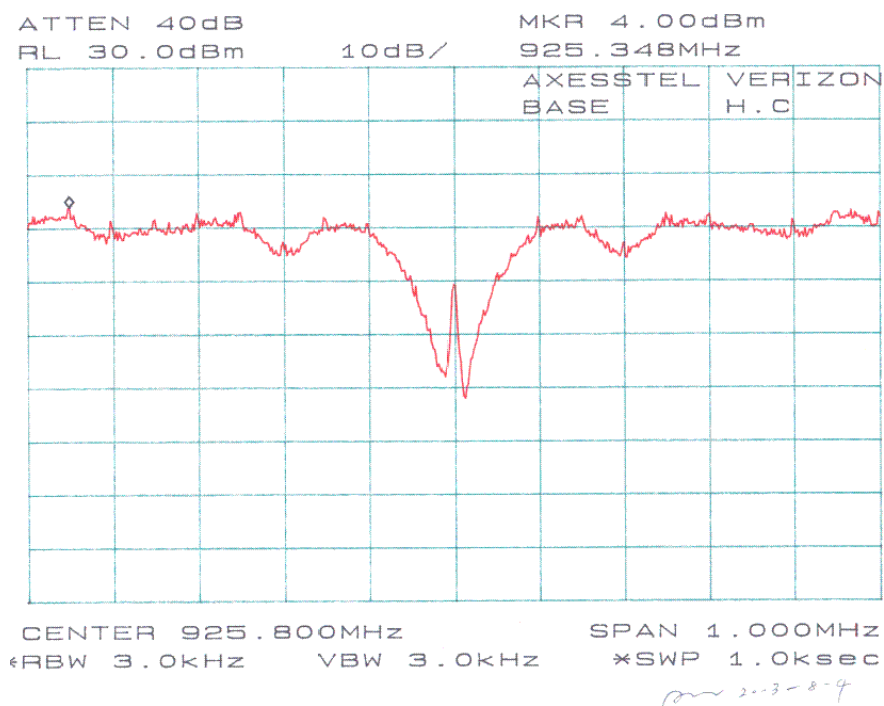

9 - ANTENNA REQUIREMENT

9.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Antenna Connected Construction

The directional gain of antenna used for transmitting is -1 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

10 - RF SAFETY REQUIREMENTS TO 2.1091

According to section 3 of Supplement C to OET Bulletin 65, Part 15 Transmitters are categorically excluded from Routine Environmental Evaluation by measurement or precise computations unless otherwise required by the Commissions.

According to §15.247(b)(5) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-15000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

For handset of the EUT:

Maximum peak output power at antenna input terminal: 18.00 (dBm)

Maximum peak output power at antenna input terminal: 63.10 (mW)

Antenna Gain (typical): -1 (dBi)

Maximum antenna gain: 0.79 (numeric)

Prediction distance: 20 (cm)

Predication frequency: 900 (MHz)

MPE limit for uncontrolled exposure at prediction frequency: 0.6 (mW/cm²)

Power density at predication frequency: 0.0099(mW/cm²)

Test Result

The predicted power density level at 20 cm is 0.0099 mW/cm². This is below the uncontrolled exposure limit of 0.6 mW/cm² at 900 MHz.

11 - SPURIOUS RADIATED EMISSION DATA

11.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

11.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4 - 1992. The specification used was the FCC 15 Subpart C limits.

The base of the EUT was connected to a 120 VAC / 60 Hz power source.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

11.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 10 GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10KHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

11.4 Test Procedure

For the radiated emissions test, both the EUT and all support equipment power cords were connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "Qp" in the data table.

11.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

11.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.247, and had the worst margin of:

Base, 900MHz to 10GHz, 3 meters

- 21.2 dBμV at 2712.60 MHz in the Vertical polarization, Low Channel
- 17.2 dBμV at 2743.20 MHz in the Horizontal polarization, Middle Channel
- 21.2 dBμV at 2777.4 MHz in the Vertical polarization, High Channel
- 11.5 dBμV at 86.19 MHz in the Vertical polarization, Unintentional Emission

11.7 Radiated Emission Test Data for Base, 900MHz to 10GHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel											
904.20	107.4	FUND/PEAK	250	1.5	V	23.6	3.8	25.0	109.8		
904.20	102.3	FUND/PEAK	330	1.2	H	23.6	3.8	25.0	104.7		
904.20	103.0	FUND/AVG	250	1.5	V	23.6	3.8	25.0	105.4		
904.20	96.6	FUND/AVG	330	1.2	H	23.6	3.8	25.0	99.0		
2712.60	30.1	AVG	0	1.5	V	29.0	3.7	30.0	32.8	54	-21.2
1808.40	34.3	AVG	90	1.5	V	25.3	2.6	30.0	32.2	54	-21.8
1808.40	34.2	AVG	30	1.2	H	25.3	2.6	30.0	32.1	54	-21.9
2712.60	29.4	AVG	270	1.2	H	29.0	3.7	30.0	32.1	54	-21.9
1808.40	48.8	PEAK	90	1.5	V	25.3	2.6	30.0	46.7	74	-27.3
1808.40	48.5	PEAK	30	1.2	H	25.3	2.6	30.0	46.4	74	-27.6
2712.60	39.7	PEAK	0	1.5	V	29.0	3.7	30.0	42.3	74	-31.7
2712.60	38.8	PEAK	270	1.2	H	29.0	3.7	30.0	41.5	74	-32.5
Middle Channel											
914.40	107.5	FUND/PEAK	220	1.2	V	23.2	3.9	25.0	109.6		
914.40	103.4	FUND/PEAK	15	1.5	H	23.2	3.9	25.0	105.5		
914.40	104.1	FUND/AVG	220	1.2	V	23.2	3.9	25.0	106.2		
914.40	98.8	FUND/AVG	15	1.5	H	23.2	3.9	25.0	100.9		
2743.20	34.2	AVG	30	1.5	H	29.0	3.7	30.0	36.8	54	-17.2
2743.20	31.5	AVG	160	1.2	V	29.0	3.7	30.0	34.2	54	-19.8
1828.80	34.6	AVG	180	1.5	V	25.3	2.6	30.0	32.5	54	-21.5
1828.80	34.3	AVG	270	1.2	H	25.3	2.6	30.0	32.2	54	-21.8
1828.80	48.2	PEAK	180	1.5	V	25.3	2.6	30.0	46.1	74	-27.9
1828.80	46.7	PEAK	270	1.2	H	25.3	2.6	30.0	44.6	74	-29.4
2743.20	41.5	PEAK	30	1.5	H	29.0	3.7	30.0	44.2	74	-29.8
2743.20	40.7	PEAK	160	1.2	V	29.0	3.7	30.0	43.3	74	-30.7

Radiated Emission Test Data for Base, 900MHz to 10GHz, 3 meters (Continued)

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
High Channel											
925.80	108.4	FUND/PEAK	90	1.5	V	23.4	4.0	25.0	110.8		
925.80	107.2	FUND/PEAK	30	1.2	H	23.4	4.0	25.0	109.6		
925.80	105.1	FUND/AVG	90	1.5	V	23.4	4.0	25.0	107.5		
925.80	103.7	FUND/AVG	30	1.2	H	23.4	4.0	25.0	106.1		
2777.4	30.1	AVG	150	1.2	V	29.0	3.7	30.0	32.8	54	-21.2
1851.60	34.5	AVG	90	1.5	V	25.3	2.6	30.0	32.4	54	-21.6
2777.4	29.5	AVG	220	1.8	H	29.0	3.7	30.0	32.2	54	-21.8
1851.60	33.9	AVG	15	1.2	H	25.3	2.6	30.0	31.8	54	-22.2
1851.60	48.2	PEAK	90	1.5	V	25.3	2.6	30.0	46.1	74	-27.9
1851.60	47.6	PEAK	15	1.2	H	25.3	2.6	30.0	45.5	74	-28.5
2777.4	39.8	PEAK	150	1.2	V	29.0	3.7	30.0	42.5	74	-31.5
2777.4	38.6	PEAK	220	1.8	H	29.0	3.7	30.0	41.3	74	-32.7
Unintentional Emission, 30MHz to 900MHz											
86.19	42.5		30	1.5	V	9.8	1.2	25.0	28.5	40	-11.5
112.19	39.6		250	1.2	H	11.3	1.5	25.0	27.4	43.5	-16.1
264.01	38.4		290	1.2	V	13.4	2.2	25.0	29.0	46	-17.0
245.79	37.7		60	1.0	V	13.8	2.2	25.0	28.7	46	-17.3
286.02	35.9		15	1.5	V	13.4	2.3	25.0	26.6	46	-19.4

12 – CONDUCTED EMISSIONS

12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

12.2 EUT Setup

The measurement was performed at shield room, using the same setup per ANSI C63.4 – 1992 measurement procedure. The specification used was FCC Class B limits.

The base of the EUT was connected to a 120 VAC / 60 Hz power source.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

12.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency.....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode.....	Normal

12.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of specification limits). Quasi-peak readings are distinguished with a “Qp”.

12.5 Summary of Test Results

According to the data in section 12.6, the EUT complied with the FCC Conducted margin for a Class B device and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, with the *worst* margin reading of:

-14.9 dB μ V at 23.6 MHz in the Line mode, 150kHz – 30 MHz

12.6 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
23.600	35.1	AVG	Line	50	-14.9
14.100	34.2	AVG	Neutral	50	-15.8
14.100	38.1	QP	Neutral	60	-21.9
2.710	23.4	AVG	Neutral	46	-22.6
23.600	35.5	QP	Line	60	-24.5
2.430	21.2	AVG	Line	46	-24.8
2.430	23.7	QP	Line	56	-32.3
2.710	23.6	QP	Neutral	56	-32.4
0.150	28.9	QP	Neutral	66	-37.1
0.150	28.6	QP	Line	66	-37.4
0.150	7.5	AVG	Neutral	56	-48.5
0.150	7.3	AVG	Line	56	-48.7

12.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.

BAY AREA COMPLIANCE LABORATORY CORP
Class B


10. Aug 03 14: 03

EUT: VerizonOne Base
Manuf: Axesstel
Op Cond: Normal
Operator: Benjamin
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	5k	9k	QP+AV	20ms	10dBLN	OFF	
1M	3M	10k	9k	QP+AV	1ms	10dBLN	OFF	
3M	30M	100k	9k	QP+AV	1ms	10dBLN	OFF	

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

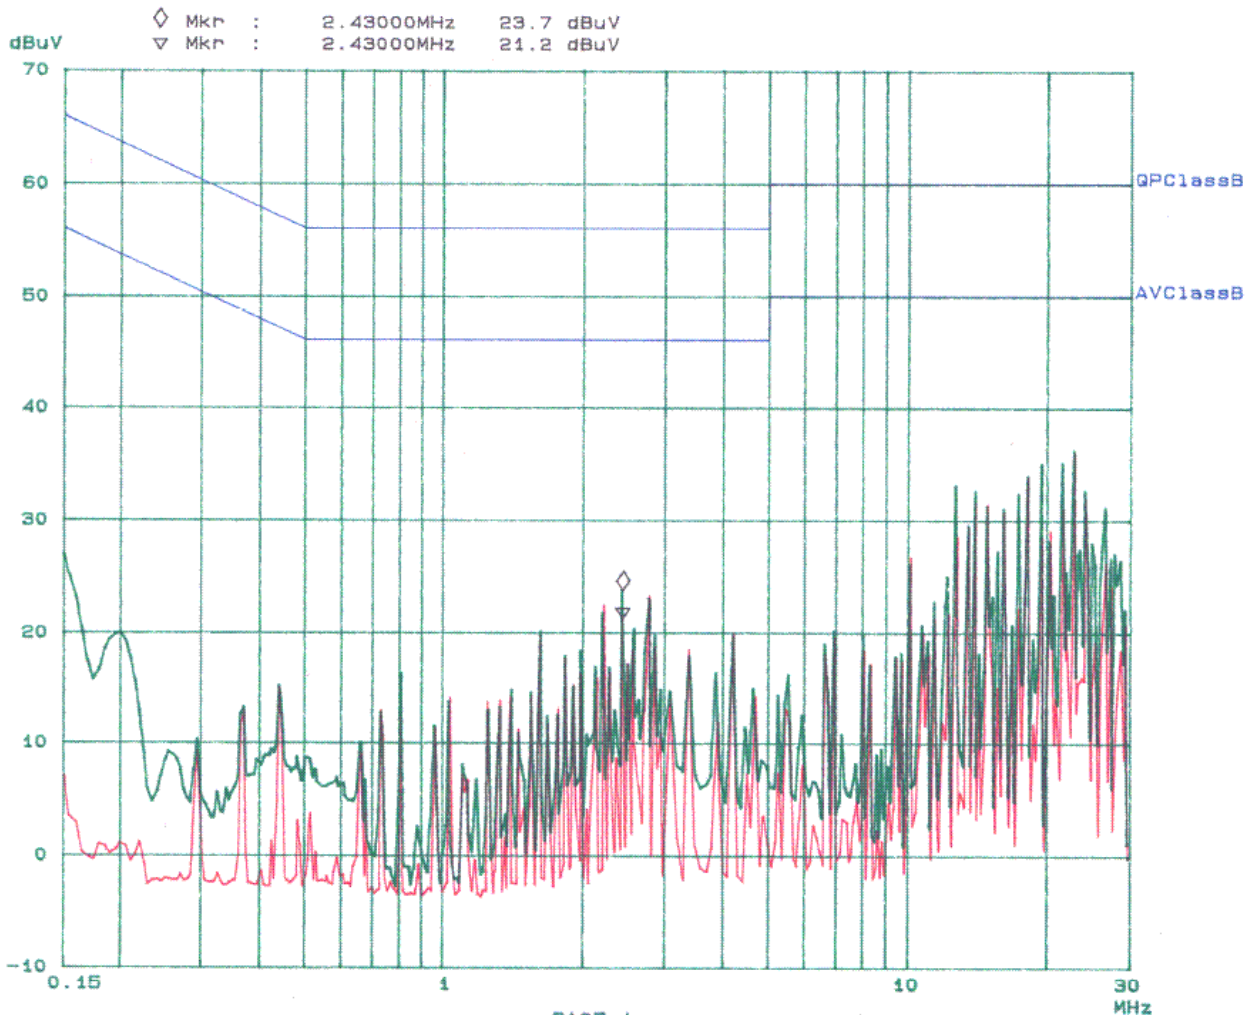

BAY AREA COMPLIANCE LABORATORY CORP
Class B

10. Aug 03 14: 46

EUT: VerizonOne Base
Manuf: Axesstel
Op Cond: Normal
Operator: Benjamin
Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	10dBLN	OFF
1M	3M	10k	9k	QP+AV	1ms	10dBLN	OFF
3M	30M	100k	9k	QP+AV	1ms	10dBLN	OFF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

