



EMC TEST REPORT

Applicant	Airspan Networks LTD
FCC ID	PIDAS62125V
Product	999-03-718-US
Brand	AirSpot 621V
Model	999-03-718-US
Marketing	My-ES-ZM-B41-42-43-48-VW-12
Report No.	R1902A0055-E2
Issue Date	May 5, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2018)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Guangchang Fan

Performed by: Wei Liu/ Manager

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	14
4	Main Test Instrument.....	17
	ANNEX A: The EUT Appearance and Test Configuration.....	18
	A.1 EUT Appearance	18
	A.2 Test Setup.....	20
	ANNEX B: Product Change Description.....	22

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	Refer to the Original
Test Date: February 16, 2019~ April 15, 2019			

999-03-718-US (Report No: R1902A0055-E2) is a variant model of 999-03-716-US (Report No: R1902A0055-E1). Test values partial duplicated from Original for variant. There is only tested Radiated Emission for variant in this report. The detailed product change description please refers to the ANNEX B.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Client Information

Applicant	Airspan Networks LTD
Applicant address	777 Yamato Road, Boca Raton, Florida USA
Manufacturer	Airspan Networks LTD
Manufacturer address	777 Yamato Road, Boca Raton, Florida USA

2.2 General information

EUT Description			
Device Type:	Movable Device		
Model Number:	999-03-718-US		
IMEI:	860524031819954		
HW Version:	V3.0		
SW Version:	M-IDU-1.6.0.3_V1.7 CAT12_BYPASS_0.3.2.20_V1.4		
Antenna Type:	Internal Antenna		
Frequency:	Band	Tx (MHz)	Rx (MHz)
	LTE Band 41	2496 ~ 2690	2496 ~ 2690
	WIFI 2.4G:	2412 ~ 2462	2412 ~ 2462
	WIFI 5G(U-NII-1):	5150 ~ 5250	5150 ~ 5250
	WIFI 5G(U-NII-3):	5725 ~ 5850	5725 ~ 5850
Modulation:	LTE: QPSK / 16QAM WLAN 802.11b: DSSS WLAN 802.11a/g/n/ac: OFDM		
EUT Accessory			
Adapter	Manufacturer: Aquilstar Precision Industry (Shenzhen) Co., Ltd. Model: ASSA67A120200		
Auxiliary test equipment			
PC	PC Manufacturer: Dell Model: E5450 (SN : P48G001)		
Note: The information of the EUT is declared by the manufacturer.			



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2018)

ANSI C63.4 (2014)

2.4 Test Mode

Test Mode	
Mode 1	Adapter + EUT + PC +Phone + idle
Mode 2	Adapter + EUT + PC + idle
Mode 3	Adapter + EUT + idle

During the test, the preliminary test was performed in all modes, mode 1 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=1Hz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test Setup

Below 1GHz

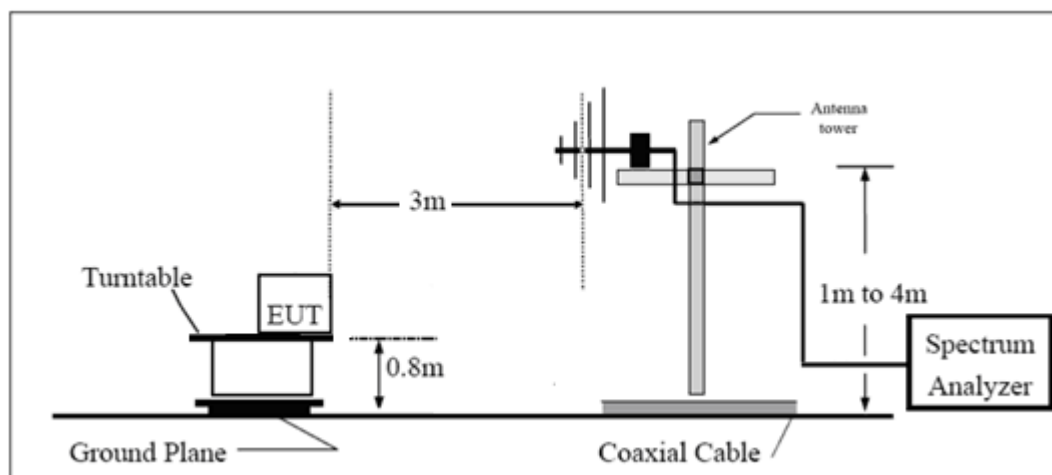

Above 1GHz

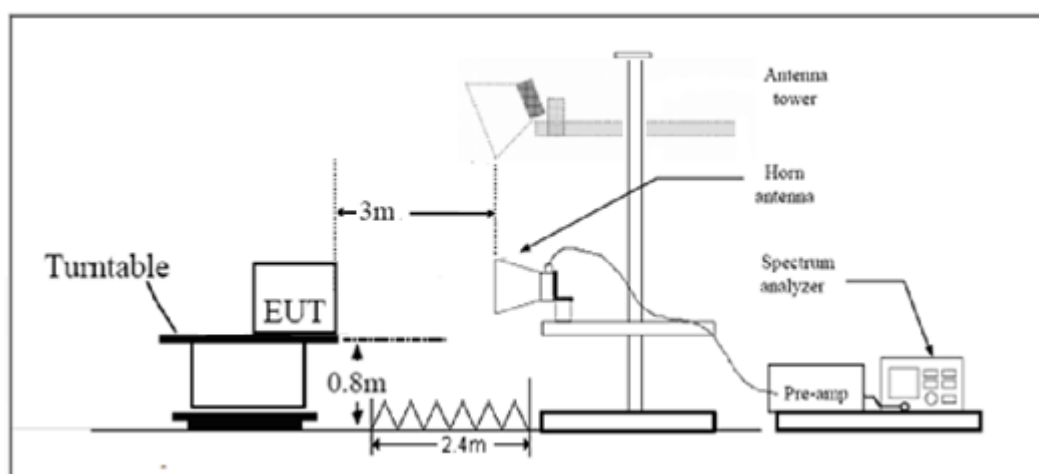

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
30MHz~200MHz	4.02 dB
200MHz~1000MHz	3.28 dB
1GHz~18GHz	3.70 dB
18GHz~26.5GHz	5.78 dB
26.5GHz~40GHz	5.82 dB

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz- 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

RE 0.03-1GHz QP Class B

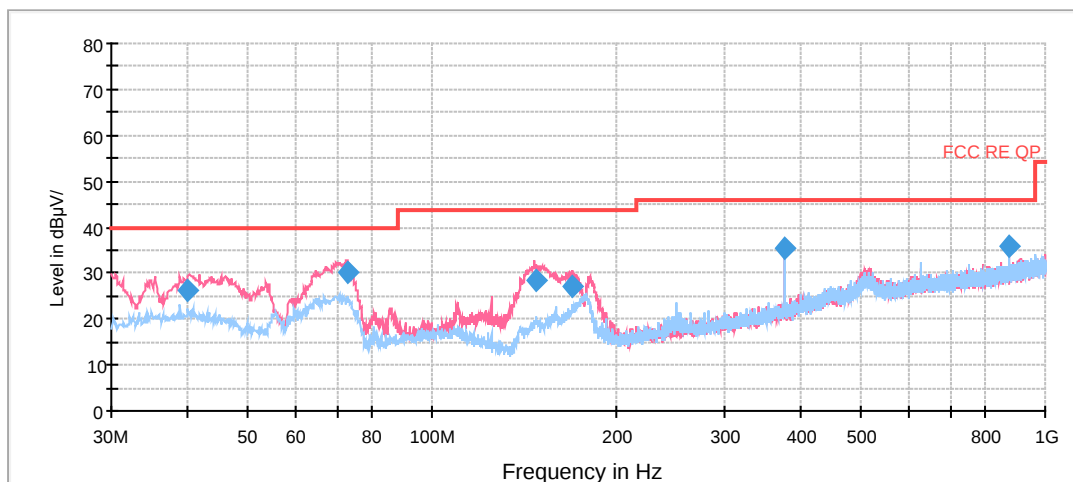


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
40.025000	26.1	100.0	V	326.0	17.1	13.9	40.0
72.718750	30.0	200.0	V	137.0	9.9	10.0	40.0
147.566250	28.3	100.0	V	276.0	9.6	15.2	43.5
169.795000	26.9	100.0	V	288.0	10.6	16.6	43.5
374.996250	35.3	100.0	V	314.0	18.5	10.7	46.0
874.992500	36.0	100.0	H	214.0	25.0	10.0	46.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

FCC RE 1G-18GHz PK+AV Class B

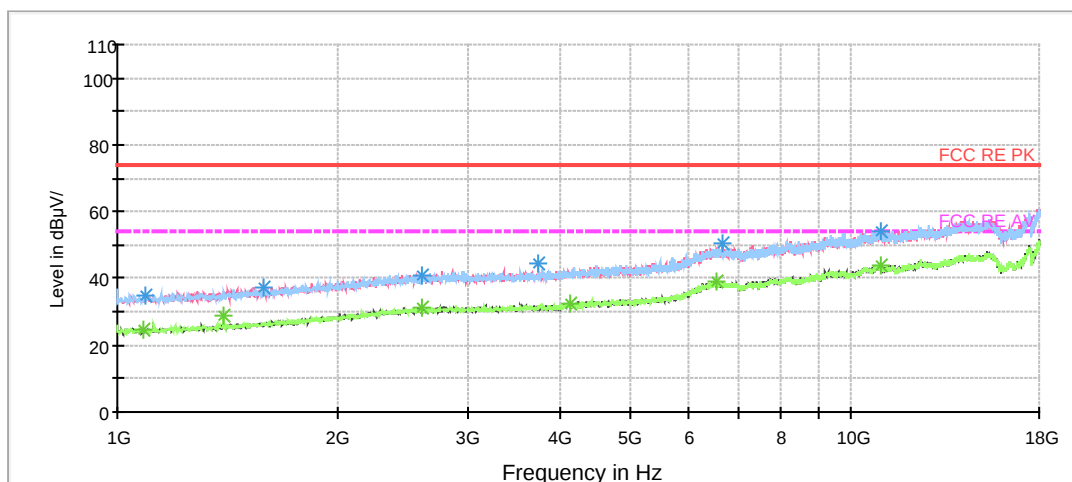

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1089.250000	34.9	200.0	H	0.0	-11.3	39.1	74
1582.250000	37.3	100.0	V	350.0	-9.0	36.7	74
2593.750000	41.1	200.0	H	117.0	-4.1	32.9	74
3741.250000	44.2	100.0	H	17.0	-2.5	29.8	74
6656.750000	50.2	100.0	V	192.0	5.4	23.8	74
10934.375000	54.4	200.0	V	4.0	13.1	19.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1085.000000	24.7	100.0	V	278.0	-11.3	29.3	54
1397.375000	28.9	100.0	H	325.0	-10.0	25.1	54
2598.000000	31.2	100.0	H	17.0	-4.1	22.8	54
4140.750000	32.7	100.0	V	192.0	-1.7	21.3	54
6565.375000	39.2	200.0	H	290.0	5.5	14.8	54
10940.750000	44.1	100.0	H	48.0	13.1	9.9	54

3.2 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via LAN cable.

Test Setup

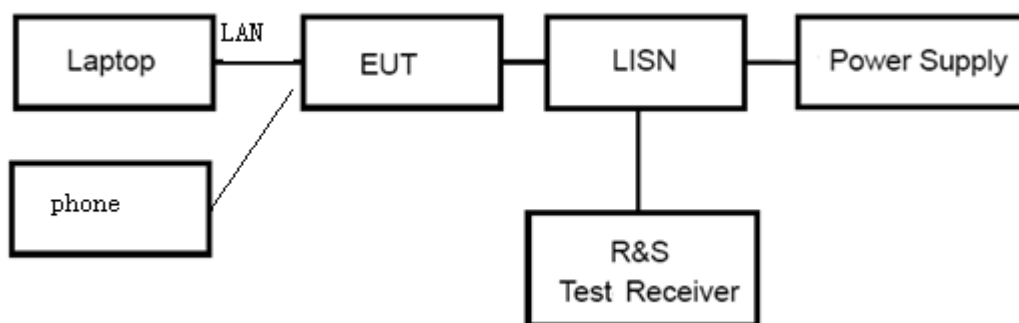

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.57$ dB.

Test Results


Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

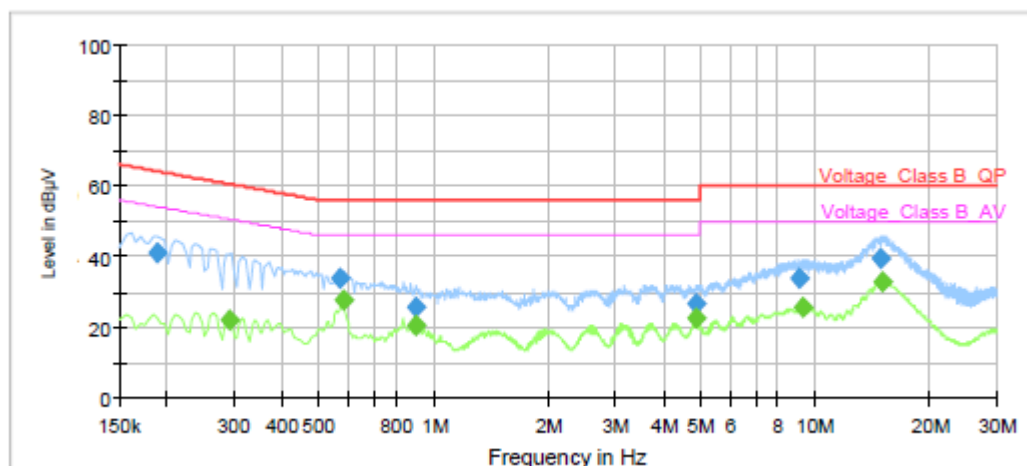

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.19	41.28	---	64.11	22.83	1000.0	9.000	L1	ON	19.17
0.29	---	22.03	50.48	28.45	1000.0	9.000	L1	ON	19.20
0.57	34.05	---	56.00	21.95	1000.0	9.000	L1	ON	19.26
0.58	---	27.52	46.00	18.48	1000.0	9.000	L1	ON	19.26
0.90	---	20.74	46.00	25.26	1000.0	9.000	L1	ON	19.24
0.90	25.75	---	56.00	30.25	1000.0	9.000	L1	ON	19.24
4.88	26.91	---	56.00	29.09	1000.0	9.000	L1	ON	19.07
4.90	---	22.68	46.00	23.32	1000.0	9.000	L1	ON	19.07
9.13	33.76	---	60.00	26.24	1000.0	9.000	L1	ON	19.29
9.30	---	25.87	50.00	24.13	1000.0	9.000	L1	ON	19.31
14.92	39.65	---	60.00	20.35	1000.0	9.000	L1	ON	19.52
15.11	---	32.97	50.00	17.03	1000.0	9.000	L1	ON	19.50

L line

Conducted Emission from 150 KHz to 30 MHz

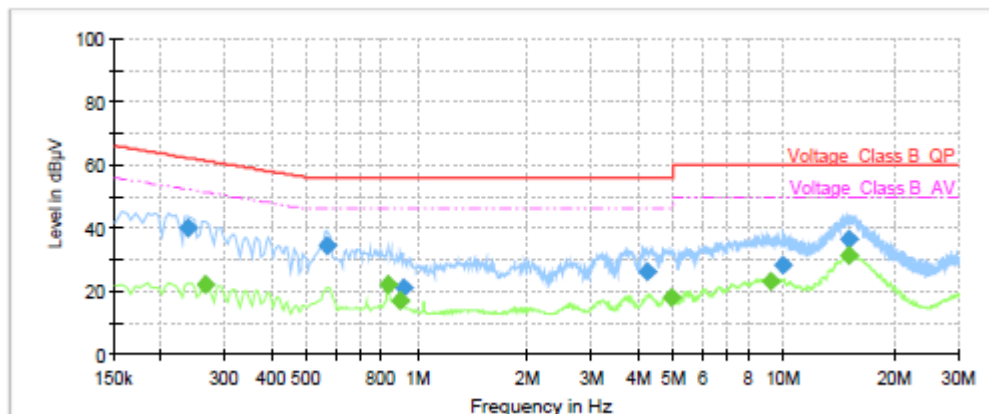

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.24	40.04	---	62.17	22.13	1000.0	9.000	N	ON	19.12
0.26	---	21.89	51.28	29.39	1000.0	9.000	N	ON	19.15
0.57	34.14	---	56.00	21.86	1000.0	9.000	N	ON	19.26
0.83	---	21.89	46.00	24.11	1000.0	9.000	N	ON	19.24
0.90	---	16.79	46.00	29.21	1000.0	9.000	N	ON	19.24
0.92	20.87	---	56.00	35.13	1000.0	9.000	N	ON	19.24
4.24	26.38	---	56.00	29.62	1000.0	9.000	N	ON	19.10
4.93	---	18.05	46.00	27.95	1000.0	9.000	N	ON	19.07
9.18	---	23.33	50.00	26.67	1000.0	9.000	N	ON	19.31
10.00	28.25	---	60.00	31.75	1000.0	9.000	N	ON	19.42
15.01	36.28	---	60.00	23.72	1000.0	9.000	N	ON	19.48
15.15	---	31.31	50.00	18.69	1000.0	9.000	N	ON	19.45

N line
Conducted Emission from 150 KHz to 30 MHz


4 Main Test Instrument

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	R&S	FSV40	15195-01-00	2018-05-20	2019-05-19
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Trilog Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2019-06-19
Standard Gain Horn	STEATITE	QSH-SL-26-40-K-15	16779	2017-07-20	2019-07-19
EMI Test Receiver	R&S	ESR	101667	2018-05-20	2019-05-19
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/

*****END OF REPORT *****

ANNEX A: The EUT Appearance and Test Configuration

A.1 EUT Appearance

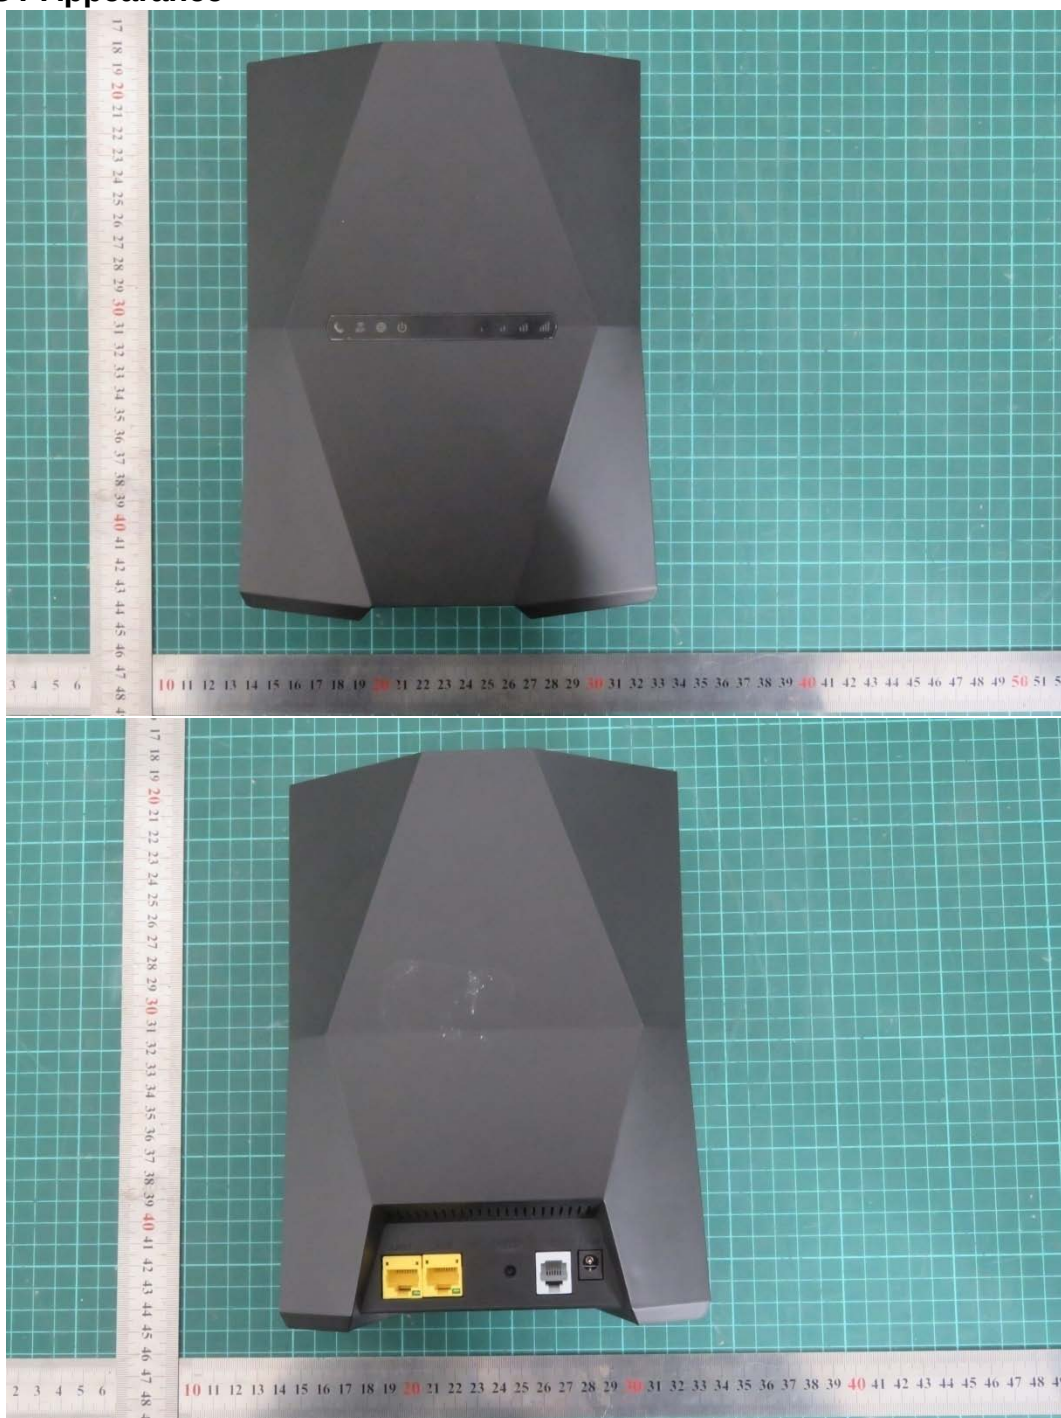


a: EUT



b: Charger

Picture 1 EUT and Accessory

A.2 Test Setup

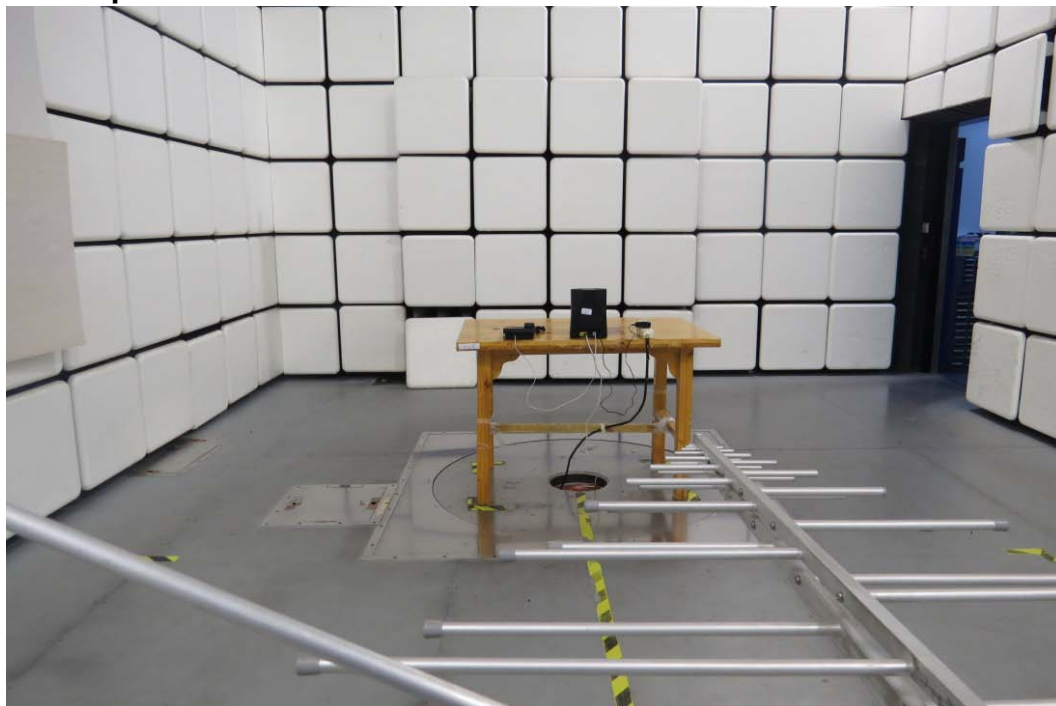

Below 1GHz



Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup



ANNEX B: Product Change Description

We, zhongmi communication ,declare on our sole responsibility that the product,

999-03-718-US

is the variant of the initial certified product,

999-03-716-US

Except the following changes on the latest MODEL: 999-03-718-US

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: ADD VOICE

HARDWARE MODIFICATION:

Band changes: NO

Power Amplifier changes: NO

Antenna changes: NO

PCB Layout changes: NO.

Components on PCB changes: NO

LCD changes: No

Speaker changes: NO

Camera changes: NO

Vibrator changes: NO

Bluetooth changes: NO

FM changes: NO

Other changes: ADD VOICE

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: no

Mechanical shell changes: No.

Other changes detailed: ADD VOICE, ADD VOICE, CHANGE PRODUCT NAME, CHANGE BRAND NAME, CHANGE MODEL NAME

ACCESSORY MODIFICATIONS:

Battery changes: NO

AC Adaptor changes: ADD VOICE

Earphone changes: NO



Yang Bai

Signature:

Print name: Yang Bai

Date: 2019.5.5

Company: zhongmi communication

Address: Room 510, No. 418 GuiPing Road, Xuhui

Tel: 021-64856677

Fax: 021-64040262