




SK TECH CO., LTD.



Page 1 of 13

Certificate of Compliance

Test Report No.:	SKTTRT-061201-026		
KOLAS NO.:	KT191		
Applicant:	HYUNDAI AUTONET Co., Ltd		
Applicant Address:	San 136-1, Ami-ri, Bubal-eup, Ichon-si, Kyongki-do, 467-701, Korea		
Manufacturer:	ALPS ELECTRIC KOREA CO., LTD.		
Manufacturer Address:	970-1, JANGDUK-DONG, GWANGSAN-GU, GWANGJU, KOREA		
Device Under Test:	Remote Keyless Entry System		
FCC ID:	PINHA-T001	Model No.:	HA-T001
Receipt No.:	SKTEU06-0716	Date of receipt:	November 21, 2006
Date of Issue:	December 01, 2006		
Location of Testing:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
Test Procedure:	ANSI C63.4 / 2003		
Test Specification:	47CFR, Part 15 Subpart C		
Equipment Class:	DSC - Part 15 Security/Remote Control Transmitter		
Test Result:	The above-mentioned device has been tested and passed.		
Tested & Reported by: Seong-Baek, Ko  2006. 12. 01 _____ Signature Date		Approved by: Jong-Soo, Yoon  2006. 12. 01 _____ Signature Date	
Other Aspects:			
Abbreviations:	· OK, Pass = passed · Fail = failed · N/A = not applicable		
 • The above test certificate is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA. • This test report is not permitted to copy partly without our permission. • This test result is dependent on only equipment to be used. • This test result is based on a single evaluation of one sample of the above mentioned. • We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.			



SK TECH CO., LTD.



Page 2 of 13

>> CONTENTS <<

1. GENERAL	3
2. TEST SITE	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Date	4
2.4 Test Environment	4
3. DESCRIPTION OF The EQUIPMENT UNDER TEST	5
3.1 Rating and Physical Characteristics	5
3.2 Equipment Modifications	5
3.3 Submitted Documents	5
4. MEASUREMENT CONDITIONS	6
4.1 Description of test configuration	6
4.2 List of Peripherals	6
4.3 Uncertainty	6
5. TEST AND MEASUREMENTS	7
5.1 ANTENNA REQUIREMENT	7
5.1.1 Regulation	7
5.1.2 Result	7
5.2 OCCUPIED BANDWIDTH / Dwell Time	8
5.2.1 Regulation	8
5.2.2 Test Procedure	8
5.2.3 Test Results	9
5.3 RADIATED EMISSIONS	11
5.3.1 Regulation	11
5.3.2 Test Procedure	11
5.3.3 Calculation of Average Correction Factor	12
5.3.4 Test Results.....	13



SK TECH CO., LTD.



Page 3 of 13

1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.231 for Remote Control / Security Device Transceiver.

The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH CO., LTD. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

SK TECH Co., Ltd.

2.1 Location

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is recognized as a Conformity Assessment Body(CAB) for CAB's Designation Number: **KR0007** by FCC, is accredited by NVLAP for NVLAP Lab. Code: **200220-0**, DATech for DAR-Registration No.: **DAT-P-076/97-01** and KOLAS for Accreditation No. : **KT191**.



SK TECH CO., LTD.



Page 4 of 13

2.2 List of Test and Measurement Instruments

Description	Manufacturer	Model #	Serial #	
Spectrum Analyzer	Agilent	E4405B	US40520856	☒
EMC Spectrum Analyzer	Agilent	E7405A	US40240203	☒
EMI Test Receiver	Rohde&Schwarz	ESIB40	100277	☒
Pre-amplifier	HP	8447F	3113A05153	☒
Pre-amplifier	MITEQ	AFS44	1116321	☒
Pre-amplifier	MITEQ	AFS44	1116322	
Power Meter	Agilent	E4418B	US39402179	
Power Meter	Agilent	E4417A	MY45100426	
Power Sensor	Agilent	E9327A	MY44420696	
Power Sensor	HP	8485A	3318A13916	
Oscilloscope	Agilent	54820A	US40240160	
Diode detector	Agilent	8473C	1882A03173	
VHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	VHAP	1014 / 1015	
UHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	UHAP	989 / 990	
Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	
TRILOG Broadband Antenna	Schwarzbeck	VULB9160	3141	☒
TRILOG Broadband Antenna	Schwarzbeck	VULB9168	9168-230	☒
Biconical Antenna	Schwarzbeck	VHA9103	2265	
Log-Periodic Antenna	Schwarzbeck	UHALP9107	1819	
Horn Antenna	AH Systems	SAS-200/571	304	
Horn Antenna	EMCO	3115	00040723	
Horn Antenna	EMCO	3115	00056768	☒
Vector Signal Generator	Agilent	E4438C	MY42080359	
PSG analog signal generator	Agilent	E8257D-520	MY45141255	
DC Power Supply	HP	6634A	2926A-01078	☒
DC Power Supply	HP	6268B	2542A-07856	
DC Power Supply	Goldstar	GP-4303D	-	
Digital Multimeter	HP	HP3458A	2328A14389	☒
PCS Interface	HP	83236B	3711J00881	
CDMA Mobile Test Set	HP	8924C	US35360253	
Hygro/Thermo Graph	SATO	PC-5000TRH-II	-	☒
Temperature/Humidity Chamber	All Three	ATH-50M	20030425	

2.3 Test Date

Date of Application: November 21, 2006

Date of Test: November 22, 2006 ~ November 27, 2006

2.4 Test Environment

See each test item's description.

**SK TECH CO., LTD.**

Page 5 of 13

3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

3.1 Rating and Physical Characteristics

Type (Model No.)	Remote Keyless Entry System(HA-T001)
Power source	DC 3 V (Lithium Battery)
Local Oscillator or X-Tal	X-Tal: 433.92 MHz
Tx Frequency	433.92 MHz (Tx)
Antenna Type	PCB Pattern Antenna
Type of Modulation	ASK
RF Output Power	Under 80 dBuV/m(@3m)
Interface Ports	-

3.2 Equipment Modifications

None.

3.3 Submitted Documents

Block diagram

Schematic diagram

Part List

User manual

**SK TECH CO., LTD.**

Page 6 of 13

4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The EUT was configured for testing in a typical fashion (as a user would normally use it). During the exploratory tests, the EUT was set to transmit the control signal continuously in order to conduct Subpart C tests.

4.2 List of Peripherals

Equipment Type	Manufacture	Model	Cable Description
-	-	-	-

The EUT was tested as stand alone equipment.

4.3 Uncertainty

Measurement Item	Combined Standard Uncertainty U_c	Expanded Uncertainty $U = KU_c$ ($K = 2$)
Radiated disturbance	± 2.30 dB	± 4.60 dB
Conducted disturbance	± 1.47 dB	± 2.94 dB



SK TECH CO., LTD.



Page 7 of 13

5. TEST AND MEASUREMENTS

Summary of Test Results

Requirement	CFR Section	Report Section	Test Result
Antenna Requirement	15.203	5.1	PASS
Occupied Bandwidth / Dwell Time	15.231(c), 15.231(a)(2)	5.2	PASS
Radiated Emission	15.231(b), 15.209	5.3	PASS
Conducted Emission	15.207(a)	N/A	N/A*

* Not required, the EUT is only battery powered.

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.1.2 Result:

PASS

The EUT have an integral PCB Pattern antenna and meets the requirements of this section.



SK TECH CO., LTD.



Page 8 of 13

5.2 OCCUPIED BANDWIDTH / Dwell Time

5.2.1 Regulation

According to §15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

Bandwidth is determined at the point 20 dB down from the modulated carrier.

The 20 dB bandwidth limit = $F \times 0.0025 = 433.92 \text{ MHz} \times 0.0025 = 1084.8 \text{ kHz}$

According to §15.231(a)(2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

5.2.2 Test Procedure

ANSI C63.4-2003 Section 13.1.7, Occupied Bandwidth Measurements.

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the un-modulated carrier, even if atypical. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce worst-case (i.e., the widest) bandwidth.

The measurements were performed at operating frequency (433.92 MHz). The spectrum trace data around fundamental frequency of the EUT was obtained with the spectrum analyzer in Max Hold mode. The bandwidth value was determined between the two points of 20dB down from the reference level.

5.2.3 Test Results:

PASS

Measured values of the Occupied Bandwidth

Center frequency (MHz)	Limit (kHz)	Measured occupied bandwidth (kHz)
433.92	1084.8	50.1

Measured values of the Dwell Time


Center frequency (MHz)	Limit (s)	Measured Dwell Time (s)
433.92	5	0.385



SK TECH CO., LTD.



Plot of the Occupied bandwidth

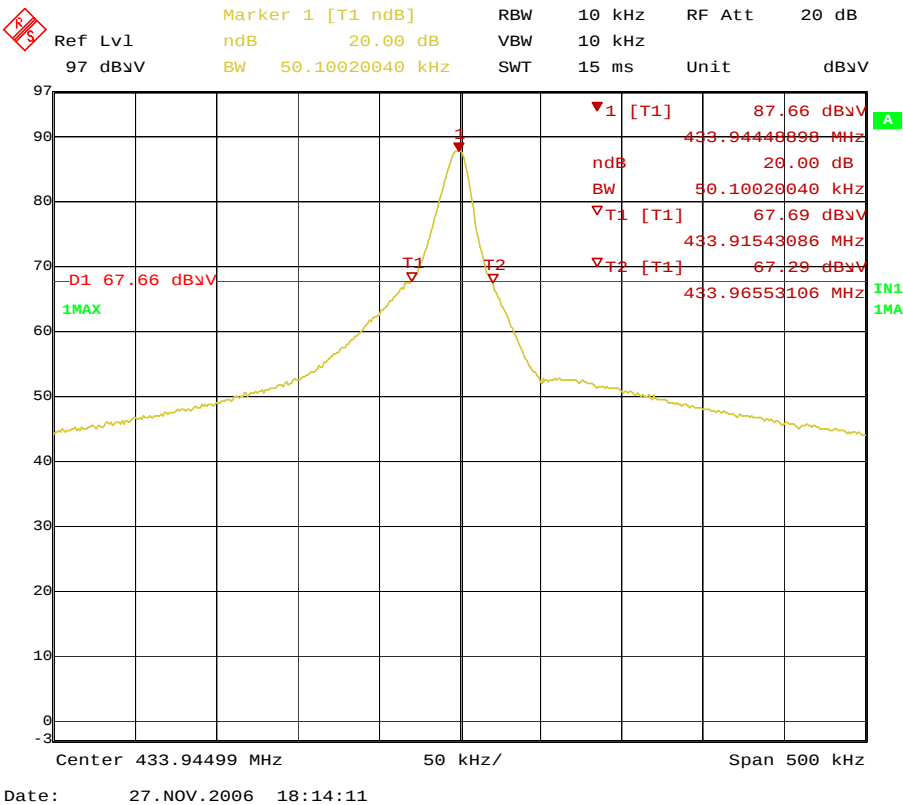




SK TECH CO., LTD.




Page 10 of 13

Plot of the Dwell Time

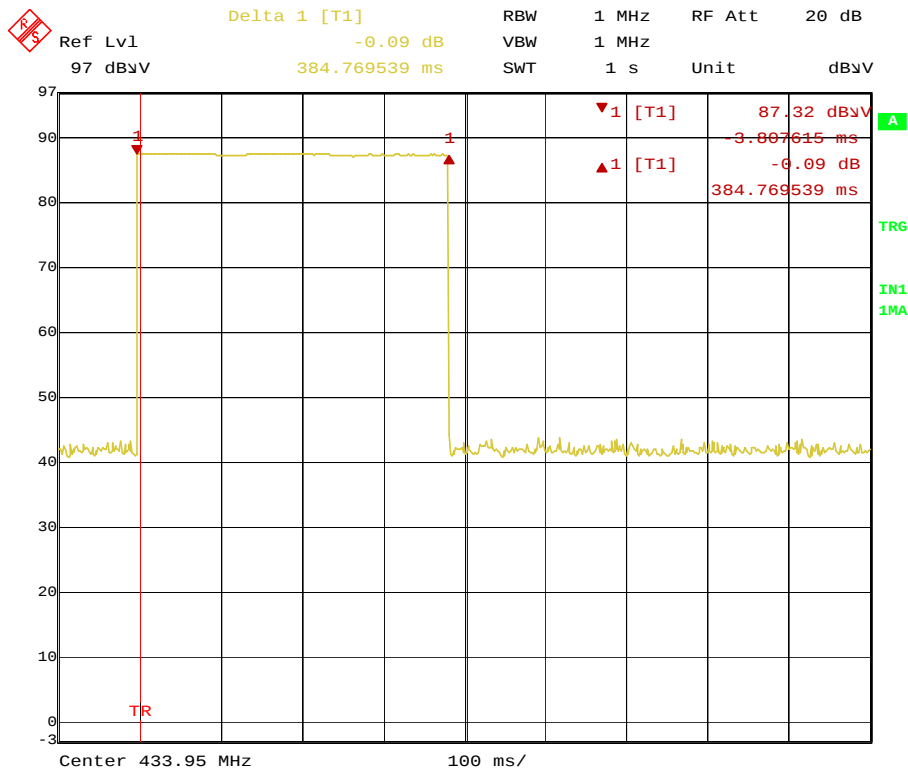

Date: 27.NOV.2006 18:17:53

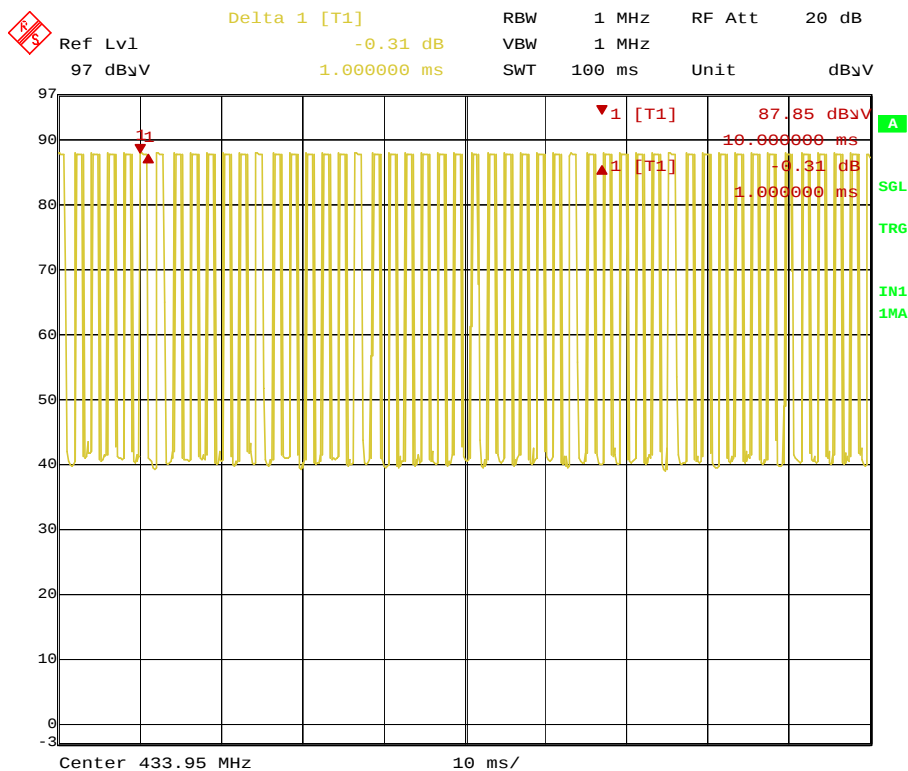

Date: 27.NOV.2006 18:37:09



SK TECH CO., LTD.



Page 11 of 13

5.3 RADIATED EMISSIONS

5.3.1 Regulation

According to 15.231(b), In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (uV/m @ 3m)	Field strength of Spurious Emissions (uV/m @ 3m)
40.66 ~ 40.70	2250	225
70 ~ 130	1250	125
130 ~ 174	1250 to 3750 **	125 to 375 **
174 ~ 260	3750	375
260 ~ 470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

** Linear interpolations

Any emissions that fall within the restricted bands specified in FCC Section 15.205 shall not exceed the following limits according to §15.209:

Frequency (MHz)	Field strength (uV/m @ 3m)	Field strength (dBuV/m @ 3m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

5.3.2 Test Procedure

Preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters. The EUT was placed on the top of the 0.8 meter high, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

The antenna polarization was also changed from vertical to horizontal. The spectrum analyzer was scanned from 30 to 1000 MHz using the Bi-Log antenna. Above 1 GHz, linearly polarized double ridge horn antenna was used.

To obtain the final test data, the EUT was arranged on a turntable situated on a 4x4 meter at the Open Area Test Site. The EUT was tested at a 3-meter test distance. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was operated in transmitting mode.

**SK TECH CO., LTD.**

Page 12 of 13

5.3.3 Calculation of Average Correction Factor

The average correction factor is computed by analyzing the "worst case" on time in any 100 ms time period and using the formula:

$$\text{Correction Factor} = 20\log(\text{worst case on time} / 100 \text{ ms}).$$

The maximum correction factor to be applied is 20 dB per section 15.35 of FCC rules.

All following emission measurements were performed using the test receiver's average and peak detectors and "Max Hold" mode, the average and peak values were measured directly without the necessity of additional average correction factor.



SK TECH CO., LTD.



Page 13 of 13

5.3.4 Test Results:

PASS

Measured values of the Field strength

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB/m]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
AVERAGE data											
433.92	120	H	1.00	83.2	27.9	0.0	15.2	1.8	72.3	80.8	8.5
867.90	120	H	2.15	45.4	27.9	0.0	22.9	2.6	43.0	60.8	17.8
1301.84	1000	H	1.51	63.2	43.1	0.0	24.9	3.6	48.6	54.0	5.4
1735.78	1000	H	1.00	62.5	43.3	0.0	26.2	4.1	49.5	60.8	11.3
2169.73	1000	H	1.06	46.5	43.6	0.0	27.8	4.7	35.4	60.8	25.4
PEAK data											
433.92	120	H	1.00	89.0	27.9	0.0	15.2	1.8	78.1	100.8	22.7
867.90	120	H	2.15	52.0	27.9	0.0	22.9	2.6	49.6	80.8	31.2
1301.84	1000	H	1.51	68.8	43.1	0.0	24.9	3.6	54.2	74.0	19.8
1735.78	1000	H	1.00	68.5	43.3	0.0	26.2	4.1	55.5	80.8	25.3
2169.73	1000	H	1.06	55.1	43.6	0.0	27.8	4.7	44.0	80.8	36.8

Note

1. H = Horizontal, V = Vertical Polarization
2. AF = Antenna Factor
3. CL = Cable Loss
4. ATT = Attenuator
5. The frequency range was scanned from 25 MHz to 4 GHz. All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

6. Field strength limit of the fundamental frequency:

$$\text{Limit} = (F-260) \times (12500-3750) / (470-260) + 3750 = 10996.7 \mu\text{V/m} = 80.8 \text{ dBuV/m}$$

Field strength limit of spurious emissions:

$$\text{Limit} = (F-260) \times (1250-375) / (470-260) + 375 = 1099.6 \mu\text{V/m} = 60.8 \text{ dBuV/m}$$

$$\text{Margin (dB)} = \text{Limit} - \text{Actual}$$

$$\text{Actual} = \text{Reading} - \text{Amp Gain} + \text{ATT} + \text{AF} + \text{CL}$$