



## Test Report for LifeTag

To CFR Chapter 47 - FCC Rules Part 15 - Radio Frequency Devices

### Radiated Spurious Emissions & Maximum Permissible Exposure

**Test Report Number: TP/629/1012**

|             |                                |                                                                                      |                          |
|-------------|--------------------------------|--------------------------------------------------------------------------------------|--------------------------|
| Approved    | Peter Bowen<br>EMC Team Leader |  | 16/05/2006               |
| Checked     | Andy Little<br>EMC Engineer    |  | 09/05/2006               |
| Report      | Michael Howes<br>EMC Engineer  |  | 03/05/2006               |
| Report Date | 02/05/2006                     | Test Date                                                                            | 23/03/2006 to 30/03/2006 |

The test data and results contained within this report relate only to the items tested.

This report shall not be reproduced without the written approval of Raymarine Ltd.

Any reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%. Any uncertainty evaluation has been carried out with reference to CISPR16-4:2002.

Raymarine Ltd. Registered in England,  
Company no 04578449

Registered Office: Anchorage Park, Portsmouth,  
Hampshire, PO3 5TD England

## Table of Contents

|        |                                                           |    |
|--------|-----------------------------------------------------------|----|
| 1      | Purpose of Tests .....                                    | 3  |
| 2      | Description of Equipment Under Test (EUT) .....           | 3  |
| 3      | Description of Auxiliary Equipment .....                  | 3  |
| 4      | General .....                                             | 3  |
| 5      | Test Configuration .....                                  | 4  |
| 6      | Description of Test Chamber .....                         | 5  |
| 7      | Photographs .....                                         | 6  |
| 8      | Method of Test .....                                      | 9  |
| 9      | Radiated Emissions Results – Intentional Radiator .....   | 12 |
| 9.1    | Test Measurement Limits. ....                             | 12 |
| 9.2    | Test Results .....                                        | 13 |
| 9.2.1  | 9KHz – 150kHz .....                                       | 13 |
| 9.2.2  | 150kHz – 30MHz .....                                      | 13 |
| 9.2.3  | 30MHz – 300MHz .....                                      | 13 |
| 9.2.4  | 300MHz – 1GHz .....                                       | 13 |
| 9.2.5  | 1GHz – 2GHz .....                                         | 13 |
| 9.2.6  | 2GHz – 25GHz .....                                        | 13 |
| 10     | Radiated Emissions Graphs .....                           | 15 |
| 10.1   | 9kHz to 150kHz .....                                      | 15 |
| 10.2   | 150kHz to 30MHz .....                                     | 16 |
| 10.3   | 30MHz to 300MHz .....                                     | 17 |
| 10.4   | 300MHz to 1000MHz .....                                   | 17 |
| 10.5   | 1GHz to 2GHz .....                                        | 18 |
| 10.6   | 2GHz to 25GHz .....                                       | 18 |
| 11     | Radiated Emissions Results – Unintentional Radiator ..... | 21 |
| 11.1   | Test Measurement Limits. ....                             | 21 |
| 11.2   | Test Results .....                                        | 22 |
| 11.2.1 | 30MHz – 300MHz .....                                      | 22 |
| 11.2.2 | 300MHz – 1GHz .....                                       | 22 |
| 11.2.3 | 1GHz – 2GHz .....                                         | 22 |
| 11.2.4 | 2GHz – 25GHz .....                                        | 22 |
| 11.3   | 30MHz to 300MHz .....                                     | 23 |
| 11.4   | 300MHz to 1000MHz .....                                   | 23 |
| 11.5   | 1GHz to 2GHz .....                                        | 24 |
| 11.6   | 2GHz to 25GHz .....                                       | 24 |
| 12     | RF Exposure Calculations .....                            | 26 |
| 13     | Test Equipment List .....                                 | 27 |

## 1 Purpose of Tests

To demonstrate that the EUT (Raymarine LifeTag) meets the radiated spurious emissions requirements of FCC rules 15.247 (d) & (i) with respect to radiated spurious emissions when operating within the 2400-2483.5 MHz band and with regard to exposure levels of RF energy from the EUT.

This report will form part of type acceptance applications to be submitted to the FCC and Industry Canada.

## 2 Description of Equipment Under Test (EUT)

(To include all equipment being tested)

|                            |                                          |
|----------------------------|------------------------------------------|
| Date of Receipt:           | 23 <sup>rd</sup> March 2006              |
| Client:                    | Data Vessel and Control Group, Raymarine |
| Brand Name:                | Raymarine                                |
| Product Range:             | MOB                                      |
| Country of Manufacture:    | Hungary                                  |
| Operational voltage range: | 3V dc nominal (CR2 lithium battery)      |

### Unit 1

|                                    |                  |
|------------------------------------|------------------|
| Model Name or Number:              | <b>LifeTag</b>   |
| Unique Type Identification:        | E15026           |
| Serial Number:                     | EMC140306c       |
| Circuit Diagram Number(s) & Issue: | 4629-001 Issue D |
| PCB Assembly Number(s) & Issue:    | 3015-394 Issue C |
| Software Version:                  | 0.4              |
| Modifications to Unit:             | None             |

|                    |  |
|--------------------|--|
| Other Information: |  |
|--------------------|--|

## 3 Description of Auxiliary Equipment

(To include all equipment associated with the EUT(s) which are NOT directly subjected to the test)

| Item | Unique Type Identification & Serial Number |
|------|--------------------------------------------|
|      |                                            |
|      |                                            |

## 4 General

| Supply Voltage | Ambient Temperature | Relative Humidity |
|----------------|---------------------|-------------------|
| 3V             | 22°C                | 34%               |

## 5 Test Configuration

(See Section 2 Description of Equipment Under Test (EUT) and Section 3 Description of Auxiliary Equipment)



Raymarine LifeTag

| Title                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Setup and Operating Mode | <p>The EUT is a body worn device with internal batteries. The EUT was placed on a 0.8m high table, no other equipment was required.</p> <p>In the receive mode below 2GHz the EUT was tested in parallel with the LifeTag Base Station, also in receive mode; these units are sold together as a system.</p> <p>Using special test software to enable efficient testing of the EUT the RF section was configured to continuous transmission or receiving mode as required during the course of the testing. Channels on which the RF section was operating were selected as required.</p> |

## 6 Description of Test Chamber

The test chamber used for the radiated emissions measurements is FCC listed (registration no. 970522) and registered with Industry Canada (registration no. IC 5650-1).

The test site is within a fully enclosed chamber on a ground plane of dimensions 9.3 x 6.3m. The walls, ceiling and door are completely lined with 6.7mm thickness Samwha ferrite tiles. Additional hybrid pyramidal absorber is fitted to areas of the ceiling, sidewalls and the end wall nearest the turntable. The test volume is a cylinder 2m in height and 1.5m in diameter centred on the axis of the turntable.

The ground plane consists of galvanised steel sheets continuously bonded together with copper strip. The sheets at the edges of the ground plane are bonded, in a similar manner, to the walls of the chamber. To prevent flexing or warping, the edges of each individual steel sheet of the ground plane are secured to a wooden deck with screws at 10cm intervals.

The non-conductive turntable has the following characteristics:

- a) mounted on the ground plane
- b) fibre optic remote control
- c) base diameter of 1.2m
- d) base platform height 2cm above ground plane
- e) hole in centre for EUT grounding and power source
- f) power to centre via 20mm steel conduit bonded to ground plane
- g) 360 degree rotation
- h) the turntable, drive belt, drive shaft, couplings and turntable base are non-conductive.
- i) A metallic shielded enclosure, located against the wall of the chamber, contains the motor and the electronics required to rotate the turntable.


The receiving antenna mast has the following characteristics:

- a) fibre optic remote control
- b) 1-4 metre search height
- c) pneumatic antenna polarization change
- d) the mast, carrier, boom, platform and drive belt are non-conductive.
- e) A metallic shielded enclosure, located at the base of the tower, contains the motor and the electronics required to control the antenna carrier.


## 7 Photographs



Figure 1 View from within chamber showing turntable base and mast set-up.

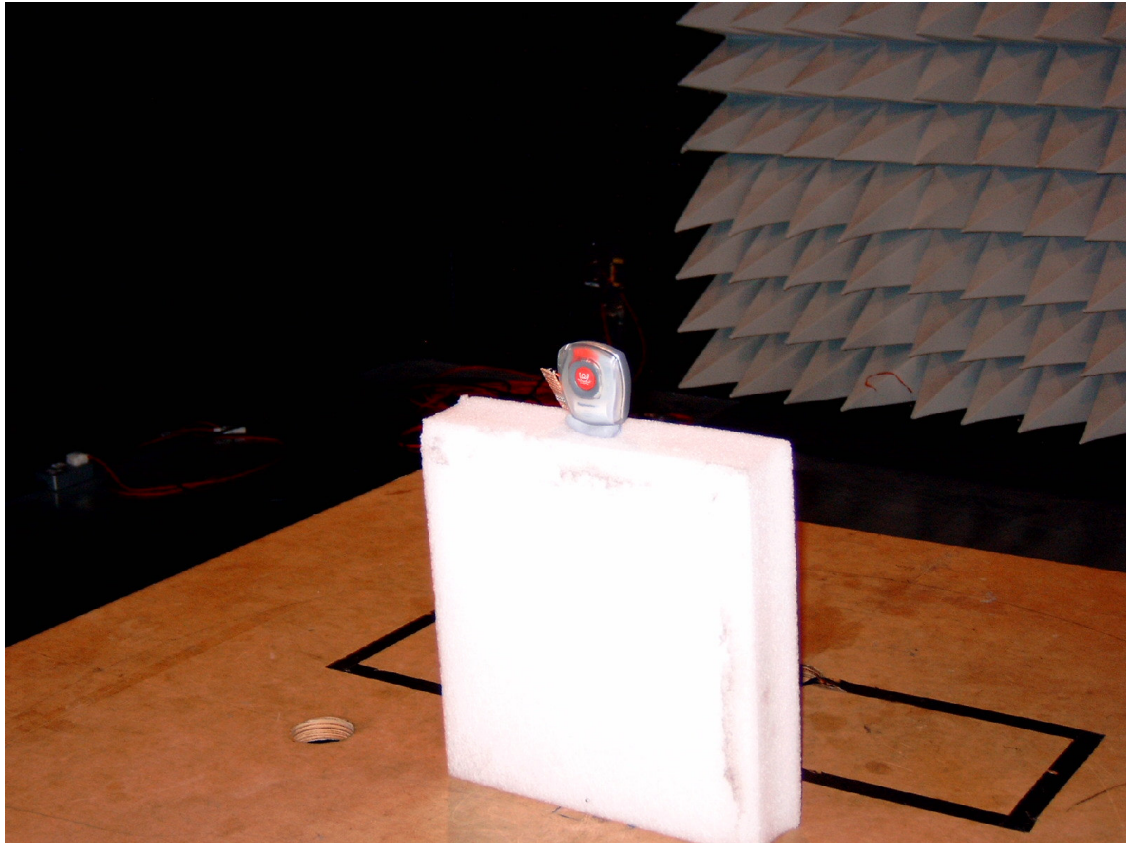

**Figure 2 EUT mounted on foam support on turntable in test chamber.**

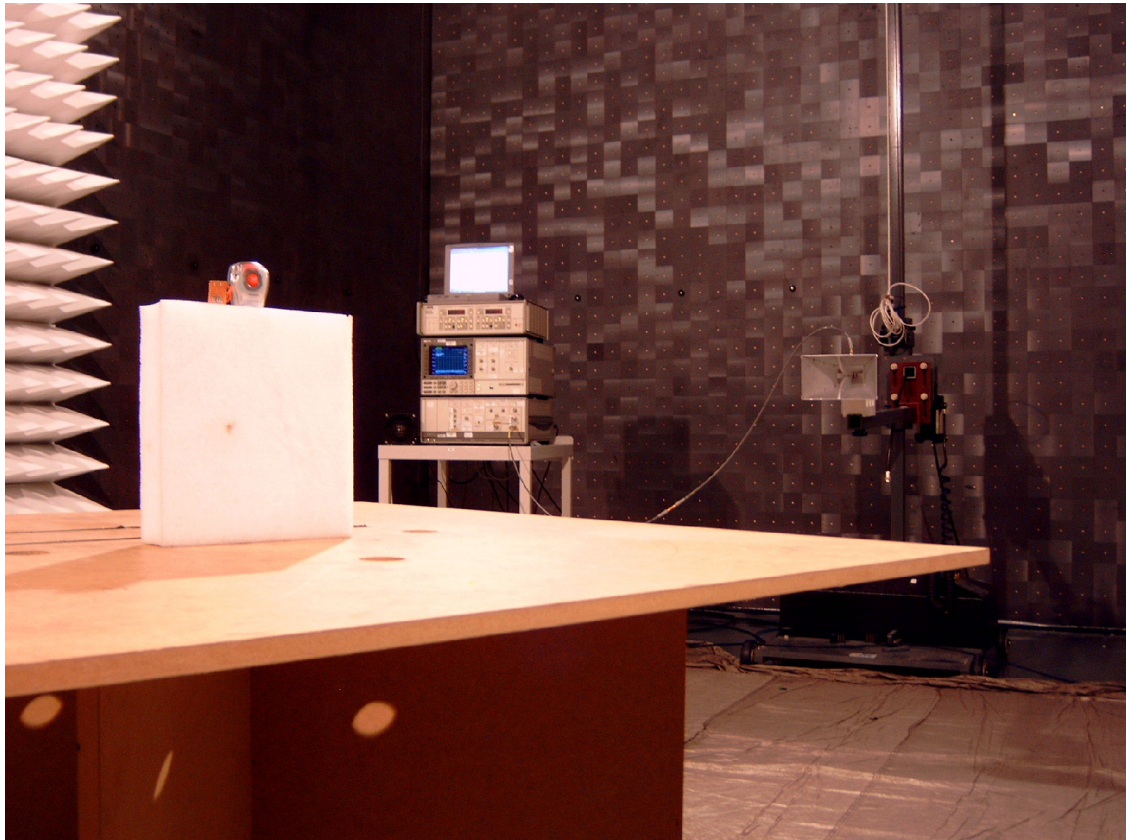

**Figure 3 Set up in chamber for 2GHz – 7GHz measurements at 3m.**



**Figure 4 Set up showing measurements above 7GHz at 1m.**

## 8 Method of Test

The EUT was placed on the turntable and powered from an internal 3.0V lithium battery. The purpose of the EUT is to initiate an alarm whenever the LifeTag Base Station loses communication with the LifeTag for more than 10 seconds or when the alarm is raised manually from the LifeTag.

In normal use the EUT transmits a heart beat every 2 seconds. Therefore the normal application code was substituted with alternative software to enable control of the EUT transceiver module with a PC via an RS232 connection. This allowed the EUT to be operated on any of the 16 available channels and configured to function in either a continuous receive or transmit mode.

An investigative sweep to identify any spurious emissions for detailed investigation was carried out in continuous transmit mode and then repeated in continuous receive mode, each sweep being conducted on channel 18. The results of these tests, and composite plots of the investigative sweeps are presented below in sections 9 and 10.

In the bands below 2 GHz any frequencies identified for further investigation were measured with the EUT transmitting on channel 18 only. Radiated spurious emissions within these bands are not likely to be affected by the channel of operation of the EUT transceiver.

At frequencies above 2GHz any emissions identified during the investigative sweeps were then re-measured on channels 11, 18 and 26 (i.e. lower, middle and upper channels) as the channel of operation was more likely to have a significant impact on the emission level. The levels recorded are presented in tables or graphs presented below in sections 9 and 10.

### 9kHz-30MHz

These measurements were carried out within the test chamber at a distance of 3m. The limits against which the emissions were measured have been extrapolated using a factor of 40dB/decade as per FCC rule 15.31 (f)(2). Frequency scans and any spurious emissions investigations were carried out using a Radiation automated EMC measurement system to control the measuring receiver, antenna height and turntable angle. The automated measurement system was operated from outside the test chamber. There is no requirement to test below 30MHz with the EUT in receive/standby mode therefore data from these bands relates only to the EUT in transmit mode.

### 30MHz-2GHz

Measurements between 30MHz and 2GHz were carried out in accordance with the recommendations of ANSI C63.4-2003 section 8. The separation distance between the periphery of the EUT and the test receive antenna was 3 metres as defined by FCC rule 15.209. Frequency scans and spurious emissions investigations were carried out using an EMC measurement system utilising Radiation software to control the measuring receiver, antenna height and turntable angle. The automated measurement system was operated from outside the test chamber.

### Above 2GHz sweeps

These measurements were carried out manually from within the EMC chamber using an HP70000 spectrum analyser. This was done to reduce cable losses by shortening the length of the antenna to analyser cable, therefore enabling noise floor levels to be kept to a minimum. The antenna height and turntable angle were also controlled manually via an EMCO 2090 multi device controller.

The spurious emissions from these frequency sweeps were captured with the HP70000 peak detector in max hold mode. During these sweeps the EUT was operating continuously on channel 18. For each frequency sweep the receive antenna was maintained at a height level with the centre of the EUT while the turntable was rotated through 360°. This process was repeated with the spectrum analyser remaining in max hold mode and using the opposite antenna polarisation so that a trace was obtained comprising the worst case emissions recorded for both antenna polarities on all radials from the EUT.

The frequency and level data from the HP70000 traces was extracted to an excel file using SoftPlot measurement presentation software. All the data obtained from the individual sweeps was then combined into a single spreadsheet and corrected for cable loss and antenna factors. Graphs were then produced from the final corrected figures to show the spurious emissions in the 2GHz to 25GHz band (see figures 12 and 19 below).

Any emissions observed to be above the noise floor were then investigated more thoroughly on channels 0, 7 and 15 to determine the worst-case frequency, level, antenna height (where possible) and turntable angle. This was then captured using SoftPlot. These investigations were carried out at the frequencies of interest with the HP70000 amplitude offset to account for cable losses and antenna correction factors. The plots are presented below (see figures 14 to 16 and figure 22)

The frequency sweeps were as follows:

#### 2GHz-7GHz

The separation distance between the EUT and the test receive antenna was kept to 3 metres. HP70000 resolution bandwidth was 1MHz

#### 7GHz-12GHz

In order to maintain the noise floor sufficiently below the specification limit it was necessary to reduce the separation distance between the EUT and the test receive antenna to 1m. The limits against which the emissions were measured have been extrapolated using a factor of 20dB/decade as per FCC rule 15.31 (f)(1). The extrapolated limit was calculated to be 63.5dBµV/m. The near field / far field transition at 7 GHz is:

$$\lambda \text{ at 7GHz} = 0.042\text{m}$$

$$d > \frac{2l^2}{\lambda} \quad (l=4.83\text{cm})$$

$$d > \frac{2(0.0483)^2}{0.042} = 0.111 \text{ m}$$

$$= 111 \text{ mm}$$

Therefore all measurements made above 7GHz at 1m are considered to be within the far field. The HP70000 resolution bandwidth was 1MHz

#### 12GHz-16.5GHz

Measured at 1m-separation distance, resolution bandwidth was 1MHz.

#### 16.5GHz-20GHz

Measured at a 1m-separation distance, resolution bandwidth was 1MHz.

#### 20GHz-25GHz

Measured at a 1m-separation distance. The resolution bandwidth was reduced to 215kHz in order to allow enough margin between the noise floor and the specification limit to identify any spurious emissions that may be present.

| Frequency band   | Resolution bandwidth | Remarks                                                   |
|------------------|----------------------|-----------------------------------------------------------|
| 9kHz – 150 kHz   | 200 Hz               |                                                           |
| 150 kHz – 30 MHz | 9 kHz                |                                                           |
| 30 MHz – 1 GHz   | 120 kHz              |                                                           |
| 1 GHz – 20GHz    | 1 MHz                |                                                           |
| 20 GHz – 25 GHz  | 215 kHz              | Resolution bandwidth reduced to lower system noise floor. |

**Table 1 Summary of resolution bandwidths used during emissions measurements.**

## 9 Radiated Emissions Results – Intentional Radiator

### 9.1 Test Measurement Limits.

The EUT was tested for spurious emissions between 9kHz and 25GHz (i.e. above 10<sup>th</sup> harmonic) against the following limits:

- -20dBc as defined in FCC rule 15.247(d)
- Within restricted bands (see table under rule 15.205) the limits of table 15.209 were applied.
- Additionally a peak limit of 20dB above the restricted band average limit was applied as defined in FCC rule 15.35(b)

For measurements above 2GHz, radiated spurious emissions were recorded using an HP70000 spectrum analyser with a peak detector in max hold mode. The tests were carried out with the EUT transmitting continuously, however in normal use the transmission duration during any 100ms period is 18.85µs. An equivalent average value of each emission has therefore been derived from the peak measurement by application of the following conversion factor (ref rule 15.35(c)):

$$20\log\left(\frac{18.85\mu s}{100mS}\right) = -74.49 \text{ dB}$$

Due to the short 100mS average duty cycle resulting in a large relaxation factor, the maximum allowed relaxation factor of 20dB was applied to the peak measurements.

## 9.2 Test Results

### 9.2.1 9KHz – 150kHz

There were no emissions detected above the measurement system noise floor. The noise floor was greater than 40dB below the specification limit. A composite graph combining 4 sweeps taken at 90° angles and with the loop antenna orientation rotated by 90° is presented in figures 5 and 6 below.

### 9.2.2 150kHz – 30MHz

There were no emissions detected above the measurement system noise floor. The noise floor was greater than 30dB below the specification limit. A composite graph combining 4 sweeps taken at 90° intervals around the EUT and with the loop antenna orientation rotated by 90° is presented in figures 7 and 8 below.

### 9.2.3 30MHz – 300MHz

There were no emissions detected above the measurement system noise floor. The noise floor was greater than 30dB below the specification limit. A composite graph combining 4 sweeps taken at 90° intervals around the EUT and with the loop antenna orientation rotated by 90° is presented in figure 9 below.

### 9.2.4 300MHz – 1GHz

All emissions within this band were below –20dBc. A composite graph combining sweeps taken at 90° intervals around the EUT in both vertical and horizontal polarisations is presented in figure 10 below.

### 9.2.5 1GHz – 2GHz

There were no emissions detected above the measurement system noise floor. A composite graph combining sweeps taken at 90° intervals around the EUT in both vertical and horizontal polarisations is presented in figure 11 below.

### 9.2.6 2GHz – 25GHz

Measurements were carried out in the 2.4 GHz – 2.4835 GHz band on channel 11, 18 and 26 in order to determine the maximum peak level of the fundamental emission. The maximum level may then be referenced back to emissions that are outside the restricted bands to ensure they meet the –20dBc requirement of FCC rule 15.247(4)(d). A table summarising the results is presented below and a plot of the highest level recorded is presented in figure 13.

| Channel No. | Freq (GHz) | Peak level (dBμV/m) | Antenna polarity | Antenna height (m) | Turntable angle (Degrees) |
|-------------|------------|---------------------|------------------|--------------------|---------------------------|
| 11          | 2.40485    | 93.36               | Horizontal       | 113                | 355                       |
| 11          | 2.40488    | 94.73               | Vertical         | 121                | 125                       |
| 18          | 2.43990    | 94.04               | Horizontal       | 140                | 155                       |
| 18          | 2.43988    | 96.90               | Vertical         | 112                | 95                        |
| 26          | 2.47990    | 93.52               | Horizontal       | 115                | 165                       |
| 26          | 2.47988    | 97.02               | Vertical         | 110                | 75                        |

**Table 2 Summary of results of fundamental frequency levels for channels 11, 18, 26.**

The frequency sweeps above 2GHz clearly indicated an emission at the 2<sup>nd</sup> and 3<sup>rd</sup> harmonic frequencies of the EUT (see figure 12 below). This was investigated in more detail on channels 11, 18 and 26. The results from these measurements have been presented in table 4 below and plots of the highest recorded emissions are presented in figures 14 and 15.

There were no other emissions identified or investigated in the 2GHz to 25GHz band.

| Channel No. | Freq (GHz) | Max peak level<br>(dB $\mu$ V/m) | Peak limit (dB $\mu$ V/m) | Average level<br>(dB $\mu$ V/m) Note 1 | Average Limit<br>(dB $\mu$ V/m) | Ae polarity | Ae height (m) | Turntable angle<br>(Degrees) | $\Delta$ Limit (dB) |
|-------------|------------|----------------------------------|---------------------------|----------------------------------------|---------------------------------|-------------|---------------|------------------------------|---------------------|
| 11          | 4.80975    | 61.16                            | 74.0                      | 41.16                                  | 54.0                            | Hor         | 126           | 240                          | -12.84              |
| 11          | 4.80988    | 63.36                            | 74.0                      | 43.36                                  | 54.0                            | Ver         | 130           | 175                          | -10.64              |
| 18          | 4.87985    | 59.70                            | 74.0                      | 39.70                                  | 54.0                            | Hor         | 110           | 260                          | -14.3               |
| 18          | 4.87978    | 64.36                            | 74.0                      | 44.36                                  | 54.0                            | Ver         | 141           | 140                          | -9.64               |
| 26          | 4.95993    | 54.54                            | 74.0                      | 34.54                                  | 54.0                            | Hor         | 115           | 235                          | -19.46              |
| 26          | 4.95993    | 60.32                            | 74.0                      | 40.32                                  | 54.0                            | Ver         | 120           | 170                          | -13.68              |
| 11          | 7.21483    | 63.54                            | 83.5                      | 43.54                                  | 63.5                            | Hor         | 110           | 207                          | -19.96              |
| 11          | 7.21493    | 61.75                            | 83.5                      | 41.75                                  | 63.5                            | Ver         | 110           | 124                          | -21.75              |
| 18          | 7.31980    | 67.64                            | 83.5                      | 47.64                                  | 63.5                            | Hor         | 110           | 210                          | -15.86              |
| 18          | 7.31983    | 65.31                            | 83.5                      | 44.31                                  | 63.5                            | Ver         | 110           | 136                          | -19.19              |
| 26          | 7.43988    | 68.69                            | 83.5                      | 48.69                                  | 63.5                            | Hor         | 110           | 205                          | -14.81              |
| 26          | 7.43988    | 67.74                            | 83.5                      | 47.74                                  | 63.5                            | Ver         | 110           | 130                          | -15.76              |

Note 1: Average level is maximum-recorded peak level with applied relaxation factor as described in section 9.1 above.

Note 2: Limit shown reflects measurement taken at 1m from EUT.

**Table 3 Summary of results for radiated spurious emissions in 2GHz – 25GHz band.**

## 10 Radiated Emissions Graphs

### 10.1 9kHz to 150kHz

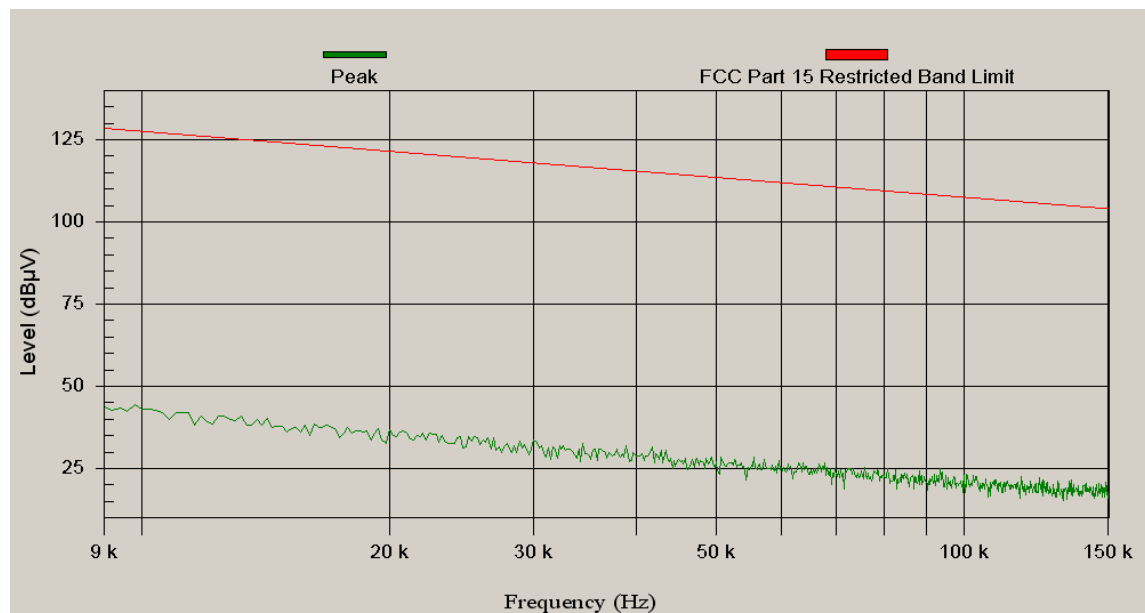


Figure 5 Composite graph of radiated emissions, antenna edge on from EUT

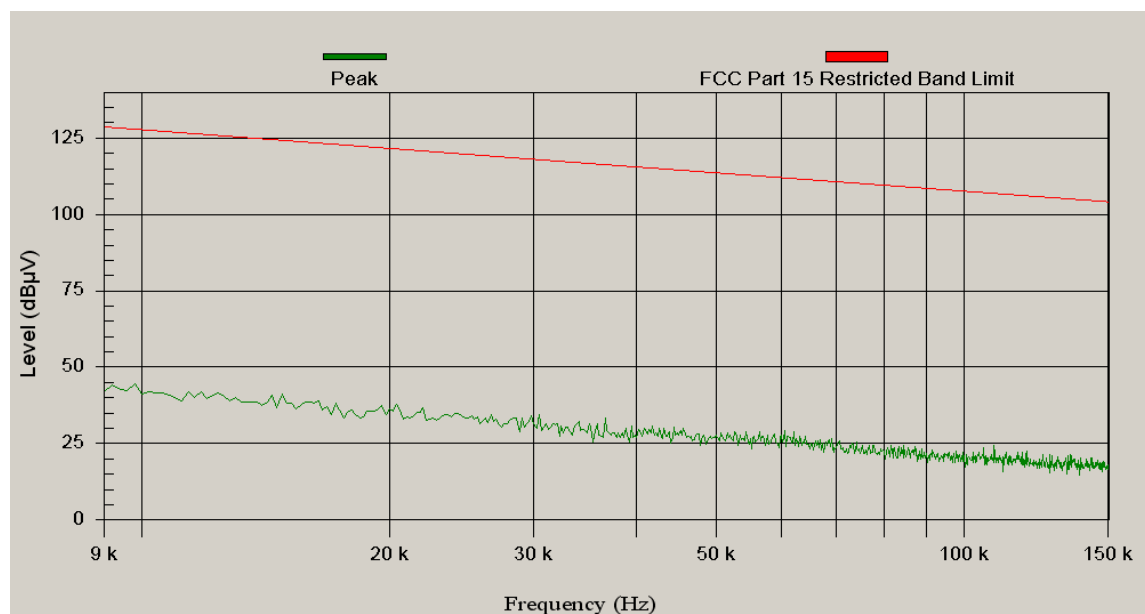


Figure 6 Composite graph of radiated emissions, antenna face on from EUT

## 10.2 150kHz to 30MHz

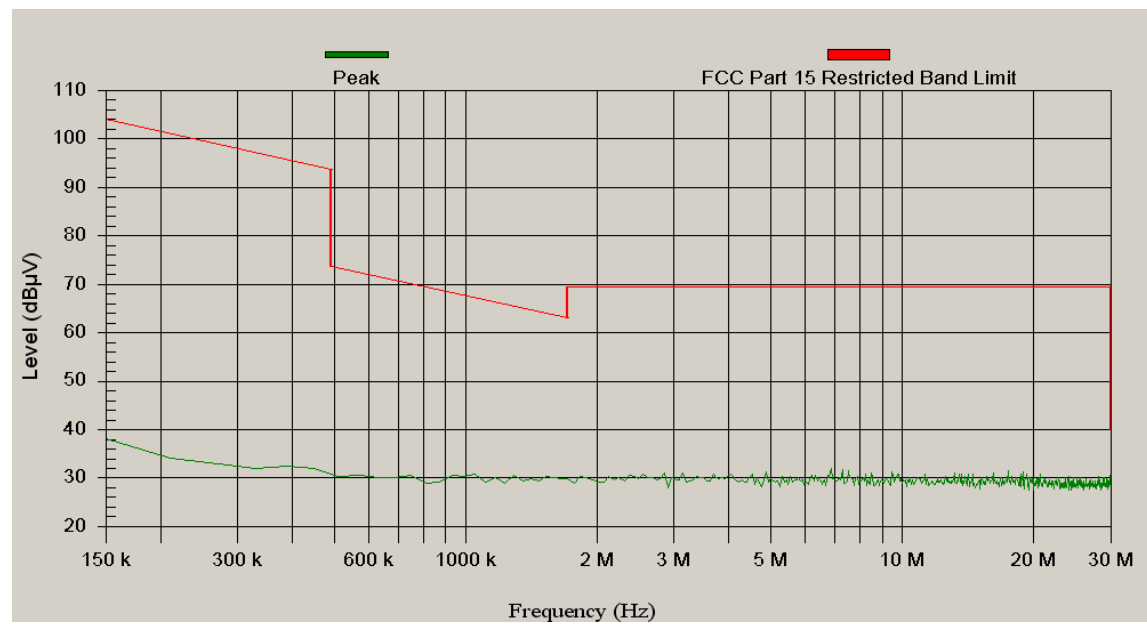


Figure 7 Composite graph of radiated emissions, antenna edge on from EUT

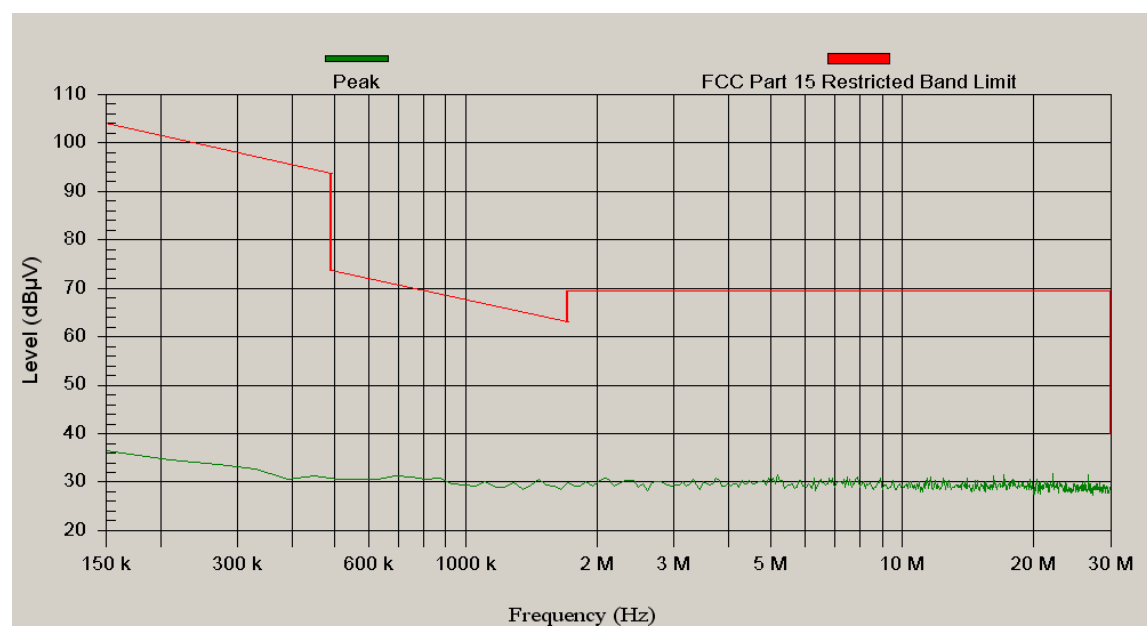


Figure 8 Composite graph of radiated emissions, antenna face on from EUT

## 10.3 30MHz to 300MHz

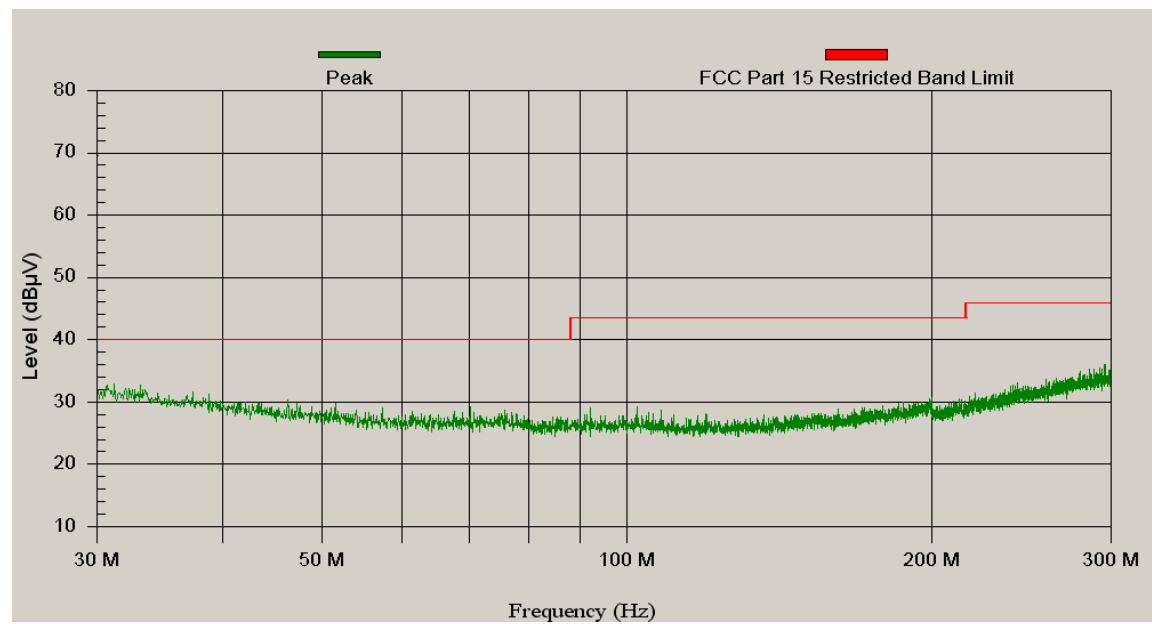


Figure 9 Composite graph of radiated emissions from EUT

## 10.4 300MHz to 1000MHz

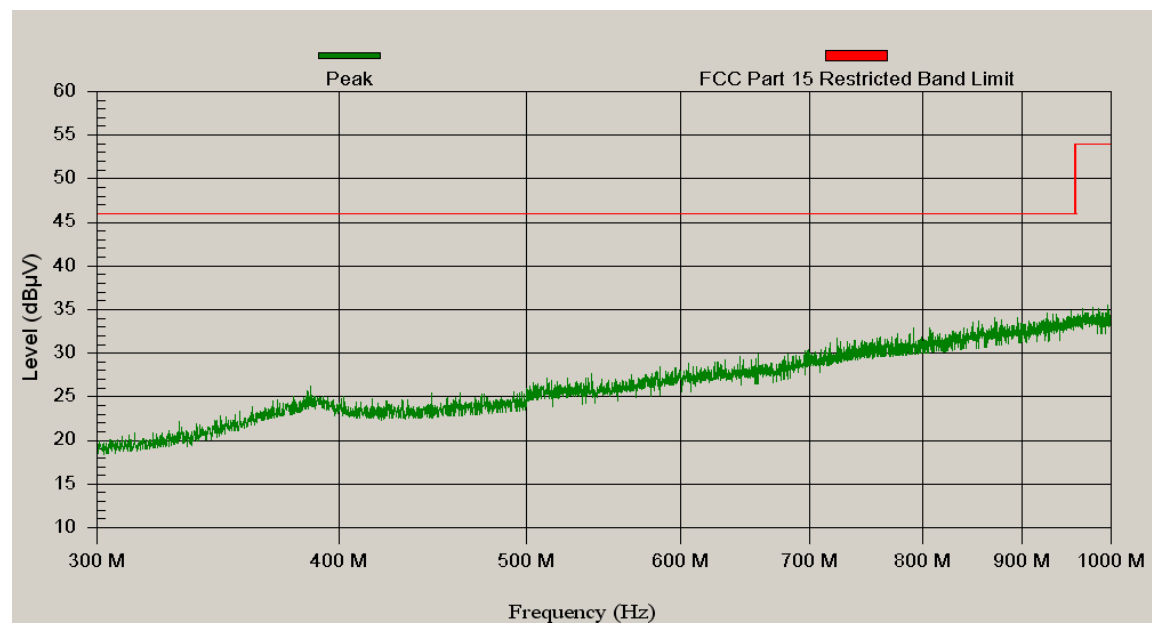


Figure 10 Composite graph of radiated emissions from EUT

## 10.5 1GHz to 2GHz

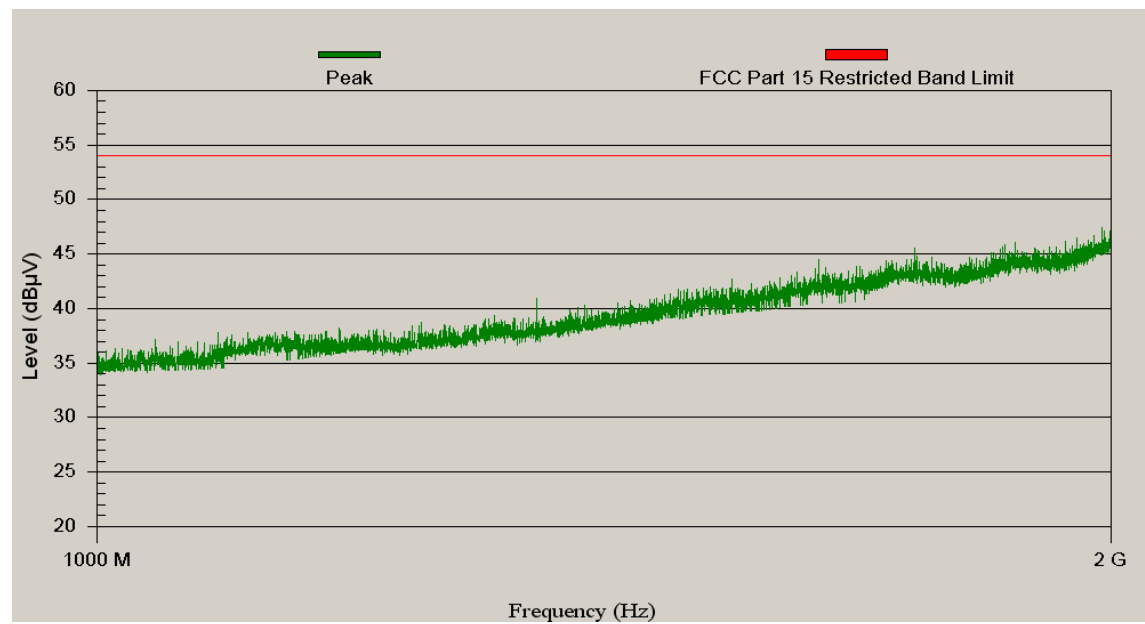


Figure 11 Composite graph of radiated emissions from EUT

## 10.6 2GHz to 25GHz




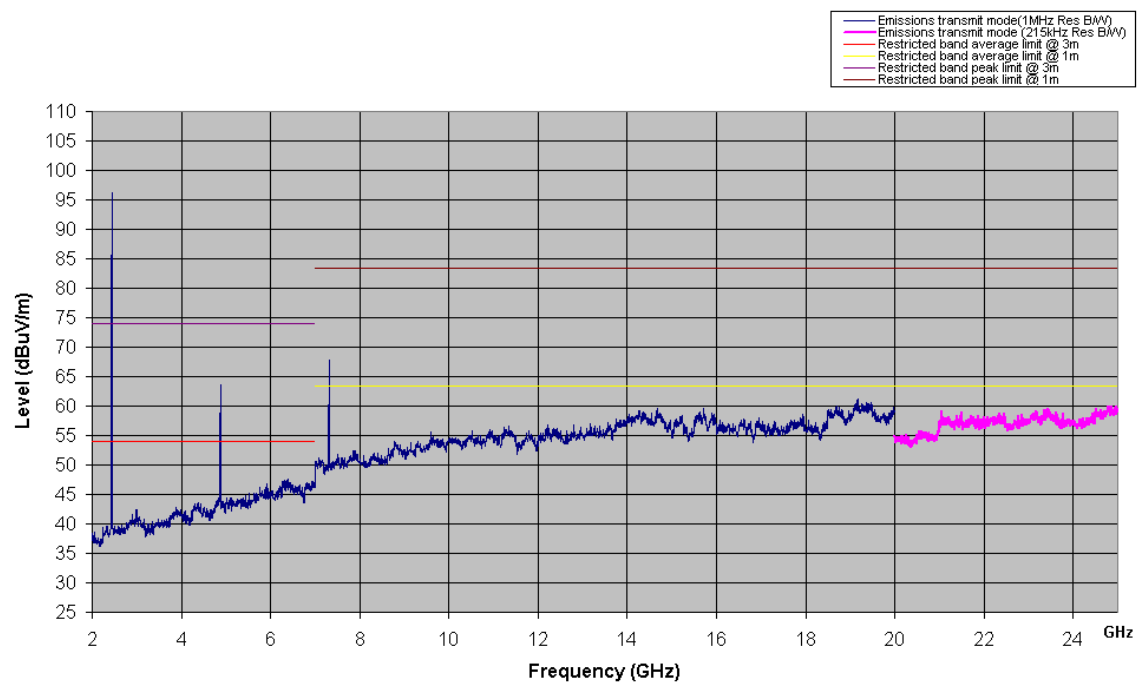


Figure 12 Composite graph of radiated emissions. EUT in Tx mode, channel 18

**Figure 13 Channel 26 Vertical (Highest recorded fundamental frequency)****Figure 14 Channel 18 Vertical (Highest recorded 2<sup>nd</sup> harmonic)**

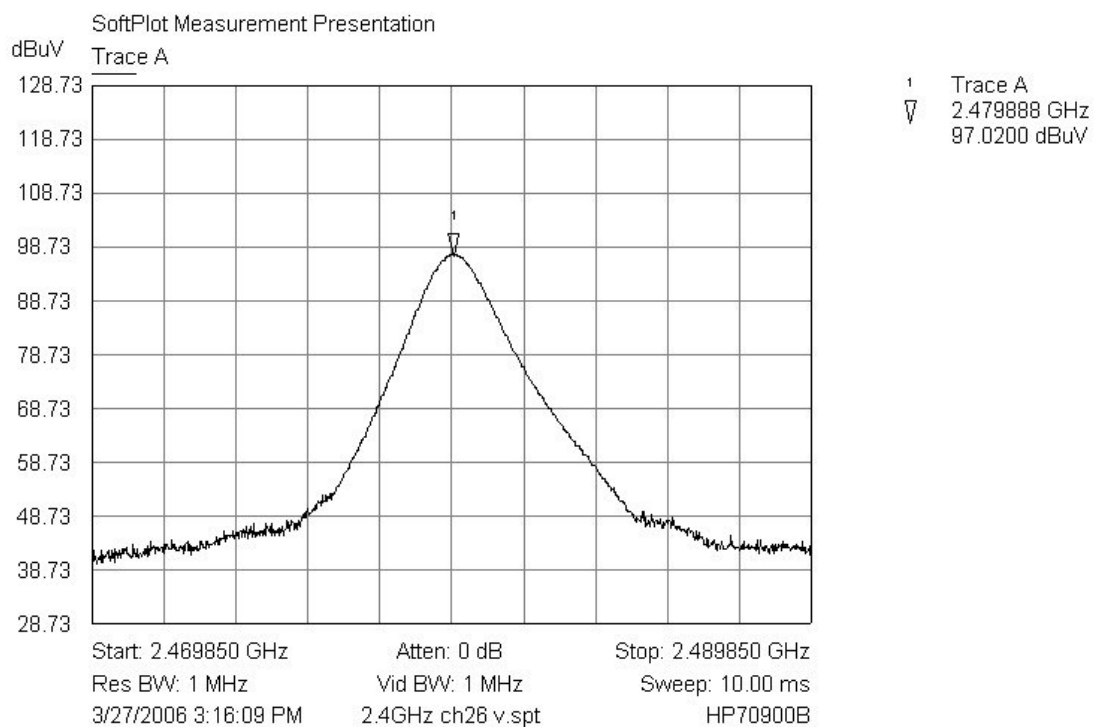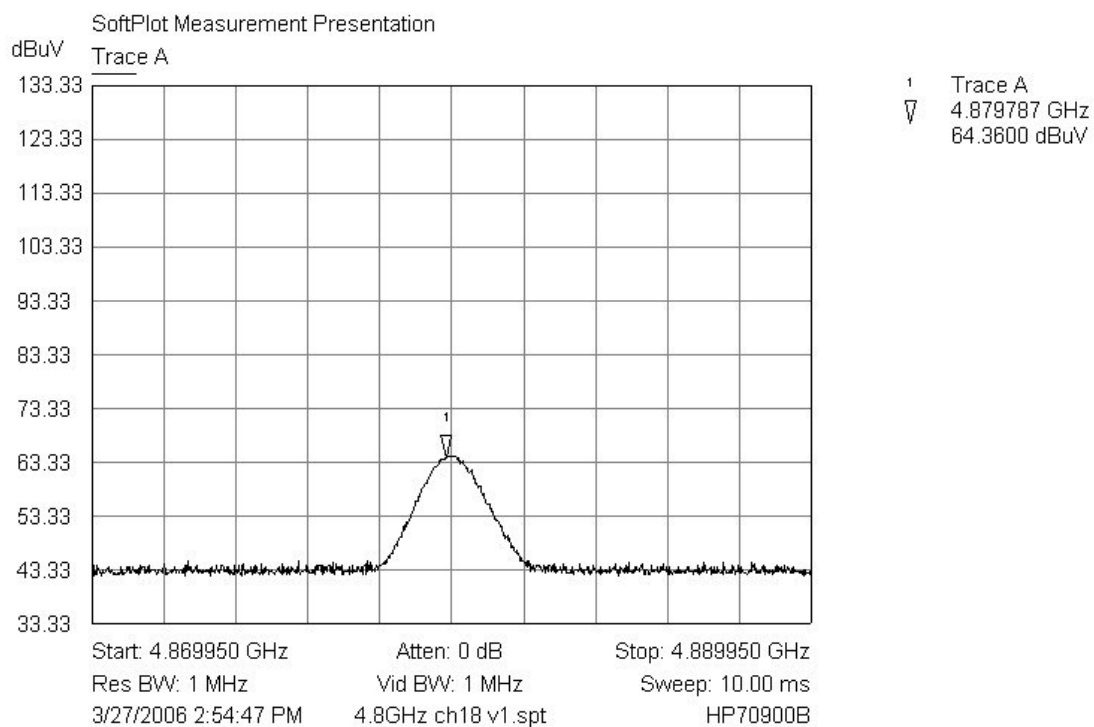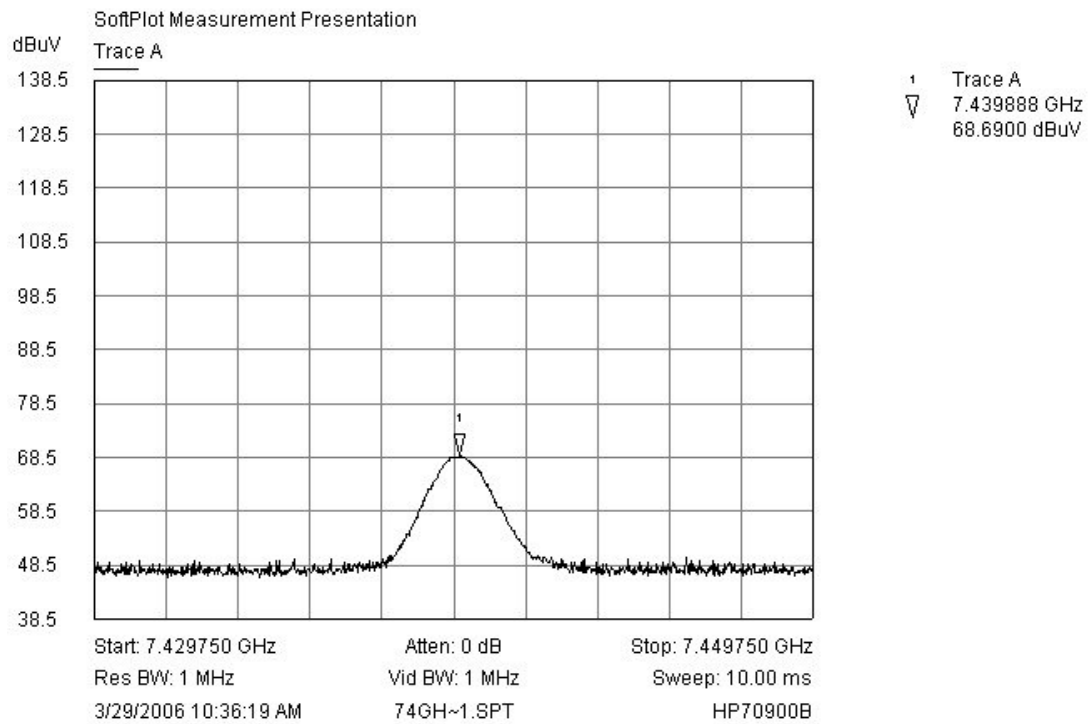

**Figure 15 Channel 26 Horizontal (Highest recorded 3<sup>rd</sup> harmonic)**

## **11 Radiated Emissions Results – Unintentional Radiator**

### **11.1 Test Measurement Limits.**

The EUT was tested for spurious emissions between 30MHz and 25GHz (i.e. above 10<sup>th</sup> harmonic) against the following limits:

- Table of rule 15.109 (a)

Below 2GHz the EUT was tested with the LifeTag Base Station next to the LifeTag on the table.

## 11.2 Test Results

### 11.2.1 30MHz – 300MHz

All emissions within this band were below  $-20\text{dBc}$ . A composite graph combining sweeps taken at  $90^\circ$  intervals around the EUT in both vertical and horizontal polarisations is presented in figure 16 below.

### 11.2.2 300MHz – 1GHz

All emissions within this band were below  $-20\text{dBc}$ . A composite graph combining sweeps taken at  $90^\circ$  intervals around the EUT in both vertical and horizontal polarisations is presented in figure 17 below.

### 11.2.3 1GHz – 2GHz

There were no emissions detected above the measurement system noise floor. A composite graph combining sweeps taken at  $90^\circ$  intervals around the EUT in both vertical and horizontal polarisations is presented in figure 18 below.

### 11.2.4 2GHz – 25GHz

The frequency sweeps above 2GHz clearly indicated a spurious emission radiating from the EUT (see figure 19 below). This was investigated in more detail on channels 11, 18 and 26. The worst-case peak emission in max hold mode was measured on channel 26 at 4.951933GHz. A plot of this measurement is shown in figure 20 below.

There were no other emissions identified or investigated in the 2GHz to 25GHz band.

| Channel No. | Freq (GHz) | Max peak level<br>(dB $\mu\text{V}/\text{m}$ ) | Average Limit<br>(dB $\mu\text{V}/\text{m}$ ) | Ae polarity | Ae height (m) | Turntable angle<br>(Degrees) | $\Delta$ Limit (dB) |
|-------------|------------|------------------------------------------------|-----------------------------------------------|-------------|---------------|------------------------------|---------------------|
| 11          | 4.801928   | 48.21                                          | 54                                            | Hor         | 140           | 125                          | -5.79               |
| 11          | 4.801933   | 49.33                                          | 54                                            | Ver         | 110           | 335                          | -4.67               |
| 18          | 4.871939   | 50.77                                          | 54                                            | Hor         | 136           | 145                          | -3.23               |
| 18          | 4.871943   | 50.67                                          | 54                                            | Ver         | 110           | 290                          | -3.33               |
| 26          | 4.951933   | 51.69                                          | 54                                            | Hor         | 112           | 140                          | -2.31               |
| 26          | 4.951944   | 51.64                                          | 54                                            | Ver         | 110           | 340                          | -2.36               |

**Table 4 Summary of results for radiated spurious emissions in 2GHz – 25GHz band.**

## 11.3 30MHz to 300MHz

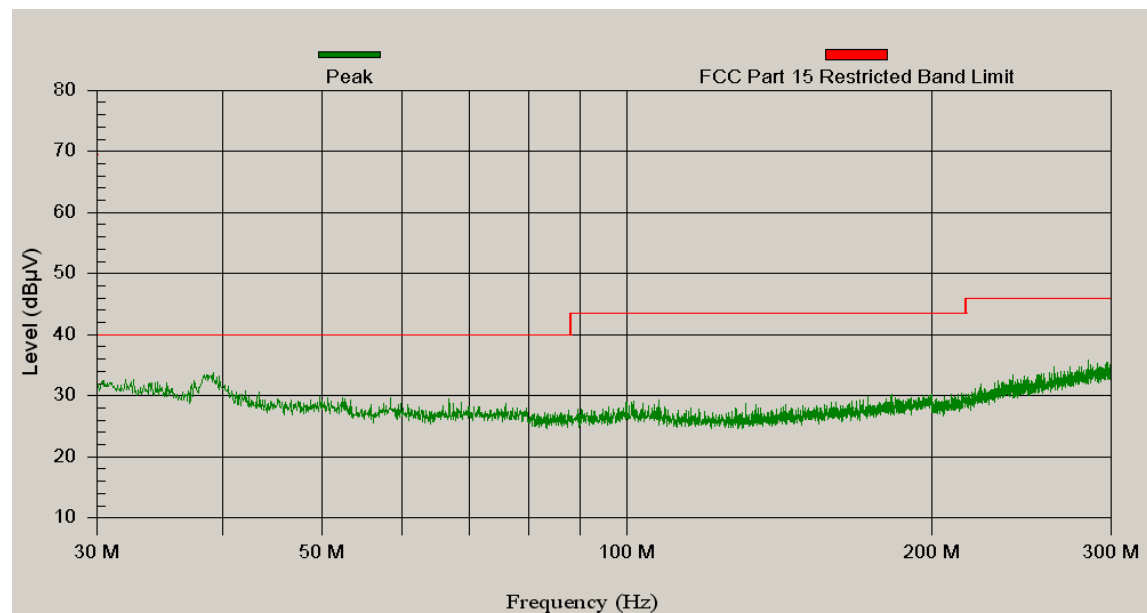


Figure 16 Composite graph of radiated emissions from EUT

## 11.4 300MHz to 1000MHz

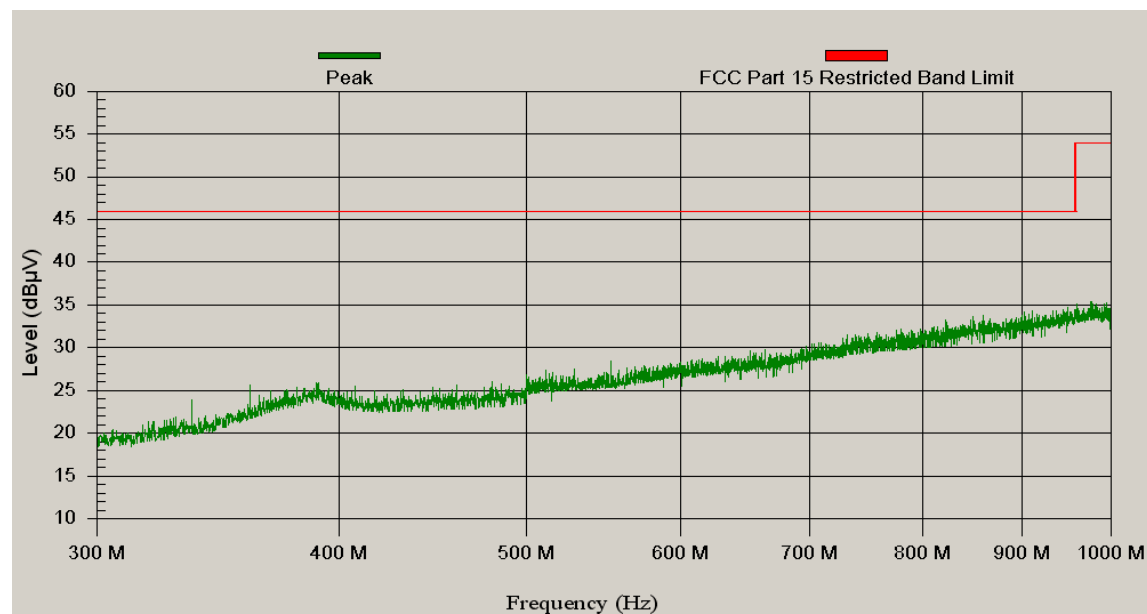


Figure 17 Composite graph of radiated emissions from EUT

## 11.5 1GHz to 2GHz

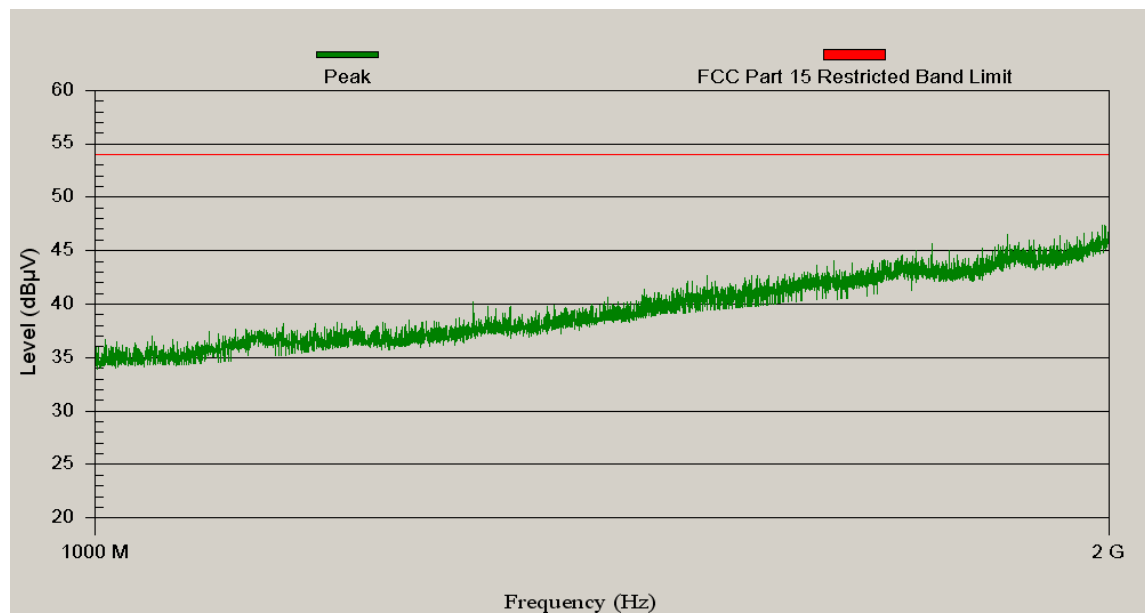


Figure 18 Composite graph of radiated emissions from EUT

## 11.6 2GHz to 25GHz


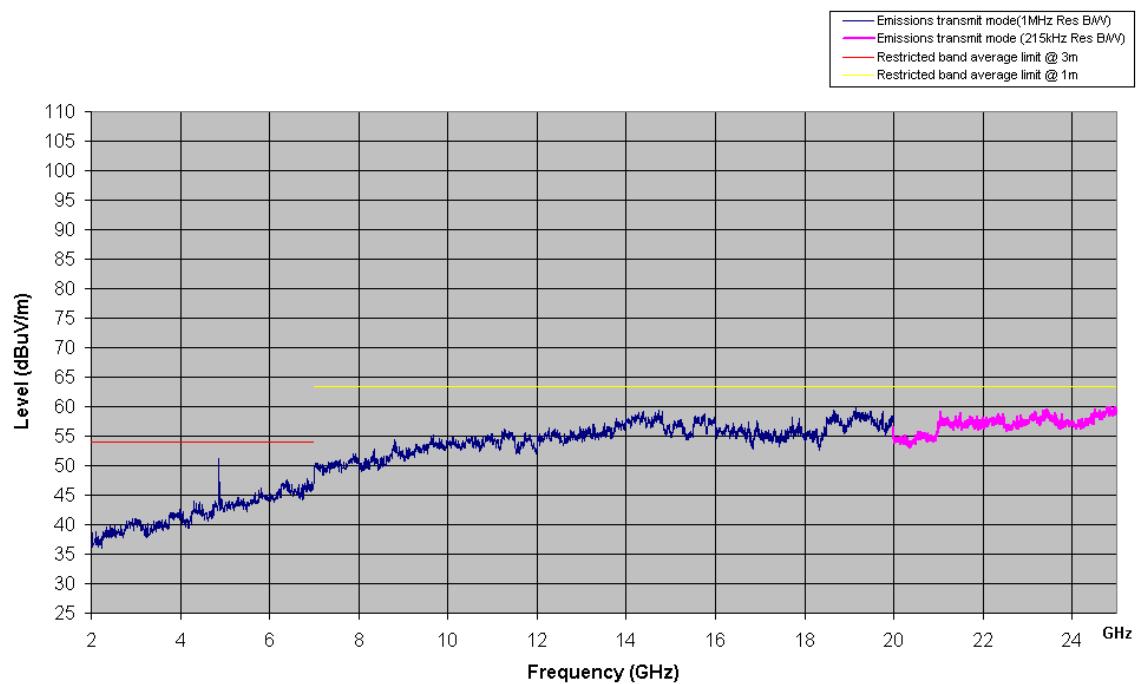


Figure 19 Composite graph of radiated emissions. EUT in Rx mode, channel 18

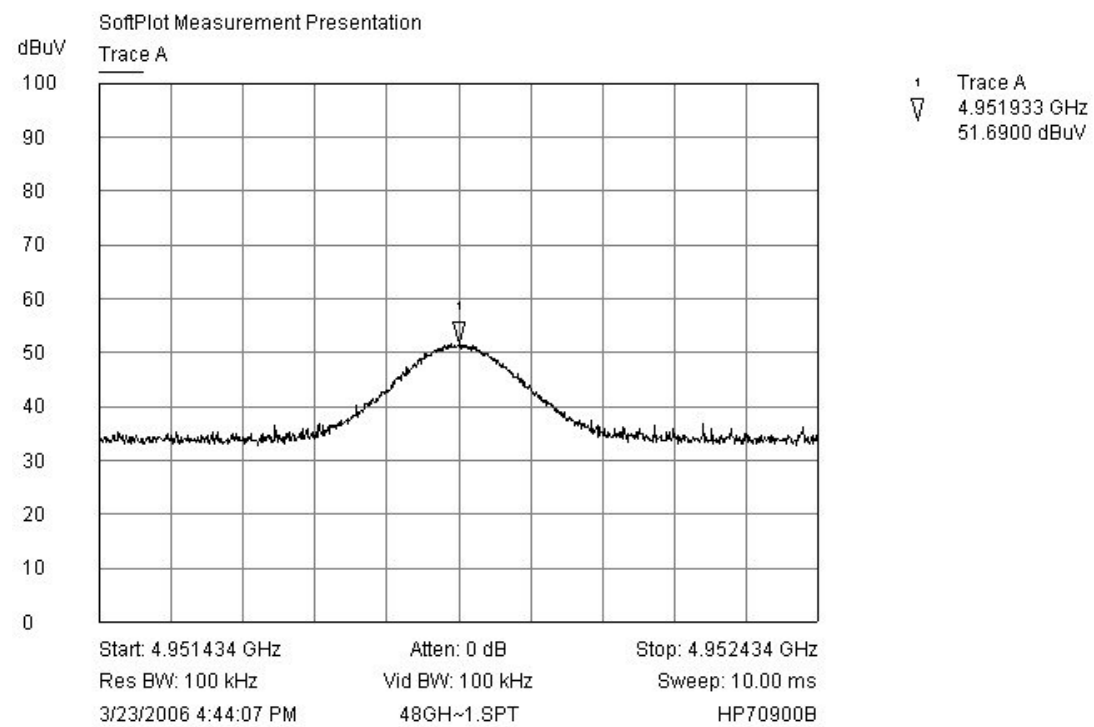

**Figure 20 Channel 26 Vertical (Highest recorded 2<sup>nd</sup> harmonic)**

## 12 RF Exposure Calculations

An assessment of the RF exposure from the EUT is required under FCC rule 15.247(b) to ensure that the public are not exposed to levels of RF energy in excess of the FCC guidelines. The assessment for this EUT is presented below.

The level against which the assessment is made is  $1\text{mW/cm}^2$ , this figure is quoted in table 1 (B) of rule 1.1310 for frequencies above 1.5GHz. The following calculation will use this level and assume a separation distance of at least 1cm between the human body and the EUT.

EIRP from the EUT = 2.6dBm. (See RFI report no. RP48098JD05A)

Conversion of radiated power to a power density:

$$P_r = P_t / 4\pi \cdot r^2 \text{ (W/m}^2\text{); } P_t \text{ in watts; } r \text{ in metres}$$

$$P_r = 0.00181 / (4\pi \times 0.002)$$

$$= 72.4 \text{ mW/m}^2$$

Converting this to  $\text{cm}^2$ ;

$$= 0.72 \text{ mW/cm}^2$$

This assumes a continuous transmission from the EUT. In normal use the EUT will transmit for only  $377\mu\text{s}$  every 2seconds; therefore the actual level of exposure will be considerably less.

### 13 Test Equipment List

| Test Equipment Type                        | Manufacturer and Type Number      | Serial Number | TE No. |
|--------------------------------------------|-----------------------------------|---------------|--------|
| Semi-Anechoic Chamber, Site 3              | Global EMC                        | GE002         |        |
| Biconical Antenna, 30-300MHz               | Schwarzbeck VHBB9124/BBAK9137     | 285           | 0968   |
| Log-Periodic Antenna, 0.3-3.0GHz           | Emco EM6946                       | 112           | 0969   |
| Antenna Horn 1-18GHz                       | Chase BBHA9120D                   | 128           | 1446   |
| Antenna Horn 18-26GHz                      | Credowan 20-R-2843-0007           | 36755         | 1448   |
| Active Loop Antenna 9kHz - 30MHz           | Chase EMC HLA6120                 | 1122          | 0904   |
| RF receive cable 2GHz – 26GHz              | Amp Inc. Testline 18              | 1087200-4     |        |
| Loop Antenna PSU/Charger                   | Chase EMC CBP9720                 | 1076          | 1424   |
| Antenna Mast (Site 3)                      | EMCO 2075 4m Mini-Mast            |               | 1526   |
| Turntable (Site 3)                         | EMCO Lo-Pro Turntable             |               | 1527   |
| Mast/Turntable/Antenna Controller (Site 3) | EMCO 2090 Multi-Device Controller | 9712-1278     | 1525   |
| EMI Test Receiver 20Hz - 26.5GHz           | Rhode & Schwarz ESI26             | 832692/006    | 886    |
| Spectrum Analyser 100Hz - 26.5GHz          | HP70000 series                    | 3230A05180    | 1605   |
| Emissions Software                         | Radimation v4.3.73                | VCQZPC        | N/A    |
| Power Supply Unit                          | Palstar PS30M                     | 92534722      | 1454A  |

In accordance with UKAS requirements, all measuring equipment is on a calibration cycle.