



# Raymarine®



## RAY90/91 VHF

Installation & operation instructions

English (en-US)

Date: 12-2017

Document number: 81377-1

© 2017 Raymarine UK Limited





#### **Trademark and patents notice**

**Raymarine, Tacktick, Clear Pulse, Truzoom, HSB, SeaTalk, SeaTalk<sup>hs</sup>, SeaTalk<sup>ng</sup>, Micronet, Raytech, Gear Up, Marine Shield, Seahawk, Autohelm, Automagic, and Visionality** are registered or claimed trademarks of Raymarine Belgium.

**FLIR, LightHouse, DownVision, SideVision, RealVision, Dragonfly, Quantum, Instalert, Infrared Everywhere, The World's Sixth Sense** and **ClearCruise** are registered or claimed trademarks of FLIR Systems, Inc.

All other trademarks, trade names, or company names referenced herein are used for identification only and are the property of their respective owners.

This product is protected by patents, design patents, patents pending, or design patents pending.

#### **Fair Use Statement**

You may print no more than three copies of this manual for your own use. You may not make any further copies or distribute or use the manual in any other way including without limitation exploiting the manual commercially or giving or selling copies to third parties.





#### Software updates



Check the Raymarine website for the latest software releases for your product.  
[www.raymarine.com/software](http://www.raymarine.com/software)

#### Product documentation



The latest versions of all English and translated documents are available to download in PDF format from the website:  
[www.raymarine.com/manuals](http://www.raymarine.com/manuals).  
Please check the website to ensure you have the latest documentation.

Copyright ©2017 Raymarine UK Ltd. All rights reserved.

#### English (en-US)

Document number: 81377-1  
AA:6819;2017-12-21T18:06:26





#### Product documentation



The latest versions of all English and translated documents are available to download in PDF format from the website:  
[www.raymarine.com/manuals](http://www.raymarine.com/manuals).  
Please check the website to ensure you have the latest documentation.

Copyright ©2017 Raymarine UK Ltd. All rights reserved.





## Contents

### Chapter 1 Important information ..... 9

|                                                    |    |
|----------------------------------------------------|----|
| Certified Installation .....                       | 9  |
| FCC .....                                          | 9  |
| Compliance Statement (Part 15.19) .....            | 9  |
| FCC Interference Statement (Part 15.105 (b)) ..... | 9  |
| Industry Canada .....                              | 9  |
| Industry Canada (Français) .....                   | 10 |
| Water ingress .....                                | 10 |
| Disclaimer .....                                   | 10 |
| Declaration of Conformity .....                    | 10 |
| Product disposal .....                             | 11 |
| Warranty registration .....                        | 11 |
| Technical accuracy .....                           | 11 |

### Chapter 2 Document and product information ..... 13

|                                                                    |    |
|--------------------------------------------------------------------|----|
| 2.1 Product documentation .....                                    | 14 |
| User manuals Print Shop .....                                      | 14 |
| Document illustrations .....                                       | 14 |
| 2.2 Applicable products .....                                      | 14 |
| Required additional components .....                               | 14 |
| 2.3 Product overview .....                                         | 15 |
| 2.4 Licensing .....                                                | 15 |
| USA licensing requirements .....                                   | 15 |
| Canada licensing requirements .....                                | 15 |
| Europe and rest of world licensing requirements .....              | 15 |
| Additional information .....                                       | 15 |
| 2.5 Obtain MMSI (Maritime Mobile Service Identity)<br>number ..... | 16 |
| 2.6 Automatic Transmitter Identification System (ATIS) .....       | 16 |

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| 2.7 Parts supplied .....                                              | 16 |
| 2.8 Software updates .....                                            | 17 |
| Checking software versions .....                                      | 17 |
| Preparing the Raymic handset for the software update<br>process ..... | 17 |

### Chapter 3 Installation ..... 19

|                                           |    |
|-------------------------------------------|----|
| 3.1 Selecting a location .....            | 20 |
| General location requirements .....       | 20 |
| Antenna mounting and EME exposure .....   | 20 |
| 3.2 EMC installation guidelines .....     | 21 |
| Suppression ferrites .....                | 21 |
| Connections to other equipment .....      | 21 |
| 3.3 Product dimensions .....              | 21 |
| Product dimensions - Base station .....   | 21 |
| Product dimensions - speakers .....       | 21 |
| Product dimensions - Raymic handset ..... | 22 |
| 3.4 Mounting .....                        | 22 |
| Tools required for installation .....     | 22 |
| Mounting the Base station .....           | 22 |
| Pass-through panel kit mounting .....     | 23 |
| Raymic handset cradle mounting .....      | 23 |
| Passive speaker mounting .....            | 23 |

### Chapter 4 Cables and connections ..... 25

|                                    |    |
|------------------------------------|----|
| 4.1 General cabling guidance ..... | 26 |
| Cable types and length .....       | 26 |
| Routing cables .....               | 26 |
| Strain relief .....                | 26 |



|                                                  |    |
|--------------------------------------------------|----|
| Circuit isolation .....                          | 26 |
| Cable shielding .....                            | 26 |
| Dust caps .....                                  | 26 |
| Connections to other equipment .....             | 26 |
| 4.2 Connections overview .....                   | 26 |
| Bare end wire connections .....                  | 27 |
| 4.3 Power connection .....                       | 27 |
| In-line fuse and thermal breaker ratings .....   | 27 |
| Grounding .....                                  | 27 |
| Power distribution .....                         | 27 |
| 4.4 Handset station connection .....             | 29 |
| Connecting handsets and cables .....             | 29 |
| Handset extension cables .....                   | 29 |
| 4.5 Passive speaker connection .....             | 30 |
| 4.6 NMEA 2000 / SeaTalkng® connection .....      | 30 |
| Connecting SeaTalkng® cables .....               | 30 |
| 4.7 NMEA 0183 connection .....                   | 31 |
| 4.8 Loud hailer connection .....                 | 31 |
| 4.9 Connecting GNSS (GPS) and VHF antennas ..... | 32 |

## Chapter 5 Getting started..... 33

|                                         |    |
|-----------------------------------------|----|
| 5.1 Raymic handset controls .....       | 34 |
| 5.2 Powering the Base station .....     | 34 |
| Powering the handset .....              | 34 |
| 5.3 Homescreen overview .....           | 35 |
| Status bar symbols .....                | 35 |
| Main menu overview .....                | 36 |
| 5.4 Shortcut list .....                 | 37 |
| Adjusting Brightness and Contrast ..... | 37 |
| 5.5 Shared Brightness .....             | 37 |

|                                                          |    |
|----------------------------------------------------------|----|
| Enabling Shared Brightness .....                         | 38 |
| 5.6 Initial startup .....                                | 38 |
| 5.7 Selecting a language .....                           | 38 |
| 5.8 Switching on the AIS receiver .....                  | 39 |
| 5.9 Selecting a network type .....                       | 39 |
| 5.10 Entering your MMSI number .....                     | 39 |
| 5.11 Entering your ATIS ID .....                         | 40 |
| Enabling and disabling ATIS mode .....                   | 40 |
| 5.12 Changing the radio region .....                     | 41 |
| 5.13 Switching between high and low transmit power ..... | 41 |
| 5.14 GNSS (GPS) set up .....                             | 42 |
| Enabling and disabling the internal GNSS (GPS) .....     | 42 |
| No GPS position data .....                               | 42 |
| Entering position manually .....                         | 42 |
| Selecting GPS information to display .....               | 42 |
| Setting time format and offset .....                     | 42 |

## Chapter 6 Digital selective calling (DSC) ..... 43

|                                                      |    |
|------------------------------------------------------|----|
| 6.1 Digital Selective Calling (DSC) .....            | 44 |
| 6.2 Distress calls .....                             | 45 |
| Making a designated distress call .....              | 45 |
| Making a distress call .....                         | 45 |
| Making a Mayday call .....                           | 45 |
| Cancelling a distress call before transmission ..... | 45 |
| Cancelling a distress call after transmission .....  | 46 |
| Receiving a distress call .....                      | 46 |
| Ignoring a distress call .....                       | 46 |
| Acknowledging a distress call .....                  | 46 |
| Manually relaying a distress call .....              | 47 |
| Distress relays sent by other stations .....         | 47 |
| 6.3 Urgency calls .....                              | 47 |



|                                                       |    |
|-------------------------------------------------------|----|
| Making an urgency call .....                          | 47 |
| Receiving an urgency call .....                       | 47 |
| 6.4 Safety calls .....                                | 48 |
| Making a safety call .....                            | 48 |
| Receiving a safety call .....                         | 48 |
| 6.5 Individual (routine) calls .....                  | 48 |
| Making a routine DSC call .....                       | 48 |
| Receiving an individual (routine) call .....          | 48 |
| 6.6 Group calls .....                                 | 49 |
| Making a group call .....                             | 49 |
| Receiving a group call .....                          | 49 |
| 6.7 Position requests .....                           | 49 |
| Making a position request .....                       | 49 |
| Responding to a position request .....                | 49 |
| Setting automatic response to position requests ..... | 50 |
| 6.8 Phonebook .....                                   | 50 |
| Adding a phonebook entry .....                        | 50 |
| Editing a phonebook entry .....                       | 50 |
| Deleting a phonebook entry .....                      | 50 |
| 6.9 Call logs .....                                   | 51 |
| Accessing the call logs .....                         | 51 |
| 6.10 Test calls .....                                 | 51 |
| Making a test call .....                              | 51 |
| Receiving a test call .....                           | 52 |
| 6.11 DSC set-up menu options .....                    | 52 |

## **Chapter 7 VHF operations ..... 53**

|                         |    |
|-------------------------|----|
| 7.1 Watch modes .....   | 54 |
| Using watch modes ..... | 54 |
| 7.2 Scan Mode .....     | 54 |

|                                                                                |    |
|--------------------------------------------------------------------------------|----|
| Performing a scan .....                                                        | 54 |
| 7.3 Priority channels .....                                                    | 54 |
| Switching between priority channels .....                                      | 54 |
| Setting a second priority channel .....                                        | 54 |
| 7.4 Sensitivity .....                                                          | 55 |
| Switching sensitivity modes .....                                              | 55 |
| 7.5 Private channels .....                                                     | 55 |
| Selecting a private channel set .....                                          | 55 |
| 7.6 Automatic Transmitter Identification System (ATIS) and Marcom-C mode ..... | 55 |
| Enabling and disabling ATIS mode .....                                         | 56 |
| 7.7 AIS receiver .....                                                         | 56 |
| Switching AIS on and off .....                                                 | 56 |
| 7.8 Set-up menu options .....                                                  | 57 |
| Display Set-up menu .....                                                      | 59 |
| Shared Brightness menu .....                                                   | 59 |

## **Chapter 8 Hailer, Fog horn, and Intercom ..... 61**

|                                         |    |
|-----------------------------------------|----|
| 8.1 Hailer Fog Intercom menu .....      | 62 |
| 8.2 Loud Hailer .....                   | 62 |
| Using the hailer .....                  | 62 |
| 8.3 Fog horn .....                      | 62 |
| Using the fog horn in manual mode ..... | 62 |
| Using automatic fog horn modes .....    | 63 |
| Switching off Fog Horn mode .....       | 63 |
| 8.4 Intercom .....                      | 63 |
| Using the intercom .....                | 63 |
| Responding to the intercom .....        | 63 |

## **Chapter 9 Maintenance ..... 65**



|                                                                           |           |
|---------------------------------------------------------------------------|-----------|
| 9.1 Maintenance .....                                                     | 66        |
| Routine checks .....                                                      | 66        |
| Unit cleaning instructions .....                                          | 66        |
| <b>Chapter 10 Troubleshooting.....</b>                                    | <b>67</b> |
| 10.1 Troubleshooting .....                                                | 68        |
| Performing a system reset .....                                           | 68        |
| System test .....                                                         | 68        |
| 10.2 Power up troubleshooting.....                                        | 69        |
| 10.3 VHF Radio troubleshooting .....                                      | 71        |
| 10.4 GNSS (GPS) troubleshooting.....                                      | 72        |
| GPS data output .....                                                     | 72        |
| <b>Chapter 11 Technical support .....</b>                                 | <b>73</b> |
| 11.1 Raymarine product support and servicing .....                        | 74        |
| 11.2 Viewing product information .....                                    | 75        |
| 11.3 Learning resources .....                                             | 75        |
| <b>Chapter 12 Technical specification .....</b>                           | <b>77</b> |
| 12.1 Technical specification .....                                        | 78        |
| 12.2 Radio usage .....                                                    | 79        |
| <b>Appendix A NMEA 0183 sentences .....</b>                               | <b>81</b> |
| <b>Appendix B NMEA 2000 PGN list.....</b>                                 | <b>82</b> |
| <b>Appendix C MMSI Regulatory bodies and application submissions.....</b> | <b>84</b> |
| <b>Appendix D VHF Channels .....</b>                                      | <b>86</b> |

|                                          |           |
|------------------------------------------|-----------|
| <b>Appendix E Phonetic alphabet.....</b> | <b>99</b> |
|------------------------------------------|-----------|

|                                  |            |
|----------------------------------|------------|
| <b>Appendix F Prowords .....</b> | <b>100</b> |
|----------------------------------|------------|



## Chapter 1: Important information

### Certified Installation

Raymarine recommends certified installation by a Raymarine approved installer. A certified installation qualifies for enhanced product warranty benefits. Contact your Raymarine dealer for further details, and refer to the separate warranty document packed with your product.



#### Warning: Product installation and operation

- This product must be installed and operated in accordance with the instructions provided. Failure to do so could result in personal injury, damage to your vessel and/or poor product performance.
- Raymarine recommends certified installation by a Raymarine approved installer. A certified installation qualifies for enhanced product warranty benefits. Contact your Raymarine dealer for further details, and refer to the separate warranty document packed with your product.



#### Warning: Potential ignition source

This product is NOT approved for use in hazardous/flammable atmospheres. Do NOT install in a hazardous/flammable atmosphere (such as in an engine room or near fuel tanks).



#### Warning: 12 Volt dc only

This product must only be connected to a **12 volt dc** power source.



#### Warning: Chassis grounding

Do NOT ground this product using the chassis ground terminal.

Grounding this product to a vessel's RF ground may cause galvanic corrosion.



#### Warning: Positive ground systems

Do not connect this unit to a system which has positive grounding.



#### Warning: Switch off power supply

Ensure the vessel's power supply is switched OFF before starting to install this product. Do NOT connect or disconnect equipment with the power switched on, unless instructed in this document.

### FCC



#### Warning: FCC Warning (Part 15.21)

Changes or modifications to this equipment not expressly approved in writing by Raymarine Incorporated could violate compliance with FCC rules and void the user's authority to operate the equipment.

### Compliance Statement (Part 15.19)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

### FCC Interference Statement (Part 15.105 (b))

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio / TV technician for help.

### Innovation, Science and Economic Development Canada

This device complies with ISED License-exempt. RSS standard(s).

Operation is subject to the following two conditions:



1. This device may not cause interference; and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

This Class B digital apparatus complies with Canadian ICES-003.

### Innovation, Sciences et Développement économique Canada (Français)

Cet appareil est conforme aux normes d'exemption de licence RSS d'ISED.

Son fonctionnement est soumis aux deux conditions suivantes:

1. cet appareil ne doit pas causer d'interférence, et
2. cet appareil doit accepter toute interférence, notamment les interférences qui peuvent affecter son fonctionnement.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.



#### Warning: VHF Antenna isolation

To prevent galvanic corrosion your VHF antenna must be isolated from any vessel metalwork using a suitable insulated e.g. plastic, mounting bracket.

This radio complies with the ITU-R M493-13 requirements.



#### Warning: Maximum Permissible Exposure

Failure to observe these guidelines may expose those within the Maximum Permissible Exposure (MPE) radius to RF radiation absorption that exceeds the FCC MPE limit. It is the radio operator's responsibility to ensure that no person comes within this radius.

For optimal radio performance and minimal human exposure to Radio Frequency (RF) electromagnetic energy, you must ensure that the antenna is:

- connected to the radio before transmitting;
- located where it will be away from people;
- located at least 1.3meters (4.2ft.) from the radio's main unit.

#### Caution: Perform regular radio checks

Perform regular radio checks when using your vessel, as recommended in radio training and certification schemes and radio equipment rules of use.

#### Caution: Ensure proper radio use

Under no circumstances should a DSC distress alert be sent from your radio for test purposes. Such action is a violation of rules of use for radio equipment, and can result in heavy fines.

## Water ingress

### Water ingress disclaimer

Although the waterproof rating capacity of this product meets the stated IPX standard (refer to the product's *Technical Specification*), water intrusion and subsequent equipment failure may occur if the product is subjected to commercial high-pressure washing. Raymarine will not warrant products subjected to high-pressure washing.

## Disclaimer

Raymarine does not warrant that this product is error-free or that it is compatible with products manufactured by any person or entity other than Raymarine.

Raymarine is not responsible for damages or injuries caused by your use or inability to use the product, by the interaction of the product with products manufactured by others, or by errors in information utilized by the product supplied by third parties.

## Declaration of Conformity

FLIR Belgium BVBA declares that the radio equipment types Ray90 and Ray91 DSC VHF Radios, part numbers E70492 and E70493, are in compliance with the Radio Equipment Directive 2014/53/EU.

The original Declaration of Conformity certificate may be viewed on the relevant product page at [www.raymarine.com/manuals](http://www.raymarine.com/manuals).





## Product disposal

Dispose of this product in accordance with the WEEE Directive.



■ The Waste Electrical and Electronic Equipment (WEEE) Directive requires the recycling of waste electrical and electronic equipment.

## Warranty registration

To register your Raymarine product ownership, please visit [www.raymarine.com](http://www.raymarine.com) and register online.

It is important that you register your product to receive full warranty benefits. Your unit package includes a bar code label indicating the serial number of the unit. You will need this serial number when registering your product online. You should retain the label for future reference.



## Technical accuracy

To the best of our knowledge, the information in this document was correct at the time it was produced. However, Raymarine cannot accept liability for any inaccuracies or omissions it may contain. In addition, our policy of continuous product improvement may change specifications without notice. As a result, Raymarine cannot accept liability for any differences between the product and this document. Please check the Raymarine website ([www.raymarine.com](http://www.raymarine.com)) to ensure you have the most up-to-date version(s) of the documentation for your product.



## Chapter 2: Document and product information

### Chapter contents

- [2.1 Product documentation on page 14](#)
- [2.2 Applicable products on page 14](#)
- [2.3 Product overview on page 15](#)
- [2.4 Licensing on page 15](#)
- [2.5 Obtain MMSI \(Maritime Mobile Service Identity\) number on page 16](#)
- [2.6 Automatic Transmitter Identification System \(ATIS\) on page 16](#)
- [2.7 Parts supplied on page 16](#)
- [2.8 Software updates on page 17](#)



## 2.1 Product documentation

The following documentation is applicable to your product:

| Description                             | Part number |
|-----------------------------------------|-------------|
| Installation and operation instructions | 81377       |
| Ray90 / Ray91 mounting template         | 87329       |

All documents are available to download in pdf format from the Raymarine® website: [www.raymarine.com/manuals](http://www.raymarine.com/manuals).

### User manuals Print Shop

Raymarine provides a Print Shop service, enabling you to purchase a high-quality, professionally-printed manual for your Raymarine product.

Printed manuals are ideal for keeping onboard your vessel, as a useful source of reference whenever you need assistance with your Raymarine product.

Visit <http://www.raymarine.co.uk/view/?id=5175> to order a printed manual, delivered directly to your door.

For further information about the Print Shop, please visit the Print Shop FAQ pages: <http://www.raymarine.co.uk/view/?id=5751>.

#### Note:

- Accepted methods of payment for printed manuals are credit cards and PayPal.
- Printed manuals can be shipped worldwide.
- Further manuals will be added to the Print Shop over the coming months for both new and legacy products.
- Raymarine user manuals are also available to download free-of-charge from the Raymarine website, in the popular PDF format. These PDF files can be viewed on a PC / laptop, tablet, smartphone, or on the latest generation of Raymarine multifunction displays.

### Document illustrations

Your product and if applicable, its user interface may differ slightly from that shown in the illustrations in this document, depending on product variant and date of manufacture.

All images are provided for illustration purposes only.

## 2.2 Applicable products

This document is applicable to the following products:

| Name  | Part number | Features                                                                                                                                                                                                                                        |
|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ray90 | E70492      | <ul style="list-style-type: none"><li>• Built-in GNSS (GPS and GLONASS) receiver</li><li>• Up to 2 wired handset stations</li><li>• Loud hailer connection</li><li>• SeaTalkng® / NMEA 2000 connection</li><li>• NMEA 0183 connection</li></ul> |
| Ray91 | E70493      | Same as Ray90 above, with additional: <ul style="list-style-type: none"><li>• Built-in AIS receiver</li></ul>                                                                                                                                   |

### Required additional components

Your product requires a VHF and GNSS (GPS) antenna to be connected.

| Part number | Description                |
|-------------|----------------------------|
| A80288      | Passive GNSS (GPS) antenna |
| N/A         | 3rd Party VHF antenna      |



## 2.3 Product overview

The Ray90 and Ray91 are 12 V dc, Class D Digital Selective Calling (DSC) VHF radios. DSC enables you to make and receive calls to a specific radio, and to transmit and receive position information to and from a selected radio. DSC also allows transmission of a distress alert, to all radios within range, at the touch of a button. Once a DSC request is sent and acknowledged voice communication is carried out on the channel chosen by the caller. The radio can transmit and receive on all available US, Canadian, International and Private marine VHF channels.

The Ray90 and Ray91 include a built-in GNSS (GPS) receiver.

The Ray91 also includes a built-in AIS receiver.

Your radio includes a base station with 2 x wired handset connections.

With an optional loud hailer connected the radio can also be used as a fog horn or loud public address (PA) system.

## 2.4 Licensing

Prior to using this product please check your national requirements for both operator and equipment licensing.

### USA licensing requirements

#### FCC station license requirement

An FCC Ship Radio Station License and Call Sign are not required for most recreational vessels travelling in US waters. However, you must obtain a license if your vessel travels to foreign ports.

Ships that use MF/HF single side-band radio, satellite communications, or telegraphy must be licensed by the FCC. You can obtain a Station License by filing FCC Form 605.

### Canada licensing requirements

#### Industry Canada license requirement

You do not need a license to operate this product within the sovereign waters of Canada or the United States of America (USA). You will need a license to operate this radio outside of Canada or the USA. To obtain Industry Canada licensing information, contact the nearest field or regional office, or write to:

Industry Canada Radio Regulatory Branch  
Attention: DOSP  
300 Slater Street  
Ottawa, Ontario  
Canada, K1A 0C8

### Europe and rest of world licensing requirements

Regulations in some areas require that an Operator's license is obtained before operating a VHF radio. It is your responsibility to determine whether a license is required in your area before operating this equipment.

## Additional information

The following additional information is required for completing a license application in Canada and the USA.

|                                      |                                 |
|--------------------------------------|---------------------------------|
| Industry Canada certification number | 4069B-RAY90D                    |
| FCC ID                               | PJ5-RAY90                       |
| FCC Type accepted                    | Parts 2, 15 and 80              |
| Output power                         | 1 watt (low) and 25 watt (high) |
| Modulation                           | FM                              |
| Frequency range                      | 155.500 MHz to 163.275 MHz      |



## 2.5 Obtain MMSI (Maritime Mobile Service Identity) number

Before commencing installation ensure you have obtained a MMSI number for your vessel.

A MMSI is a 9 digit number which is sent over a radio frequency channel in order to identify the originating vessel/station. If your vessel already has a MMSI number (used for a VHF DSC radio) then the same MMSI number must be used to program your product.

### Note:

If a MMSI number is not entered, the DSC functionality of your radio will be disabled.

In the United States of America, the MMSI and Static Data must be entered only by a Raymarine® dealer or other appropriately qualified installer of marine communications equipment on board vessels. The user is NOT authorized to do this.

In some areas, a radio operator licence is required before a MMSI number will be issued. You can request a MMSI number from same agency that issues radio or Ship Radio licences in your area.

In Europe and other parts of the world outside of the United States of America, the MMSI and Static data can be set up by the user.

For further details, refer to the relevant Telecommunications Regulatory Body for your area.

Refer to [Appendix C MMSI Regulatory bodies and application submissions](#)

for a list of contacts for obtaining MMSI numbers for some areas.



### Warning: MMSI entry

You can only enter a MMSI number once, if you enter the number incorrectly or need to change your MMSI number, the unit will require re-programming by an authorized dealer.

## 2.6 Automatic Transmitter Identification System (ATIS)

Your product includes ATIS functionality for use on the inland waterways of contracting governments of the "Regional Arrangement on the Radiocommunication Service for Inland Waterways" — also known as "RAINWAT".

ATIS adds data at the end of radio transmissions that identifies your station. ATIS operation can be turned on or off as needed via the radio's menu.

An ATIS ID can be obtained from the same agency that issues radio operator licenses in your area.

Your ATIS ID should be programmed into your product using the instructions provided.

### Note:


Contracting RAINWAT countries include: Austria, Belgium, Bulgaria, Croatia, the Czech Republic, France, Germany, Hungary, Luxembourg, Moldova, Montenegro, the Netherlands, Poland, Romania, Serbia, the Slovak Republic and Switzerland.

### Note:

When ATIS is enabled, certain programming steps have been implemented to protect the integrity of the RAINWAT agreement, including the blocking of DSC functions when ATIS is enabled.

## 2.7 Parts supplied

The following parts are supplied with your product. Please ensure your box contents are correct before proceeding with the installation.

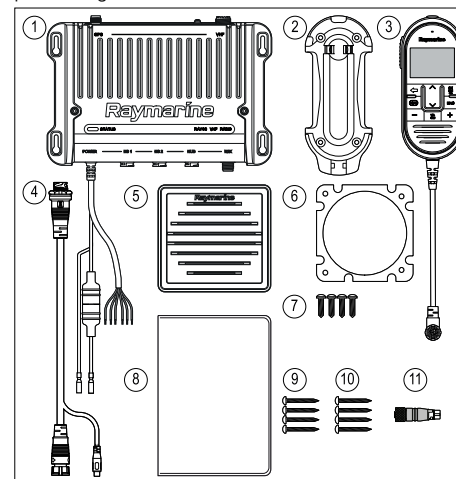

1. Ray90 / Ray91 VHF DSC Radio (including fitted power and data cable)
2. Raymic handset cradle
3. Raymic handset
4. Raymic handset adaptor cable (12 pin female to 12 pin male with RCA Audio)
5. Passive speaker
6. Passive speaker mounting gasket
7. Passive speaker mounting screws x 4
8. Documentation
9. VHF radio mounting screws x 4
10. Handset cradle mounting screws x 4
11. DeviceNet to SeaTalkng® adaptor





## 2.8 Software updates

Raymarine periodically releases software updates for its products. These updates can provide new and enhanced features and also improve product performance and usability. You should ensure that you have the latest software for your products by regularly checking the website for new software. The software update process requires a compatible MFD powered by LightHouse™ 2 release 13 or greater, or LightHouse™ 3.

Check the Raymarine website regularly for software updates for your products:  
[www.raymarine.com/software](http://www.raymarine.com/software).

The MFD used to perform the software update must be the designated Data master and be connected via SeaTalkng® / NMEA 2000 to the product being updated.

Please refer to the operation instructions for your MFD / operating system version for details on how to perform the software update.

If in doubt as to the correct procedure for updating your product software, refer to your dealer or Raymarine technical support.

### Caution: Installing software updates

The software update process is carried out at your own risk. Before initiating the update process ensure you have backed up any important files.

Ensure that the unit has a reliable power supply and that the update process is not interrupted.

Damage caused by incomplete updates are not covered by Raymarine warranty.

By downloading the software update package, you agree to these terms.

## Checking software versions


You can check the software version of your radio and any connected Raymic handset.

From the Homescreen:

Document and product information

1. Select **Menu > Set-up > Maintenance > About this unit**.
2. Scroll down.

The Base station's and Handset's software versions are displayed.

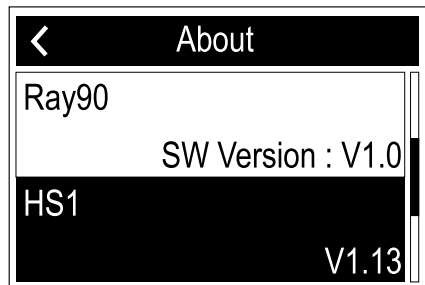

## Preparing the Raymic handset for the software update process

The Raymic must be placed in programming mode to enable its software to be updated.

1. Power off your MFD.
2. Power on the Radio.
3. Ensure the Raymic handset is powered off.
4. Press and hold the **Distress** and **PTT** buttons on the Handset.
5. Press the Handset's **Power** button for 1 second, until the backlight turns on, and then release all three buttons.

*The handset is now in programming mode, in programming mode the handset's screen remains blank and the backlight will briefly flash off, approximately once every 5 seconds. The handset will now be updated at the same time as the Base station.*

6. Power your MFD on and follow the software update process described in your MFD's operation instructions.





7. Once the software update is complete, Power cycle your Radio and check the software version for both the Base station and Handset is correct.



## Chapter 3: Installation

### Chapter contents

- [3.1 Selecting a location on page 20](#)
- [3.2 EMC installation guidelines on page 21](#)
- [3.3 Product dimensions on page 21](#)
- [3.4 Mounting on page 22](#)



## 3.1 Selecting a location



### Warning: Potential ignition source

This product is NOT approved for use in hazardous/flammable atmospheres. Do NOT install in a hazardous/flammable atmosphere (such as in an engine room or near fuel tanks).

## General location requirements

When selecting a location for the unit it is important to consider a number of factors.

### Ventilation requirements

To provide adequate airflow:

- Ensure that equipment is mounted in a compartment of suitable size.
- Ensure that ventilation holes are not obstructed.
- Ensure adequate separation of equipment.

### Mounting surface requirements

Ensure units are adequately supported on a secure surface. Do NOT mount units or cut holes in places which may damage the structure of the vessel.

### Water ingress

#### Ray90/91 Base station

Although the Base station is waterproof to IPx6 and IPx7, it is recommended that the Base station is mounted below decks, in an area protected from prolonged and direct exposure to rain and salt spray.

#### Raymic Handset

The Handset has been designed to be mounted above or below decks and is rated to IPx6 and IPx7.

#### Passive speaker

The speakers has been designed to be mounted above or below decks and are rated to IPx6 and IPx7.

### Cable routing requirements

Ensure the unit is mounted in a location which allows proper routing and connection of cables:

- Minimum cable bend radius of 100 mm (3.94 in) is required unless otherwise stated.
- Use cable supports to prevent stress on connectors.

### Electrical interference

Select a location that is far enough away from devices that may cause interference, such as motors, generators and radio transmitters/receivers.

### Power supply

Select a location that is as close as possible to the vessel's DC power supply. This will help to keep cable runs to a minimum.

### RF interference

Certain third-party external electrical equipment can cause Radio Frequency (RF) interference with GNSS (GPS), AIS or VHF devices, if the external equipment is not adequately insulated and emits excessive levels of electromagnetic interference (EMI).

Some common examples of such external equipment include LED spot or strip lights, and terrestrial TV tuners.

To minimize interference from such equipment:

- Keep it as far away from GNSS (GPS), AIS or VHF devices as possible.
- Ensure that any power cables for external equipment are not entangled with the power or data cables for these devices.
- Consider fitting one or more high frequency suppression ferrites to the EMI-emitting device. The ferrite(s) should be rated to be effective in the range 100 MHz to 2.5 GHz, and should be fitted to the power cable and any other cables exiting the EMI-emitting device, as close as possible to the position where the cable exits the device.

### Compass safe distance

When choosing a suitable location for your product you should aim to maintain the maximum possible distance between the product and any installed compass. This distance should be at least 1 m (3 ft) in all directions. For smaller vessels it may not be possible to achieve this distance. In this situation ensure that the compass is not affected by the product when it is powered on.

## Antenna mounting and EME exposure

Ensure that your VHF antenna is connected to the radio before transmission.

Raymarine® declares a Maximum Permissible Exposure (MPE) radius of 1.3meters (4.2ft.) for this system, assuming 25 watts output to an omnidirectional antenna of 3dBi gain or less.

For watercraft with suitable structures, the antenna base must be at least 3.8 meters (12.5 ft) above the main deck to meet the MPE for persons up to 2 metres (6.6 ft) tall. For watercraft without such structures, the antenna must be mounted so that its base is a minimum of 1.3meters (4.2ft.) vertically from heads of all persons.

The antenna must be isolated from the vessel's metalwork using an insulated (e.g. plastic) mounting bracket.



## 3.2 EMC installation guidelines

Raymarine® equipment and accessories conform to the appropriate Electromagnetic Compatibility (EMC) regulations, to minimize electromagnetic interference between equipment and minimize the effect such interference could have on the performance of your system

Correct installation is required to ensure that EMC performance is not compromised.

### Note:

In areas of extreme EMC interference, some slight interference may be noticed. Where this occurs the product and the source of the interference should be separated by a greater distance.

For **optimum** EMC performance we recommend that wherever possible:

- Raymarine® equipment and cables connected to it are:
  - At least 1 m (3 ft) from any equipment transmitting or cables carrying radio signals e.g. VHF radios, cables and antennas. In the case of SSB radios, the distance should be increased to 2 m (7 ft).
  - More than 2 m (7 ft) from the path of a Radar beam. A Radar beam can normally be assumed to spread 20 degrees above and below the radiating element.
- The product is supplied power from a separate battery from that used for engine start. This is important to prevent erratic behavior and data loss which can occur if the engine start does not have a separate battery.
- Only Raymarine® specified cables are used.
- Cables are not cut or extended, unless doing so is detailed in the installation instructions.

### Note:

Where constraints on the installation prevent any of the above recommendations, always ensure the maximum possible separation between different items of electrical equipment, to provide the best conditions for EMC performance throughout the installation.

## Suppression ferrites

- Raymarine cables may be pre-fitted or supplied with suppression ferrites. These are important for correct EMC performance. If ferrites are supplied separately to the cables (i.e. not pre-fitted), you must fit the supplied ferrites, using the supplied instructions.
- If a ferrite has to be removed for any purpose (e.g. installation or maintenance), it must be replaced in the original position before the product is used.
- Use only ferrites of the correct type, supplied by Raymarine or its authorized dealers.
- Where an installation requires multiple ferrites to be added to a cable, additional cable clips should be used to prevent stress on the connectors due to the extra weight of the cable.

## Connections to other equipment


Requirement for ferrites on non- cables.

If your is to be connected to other equipment using a cable not supplied by , a suppression ferrite **MUST** always be attached to the end of the cable near the .

## 3.3 Product dimensions

### Product dimensions - Base station


The Base station dimensions are listed below.

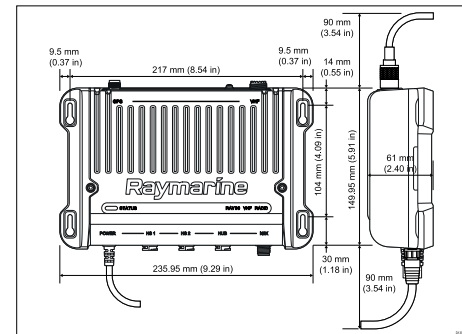

The Base station includes a fitted power and data cable, The power cable length is 1.2 m (3.94 ft) sand the Data cable length is 420 mm (1.38 ft).

### Product dimensions - speakers

The dimensions for the Passive speaker are shown below.

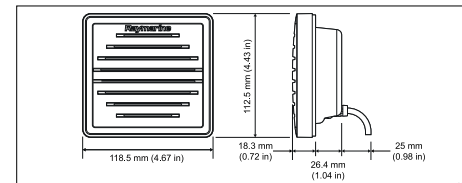


The Passive speaker includes a fitted 2 m (6.56 ft) audio cable terminated with a male RCA plug.



## Product dimensions - Raymic handset


The Raymic handset dimensions for both cradle mounting and clip mounting are provided.

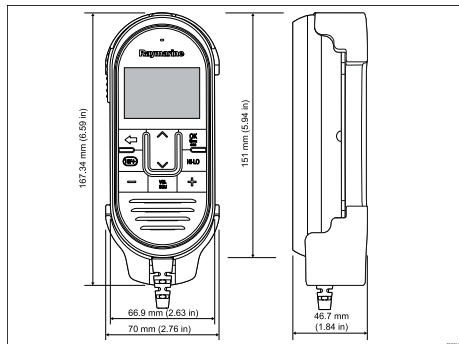

The Raymic handset is fitted with a coiled cable. Ensure sufficient space is available below the desired mounting area to accommodate the cable.

## 3.4 Mounting

### Tools required for installation

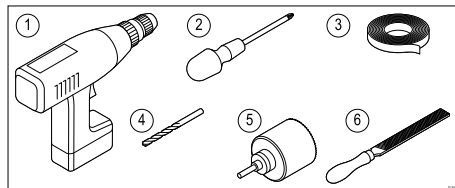


1. Power drill
2. Pozi-drive screwdriver
3. Adhesive tape
4. Suitable size drill bit
5. 89 mm (3 1/2 in) Hole saw (used for speaker mounting)
6. File (for speaker cut-out)

### Mounting the Base station

Follow the steps below to mount the Base station.

Before mounting the Base station ensure that you have:

- selected a suitable location (a clear, flat surface is required).
- identified the location for additional components, such as the Handset or Speaker etc.
- identified the relevant cable connections and route that the cables will take.

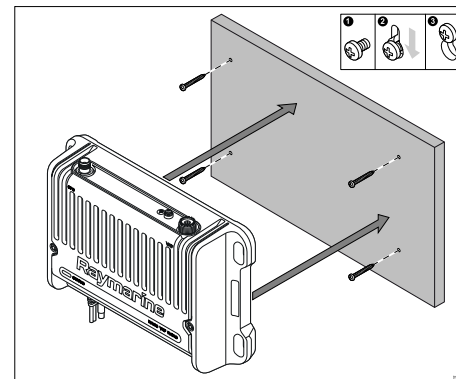


1. Using the supplied mounting template, mark the location of the fixing holes on the mounting surface.
2. Drill holes for the mounting fixings using a drill with a suitable sized drill bit.
3. Screw the fixings approximately half way into the holes in the mounting surface.
4. Place the Base station over the fixings screws and push down to lock into position.
5. Fully tighten the screws.
6. Connect the necessary cables.



## Pass-through panel kit mounting

When installing the Fistic or the optional Raymic handset, the pass-through panel kit should be used to secure the cable to any panels the cable has to pass through.

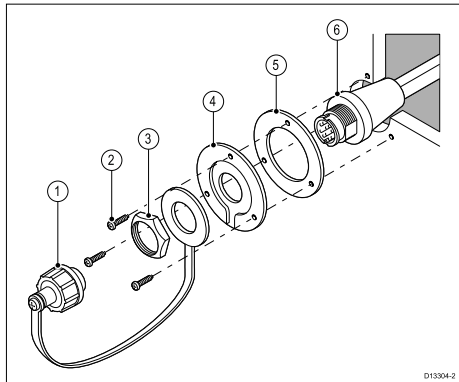

|   |                                    |
|---|------------------------------------|
| 1 | Splash-proof dust cap with lanyard |
| 2 | Mounting plate fixings x 3         |
| 3 | Mounting plate nut                 |
| 4 | Mounting plate                     |
| 5 | Mounting plate gasket              |
| 6 | Extension cable                    |

1. Check the selected location for the Mounting plate, a clear flat area is required.
2. Using a pencil, offer up the Mounting plate to the desired location and mark the location of the screw holes and the center hole on the mounting panel.
3. Drill the mounting holes using a suitable size drill bit.
4. Drill the center hole using a 25 mm (1 in.) hole cutting saw.
5. Pull the connector end of the cable through the hole in the mounting surface.


6. Place the Mounting plate gasket over the end of the connector.
7. With the recessed side facing away from the mounting panel, place the Mounting plate over the end of the connector.
8. Place the lanyard end of the Splash-proof dust cap over the connector, ensuring the lanyard sits in the recess in the Mounting plate.
9. Place the Mounting plate nut over the connector and tighten clockwise using a 13/16 in. (21 mm) socket wrench, being careful not to damage the plastic nut by overtightening.
10. Secure the Mounting plate to the mounting surface using the supplied screws.
11. Attach the Handset / Fistic connector to the cable connector and rotate the locking collar clockwise to secure.
12. Connect the opposite end of the cable to the required connector either on the Base station or to another pass-through panel mounting plate connector.

**Note:** Drill bit, tap size and tightening torque is dependent on the thickness and type of material the unit is to be mounted on.

## Raymic handset cradle mounting

Before mounting the unit, ensure that you have:

- Selected a suitable location, ensuring there is nothing behind the mounting surface that may be damaged when drilling.
- Identified the cable connections and route that the cables will take.

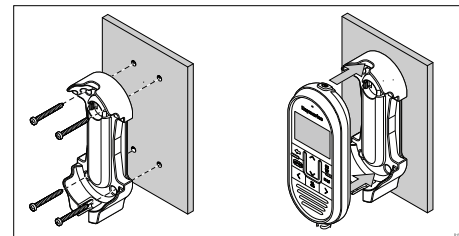


1. Check the selected location for the mounting cradle, a clear flat area is required, with sufficient space around it to place and remove the Handset.
2. Using a pencil, offer up the cradle to the desired location and mark the location of the screw holes on the mounting surface.
3. Drill the mounting holes using a suitable size drill bit.
4. Hold the cradle in place and secure using the screws provided.
5. Place the Handset into the cradle until it clicks into position.

## Passive speaker mounting

Follow the steps below to mount the Passive speaker.

Before mounting the Passive speaker ensure that you have:

- selected a suitable location (a clear, flat surface is required).
- identified the location for additional components, such as the Handset or Base station etc.
- identified the relevant cable connections and the route that the cables will take.
- removed the bezel.

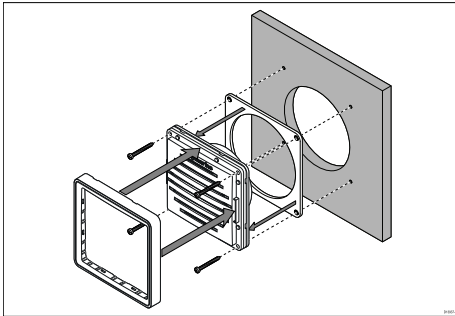

1. Using the supplied mounting template, mark the location of the cut out and fixing holes on the mounting surface.
2. Using a 89 mm (3 ½ in) hole saw, drill out the centre cut out area indicated on the mounting template.
3. Drill holes for the fixings, using a drill with a suitable sized bit.
4. Ensure that the unit fits into the removed area and then file around the cut edge until smooth.
5. Peel the backing off of the supplied gasket and place the adhesive side of the gasket onto the rear of the speaker, pressing firmly onto the flange.
6. Connect the relevant cable to the speaker.
7. Slide the speaker into place and secure using the fixings provided.
8. Fit the Bezel, ensuring it clips into place on all 4 sides.



## Chapter 4: Cables and connections

### Chapter contents

- 4.1 General cabling guidance on page 26
- 4.2 Connections overview on page 26
- 4.3 Power connection on page 27
- 4.4 Handset station connection on page 29
- 4.5 Passive speaker connection on page 30
- 4.6 NMEA 2000 / SeaTalkng® connection on page 30
- 4.7 NMEA 0183 connection on page 31
- 4.8 Loud hailer connection on page 31
- 4.9 Connecting GNSS (GPS) and VHF antennas on page 31



## 4.1 General cabling guidance

### Cable types and length


It is important to use cables of the appropriate type and length

- Unless otherwise stated use only standard cables of the correct type, supplied by Raymarine.
- Ensure that any non-Raymarine cables are of the correct quality and gauge. For example, longer power cable runs may require larger wire gauges to minimize voltage drop along the run.

### Routing cables

Cables must be routed correctly, to maximize performance and prolong cable life.

- Do NOT bend cables excessively. Wherever possible, ensure a minimum bend diameter of 200 mm (8 in) / minimum bend radius of 100 mm (4 in).



- Protect all cables from physical damage and exposure to heat. Use trunking or conduit where possible. Do NOT run cables through bilges or doorways, or close to moving or hot objects.
- Secure cables in place using tie-wraps or lacing twine. Coil any extra cable and tie it out of the way.
- Where a cable passes through an exposed bulkhead or deckhead, use a suitable watertight feed-through.
- Do NOT run cables near to engines or fluorescent lights.

Always route data cables as far away as possible from:

- other equipment and cables,

- high current carrying AC and DC power lines,
- antennae.

### Strain relief

Ensure adequate strain relief is provided. Protect connectors from strain and ensure they will not pull out under extreme sea conditions.

### Circuit isolation

Appropriate circuit isolation is required for installations using both AC and DC current:

- Always use isolating transformers or a separate power-inverter to run PC's, processors, displays and other sensitive electronic instruments or devices.
- Always use an isolating transformer with Weather FAX audio cables.
- Always use an isolated power supply when using a 3rd party audio amplifier.
- Always use an RS232/NMEA converter with optical isolation on the signal lines.
- Always make sure that PC's or other sensitive electronic devices have a dedicated power circuit.

### Cable shielding

Ensure that all cables are properly shielded and that the cable shielding is undamaged.

### Dust caps


To prevent potential water ingress, connectors not in use should be protected using the supplied dust caps.

### Connections to other equipment

Requirement for ferrites on non-Raymarine cables

If your Raymarine equipment is to be connected to other equipment using a cable not supplied by Raymarine, a suppression ferrite MUST always be attached to the cable near the Raymarine unit.

## 4.2 Connections overview

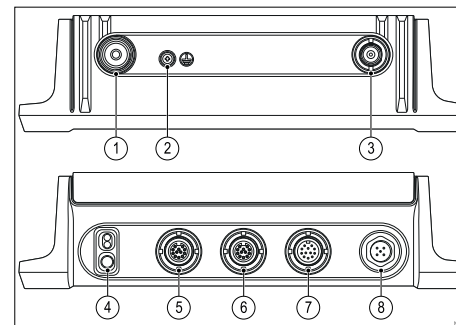

|   | Connection                    | Connects to                                                                                                              | Suitable cables                                                                                                                                                                         |
|---|-------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | GNSS (GPS) antenna connection | Passive GNSS antenna                                                                                                     | GNSS antenna's fitted cable.                                                                                                                                                            |
| 2 | Earth stud                    | <b>DO NOT CONNECT</b>                                                                                                    | N/A                                                                                                                                                                                     |
| 3 | VHF antenna connection        | VHF antenna or Splitter                                                                                                  | VHF antenna's fitted cable.                                                                                                                                                             |
| 4 | Power and data connection     | <ul style="list-style-type: none"><li>• 12 V dc power supply</li><li>• NMEA 0183 devices</li><li>• Loud Hailer</li></ul> | <ul style="list-style-type: none"><li>• Suitable power extension or circuit breaker.</li><li>• cable supplied with your NMEA 0183 device</li><li>• Loud hailer's fitted cable</li></ul> |





|   | Connection                          | Connects to                     | Suitable cables                                                               |
|---|-------------------------------------|---------------------------------|-------------------------------------------------------------------------------|
| 5 | HS 1 (Handset station 1) connection | Raymic handset or Adaptor cable | Raymic handset's fitted cable.                                                |
| 6 | HS 2 (Handset station 2) connection | Raymic handset or Adaptor cable | Raymic handset's fitted cable.                                                |
| 7 | Hub connection                      | <b>DO NOT CONNECT</b>           |                                                                               |
| 8 | N2K (NMEA 2000) connection          | SeaTalkng® / NMEA 2000 backbone | The supplied DeviceNet to SeaTalkng® adaptor cable or a DeviceNet spur cable. |

## Bare end wire connections

Your product is supplied with bare end wire connections. You must ensure that ALL bare end wires are adequately protected from short circuit and water ingress.

### Bare ended wire connections


It is recommended that bare ended wire connections are made by soldering or using crimp connectors and then protected by wrapping the connection in insulation tape.

### Unused bare ended wires

Any unused bare ended wires should be folded back and wrapped in insulation tape.

## 4.3 Power connection

The power supply should be connected as shown below:

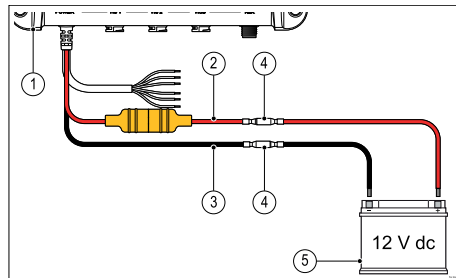

1. Base station
2. Power supply positive (+) Red wire
3. Power supply negative (-) Black wire
4. Suitable waterproof connection (Base station is supplied with bullet crimps on power supply wires.)
5. 12 V dc power source



### Warning: 12 Volt dc only

This product must only be connected to a **12 volt dc** power source.



### Warning: Positive ground systems

Do not connect this unit to a system which has positive grounding.

## In-line fuse and thermal breaker ratings

The following in-line fuse and thermal breaker ratings apply to your product:

| In-line fuse rating | Thermal breaker rating              |
|---------------------|-------------------------------------|
| 10 A                | 7 A (if only connecting one device) |

### Note:

- The suitable fuse rating for the thermal breaker is dependent on the number of devices you are connecting. If in doubt consult an authorized **Raymarine®** dealer.
- Your product's power cable may have fitted in-line fuse, if not then you can add an in-line fuse to the positive wire of your products power connection.

## Grounding

This product is grounded through the 0 V dc negative wire on the power cable and does not require a drain (shield) to be connected to the base station's ground terminal.

## Power distribution

Recommendations and best practice.

- The product is supplied with a power cable, either as a separate item or a captive cable permanently attached to the product. Only use the power cable supplied with the product. Do NOT use a power cable designed for, or supplied with, a different product.
- Refer to the *Power connection* section for more information on how to identify the wires in your product's power cable, and where to connect them.
- See below for more information on implementation for some common power distribution scenarios.





### Important:


When planning and wiring, take into consideration other products in your system, some of which (e.g. sonar modules) may place large power demand peaks on the vessel's electrical system.

### Note:

The information provided below is for guidance only, to help protect your product. It covers common vessel power arrangements, but does NOT cover every scenario. If you are unsure how to provide the correct level of protection, please consult an authorized Raymarine dealer or a suitably qualified professional marine electrician.


### Implementation — direct connection to battery

- The power cable supplied with your product may be connected directly to the vessel's battery, via a suitably rated fuse or breaker.
- The power cable supplied with your product may NOT include a separate drain wire. If this is the case, only the power cable's red and black wires need to be connected.
- If the supplied power cable is NOT fitted with an inline fuse, you MUST fit a suitably rated fuse or breaker between the red wire and the battery's positive terminal.
- Refer to the inline fuse ratings provided in the product's documentation.
- If you need to extend the length of the power cable supplied with your product, ensure you observe the dedicated *Power cable extensions* advice provided in the product's documentation.

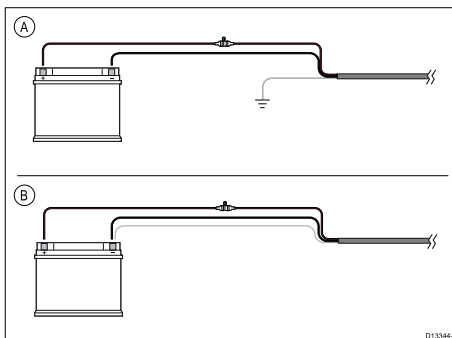


|   |                                                                                                                                                                                                                                                    |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A | Battery connection scenario A: suitable for a vessel with a common RF ground point. In this scenario, if your product's power cable is supplied with a separate drain wire then it should be connected to the vessel's common ground point.        |
| B | Battery connection scenario B: suitable for a vessel without a common grounding point. In this case, if your product's power cable is supplied with a separate drain wire then it should be connected directly to the battery's negative terminal. |

### Implementation — connection to distribution panel

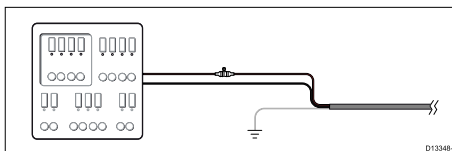

- Alternatively, the supplied power cable may be connected to a suitable breaker or switch on the vessel's distribution panel or factory-fitted power distribution point.
- The distribution point should be fed from the vessel's primary power source by 8 AWG (8.36 mm<sup>2</sup>) cable.

- Ideally, all equipment should be wired to individual suitably-rated thermal breakers or fuses, with appropriate circuit protection. Where this is not possible and more than 1 item of equipment shares a breaker, use individual in-line fuses for each power circuit to provide the necessary protection.

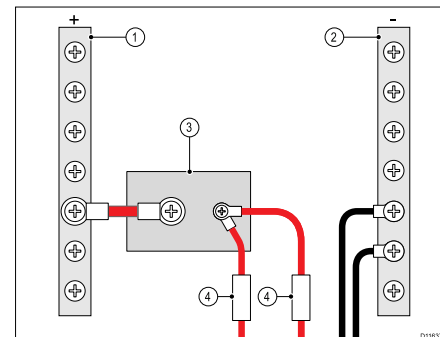

|   |                  |
|---|------------------|
| 1 | Positive (+) bar |
| 2 | Negative (-) bar |
| 3 | Circuit breaker  |
| 4 | Fuse             |

- In all cases, observe the recommended breaker / fuse ratings provided in the product's documentation.

### Important:

Be aware that the suitable fuse rating for the thermal breaker or fuse is dependent on the number of devices you are connecting.

### Power cable extension

If you need to extend the length of the power cable supplied with your product, ensure you observe the following advice:

- The power cable for each unit in your system should be run as a separate, single length of 2-wire cable





from the unit to the vessel's battery or distribution panel.

- For power cable extensions, it is recommended that a **minimum** wire gauge of 16 AWG (1.31 mm<sup>2</sup>). For cable runs longer than 15 meters, you may need to consider a thicker wire gauge (e.g. 14 AWG (2.08 mm<sup>2</sup>), or 12 AWG (3.31 mm<sup>2</sup>)).
- An important requirement for all lengths of power cable (including any extension) is to ensure that there is a continuous **minimum** voltage of 10.8 V at the product's power connector, with a fully flat battery at 11 V.

**Important:** Be aware that some products in your system (such as sonar modules) can create voltage peaks at certain times, which may impact the voltage available to other products during the peaks.

#### Grounding

Ensure that you observe any separate grounding advice provided in the product's documentation.


#### More information

It is recommended that best practice is observed in all vessel electrical installations, as detailed in the following standards:

- BMEA Code of Practice for Electrical and Electronic Installations in Boats
- NMEA 0400 Installation Standard
- ABYC E-11 AC & DC Electrical Systems on Boats
- ABYC A-31 Battery chargers and Inverters
- ABYC TE-4 Lightning Protection

## 4.4 Handset station connection

A Raymic handset can be connected to each Handset station connection (HS 1 / HS 2). Your radio is supplied with the equipment to create a full handset station (i.e.: Raymic handset, Adaptor cable and Passive speaker). Additional accessories can be purchased to create a second handset station.

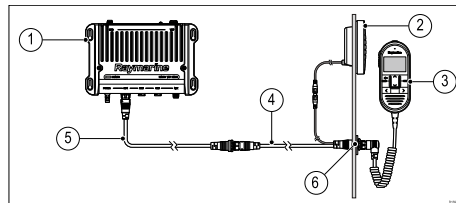

1. Base station
2. Passive speaker (1 x supplied and available as accessory: A80542)
3. Raymic handset (1 x supplied and available as accessory: A80289)
4. Handset station adaptor cable with RCA Audio (1 x supplied and available as accessory: A80297)
5. Raymic handset extension cable (Available optional accessories: A80290, A80291 or A80292)
6. Panel mount fixings kit (1 x supplied and available as a Spare: R70438)

### Connecting handsets and cables

Follow the steps below to connect handsets and extension cables together.

1. If fitted, unscrew and remove the dust cap from the relevant connector.
2. Ensure the cable connectors are correctly orientated, before insertion.
3. Ensure connectors are fully inserted, before locking..
4. Tighten locking collars by Rotating clockwise.

### Handset extension cables


Handset station cabling can be extended using approved extension cables.

The maximum length of cable from the Handset to the Base station should not exceed 50 m (164 ft)



## 4.5 Passive speaker connection

A passive speaker can be connected to a handset station using the RCA audio connector available on the Handset adaptor cable.

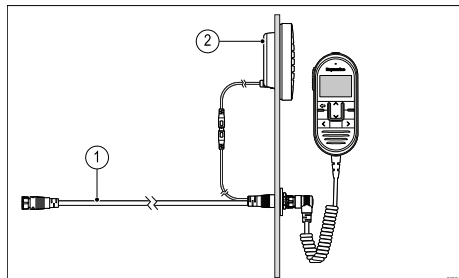


1. Raymic handset adaptor cable (1 x supplied and available as an accessory: A80297)
2. Passive speaker (1 x supplied and available as an accessory: A80542)

The Passive speaker includes a 2m (6.56 ft) audio cable terminated with a Female RCA connector.

## 4.6 NMEA 2000 / SeaTalkng® connection

Your product can transmit data to devices connected on SeaTalkng® or NMEA 2000 CAN bus networks. Connection is established using the DeviceNet connector located on the bottom of the unit.




1. Use the supplied DeviceNet to SeaTalkng® adaptor cable to connect your product to an available spur connection on a SeaTalkng® backbone.
2. Alternatively you can connect your product to a NMEA 2000 backbone using a standard DeviceNet cable (not supplied).

### Note:

1. The product must be connected to a correctly terminated backbone. You cannot connect your product directly to a MFD.
2. Refer to the instructions supplied with your SeaTalkng® / NMEA 2000 device for details on creating a backbone.

## Connecting SeaTalkng® cables

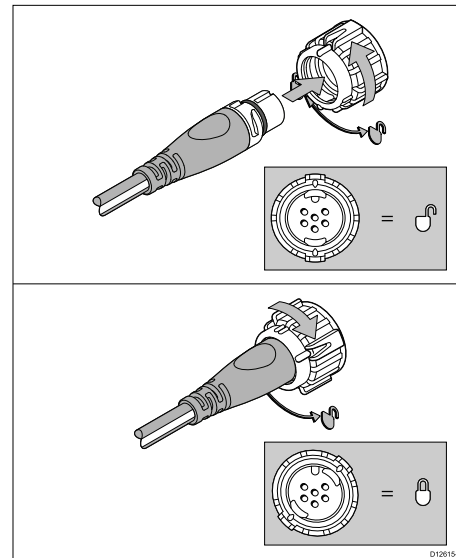


1. Rotate the locking collar on the unit to the unlocked position.
2. Ensure the cable's connector is correctly oriented.
3. Fully insert the cable connector.
4. Rotate locking collar clockwise (2 clicks) until it is in the locked position.



## 4.7 NMEA 0183 connection

The NMEA 0183 wires can be used to connect the unit to a NMEA 0183 GNSS (GPS) receiver or MFD.

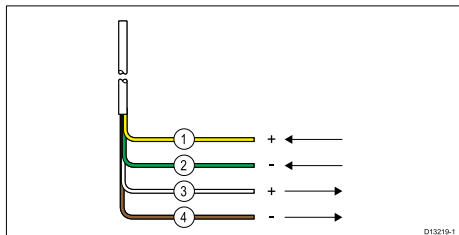


1. Yellow = Receive positive (+) wire
2. Green = Receive negative (-) wire
3. White = Transmit positive (+) wire
4. Brown = Transmit negative (-) wire

The NMEA wires should be connected to a compatible device as shown in the table below:

| NMEA 0183 wires       |    | NMEA 0183 device      |
|-----------------------|----|-----------------------|
| Receive positive (+)  | to | Transmit positive (+) |
| Receive negative (-)  | to | Transmit negative (-) |
| Transmit positive (+) | to | Receive positive (+)  |
| Transmit negative (-) | to | Receive negative (-)  |

## 4.8 Loud hailer connection

A Loud hailer (M95435) can be connected to the radio using the loud hailer wires.

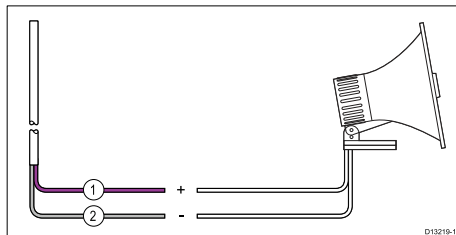

|   |                                   |
|---|-----------------------------------|
| 1 | Positive (+) hailer wire (Purple) |
| 2 | Negative (-) hailer wire (Gray)   |



## 4.9 Connecting GNSS (GPS) and VHF antennas

The radio must be connected to suitable GNSS and VHF antennas (not supplied). The antenna connections must be protected so it cannot come into contact with any grounded bare metal.

Pre-requisites:

- Ensure you have installed your antennas in accordance with the instructions supplied with the antennas.
  - Ensure the cables have been properly routed to the Base station and that sufficient cable length is available to make the connections.
1. Plug the antenna connector into the relevant antenna connection on the Base station.
  2. Secure by tightening the locking collars.



## Chapter 5: Getting started


### Chapter contents

- 5.1 Raymic handset controls on page 34
- 5.2 Powering the Base station on page 34
- 5.3 Homescreen overview on page 35
- 5.4 Shortcut list on page 37
- 5.5 Shared Brightness on page 37
- 5.6 Initial startup on page 38
- 5.7 Selecting a language on page 38
- 5.8 Switching on the AIS receiver on page 39
- 5.9 Selecting a network type on page 39
- 5.10 Entering your MMSI number on page 39
- 5.11 Entering your ATIS ID on page 40
- 5.12 Changing the radio region on page 41
- 5.13 Switching between high and low transmit power on page 41
- 5.14 GNSS (GPS) set up on page 42



## 5.1 Raymic handset controls

The Raymic handset's controls are shown below.

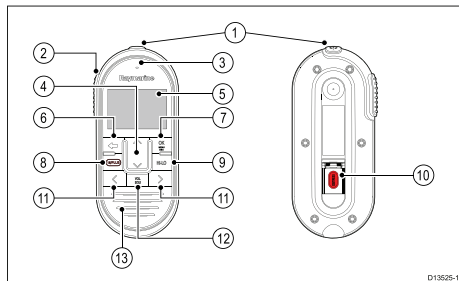

1. **Power** — Press to power the handset on. Press and hold for 3 seconds to power the handset off. Momentary press to access the shortcut list.
2. **PTT(Push to Talk)** — Press and hold to send a voice message. Release to return to receive mode.

**Note:** The maximum transmit time is limited to 5 minutes to prevent un-intentional transmissions from occupying the VHF channel.

3. **Microphone location**
4. **Volume Up and Volume Down** — Press to adjust volume or squelch up or down.
5. **LCD screen**
6. **Back** — Move back through menu options.
7. **OK / menu button** — Press button to access menu / DSC functions and to confirm selections.
8. **16 / +** — When powered on press to switch between priority channels.
9. **HI/LO** — Press to switch between High (25 W) and low (1 W) transmit power.
10. **DISTRESS** — Lift up the spring loaded cover and press this button to make a DSC distress call.

11. **Channel Up and Channel Down** — Changes the channel up or down.
12. **VOL/SQ** — Press button to switch between volume and squelch control.
13. **Built-in speaker**


## 5.2 Powering the Base station

The Base station automatically powers up when connected to a suitable power supply.

The Base station is powered down by unplugging from the power supply or, if applicable, by tripping it's circuit breaker.

### Powering the handset

With the Base station powered On and the Handset connected:

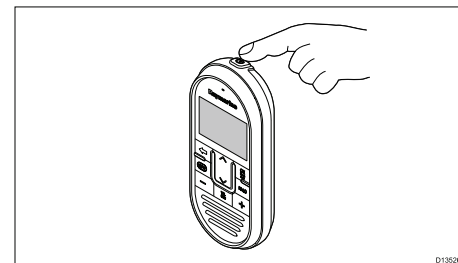


1. Press the **Power** button, located on the top of the Handset.  
The Handset will power on.
2. To power off the Handset, press and hold the **Power** button for approximately 3 seconds, until the screen turns off.



## 5.3 Homescreen overview

The information below describes the on-screen characters and symbols which the radio displays on the main screen and what they mean.

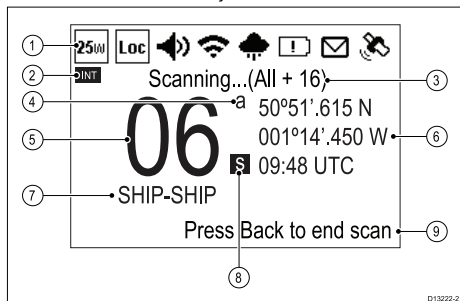

1. **Status bar** — The status bar displays symbols which indicate the current status of the unit.
2. **Frequency band** — Indicates which channel frequency band is in use:
  - USA — United States of America
  - INT — International
  - CAN — Canada
  - WX — Weather

**Note:** Special licensing is required to receive USA and Canadian channel sets.

3. **Status text** — Indicates the current radio mode e.g.: ATIS Mode active, Weather Alert, Scan mode etc.
4. **Channel suffix**
  - **a** — Indicates that the current US or Canadian channel is simplex. This channel uses the transmit frequency of the International channel for transmitting and receiving. If a channel is simplex in all 3 frequency bands (e.g. channel 06, the channel does not require the **a** suffix.
  - **b** — Indicates that the channel is a receive only channel. Used for Canadian channels only.

5. **Channel** — Indicates the current channel number.
6. **Location / Time** or **Location / COG/SOG** — Depending on selection displays Location coordinates and current time or Location coordinates and current COG and SOG.
7. **Channel Name** — Indicates the name of the current channel.
8. **Channel type** — Indicates the type of channel:
  - **s** = Simplex — Simplex channels transmit and receive on the same frequency.
  - **d** = Duplex — Duplex channels use separate frequencies to transmit and receive.
9. **Optional text** — Provides extra user guidance.

### Status bar symbols

The status bar is used to display icons that indicate the radio's status.

| Symbol | Name       | Description                                                                                                                               |
|--------|------------|-------------------------------------------------------------------------------------------------------------------------------------------|
|        | Low power  | Indicates the radio transmitters is in low power (1 watt) or high power (25 watt) mode                                                    |
|        | High power |                                                                                                                                           |
|        | Local      | Indicates the radio is in local reception mode, which decreases receiver sensitivity in high traffic areas to decrease unwanted reception |


| Symbol | Name                          | Description                                                                           |
|--------|-------------------------------|---------------------------------------------------------------------------------------|
|        | Fog horn                      | Indicates that the radio is in Fog horn mode.                                         |
|        | Transmit                      | Indicates the radio is currently transmitting (e.g. the PTT button is being pressed.) |
|        | Receive                       | Indicates the radio is currently receiving a transmission                             |
|        | Weather                       | Indicates that the weather alerts mode is activated.                                  |
|        | Power supply voltage too low  | Indicates the power supply to the radio is below the specified operating voltage      |
|        | Power supply voltage too high | Indicates the power supply to the radio is above the specified operating voltage      |



| Symbol                                                                            | Name    | Description                                 |
|-----------------------------------------------------------------------------------|---------|---------------------------------------------|
|  | DSC     | Indicates that a DSC call has been received |
|  | GPS Fix | Indicates if the radio has a GPS/GNSS fix.  |

## Main menu overview

The main menu is accessed by Pressing the **OK** button from the **Homescreen**.

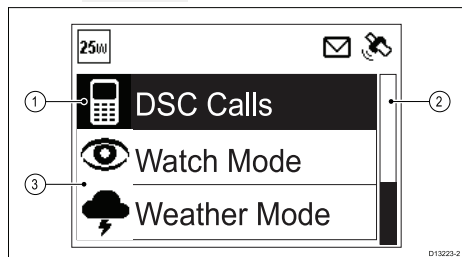

1. Currently selected menu item
2. Scroll bar
3. Menu items

The main menu includes the following items:

| Symbol                                                                            | Name           | Sub-options                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | * DSC Calls    | <ul style="list-style-type: none"> <li>• Individual call</li> <li>• Distress call</li> <li>• Position request</li> <li>• Group call</li> <li>• All ships call</li> <li>• Phonebook</li> <li>• Call logs</li> <li>• Test call</li> <li>• DSC set-up</li> </ul> |
|  | * Watch Mode   | <ul style="list-style-type: none"> <li>• Dual watch</li> <li>• Triple watch</li> <li>• 2nd priority channel</li> </ul>                                                                                                                                        |
|  | * Weather Mode | <ul style="list-style-type: none"> <li>• Weather Homescreen</li> </ul>                                                                                                                                                                                        |
|  | * Scan Mode    | <ul style="list-style-type: none"> <li>• All channels</li> <li>• All channels + 16</li> <li>• Saved channels</li> <li>• Saved channels + 16</li> <li>• Edit saved channels</li> </ul>                                                                         |

| Symbol                                                                              | Name                 | Sub-options                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | ** Hail/Fog/Intercom | <ul style="list-style-type: none"> <li>• Hailer</li> <li>• Fog horn</li> <li>• Intercom</li> </ul>                                                                                                                                                                                                                                                                |
|  | ** Hailer/Fog horn   | <ul style="list-style-type: none"> <li>• Hailer</li> <li>• Fog horn</li> </ul>                                                                                                                                                                                                                                                                                    |
|  | ** Intercom          | <ul style="list-style-type: none"> <li>• Intercom</li> </ul>                                                                                                                                                                                                                                                                                                      |
|  | Set-up               | <ul style="list-style-type: none"> <li>• Display set-up</li> <li>• Language</li> <li>• Units</li> <li>• Power output</li> <li>• Sensitivity</li> <li>• Key beep</li> <li>• Channel set-up</li> <li>• Weather alerts</li> <li>• GPS set-up</li> <li>• DSC set-up</li> <li>• AIS</li> <li>• Network output</li> <li>• ATIS set-up</li> <li>• Maintenance</li> </ul> |




#### Note:

\* Menu items not available when radio has ATIS enabled or if the radio has been pre-programmed in MARCOM-C mode.

\*\* The menu name and sub-options depend on the peripheral devices connected to the radio.

## 5.4 Shortcut list

Pressing the **Power** button once while the radio is switched on will open the **Shortcuts list**. The Shortcuts list can be used to adjust the brightness, contrast and access frequently used functions.

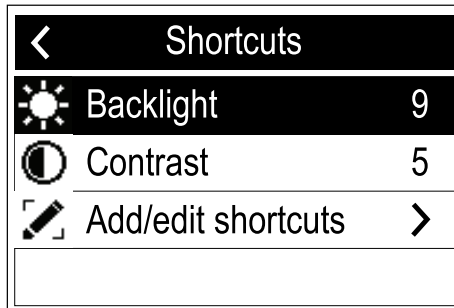

Frequently used functions can be added by selecting **Add/edit shortcuts**.

### Adjusting Brightness and Contrast

The LCD Brightness (Backlight) and Contrast can be adjusted using the Shortcuts list.

From any screen:

1. Press the **Power** button.
2. Select **Backlight** or **Contrast**.
3. Use the **Rotary knob** to adjust the Backlight or Contrast to the desired level.
4. Press the **Back** button to return to the previous screen.

The Backlight and Contrast settings can also be accessed from the Display set-up menu: **Menu > Set-up > Display set-up**.


## 5.5 Shared Brightness

You can set up Shared Brightness groups which enables simultaneous brightness adjustment of all units that are part of the same group.

The following products are compatible with Shared Brightness:

- LightHouse™ or LightHouse™ 2 powered MFDs.
- SeaTalkng® Instrument displays and Pilot controllers.
- SeaTalkng® VHF DSC Radios.

Any adjustments to the Shared Brightness level will be reflected on all units assigned to the same group.

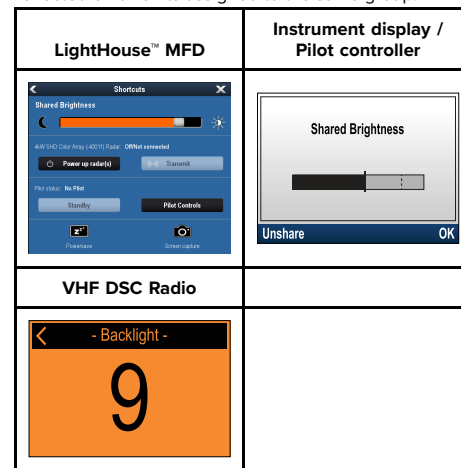

Multiple brightness groups can be configured. These groups could be used to reflect the physical location of units on your vessel. For example, the units at your helm can be set to one group, and the units on the flybridge can be set to a different group.

Shared Brightness requires:

- all units to be compatible with the Shared Brightness function (see list of compatible units above).



- the **Share brightness** setting set to On for all units in the brightness group.
- units to be assigned to Network Groups.
- all the displays in that group to be synchronized.

## Enabling Shared Brightness

From the **Display Set-up** menu: (**Menu > Set-up > Display Set-up**).

1. Select **Shared Brightness**.
2. Select **Shared Brightness** again to enable Shared Brightness.

*If Shared Brightness is already enabled then selecting this menu item will disable Shared Brightness.*

3. Select **Group**.
4. Select the group that you want to assign the radio to.

Adjusting the Brightness setting will now change the brightness of all products assigned to that group.

## 5.6 Initial startup

Unless your radio has been pre-programmed; the first time you power-up your radio you will be requested to select certain options. With the exception of your MMSI and ATIS ID, you will also be requested to enter these options after a factory reset.

After acknowledging the startup screen, unless previously set you will be prompted to make the following selections:

1. **Language selection** — See [5.7 Selecting a language](#) for available languages.
2. **Turn on AIS reception (Ray70 and Ray91 only)** — Enables the built-in AIS receiver. This step is only applicable to radios with a built-in AIS receiver. See [5.8 Switching on the AIS receiver](#) for more information.
3. **Select network type** — Selects which connection to transmit AIS and DSC information on, to connected equipment. This step is only applicable if the AIS receiver was turned on in the previous step. See [5.9 Selecting a network type](#) for available options.
4. **Enter MMSI number** — Required to enable DSC functions. This option is not required after a factory reset, or if the radio has been pre-programmed in MARCOM-C mode, or has ATIS enabled. See [5.10 Entering an MMSI number](#) for more information. If not already selected you will also be prompted to select your network type.
5. **Enter ATIS ID** — Required when the radio will be used in the inland waterways of Europe. This step is only applicable if the radio has been pre-programmed in MARCOM-C mode. See [5.11 Entering an ATIS ID](#) for more information.
6. **Frequency band selection** — Sets the relevant channels for your region. This step is not applicable if the radio has been pre-programmed in MARCOM-C mode. See [5.12 Changing the radio region](#) for more information.

## 5.7 Selecting a language

The language the radio uses can be changed.

From the Main menu:

1. Select **Set-up**.
2. Select **Language**.

*The languages available are:*

- **English (default)** — English
- **Español** — Spanish
- **Français** — French
- **Deutsch** — German
- **Italiano** — Italian

3. Select the language that you want the radio to be set to.

The User interface language is changed to the selected language.



## 5.8 Switching on the AIS receiver

If your radio includes a built-in AIS receiver then it can be enabled and disabled as follows:

From the Main menu:

1. Select **Set-up**.
2. Select **AIS**.
3. Select **On** to switch the receiver on, or select **Off** to switch the receiver off.

## 5.9 Selecting a network type

When connecting your radio to other devices it is important to ensure you select the network connection and type that you want data to be transmitted over.

From the Main menu:

1. Select **Set-up**.
2. Select **Network output**.

*The following network types are available:*

- *NMEA 2000 (default)*
- *0183 High speed*
- *0183 Std speed*

3. Select the network type relevant to the devices connected to your radio. If your radio is not connected to any other devices any option can be selected.


*Selecting **0183 Std speed** will disable the built-in AIS receiver, where applicable.*

The **Network output** setting determines the baud rate of the NMEA 0183 input:

| Network output setting   | NMEA 0183 input baud rate |
|--------------------------|---------------------------|
| NMEA 2000                | Standard speed (4,800)    |
| NMEA 0183 High Speed     | High speed (38,400)       |
| NMEA 0183 Standard Speed | Standard speed (4,800)    |

## 5.10 Entering your MMSI number

To program your radio with your MMSI number follow the steps below.

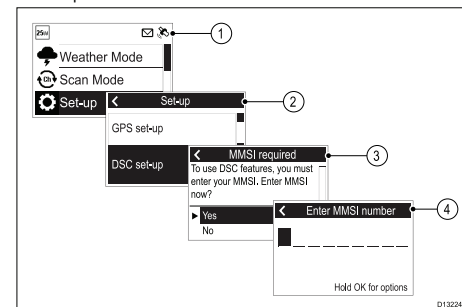

From the Set-up menu: (**Menu > Set-up**)

1. Select **DSC set-up**.
2. Select **MMSI**.

*The **MMSI required** message will be displayed if no MMSI number has been set.*

3. Select **Yes**.
4. Use the **Rotary knob** to cycle through the available numbers and press **OK** to confirm each number and move to the next digit.

**You should only enter the unique 9 digit MMSI number provided by your licensing authority.**

*MMSI numbers starting with a '0' are only used for groups and coast stations. If you enter a '0' as the first digit the radio will assume you are entering a coast station MMSI and automatically assign a '0' as the second digit; this is to ensure a group MMSI is not entered as the radio's unique MMSI.*

5. Press the **Back** button at any time to edit digits you have already entered.
6. Press and hold the **OK** button to display options to **Move cursor** back and forward through the digits.



7. When the final digit is confirmed select **DONE**.

**Example**

8. The MMSI is displayed onscreen, check that it is correct, then:
- Select **Yes – Save**, or
  - if the number entered is not correct select **No – Retry**.


**Caution: MMSI and ATIS ID entry**

You can only enter the MMSI number and ATIS ID once!

If you store an incorrect MMSI number or ATIS ID in your product, it will have to be reset by an authorized **Raymarine®** dealer.

## 5.11 Entering your ATIS ID

A unique ATIS ID must be entered before ATIS mode can be enabled.

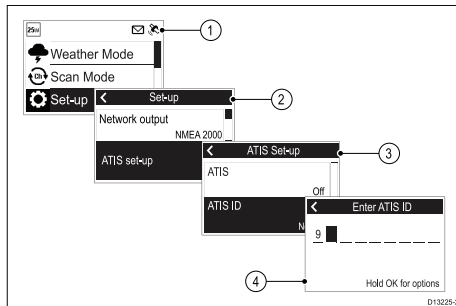

From the Main menu.

- Select **Set-up**.
- Select **ATIS set-up**.
- Select **ATIS ID**.

***Not set** will be displayed if no ATIS ID has been set. The first digit is set to a '9' and cannot be changed, this is because all ATIS IDs start with a '9'.*

*As most ATIS IDs consist of a '9' followed by your 9 digit MMSI number; if your radio already has an MMSI number the ATIS ID will be pre-filled in this format.*

- If the ATIS ID has been pre-filled, check it carefully against your issued ATIS ID.
- To enter your ATIS ID manually, use the **Rotary knob** to cycle through the available numbers and press **OK** to confirm each number and move to the next digit.

***You should only enter the unique 10 digit ATIS ID provided by your licensing authority.***

- Press the **Back** button at any time to edit digits you have already entered.
- Press and hold the **OK** button to display options to **Move cursor** back and forward through the digits.

8. When the final digit is confirmed select **DONE**.

**Example**

9. The ATIS ID is displayed onscreen, check that it is correct, then:
- Select **Yes – Save**, or
  - if the number entered is not correct select **No – Retry**.

**Caution: MMSI and ATIS ID entry**

You can only enter the MMSI number and ATIS ID once!

If you store an incorrect MMSI number or ATIS ID in your product, it will have to be reset by an authorized **Raymarine®** dealer.

## Enabling and disabling ATIS mode

ATIS is a European system used on some inland waterways. A unique ATIS ID must be entered to use ATIS mode.

With ATIS mode enabled the radio's region will be fixed to the INT (international) frequency band and the following functions are disabled:

- DSC functions
- Watch Mode
- Scan Mode





- High/low power is restricted on certain channels

From the Main menu.

1. Select **Set-up**.
2. Select **ATIS set-up**.
3. Select **ATIS**.


If no ATIS ID has been set then you will be requested to enter one before ATIS mode is enabled refer to [5.11 Entering your ATIS ID](#) for instructions.

4. If an ATIS ID has already been set then select **On** to enable ATIS mode or **Off** to disable ATIS mode.

## 5.12 Changing the radio region

Prior to using the radio you must set the Frequency band to the region your radio will be used in.


From the Main menu:

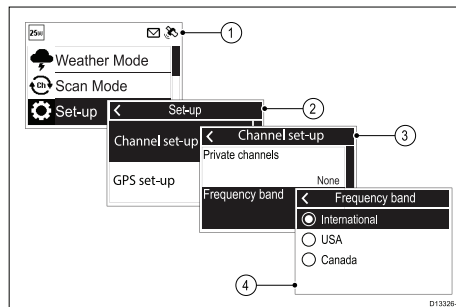

1. Select **Set-up**.
2. Select **Channel set-up**.
3. Select **Frequency band**.
4. Select the relevant region from the list.

*The available options are:*

- **International**
- **USA**
- **Canada**

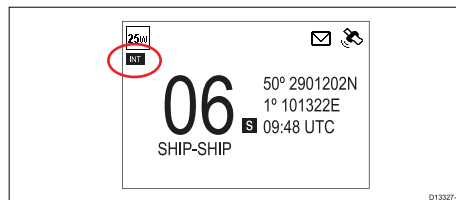

An icon is displayed on the Homescreen that identifies which region has been set.

## 5.13 Switching between high and low transmit power

You can switch between high (25 W) and low (1 W) transmit power using the HI/LO button on the Fismic.

The transmit power can also be changed from the **Set-up** menu: **Menu > Set-up**

1. Select **Power output**.
2. Select **Low** for 1 W transmit power, or
3. Select **High** for 25 W transmit power.



## 5.14 GNSS (GPS) set up

If your radio includes an internal GNSS (GPS) receiver or if your radio is connected to a receiver over NMEA 0183 or SeaTalkng®, the radio can display relevant position information.

The following information can be displayed:

- latitude
- longitude
- UTC time
- COG and SOG

When position data is available the satellite icon is displayed onscreen.

If no position data is available then the latitude, longitude and time can be entered manually so that it can be included in DSC distress transmissions.

Position data received from other vessels can be displayed on a connected Raymarine® multifunction display.

### Enabling and disabling the internal GNSS (GPS)

From the **GPS set-up** menu: **Menu > Set-up > GPS set-up**

1. Select **Internal GPS**.

Selecting **Internal GPS** will switch the internal GNSS (GPS) receiver On and Off.

### No GPS position data

If no GPS data is available or GPS data becomes unavailable; after 10 minutes an audible warning is sounded, the GPS icon flashes and the **No position data** message is displayed.

Once the warning has been acknowledged the GPS icon will continue to flash. The **No position data** warning is repeated every 4 hours if position data is still unavailable, has not been entered manually or has been entered manually but over 23.5 hours ago.

If position data has been entered manually the display alternates between displaying the manual position and time and the **Manual Position** message. if the manually

entered position has not been updated in the last 4 hours the GPS icon flashes and an audible warning is sounded. This warning will be repeated every 4 hours until position is manually updated or GPS position data becomes available.

Where no position data is available or has not been manually updated for 23.5 hours then position data will change to '9's and time will change to '8's.

### Entering position manually

If GPS position data is not available it can be entered manually.

From the **GPS set-up** menu: **Menu > Set-up > GPS set-up**.

1. Select **Set manual position**.

*The Manual position screen requires you to input latitude, longitude and UTC time.*

2. Use the **Rotary knob** to cycle through the available numbers and press **OK** to confirm each number and move to the next digit.
3. When the relevant information has been entered select **OK** to confirm the details.

### Selecting GPS information to display

You can change the GPS data that is displayed on the Homescreen.

From the **GPS set-up** menu: **Menu > Set-up > GPS set-up**.

1. Select **Homescreen display**.
2. Select the required option:

- *Location & time*
- *Location & COG/SOG*

The **Homescreen display** option is also available from the **Display set-up** menu

## Setting time format and offset

You can change the Format and Offset that is applied to the time displayed onscreen.

From the **Units** menu: **Menu > Set-up > Units**.

1. Select **Time format**.
2. Select the desired format:
  - 12 hour
  - 24 Hour (default)
3. Select **Time offset**.
4. Adjust the offset to the desired value using the **Rotary knob** or the **Channel Up** and **Channel Down** buttons.
5. Select **OK** to confirm the selection.





## Chapter 6: Digital selective calling (DSC)

### Chapter contents

- 6.1 Digital Selective Calling (DSC) on page 44
- 6.2 Distress calls on page 45
- 6.3 Urgency calls on page 47
- 6.4 Safety calls on page 48
- 6.5 Individual (routine) calls on page 48
- 6.6 Group calls on page 49
- 6.7 Position requests on page 49
- 6.8 Phonebook on page 50
- 6.9 Call logs on page 51
- 6.10 Test calls on page 51
- 6.11 DSC set-up menu options on page 52



## 6.1 Digital Selective Calling (DSC)

Traditional VHF radio systems require users to listen until someone speaks, and then determine whether the call is for them. DSC ensures that calls are received by alerting or announcing the intended recipient(s) first so they are ready to listen to the subsequent message on the relevant channel.

DSC is part of the Global Maritime Distress and Safety System (GMDSS), a maritime communications system for emergency and distress messages and all types of routine communications such as ship-to-ship or ship-to-shore.

DSC is a digital signalling system, which operates on VHF channel 70. DSC calls include other data such as your vessel's identification number, purpose of the call, your position and the channel you want to speak on.

DSC calls can be divided into 4 categories and are prioritized as shown below:

1. Distress
2. Urgency
3. Safety
4. Routine

### Distress

A Distress call should only be used when there is imminent danger to a vehicle or person that requires immediate assistance.

When making a distress call the following information is transmitted to all stations within range:

- Vessel MMSI number.
- Vessel position (must be input manually if no GPS position data is available).
- Local time (must be input manually if no GPS position data is available).
- Nature of the distress (when designated).
- Transmission frequency.

The call is automatically repeated at approximately 4 minute intervals until it is acknowledged either by a coast radio station (CRS) or a vessel within radio range. Distress calls must be followed by a MAYDAY call on priority channel 16.

### Urgency

An urgency call should be used when there is danger to a vehicle or person that does not require immediate assistance.

When making an urgency call the following information is transmitted to all stations within range:

- Vessel MMSI number.
- Vessel position (must be input manually if no GPS position data is available).
- Local time (must be input manually if no GPS position data is available).
- Transmission frequency.

Once an urgency call is sent it must be followed with a PAN PAN voice message on channel 16 and include the necessary details.

### Safety

A safety call should be used when there is an important navigational warning or meteorological forecast/broadcast. Safety alerts can also be used for communications during search and rescue operations.

When making a safety call the following information is transmitted to all stations within range:

- Vessel MMSI number.
- Vessel position (must be input manually if no GPS position data is available).
- Local time (must be input manually if no GPS position data is available).
- Transmission frequency.

Once a safety call is sent it must be followed with a SECURITE voice message on channel 16 and include the necessary details.

### Routine calls

Routine calls are used for contacting other vessels, marinas, or shore stations.

Routine calls are made on channel 70 using the dedicated Maritime Mobile Service Identity (MMSI) number of the station to be contacted, selecting a VHF working channel and sending the call. Both radios automatically switch to the chosen channel for conversation.

Routine calls can also be made to groups — When groups of ships need the same information (yacht races, club rallies etc.) a special group-call identity can be used to enable restricted broadcast calls.

**Note:** To transmit precise positions, the radio must be interfaced to a GPS receiver. Otherwise, regular manual position updating is required.



## 6.2 Distress calls

### Making a designated distress call

When making a Distress call you can specify the nature of the distress, if GPS data is not available you must also specify your coordinates.

**Note:** Your radio must have an MMSI number saved before DSC functions can be used.

From the Distress call menu: **Menu > DSC Calls > Distress calls**

1. Select a distress type from the list.

- Undesignated
- Fire
- Flooding
- Collision
- Grounding
- Listing
- Sinking
- Adrift
- Abandoning
- Piracy
- Man overboard


If your radio has a GPS fix then the distress type and coordinates are displayed, otherwise you will be prompted to enter your position coordinates.

2. If prompted, enter your position coordinates and local time using the **Rotary knob** or the **Channel Up** and **Channel Down** buttons to enter the relevant details.
3. When complete press the **OK** button.
4. Follow the steps for Making a Distress Call to transmit the distress alert.

### Making a distress call

In an emergency you can use your unit to make an automatic DSC distress call.

With the spring loaded cover open:

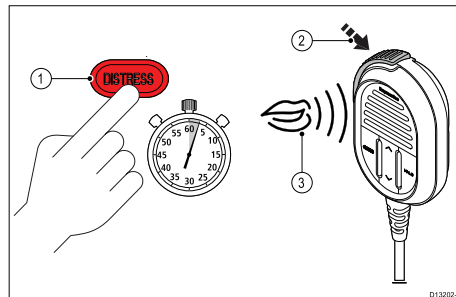

1. Press and hold the **DISTRESS** button for 3 seconds.

*Once the **DISTRESS** button is pressed a 3 second count down will begin, when the count down reaches zero the DSC distress call is transmitted.*

*The distress call is repeated automatically until it is acknowledged.*

2. Press and hold the **PTT** button, then slowly and clearly speak the details of the distress in the following format:

**MAYDAY, MAYDAY, MAYDAY**

**This is** <state name of vessel 3 times>

**MAYDAY** <state name of vessel 1 time>

**My position is** <state latitude and longitude, or true bearing and distance from a known point.>

**I am** <state nature of distress e.g. sinking, on fire etc.>

**I have** <state number of persons on board and any other information — drifting, flares fired etc.>

### I REQUIRE IMMEDIATE ASSISTANCE

#### OVER

3. Release the **PTT** button.

### Making a Mayday call

In an emergency you can use your unit to make a Mayday call.

1. Press the **16 PLUS** button.
2. Press and hold the **PTT** button.
3. Slowly and clearly speak the details of the distress:

**MAYDAY, MAYDAY, MAYDAY**

**This is** <state name of vessel 3 times>

**MAYDAY** <state name of vessel 1 time>

**My position is** <state latitude and longitude, or true bearing and distance from a known point.>

**I am** <state nature of distress e.g. sinking, on fire etc.>

**I have** <state number of persons on board and any other information — drifting, flares fired etc.>

### I REQUIRE IMMEDIATE ASSISTANCE

#### OVER

4. Release the **PTT** button.
5. If an acknowledgement is not received then repeat steps 2 to 4 above.

### Cancelling a distress call before transmission

To cancel a distress call before it is transmitted follow the steps below:


1. Release the **DISTRESS** button before the countdown timer completes.

When the button is released you will be returned to normal operation.



## Cancelling a distress call after transmission


A distress call can be cancelled after it has been transmitted.

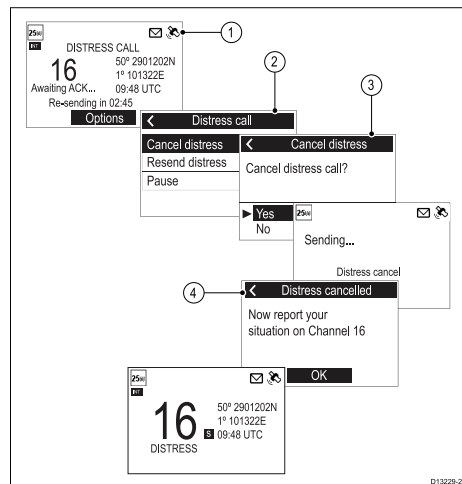

1. Select **Options**.
2. Select **Cancel distress**.
3. Select **Yes** to confirm cancellation.
4. Select **OK**.
5. Press and hold the **PTT** button and make a broadcast to all stations giving your vessel's name, call sign and MMSI number and cancel the false distress alert

Example: "All, Stations, All Stations, All Stations. This is <NAME>, <CALL SIGN>, <MMSI ID>, <POSITION>."

Cancel my distress alert of <DATE>, <TIME>, <NAME>, <CALL SIGN>"

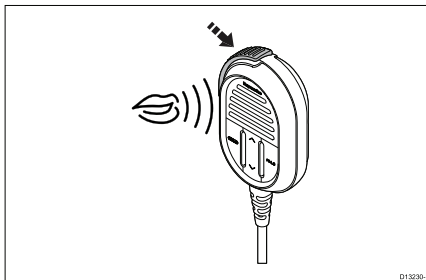


6. Repeat the broadcast described in step 5.

## Receiving a distress call

It is expected that only a Coast Radio Station (CRS) will acknowledge DSC distress calls and will act as the coordinator for the rescue operation.

When a distress call is received an alarm is sounded at full volume and the LCD displays information relating to the distress.

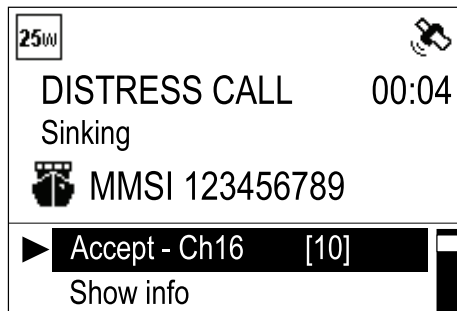

If the **Auto channel change** function is enabled; 10 seconds after receipt of a distress call the radio will automatically re-tune to channel 16. Otherwise the user is prompted to change channel manually.

The details of the distress call are recorded in the distress log and the envelope icon will flash to let you know a message has been received. When connected to a **Raymarine**® multifunction display (**MFD**) the position data from the distress call can also be displayed in the Chart application.

When the received distress call is acknowledged by the CRS or by another station the radio will resume normal operation.

## Ignoring a distress call

You can ignore a distress call by muting the alarm and cancelling the distress call screen.

If your radio is already tuned to the priority channel then the **Ignore** option will not be available.

With an incoming distress call displayed.

1. Select **Ignore** from the options displayed.
- Normal operation is resumed.

## Acknowledging a distress call

Distress calls must only be acknowledged if the call continues without acknowledgement from a CRS, you are close enough to the distressed vessel to be of assistance and are prepared to relay the distress to a CRS by any means possible. Class D DSC radios are forbidden from automatically acknowledging distress calls. Acknowledgement must only be made by voice message on channel 16.

After receiving a distress call that has gone unanswered:

1. Switch to channel 16 to listen for the distress voice message.
2. Wait for the CRS to acknowledge the call.
3. If the distress call is not acknowledged by another station then acknowledge the call as follows:

**MAYDAY**

(MMSI of the vessel in distress)

**Name of vessel in distress** <repeated 3 times>

**Call sign of the vessel in distress**

**This is** <MMSI of your vessel>, <name of your vessel repeated 3 times> <call sign of your vessel>





#### RECEIVED MAYDAY

4. You **MUST** then notify the shore authorities by any means possible to relay the distress call.

### Manually relaying a distress call

A distress relay should only be sent if: the person or vehicle in distress is unable to transmit the distress call itself, for example red flares sighted at night or the person or vehicle in distress is out of range of a CRS and you have already acknowledged the distress by voice message. You can also relay a received distress relay alert manually if it goes unanswered.

1. Switch to channel 16
2. Slowly and clearly speak the details of the distress:

#### MAYDAY RELAY, MAYDAY RELAY, MAYDAY RELAY

**This is** <MMSI of your vessel, name of your vessel repeated 3 times and your call sign>

**Received the following MAYDAY from** <MMSI of vessel in distress, name of vessel in distress, call sign of vessel in distress>

#### Message begins

**Message received from vessel in distress or details of the distress**

**Message ends**

**OVER**

### Distress relays sent by other stations

When a Coast Station or another vessel, has received, and acknowledged a DSC distress alert it may transmit a distress alert relay to other vessels in the immediate area.

Distress relays sent from other stations can be received by the radio.

The radio cannot re-send a distress relay automatically. If required you can relay a distress relay message manually.

If a distress relay is sent specifically to the radio then it can be acknowledged, otherwise acknowledgement is not required.

Digital selective calling (DSC)

#### Acknowledging a distress relay sent to your vessel

If a distress relay is specifically sent to your vessel this will be because the sender deems you to be in a position to assist in the rescue. The distress relay information is displayed onscreen.

When a distress relay is received:

1. Select **Show info** from the options to review the relevant details.
2. If the distress relay was sent individually to you, select **Accept** to send a distress relay acknowledgement.
3. Ensure the radio is tuned to channel 16.

**Note:** Distress relay calls can only be acknowledged automatically when sent individually to you.

## 6.3 Urgency calls

### Making an urgency call

An urgency call should be used when there is danger to a vehicle or person that does not require immediate assistance. Urgency calls are transmitted to all stations.

From the **All ships call** menu: **Menu > DSC Calls > All ships call**.

1. Select **Urgency**.
2. Select the channel for subsequent communication.  
The call is transmitted. Once the call has been successfully transmitted '**Sent**' is displayed onscreen and the channel is changed to the specified channel.
3. Press the **OK** button.
4. Press and hold the **PTT** button and speak the following message:

**PAN PAN, PAN PAN, PAN PAN**

**ALL STATIONS, ALL STATIONS, ALL STATIONS**

**This is** <MMSI of your vessel, name of your vessel repeated 3 times, call sign of your vessel>

**Position** <Your vessel's position>

**Reason for call** <State the reason for the call and include all information which will assist in the rescue.

**OVER**

### Receiving an urgency call

When an urgency call is received:

1. Select **Show info** from the options to review relevant call details.
2. Select **Accept** at any time to accept the call.

*If auto channel change is turned on then the channel will automatically change after 10 seconds.*

The radio is re-tuned to the specified channel.

3. Listen for the urgency call message.





## 6.4 Safety calls

### Making a safety call

Safety calls should be used when there is an important navigational warning or meteorological forecast/broadcast. Safety alerts can also be used for communications during search and rescue operations.

From the **All ships call** menu: **Menu > DSC Calls > All ships call**.

1. Select **Safety**.
2. Select the channel for subsequent communication.  
The call is transmitted. Once the call has been successfully transmitted '**Sent**' is displayed onscreen and the channel is changed to the specified channel.

3. Press the **OK** button.

4. Press and hold the **PTT** button and speak the following message:

**SECURITE, SECURITE, SECURITE**

**ALL STATIONS, ALL STATIONS, ALL STATIONS**

**This is** <MMSI of your vessel, name of your vessel repeated 3 times, call sign of your vessel>

**Position** <Your vessel's position>

**Reason for call** <state the reason for the safety call>

**OUT**

### Receiving a safety call

When a safety call is received:

1. Select **Show info** from the options to review relevant call details.
2. Select **Accept** at any time to accept the call.

*If auto channel change is turned on then the channel will automatically change after 10 seconds.*

The radio is re-tuned to the specified channel.

3. Listen for the safety call message.

## 6.5 Individual (routine) calls

Individual calls can be made to contacts saved in your phonebook or to any station by manually entering an MMSI number.

**Note:** When calling a coast station there is no need to select a channel for communication.

If a call cannot be accepted then a reason code is displayed.

| No Reason   | No reason given                         |
|-------------|-----------------------------------------|
| Congestion  | Congestion at maritime switching centre |
| Busy        | Station Busy                            |
| Queue       | Queue indication                        |
| Barred      | Station barred                          |
| No operator | No operator available                   |
| Unavailable | Operator temporarily unavailable        |
| Disable     | Equipment disabled                      |
| Unable Ch   | Unable to use proposed channel          |
| Unable mode | Unable to use proposed mode             |

### Making a routine DSC call

From the **Individual Call** menu: **Menu > DSC Calls > Individual Call**.

1. Select **Phonebook** to make a routine call to a contact saved in your Phonebook, or
2. Select **Recent Calls** to make a routine call to a contact that you have called recently, or
3. Select **Enter MMSI** to manually enter the MMSI number of the station you want to contact.
4. Select a contact or enter an MMSI manually and press the **OK** button.
5. Select the Channel you want to transmit the call on.

*If the MMSI is a CSR then the radio will automatically tune to the correct Channel. The radio will wait for an acknowledgement to be received.*

6. If an acknowledgement is received, press the **OK** button.
7. Press and hold the **PTT** button and speak your message.
8. Release the **PTT** button when you have completed your message.

### Receiving an individual (routine) call

With an incoming individual call displayed:

1. Select **Show info** from the options to review relevant call details.
2. Select **Reply on Ch ##** at any time to accept the call.

*If auto channel change is turned on then the channel will automatically change after 10 seconds.*

The radio is re-tuned to the specified channel.

3. To reject the call, select **Reject**.
4. If you rejected the call, select a reason for the rejection from the list.

Confirmation of the acceptance or rejection of the call is displayed. If you have accepted the call then the radio will re-tune to the requested channel.





## 6.6 Group calls

Group calls can be made to groups of vessels sharing the same Group MMSI numbers.

Group calls are made by selecting a saved group contact from the **Phonebook** or by entering the Group MMSI number for the group you want to call.

### Making a group call

From the **Group Call** menu: **Menu > DSC Calls > Group Call**.

1. Select **Phonebook** to make a call to a group saved in your Phonebook, or
2. Select **Recent Calls** to make a call to a group that you have called recently, or
3. Select **Enter MMSI** to manually enter the MMSI number of the group you want to contact.
4. Select a group or enter an MMSI manually and press the **OK** button.
5. Select the Channel you want to transmit the call on.

*The radio will wait for an acknowledgement to be received.*

6. If an acknowledgement is received, press the **OK** button.
7. Press and hold the **PTT** button and speak your message.
8. Release the **PTT** button when you have completed your message.

### Receiving a group call

**Note:** To receive a call made to a Group, the Group's MMSI number must be saved in your phonebook.

With an incoming group call displayed:

1. Select **Show info** from the options to review relevant call details.
2. Select **Reply on Ch ##** at any time to accept the call.

Digital selective calling (DSC)

*If auto channel change is turned on then the channel will automatically change after 10 seconds.*

The radio is re-tuned to the specified channel.

3. To reject the call, select **Reject**.
4. If you rejected the call, select a reason for the rejection from the list.

Confirmation of the acceptance or rejection of the call is displayed. If you have accepted the call then the radio will re-tune to the requested channel.

## 6.7 Position requests

The radio can request position information from any station capable of responding to the request.

Position requests can be sent to any contact stored in the **Phonebook** or by manually inputting the station's MMSI number.

When connected to a **Raymarine®** multifunction display the position data from the request can also be display in the Chart application.

### Making a position request

You can request the position of another station.

From the **Position Request** menu: **Menu > DSC Calls > Position Request**.

1. Select **Phonebook** to request the position of a contact saved in your Phonebook, or
2. Select **Recent Calls** to request the position of a contact that you have called recently, or
3. Select **Enter MMSI** to manually enter the MMSI number of the station that you want to request the position of.
4. Select a contact or enter an MMSI manually and press the **OK** button.

The position request is sent. When a response is received the position of the contact is displayed.

### Responding to a position request

With a Position request displayed:

1. Select **Send position** to respond with your current location, or
2. Select **Cancel** to ignore the request.
3. If the position reply is set to manual then select **SEND** to send the position report.
4. Select **OK** to resume normal operation.

If the **Position requests** setting, found in the **GPS set-up** menu is set to **Auto accept** then the response is sent automatically.





## Setting automatic response to position requests

You can configure your radio to respond to incoming position requests automatically.

From the **DSC set-up** menu: **Menu > Set-up > DSC set-up**

1. Select **Position requests** to switch between Manual accept (default) and Auto accept.

## 6.8 Phonebook

The phonebook can be used to save up to 100 contacts.

You can add, edit and delete contacts stored in the phonebook.

### Adding a phonebook entry

You can save contacts in the phonebook by entering their MMSI and assigning a name to the contact.

From the **DSC Calls** menu: **Menu > DSC Calls**.

1. Select **Phonebook**.
2. Select **Add new**.
3. Select the type of contact.
  - Vessel
  - Group
  - Coast station
4. Use the **Rotary knob** to cycle through the available numbers and press **OK** to confirm and move to the next digit.
5. Press the **OK** button to confirm the MMSI.
6. Use the **Rotary knob** to cycle through the available characters and press **OK** to confirm and move to the next character.

*The maximum length for contact names is 10 characters.*

7. If the Contact name is less than 10 characters, press and hold the **OK** button and select **Save**.
8. Press the **Back** button at any time to edit characters you have already entered.
9. Press and hold the **OK** button and select **Move cursor** to edit an existing character.
10. When complete press the **OK** button to return to the Phonebook.

### Editing a phonebook entry

From the **DSC Calls** menu: **Menu > DSC Calls**.

1. Select **Phonebook**.
2. Select the contact you want to edit.
3. Select **Edit name** or **Edit MMSI**  
The contact's MMSI or name is displayed.
4. Use the **Rotary knob** to change a character.
5. Press the **OK** button to confirm each character and move to the next.
6. When you have completed your changes press the **OK** button again to save the changes.

### Deleting a phonebook entry

From the **DSC Calls** menu: **Menu > DSC Calls**.

1. Select **Phonebook**.
2. Select the contact you want to edit.
3. Select **Delete**.
4. Select **Yes**.

The contact is deleted.



## 6.9 Call logs

All DSC calls are logged.

The following call types are recorded in call logs:

- distress
- distress relay
- distress acknowledgements
- sent position requests
- received position requests
- group calls
- all ship calls
- individual routine calls

The details below are recorded for each call:

- MMSI number(s) (If a call is relayed up to 3 MMSI numbers can be recorded.)
- type of call
- date and time of call
- latitude and longitude (if sent with the call)
- nature of distress (specified distress calls only)

If the call was received from a contact in the phonebook then the contact name is displayed, otherwise the MMSI number is displayed.

### Accessing the call logs

Follow the steps below to access the call logs.

From the **DSC Calls** menu: **Menu > DSC Calls**.

1. Select **Call logs**.
2. Select the log you want to view:
  - Unread
  - Distress calls
  - Non-distress calls
  - Outgoing calls

Digital selective calling (DSC)

- Position log
3. Select a call and press the **OK** button to view details.
  4. Select **Options** to view available options.
    - **Call Back** — return a received call.
    - **Resend** — only available in the outgoing call log.
    - **Call** — available in the position log.
    - **Send position** — available in the position log.
    - **Request position** — available for individual and distress calls.
    - **Save to Phonebook** — available for received and outgoing calls to new contacts.
    - **Send ACK** — available for unacknowledged individual received calls.
    - **Delete** — deletes the log entry.

## 6.10 Test calls

A Test Call feature is available for the purposes of testing your DSC VHF radio for correct operation.

There are 2 types of test call:

- Test call to the US Coast Guard automated response test call service (MMSI: **003669999**). This type of test call will receive an automated response (acknowledgement).
- Test call to another vessel that has a radio that supports the test call feature. Your radio will automatically acknowledge test calls received from other radios.

For radios that do NOT support the test call feature, correct radio operation can be tested by making an individual call on channel 70 to another DSC VHF radio.

Raymarine recommends that once you've successfully placed a test call you add the test call MMSI to your radio's phonebook for easy retrieval for future test calls. For information on how to add an MMSI to your radio's phonebook, refer to the radio's user documentation.

**Note:** Individual calls (that is, NOT a test call) to the US Coast Guard 003669999 MMSI will NOT receive an automated response.

**Note:** The US Coast Guard automated response test call service is only available in the United States and its coastal waters.

### Making a test call

From the **Test call** menu: **Menu > DSC Calls > Test call**.

1. Select **Phonebook** to make a test call to a contact saved in your Phonebook, or
2. Select **Recent Calls** to make a test call to a contact that you have called recently, or
3. Select **Enter MMSI** to manually enter the MMSI number of the station you want to send a test call.
4. Select a contact or enter an MMSI manually and press the **OK** button.

The test call is sent.





5. If you called the US Coast Guard automated response test call MMSI (003669999), wait for an acknowledgement. If you made a test call to another vessel with a test call capable radio, your radio will wait for a response.

When an acknowledgement is received, an audible alarm is sounded and the message (envelope) icon is displayed.

## Receiving a test call

Your radio will automatically acknowledge received test calls from other stations

When a test call is received a notification is displayed to alert you that a test call has been received and automatically acknowledged.

## 6.11 DSC set-up menu options

The **DSC set-up** menu options can be accessed from the following menus:

- **Menu > DSC Calls > DSC set-up**
- **Menu > Set-up > DSC set-up**

| Menu item                  | Description                                                                                                                                            | Options                                                                                         |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>MMSI</b>                | To enable the DSC functions on your radio you must enter your unique MMSI number.                                                                      |                                                                                                 |
| <b>Auto channel change</b> | When automatic channel change is turned on the radio will automatically re-tune after 10 seconds to the requested channel when DSC calls are received. | <ul style="list-style-type: none"><li>• On (default)</li><li>• Off</li></ul>                    |
| <b>Position requests</b>   | With Position requests set to Auto accept the radio will automatically send out position details when a position request is received.                  | <ul style="list-style-type: none"><li>• Auto accept (default)</li><li>• Manual accept</li></ul> |





## Chapter 7: VHF operations

### Chapter contents

- [7.1 Watch modes on page 54](#)
- [7.2 Scan Mode on page 54](#)
- [7.3 Priority channels on page 54](#)
- [7.4 Sensitivity on page 55](#)
- [7.5 Private channels on page 55](#)
- [7.6 Automatic Transmitter Identification System \(ATIS\) and Marcom-C mode on page 55](#)
- [7.7 AIS receiver on page 56](#)
- [7.8 Set-up menu options on page 57](#)



## 7.1 Watch modes

Watch mode monitors priority channels and the currently selected channel.

There are 2 types of watch mode; **Dual watch** and **Triple watch** or **Tri watch**.

- **Dual watch** — This mode monitors priority channel 16 and the currently selected channel.
- **Triple watch** or **Tri watch** This mode monitors priority channel 16, the second priority channel (Channel 9 (default)) and the currently selected channel. The second priority channel can also be set to a user defined channel.

When the radio detects a transmission, Watch mode is suspended until the transmission ends; watch mode will then recommence.

### Using watch modes

From the **Watch Mode** menu: **Menu > Watch Mode**.

1. Select **Dual Watch** or **Triple Watch** as required.  
The radio is now in Watch mode.
2. Select **2nd priority channel** to select a different second priority channel for **Triple Watch**.
3. During Watch mode, press the **Back** button at any time to end the Watch mode and resume normal operation.

## 7.2 Scan Mode

Scan mode enables automatic searching for channels that are currently broadcasting.

Scan mode will search through available channels and stop when it finds a channel that is currently broadcasting. If the broadcast stops or is lost for more than 5 seconds then the scan will resume.

Channels can be temporarily removed from an active scan, and the direction of scan can also be changed. When the scan reaches the last channel in the band the scan cycle is repeated.

The following scans options are available:

- **All Channels** — All channels in the frequency band the radio is set to are scanned in sequence.
- **All Channels + 16** — All channels in the frequency band the radio is set to are scanned, after each channel is scanned priority channel 16 is scanned.
- **Saved Channels** — Only channels saved to the radio's memory are scanned in sequence.
- **Saved Channels + 16** — Only channels saved to the radio's memory are scanned, after each channel is scanned priority channel 16 is scanned.

**Note:** If the weather alert function is activated, the weather alert channel is included in the scan.

### Performing a scan

Scan mode is started from the main menu.

From the **Scan Mode** menu: **Menu > Scan Mode**.

1. Select the relevant Scan mode.  
The radio is now in Scan mode.
2. Select **Edit Saved Channels** to select the channels that will be scanned when performing a Saved channel scan.
3. During Scan mode, press the **Back** button at any time to end the Scan mode and resume normal operation.

## 7.3 Priority channels

Channel 16 is the dedicated priority channel.

The default secondary priority channel is channel 09. The second priority channel can be changed if desired.

### Switching between priority channels

1. Press the **16 / \*** button to switch between priority channels.

### Setting a second priority channel

You can select which channel you want to use as the second priority channel.

From the **Channel set-up** menu: **Menu > Set-up > Channel set-up**.

1. Select **2nd priority channel**.
2. Select the channel that you want to assign as the second priority channel.



## 7.4 Sensitivity

The sensitivity level of the radio can be set to Local mode or Distant mode.

**Local mode** decreases the receiver sensitivity in high traffic areas to reduce unwanted reception. When in Local mode the 'Loc' icon is displayed in the status bar.

**Distant mode** sets the receiver sensitivity to full.

### Switching sensitivity modes

You can switch between Local and Distant modes at any time.

From the **Set-up** menu: **Menu > Set-up**.

1. Select **Sensitivity**.

Selecting Sensitivity will switch between Local mode and Distant mode (default).

## 7.5 Private channels

The radio may be able to receive additional Private channels depending on the country it is used in and whether the appropriate licenses are held.

The following Private channel sets can be selected:

- None
- Belgium
- Denmark (pleasure)
- Denmark (fishing)
- Finland (pleasure)
- Finland (fishing)
- Holland (Netherlands)
- Norway (pleasure)
- Norway (fishing)
- Sweden (pleasure)
- Sweden (fishing)
- UK

### Selecting a private channel set

You can select the set of private channels you want to use.

From the **Channel set-up** menu: **Menu > Set-up > Channel set-up**.

1. Select **Private channels**.

The list of private channel sets is displayed:

2. Select the required private channel set.

## 7.6 Automatic Transmitter Identification System (ATIS) and Marcom-C mode

ATIS is a European system used on some inland waterways.

VHF radios operating in an ATIS region must be programmed with a unique ATIS number; this can be obtained from the relevant licensing authority. The ATIS number is attached as a digital signal at the end of each transmission and identifies you to the relevant authorities who monitor the system.

When operating in ATIS mode, some of the products features are not available:

- Use of DSC functions is not permitted in ATIS regions.
- Watch modes are not permitted in ATIS regions.
- Channel scanning is not permitted in ATIS regions.
- ATIS regulations restrict the transmit power to 1 watt for the following channels: 6, 8, 10, 11, 12, 13, 14, 71, 72, 74 and 77.

You can enable or disable ATIS using the menus (except on Marcom-C configured units).

### Marcom-C mode

Marcom-C mode is a restricted radio configuration for VHF operators with a Marcom-C license. This is applicable to radios operated exclusively in European inland waterways using the ATIS system.

A Marcom-C VHF radio has the ATIS permanently enabled. You will not be able to disable ATIS operation. Marcom-C operation is set by the dealer at point of sale. If you wish to enable or disable Marcom-C mode, you must contact your Raymarine dealer.

For further information please contact Raymarine technical support.



## Enabling and disabling ATIS mode

ATIS is a European system used on some inland waterways. A unique ATIS ID must be entered to use ATIS mode.

With ATIS mode enabled the radio's region will be fixed to the INT (international) frequency band and the following functions are disabled:

- DSC functions
- Watch Mode
- Scan Mode
- High/low power is restricted on certain channels

From the Main menu.

1. Select **Set-up**.
2. Select **ATIS set-up**.
3. Select **ATIS**.

If no ATIS ID has been set then you will be requested to enter one before ATIS mode is enabled refer to [5.11 Entering your ATIS ID](#) for instructions.

4. If an ATIS ID has already been set then select **On** to enable ATIS mode or **Off** to disable ATIS mode.

## 7.7 AIS receiver

Depending on variant your radio may have a built-in AIS receiver.

With the built-in AIS receiver switched on AIS information can be sent to a connected Raymarine® MFD using either NMEA 0183 or SeaTalkng®.

**Note:** If using the built-in AIS receiver and outputting over NMEA 0183, ensure that the baud rate is set to **0183 High speed: Menu > Set-up > Network output**.

### Switching AIS on and off

From the **Set-up** menu: **Menu > Set-up**.

1. Select **AIS**.

Selecting AIS will switch the internal AIS receiver On and Off.



## 7.8 Set-up menu options

The **Set-up** menu options can be accessed from the menu.

| Menu                         | Description                                                                                                                                         | Options                                                                                                                                                                                                                          |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Display set-up</b>        | Provides access to the display settings menu                                                                                                        | <ul style="list-style-type: none"><li>• Backlight</li><li>• Shared brightness</li><li>• Contrast</li><li>• Homescreen display</li></ul>                                                                                          |
| <b>Language</b>              | Enables selection of user interface language.                                                                                                       | <ul style="list-style-type: none"><li>• <b>English (default)</b> — English</li><li>• <b>Español</b> — Spanish</li><li>• <b>Français</b> — French</li><li>• <b>Deutsch</b> — German</li><li>• <b>Italiano</b> — Italian</li></ul> |
| <b>Units</b>                 | Provides access to units of measure related settings                                                                                                | <ul style="list-style-type: none"><li>• Time format</li><li>• Time offset</li><li>• Bearing mode</li><li>• Speed unit</li></ul>                                                                                                  |
| <b>Power output</b>          | Enables you to switch the Power output of the radio.                                                                                                | <ul style="list-style-type: none"><li>• Distant (default)</li><li>• Local</li></ul>                                                                                                                                              |
| <b>Sensitivity</b>           | Enables you to switch the Sensitivity of the radio.                                                                                                 | <ul style="list-style-type: none"><li>• Low</li><li>• High (default)</li></ul>                                                                                                                                                   |
| <b>Noise cancelling (Tx)</b> | Enables you to switch the transmission noise cancellation feature On and Off. <div><b>Note:</b><br/>Only available on Ray60, Ray70 and Ray90.</div> | <ul style="list-style-type: none"><li>• On (default)</li><li>• Off</li></ul>                                                                                                                                                     |





| Menu                  | Description                                                                                                   | Options                                                                                                                                                                      |
|-----------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Key Beep</b>       | Enables adjustment of the beep heard when pressing buttons.                                                   | <ul style="list-style-type: none"><li>• Off</li><li>• Quiet (default)</li><li>• Loud</li></ul>                                                                               |
| <b>Channel set-up</b> | Provides access to the Channel set-up menu.                                                                   | <ul style="list-style-type: none"><li>• Channel name</li><li>• 2nd priority channel</li><li>• Private channels</li><li>• Frequency band</li></ul>                            |
| <b>GPS set-up</b>     | Provides access to the GPS set-up menu.                                                                       | <ul style="list-style-type: none"><li>• Internal GPS</li><li>• Homescreen display</li><li>• Bearing mode</li><li>• Position requests</li><li>• Set manual position</li></ul> |
| <b>DSC set-up</b>     | Provides access to the DSC set-up menu.                                                                       | <ul style="list-style-type: none"><li>• MMSI</li><li>• Auto channel change</li><li>• Position requests</li></ul>                                                             |
| <b>AIS</b>            | Enables you to switch on the internal AIS receiver, where applicable.                                         | <ul style="list-style-type: none"><li>• Off (default)</li><li>• On</li></ul>                                                                                                 |
| <b>Network output</b> | Enables you to select the network to be used to output data.                                                  | <ul style="list-style-type: none"><li>• NMEA 2000</li><li>• 0183 High speed</li><li>• 0183 Std speed</li></ul>                                                               |
| <b>ATIS set-up</b>    | Enables you to switch ATIS mode on and off and enter your ATIS ID.                                            | <ul style="list-style-type: none"><li>• ATIS</li><li>• ATIS ID</li></ul>                                                                                                     |
| <b>Maintenance</b>    | Enables you to view system details and functions that may be required during maintenance and troubleshooting. | <ul style="list-style-type: none"><li>• About this unit</li><li>• System reset</li><li>• System test</li></ul>                                                               |





## Display Set-up menu

The following menu options are available from the Display Set-up menu.

| Menu                      | Description                                                 | Options                                                                                                |
|---------------------------|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Backlight</b>          | Increases and decreases the LCD and button backlight level. | <ul style="list-style-type: none"><li>• 0 to 9</li><li>• Off</li></ul>                                 |
| <b>Shared brightness</b>  | Enables set-up of Shared Brightness.                        | <ul style="list-style-type: none"><li>• Shared brightness</li><li>• Group</li></ul>                    |
| <b>Contrast</b>           | Increases and decreases the LCD Contrast level.             | <ul style="list-style-type: none"><li>• 0 to 10</li></ul>                                              |
| <b>Homescreen display</b> | Determines the details displayed onscreen.                  | <ul style="list-style-type: none"><li>• Location &amp; Time</li><li>• Location &amp; COG/SOG</li></ul> |



## Shared Brightness menu

The following menu options are available from the Shared Brightness menu.

| Menu                     | Description                                                   | Options                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Shared brightness</b> | Enables and disables Shared Brightness.                       | <ul style="list-style-type: none"><li>• On</li><li>• Off</li></ul>                                                                                          |
| <b>Group</b>             | Enables you to assign the radio to a Shared Brightness group. | <ul style="list-style-type: none"><li>• Helm 1</li><li>• Helm 2</li><li>• Cockpit</li><li>• Flybridge</li><li>• Mast</li><li>• Group 1 to Group 5</li></ul> |



## Chapter 8: Hailer, Fog horn, and Intercom

### Chapter contents

- [8.1 Hailer Fog Intercom menu on page 62](#)
- [8.2 Loud Hailer on page 62](#)
- [8.3 Fog horn on page 62](#)
- [8.4 Intercom on page 63](#)



## 8.1 Hailer Fog Intercom menu

The menu options available are determined by the device connected to your radio.

| Menu name           | Connected devices                         |
|---------------------|-------------------------------------------|
| <b>Hail/Fog/Int</b> | Loud hailer and second station connected. |
| <b>Hailer/Fog</b>   | Loud hailer connected, no second station  |
| <b>Intercom</b>     | Second station connected, no loud hailer  |

**Note:** For simplicity the procedures in this section all refer to the **Hail/Fog/Int** menu.

## 8.2 Loud Hailer

The Ray70 and Ray90 can be connected to a Loud Hailer.

In hailer mode anything spoken into the handset is amplified and broadcast from the hailer; however, the message is not transmitted over VHF channels.

When the hailer is active VHF calls cannot be sent or received.

### Using the hailer

From the **Hail/Fog/Int** menu: **Menu > Hail/Fog/Int.**

1. Select **Hailer**.  
Hailer mode is now active
2. Press and hold the **PTT** button.
3. Speak your message.
4. Release the **PTT** button.
5. Press the **Back** button to exit Hailer mode.
6. The hailer listening volume can be adjusted at any time in Listening mode using the **Volume Control**.
7. The hailer talking volume can be adjusted at any time, with the **PTT** button pressed using the **Volume Control**.

## 8.3 Fog horn

The fog horn function requires an optional loud hailer to be connected. Please check your product description to ensure a loud hailer can be connected.

The fog horn function can be set to manual or to predefined automatic modes.

In manual mode a continuous tone is sounded for as long as the **PTT** button is pressed.

In automatic mode the selected tone will repeat every 2 minutes until interrupted or cancelled. In automatic mode the radio can be used as normal between the fog horn patterns.

| Fog mode                | Description                                                | Pattern                                            |
|-------------------------|------------------------------------------------------------|----------------------------------------------------|
| <b>Underway</b>         | Vessel underway                                            | 1 long tone                                        |
| <b>Underway/Stopped</b> | Vessel not underway                                        | 2 long tones                                       |
| <b>Sail-ing/Fishing</b> | sailing vessel or any vessel fishing but not trolling      | 1 long tone and 2 short tones                      |
| <b>Re-strict/Tow</b>    | Restricted in ability to maneuver or towing another vessel | 1 long tone and 2 short tones                      |
| <b>Under tow</b>        | This vessel is being towed                                 | 1 long tone and 3 short tones                      |
| <b>Pilot vessel</b>     | This vessel is a pilot vessel                              | 4 short tones                                      |
| <b>At anchor</b>        | Vessel is at anchor                                        | 12 consecutive rings                               |
| <b>Aground</b>          | Vessel is aground                                          | 3 short rings, 12 consecutive rings, 3 short rings |

### Using the fog horn in manual mode

From the **Hail/Fog/Int** menu: **Menu > Hail/Fog/Int.**



1. Select **Fog horn**.
2. Select **Manual mode**.
3. Press and hold the **PTT** button to sound a continuous fog horn tone.
4. Press the **Back** button to exit Fog horn mode.

## Using automatic fog horn modes

From the **Hail/Fog/Int** menu: **Menu > Hail/Fog/Int**.

1. Select **Fog horn**.
2. Select **Automatic mode**.
3. Select an automatic pattern.  
The selected pattern will play and repeat until interrupted.
4. Select **Stop fog horn** to exit the automatic fog horn mode, or
5. Select **Change pattern** to select a different fog horn pattern.
6. To continue using the radio whilst in automatic fog horn mode select **Back** 4 times to return to the Homescreen.

You can now continue to use the radio as normal. The fog horn pattern will continue to repeat every 2 minutes. If you are making a call when it is due to sound the fog horn will be suspended until you finish your call.

## Switching off Fog Horn mode

Automatic Fog Horn mode will remain active until switched off.

From the **Hail/Fog/Int** menu: **Menu > Hail/Fog/Int**.

1. Select **Fog horn**.
2. Select **Stop fog horn** to switch off the automatic fog horn mode

## 8.4 Intercom

The Intercom function is available when more than 1 station is connected to your radio.

The intercom function allows voice communication between handset stations. Calls can be initiated from either station.

### Using the intercom

From the **Hail/Fog/Int** menu: **Menu > Hail/Fog/Int**.

1. Select **Intercom**.  
The other station will ring.
2. Wait for the handset station to acknowledge the call.
3. Press and hold the **PTT** button and speak your message.



## Responding to the intercom

1. Press the **PTT** button and acknowledge the call and to respond to subsequent voice messages.



## Chapter 9: Maintenance

### Chapter contents

- [9.1 Maintenance on page 66](#)



## 9.1 Maintenance

This product has no user serviceable parts or adjustments. Never remove the cover or attempt to service the product, doing so may invalidate your product warranty.

To following preventive measures should be followed:

- Although the product is waterproof, keep the unit as dry as possible.
- If you remove a handset connection ensure the dust cap is fitted to the connector.

### Routine checks

The following periodic checks should be made:

- Examine cables for signs of damage, such as chafing, cuts or nicks.
- Check that the cable connectors are firmly attached and that their locking mechanisms are properly engaged.

**Note:** Cable checks should be carried out with the power supply switched off.

### Caution: Product cleaning

When cleaning products:

- Lightly rinse or flush with clean, cool fresh water.
- If your product has a display screen, do NOT wipe the screen with a dry cloth, as this could scratch the screen coating.
- Do NOT use: abrasive, acidic, ammonia, solvent or chemical based cleaning products.
- Do NOT use a jet wash.

## Unit cleaning instructions

The unit does not require regular cleaning. However, if you find it necessary to clean the unit, please follow the steps below:

1. Ensure power is switched off.
2. Wipe unit clean with a damp cloth.
3. If necessary, use a mild detergent solution to remove grease marks.





## Chapter 10: Troubleshooting

### Chapter contents

- [10.1 Troubleshooting on page 68](#)
- [10.2 Power up troubleshooting on page 69](#)
- [10.3 VHF Radio troubleshooting on page 71](#)
- [10.4 GNSS \(GPS\) troubleshooting on page 72](#)



## 10.1 Troubleshooting

The troubleshooting information provides possible causes and corrective action required for common problems associated with installation and operation of your product.

Before packing and shipping, all Raymarine products are subjected to comprehensive testing and quality assurance programs. If you do experience problems with your product this section will help you to diagnose and correct problems in order to restore normal operation.

If after referring to this section you are still having problems with your product, please refer to the Technical support section of this manual for useful links and Raymarine Product Support contact details.

### Performing a system reset

**Note:** Performing a reset will not reset MMSI and ATIS ID number.

From the Maintenance menu: **Menu > Set-up > Maintenance.**

1. Select **System reset.**
2. Select **Yes.**

The system is now reset to factory defaults.

**Note:** Performing the reset will delete all contacts in your phonebook and reset all user options.

### System test

The system test menu can be used to show the status of the system and connected devices.

The System test menu show the status of the following system components and connected devices:

- GPS
- DSC
- Battery
- Hailer
- Remote handset





## 10.2 Power up troubleshooting

Problems at power up and their possible causes and solutions are described here.

### Product does not turn on or keeps turning off

| Possible causes                                            | Possible solutions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blown fuse / tripped breaker                               | <ol style="list-style-type: none"><li>1. Check condition of relevant fuses and breakers and connections, replace if necessary (Refer to <a href="#">Chapter 12 Technical specification</a> for fuse ratings.)</li><li>2. If fuse keeps blowing check for cable damage, broken connector pins or incorrect wiring.</li></ol>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Poor / damaged / insecure power supply cable / connections | <ol style="list-style-type: none"><li>1. Check that the power cable connector is fully inserted into the unit and locked in position.</li><li>2. Check the power supply cable and connectors for signs of damage or corrosion, replace if necessary.</li><li>3. With the unit turned on, try flexing the power cable near to the display connector to see if this causes the unit to re-boot/loose power, replace if necessary.</li><li>4. Check the vessel's battery voltage, the condition of the battery terminals and power supply cables, ensuring connections are secure, clean and free from corrosion, replace if necessary.</li><li>5. With the product under load, using a multi-meter, check for high voltage drop across all connectors/fuses etc, replace if necessary.</li></ol> |
| Incorrect power connection                                 | The power supply may be wired incorrectly, ensure the installation instructions have been followed. (Refer to <a href="#">Chapter 4 Cables and connections</a> for cable and connection requirements.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power source insufficient                                  | With the product under load, using a multi-meter, check the power supply voltage as close to the unit as possible to establish actual voltage when the current is flowing. (Refer to <a href="#">Chapter 12 Technical specification</a> for power supply requirements.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

### Product will not boot up (re-boot loop)

| Possible causes             | Possible solutions                                                                                                                                                                              |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply and connection | See possible solutions from 'Products does not turn on or keeps turning off' above.                                                                                                             |
| Software corruption         | <ol style="list-style-type: none"><li>1. In the unlikely event that the products software has become corrupted please try re-flashing the latest software from the Raymarine website.</li></ol> |





#### Product does not turn on or keeps turning off

| Possible causes                                            | Possible solutions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blown fuse / tripped breaker                               | <ol style="list-style-type: none"><li>1. Check condition of relevant fuses and breakers and connections, replace if necessary (Refer to <a href="#">Chapter 12 Technical specification</a> for fuse ratings.)</li><li>2. If fuse keeps blowing check for cable damage, broken connector pins or incorrect wiring.</li></ol>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Poor / damaged / insecure power supply cable / connections | <ol style="list-style-type: none"><li>1. Check that the power cable connector is fully inserted into the unit and locked in position.</li><li>2. Check the power supply cable and connectors for signs of damage or corrosion, replace if necessary.</li><li>3. With the unit turned on, try flexing the power cable near to the display connector to see if this causes the unit to re-boot/loose power, replace if necessary.</li><li>4. Check the vessel's battery voltage, the condition of the battery terminals and power supply cables, ensuring connections are secure, clean and free from corrosion, replace if necessary.</li><li>5. With the product under load, using a multi-meter, check for high voltage drop across all connectors/fuses etc, replace if necessary.</li></ol> |
| Incorrect power connection                                 | The power supply may be wired incorrectly, ensure the installation instructions have been followed. (Refer to <a href="#">Chapter 4 Cables and connections</a> for cable and connection requirements.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power source insufficient                                  | With the product under load, using a multi-meter, check the power supply voltage as close to the unit as possible to establish actual voltage when the current is flowing. (Refer to <a href="#">Chapter 12 Technical specification</a> for power supply requirements.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

#### Raymic Handset will not power up

| Possible causes                                | Possible solutions                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Handset not turned on                          | The Raymic handset is compatible with the Ray60, Ray70, Ray90 and Ray91 radios. The Raymic handset is powered separately from the Base station. Press the Power button located on the top of the Handset to power it on.                                                                                                                                                     |
| Software Base station / Handset mismatch       | The Raymic handset and Base station must both be running compatible software, refer to the <a href="#">Base station and Handset software compatibility</a> section for details of compatible software versions.                                                                                                                                                              |
| Poor / damaged / insecure cables / connections | <ol style="list-style-type: none"><li>1. Check that the Base station is correctly powered.</li><li>2. With the Handset turned on, try flexing the cable near to the connectors to see if this causes the Handset to re-boot/loose power, replace if necessary.</li><li>3. Check cable connections are secure, clean and free from corrosion, replace if necessary.</li></ol> |





## 10.3 VHF Radio troubleshooting

Problems with your VHF radio and their possible causes and solutions are described below:

### DSC functions are not available / working

| Possible Causes                        | Possible Solutions                                                                                                                                                                                                                                          |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MMSI number not programmed.            | Programme your MMSI number.                                                                                                                                                                                                                                 |
| Radio is set to ATIS or Marcom-C mode. | Use of DSC is not permitted when in ATIS or Marcom-C mode. You will be unable to make DSC distress and other types of digital selective call.<br>If you are not in an ATIS region switch off ATIS mode: <b>Menu &gt; Set-up &gt; ATIS set-up &gt; ATIS.</b> |
| Sensitivity set to Local.              | With the sensitivity set to Local your reception will be limited<br>Set Sensitivity to Distant: <b>Menu &gt; Set-up &gt; Sensitivity.</b>                                                                                                                   |

### Passive speaker no alarm audio

| Possible Causes                                        | Possible Solutions                                                                                                                                            |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Passive speaker connected to second station connector. | Alarm audio is not available on passive speakers connected to the second station connector. Alarm audio should still be heard via the second station handset. |



## 10.4 GNSS (GPS) troubleshooting

Problems with the GNSS (GPS) and their possible causes and solutions are described below.

Before troubleshooting GNSS (GPS) problems, ensure your product has the latest software, by checking the Software Updates page on the Raymarine website [www.raymarine.com](http://www.raymarine.com).

### No fix

| Possible causes                                                        | Possible solutions                                                                                                                                                                                                                                |
|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GNSS (GPS) switched off.                                               | Ensure your internal GNSS (GPS) receiver is switched on.                                                                                                                                                                                          |
| Geographic location or prevailing conditions preventing satellite fix. | Check periodically to see if a fix is obtained in better conditions or another geographic location.                                                                                                                                               |
| GNSS (GPS) Antenna location.                                           | For optimum performance the antenna should be mounted above decks and have a clear, unobstructed view of the sky, and not be in close proximity to any structural bulkheads or other electrical equipment or cables which may cause interference. |

### No position data

| Possible causes                               | Possible solutions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Internal receiver is switched off.            | Ensure your external or internal receiver is switched on.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Wrong Network output selected.                | Ensure the correct network type and speed is selected in the <b>Network output</b> menu: <b>Menu &gt; Set-up &gt; Network output</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Poor / damaged / insecure cable / connection. | <ol style="list-style-type: none"><li>1. Check that the connectors are fully inserted into the unit and locked in position.</li><li>2. Check the cables and connectors for signs of damage or corrosion, replace if necessary.</li><li>3. Check the vessel's battery voltage, the condition of the battery terminals and power supply cables, ensuring connections are secure, clean and free from corrosion, replace if necessary.</li><li>4. With the product under load, using a multi-meter, check for high voltage drop across all connectors/fuses etc, replace if necessary.</li></ol> |

## GPS data output

The Ray90 and Ray91 include an internal GPS receiver. However, these products do NOT output GPS data to external devices.





## Chapter 11: Technical support

### Chapter contents

- [11.1 Raymarine product support and servicing on page 74](#)
- [11.2 Viewing product information on page 75](#)
- [11.3 Learning resources on page 75](#)

## 11.1 Raymarine product support and servicing

Raymarine provides a comprehensive product support service, as well as warranty, service, and repairs. You can access these services through the Raymarine website, telephone, and e-mail.

### Product information

If you need to request service or support, please have the following information to hand:

- Product name.
- Product identity.
- Serial number.
- Software application version.
- System diagrams.

You can obtain this product information using the menus within your product.

### Servicing and warranty

Raymarine offers dedicated service departments for warranty, service, and repairs.

Don't forget to visit the Raymarine website to register your product for extended warranty benefits: <http://www.raymarine.co.uk/display/?id=788>.

| Region                                      | Tele-<br>phone      | E-mail                                                                     |
|---------------------------------------------|---------------------|----------------------------------------------------------------------------|
| United Kingdom (UK), EMEA, and Asia Pacific | +44 (0)1329 246 932 | <a href="mailto:emea.service@raymarine.com">emea.service@raymarine.com</a> |
| United States (US)                          | +1 (603) 324 7900   | <a href="mailto:rm-usrepair@flir.com">rm-usrepair@flir.com</a>             |

### Web support

Please visit the "Support" area of the Raymarine website for:

- **Manuals and Documents** — <http://www.raymarine.com/manuals>
- **FAQ / Knowledgebase** — <http://www.raymarine.com/knowledgebase>
- **Technical support forum** — <http://forum.raymarine.com>
- **Software updates** — <http://www.raymarine.com/software>

### Telephone and e-mail support

| Region                                      | Tele-<br>phone                                  | E-mail                                                                                             |
|---------------------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------------------------|
| United Kingdom (UK), EMEA, and Asia Pacific | +44 (0)1329 246 777                             | <a href="mailto:support.uk@raymarine.com">support.uk@raymarine.com</a>                             |
| United States (US)                          | +1 (603) 324 7900<br>(Toll-free: +800 539 5539) | <a href="mailto:support@raymarine.com">support@raymarine.com</a>                                   |
| Australia and New Zealand                   | +61 2 8977 0300                                 | <a href="mailto:aus.support@raymarine.com">aus.support@raymarine.com</a><br>(Raymarine subsidiary) |
| France                                      | +33 (0)1 46 49 72 30                            | <a href="mailto:support.fr@raymarine.com">support.fr@raymarine.com</a><br>(Raymarine subsidiary)   |
| Germany                                     | +49 (0)40 237 808 0                             | <a href="mailto:support.de@raymarine.com">support.de@raymarine.com</a><br>(Raymarine subsidiary)   |

| Region      | Tele-<br>phone      | E-mail                                                                                             |
|-------------|---------------------|----------------------------------------------------------------------------------------------------|
| Italy       | +39 02 9945 1001    | <a href="mailto:support.it@raymarine.com">support.it@raymarine.com</a><br>(Raymarine subsidiary)   |
| Spain       | +34 96 2965 102     | <a href="mailto:sat@azimut.es">sat@azimut.es</a><br>(Authorized Raymarine distributor)             |
| Netherlands | +31 (0)26 3614 905  | <a href="mailto:support.nl@raymarine.com">support.nl@raymarine.com</a><br>(Raymarine subsidiary)   |
| Sweden      | +46 (0)317 633 670  | <a href="mailto:support.se@raymarine.com">support.se@raymarine.com</a><br>(Raymarine subsidiary)   |
| Finland     | +358 (0)207 619 937 | <a href="mailto:support.fi@raymarine.com">support.fi@raymarine.com</a><br>(Raymarine subsidiary)   |
| Norway      | +47 692 64 600      | <a href="mailto:support.no@raymarine.com">support.no@raymarine.com</a><br>(Raymarine subsidiary)   |
| Denmark     | +45 437 164 64      | <a href="mailto:support.dk@raymarine.com">support.dk@raymarine.com</a><br>(Raymarine subsidiary)   |
| Russia      | +7 495 788 0508     | <a href="mailto:info@mikstmarine.ru">info@mikstmarine.ru</a><br>(Authorized Raymarine distributor) |



## 11.2 Viewing product information

Product information can be found on the Startup screen.

1. Power up the radio.

The startup screen is displayed which shows the model and software version of the product.

Alternatively product information can also be displayed by selecting **About this unit** from the **Maintenance** menu: **Menu > Set-up > Maintenance**.

## 11.3 Learning resources

Raymarine has produced a range of learning resources to help you get the most out of your products.

### Video tutorials

|                                                                                   |                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Raymarine official channel on YouTube: <ul style="list-style-type: none"><li>• <a href="http://www.youtube.com/user/RaymarineInc">http://www.youtube.com/user/RaymarineInc</a></li></ul> |
|  | Video Gallery: <ul style="list-style-type: none"><li>• <a href="http://www.raymarine.co.uk/view/?id=2679">http://www.raymarine.co.uk/view/?id=2679</a></li></ul>                         |
|  | Product Support videos: <ul style="list-style-type: none"><li>• <a href="http://www.raymarine.co.uk/view/?id=4952">http://www.raymarine.co.uk/view/?id=4952</a></li></ul>                |

### Note:

- Viewing the videos requires a device with an Internet connection.
- Some videos are only available in English.

### Training courses

Raymarine regularly runs a range of in-depth training courses to help you make the most of your products. Visit the Training section of the Raymarine website for more information:

- <http://www.raymarine.co.uk/view/?id=2372>

### FAQs and Knowledge Base

Raymarine has produced an extensive set of FAQs and a Knowledge Base to help you find more information and troubleshoot any issues.

- <http://www.raymarine.co.uk/knowledgebase/>



### Technical support forum

You can use the Technical support forum to ask a technical question about a Raymarine product or to find out how other customers are using their Raymarine equipment. The resource is regularly updated with contributions from Raymarine customers and staff:

- <http://forum.raymarine.com>



## Chapter 12: Technical specification

### Chapter contents

- [12.1 Technical specification on page 78](#)
- [12.2 Radio usage on page 79](#)



## 12.1 Technical specification

The following technical specification apply to the Ray90 and Ray91.

### Environmental specification

|                       |                                                                                                                                                                                                                                                                                                                       |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating temperature | -20°C (-4°F) to +60°C (140°F)                                                                                                                                                                                                                                                                                         |
| Storage temperature   | -25°C (-13°F) to +70°C (158°F)                                                                                                                                                                                                                                                                                        |
| Relative humidity     | 95%                                                                                                                                                                                                                                                                                                                   |
| Water proofing        | IPx6 & IPx7                                                                                                                                                                                                                                                                                                           |
| Connections           | <ul style="list-style-type: none"><li>• 1 x SeaTalkng® / NMEA 2000</li><li>• 1 x NMEA 0183 input</li><li>• 1 x NMEA 0183 output</li><li>• 2 x Handset station connectors</li><li>• 1 x VHF antenna / splitter connector</li><li>• 1 x TNC GNSS (GPS) antenna connector</li><li>• 1 x Loud Hailer connection</li></ul> |

### Power specification

|                         |                                        |
|-------------------------|----------------------------------------|
| Nominal supply voltage  | 12 V dc (with over voltage protection) |
| Operating voltage range | 10.2 V dc to 16 V dc                   |

|                     |                                                                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current consumption | <ul style="list-style-type: none"><li>• Less than 6 A at high power (13.6 V)</li><li>• Standby: 600 mA</li><li>• Receive: 2 A</li><li>• Loud hailer: 3 A (8 Ω) / 6 A (4 Ω)</li></ul> |
| LEN                 | 1                                                                                                                                                                                    |

### VHF Transmitter

|                     |                                                                                                               |
|---------------------|---------------------------------------------------------------------------------------------------------------|
| Channels            | All available US, International and Canadian VHF marine bands                                                 |
| Frequency Range     | 156.025 MHz to 157.425 MHz / 155.500 MHz to 161.425 MHz (Private channels)                                    |
| Frequency stability | +/- 1.5 ppm                                                                                                   |
| Channel Spacing     | 25kHz                                                                                                         |
| Power Output        | <ul style="list-style-type: none"><li>• Low power setting — 1 W</li><li>• High power setting — 25 W</li></ul> |
| Spurious emissions  | Better than -36 dBm at 25 W (Less than 0.25 µW)                                                               |
| Maximum deviation   | +/- 5 KHz                                                                                                     |
| Antenna impedance   | 50 Ohms (typical)                                                                                             |

### Receiver

|               |                                                               |
|---------------|---------------------------------------------------------------|
| Receiver type | Double conversion super heterodyne                            |
| Channels      | All available US, International and Canadian VHF marine bands |

|                              |                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency range              | 156.050 MHz to 163.275 MHz / 155.500 MHz to 161.425 MHz (Private channels)                                                                                  |
| Sensitivity                  | Better than 1 microvolt EMF @ 20dB SINAD                                                                                                                    |
| Squelch sensitivity          | Less than -2 dBµ EMF                                                                                                                                        |
| Hum and noise                | Better than -40 dB                                                                                                                                          |
| Audio distortion             | Less than 10%                                                                                                                                               |
| Receiver sensitivity         | <ul style="list-style-type: none"><li>• Distance — 119dBm (0.25uV) @ 12dB SINAD (typical)</li><li>• Local — 110dBm (0.7uV) @ 12dB SINAD (typical)</li></ul> |
| Adjacent channel selectivity | More than 70 dB                                                                                                                                             |
| Spurious response rejection  | More than 70 dB                                                                                                                                             |
| Inter modulation rejection   | More than 68 dB                                                                                                                                             |

### Speakers

|                               |            |
|-------------------------------|------------|
| External speaker power output | 4 W (8 Ω)  |
| Handset speaker power output  | 1 W (16 Ω) |
| Hailer speaker power output   | 24 W (4 Ω) |

### AIS (Ray91 only)

|            |                   |
|------------|-------------------|
| Class type | AIS receiver only |
|------------|-------------------|

### GNSS

|            |            |
|------------|------------|
| Channels   | 72         |
| Cold start | 29 seconds |





|                              |                                                                                                                                                                                        |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Receiver IC Sensitivity      | <ul style="list-style-type: none"><li>• Tracking and navigation = -167 dBm</li><li>• Reacquisition = -160 dBm</li><li>• Cold start = -146 dBm</li><li>• Hot start = -156 dBm</li></ul> |
| GNSS compatibility           | <ul style="list-style-type: none"><li>• GPS</li><li>• GLONASS</li><li>• Beidou</li></ul>                                                                                               |
| SBAS compatibility           | <ul style="list-style-type: none"><li>• QZSS</li><li>• WAAS</li><li>• EGNOS</li><li>• MSAS</li><li>• GAGAN</li></ul>                                                                   |
| Special features             | Active Jamming and Interference Reduction                                                                                                                                              |
| Operating frequency          | <ul style="list-style-type: none"><li>• GPS L1 C/A</li><li>• GLONASS L10F</li><li>• Beidou B1</li></ul>                                                                                |
| Signal Acquisition           | Automatic                                                                                                                                                                              |
| Almanac Update               | Automatic                                                                                                                                                                              |
| Geodetic Datum               | WGS-84 (alternatives available through Raymarine MFD)                                                                                                                                  |
| Refresh Rate                 | 20 Hz (20 times per second Concurrent GNSS)                                                                                                                                            |
| Antenna                      | <ul style="list-style-type: none"><li>• External passive</li></ul>                                                                                                                     |
| Horizontal Position Accuracy | <ul style="list-style-type: none"><li>• Autonomous = 2.5m (8.2 ft)</li><li>• SBAS = 2m (6.56 ft)</li></ul>                                                                             |

T

Technical specification





## 12.2 Radio usage

The radio can be used worldwide, including the following European countries:

|    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|
| A  | CZ | FI | IE | LU | PL | SK |
| BE | DE | FR | IS | LV | PT | TR |
| BG | DK | GB | IT | MT | RO |    |
| CH | EE | GR | LI | NL | SE |    |
| CY | ES | HU | LT | NO | SI |    |



## Appendix A NMEA 0183 sentences

The radio supports the following **NMEA 0183** sentences.

| Sentence | Description                               | Ray90   |          | Ray91   |          |
|----------|-------------------------------------------|---------|----------|---------|----------|
|          |                                           | Receive | Transmit | Receive | Transmit |
| DSC      | Digital Selective Calling                 |         | ●        |         | ●        |
| DSE      | Expanded Digital Selective Calling        |         | ●        |         | ●        |
| VDM      | AIS VHF Data Link Message                 |         |          |         | ●        |
| GGA      | Global Positioning System Fix Data        | ●       |          | ●       |          |
| GLL      | Geographic Position — Lat/Long            | ●       |          | ●       |          |
| GNS      | GNSS Fix Data                             | ●       |          | ●       |          |
| RMA      | Recommended Minimum Specific Loran-C Data | ●       |          | ●       |          |
| RMC      | Recommended Minimum Specific GNSS Data    | ●       |          | ●       |          |
| DTM      | Datum                                     | ●       |          | ●       |          |





## Appendix B NMEA 2000 PGN list

The radio supports the following **NMEA 2000** PGNs. These are applicable to **NMEA 2000** and **SeaTalkng**® protocols.

| PGN    | Description                                | Ray90   |          | Ray91   |          |
|--------|--------------------------------------------|---------|----------|---------|----------|
|        |                                            | Receive | Transmit | Receive | Transmit |
| 59392  | ISO Request                                | •       | •        | •       | •        |
| 59904  | ISO Acknowledgement                        | •       | •        | •       | •        |
| 60928  | ISO Address Claim                          | •       | •        | •       | •        |
| 126208 | NMEA — Group Function                      | •       | •        | •       | •        |
| 126464 | PGN List                                   |         | •        |         | •        |
| 126996 | Product Information                        |         | •        |         | •        |
| 127258 | Magnetic variation                         | •       |          | •       |          |
| 129026 | COG / SOG Rapid Update                     | •       |          | •       |          |
| 129029 | GNSS Position Data                         | •       |          | •       |          |
| 129038 | AIS Class A Position Report                |         |          |         | •        |
| 129039 | AIS Class B Position Report                |         |          |         | •        |
| 129040 | AIS Class B Extended Position Report       |         |          |         | •        |
| 129041 | AIS Aids to Navigation (AtONs)             |         |          |         | •        |
| 129044 | Datum                                      | •       |          | •       |          |
| 129793 | AIS UTC and Date Report                    |         |          |         | •        |
| 129794 | AIS Class A Static and Voyage Related data |         |          |         | •        |
| 129798 | AIS SAR Aircraft Position Report           |         |          |         | •        |
| 129801 | AIS Addressed Safety Related Message       |         |          |         | •        |
| 129802 | AIS Safety Related Broadcast Message       |         |          |         | •        |
| 129808 | DSC Call Information                       |         | •        |         | •        |





| PGN    | Description                                 | Ray90   |          | Ray91   |          |
|--------|---------------------------------------------|---------|----------|---------|----------|
|        |                                             | Receive | Transmit | Receive | Transmit |
| 129809 | AIS Class B "CS" Static Data Report, Part A |         |          |         | ●        |
| 129810 | AIS Class B "CS" Static Data Report, Part B |         |          |         | ●        |





## Appendix C MMSI Regulatory bodies and application submissions

| Country     | Regulatory Body                                                                      | Website links                                                                                                                                                                                                                                                                                                               |
|-------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UK          | Ofcom                                                                                | <a href="http://www.ofcom.org.uk">http://www.ofcom.org.uk</a>                                                                                                                                                                                                                                                               |
| USA         | FCC ( <a href="http://www.fcc.gov">www.fcc.gov</a> )                                 | <ul style="list-style-type: none"><li>• <a href="http://www.boatus.com">www.boatus.com</a></li><li>• <a href="http://www.seatow.com">www.seatow.com</a></li><li>• <a href="http://www.usps4mmsi.com">www.usps4mmsi.com</a></li></ul>                                                                                        |
| Canada      | Industry Canada                                                                      | <a href="http://www.ic.gc.ca">www.ic.gc.ca</a>                                                                                                                                                                                                                                                                              |
| Australia   | Australian Maritime Safety Authority (AMSA)                                          | <a href="http://www.amsa.gov.au/mmsi/">http://www.amsa.gov.au/mmsi/</a>                                                                                                                                                                                                                                                     |
| Holland     | Agentschap Telecom                                                                   | <a href="http://www.agentschaptelecom.nl">www.agentschaptelecom.nl</a>                                                                                                                                                                                                                                                      |
| Belgium     | Belgisch Instituut voor Postdiensten en Telecommunicatie                             | <a href="http://www.bipt.be">www.bipt.be</a>                                                                                                                                                                                                                                                                                |
| Germany     | Bundesnetzagentur                                                                    | <a href="https://www.bundesnetzagentur.de/DE/Sachgebiete/Telekommunikation/Unternehmen_Institutionen/Frequenzen/SpezielleAnwendungen/Seefunk/See-funk-node.html">https://www.bundesnetzagentur.de/DE/Sachgebiete/Telekommunikation/Unternehmen_Institutionen/Frequenzen/SpezielleAnwendungen/Seefunk/See-funk-node.html</a> |
| Denmark     | søfartsstyrelsen                                                                     | <a href="http://www.soefartsstyrelsen.dk">www.soefartsstyrelsen.dk</a>                                                                                                                                                                                                                                                      |
| France      | Agence Nationale Des Fréquences                                                      | <a href="https://www.anfr.fr/licences-et-autorisations/radiomaritime/">https://www.anfr.fr/licences-et-autorisations/radiomaritime/</a>                                                                                                                                                                                     |
| Italy       | Ministero dello sviluppo economico - Direzione generale per le attività territoriali | <a href="http://www.sviluppoeconomico.gov.it/images/stories/documenti/mmsinew.pdf">http://www.sviluppoeconomico.gov.it/images/stories/documenti/mmsinew.pdf</a>                                                                                                                                                             |
| Spain       | Ministero De Fomento                                                                 | <a href="https://www.fomento.gob.es/MFOM/LANG_CASTELLANO/DIRECCIONES_GEN-ERALES/MARINA_MERCANTE/RADIOCOMUNICACIONES/MMSI/">https://www.fomento.gob.es/MFOM/LANG_CASTELLANO/DIRECCIONES_GEN-ERALES/MARINA_MERCANTE/RADIOCOMUNICACIONES/MMSI/</a>                                                                             |
| Sweden      | PTS                                                                                  | <a href="http://www.pts.se">www.pts.se</a>                                                                                                                                                                                                                                                                                  |
| Finland     | Viestintävirasto                                                                     | <a href="https://www.viestintavirasto.fi/en/spectrum/radiolicences/Boatingandnavigation.html">https://www.viestintavirasto.fi/en/spectrum/radiolicences/Boatingandnavigation.html</a>                                                                                                                                       |
| Iceland     | Post and telecom administration in Iceland                                           | <a href="http://www.pfs.is">www.pfs.is</a>                                                                                                                                                                                                                                                                                  |
| New Zealand | Radio Spectrum Management                                                            | <a href="https://www.rsm.govt.nz/licensing/radio-operator-certificates-and-callsigns?searchterm=MMSI">https://www.rsm.govt.nz/licensing/radio-operator-certificates-and-callsigns?searchterm=MMSI</a>                                                                                                                       |





| Country | Regulatory Body              | Website links                                                                                                                        |
|---------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Chile   | Directemar                   | <a href="http://www.nauticentro.cl">www.nauticentro.cl</a>                                                                           |
| Panama  | Autoridad Maritima de Panama | <a href="http://www.amp.gob.pa/newside/spanish/puertos2/depima/ima.html">www.amp.gob.pa/newside/spanish/puertos2/depima/ima.html</a> |





## Appendix D VHF Channels

### US Marine VHF Channels and Frequencies

**Note:** Some of the channel numbers have recently changed. For completeness, both old and new numbers are shown in the table below.

| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Single Freq | Use                                                                                                                                                     |
|--------------|--------------|---------|---------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1001         | 01A          | 156.050 | 156.050 | x           | Port operations and commercial, VTS.<br>Available only in New Orleans / Lower Mississippi area.                                                         |
| 1003         | 03A          | 156.150 | 156.150 | x           | US Government only.                                                                                                                                     |
| 1005         | 05A          | 156.250 | 156.250 | x           | Port operations or VTS in the Houston, New Orleans and Seattle areas.                                                                                   |
| 06           | 06           | 156.300 | 156.300 | x           | Intership Safety.                                                                                                                                       |
| 1007         | 07A          | 156.350 | 156.350 | x           | Commercial.                                                                                                                                             |
| 08           | 08           | 156.400 | 156.400 | x           | Commercial (Intership only).                                                                                                                            |
| 09           | 09           | 156.450 | 156.450 | x           | Boater calling.<br>Commercial and Non-commercial.                                                                                                       |
| 10           | 10           | 156.500 | 156.500 | x           | Commercial.                                                                                                                                             |
| 11           | 11           | 156.550 | 156.550 | x           | Commercial.<br>VTS in selected areas.                                                                                                                   |
| 12           | 12           | 156.600 | 156.600 | x           | Port operations.<br>VTS in selected areas.                                                                                                              |
| 13           | 13           | 156.650 | 156.650 | x           | Intership navigation safety (Bridge-to-bridge).<br>Ships >20 metres in length maintain a listening watch on this channel in US waters.                  |
| 14           | 14           | 156.700 | 156.700 | x           | Port operations.<br>VTS in selected areas.                                                                                                              |
| 15           | 15           | -       | 156.750 | x           | Environmental (Receive only).<br>Used by Class 'C' EPIRBs.                                                                                              |
| 16           | 16           | 156.800 | 156.800 | x           | International Distress, Safety and Calling.<br>Ships required to carry radio, USCG, and most coast stations maintain a listening watch on this channel. |
| 17           | 17           | 156.850 | 156.850 | x           | State Control.                                                                                                                                          |





| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Single Freq | Use                                                                                                    |
|--------------|--------------|---------|---------|-------------|--------------------------------------------------------------------------------------------------------|
| 1018         | 18A          | 156.900 | 156.900 | x           | Commercial.                                                                                            |
| 1019         | 19A          | 156.950 | 156.950 | x           | Commercial.                                                                                            |
| 20           | 20           | 157.000 | 161.600 |             | Port operations (duplex).                                                                              |
| 1020         | 20A          | 157.000 | 157.000 | x           | Port operations.                                                                                       |
| 1021         | 21A          | 157.050 | 157.050 | x           | US Coast Guard only.                                                                                   |
| 1022         | 22A          | 157.100 | 157.100 | x           | Coast Guard Liaison and Maritime Safety Information Broadcasts.<br>Broadcasts announced on channel 16. |
| 1023         | 23A          | 157.150 | 157.150 | x           | US Coast Guard only.                                                                                   |
| 24           | 24           | 157.200 | 161.800 |             | Public correspondence (Marine operator).                                                               |
| 25           | 25           | 157.250 | 161.850 |             | Public correspondence (Marine operator).                                                               |
| 26           | 26           | 157.300 | 161.900 |             | Public correspondence (Marine operator).                                                               |
| 27           | 27           | 157.350 | 161.950 |             | Public correspondence (Marine operator).                                                               |
| 28           | 28           | 157.400 | 162.000 |             | Public correspondence (Marine operator).                                                               |
| 1061         | 61A          | 156.075 | 156.075 | x           | US Government only.                                                                                    |
| 1063         | 63A          | 156.175 | 156.175 | x           | Port operations and commercial VTS, Available only in New Orleans / Lower Mississippi area.            |
| 1064         | 64A          | 156.225 | 156.225 | x           | US Coast Guard only.                                                                                   |
| 1065         | 65A          | 156.275 | 156.275 | x           | Port operations.                                                                                       |
| 1066         | 66A          | 156.325 | 156.325 | x           | Port operations.                                                                                       |
| 67           | 67           | 156.375 | 156.375 | x           | Commercial.<br>Used for bridge-to-bridge communications in lower Mississippi river (Intership only).   |
| 68           | 68           | 156.425 | 156.425 | x           | Non-commercial.                                                                                        |
| 69           | 69           | 156.475 | 156.475 | x           | Non-commercial.                                                                                        |
| 71           | 71           | 156.575 | 156.575 | x           | Non-commercial.                                                                                        |
| 72           | 72           | 156.625 | 156.625 | x           | Non-commercial (Intership only).                                                                       |





| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Single Freq | Use                                                       |
|--------------|--------------|---------|---------|-------------|-----------------------------------------------------------|
| 73           | 73           | 156.675 | 156.675 | x           | Port operations.                                          |
| 74           | 74           | 156.725 | 156.725 | x           | Port operations.                                          |
| 77           | 77           | 156.875 | 156.875 | x           | Port operations (Intership only).                         |
| 1078         | 78A          | 156.925 | 156.925 | x           | Non-commercial.                                           |
| 1079         | 79A          | 156.975 | 156.975 | x           | Commercial.<br>Non-commercial in Great Lakes only).       |
| 1080         | 80A          | 157.025 | 157.025 | x           | Commercial.<br>Non-commercial in Great Lakes only).       |
| 1081         | 81A          | 157.075 | 157.075 | x           | US Government only — Environmental protection operations. |
| 1082         | 82A          | 157.125 | 157.125 | x           | US Government only.                                       |
| 1083         | 83A          | 157.175 | 157.175 | x           | US Government only.                                       |
| 84           | 84           | 157.225 | 161.825 |             | Public correspondence (Marine operator).                  |
| 85           | 85           | 157.275 | 161.875 |             | Public correspondence (Marine operator).                  |
| 86           | 86           | 157.325 | 161.925 |             | Public correspondence (Marine operator).                  |
| 87           | 87           | 157.375 | 161.975 |             | Public correspondence (Marine operator).                  |
| 88           | 88           | 157.425 | 162.025 |             | Public correspondence only near the Canadian border       |
| 1088         | 88A          | 157.425 | 157.425 | x           | Commercial, Intership only.                               |
| AIS 1        | AIS 1        |         | 161.975 | x           | Automatic Identification System (AIS)                     |
| AIS 2        | AIS 2        |         | 162.025 | x           | Automatic Identification System (AIS)                     |

Please be aware that:

- Recreational boaters normally use channels listed as Non-commercial: 68, 69, 71, 72 78A.
- Channel 70 is used exclusively for DSC and is not available for regular voice communications.
- Channels 75 and 76 are reserved as guards bands for channel 16 and are not available for regular voice communications.
- Channels AIS 1 and AIS 2 are only supported by VHF products which include an AIS receiver.



**Note:**

1. The letter 'A' following a channel number indicates simplex use of the ship station transmit side of an international semi-duplex channel. Operations are different from that of international operations on that channel.
2. Channel 13 should be used to contact a ship when there is danger of collision. All ships of length 20 metres or greater are required to guard VHF channel 13, in addition to VHF channel 16, when operating within US territorial waters.
3. Channel 15 is receive only.
4. Channel 16 is used for calling other stations or for distress calls.
5. Channel 17 and channel 77 have a fixed power output of 1 watt.
6. Channel 13 and channel 67 have an initial power output of 1 watt. User can temporarily override this restrictions to transmit at high power.

**Canadian Marine VHF Channels and Frequencies**

**Note:** Some of the channel numbers have recently changed. For completeness, both old and new numbers are shown in the table below.

| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Area of operation | Use                                                                                                                                                                           |
|--------------|--------------|---------|---------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 01           | 01           | 156.050 | 160.650 | PC                | Public correspondence.                                                                                                                                                        |
| 02           | 02           | 156.100 | 160.700 | PC                | Public correspondence.                                                                                                                                                        |
| 03           | 03           | 156.150 | 160.750 | PC                | Public correspondence.                                                                                                                                                        |
| 1004         | 04A          | 156.200 | 156.200 | PC                | Intership, ship/shore and safety:<br>Canadian Coast Guard search and rescue.                                                                                                  |
| 1004         | 04A          | 156.200 | 156.200 | EC                | Intership, ship/shore and commercial:<br>Commercial fishing only.                                                                                                             |
| 1005         | 05A          | 156.250 | 156.250 |                   | Ship movement.                                                                                                                                                                |
| 06           | 06           | 156.300 | 156.300 | All areas         | Intership, commercial, non-commercial and safety:<br>Maybe used for search and rescue communications between ships and aircraft.                                              |
| 1007         | 07A          | 156.350 | 156.350 | All areas         | Intership, ship/shore, commercial.                                                                                                                                            |
| 08           | 08           | 156.400 | 156.400 | WC, EC            | Intership, commercial and safety.<br>Also assigned for operations in the Lake Winnipeg area.                                                                                  |
| 09           | 09           | 156.450 | 156.450 | AC                | Intership, ship/shore, commercial, non-commercial and ship movement.<br>Maybe used to communicate with aircraft and helicopters in predominantly maritime support operations. |





| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Area of operation   | Use                                                                                                                                                                                                   |
|--------------|--------------|---------|---------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10           | 10           | 156.500 | 156.500 | AC, GL              | Intership, ship/shore, commercial, non-commercial, safety and ship movement. May also be used for communications with aircraft engaged in coordinated search and rescue and antipollution operations. |
| 11           | 11           | 156.550 | 156.550 | PC, AC, GL          | Intership, ship/shore, commercial, non-commercial and ship movement. Also used for pilotage purposes.                                                                                                 |
| 12           | 12           | 156.600 | 156.600 | WC, AC, GL          | Intership, ship/shore, commercial, non-commercial and ship movement. Port operations and pilot information and messages.                                                                              |
| 13           | 13           | 156.650 | 156.650 | All areas           | Intership, commercial, non-commercial and ship movement. Exclusively for bridge-to-bridge navigational traffic. Limited to 1 watt maximum power.                                                      |
| 14           | 14           | 156.700 | 156.700 | AC, GL              | Intership, ship/shore, commercial, non-commercial and ship movement. Port operations and pilot information and messages.                                                                              |
| 15           | 15           | 156.750 | 156.750 | All areas           | Intership, ship/shore, commercial, non-commercial and ship movement. All operations limited to 1 watt maximum power. May also be used for on-board communications.                                    |
| 16           | 16           | 156.800 | 156.800 | All areas           | International distress, safety and calling.                                                                                                                                                           |
| 17           | 17           | 156.850 | 156.850 | All areas           | Intership, ship/shore, commercial, non-commercial and ship movement. All operations limited to 1 watt maximum power. May also be used for on-board communications.                                    |
| 1018         | 18A          | 156.900 | 156.900 | All areas           | Intership, ship/shore, commercial. Towing on the Pacific coast.                                                                                                                                       |
| 1019         | 19A          | 156.950 | 156.950 | All areas except PC | Intership, ship/shore. Canadian Coast Guard only                                                                                                                                                      |
| 1019         | 19A          | 156.950 | 156.950 | PC                  | Intership, ship/shore. Various government departments.                                                                                                                                                |
| 20           | 20           | 157.00  | 161.600 | All areas           | Ship/shore, safety and ship movement. Port operations limited to 1 watt maximum power.                                                                                                                |
| 1021         | 21A          | 157.050 | 157.050 | All areas           | Intership and ship/shore. Canadian Coast Guard only.                                                                                                                                                  |
| 2021         | 21B          | -       | 161.650 | All areas           | Safety: Continuous Marine Broadcast (CMB) service.                                                                                                                                                    |





| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Area of operation | Use                                                                                                                                                  |
|--------------|--------------|---------|---------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1022         | 22A          | 157.100 | 157.100 | All areas         | Intership, ship/shore, commercial and non-commercial.<br>For communications between Canadian Coast Guard and non-Canadian Coast Guard stations only. |
| 23           | 23           | 157.150 | 161.750 | PC                | Ship/shore and public correspondence.<br>Also in the inland waters of British Columbia                                                               |
| 24           | 24           | 157.200 | 161.800 | All areas         | Ship/shore and public correspondence.                                                                                                                |
| 25           | 25           | 157.250 | 161.850 | PC                | Ship/shore and public correspondence.<br>Also assigned for operations in the Lake Winnipeg area.                                                     |
| 2025         | 25B          | -       | 161.850 | AC                | Safety: Continuous Marine Broadcast (CMB) service.                                                                                                   |
| 26           | 26           | 157.300 | 161.900 | All areas         | Ship/shore, safety and public correspondence.                                                                                                        |
| 27           | 27           | 157.350 | 161.950 | AC, GL, PC        | Ship/shore and public correspondence.                                                                                                                |
| 28           | 28           | 157.400 | 162.00  | PC                | Ship/shore, safety and public correspondence.                                                                                                        |
| 2028         | 28B          | -       | 162.000 | AC                | Safety: Continuous Marine Broadcast (CMB) service.                                                                                                   |
| 60           | 60           | 156.025 | 160.625 | PC                | Ship/shore and public correspondence.                                                                                                                |
| 1061         | 61A          | 156.075 | 156.075 | PC                | Intership and ship/shore<br>Canadian Coast Guard only.                                                                                               |
| 1061         | 61A          | 156.075 | 156.075 | EC                | Intership, ship/shore and commercial<br>Commercial fishing only.                                                                                     |
| 1062         | 62A          | 156.125 | 156.125 | PC                | Intership and ship/shore<br>Canadian Coast Guard only.                                                                                               |
| 1062         | 62A          | 156.125 | 156.125 | EC                | Intership, ship/shore and commercial<br>Commercial fishing only.                                                                                     |
| 64           | 64           | 156.225 | 160.825 | PC                | Ship/shore and public correspondence.                                                                                                                |
| 1064         | 64A          | 156.225 | 156.225 | EC                | Intership, ship/shore and commercial<br>Commercial fishing only.                                                                                     |





| (New) CH No. | (Old) CH No. | TX Freq | RX Freq | Area of operation   | Use                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------|--------------|---------|---------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1065         | 65A          | 156.275 | 156.275 |                     | Intership, ship/shore, commercial, non-commercial and safety.<br>Search and rescue and antipollution operations on the Great Lakes.<br>Towing on the Pacific coast.<br>Port operations only in the St. Lawrence river area limited to 1 watt maximum power.<br>Pleasure craft in the inland waters of Alberta, Saskatchewan and Manitooba (excluding Lake Winnipeg and the Red River). |
| 1066         | 66A          | 156.325 | 156.325 |                     | Intership, ship/shore, commercial, non-commercial, safety and ship movement.<br>Port operations only in the St. Lawrence river / Great Lakes areas limited to 1 watt maximum power.                                                                                                                                                                                                    |
| 67           | 67           | 156.375 | 156.375 | EC                  | Intership ship/shore and commercial.<br>Commercial fishing only.                                                                                                                                                                                                                                                                                                                       |
| 67           | 67           | 156.375 | 156.375 | All areas except EC | Intership, ship/shore, commercial, non-commercial, safety.<br>May also be used for communications with aircraft engaged in coordinated search and rescue and antipollution operations.                                                                                                                                                                                                 |
| 68           | 68           | 156.425 | 156.425 | All areas           | Intership, ship/shore and non-commercial.<br>For marinas and yacht clubs.                                                                                                                                                                                                                                                                                                              |
| 69           | 69           | 156.475 | 156.475 | All areas except EC | Intership, ship/shore, commercial and non-commercial.                                                                                                                                                                                                                                                                                                                                  |
| 69           | 69           | 156.475 | 156.475 | EC                  | Intership, ship/shore and commercial.<br>Commercial fishing only.                                                                                                                                                                                                                                                                                                                      |
| 71           | 71           | 156.575 | 156.575 | PC                  | Intership, ship/shore, commercial, non-commercial, safety and ship movement.                                                                                                                                                                                                                                                                                                           |
| 71           | 71           | 156.575 | 156.575 |                     | Intership, ship/shore and non-commercial.<br>For marinas and yacht clubs on the east coast and on Lake Winnipeg.                                                                                                                                                                                                                                                                       |
| 72           | 72           | 156.625 | 156.625 | EC, PC              | Intership, commercial and non-commercial<br>May be used to communicate with aircraft and helicopters in predominantly maritime support operations.                                                                                                                                                                                                                                     |
| 73           | 73           | 156.675 | 156.675 | EC                  | Intership, ship/shore and commercial.<br>Commercial fishing only.                                                                                                                                                                                                                                                                                                                      |
| 73           | 73           | 156.675 | 156.675 | All areas except EC | Intership, ship/shore, commercial, non-commercial and safety.<br>May also be used for communications with aircraft engaged in coordinated search and rescue and antipollution operations.                                                                                                                                                                                              |
| 74           | 74           | 156.725 | 156.725 | EC, PC              | Intership, ship/shore, commercial, non-commercial and ship movement.                                                                                                                                                                                                                                                                                                                   |





| (New) CH No. | (Old) CH No. | TX Freq | RX Freq  | Area of operation | Use                                                                                                                                                                                   |
|--------------|--------------|---------|----------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 77           | 77           | 156.875 | 156.875  |                   | Intership, ship/shore, safety and ship movement.<br>Pilotage on Pacific coast.<br>Port operations only in the St. Lawrence river / Great Lakes areas limited to 1 watt maximum power. |
| 1078         | 78A          | 156.925 | 156.925  | EC, PC            | Intership, ship/shore and commercial.                                                                                                                                                 |
| 1079         | 79A          | 156.975 | 156.975  | EC, PC            | Intership, ship/shore and commercial.                                                                                                                                                 |
| 1080         | 80A          | 157.025 | 157.025  | EC, PC            | Intership, ship/shore and commercial.                                                                                                                                                 |
| 1081         | 81A          | 157.075 | 157.075  |                   | Intership, ship/shore.<br>Canadian Coast Guard use only in the St. Lawrence river / Great Lakes areas.                                                                                |
| 1081         | 81A          | 157.075 | 157.075  | PC                | Intership, ship/shore and safety.<br>Canadian Coast Guard antipollution.                                                                                                              |
| 1082         | 82A          | 157.125 | 157.125  | PC                | Intership, ship/shore and safety.<br>Canadian Coast Guard use only.                                                                                                                   |
| 1082         | 82A          | 157.125 | 157.1258 |                   | Intership and ship/shore.<br>Canadian Coast Guard use only in the St. Lawrence river / Great Lakes areas.                                                                             |
| 83           | 83           | 157.175 | 161.775  | PC                | Ship/shore and safety.<br>Canadian Coast Guard use only.                                                                                                                              |
| 1083         | 83A          | 157.175 | 157.175  | EC                | Intership and ship/shore<br>Canadian Coast Guard and other government agencies.                                                                                                       |
| 2083         | 83B          | -       | 161.775  | AC, GL            | Safety: Continuous Marine Broadcast (CMB) service.                                                                                                                                    |
| 84           | 84           | 157.225 | 161.825  | PC                | Ship/shore and public correspondence.                                                                                                                                                 |
| 85           | 85           | 157.275 | 161.875  | AC, GL, NL        | Ship/shore and public correspondence.                                                                                                                                                 |
| 86           | 86           | 157.325 | 161.925  | PC                | Ship/shore and public correspondence.                                                                                                                                                 |
| 87           | 87           | 157.375 | 161.975  | AC, GL, NL        | Ship/shore and public correspondence.                                                                                                                                                 |
| 88           | 88           | 157.425 | 162.025  | AC, GL, NL        | Ship/shore and public correspondence.                                                                                                                                                 |

#### Area of operation

- **AC** — Atlantic Coast, Gulf and St. Lawrence River up to and including Montreal.
- **EC** — East Coast: includes NL, AC, GL and Eastern Arctic areas.

VHF Channels

93





- **GL** — Great Lakes: includes St. Lawrence above Montreal.
- **NL** — Newfoundland and Labrador.
- **PC** — Pacific Coast.
- **WC** — West Coast: includes PC, Western Arctic and Athabasca-Mackenzie Watershed areas.
- **All areas** — Includes East and West Coast areas.

**Note:**

1. An 'A' following a channel number indicates simplex use of the ship station transmit side of an international duplex channel. Operations are different from that of international operations on that channel.
2. Channel 16 is used for calling other stations or for distress calls.
3. A 'B' following a channel number indicates simplex use of the coast station transmit side of an international duplex channel. The channel is receive only
4. Channel 70 is used exclusively for Digital Selective Calling and is not available for regular voice communications.
5. Channel 75 and channel 76 are reserved as guard bands for channel 16 and are not available for regular voice communications.

**International Marine VHF Channels and Frequencies**

| CH No. | TX Freq | RX Freq | Single Freq | Use                                                       |
|--------|---------|---------|-------------|-----------------------------------------------------------|
| 01     | 156.050 | 160.650 |             | Public correspondence, Port operations and Ship movement. |
| 02     | 156.100 | 160.700 |             | Public correspondence, Port operations and Ship movement. |
| 03     | 156.150 | 160.750 |             | Public correspondence, Port operations and Ship movement. |
| 04     | 156.200 | 160.800 |             | Public correspondence, Port operations and Ship movement. |
| 05     | 156.250 | 160.850 |             | Public correspondence, Port operations and Ship movement. |
| 06     | 156.300 | 156.300 | x           | Intership.                                                |
| 07     | 156.350 | 160.950 |             | Public correspondence, Port operations and Ship movement. |
| 08     | 156.400 | 156.400 | x           | Intership.                                                |
| 09     | 156.450 | 156.450 | x           | Intership, Port operations and Ship movement.             |
| 10     | 156.500 | 156.500 | x           | Intership, Port operations and Ship movement.             |
| 11     | 156.550 | 156.550 | x           | Port operations and Ship movement.                        |



| CH No. | TX Freq | RX Freq | Single Freq | Use                                                                 |
|--------|---------|---------|-------------|---------------------------------------------------------------------|
| 12     | 156.600 | 156.600 | x           | Port operations and Ship movement.                                  |
| 13     | 156.650 | 156.650 | x           | Intership, Safety, Port operations and Ship movement.               |
| 14     | 156.700 | 156.700 | x           | Port operations and Ship movement.                                  |
| 15     | 156.750 | 156.750 | x           | Intership, on-board communications limited to 1 watt maximum power. |
| 16     | 156.800 | 156.800 | x           | Distress, Safety and Calling                                        |
| 17     | 156.850 | 156.850 | x           | Intership, on-board communications limited to 1 watt maximum power. |
| 18     | 156.900 | 161.500 |             | Public correspondence, Port operations and Ship movement.           |
| 19     | 156.950 | 161.550 |             | Public correspondence, Port operations and Ship movement.           |
| 1019   | 156.950 | 156.950 | x           | Port operations and Ship movement.                                  |
| 2019   | 161.550 | 161.550 | x           | Port operations and Ship movement.                                  |
| 20     | 157.000 | 161.600 |             | Public correspondence, Port operations and Ship movement.           |
| 1020   | 157.000 | 157.000 | x           | Public correspondence, Port operations and Ship movement.           |
| 2020   | 161.600 | 161.600 | x           | Public correspondence, Port operations and Ship movement.           |
| 21     | 157.050 | 161.650 |             | Public correspondence, Port operations and Ship movement.           |
| 22     | 157.100 | 161.700 |             | Public correspondence, Port operations and Ship movement.           |
| 23     | 157.150 | 161.750 |             | Public correspondence, Port operations and Ship movement.           |
| 24     | 157.200 | 161.800 |             | Public correspondence, Port operations and Ship movement.           |
| 25     | 157.250 | 161.850 |             | Public correspondence, Port operations and Ship movement.           |
| 26     | 157.300 | 161.900 |             | Public correspondence, Port operations and Ship movement.           |
| 27     | 157.350 | 161.950 |             | Public correspondence, Port operations and Ship movement.           |
| 28     | 157.400 | 162.000 |             | Public correspondence, Port operations and Ship movement.           |
| 37 (M) | 157.850 | 157.850 | x           | UK Marinas and Yacht Clubs (UK only)                                |
| 60     | 156.025 | 160.625 |             | Public correspondence, Port operations and Ship movement.           |





| CH No. | TX Freq | RX Freq | Single Freq | Use                                                       |
|--------|---------|---------|-------------|-----------------------------------------------------------|
| 61     | 156.075 | 160.675 |             | Public correspondence, Port operations and Ship movement. |
| 62     | 156.125 | 160.725 |             | Public correspondence, Port operations and Ship movement. |
| 63     | 156.175 | 160.775 |             | Public correspondence, Port operations and Ship movement. |
| 64     | 156.225 | 160.825 |             | Public correspondence, Port operations and Ship movement. |
| 65     | 156.275 | 160.875 |             | Public correspondence, Port operations and Ship movement. |
| 66     | 156.325 | 160.925 |             | Public correspondence, Port operations and Ship movement. |
| 67     | 156.375 | 156.375 | x           | Intership, Port operations and Ship movement.             |
| 68     | 156.425 | 156.425 | x           | Port operations and Ship movement.                        |
| 69     | 156.475 | 156.475 | x           | Intership, Port operations and Ship movement.             |
| 71     | 156.575 | 156.575 | x           | Port operations and Ship movement.                        |
| 72     | 156.625 | 156.625 | x           | Intership.                                                |
| 73     | 156.675 | 156.675 | x           | Intership.                                                |
| 74     | 156.725 | 156.725 | x           | Port operations and Ship movement.                        |
| 75     | 156.775 | 156.775 | x           | See Note 5.                                               |
| 76     | 156.825 | 156.825 | x           | See Note 5.                                               |
| 77     | 156.875 | 156.875 | x           | Intership.                                                |
| 78     | 156.925 | 161.525 |             | Public correspondence, Port operations and Ship movement. |
| 1078   | 156.925 | 156.925 | x           | Port operations and Ship movement.                        |
| 2078   | 161.525 | 161.525 | x           | Port operations and Ship movement.                        |
| 79     | 156.975 | 161.575 |             | Public correspondence, Port operations and Ship movement. |
| 1079   | 156.975 | 156.975 | x           | Port operations and Ship movement.                        |
| 2079   | 161.575 | 161.575 | x           | Port operations and Ship movement.                        |
| 80     | 157.025 | 161.625 |             | Public correspondence, Port operations and Ship movement. |





| CH No. | TX Freq | RX Freq | Single Freq | Use                                                       |
|--------|---------|---------|-------------|-----------------------------------------------------------|
| 81     | 157.075 | 161.675 |             | Public correspondence, Port operations and Ship movement. |
| 82     | 157.125 | 161.725 |             | Public correspondence, Port operations and Ship movement. |
| 83     | 157.175 | 161.775 |             | Public correspondence, Port operations and Ship movement. |
| 84     | 157.225 | 161.825 |             | Public correspondence, Port operations and Ship movement. |
| 85     | 157.275 | 161.875 |             | Public correspondence, Port operations and Ship movement. |
| 86     | 157.325 | 161.925 |             | Public correspondence, Port operations and Ship movement. |
| 87     | 157.375 | 157.375 | x           | Port operations and Ship movement.                        |
| 88     | 157.425 | 157.425 | x           | Port operations and Ship movement.                        |
| M2     | 161.425 | 161.425 | x           | UK Marinas and Yacht Clubs (UK only)                      |
| AIS 1  | 161.975 | 161.975 | x           | Automatic Identification System (AIS)                     |
| AIS 2  | 162.025 | 162.025 | x           | Automatic Identification System (AIS)                     |

Please be aware that:

- Intership channels are for communications between ship stations. Intership communications should be restricted to channels 6, 8, 72 and 77. If these are not available, the other channels marked for Intership may be used.
- Channel 70 is used exclusively for Digital Selective Calling (DSC) and is not available for regular voice communications.
- Channels AIS 1 and AIS 2 are only supported by VHF products which include an AIS receiver.

**Note:**

1. Channel 06 may also be used for communications between ship stations and aircraft engaged in coordinated search and rescue operations. Ship stations should avoid harmful interference to such communications on channel 06 as well as to communications between aircraft stations, ice breakers and assisted ships during ice seasons.
2. Within the European Maritime Area and in Canada, channels 10, 67 and 73 may also be used by the individual administrations concerned for communication between ship stations, aircraft stations and participating land stations engaged in coordinated search and rescue and anti-pollution operations in local areas. Channel 10 or 73 (depending on location) are also used for the broadcast of Marine Safety Information by the Maritime and Coast Guard Agency in the UK only.
3. Channel 13 is designated for use on a worldwide basis as a navigation safety communication channel, primarily for intership navigation safety communications.
4. Channels 15 and 17 may also be used for on-board communications provided the effective radiated power does not exceed 1 Watt.
5. The use of channels 75 and 76 should be restricted to navigation related communications only and all precautions should be taken to avoid harmful interference to channel 16. Transmit power is limited to 1 Watt.





#### Private Channels (Europe only)

| Country                           | Channel Designations | TX Freq | RX Freq | Channel Use |
|-----------------------------------|----------------------|---------|---------|-------------|
| Belgium                           | 96                   | 162.425 | 162.425 | Marina      |
| Denmark                           | L1                   | 155.500 | 155.500 | Pleasure    |
|                                   | L2                   | 155.525 | 155.525 | Pleasure    |
| Finland, Norway & Sweden          | L1                   | 155.500 | 155.500 | Pleasure    |
|                                   | L2                   | 155.525 | 155.525 | Pleasure    |
|                                   | L3                   | 155.650 | 155.650 | Pleasure    |
| Holland (Netherlands)             | 31                   | 157.550 | 162.150 | Marina      |
|                                   | 37                   | 157.850 | 157.850 | Leisure     |
| Denmark, Finland, Norway & Sweden | F1                   | 155.625 | 155.625 | Fishing     |
|                                   | F2                   | 155.775 | 155.775 | Fishing     |
|                                   | F3                   | 155.825 | 155.825 | Fishing     |
| United Kingdom                    | M1                   | 157.850 | 157.850 | Marina      |
|                                   | M2                   | 161.425 | 161.425 | Marina      |

The national channels listed above have been allocated for the specific use within the countries listed. To use these channels you must have the appropriate license.

#### WX Channels (North America only)

| Weather Channel | Frequency in MHz |
|-----------------|------------------|
| WX1             | 162.550          |
| WX2             | 162.400          |
| WX3             | 162.475          |
| WX4             | 162.425          |
| WX5             | 162.450          |
| WX6             | 162.500          |

| Weather Channel | Frequency in MHz |
|-----------------|------------------|
| WX7             | 162.525          |
| WX8             | 161.650          |
| WX9             | 161.775          |
| WX10            | 163.275          |





## Appendix E Phonetic alphabet

To help make call letters more clearly understood, and to assist in spelling out similar sounding or unfamiliar word, radiotelephone users employ the international phonetic alphabet.

|          |         |          |          |
|----------|---------|----------|----------|
| <b>A</b> | ALPHA   | <b>N</b> | NOVEMBER |
| <b>B</b> | BRAVO   | <b>O</b> | OSCAR    |
| <b>C</b> | CHARLIE | <b>P</b> | PAPA     |
| <b>D</b> | DELTA   | <b>Q</b> | QUEBEC   |
| <b>E</b> | ECHO    | <b>R</b> | ROMEO    |
| <b>F</b> | FOXTROT | <b>S</b> | SIERRA   |
| <b>G</b> | GOLF    | <b>T</b> | TANGO    |
| <b>H</b> | HOTEL   | <b>U</b> | UNIFORM  |
| <b>I</b> | INDIA   | <b>V</b> | VICTOR   |
| <b>J</b> | JULIET  | <b>W</b> | WHISKEY  |
| <b>K</b> | KILO    | <b>X</b> | X-RAY    |
| <b>L</b> | LIMA    | <b>Y</b> | YANKEE   |
| <b>M</b> | MIKE    | <b>Z</b> | ZULU     |





## Appendix F Prowords

Prowords can be used to simplify and speed up radio communications.

| Proword                | Meaning                                                                         |
|------------------------|---------------------------------------------------------------------------------|
| <b>ACKNOWLEDGE</b>     | Have you received and understood?                                               |
| <b>CONFIRM</b>         | Is that correct?                                                                |
| <b>CORRECTION</b>      | An error has been made?                                                         |
| <b>I SAY AGAIN</b>     | I repeat (e.g. important information).                                          |
| <b>I SPELL</b>         | Phonetically spelling of the word.                                              |
| <b>OUT</b>             | End of communication.                                                           |
| <b>OVER</b>            | I have completed this part of the message and am inviting you to reply.         |
| <b>RECEIVED</b>        | Receipt acknowledgement.                                                        |
| <b>SAY AGAIN</b>       | Repeat your message.                                                            |
| <b>STATION CALLING</b> | Used when a station is uncertain of the identity of a station which is calling. |



## Index

### A

|                           |    |
|---------------------------|----|
| AIS receiver .....        | 56 |
| Applicable products ..... | 14 |
| ATIS ID .....             | 16 |

### B

|              |    |
|--------------|----|
| Base station |    |
| Power .....  | 34 |
| Brightness   |    |
| Shared ..... | 37 |

### C

|                                    |        |
|------------------------------------|--------|
| Cable bend radius .....            | 26     |
| Cable protection .....             | 26     |
| Cable routing .....                | 20, 26 |
| Cleaning .....                     | 66     |
| Compass safe distance .....        | 20     |
| Connecting SeaTalkng® cables ..... | 30     |
| Connection                         |        |
| Battery .....                      | 28     |
| Distribution panel .....           | 28     |
| Connections .....                  | 27     |
| DeviceNet .....                    | 30     |
| General cabling guidance .....     | 26     |
| GNSS antenna .....                 | 31     |
| GPS antenna .....                  | 31     |
| Loud hailer .....                  | 31     |
| NMEA 0183 .....                    | 31     |
| NMEA 2000 .....                    | 30     |
| Overview .....                     | 26     |
| Passive speaker .....              | 30     |
| Raymic handset .....               | 29     |
| SeaTalkng .....                    | 30     |
| VHF antenna .....                  | 31     |
| Contact details .....              | 74     |
| Controls                           |        |
| Handset .....                      | 34     |
| Raymic .....                       | 34     |

### D

|                       |    |
|-----------------------|----|
| Dimensions            |    |
| Base station .....    | 21 |
| Passive speaker ..... | 21 |
| Raymic handset .....  | 22 |
| Documentation .....   | 14 |

### E

|                                     |    |
|-------------------------------------|----|
| Electromagnetic Compatibility ..... | 21 |
| EMC .....                           | 21 |

### F

|              |    |
|--------------|----|
| FCC ID ..... | 15 |
|--------------|----|

### G

|                    |    |
|--------------------|----|
| GNSS .....         | 42 |
| GNSS antenna ..... | 14 |
| GPS .....          | 42 |
| Data output .....  | 72 |
| GPS antenna .....  | 14 |

### H

|             |    |
|-------------|----|
| Handset     |    |
| Power ..... | 34 |

### I

|                                |    |
|--------------------------------|----|
| IC ID .....                    | 15 |
| Installation                   |    |
| Best practice .....            | 29 |
| EMC guidelines .....           | 21 |
| surface requirements .....     | 20 |
| Ventilation .....              | 20 |
| VHF antenna requirements ..... | 20 |
| Intercom. ....                 | 63 |
| Interference                   |    |
| Compass .....                  | 20 |
| Electrical .....               | 20 |



|          |    |
|----------|----|
| RF ..... | 20 |
|----------|----|

## L

|                                   |    |
|-----------------------------------|----|
| Licensing                         |    |
| Additional information .....      | 15 |
| Europe and ROW Requirement .....  | 15 |
| Industry Canada Requirement ..... | 15 |
| Requirement .....                 | 15 |
| USA Requirement .....             | 15 |
| Loud hailer .....                 | 62 |

## M

|                       |    |
|-----------------------|----|
| MMSI .....            | 16 |
| Where to apply .....  | 84 |
| Mounting              |    |
| Base station .....    | 22 |
| Passive speaker ..... | 24 |
| Raymic handset .....  | 23 |
| MPE .....             | 20 |

## N

|                 |    |
|-----------------|----|
| Network         |    |
| Selection ..... | 39 |
| NMEA            |    |
| Settings        |    |
| Baud rate ..... | 39 |
| NMEA 0183       |    |
| Sentences ..... | 81 |
| NMEA 2000       |    |
| PGNs .....      | 82 |

## P

|                          |    |
|--------------------------|----|
| Parts supplied .....     | 16 |
| Power .....              | 27 |
| Battery connection ..... | 28 |
| Distribution .....       | 27 |
| Distribution panel ..... | 28 |

|                             |    |
|-----------------------------|----|
| Grounding .....             | 29 |
| Sharing a breaker .....     | 28 |
| Power cable extension ..... | 28 |
| Private channels            |    |
| Europe .....                | 98 |
| Product                     |    |
| Documentation .....         | 14 |
| Features .....              | 14 |
| Overview .....              | 15 |
| Product support .....       | 74 |

## R

|                                         |    |
|-----------------------------------------|----|
| Radio Frequency (RF) interference ..... | 20 |
|-----------------------------------------|----|

## S

|                                            |    |
|--------------------------------------------|----|
| SeaTalkng ®                                |    |
| Connecting cables .....                    | 30 |
| Securing cables .....                      | 26 |
| Service Center .....                       | 74 |
| Shared brightness .....                    | 37 |
| Software update .....                      | 17 |
| Raymic .....                               | 17 |
| Software version .....                     | 17 |
| Specification                              |    |
| AIS Receiver .....                         | 78 |
| Environmental .....                        | 78 |
| GNSS (GPS) .....                           | 78 |
| Power .....                                | 78 |
| Receiver .....                             | 78 |
| Speakers .....                             | 78 |
| VHF Transmitter .....                      | 78 |
| Strain relief, <i>See</i> Cable protection |    |

## T

|                               |    |
|-------------------------------|----|
| Technical specification ..... | 77 |
| Technical support .....       | 74 |
| Troubleshooting .....         | 68 |
| GNSS .....                    | 72 |
| GPS .....                     | 72 |
| Power .....                   | 69 |



## V

|                     |    |
|---------------------|----|
| VHF antenna .....   | 14 |
| VHF channels        |    |
| Canada .....        | 89 |
| International ..... | 94 |
| United States ..... | 86 |

## W

|                     |    |
|---------------------|----|
| Warranty .....      | 74 |
| Water ingress ..... | 20 |
| Waterproofing ..... | 20 |
| WX channels         |    |
| North America ..... | 98 |



**Owner notes:**



**Owner notes:**





**Owner notes:**





**Raymarine**

Marine House, Cartwright Drive, Segensworth, Fareham, Hampshire.  
PO15 5RJ, United Kingdom.

Tel: +44 (0)1329 246 700

[www.raymarine.com](http://www.raymarine.com)

**Raymarine®**

a brand by  **FLIR®**