



HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

PRODUCT COMPLIANCE TEAM
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525

CERTIFICATION

Manufacture;
IMAGEQUEST CO., LTD.

SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI,
KYOUNGKI-DO, 467-701, KOREA

IMAGEQUEST FRN : 0005-8664-39

Date of Issue: APRIL 8, 2002

Test Report No.: HCT-F02-0402

**Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.**

HCT FRN : 0005-8664-21

FCC ID :

PJIC17F15090

MODEL / TYPE :

Q790

FCC Rule Part(s):	Part 15 & 2; ET Docket 95-19
Classification:	FCC Class B Peripheral Device (JBP)
Standard(s):	FCC Class B: 1998 (CISPR 22)
Equipment(EUT) Type:	17" CRT Monitor
Max Resolution:	1600 X 1200 Non-interlaced (@93.8KHz/ 75Hz)
Port/ Connector(s)	15-pin D-sub VGA connector

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).

Report prepared by : Ki-Soo Kim
Manager of EMC Tech. Part



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested System Details.....	4
1.4 Test Methodology.....	4
1.5 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 Justification.....	5
2.2 EUT Exercise Software.....	5
2.3 Cable Description.....	6
2.4 Noise Suppression Parts on Cable.....	6
2.5 Equipment Modifications.....	7
2.6 Configuration of Tested System.....	8
3. PRELIMINARY TESTS.....	9
3.1 Power line Conducted Emissions Tests.....	9
3.2 Radiated Emissions Tests.....	9
4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	9
4.1 Conducted Emission Tests.....	10
4.2 Radiated Emission Tests.....	11
5. FIELD STRENGTH CALCULATION.....	12
6. LIST OF TEST EQUIPMENT	13

ATTACHMENT A	ID Label / Location Info.
ATTACHMENT B.....	External Photos.
ATTACHMENT C	Block Diagram..
ATTACHMENT D	Test Setup Photos.
ATTACHMENT E	User's Manual.
ATTACHMENT F	Internal Photos.

1. GENERAL INFORMATION

1.1 Product Description

The ImageQuest CO., LTD. Model Q790 (referred to as the EUT in this report) is a 17" CRT Monitor with HOR. Freq. 97KHz (Max) and Resolution of 1600 X 1200 (Non-Interlaced). Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	PLASTIC
LIST OF EACH OSC. OR XTAL. FREQ.(FREQ. 1MHz)	12MHz
POWER REQUIREMENT	100 - 240 VAC 1.2A 60/50Hz
NUMBER OF LAYERS	MAIN BOARD 1 LAYER CRT BOARD 1 LAYER OSD BOARD 1 LAYER
MAX. RESOLUTION	1600 X 1200 NON-INTERLACED(@93.8KHz/ 75Hz)
H-SYNC FREQUENCY RANGE	30KHz 97KHz
V-SYNC FREQUENCY RANGE	50Hz 150Hz
CRT TYPE	17" (CRT Type :M41QCJ761X172)

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
MONITOR (EUT)	IMAGEQUEST CO., LTD.	Q790	PJIC17F15090	HOST
PC(HOST)	H/P	DTPC-17	DoC	N/A
KEY BOARD	H/P	SK-2501-2D-K	GYUR385K	HOST
PRINTER	H/P	HP895C	DoC	HOST
MODEM	3COM CORPORATION	56K FAX MODEM	DoC	HOST
VIDEO CARD	MATROX	MIL2P/4G	DoC	HOST
MOUSE	H/P	M-S34	DZL211029	HOST

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 10 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, MAEKOK-RI, HOBUP-MYUN, ICHON-SI, KYOUNGKI-DO, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24, 2000 (Confirmation Number: EA90661)

2.SYSTEM TEST CONFIGURATION

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

DEVICE TYPE	MANUFACTURE	MODEL/PART NUMBER
MAIN BOARD	ImageQuest CO., Ltd.	3040100892
CRT BOARD	ImageQuest CO., Ltd.	3040100892
OSD BOARD	ImageQuest CO., Ltd.	3040100892

2.2 EUT exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

2.3 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
MONITOR(EUT)	N	Y	1.8(P), 1.5(D)
PC(HOST)	N	N/A	1.8(P)
PRINTER	N	Y	2.0(P),1.8(D)
KEY BOARD	N/A	Y	2.0(D)
MODEM	N	Y	2.0(P),0.8(D)
MOUSE	N/A	Y	1.8(D)

2.4 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MONITOR(EUT)	Y	PC END	Y	PC END
PRINTER	Y	PC END	Y	BOTH END
KEY BOARD	Y	PC END	Y	PC END
MODEM	Y	PC END	Y	BOTH END
MOUSE	N	N/A	Y	PC END

2.5 Equipment Modifications

N/A


2.6 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were connected to another LISN.

Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating condition. Final Radiated Emission tests were conducted at 10 meter open area test site.

[Configuration of Tested System]

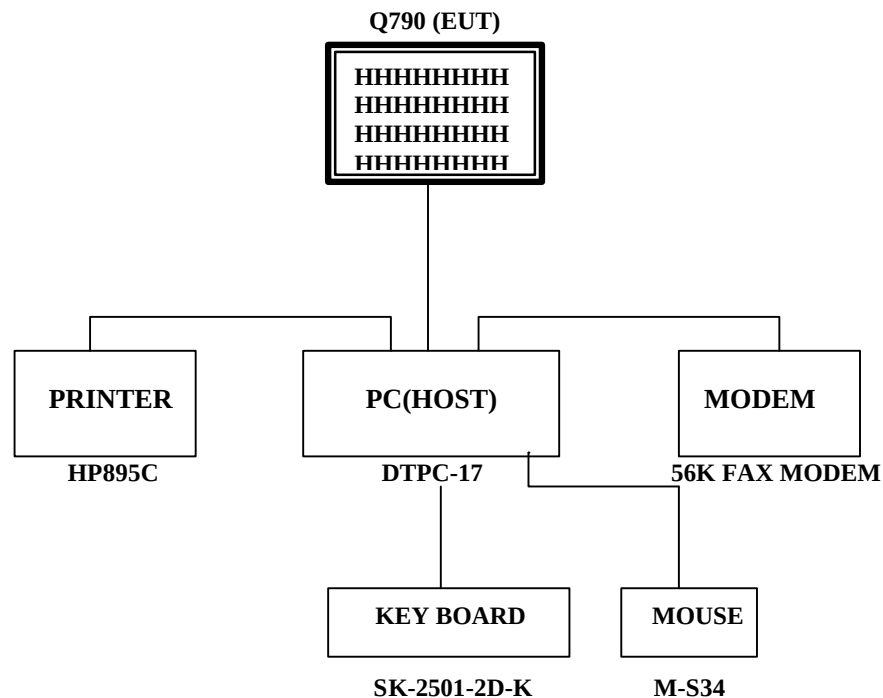

3. PRELIMINARY TESTS

3.1 AC Power line Conducted Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1600 X 1200 Non-Interlaced (93.8KHz/75Hz)	X
	1280 X 1024 Non-Interlaced (91.1KHz/85Hz)	
	1024 x 768 Non-Interlaced (68.67KHz/85Hz)	
	800 x 600 Non-Interlaced (63.70KHz/120Hz))	
	640 x 480 Non-Interlaced (43.27KHz/85Hz)	

4.2 Radiated Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1600 X 1200 Non-Interlaced (93.8KHz/75Hz)	X
	1280 X 1024 Non-Interlaced (91.1KHz/85Hz)	
	1024 x 768 Non-Interlaced (68.67KHz/85Hz)	
	800 x 600 Non-Interlaced (63.70KHz/120Hz))	
	640 x 480 Non-Interlaced (43.27KHz/85Hz)	

Tested by Kyoung-Houn Seo / Engineer


Date : MARCH 18, 2002

HYUNDAI C-TECH. CO., LTD.
EMC TEST LAB.

EUT: Q790
Manufacturer: IMAGEQUEST
Operating Condition: 1600 X 1200 75Hz
Test Site: Shield Room
Operator: KH-SEO
Test Specification: EN55022 CLASS B
Comment: N
Start of Test: 3/29/02 / 11:31:18AM

SCAN TABLE: "EN 55022 Voltage"

Short Description: EN 55022 Voltage
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 5.0 kHz MaxPeak 10.0 ms 9 kHz old-C/E FACTOR
Average

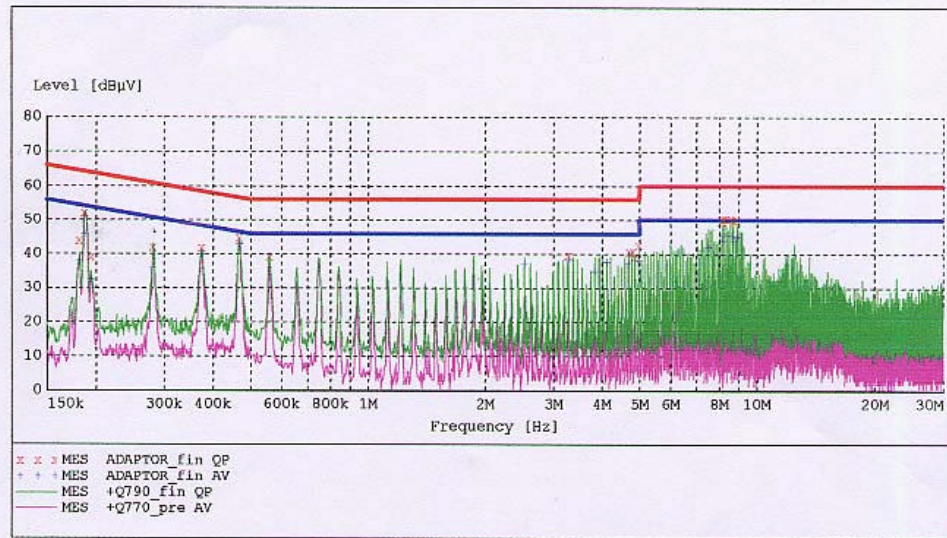**MEASUREMENT RESULT: "ADAPTOR_fin QP"**

3/29/02 11:29AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.182000	44.10	1.0	64	20.3	1	---
0.188000	52.10	1.0	64	12.0	1	---
0.195000	39.10	1.0	64	24.7	1	---
0.281000	42.10	1.0	61	18.7	1	---
0.375000	41.90	1.0	58	16.5	1	---
0.468000	44.70	1.0	57	11.8	1	---
0.560000	39.20	1.0	56	16.8	1	---
3.285000	39.60	1.4	56	16.4	1	---
4.695000	40.80	1.5	56	15.2	1	---
4.785000	40.70	1.5	56	15.3	1	---
4.885000	39.10	1.6	56	16.9	1	---
4.975000	42.60	1.6	56	13.4	1	---
8.165000	49.70	1.6	60	10.3	1	---
8.260000	50.60	1.6	60	9.4	1	---

MEASUREMENT RESULT: "ADAPTOR_fin QP"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
8.355000	50.60	1.6	60	9.4	1	---
8.635000	50.60	1.6	60	9.4	1	---
8.730000	49.80	1.6	60	10.2	1	---
8.915000	50.20	1.7	60	9.8	1	---

MEASUREMENT RESULT: "ADAPTOR_fin AV"

3/29/02 11:29AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.182000	37.90	1.0	54	16.5	1	---
0.188000	46.00	1.0	54	8.2	1	---
0.195000	32.70	1.0	54	21.1	1	---
0.281000	35.90	1.0	51	14.9	1	---
0.375000	40.10	1.0	48	8.3	1	---
0.468000	43.00	1.0	47	3.6	1	---
2.535000	37.10	1.3	46	8.9	1	---
3.285000	37.90	1.4	46	8.1	1	---
3.850000	35.00	1.5	46	11.0	1	---
4.130000	37.70	1.5	46	8.3	1	---
4.695000	37.50	1.5	46	8.5	1	---
4.975000	38.20	1.6	46	7.8	1	---
7.510000	42.10	1.6	50	7.9	1	---
8.165000	44.00	1.6	50	6.0	1	---
8.260000	45.70	1.6	50	4.3	1	---
8.635000	45.40	1.6	50	4.6	1	---
8.730000	44.00	1.6	50	6.0	1	---
8.915000	45.20	1.7	50	4.8	1	---

HYUNDAI C-TECH. CO., LTD.
EMC TEST LAB.

EUT: Q790
 Manufacturer: IMAGEQUEST
 Operating Condition: 1600 X 1200 75Hz
 Test Site: Shield Room
 Operator: KH-SEO
 Test Specification: EN55022 CLASS B
 Comment: H
 Start of Test: 3/29/02 / 11:19:57AM

SCAN TABLE: "EN 55022 Voltage"

Short Description:			EN 55022 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 150.0 kHz	Frequency 30.0 MHz	Width 5.0 kHz	MaxPeak	10.0 ms	9 kHz	old-C/E FACTOR
			Average			

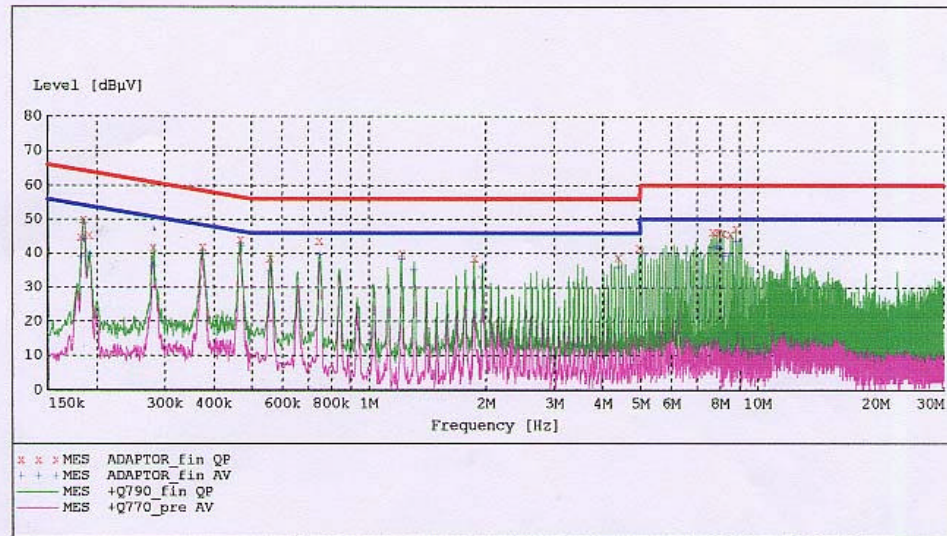

MEASUREMENT RESULT: "ADAPTOR_fin QP"

3/29/02 11:23AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.183000	44.90	1.0	64	19.5	1	---
0.186000	49.90	1.0	64	14.3	1	---
0.192000	45.40	1.0	64	18.5	1	---
0.281000	41.70	1.0	61	19.1	1	---
0.376000	41.80	1.0	58	16.6	1	---
0.470000	44.00	1.0	57	12.6	1	---
0.560000	38.70	1.0	56	17.3	1	---
0.750000	43.70	1.0	56	12.3	1	---
1.220000	40.10	1.1	56	15.9	1	---
1.880000	38.70	1.2	56	17.3	1	---
4.410000	38.80	1.5	56	17.2	1	---
4.975000	41.70	1.6	56	14.3	1	---
7.695000	46.30	1.6	60	13.7	1	---
7.885000	46.30	1.6	60	13.7	1	---

MEASUREMENT RESULT: "ADAPTOR_fin QP"
(continued)

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
7.980000	46.40	1.6	60	13.6	1	---
8.165000	45.90	1.6	60	14.1	1	---
8.540000	45.60	1.6	60	14.4	1	---
8.825000	47.30	1.7	60	12.7	1	---

MEASUREMENT RESULT: "ADAPTOR_fin AV"
3/29/02 11:23AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.183000	39.20	1.0	54	15.1	1	---
0.186000	44.30	1.0	54	9.9	1	---
0.192000	39.30	1.0	54	14.6	1	---
0.281000	36.40	1.0	51	14.4	1	---
0.376000	39.90	1.0	48	8.5	1	---
0.470000	42.40	1.0	47	4.1	1	---
0.560000	35.10	1.0	46	10.9	1	---
0.750000	39.70	1.0	46	6.3	1	---
1.220000	38.40	1.1	46	7.6	1	---
1.315000	35.30	1.1	46	10.7	1	---
1.970000	36.10	1.3	46	9.9	1	---
4.410000	36.10	1.5	46	9.9	1	---
7.695000	41.70	1.6	50	8.3	1	---
7.885000	42.30	1.6	50	7.7	1	---
7.980000	41.40	1.6	50	8.6	1	---
8.165000	39.30	1.6	50	10.7	1	---
8.540000	40.20	1.6	50	9.8	1	---
8.825000	43.60	1.7	50	6.4	1	---

4.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Humidity Level : 30 % Temperature : 19
 Limit apply to : CISPR 22
 Type of Tests : CLASS B
 Date : MARCH 26, 2002
 Result : PASSED BY -3.0 dB

=====

EUT : 17" CRT MONITOR
 Operating Condition : 1600 X 1200 Non-Interlaced (Hf :93.8 kHz, Vf : 75 Hz)
 Detector : CISPR Quasi-Peak (6 dB Bandwidth : 120 KHz)

Frequency MHz	Reading dBuV/m	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
33.4	7.47	18.43	0.90	V	26.8	30.0	-3.2
50.3	13.52	10.88	1.50	H	25.9	30.0	-4.1
67.6	17.40	6.30	1.70	V	25.4	30.0	-4.6
102.2	13.87	10.93	2.10	V	26.9	30.0	-3.1
138.7	10.11	14.39	2.50	V	27.0	30.0	-3.0
221.0	1.48	17.02	3.30	H	21.8	30.0	-8.2
399.8	12.68	16.52	4.20	V	33.4	37.0	-3.6
439.3	10.61	17.14	4.50	H	32.3	37.0	-4.8
459.3	9.27	17.83	4.70	H	31.8	37.0	-5.2
525.8	9.45	18.95	5.10	V	33.5	37.0	-3.5
606.3	7.06	20.84	5.80	V	33.7	37.0	-3.3
632.5	5.44	21.36	5.90	H	32.7	37.0	-4.3

NOTE:

- 1.All video modes and resolutions were investigated and the worst-case emissions are reported.
- 2.Other video modes & resolution were tested and found to be in compliance.

Measured by : Kyoung-Houn Seo / Engineer

Date : MARCH 26, 2002

5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

6. LIST OF TEST EQUIPMENT

<u>TYPE</u>	<u>MANUFACTURE</u>	<u>MODEL</u>	<u>CAL. DATE</u>
EMI Test Receiver	Rohde & Schwarz	ESH3	2001.6.29
EMI Test Receiver	Rohde & Schwarz	ESVP	2002.2.14
EMI Test Receiver	Rohde & Schwarz	ESI40	2001.11.5
EMI Test Receiver	Rohde & Schwarz	ESVS30	2002.3.6
Spectrum Monitor	Rohde & Schwarz	EZM	N.A
Graphic Plotter	Rohde & Schwarz	DOP2	N.A
Printer	Rohde & Schwarz	PDN	N.A
Spectrum Analyzer	H.P	8591EM	2001.7.11
LISN	EMCO	3825/2	2002.2.7
LISN	Rohde & Schwarz	ESH2-Z5	2001.8.12
Amplifier	Hewlett-Packard	8447E	2002.3.2
Dipole Antennas	Rohde & Schwarz	VHAP	2001.6.28
Dipole Antennas	Rohde & Schwarz	UHAP	2001.6.28
Biconical Antenna	Rohde & Schwarz	BBA-9106	2001.6.28
Log-Periodic Antenna	Rohde & Schwarz	UHALP-9107	2001.6.26
Antenna Position Tower	EMCO	1051-12	N.A
Turn Table	EMCO	1060-06	N.A
Line Filter	KEENE	ULW 2X30-60	N.A
Power Analyzer	Voltech	PM 3300	2002.2.20
Reference Network Impedance	Voltech	IEC 555	N.A
AC Power Source	PACIFIC	Magnetic Module	N.A
AC Power Source	PACIFIC	360AMX	N.A