
OCTOBER 28, 2003
Federal Communications Commission
Equipment Approval Services
7435 Oakland Mills Road
Columbia, MD 21046

SUBJECT : ImageQuest Co., Ltd.
FCC ID: PJIL19A0D061
Class II permissive change
Orig. Grant Date: June 17, 2003

Gentlemen:

Transmitted herewith, on behalf of ImageQuest Co., Ltd. is an application for a Class II Permissive Change Certification of the following 17-inch LCD Monitor:

FCC ID : PJIL19A0D061
Model/Type : L19T/L19A0D061

The device is identical to the previously certified monitor except for the following:

1. Alternate Video Decoder : VPX3226E --> VPC3230D
2. Add Chip (Close Caption & V-Chip) : Z86129

Attached is the applicant's Cover Letter, External/Internal Photos, Test Set-Up Photos, FCC ID & Label Location, User Manual, Block Diagram and Test Report.

Should you have any questions or comments concerning the above, please contact the undersigned.



KI SOO KIM
EMC MAMAGER

cc: Mr. HEE JUNG KIM ----- R & D CENTER / MANAGER

• Solution for EMI

We, ImageQuest CO.,LTD. , announce that all modifications will be incorporated into each unit sold in the U.S.

1. Attach a gasket on the Main Board and Main Frame to contact a LCD panel
2. Attach a gasket on the Audio PCB to contact a stand
3. Attach a gasket and aluminum foil between Main Frame and LCD panel
4. Apply a ferrite Core to the Audio Cable, Multi cable and OSD board signal cable

(Please refer to next page of the photographs for Solution for EMI)



ImageQuest CO.,LTD.

2003. 10. 28


**R & D CENTER / MANAGER
HEE JUNG KIM**




1. Attach a gasket on the Main Board and Main Frame to contact a LCD panel

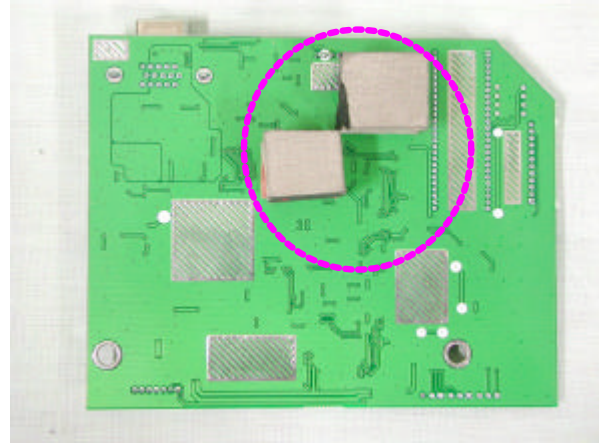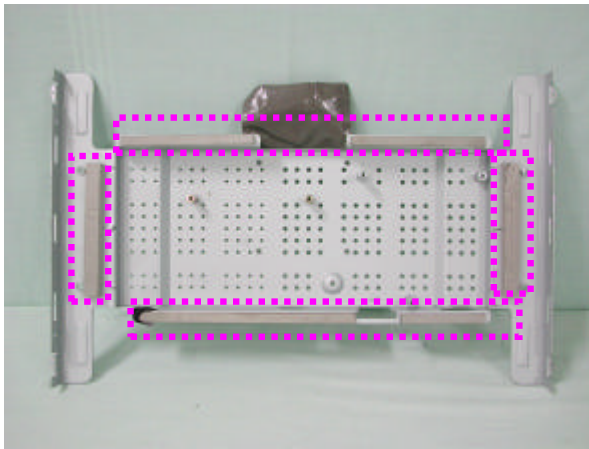

2. Attach a gasket on the Audio PCB to contact a stand

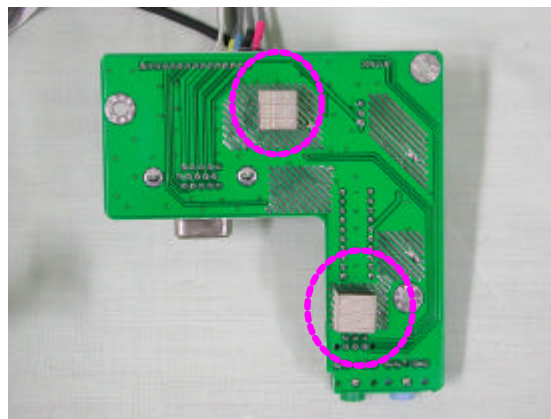

3. Attach a gasket and aluminum foil between Main Frame and LCD panel

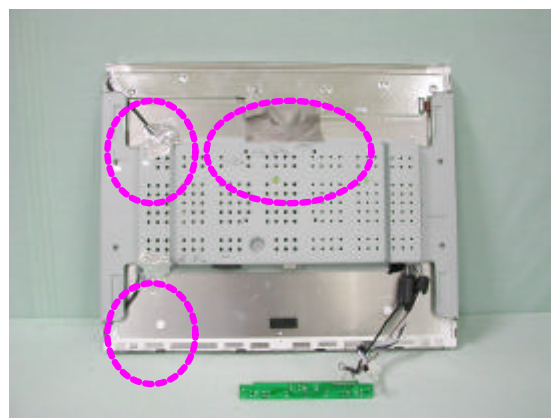

4. Apply a ferrite Core to the Audio Cable, Multi cable and OSD board signal cable

