

## HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

PRODUCT COMPLIANCE TEAM  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA  
TEL : +82 31 639 8518 FAX : +82 31 639 8525 www.hctec.co.kr

# CERTIFICATION

|                                                                                                                                                                              |                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Manufacture;</b><br><br><b>IMAGEQUEST CO., LTD.</b><br>SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI,<br>KYOUNKI-DO, 467-701, KOREA<br><br><b>IMAGEQUEST FRN : 0005-8664-39</b> | <b>Date of Issue: JUNE 19, 2002</b><br><br><b>Test Report No.: HCT-F02-0607</b><br><br><b>Test Site: HYUNDAI CALIBRATION &amp; CERTIFICATION<br/>TECHNOLOGIES CO., LTD.</b><br><b>HCT FRN : 0005-8664-21</b> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**FCC ID :**

**PJISLIMVIEW727**

**MODEL / TYPE :**

**SlimView 727**

|                             |                                                                               |
|-----------------------------|-------------------------------------------------------------------------------|
| <b>FCC Rule Part(s):</b>    | <b>Part 15 &amp; 2; ET Docket 95-19</b>                                       |
| <b>Classification:</b>      | <b>FCC Class B Peripheral Device (JBP)</b>                                    |
| <b>Standard(s):</b>         | <b>FCC Class B: 1998 (CISPR 22)</b>                                           |
| <b>Equipment(EUT) Type:</b> | <b>17" LCD Monitor</b>                                                        |
| <b>Max Resolution:</b>      | <b>1280 X 1024 (@80KHz/ 75Hz)</b>                                             |
| <b>Port/ Connector(s)</b>   | <b>15-pin D-sub VGA connector, USB 1 upstream port and 4 downstream ports</b> |
| <b>LCD PANEL</b>            | <b>Hyundai Display Technology, INC (HT17E11-300)</b>                          |

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C.853(a).



Report prepared by : Ki-Soo Kim  
Manager of EMC Tech. Part



## TABLE OF CONTENTS

|                                                                    | PAGE      |
|--------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                                 | <b>3</b>  |
| 1.1 Product Description.....                                       | 3         |
| 1.2 Related submittal(s)/Grant(s).....                             | 3         |
| 1.3 Tested System Details.....                                     | 4         |
| 1.4 Test Methodology.....                                          | 4         |
| 1.5 Test Facility.....                                             | 4         |
| <b>2. SYSTEM TEST CONFIGURATION.....</b>                           | <b>5</b>  |
| 2.1 Justification.....                                             | 5         |
| 2.2 EUT Exercise Software.....                                     | 5         |
| 2.3 Cable Description.....                                         | 5         |
| 2.4 Noise Suppression Parts on Cable.....                          | 6         |
| 2.5 Equipment Modifications.....                                   | 6         |
| 2.6 Configuration of Tested System.....                            | 7         |
| <b>3. PRELIMINARY TESTS.....</b>                                   | <b>8</b>  |
| 3.1 Power line Conducted Emissions Tests.....                      | 9         |
| 3.2 Radiated Emissions Tests.....                                  | 9         |
| <b>4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....</b> | <b>9</b>  |
| 4.1 Conducted Emission Tests.....                                  | 10        |
| 4.2 Radiated Emission Tests.....                                   | 11        |
| <b>5. FIELD STRENGTH CALCULATION.....</b>                          | <b>12</b> |
| <b>6. LIST OF TEST EQUIPMENT .....</b>                             | <b>13</b> |

|                           |                                  |
|---------------------------|----------------------------------|
| <b>ATTACHMENT A .....</b> | <b>ID Label / Location Info.</b> |
| <b>ATTACHMENT B.....</b>  | <b>External Photos.</b>          |
| <b>ATTACHMENT C .....</b> | <b>Block Diagram..</b>           |
| <b>ATTACHMENT D .....</b> | <b>Test Setup Photos.</b>        |
| <b>ATTACHMENT E .....</b> | <b>User's Manual.</b>            |
| <b>ATTACHMENT F .....</b> | <b>Internal Photos.</b>          |

# 1. GENERAL INFORMATION

## 1.1 Product Description

The ImageQuest CO., LTD. Model SlimView 727 (referred to as the EUT in this report) is a 17" LCD Monitor HOR. Freq. 80KHz w/max. Resolution of 1280 X 1024 . Product specification information described herein was obtained from product data sheet or user's manual.

|                                               |                                                                                          |
|-----------------------------------------------|------------------------------------------------------------------------------------------|
| CHASSIS TYPE                                  | PLASTIC                                                                                  |
| LIST OF EACH OSC. OR XTAL. FREQ.(FREQ.≥ 1MHz) | 12MHz , 12MHz , 30MHz                                                                    |
| POWER REQUIREMENT                             | 100-240V AC 1.2A 60 / 50 Hz                                                              |
| NUMBER OF LAYERS                              | MAIN BOARD 4 LAYER<br>OSD BOARD 1 LAYER<br>POWER BOARD 2 LAYER<br>INVERTER BOARD 2 LAYER |
| MAX. RESOLUTION                               | 1280 X 1024 (@80KHz/ 75 Hz)                                                              |
| H-SYNC FREQUENCY RANGE                        | 31.0KHz ~ 80.0KHz                                                                        |
| V-SYNC FREQUENCY RANGE                        | 56Hz ~ 75Hz                                                                              |
| LCD TYPE                                      | 17" ( LCD Type NO : HT17E11-300)                                                         |

## 1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

### 1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

| DEVICE TYPE     | MANUFACTURER               | MODEL NUMBER                    | FCC ID / DoC   | CONNECTED TO |
|-----------------|----------------------------|---------------------------------|----------------|--------------|
| MONITOR (EUT)   | IMAGEQUEST CO., LTD.       | SlimView 727                    | PJISLIMVIEW727 | HOST         |
| PC(HOST)        | H/P                        | KR14111606                      | DoC            | N/A          |
| VIDEO CARD      | NVIDIA                     | NVIDIA GeForce MX 200           | DoC            | HOST         |
| KEY BOARD       | H/P                        | 5181                            | DoC            | HOST         |
| MOUSE           | IntelliMouse               | Optical USB and PS/2 Compatible | DoC            | HOST         |
| PRINTER         | H/P                        | C6410A                          | DoC            | HOST         |
| MODEM           | 3COM CORPORATION           | 56K FAX MODEM                   | DoC            | HOST         |
| USB MOUSE       | LOGITECH                   | M-BE55                          | DoC            | EUT          |
| USB MOUSE       | IntelliMouse               | Optical USB and PS/2 Compatible | DoC            | EUT          |
| USB FLASH DRIVE | Jung Myung Telecom Co.,Ltd | E-D900-00-4988                  | DoC            | EUT          |
| USB FLASH DRIVE | Jung Myung Telecom Co.,Ltd | E-D900-00-4988                  | DoC            | EUT          |

### 1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 10 meters.

### 1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO, 467-701,KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24,2000(Confirmation Number: EA90661)

## 2.SYSTEM TEST CONFIGURATION

### 2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

| DEVICE TYPE    | MANUFACTURE                       | MODEL/PART NUMBER |
|----------------|-----------------------------------|-------------------|
| MAIN BOARD     | ImageQuest<br>CO., Ltd.           | 3041001046        |
| POWER BOARD    | C&C TECH CO.,LTD.                 | 3610200105        |
| OSD BOARD      | ImageQuest<br>CO., Ltd.           | 3010700808        |
| INVERTOR BOARD | ImageQuest<br>CO., Ltd            | 3610400249        |
| LCD BOARD      | HYUNDAI DISPLAY<br>TECHNOLOGY.INC | HT17E11-300       |

### 2.2 EUT exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

## 2.3 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

|                 | Power Cord<br>Shielded (Y/N) | I/O Cable<br>Shielded (Y/N) | Length (M)             |
|-----------------|------------------------------|-----------------------------|------------------------|
| MONITOR(EUT)    | N                            | Y                           | 1.8(P), 1.5(D), 1.5(D) |
| PC(HOST)        | N                            | N/A                         | 1.8(P)                 |
| KEY BOARD       | N/A                          | Y                           | 2.0(D)                 |
| MOUSE           | N/A                          | Y                           | 1.8(D)                 |
| PRINTER         | N                            | Y                           | 2.0(P), 1.8(D)         |
| MODEM           | N                            | Y                           | 2.0(P), 0.8(D)         |
| UPLOAD          | N/A                          | Y                           | 1.8(D)                 |
| USB MOUSE       | N/A                          | N/A                         | 0.8(D)                 |
| USB MOUSE       | N/A                          | Y                           | 1.8(D)                 |
| USB FRESH DRIVE | N/A                          | N/A                         | N/A                    |
| USB FRESH DRIVE | N/A                          | N/A                         | N/A                    |

## 2.4 Noise Suppression Parts on Cable. (I/O CABLE)

|                 | Ferrite Bead<br>(Y/N) | Location | Metal Hood<br>(Y/N) | Location |
|-----------------|-----------------------|----------|---------------------|----------|
| MONITOR(EUT)    | Y                     | BOTH END | Y                   | BOTH END |
| PRINTER         | Y                     | PC END   | Y                   | BOTH END |
| KEY BOARD       | Y                     | PC END   | Y                   | PC END   |
| MOUSE           | N                     | N/A      | Y                   | PC END   |
| MODEM           | Y                     | PC END   | Y                   | BOTH END |
| UPLOAD          | Y                     | BOTH END | Y                   | BOTH END |
| USB MOUSE       | N                     | N/A      | Y                   | EUT END  |
| USB MOUSE       | N                     | N/A      | Y                   | EUT END  |
| USB FRESH DRIVE | N                     | N/A      | Y                   | EUT END  |
| USB FRESH DRIVE | N                     | N/A      | Y                   | EUT END  |

## **2.5 Equipment Modifications**

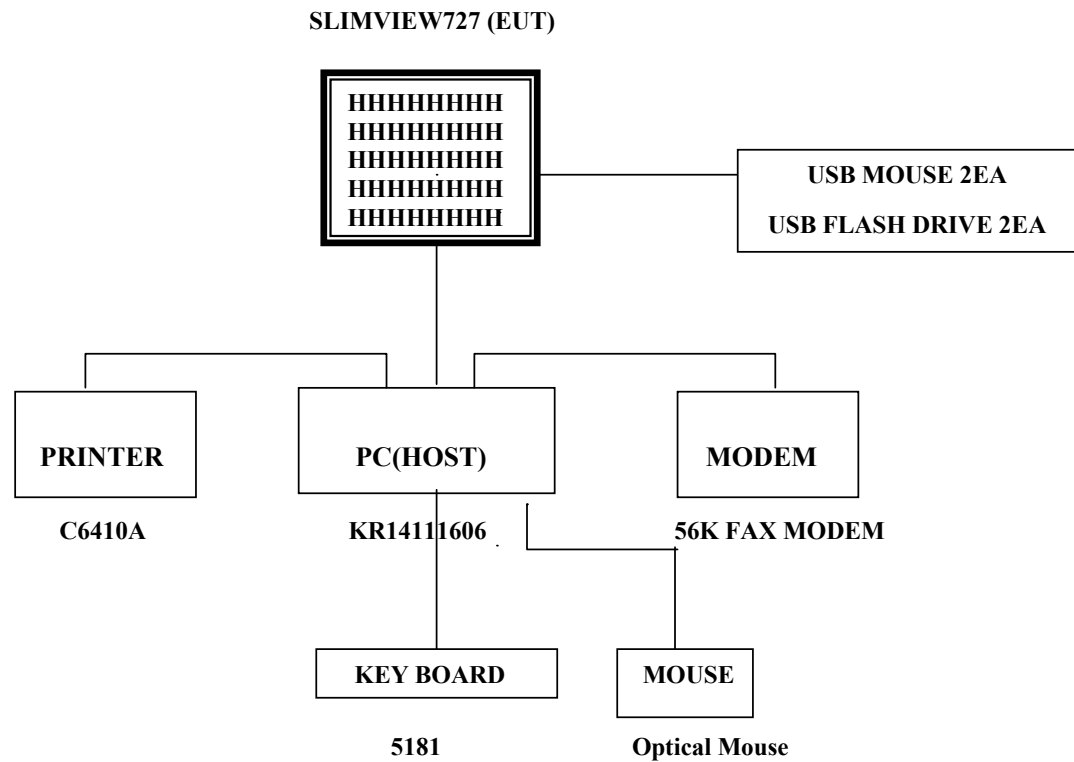
**N/A**

## 2.6 Configuration of Test system

**Line Conducted Test :** EUT was connected to LISN, all other supporting equipment were connected to another LISN.  
Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

**Radiated Emission Test :** Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating condition. Final Radiated Emission tests were conducted at 10 meter open area test site.

### [Configuration of Tested System]



### 3. PRELIMINARY TESTS

#### 3.1 AC Power line Conducted Emission Tests

During Preliminary Tests, the following operating mode were investigated

| Processor Speed (MHz) | Video Resolution (w/max) | The worst operating condition |
|-----------------------|--------------------------|-------------------------------|
| Pentium 1GHz          | 1280 x 1024 (80KHz/75Hz) | X                             |
|                       | 1024X768 (60KHz/75Hz)    |                               |
|                       | 1024X768 (56.5KHz/70Hz)  |                               |
|                       | 800X600 (37.9KHz/60Hz)   |                               |
|                       | 800X600 (35.2 KHz/56Hz)  |                               |
|                       | 640X480 (31.5KHz/70Hz)   |                               |

#### 4.2 Radiated Emission Tests

During Preliminary Tests, the following operating mode were investigated

| Processor Speed (MHz) | Video Resolution (w/max) | The worst operating condition |
|-----------------------|--------------------------|-------------------------------|
| Pentium 1GHz          | 1280 x 1024 (80KHz/75Hz) | X                             |
|                       | 1024X768 (60KHz/75Hz)    |                               |
|                       | 1024X768 (56.5KHz/70Hz)  |                               |
|                       | 800X600 (37.9KHz/60Hz)   |                               |
|                       | 800X600 (35.2 KHz/56Hz)  |                               |
|                       | 640X480 (31.5KHz/70Hz)   |                               |

Tested by Kyoung-Houn SEO / Engineer

Date : MAY 29, 2002

## 4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

|                |                     |             |         |
|----------------|---------------------|-------------|---------|
| Humidity Level | : 35 %              | Temperature | : 25 °C |
| Limit apply to | : CISPR 22          |             |         |
| Type of Tests  | : CLASS B           |             |         |
| Date           | : JUNE 3, 2002      |             |         |
| Result         | : PASSED BY -3.3 dB |             |         |
| EUT            | : 17" LCD MONITOR   |             |         |

Operating Condition : 1280 X 1024 (Hf : 80KHz, Vf : 75Hz)  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth : 9 KHz)  
 CISPR Average(6 dB Bandwidth : 9 KHz)

#### Line Conducted Emission Tabulated Data

| Power Line Conducted Emissions |                  |           | CISPR 22     |             |               |
|--------------------------------|------------------|-----------|--------------|-------------|---------------|
| Frequency (MHz)                | Amplitude (dBuV) | Conductor | Limit (dBuV) | Margin (dB) | Detector Mode |
| 0.213                          | 43.8             | NEUTRAL   | 47.0         | -3.3        | Average       |
| 0.210                          | 43.6             | HOT       | 47.0         | -3.6        | Average       |
| 0.156                          | 51.4             | NEUTRAL   | 60.0         | -8.3        | Quasi-Peak    |
| 0.285                          | 36.4             | HOT       | 45.0         | -8.3        | Average       |

Measured by : Kyoung-Houn SEO / Engineer

Date : JUNE 11, 2002

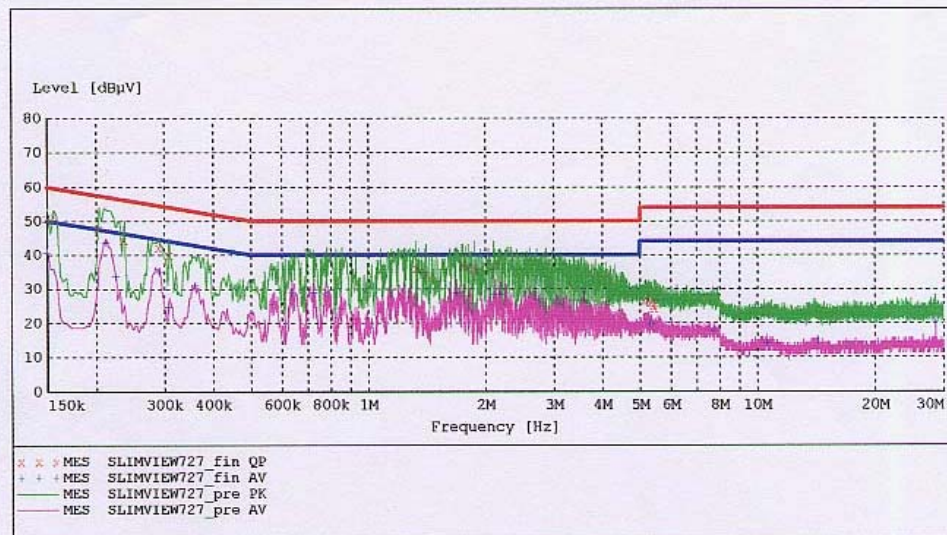


**HYUNDAI C-TECH. CO., LTD.**  
**EMC TEST LAB.**

EUT: SLIMVIEW727  
Manufacturer: IMAGEQUEST  
Operating Condition: 1280 X 1024 75Hz  
Test Site: Shield Room  
Operator: KH-SEO  
Test Specification: CLASS B  
Comment: N  
Start of Test: 6/11/02 / 5:01:57PM

**SCAN TABLE: "EN 55022 V (PKH)"**

| Short Description: |           | EN 55022 Voltage |          |            |           |                |  |
|--------------------|-----------|------------------|----------|------------|-----------|----------------|--|
| Start              | Stop      | Step             | Detector | Meas. Time | IF Bandw. | Transducer     |  |
| Frequency          | Frequency | Width            |          |            |           |                |  |
| 150.0 kHz          | 500.0 kHz | 3.0 kHz          | MaxPeak  | 10.0 ms    | 9 kHz     | old-C/E FACTOR |  |
|                    |           |                  | Average  |            |           |                |  |
| 500.0 kHz          | 5.0 MHz   | 3.0 kHz          | MaxPeak  | 5.0 ms     | 9 kHz     | old-C/E FACTOR |  |
|                    |           |                  | Average  |            |           |                |  |

**MEASUREMENT RESULT: "SLIMVIEW727\_fin QP"**

6/11/02 5:06PM

| Frequency | Level | Transd | Limit | Margin | Line | PE  |
|-----------|-------|--------|-------|--------|------|-----|
| MHz       | dBµV  | dB     | dBµV  | dB     |      |     |
| 0.150000  | 50.90 | 0.1    | 60    | 9.1    | 1    | --- |
| 0.156000  | 51.40 | 0.1    | 60    | 8.3    | 1    | --- |
| 0.204000  | 47.90 | 0.2    | 57    | 9.5    | 1    | --- |
| 0.237000  | 44.30 | 0.2    | 56    | 11.9   | 1    | --- |
| 0.291000  | 42.20 | 0.2    | 55    | 12.3   | 1    | --- |
| 0.309000  | 39.90 | 0.2    | 54    | 14.1   | 1    | --- |
| 1.331000  | 36.10 | 0.3    | 50    | 13.9   | 1    | --- |
| 1.415000  | 34.30 | 0.3    | 50    | 15.7   | 1    | --- |
| 1.748000  | 37.00 | 0.3    | 50    | 13.0   | 1    | --- |
| 1.814000  | 36.20 | 0.3    | 50    | 13.8   | 1    | --- |
| 1.883000  | 35.60 | 0.3    | 50    | 14.4   | 1    | --- |
| 2.108000  | 36.90 | 0.3    | 50    | 13.1   | 1    | --- |
| 5.171000  | 26.70 | 0.5    | 54    | 27.3   | 1    | --- |
| 5.258000  | 26.70 | 0.5    | 54    | 27.3   | 1    | --- |

**MEASUREMENT RESULT: "SLIMVIEW727\_fin QP"**

(continued)

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 5.357000         | 26.00         | 0.5          | 54            | 28.0         | 1    | --- |
| 5.441000         | 25.30         | 0.5          | 54            | 28.7         | 1    | --- |
| 5.468000         | 24.40         | 0.5          | 54            | 29.6         | 1    | --- |
| 5.507000         | 25.80         | 0.5          | 54            | 28.2         | 1    | --- |

**MEASUREMENT RESULT: "SLIMVIEW727\_fin AV"**

6/11/02 5:06PM

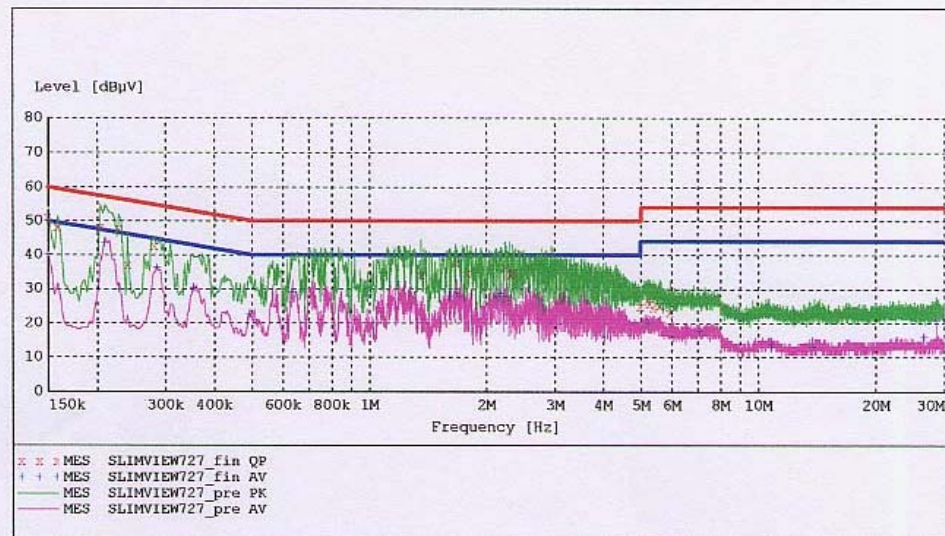
| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.150000         | 40.80         | 0.1          | 50            | 9.2          | 1    | --- |
| 0.213000         | 43.80         | 0.2          | 47            | 3.3          | 1    | --- |
| 0.225000         | 33.70         | 0.2          | 47            | 12.9         | 1    | --- |
| 0.291000         | 35.00         | 0.2          | 45            | 9.5          | 1    | --- |
| 0.309000         | 24.80         | 0.2          | 44            | 19.2         | 1    | --- |
| 0.360000         | 31.10         | 0.2          | 43            | 11.6         | 1    | --- |
| 0.638000         | 29.10         | 0.2          | 40            | 10.9         | 1    | --- |
| 0.728000         | 29.00         | 0.2          | 40            | 11.0         | 1    | --- |
| 0.779000         | 28.80         | 0.2          | 40            | 11.2         | 1    | --- |
| 1.688000         | 29.00         | 0.3          | 40            | 11.0         | 1    | --- |
| 2.120000         | 28.50         | 0.3          | 40            | 11.5         | 1    | --- |
| 2.186000         | 28.60         | 0.3          | 40            | 11.4         | 1    | --- |
| 5.291000         | 20.00         | 0.5          | 44            | 24.0         | 1    | --- |
| 5.357000         | 19.70         | 0.5          | 44            | 24.3         | 1    | --- |
| 7.724000         | 17.80         | 0.5          | 44            | 26.2         | 1    | --- |
| 10.619000        | 14.30         | 0.6          | 44            | 29.7         | 1    | --- |
| 14.318000        | 15.20         | 0.8          | 44            | 28.8         | 1    | --- |
| 28.634000        | 20.30         | 1.3          | 44            | 23.7         | 1    | --- |

**HYUNDAI C-TECH. CO., LTD.**  
**EMC TEST LAB.**

EUT: SLIMVIEW727  
 Manufacturer: IMAGEQUEST  
 Operating Condition: 1280 X 1024 75Hz  
 Test Site: Shield Room  
 Operator: KH-SEO  
 Test Specification: CLASS B  
 Comment: H  
 Start of Test: 6/11/02 / 4:54:51PM

**SCAN TABLE: "EN 55022 V (PKH)"**

| Short Description: |           |         | EN 55022 Voltage |            |           |                |
|--------------------|-----------|---------|------------------|------------|-----------|----------------|
| Start              | Stop      | Step    | Detector         | Meas. Time | IF Bandw. | Transducer     |
| 150.0 kHz          | 500.0 kHz | 3.0 kHz | MaxPeak          | 10.0 ms    | 9 kHz     | old-C/E FACTOR |
| 500.0 kHz          | 5.0 MHz   | 3.0 kHz | Average          | 5.0 ms     | 9 kHz     | old-C/E FACTOR |
|                    |           |         | MaxPeak          |            |           |                |
|                    |           |         | Average          |            |           |                |


**MEASUREMENT RESULT: "SLIMVIEW727\_fin QP"**

6/11/02 4:59PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.150000         | 51.20         | 0.1          | 60            | 8.8          | 1    | --- |
| 0.159000         | 48.10         | 0.1          | 60            | 11.4         | 1    | --- |
| 0.204000         | 48.20         | 0.2          | 57            | 9.2          | 1    | --- |
| 0.228000         | 47.80         | 0.2          | 57            | 8.7          | 1    | --- |
| 0.240000         | 37.00         | 0.2          | 56            | 19.1         | 1    | --- |
| 0.282000         | 42.70         | 0.2          | 55            | 12.0         | 1    | --- |
| 1.361000         | 34.10         | 0.3          | 50            | 15.9         | 1    | --- |
| 1.673000         | 37.40         | 0.3          | 50            | 12.6         | 1    | --- |
| 1.787000         | 34.60         | 0.3          | 50            | 15.4         | 1    | --- |
| 2.243000         | 36.40         | 0.3          | 50            | 13.6         | 1    | --- |
| 2.309000         | 34.10         | 0.3          | 50            | 15.9         | 1    | --- |
| 2.345000         | 35.00         | 0.3          | 50            | 15.0         | 1    | --- |
| 5.000000         | 25.00         | 0.5          | 50            | 25.0         | 1    | --- |
| 5.210000         | 26.90         | 0.5          | 54            | 27.1         | 1    | --- |

**MEASUREMENT RESULT: "SLIMVIEW727\_fin QP"**

(continued)

| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 5.294000         | 25.80         | 0.5          | 54            | 28.2         | 1    | --- |
| 5.384000         | 24.70         | 0.5          | 54            | 29.3         | 1    | --- |
| 5.609000         | 25.30         | 0.5          | 54            | 28.7         | 1    | --- |
| 5.945000         | 23.20         | 0.5          | 54            | 30.8         | 1    | --- |

**MEASUREMENT RESULT: "SLIMVIEW727\_fin AV"**

6/11/02 4:59PM

| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.150000         | 40.30         | 0.1          | 50            | 9.7          | 1    | --- |
| 0.210000         | 43.60         | 0.2          | 47            | 3.6          | 1    | --- |
| 0.228000         | 30.00         | 0.2          | 47            | 16.5         | 1    | --- |
| 0.285000         | 36.40         | 0.2          | 45            | 8.3          | 1    | --- |
| 0.354000         | 30.50         | 0.2          | 43            | 12.3         | 1    | --- |
| 0.495000         | 22.90         | 0.2          | 40            | 17.1         | 1    | --- |
| 0.635000         | 29.30         | 0.2          | 40            | 10.7         | 1    | --- |
| 1.616000         | 28.00         | 0.3          | 40            | 12.0         | 1    | --- |
| 1.679000         | 29.10         | 0.3          | 40            | 10.9         | 1    | --- |
| 2.120000         | 28.00         | 0.3          | 40            | 12.0         | 1    | --- |
| 2.186000         | 28.90         | 0.3          | 40            | 11.1         | 1    | --- |
| 2.252000         | 28.30         | 0.3          | 40            | 11.7         | 1    | --- |
| 5.216000         | 20.30         | 0.5          | 44            | 23.7         | 1    | --- |
| 7.076000         | 17.90         | 0.5          | 44            | 26.1         | 1    | --- |
| 10.838000        | 14.00         | 0.7          | 44            | 30.0         | 1    | --- |
| 13.772000        | 13.30         | 0.8          | 44            | 30.7         | 1    | --- |
| 26.570000        | 16.20         | 1.2          | 44            | 27.8         | 1    | --- |
| 28.637000        | 20.80         | 1.3          | 44            | 23.2         | 1    | --- |

## 4.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Humidity Level : 43 %                      Temperature : 26 °C  
 Limit apply to : CISPR 22  
 Type of Tests : CLASS B  
 Date : JUNE 13, 2002  
 Result : PASSED BY -3.0dB

EUT : 15" LCD MONITOR  
 Operating Condition : 1024 X 768 (Hf :60 kHz, Vf : 75 Hz)  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth : 120 KHz)

| Frequency<br>MHz | Reading<br>dBuV | Ant. Factor<br>dB | Cable Loss<br>dB | ANT POL<br>(H/V) | Total<br>dBuV/m | Limit<br>dB | Margin<br>dB |
|------------------|-----------------|-------------------|------------------|------------------|-----------------|-------------|--------------|
| 62.4             | 17.75           | 6.85              | 1.70             | V                | 26.3            | 30.0        | -3.7         |
| 80.0             | 16.71           | 6.39              | 1.90             | V                | 25.0            | 30.0        | -5.0         |
| 100.2            | 11.39           | 10.61             | 2.10             | V                | 24.1            | 30.0        | -5.9         |
| 132.8            | 10.19           | 14.21             | 2.50             | V                | 26.9            | 30.0        | -3.1         |
| 167.0            | 9.41            | 14.89             | 2.70             | V                | 27.0            | 30.0        | -3.0         |
| 213.6            | 4.97            | 16.43             | 3.20             | V                | 24.6            | 30.0        | -5.4         |
| 319.3            | 13.77           | 15.93             | 3.80             | V                | 33.5            | 37.0        | -3.5         |
| 373.5            | 8.75            | 16.55             | 4.10             | H                | 29.4            | 37.0        | -7.6         |
| 482.0            | 8.89            | 18.11             | 4.80             | V                | 31.8            | 37.0        | -5.2         |
| 545.0            | 9.15            | 19.15             | 5.30             | V                | 33.6            | 37.0        | -3.4         |
| 611.5            | 6.13            | 20.97             | 5.90             | H                | 33.0            | 37.0        | -4.0         |
| 679.8            | 5.41            | 22.29             | 6.00             | H                | 33.7            | 37.0        | -3.3         |

### NOTE:

1.All video modes and resolutions were investigated and the worst-case emissions are reported.

Measured by Kyoung-Houn SEO / Engineer

Date : JUNE 13, 2002

## 5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

## 6. LIST OF TEST EQUIPMENT

| <u>TYPE</u>                 | <u>MANUFACTURE</u> | <u>MODEL</u>    | <u>CAL. DATE</u> |
|-----------------------------|--------------------|-----------------|------------------|
| EMI Test Receiver           | Rohde & Schwarz    | ESH3            | 2001.6.29        |
| EMI Test Receiver           | Rohde & Schwarz    | ESVP            | 2002.2.14        |
| EMI Test Receiver           | Rohde & Schwarz    | ESI40           | 2001.11.5        |
| EMI Test Receiver           | Rohde & Schwarz    | ESVS30          | 2002.3.6         |
| Spectrum Monitor            | Rohde & Schwarz    | EZM             | N.A              |
| Graphic Plotter             | Rohde & Schwarz    | DOP2            | N.A              |
| Printer                     | Rohde & Schwarz    | PDN             | N.A              |
| Spectrum Analyzer           | H.P                | 8591EM          | 2001.7.11        |
| LISN                        | EMCO               | 3825/2          | 2002.2.7         |
| LISN                        | Rohde & Schwarz    | ESH2-Z5         | 2001.8.12        |
| Amplifier                   | Hewlett-Packard    | 8447E           | 2002.3.2         |
| Dipole Antennas             | Rohde & Schwarz    | VHAP            | 2001.6.28        |
| Dipole Antennas             | Rohde & Schwarz    | UHAP            | 2001.6.28        |
| Biconical Antenna           | Rohde & Schwarz    | BBA-9106        | 2001.6.28        |
| Log-Periodic Antenna        | Rohde & Schwarz    | UHALP-9107      | 2001.6.26        |
| Antenna Position Tower      | EMCO               | 1051-12         | N.A              |
| Turn Table                  | EMCO               | 1060-06         | N.A              |
| Line Filter                 | KEENE              | ULW 2X30-60     | N.A              |
| Power Analyzer              | Voltech            | PM 3300         | 2002.2.20        |
| Reference Network Impedance | Voltech            | IEC 555         | N.A              |
| AC Power Source             | PACIFIC            | Magnetic Module | N.A              |
| AC Power Source             | PACIFIC            | 360AMX          | N.A              |

