



ZHONE TECHNOLOGIES, INC. TEST REPORT

FOR THE

SKYZHONE 45, SZ-045-N-5G-LNK-X

**FCC PART 15 SUBPARTS C & D
SECTIONS 15.209 & 15.407**

COMPLIANCE

DATE OF ISSUE: FEBRUARY 27, 2001

PREPARED FOR:

Zhone Technologies, Inc.
7100 Oakport Street, Bld. 1
Oakland, CA 94621

P.O. No: 800393

W.O. No: 75966

PREPARED BY:

Joyce Walker
CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

Date of test: January 16-18, 2001

Report No: FC01-007

This report contains a total of 65 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	4
Summary of Results.....	5
Frequency Range Tested	5
EUT Operating Frequency.....	5
Approvals.....	5
Equipment Under Test (EUT) Description.....	6
Peripheral Devices	7
Report Of Measurements.....	8
Table 1: Peak Power Spectral Density and Power	8
Table 2: Power Output (E.I.R.P.)	9
Table 3: Six Highest Spurious Emission Levels - ODU-A	10
Table 4: Six Highest Radiated Emission Levels - ODU-A (1MHz-40GHz)	11
Table 5: Six Highest Conducted Emission Levels - ODU-A	12
Table 6: Six Highest Spurious Emission Levels - ODU-B	13
Table 7: Six Highest Radiated Emission Levels - ODU-B (1MHz-40GHz).....	14
Table 8: Six Highest Conducted Emission Levels - ODU-B	15
Table A : List Of Test Equipment	16
Measurement Uncertainty.....	17
Temperature And Humidity During Testing	17
EUT Setup	17
Test Instrumentation And Analyzer Settings.....	18
Table B : Analyzer Bandwidth Settings Per Frequency Range.....	18
Spectrum Analyzer Detector Functions.....	18
Peak	18
Quasi-Peak.....	19
Average.....	19
Test Methods	19
Radiated Emissions Testing.....	19
Conducted Emissions Testing	20
Occupied Bandwidth	20
Peak Power Density and Output Power at Antenna Terminal.....	20
E.I.R.P. Testing.....	21
Sample Calculations	21
Appendix A: Information About The Equipment Under Test.....	22
SZ-045-N-5G-IDU	23
I/O Ports.....	23
Crystal Oscillators	23
Printed Circuit Boards	23
Cable Information.....	23
SZ-045-N-5G-ODU-B.....	24
I/O Ports.....	24
Crystal Oscillators	24

Printed Circuit Boards	24
Cable Information.....	24
SZ-045-N-5G-ODU-B.....	25
I/O Ports.....	25
Crystal Oscillators	25
Printed Circuit Boards	25
Cable Information.....	25
Photograph Showing Dirltecte Connect Testing - ODU-A	26
Photograph Showing Radiated & E.R.I.P. Emissions - ODU-A.....	27
Photograph Showing Radiated & E.R.I.P. Emissions - ODU-A.....	28
Photograph Showing E.R.I.P. Emissions - ODU-A	29
Photograph Showing Conducted Emissions - ODU-A.....	30
Photograph Showing Dirltecte Connect Testing - ODU-B	31
Photograph Showing Radiated & E.R.I.P. Emissions - ODU-B	32
Photograph Showing Radiated & E.R.I.P. Emissions - ODU-B	33
Photograph Showing E.R.I.P. Emissions - ODU-B	34
Photograph Showing Conducted Emissions - ODU-B.....	35
Photograph Showing Conducted Emissions - ODU-B.....	36
Appendix B : Measurement Data Sheets.....	37

CKC Laboratories, Inc. has Certificates of Accreditation from the following agencies:
DATEch (Germany); A2LA (USA); FCC (USA); VCCI (Japan); BSMI (Taiwan); HOKLAS (Hong Kong).
CKC Laboratories, Inc. has Letters of Acceptance through an MRA for the following agencies:
ACA/NATA (Australia); SABS (South Africa); SWEDAC (Sweden); TUV Rheinland-Germany; TUV Rheinland-Korea; TUV Rheinland-Russia; Radio Communications Agency (RA); NEMKO (Norway).

ADMINISTRATIVE INFORMATION

DATE OF TEST:	January 16-18, 2001
DATE OF RECEIPT:	January 16, 2001
PURPOSE OF TEST:	To demonstrate the compliance of the SkyZhone 45, SZ-045-N-5G-LNK-X, with the requirements for FCC Part 15 Subparts C & D for Sections 15.209 & 15.407 devices.
MANUFACTURER:	Zhone Technologies, Inc. 7100 Oakport Street, BLD 1 Oakland, CA 94621
REPRESENTATIVE:	Rich Synder
TEST LOCATION:	CKC Laboratories, Inc. 480 Los Viboras Road Hollister, CA 95023

SUMMARY OF RESULTS

As received, the Zhone Technology, Inc. SkyZhone 45, SZ-045-N-5G-LNK-X was found to be fully compliant with the following standards and specifications:

United States

- FCC Part 15 Subpart C Section 15.209
- FCC Part 15 Subpart D Section 15.407
- ANSI C63.4 1992 method

The results in this report apply only to the items tested, as identified herein.

FREQUENCY RANGE TESTED:

Conducted = 450 kHz – 30 MHz

Radiated = 1 MHz – 40 GHz

EUT OPERATING FREQUENCY: The SZ-045-N-5G-ODU-A was operating at 5.725-5.825 GHz and the SZ-045-N-5G-ODU-B was operating at 5.25-5.35 GHz.

APPROVALS

QUALITY ASSURANCE:



Dennis Ward, Quality Manager



Christine Nicklas, EMC/Lab Manager

TEST PERSONNEL:



Conan Boyle, EMC/Lab Supervisor



Dustin Oaks, EMC/Evaluation Engineer

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The SkyZhone 45 is a point-to-point U-NII wireless transport comprised of an indoor component, part number SZ-045-N-5G-IDU, two outdoor components, part numbers SZ-045-N-5G-ODU-A, and SZ-045-N-5G-ODU-B. In order for the full system to operate it requires one indoor component with the two outdoor components A & B to send and receive to another indoor component and two outdoor components, A & B. The entire system is part number SZ-045-N-5G-LNK-X, where the X signifies a 2, 4 or 6 foot circular antennas.

During CKC Laboratories testing, the SZ-045-N-5G-ODU-A and SZ-045-N-5G-ODU-B were referred to as the Radio Up-Converter/Diplexer. The SZ-045-N-5G-IDU was referred to as the DS3 Data Interface. The models are identical electrically to the one, which was tested, or any differences between them do not affect their EMC characteristics, and therefore comply with the level of testing equivalent to the tested models. The SkyZhone 45, SZ-045-N-5G-LNK-X that was tested is representative of a production unit produced by Zhone Technology, Inc.

EQUIPMENT UNDER TEST:

SYSTEM: SKYZHONE 45, SZ-045-N-5G-LNK-X

Radio Up-Converter/Diplexer

Manuf: Zhone Technologies, Inc.
Model: SZ-045-N56-ODU-A
Serial: 02
FCC ID: (pending)

Radio Up-Converter/Diplexer

Manuf: Zhone Technologies, Inc.
Model: SZ-045-N56-ODU-B
Serial: 01
FCC ID: (pending)

Antenna Feedhorn, 2-ft

Manuf: Gabriel Electronics
Model: 118047
Serial: 90483
FCC ID: N/A

Antenna, 4-ft

Manuf: Gabriel Electronics
Model: SSP4-52B
Serial: 493350
FCC ID: N/A

DS3 Data Interface

Manuf: Zhone Technologies, Inc.
Model: Sky Zhone 45
Serial: 3
FCC ID: (pending)

DS3 Data Interface

Manuf: Zhone Technologies, Inc.
Model: Sky Zhone 45
Serial: 4
FCC ID: (pending)

Antenna, 2ft

Manuf: Gabriel Electronics
Model: SSP2-52B
Serial: T92209
FCC ID: N/A

Antenna Feedhorn, 4-ft

Manuf: Gabriel Electronics
Model: 90703
Serial: 118045
FCC ID: N/A

Antenna, 6-ft

Manuf: Gabriel Electronics
Model: SSP6-52A
Serial: 692828
FCC ID: N/A

Antenna Feedhorn, 6-ft

Manuf: Gabriel Electronics
Model: 91240
Serial: 118046
FCC ID: N/A

Coaxial Cable, 6-ft

Manuf: Times Microwave Systems
Model: LMR-600
Serial: None
FCC ID: N/A

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

Notebook PC

Manuf: Dell
Model: Inspiron 3500
Serial: 0009653D
FCC ID: DoC

AC-DC Adapter

Manuf: Dell
Model: P/N 7832D
Serial: 17972-94Q-1QZ1
FCC ID: N/A

AC-DC Adapter

Manuf: IBM
Model: P/N 02K6657
Serial: 1Z0ZA022ZM8
FCC ID: N/A

Notebook PC

Manuf: IBM
Model: Thinkpad T20
Serial: Zhone Tech. Inc. Asset #11057
FCC ID: DoC

REPORT OF MEASUREMENTS

The following tables report the highest worst case levels recorded during the tests performed on the SkyZhone 45, SZ-045-N-5G-LNK-X.

Table 1: Peak Power Spectral Density and Power

UNIT ODU-A

Channel	Antenna	Gain of Antenna (dBi)	Peak Power Spectral Density (dBm)	Limit (dBm) Reduced For Antenna Gain	P/F	Power Output (dBm)	Power Output (mW)	Limit (dBm) Reduced For Antenna Gain	P/F
Lo	2 Ft	28.5	-9.90	-5.50	P	3.10	2.04	7.50	P
Mid	2 Ft	28.5	-10.07	-5.50	P	2.93	1.96	7.50	P
Hi	2 Ft	28.5	-10.90	-5.50	P	2.10	1.62	7.50	P
Lo	4 Ft	34.2	-16.07	-11.20	P	-3.07	0.49	1.80	P
Mid	4 Ft	34.2	-15.90	-11.20	P	-2.90	0.51	1.80	P
Hi	4 Ft	34.2	-16.90	-11.20	P	-3.90	0.41	1.80	P
Lo	6 Ft	37.5	-19.07	-14.50	P	-6.07	0.25	-1.50	P
Mid	6 Ft	37.5	-18.90	-14.50	P	-5.90	0.26	-1.50	P
Hi	6 Ft	37.5	-20.07	-14.50	P	-7.07	0.20	-1.50	P

Unit ODU-B

Lo	2 Ft	28.5	-12.70	-11.50	P	0.30	1.07	1.50	P
Mid	2 Ft	28.5	-12.40	-11.50	P	0.60	1.15	1.50	P
HI	2 Ft	28.5	-14.40	-11.50	P	-1.40	0.72	1.50	P
Lo	4 Ft	34.2	-19.23	-17.20	P	-6.23	0.24	-4.20	P
Mid	4 Ft	34.2	-18.07	-17.20	P	-5.07	0.31	-4.20	P
Hi	4 Ft	34.2	-18.40	-17.20	P	-5.40	0.29	-4.20	P
Lo	6 Ft	37.5	-21.90	-20.50	P	-8.90	0.13	-7.50	P
Mid	6 Ft	37.5	-22.40	-20.50	P	-9.40	0.11	-7.50	P
Hi	6 Ft	37.5	-22.73	-20.50	P	-9.73	0.11	-7.50	P

Test Method: ANSI C63.4 1992
 Spec Limit: FCC Part 15.407
 Test Distance: Direct Connect

Notes: P = Pass
 F - Fail

Table 2: Power Output (E.I.R.P.)

UNIT ODU-A

Channel	Antenna	Gain of Antenna (dBi)	Recorded Reading (dBuV)	Recorded Reading (Volts)	(Power) $P=(Ed)^{2/30}*G$	Power Output (mW)	Power Output (dBm)	Limit (dBm) Reduced For Antenna Gain	P/F
Lo	2 Ft	28.5	110.40	0.33	0.002261021	2.2610	3.54	7.50	P
Mid	2 Ft	28.5	110.10	0.32	0.002110107	2.1101	3.24	7.50	P
Hi	2 Ft	28.5	109.40	0.30	0.001795993	1.7960	2.54	7.50	P
Lo	4 Ft	34.2	104.00	0.16	0.000491234	0.4912	-3.09	1.80	P
Mid	4 Ft	34.2	104.20	0.16	0.000514385	0.5144	-2.89	1.80	P
Hi	4 Ft	34.2	103.20	0.14	0.000408591	0.4086	-3.89	1.80	P
Lo	6 Ft	37.5	101.00	0.11	0.000239943	0.2399	-6.20	-1.50	P
Mid	6 Ft	37.5	101.20	0.11	0.000251251	0.2513	-6.00	-1.50	P
Hi	6 Ft	37.5	99.80	0.10	0.000182015	0.1820	-7.40	-1.50	P

Unit ODU-B

Lo	2 Ft	28.5	108.00	0.25	0.001301082	1.3011	1.14	1.50	P
Mid	2 Ft	28.5	106.60	0.21	0.00094255	0.9426	-0.26	1.50	P
HI	2 Ft	28.5	107.50	0.24	0.00115959	1.1596	0.64	1.50	P
Lo	4 Ft	34.2	101.20	0.11	0.000257803	0.2578	-5.89	-4.20	P
Mid	4 Ft	34.2	102.00	0.13	0.000309948	0.3099	-5.09	-4.20	P
Hi	4 Ft	34.2	101.60	0.12	0.000282676	0.2827	-5.49	-4.20	P
Lo	6 Ft	37.5	97.90	0.08	0.000117519	0.1175	-9.30	-7.50	P
Mid	6 Ft	37.5	96.50	0.07	8.5135E-05	0.0851	-10.70	-7.50	P
Hi	6 Ft	37.5	97.00	0.07	9.5523E-05	0.0955	-10.20	-7.50	P

Test Method: ANSI C63.4 1992
Spec Limit: FCC Part 15.407
Test Distance: Direct Connect

Notes: P = Pass
F - Fail

The following tables report the highest worst case levels recorded during the tests performed on the SkyZhone 45, SZ-045-N-5G-LNK-X. The data sheets from which these tables were compiled are contained in Appendix B.

Table 3: Six Highest Spurious Emission Levels - ODU-A

FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Dist dB				
15374.980	35.5	0.0		14.7		50.2	54.0	-3.8	NA
15479.980	32.4	0.0		15.3		47.7	54.0	-6.3	NA
17419.500	36.0	0.0		11.1		47.1	54.0	-6.9	N
20639.970	26.3	0.0		21.5		47.8	54.0	-6.2	NA
23094.500	12.3	0.0		39.4		51.7	54.0	-2.3	NA
23226.980	13.0	0.0		38.7		51.7	54.0	-2.3	N

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.209
Test Distance: Direct Connect

NOTES: N = No Polarization
A = Average Reading

COMMENTS: Frequency range tested: 1MHz – 40GHz. The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-A S/N 02 and IDU S/N 3 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. **The table represents the results of readings from the low, middle and high channels.**

Table 4: Six Highest Radiated Emission Levels - ODU-A (1MHz-40GHz)

FREQUENCY MHz	METER READING dBµV	CORRECTION FACTORS				CORRECTED READING dBµV/m	SPEC LIMIT dBµV/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Dist dB				
40.047	43.7	13.6	-27.9	1.6		31.0	40.0	-9.0	VQ
60.058	53.6	5.4	-27.9	2.0		33.1	40.0	-6.9	V
80.033	51.6	6.8	-27.8	2.4		33.0	40.0	-7.0	HQ
400.055	45.1	16.4	-27.5	6.1		40.1	46.0	-5.9	VQ
1112.967	21.7	23.5		3.4		48.6	54.0	-5.4	V
2746.608	10.8	27.5		6.1		44.4	54.0	-9.6	V

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.209
Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
V = Vertical Polarization
Q = Quasi Peak Reading

COMMENTS: Frequency range tested: 1MHz – 40GHz. This data sheet comprises the following configuration: ODU-A operating on its LOW channel, which is the highest output power channel for that set. The set was tested using the highest and lowest gain antennas on the channels listed above. The lowest gain antenna represents the highest output power of the device and the highest gain antenna represents the lowest output power of the device. Test Setup: The EUT is comprised of a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit), coaxial cable, and either a 2-ft (highest gain) or 6-ft (lowest gain) antenna, along with support equipment that includes two notebook PC's. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable. On the IDU, an RG-58 cable connects DS3 IN and DS3 OUT in loopback. The set is constantly transmitting and receiving autonomously. The RF signal port of the ODU is connected to the antenna connector port of either the 2-ft (high gain) or 6-ft (low gain) antenna via a 6-ft coaxial cable. The unit was tested with both antennas and the data sheet comprises the highest readings from both antenna configurations.

Table 5: Six Highest Conducted Emission Levels - ODU-A									
FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV	SPEC LIMIT dBμV	MARGIN dB	NOTES
		Lisn dB							
0.751189	40.2	0.3		0.1		40.6	48.0	-7.4	B
0.789675	41.5	0.3		0.1		41.9	48.0	-6.1	B
2.932000	39.7	0.5		0.3		40.5	48.0	-7.5	B
3.716000	40.9	0.6		0.3		41.8	48.0	-6.2	B
4.042000	39.8	0.6		0.4		40.8	48.0	-7.2	B
27.169670	35.0	4.7		1.0		40.7	48.0	-7.3	B

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.207

NOTES: B = Black Lead

COMMENTS: The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-A S/N 02 and IDU S/N 3 - is tested for conducted emissions. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is connected to the IBM notebook via a 6-ft serial cable. The units are constantly transmitting and receiving autonomously. An RG-58 cable connects DS3 IN and DS3 OUT in loopback. A 6-ft coaxial cable is connected to the IDU RF connector port and is terminated with a 50-ohm dummy load. The units are constantly transmitting and receiving autonomously. AC Power = 120vac, 60-Hz

Table 6: Six Highest Spurious Emission Levels - ODU-B

FREQUENCY MHz	METER READING dB μ V	CORRECTION FACTORS				CORRECTED READING dB μ V/m	SPEC LIMIT dB μ V/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Dist dB				
15900.830	25.2	0.0		16.2		41.4	54.0	-12.6	H
15991.860	28.3	0.0		16.4		44.7	54.0	-9.3	V
17744.970	32.8	0.0		13.4		46.2	54.0	-7.8	H
21001.670	24.2	0.0		19.3		43.5	54.0	-10.5	N
21200.830	22.3	0.0		18.5		40.8	54.0	-13.2	H
21345.030	24.8	0.0		18.0		42.8	54.0	-11.2	V

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.209
Test Distance: Direct Connect

NOTES: H = Horizontal Polarization
V = Vertical Polarization

COMMENTS: Frequency range tested: 1MHz – 40GHz. The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. **The table represents the results of readings from the low, middle and high channels.**

Table 7: Six Highest Radiated Emission Levels - ODU-B (1MHz-40GHz)

FREQUENCY MHz	METER READING dB μ V	CORRECTION FACTORS				CORRECTED READING dB μ V/m	SPEC LIMIT dB μ V/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Dist dB				
40.047	43.7	13.6	-27.9	1.6		31.0	40.0	-9.0	VQ
60.058	53.6	5.4	-27.9	2.0		33.1	40.0	-6.9	V
80.033	51.6	6.8	-27.8	2.4		33.0	40.0	-7.0	HQ
400.055	45.1	16.4	-27.5	6.1		40.1	46.0	-5.9	VQ
1112.967	21.7	23.5		3.4		48.6	54.0	-5.4	V
2746.608	10.8	27.5		6.1		44.4	54.0	-9.6	V

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.209
Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
V = Vertical Polarization
Q = Quasi Peak Reading

COMMENTS: Frequency range tested: 1MHz – 40GHz. This data sheet comprises the following configuration: ODU-B operating on its MID channel, which is the highest output power channel for that set. The set was tested using the highest and lowest gain antennas on the channels listed above. The lowest gain antenna represents the highest output power of the device and the highest gain antenna represents the lowest output power of the device. Test Setup: The EUT is comprised of a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit), coaxial cable, and either a 2-ft (highest gain) or 6-ft (lowest gain) antenna, along with support equipment that includes two notebook PC's. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable. On the IDU, an RG-58 cable connects DS3 IN and DS3 OUT in loopback. The set is constantly transmitting and receiving autonomously. The RF signal port of the ODU is connected to the antenna connector port of either the 2-ft (high gain) or 6-ft (low gain) antenna via a 6-ft coaxial cable. The unit was tested with both antennas and the data sheet comprises the highest readings from both antenna configurations.

Table 8: Six Highest Conducted Emission Levels - ODU-B									
FREQUENCY MHz	METER READING dBµV	CORRECTION FACTORS				CORRECTED READING dBµV	SPEC LIMIT dBµV	MARGIN dB	NOTES
		Lisn dB							
0.721200	41.2	0.2		0.2		41.6	48.0	-6.4	W
1.884000	41.6	0.3		0.2		42.1	48.0	-5.9	W
3.442132	40.8	0.6		0.3		41.7	48.0	-6.3	B
3.549840	44.0	0.5		0.3		44.8	48.0	-3.2	WQ
6.920000	40.4	0.7		0.5		41.6	48.0	-6.4	W
20.014170	38.2	3.1		0.9		42.2	48.0	-5.8	WQ

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.207

NOTES: Q = Quasi Peak Reading
W = White Lead
B = Black Lead

COMMENTS: The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for conducted emissions. The fundamental frequency is 5.300GHz. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is connected to the IBM notebook via a 6-ft serial cable. The units are constantly transmitting and receiving autonomously. An RG-58 cable connects DS3 IN and DS3 OUT in loopback. A 6-ft coaxial cable is connected to the IDU RF connector port and is terminated with a 50-ohm dummy load. The units are constantly transmitting and receiving autonomously. AC Power = 120vac, 60-Hz

TABLE A
LIST OF TEST EQUIPMENT

Hollister Site D

Equipment	Mfg.	Model #	Asset #	Serial #	Cal Date	Cal Due
Spectrum Analyzer	HP	8564E	01406	3623A00539	12/12/00	12/12/01
Horn Ant., 1-18	EMCO	3115	02157	9901-5655	10/20/00	10/20/01
Horn Ant., 18-26.5	HP	84125-80008	01413	942126-003	2/2/00	2/2/01
Horn Ant., 26.5-40	HP	84125-80001	01414	951559-008	2/2/00	2/2/01
Mag Loop	EMCO	6502	0432	2078	8/17/00	8/17/01
50-Ft High Freq. Cable	Andrews	None	None	Hol-hf-050-08	9/21/00	9/21/01
Spec. An.	HP	85680A	00446	2237A02391	9/17/00	9/17/01
Spec. An. Display	HP	85662A	00446	2235A02391	9/17/00	9/17/01
QPA	HP	85650A	00445	2043A00286	9/17/00	9/17/01
Preamplifier	HP	8447D	00705	2944A06739	12/15/00	12/15/01
Bilog Ant.	Schaffner	CBL6111C	01995	2451	10/12/00	10/12/00
10-M Radiated Cable	Andrews	None	None	rad cable_10M	8/11/00	8/11/01
LISN a	Solar	8616-50-TS-24-BNC	33204	905814	9/8/00	9/8/01
LISN b	Solar	8616-50-TS-24-BNC	33204	905815	9/8/00	9/8/01
Conducted Cable	Andrews	None	None	cond_cbl_hd_00	11/13/00	11/13/01

MEASUREMENT UNCERTAINTY

Associated with data in this report is a ± 4 dB measurement uncertainty.

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within $+15^{\circ}\text{C}$ and $+35^{\circ}\text{C}$.
The relative humidity was between 20% and 75%.

EUT SETUP

The equipment under test (EUT) and the peripheral(s) listed were set up in a manner that represented their normal use. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the Tables for emissions. Additionally, a complete description of all the ports and I/O cables is included on the information sheets contained in Appendix A.

During radiated emissions testing, the EUT was mounted on a nonconductive, rotating table 80 cm above the conductive grid. The nonconductive table dimensions were 1 meter by 1.5 meters. This configuration is typical for radiated emissions testing of table top devices.

I/O cables were connected to the EUT and peripherals in the manner required for normal operation of the system. Excess cabling was bundled in the center in a serpentine fashion using 30-40 centimeter lengths.

During conducted emissions testing, the EUT was located 80 centimeters above the conducting ground plane on the same nonconducting table as was used for radiated testing. The metal plane was grounded to the earth through the green wire safety ground. Power to the EUT was provided via 3 meters of shielded power cable from a filter grounded to the metal plane to a LISN. The LISN was also grounded to the plane and attached to the LISN was a 4 ganged grounded outlet whose source was also shielded and 60 cm in length. All other objects were kept a minimum of 1 meter away from the EUT during the conducted test.

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed in Table A were used to collect both the radiated and conducted emissions data for the SkyZhone 45, SZ-045-N-5G-LNK-X. For radiated measurements from 30 to 1000 MHz, the bilog antenna was used. For frequencies above 1000 MHz, the horn antenna was used. All antennas were located at a distance of 3 meters from the edge of the EUT. Conducted emissions tests required the use of the FCC type LISNs.

The HP spectrum analyzer was used for all measurements. Table B shows the analyzer bandwidth settings that were used in designated frequency bands. For conducted emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. A 10 dB external attenuator was also used during conducted tests, with internal offset correction in the analyzer. During radiated testing, the measurements were made with 0 dB of attenuation, a reference level of 97 dB μ V, and a vertical scale of 10 dB per division.

TABLE B : ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	450 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	1MHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	40 GHz	1 MHz

SPECTRUM ANALYZER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in Tables 1-8 indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the six highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data for the SkyZhone 45, SZ-045-N-5G-LNK-X.

Peak

In this mode, the Spectrum Analyzer or test engineer recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the analyzer called "peak hold," the analyzer had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the analyzer made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the HP Quasi-Peak Adapter for the HP Spectrum Analyzer. The detailed procedure for making quasi peak measurements contained in the HP Quasi-Peak Adapter manual were followed.

Average

When the frequencies exceed 1 GHz, average measurements may be made using the spectrum analyzer. To make these measurements, the test engineer reduces the video bandwidth on the analyzer until the modulation of the signal is filtered out. At this point the analyzer is set into the linear mode and the scan time is reduced.

TEST METHODS

The radiated and conducted emissions data of the SkyZhone 45, SZ-045-N-5G-LNK-X, was taken with the HP Spectrum Analyzer. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the "Sample Calculations". The corrected data was then compared to the FCC Part 15 Subparts C & D for Sections 15.209 & 15.407 emissions limits to determine compliance.

Preliminary and final measurements were taken in order to better ensure that all emissions from the EUT were found and maximized.

Radiated Emissions Testing

During the preliminary radiated scan, the EUT was powered up and operating in its defined FCC test mode with the I/O cables and line cords facing the antenna. The frequency range of 30 - 1000 MHz was then scanned with the bilog antenna located about 1.5 meter above the ground plane in the vertical polarity. During this scan, the turntable was rotated and all peaks, which were at or near the limit, were recorded. Lastly, a scan of the FM band from 88 - 110 MHz was made, using a reduced resolution bandwidth and a reduced frequency span. The bilog antenna was changed to the horizontal polarity and the above steps were repeated. The horn antenna was used to scan for frequencies above 1000 MHz. Care was taken to ensure that no frequencies were missed within the FM and TV bands. An analysis was performed to determine if the signals that were at or near the limit were caused by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

For the final radiated scan, the equipment was again positioned with its I/O and power cables facing the antenna. A thorough scan of all frequencies was manually made using a small frequency span, rotating the turntable as needed. Comparison with the previously recorded measurements was then made.

Using the peak readings from both scans as a guide, the test engineer then maximized the readings with respect to the table rotation, antenna height and configuration of the peripherals and cables. Maximizing of the cables was achieved by monitoring the spectrum analyzer on a closed circuit television monitor while the EUT cables were being moved and rearranged on the EUT table for maximum emissions. Photographs showing the final worst case configuration of the EUT are contained in Appendix A.

Conducted Emissions Testing

For conducted emissions testing, a 30 to 50 second sweep time was used for automated measurements in the frequency bands of 450 kHz to 1.705 MHz, 1.705 MHz to 3 MHz, and 3 MHz to 30 MHz. All readings within 20 dB of the limit were recorded. At frequencies where the recorded emissions were close to the limit, further investigation was performed manually at a slower sweep rate.

FCC Part 15.407(a)(6) - Occupied Bandwidth Measurements

In accordance with Part 15.407(a)(6), the ratio of the peak excursion of the modulation envelope to the peak transmit power did not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Peak Power Density and Output Power at Antenna Terminal

The RF output of the EUT was connected directly to the RF input of the spectrum analyzer. The spectrum analyzer bandwidth settings were set to 1 MHz as per FCC Part 15.407(a)(5) and the center frequency was adjusted to the fundamental frequency of the EUT. The peak power spectral density was recorded. The output power was also recorded and adjusted for bandwidth limitations of the spectral analyzer.

E.I.R.P. Testing

The spectrum analyzer was set to the fundamental frequency of the EUT. The signal was maximized by table rotation and antenna height adjustment. The maximum level was recorded and adjusted for bandwidth limitations of the spectrum analyzer, cable losses, and amplifier gain and antenna factor. The corrected reading was in the following formula to obtain E.I.R.P.:

$$P = \frac{(Ed)^2}{30G}$$

Where:

P = power in watts

E = corrected reading in volts

d = distance

G = gain of antenna

SAMPLE CALCULATIONS

The basic spectrum analyzer reading was converted using correction factors as shown in the emissions readings in Tables 1-8. For radiated emissions in dBμV/m, the spectrum analyzer reading in dBμV was corrected by using the following formula:

$$\begin{aligned} & \text{Meter reading (dB}\mu\text{V)} \\ & + \text{Antenna Factor (dB)} \\ & + \text{Cable Loss (dB)} \\ & - \text{Distance Correction (dB)} \\ & - \text{Pre-amplifier Gain (dB)} \\ & = \text{Corrected Reading (dB}\mu\text{V/m)} \end{aligned}$$

This reading was then compared to the applicable specification limit to determine compliance.

A typical data sheet will display the following in column format:

#	Freq MHz	Rdng dBμV	Cable	HP-84	CHASE	Horn	Dist	Corr dBμV/m	Spec	Margin	Polar
		Hol-h	con_	rad_c	WHT-L	LISN		BLK-L			

means reading number

Freq MHz is the frequency in MHz of the obtained reading.

Rdng dBμV is the reading obtained on the spectrum analyzer in dBμV.

HP-84 is short for the preamplifier factor or gain in dB.

CHASE is the biconical antenna factor in dB.

Horn is the horn antenna factor in dB.

Hol-h, rad_c & con_ are the cable losses in dB of the coaxial cables on the OATS.

Dist is the distance factor (in dB). It is used when testing at a different test distance than the one stated in the spec.

Corr dBμV/m is the corrected reading which is now in dBμV/m (field strength).

Spec is the specification limit (dB) stated in the regulations.

Margin is the closeness to the specified limit in dB; + is over and - is under the limit.

Polar is the Polarity of the antenna with respect to earth.

LISN, BLK-L & WHT-L are the line impedance stabilization network factor in dB.

APPENDIX A

INFORMATION ABOUT THE EQUIPMENT UNDER TEST

SZ-045-N-5G-IDU

INFORMATION ABOUT THE EQUIPMENT UNDER TEST	
Test Software/Firmware:	V 1.1
CRT was displaying:	Not Applicable
Power Supply Manufacturer:	Condor
Power Supply Part Number:	100-41935
AC Line Filter Manufacturer:	Not Applicable
AC Line Filter Part Number:	
Line voltage used during testing:	120V 60Hz

I/O PORTS	
Type	#
DS-3 payload in (BNC)	1
DS-3 payload out (BNC)	1
10baseT (RJ-45)	1
Craft (DB-9 carrying RS-232)	1
IF (TNC)	1
Alarms (Form C dry contact)	3

CRYSTAL OSCILLATORS	
Type	Freq In MHz
Master Clock	40
DS-3 reference	44.736

PRINTED CIRCUIT BOARDS				
Function	Model & Rev	Clocks, MHz	Layers	Location
System	800-00183-01 Rev 5	40 MHz, 44.736 MHz	8	IDU
Modem	800-00281-01 Rev Z2	None	8	Mezzanine

CABLE INFORMATION

Cable #:	1	Cable(s) of this type:	1
Cable Type:	RG-6	Shield Type:	Braided + foil
Construction:	Coaxial	Length In Meters:	100
Connected To End (1):	IDU IF port	Connected To End (2):	ODU IF port
Connector At End (1):	TNC	Connector At End (2):	TNC
Shield Grounded At (1):	Yes	Shield Grounded At (2):	Yes
Part Number:	N/A	Number of Conductors:	2
Notes and/or description:	Cable furnished by professional installer, Zhone P/N N/A		

SZ-045-N-5G-ODU-A

INFORMATION ABOUT THE EQUIPMENT UNDER TEST	
Test Software/Firmware:	V 1.1
CRT was displaying:	Not Applicable
Power Supply Manufacturer:	Not Applicable
Power Supply Part Number:	Not Applicable
AC Line Filter Manufacturer:	Not Applicable
AC Line Filter Part Number:	Not Applicable
Line voltage used during testing:	120V 60Hz

I/O PORTS	
Type	#
Antenna (N-F)	1
Craft (DB-9 carrying RS-232)	1
IF (TNC)	1

CRYSTAL OSCILLATORS	
Type	Freq In MHz
Crystal Resonator	5.0688

PRINTED CIRCUIT BOARDS				
Function	Model & Rev	Clocks, MHz	Layers	Location
CPU	800-00185-01 Rev 6	None	8	Upper stack
IF-A	800-00187-01 Rev 8	None	8	Within shield
Duplexer	800-00186	None	1	Within shield

CABLE INFORMATION

Cable #:	1	Cable(s) of this type:	1
Cable Type:	LMR-600	Shield Type:	
Construction:		Length In Meters:	2
Connected To End (1):	ODU Ant Port	Connected To End (2):	Antenna
Connector At End (1):	N-F	Connector At End (2):	N-F
Shield Grounded At (1):	Yes	Shield Grounded At (2):	Yes
Part Number:	TBD	Number of Conductors:	2
Notes and/or description:			

SZ-045-N-5G-ODU-B

INFORMATION ABOUT THE EQUIPMENT UNDER TEST	
Test Software/Firmware:	V 1.1
CRT was displaying:	Not Applicable
Power Supply Manufacturer:	Not Applicable
Power Supply Part Number:	Not Applicable
AC Line Filter Manufacturer:	Not Applicable
AC Line Filter Part Number:	Not Applicable
Line voltage used during testing:	120V 60Hz

I/O PORTS	
Type	#
Antenna (N-F)	1
Craft (DB-9 carrying RS-232)	1
IF (TNC)	1

CRYSTAL OSCILLATORS	
Type	Freq In MHz
Crystal Resonator	5.0688

PRINTED CIRCUIT BOARDS				
Function	Model & Rev	Clocks, MHz	Layers	Location
CPU	800-00185-01 Rev 6	None	8	Upper stack
IF-A	800-00290-01 Rev 8	None	8	Within shield
Duplexer	800-00289-01	None	1	Within shield

CABLE INFORMATION

Cable #:	1	Cable(s) of this type:	1
Cable Type:	LMR-600	Shield Type:	
Construction:		Length In Meters:	2
Connected To End (1):	ODU Ant Port	Connected To End (2):	Antenna
Connector At End (1):	N-F	Connector At End (2):	N-F
Shield Grounded At (1):	Yes	Shield Grounded At (2):	Yes
Part Number:	TBD	Number of Conductors:	2
Notes and/or description:			

PHOTOGRAPH SHOWING DIRECT CONNECT TESTING - ODU-A



Front View

PHOTOGRAPH SHOWING RADIATED & E.R.I.P EMISSIONS- ODU-A



2 Foot Antenna

PHOTOGRAPH SHOWING RADIATED & E.R.I.P EMISSIONS- ODU-A



6 Foot Antenna

PHOTOGRAPH SHOWING E.R.I.P EMISSIONS - ODU-A



4 Foot Antenna

PHOTOGRAPH SHOWING CONDUCTED EMISSIONS - ODU-A



Front View

PHOTOGRAPH SHOWING DIRECT CONNECT TESTING - ODU-B



Front View

PHOTOGRAPH SHOWING RADIATED & E.R.I.P EMISSIONS- ODU-B



2 Foot Antenna

PHOTOGRAPH SHOWING RADIATED & E.R.I.P EMISSIONS- ODU-B



6 Foot Antenna

PHOTOGRAPH SHOWING E.R.I.P EMISSIONS - ODU-B



4 Foot Antenna

PHOTOGRAPH SHOWING CONDUCTED EMISSIONS - ODU-B



Front View

PHOTOGRAPH SHOWING CONDUCTED EMISSIONS - ODU-B




Side View


APPENDIX B

MEASUREMENT DATA SHEETS


Occupied Bandwidth Plot

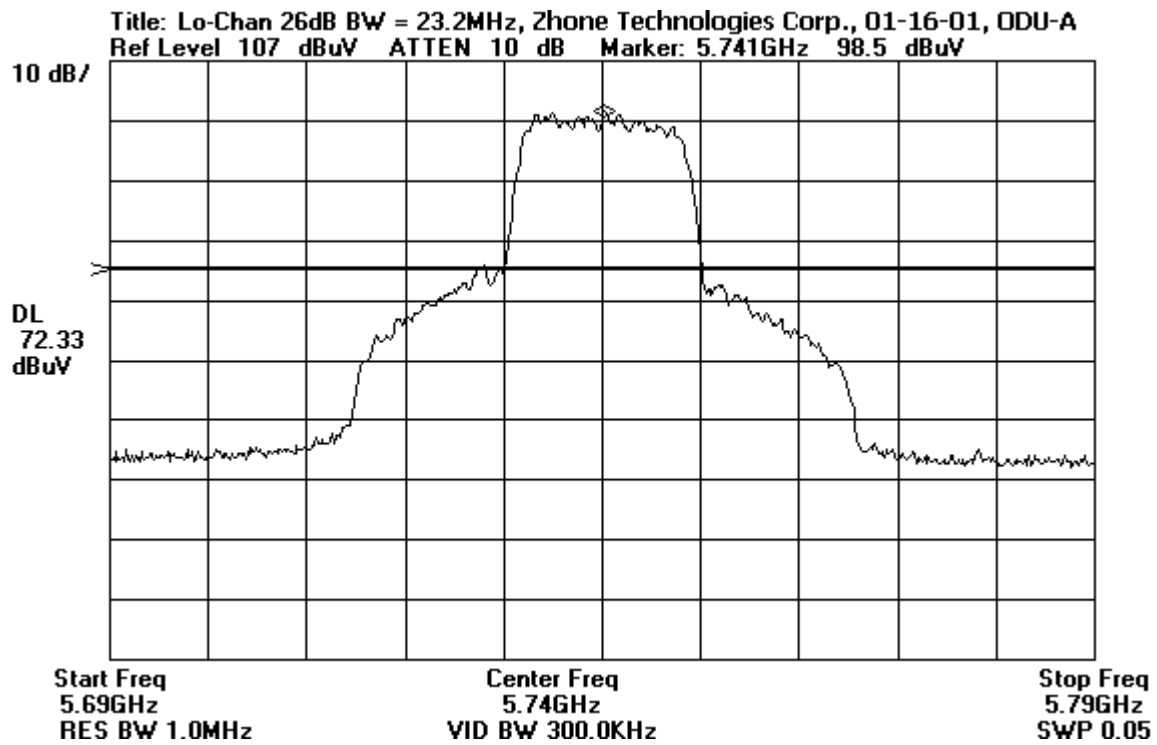


Occupied Bandwidth Plot

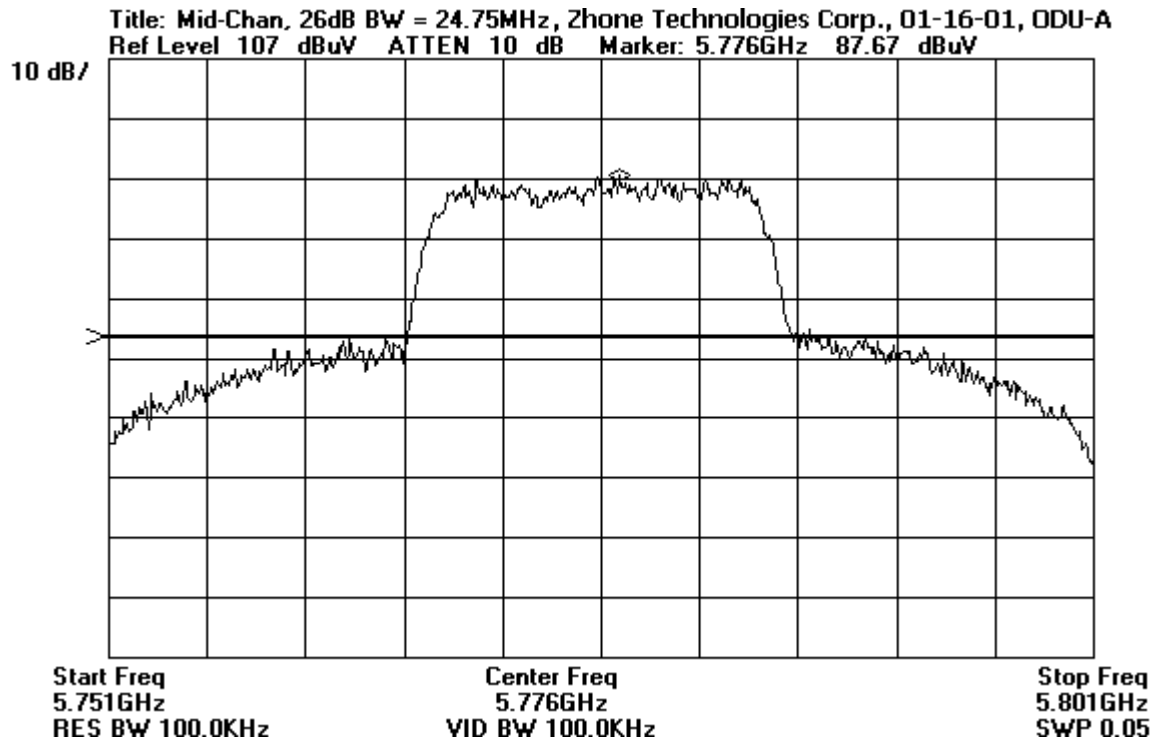


Occupied Bandwidth Plot

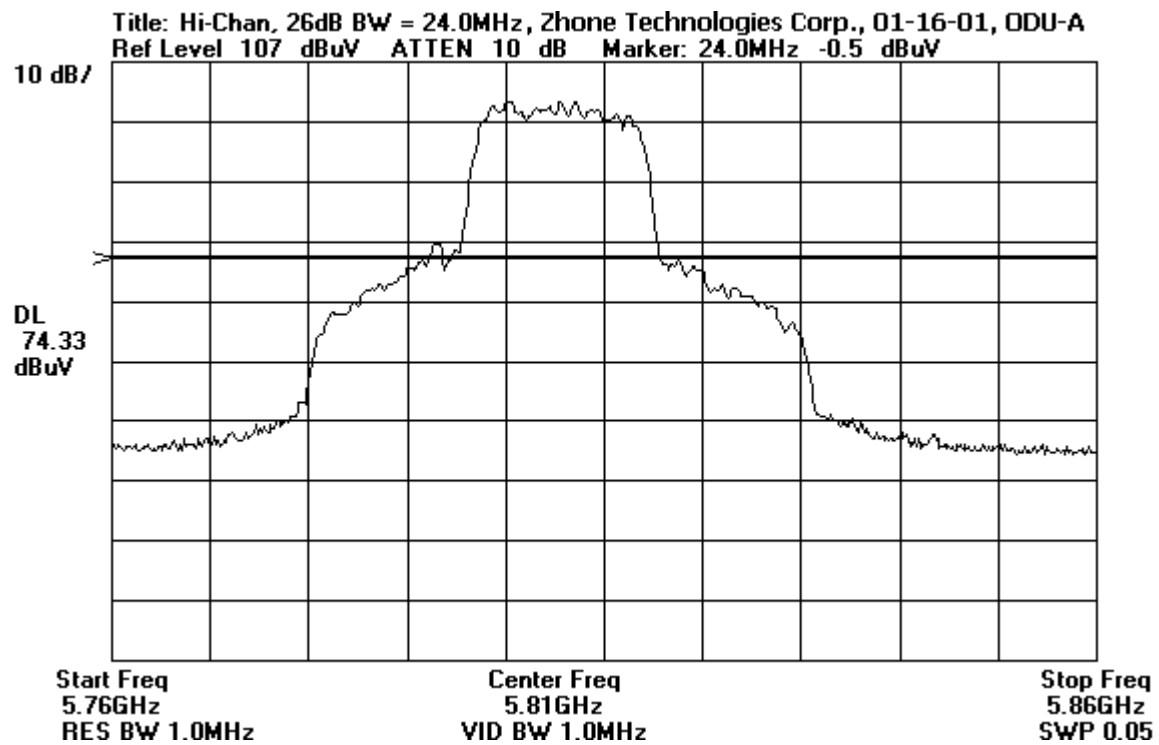


Occupied Bandwidth Plot

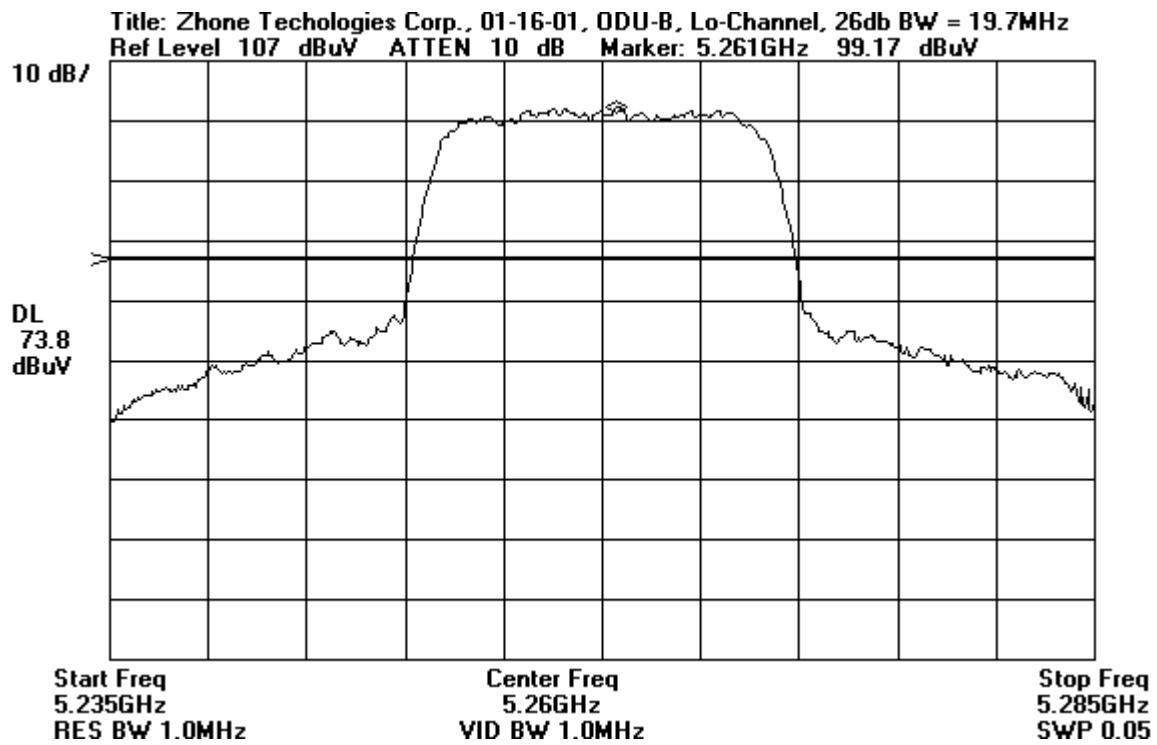

Occupied Bandwidth Plot

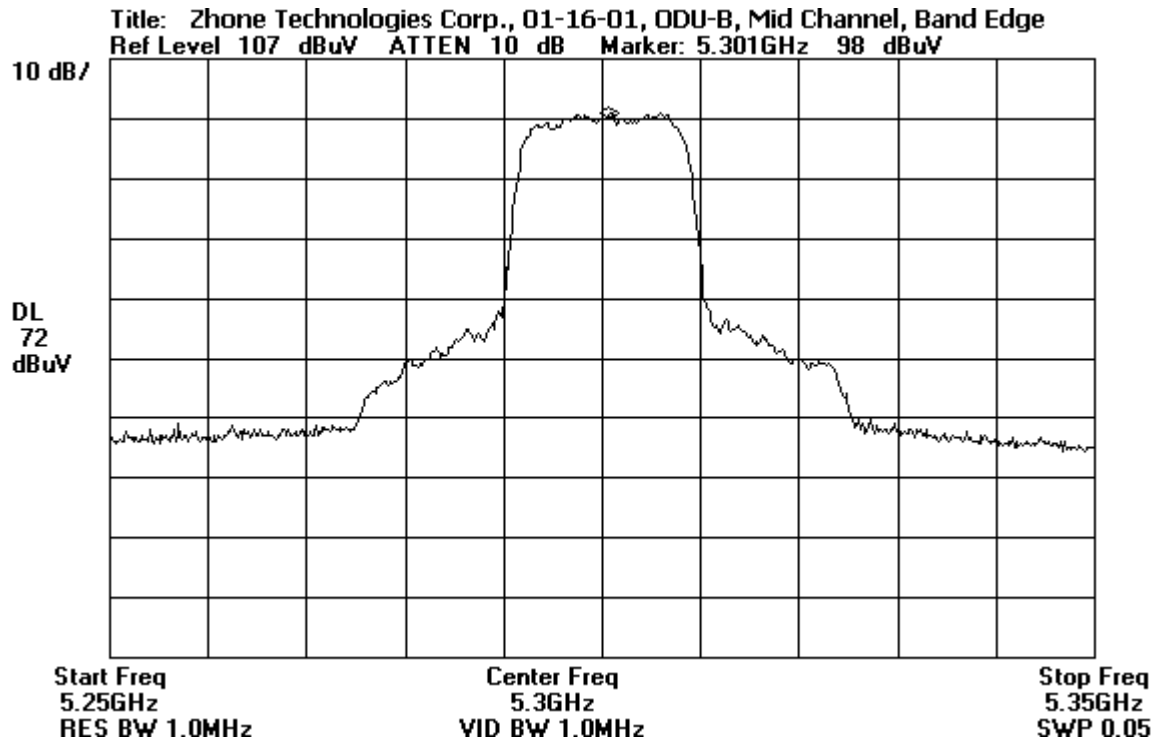

Occupied Bandwidth Plot

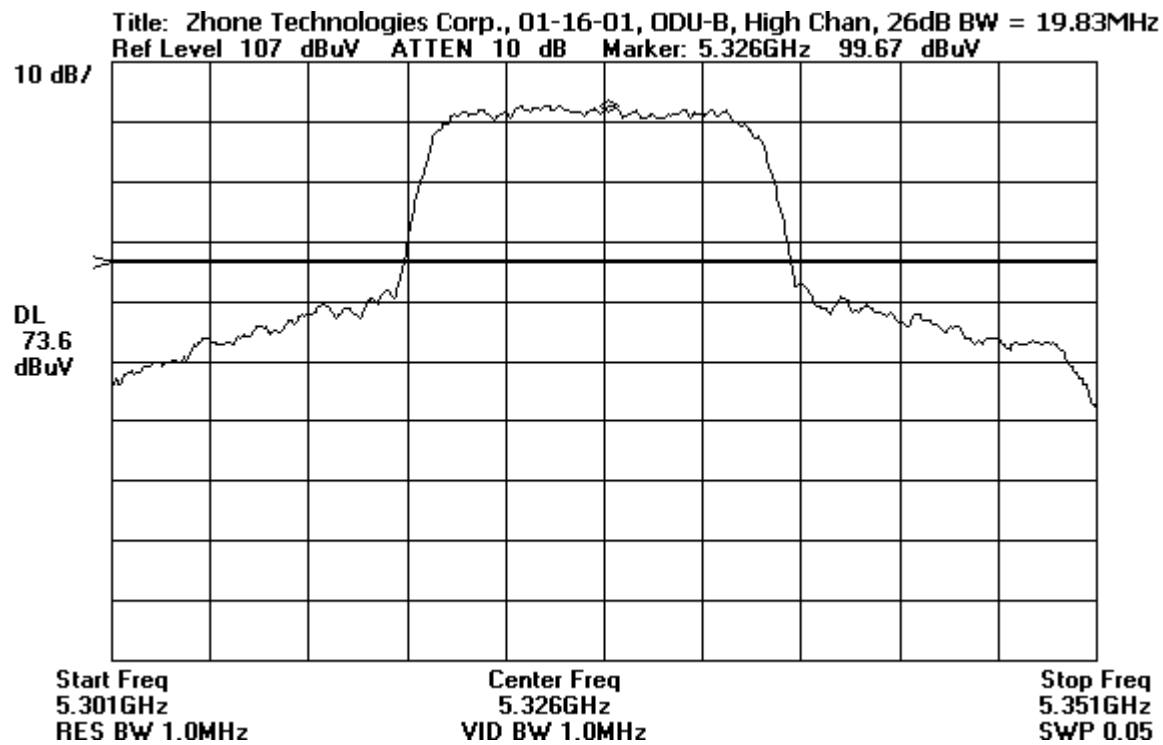

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209 Direct**

Work Order #: **75966**

Date: 02/23/2001

Test Type: **Radiated Scan**

Time: 10:28:00

Equipment: **Digital Microwave System**

Sequence#: 2

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 02

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-A	02
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	3

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
Notebook PC	Dell	Inspiron 3500	0009653D

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-A S/N 02 and IDU S/N 3 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. The EUT is transmitting on low-channel.

Measurement Data: Reading listed by margin. Test Distance: None

#	Freq MHz	Rdng dBμV	hol-h				Dist Table	Corr DBμV/m	Spec dBμV/m	Margin dB	Polar Ant
			dB	dB	dB	dB					
1	15374.980M	35.5	+14.7				+0.0	50.2	54.0	-3.8	None
Ave											
^	15374.970M	37.8	+14.7				+0.0	52.5	54.0	-1.5	None
3	11481.080M	35.8	+9.2				+0.0	45.0	54.0	-9.0	None
4	17214.000M	31.5	+12.2				+0.0	43.7	54.0	-10.3	None
5	22952.330M	4.0	+38.0				+0.0	42.0	54.0	-12.0	None
Ave											
^	22952.330M	15.0	+38.0				+0.0	53.0	54.0	-1.0	None
7	34428.340M	15.0	+0.0				+0.0	15.0	54.0	-39.0	None
8	28690.330M	11.8	+0.0				+0.0	11.8	54.0	-42.2	None

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209 Direct**

Work Order #: **75966**

Date: 02/23/2001

Test Type: **Radiated Scan**

Time: 10:25:00

Equipment: **Digital Microwave System**

Sequence#: 3

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 02

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-A	02
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	3

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
Notebook PC	Dell	Inspiron 3500	0009653D

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-A S/N 02 and IDU S/N 3 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. The EUT is transmitting on mid channel.

Measurement Data: Reading listed by margin. Test Distance: None

#	Freq MHz	Rdng dBμV	hol-h				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
			dB	dB	dB	dB					
1	23094.500M	12.3	+39.4				+0.0	51.7	54.0	-2.3	None
	Ave										
^	23094.500M	23.3	+39.4				+0.0	62.7	54.0	+8.7	None
3	20639.970M	26.3	+21.5				+0.0	47.8	54.0	-6.2	None
	Ave										
^	20639.970M	31.7	+21.5				+0.0	53.2	54.0	-0.8	None
5	15479.980M	32.4	+15.3				+0.0	47.7	54.0	-6.3	None
	Ave										
^	15479.980M	35.3	+15.3				+0.0	50.6	54.0	-3.4	None
7	11551.130M	35.0	+9.4				+0.0	44.4	54.0	-9.6	None
8	17318.500M	28.2	+11.6				+0.0	39.8	54.0	-14.2	None

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209 Direct**

Work Order #: **75966**

Date: 01/17/2001

Test Type: **Radiated Scan**

Time: 10:29:10

Equipment: **Digital Microwave System**

Sequence#: 4

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 02

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-A	02
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	3

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
Notebook PC	Dell	Inspiron 3500	0009653D

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one se ODU-A S/N 02 and IDU S/N 3 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. The EUT is transmitting on high channel.

Measurement Data: Reading listed by margin. Test Distance: None

#	Freq MHz	Rdng dBμV	hol-h				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
			dB	dB	dB	dB					
1	15569.950M	23.2	+15.5				+0.0	38.7	54.0	-15.3	None
Ave											
^	15569.980M	45.3	+15.5				+0.0	60.8	54.0	+6.8	None
2	23226.500M	2.0	+38.7				+0.0	40.7	54.0	-13.3	None
Ave											
^	23226.980M	13.0	+38.7				+0.0	51.7	54.0	-2.3	None
3	17419.500M	36.0	+11.1				+0.0	47.1	54.0	-6.9	None
4	11611.330M	37.5	+9.5				+0.0	47.0	54.0	-7.0	None
7	34841.610M	17.2	+0.0				+0.0	17.2	54.0	-36.8	None
8	29033.980M	11.3	+0.0				+0.0	11.3	54.0	-42.7	None

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209**

Work Order #: **75966**

Date: 01/18/2001

Test Type: **Radiated Scan**

Time: 12:19:05

Equipment: **Digital Microwave System**

Sequence#: 16

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 02

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-A	02
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	3
Coaxial Cable, 6-ft	Times Microwave Systems	LMR-600	None
Antenna, 2ft	Gabriel Electronics	SSP2-52B	T92209
Antenna Feedhorn, 2-ft	Gabriel Electronics	118047	90483
Antenna, 6-ft	Gabriel Electronics	SSP6-52A	692828
Antenna Feedhorn, 6-ft	Gabriel Electronics	91240	118046

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	Dell	Inspiron 3500	0009653D
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057

Test Conditions / Notes:

This data sheet comprises the following configuration: ODU-A operating on its LOW channel, which is the highest output power channel for that set. The set was tested using the highest and lowest gain antennas on the channels listed above. The lowest gain antenna represents the highest output power of the device and the highest gain antenna represents the lowest output power of the device. Test Setup: The EUT is comprised of a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit), coaxial cable, and either a 2-ft (highest gain) or 6-ft (lowest gain) antenna, along with support equipment that includes two notebook PC's. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable. On the IDU, an RG-58 cable connects DS3 IN and DS3 OUT in loopback. The set is constantly transmitting and receiving autonomously. The RF signal port of the ODU is connected to the antenna connector port of either the 2-ft (high gain) or 6-ft (low gain) antenna via a 6-ft coaxial cable. The unit was tested with both antennas and the data sheet comprises the highest readings from both antenna configurations.

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	hol-h Chase dB	Horn dB	HP-84 dB	rad_c dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	1112.967M	21.7	+3.4 +0.0	+23.5	+0.0	+0.0	+0.0	48.6	54.0	-5.4	Vert
2	400.055M	45.1	+0.0 +16.4	+0.0	-27.5	+6.1	+0.0	40.1	46.0	-5.9	Vert
^	400.036M	47.7	+0.0 +16.4	+0.0	-27.5	+6.1	+0.0	42.7	46.0	-3.3	Vert
4	60.058M	53.6	+0.0 +5.4	+0.0	-27.9	+2.0	+0.0	33.1	40.0	-6.9	Vert

5	80.033M	51.6	+0.0 +6.8	+0.0	-27.8	+2.4	+0.0	33.0	40.0	-7.0	Horiz
^	80.055M	54.5	+0.0 +6.8	+0.0	-27.8	+2.4	+0.0	35.9	40.0	-4.1	Horiz
7	40.047M	43.7	+0.0 +13.6	+0.0	-27.9	+1.6	+0.0	31.0	40.0	-9.0	Vert
^	40.049M	46.9	+0.0 +13.6	+0.0	-27.9	+1.6	+0.0	34.2	40.0	-5.8	Vert
9	2746.608M	10.8	+6.1 +0.0	+27.5	+0.0	+0.0	+0.0	44.4	54.0	-9.6	Vert

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC 15.207**

Work Order #: **75966**

Date: 01/18/2001

Test Type: **Conducted Emissions**

Time: 15:25:34

Equipment: **Digital Microwave System**

Sequence#: 22

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 02

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-A	02
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	3
Coaxial Cable, 6-ft	Times Microwave Systems	LMR-600	None

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
Notebook PC	Dell	Inspiron 3500	0009653D
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-A S/N 02 and IDU S/N 3 - is tested for conducted emissions. The fundamental frequency is 5.775GHz. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is connected to the IBM notebook via a 6-ft serial cable. The units are constantly transmitting and receiving autonomously. An RG-58 cable connects DS3 IN and DS3 OUT in loopback. A 6-ft coaxial cable is connected to the IDU RF connector port and is terminated with a 50-ohm dummy load. The units are constantly transmitting and receiving autonomously. AC Power = 120vac, 60-Hz

Measurement Data:


Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dBμV	cond_ BLK-L dB	LISN dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	451.673k	45.2	+0.0 -0.2	+0.5	+0.0	45.5	48.0	-2.5	Black
2	22.446M	38.0	+1.0 +2.8	+1.1	+0.0	42.9	48.0	-5.1	Black
3	789.675k	41.5	+0.1 -0.1	+0.4	+0.0	41.9	48.0	-6.1	Black
4	3.716M	40.9	+0.3 +0.1	+0.5	+0.0	41.8	48.0	-6.2	Black
5	4.042M	39.8	+0.4 +0.1	+0.5	+0.0	40.8	48.0	-7.2	Black
6	27.170M	35.0	+1.0 +3.4	+1.3	+0.0	40.7	48.0	-7.3	Black
7	751.189k	40.2	+0.1 -0.1	+0.4	+0.0	40.6	48.0	-7.4	Black
8	2.932M	39.7	+0.3 +0.0	+0.5	+0.0	40.5	48.0	-7.5	Black

9	13.818M	37.7	+0.7 +1.2	+0.8	+0.0	40.4	48.0	-7.6	Black
10	23.500M	34.9	+1.0 +3.0	+1.2	+0.0	40.1	48.0	-7.9	Black
11	718.560k	39.7	+0.2 -0.2	+0.4	+0.0	40.1	48.0	-7.9	Black

CKC Laboratories, Inc. Date: 01/18/2001 Time: 15:25:34 WO#: 75966
FCC 15.207 Test Lead: Black Sequence#: 22
dB μ V Model ODU-A, Black Lead, 120vac, 60Hz

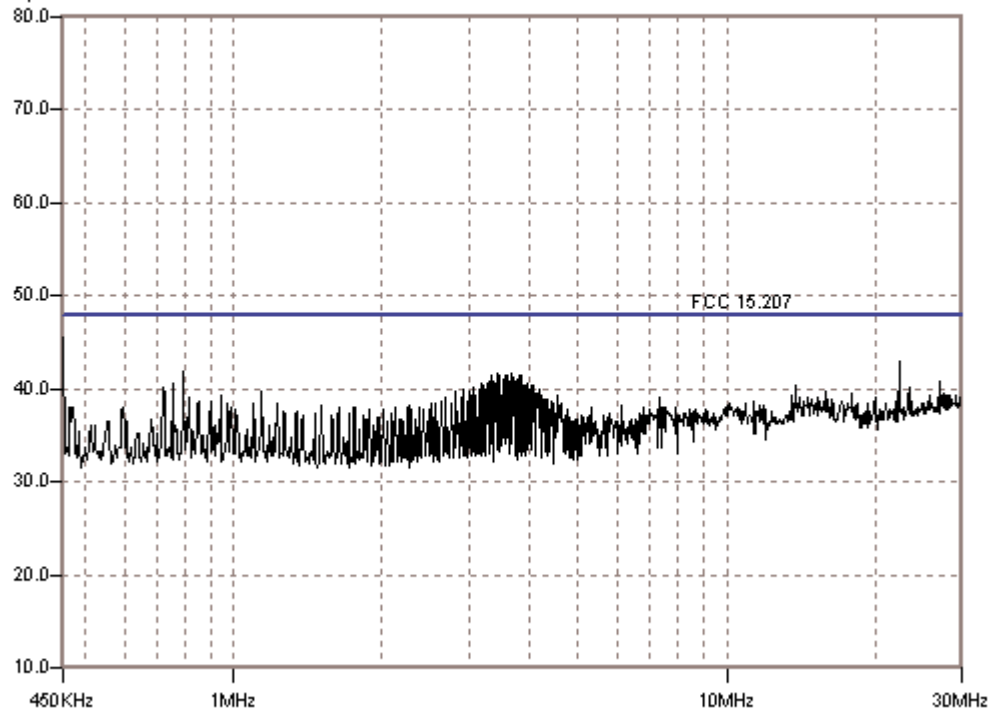

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC 15.207**

Work Order #: **75966**

Date: 01/18/2001

Test Type: **Conducted Emissions**

Time: 14:54:21

Equipment: **Digital Microwave System**

Sequence#: 21

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 02

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-A	02
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	3
Coaxial Cable, 6-ft	Times Microwave Systems	LMR-600	None

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
Notebook PC	Dell	Inspiron 3500	0009653D
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-A S/N 02 and IDU S/N 3 - is tested for conducted emissions. The fundamental frequency is 5.775GHz. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is connected to the IBM notebook via a 6-ft serial cable. The units are constantly transmitting and receiving autonomously. An RG-58 cable connects DS3 IN and DS3 OUT in loopback. A 6-ft coaxial cable is connected to the IDU RF connector port and is terminated with a 50-ohm dummy load. The units are constantly transmitting and receiving autonomously. AC Power = 120vac, 60-Hz

Measurement Data:


Reading listed by margin.

Test Lead: White

#	Freq MHz	Rdng dBμV	cond_ dB	LISN dB	WHT-L dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	523.624k	50.6	+0.0	+0.4	-0.4	+0.0	50.6	48.0	+2.6	White
								Ambient spike.		
2	508.565k	47.4	+0.0	+0.4	-0.4	+0.0	47.4	48.0	-0.6	White
								Ambient spike.		
3	493.505k	46.9	+0.0	+0.4	-0.4	+0.0	46.9	48.0	-1.1	White
								Ambient spike.		
4	22.446M	41.6	+1.0	+0.9	+2.9	+0.0	46.4	48.0	-1.6	White
								Ambient spike.		
5	3.554M	34.8	+0.3	+0.5	+0.0	+0.0	35.6	48.0	-12.4	White
6	3.730M	34.8	+0.3	+0.5	+0.0	+0.0	35.6	48.0	-12.4	White
7	4.030M	33.5	+0.4	+0.5	+0.0	+0.0	34.4	48.0	-13.6	White
8	2.512M	31.6	+0.3	+0.5	-0.1	+0.0	32.3	48.0	-15.7	White

9	1.123M	31.6	+0.1	+0.4	-0.2	+0.0	31.9	48.0	-16.1	White
10	975.300k	30.1	+0.1	+0.4	-0.2	+0.0	30.4	48.0	-17.6	White
11	7.054M	28.5	+0.5	+0.5	+0.2	+0.0	29.7	48.0	-18.3	White
12	596.900k	29.1	+0.1	+0.4	-0.4	+0.0	29.2	48.0	-18.8	White
13	514.420k	22.4	+0.0	+0.4	-0.4	+0.0	22.4	48.0	-25.6	White

CKC Laboratories, Inc. Date: 01/18/2001 Time: 14:54:21 WO#: 75966
FCC 15.207 Test Lead: White Sequence#: 21
dB μ V Model ODU-A, White Lead, 120vac, 60Hz

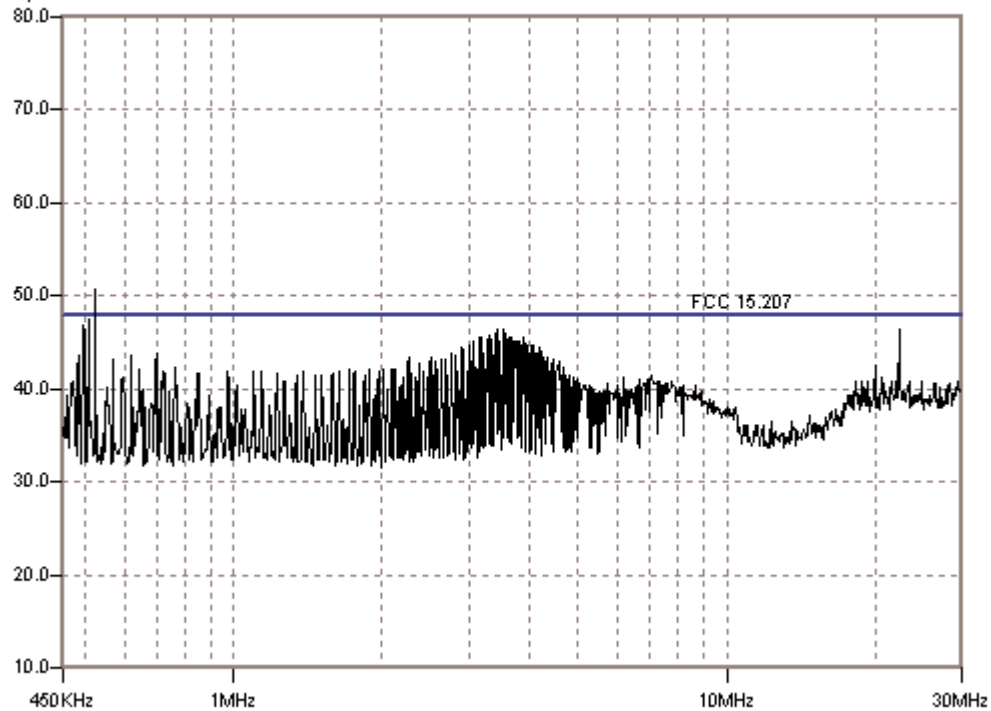

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209 Direct**

Work Order #: **75966**

Date: 01/16/2001

Test Type: **Radiated Scan**

Time: 11:07:26

Equipment: **Digital Microwave System**

Sequence#: 6

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 01

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-B	01
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	4

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
Notebook PC	Dell	Inspiron 3500	0009653D

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. The EUT is transmitting on low channel.

Measurement Data: Reading listed by margin. Test Distance: None

#	Freq MHz	Rdng dBμV	hol-h				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
			dB	dB	dB	dB					
1	21001.670M	24.2	+19.3				+0.0	43.5	54.0	-10.5	None
2	15751.670M	23.0	+15.9				+0.0	38.9	54.0	-15.1	None
3	10501.670M	21.5	+8.8				+0.0	30.3	54.0	-23.7	None
4	36751.670M	28.7	+0.0				+0.0	28.7	54.0	-25.3	None
5	26251.670M	25.3	+0.0				+0.0	25.3	54.0	-28.7	None
6	31501.670M	24.3	+0.0				+0.0	24.3	54.0	-29.7	None

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**
 Specification: **FCC15.209 Direct**
 Work Order #: **75966**
 Test Type: **Radiated Scan**
 Equipment: **Radio Up-Converter/Diplexer**
 Manufacturer: Zhone Technologies, Inc.
 Model: SZ-045-N5G-LNK
 S/N: 01

Date: 01/16/2001
 Time: 11:42:16
 Sequence#: 7
 Tested By: Conan Boyle

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-B	01
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	4

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
Notebook PC	Dell	Inspiron 3500	0009653D

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. The EUT is transmitting on mid channel.

Measurement Data: Reading listed by margin. Test Distance: None

#	Freq MHz	Rdng dBμV	hol-h				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
			dB	dB	dB	dB					
1	17744.970M	32.8	+13.4				+0.0	46.2	54.0	-7.8	Horiz
2	15900.830M	25.2	+16.2				+0.0	41.4	54.0	-12.6	Horiz
3	21200.830M	22.3	+18.5				+0.0	40.8	54.0	-13.2	Horiz
4	10600.830M	27.0	+7.6				+0.0	34.6	54.0	-19.4	Horiz
5	37100.840M	27.8	+0.0				+0.0	27.8	54.0	-26.2	Horiz
6	31800.830M	26.0	+0.0				+0.0	26.0	54.0	-28.0	Horiz
7	26500.830M	24.7	+0.0				+0.0	24.7	54.0	-29.3	Horiz

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209 Direct**

Work Order #: **75966**

Date: 01/17/2001

Test Type: **Radiated Scan**

Time: 09:04:48

Equipment: **Digital Microwave System**

Sequence#: 8

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 01

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-B	01
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	4

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
Notebook PC	Dell	Inspiron 3500	0009653D

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for direct power out. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable and a 12-in RG-58 cable connects DS3 IN and DS3 OUT in loopback. The units are constantly transmitting and receiving autonomously. The RF signal port of the IDU is connected to the RF Input of a spectrum analyzer. The EUT is transmitting on high channel.

Measurement Data:

Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dBμV	hol-h				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
			dB	dB	dB	dB					
1	15991.860M	28.3	+16.4				+0.0	44.7	54.0	-9.3	Vert
2	21345.030M	24.8	+18.0				+0.0	42.8	54.0	-11.2	Vert
3	10657.530M	26.8	+6.9				+0.0	33.7	54.0	-20.3	Vert
4	37301.190M	29.5	+0.0				+0.0	29.5	54.0	-24.5	Vert
5	31972.190M	28.2	+0.0				+0.0	28.2	54.0	-25.8	Vert
6	26674.030M	23.7	+0.0				+0.0	23.7	54.0	-30.3	Vert

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC15.209**

Work Order #: **75966**

Date: 01/18/2001

Test Type: **Radiated Scan**

Time: 12:19:05

Equipment: **Digital Microwave System**

Sequence#: 18

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 01

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-B	01
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	4
Coaxial Cable, 6-ft	Times Microwave Systems	LMR-600	None
Antenna, 2ft	Gabriel Electronics	SSP2-52B	T92209
Antenna Feedhorn, 2-ft	Gabriel Electronics	118047	90483
Antenna, 6-ft	Gabriel Electronics	SSP6-52A	692828
Antenna Feedhorn, 6-ft	Gabriel Electronics	91240	118046

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	Dell	Inspiron 3500	0009653D
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057

Test Conditions / Notes:

This data sheet comprises the following configuration: ODU-B operating on its MID channel, which is the highest output power channel for that set. The set was tested using the highest and lowest gain antennas on the channels listed above. The lowest gain antenna represents the highest output power of the device and the highest gain antenna represents the lowest output power of the device. Test Setup: The EUT is comprised of a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit), coaxial cable, and either a 2-ft (highest gain) or 6-ft (lowest gain) antenna, along with support equipment that includes two notebook PC's. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is also connected to the IBM notebook via a 6-ft serial cable. On the IDU, an RG-58 cable connects DS3 IN and DS3 OUT in loopback. The set is constantly transmitting and receiving autonomously. The RF signal port of the ODU is connected to the antenna connector port of either the 2-ft (high gain) or 6-ft (low gain) antenna via a 6-ft coaxial cable. The unit was tested with both antennas and the data sheet comprises the highest readings from both antenna configurations.

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	hol-h Chase dB	Horn dB	HP-84 dB	rad_c dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	1112.967M	21.7	+3.4 +0.0	+23.5	+0.0	+0.0	+0.0	48.6	54.0	-5.4	Vert
2	400.055M	45.1	+0.0 +16.4	+0.0	-27.5	+6.1	+0.0	40.1	46.0	-5.9	Vert
^	400.036M	47.7	+0.0 +16.4	+0.0	-27.5	+6.1	+0.0	42.7	46.0	-3.3	Vert
4	60.058M	53.6	+0.0 +5.4	+0.0	-27.9	+2.0	+0.0	33.1	40.0	-6.9	Vert

5	80.033M	51.6	+0.0 +6.8	+0.0	-27.8	+2.4	+0.0	33.0	40.0	-7.0	Horiz
^	80.055M	54.5	+0.0 +6.8	+0.0	-27.8	+2.4	+0.0	35.9	40.0	-4.1	Horiz
7	40.047M	43.7	+0.0 +13.6	+0.0	-27.9	+1.6	+0.0	31.0	40.0	-9.0	Vert
^	40.049M	46.9	+0.0 +13.6	+0.0	-27.9	+1.6	+0.0	34.2	40.0	-5.8	Vert
9	2746.608M	10.8	+6.1 +0.0	+27.5	+0.0	+0.0	+0.0	44.4	54.0	-9.6	Vert

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC 15.207**

Work Order #: **75966**

Date: 01/18/2001

Test Type: **Conducted Emissions**

Time: 14:12:47

Equipment: **Digital Microwave System**

Sequence#: 19

Manufacturer: Zhone Technologies, Inc.

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 01

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-B	01
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	4
Coaxial Cable, 6-ft	Times Microwave Systems	LMR-600	None

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
Notebook PC	Dell	Inspiron 3500	0009653D
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1

Test Conditions / Notes:


The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for conducted emissions. The fundamental frequency is 5.300GHz. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is connected to the IBM notebook via a 6-ft serial cable. The units are constantly transmitting and receiving autonomously. An RG-58 cable connects DS3 IN and DS3 OUT in loopback. A 6-ft coaxial cable is connected to the IDU RF connector port and is terminated with a 50-ohm dummy load. The units are constantly transmitting and receiving autonomously. AC Power = 120vac, 60-Hz

Measurement Data: Reading listed by margin. Test Lead: Black

#	Freq MHz	Rdng dBμV	cond_ BLK-L dB	LISN dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	3.442M	40.8	+0.3 +0.1	+0.5	+0.0	41.7	48.0	-6.3	Black
2	15.575M	38.6	+0.7 +1.5	+0.8	+0.0	41.6	48.0	-6.4	Black
3	3.650M	40.7	+0.3 +0.1	+0.5	+0.0	41.6	48.0	-6.4	Black
4	13.584M	38.7	+0.7 +1.2	+0.8	+0.0	41.4	48.0	-6.6	Black
5	3.729M	40.5	+0.3 +0.1	+0.5	+0.0	41.4	48.0	-6.6	Black
6	3.566M	40.5	+0.3 +0.1	+0.5	+0.0	41.4	48.0	-6.6	Black
7	3.523M	40.5	+0.3 +0.1	+0.5	+0.0	41.4	48.0	-6.6	Black

8	3.394M	40.5	+0.3 +0.1	+0.5	+0.0	41.4	48.0	-6.6	Black
9	3.770M	40.4	+0.3 +0.1	+0.5	+0.0	41.3	48.0	-6.7	Black
10	3.609M	40.4	+0.3 +0.1	+0.5	+0.0	41.3	48.0	-6.7	Black
11	3.270M	40.3	+0.3 +0.0	+0.5	+0.0	41.1	48.0	-6.9	Black
12	3.313M	40.2	+0.3 +0.0	+0.5	+0.0	41.0	48.0	-7.0	Black
13	3.947M	39.8	+0.4 +0.1	+0.5	+0.0	40.8	48.0	-7.2	Black
14	17.566M	37.3	+0.8 +1.8	+0.8	+0.0	40.7	48.0	-7.3	Black
15	3.899M	39.7	+0.4 +0.1	+0.5	+0.0	40.7	48.0	-7.3	Black
16	3.189M	39.9	+0.3 +0.0	+0.5	+0.0	40.7	48.0	-7.3	Black
17	20.026M	36.7	+0.9 +2.2	+0.8	+0.0	40.6	48.0	-7.4	Black
18	3.480M	39.6	+0.3 +0.1	+0.5	+0.0	40.5	48.0	-7.5	Black
19	3.232M	39.7	+0.3 +0.0	+0.5	+0.0	40.5	48.0	-7.5	Black
20	15.107M	37.5	+0.7 +1.4	+0.8	+0.0	40.4	48.0	-7.6	Black
21	2.935M	39.6	+0.3 +0.0	+0.5	+0.0	40.4	48.0	-7.6	Black
22	3.865M	39.3	+0.4 +0.1	+0.5	+0.0	40.3	48.0	-7.7	Black
23	3.694M	39.4	+0.3 +0.1	+0.5	+0.0	40.3	48.0	-7.7	Black
24	3.356M	39.4	+0.3 +0.1	+0.5	+0.0	40.3	48.0	-7.7	Black
25	4.070M	39.1	+0.4 +0.1	+0.5	+0.0	40.1	48.0	-7.9	Black
26	3.981M	39.1	+0.4 +0.1	+0.5	+0.0	40.1	48.0	-7.9	Black
27	3.146M	39.3	+0.3 +0.0	+0.5	+0.0	40.1	48.0	-7.9	Black
28	3.824M	39.0	+0.4 +0.1	+0.5	+0.0	40.0	48.0	-8.0	Black
29	3.021M	39.2	+0.3 +0.0	+0.5	+0.0	40.0	48.0	-8.0	Black
30	22.441M	27.7	+1.0 +2.8	+1.1	+0.0	32.6	48.0	-15.4	Black
^	22.446M	38.6	+1.0 +2.8	+1.1	+0.0	43.5	48.0	-4.5	Black

CKC Laboratories, Inc. Date: 01/18/2001 Time: 14:12:47 WO#: 75966
FCC 15.207 Test Lead: Black Sequence#: 19
dB μ V Model ODU-B, Black Lead, 120vac, 60Hz

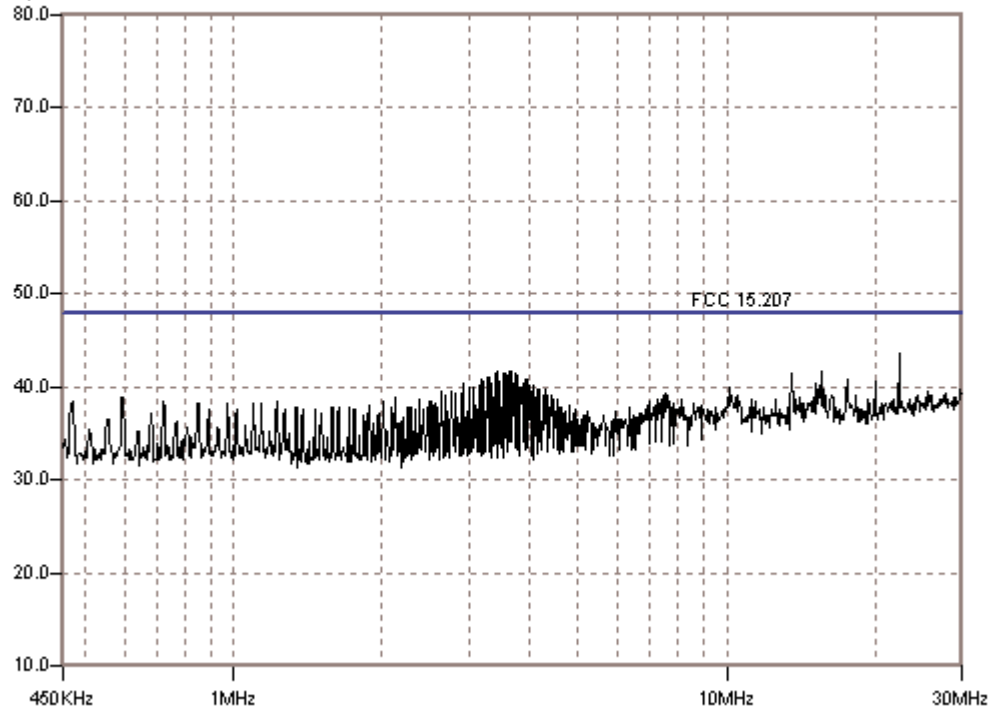

Test Location: CKC Laboratories, Inc. • 480 Los Viboras Rd. • Hollister, CA 95023 • 831-637-8176

Customer: **Zhone Technologies, Inc.**

Specification: **FCC 15.207**

Work Order #: **75966**

Date: 01/18/2001

Test Type: **Conducted Emissions**

Time: 14:31:53

Equipment: **Digital Microwave System**

Sequence#: 20

Manufacturer: Zhone Technologies

Tested By: Conan Boyle

Model: SZ-045-N5G-LNK

S/N: 01

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Radio Up-Converter/Diplexer	Zhone Technologies, Inc.	SZ-045-N56-ODU-B	01
DS3 Data Interface	Zhone Technologies, Inc.	Sky Zhone 45	4
Coaxial Cable, 6-ft	Times Microwave Systems	LMR-600	None

Support Devices:

Function	Manufacturer	Model #	S/N
Notebook PC	IBM	Thinkpad T20	Zhone Tech. Inc. Asset #11057
AC-DC Adapter	IBM	P/N 02K6657	1Z0ZA022ZM8
Notebook PC	Dell	Inspiron 3500	0009653D
AC-DC Adapter	Dell	P/N 7832D	17972-94Q-1QZ1

Test Conditions / Notes:

The EUT is comprised of two identical sets of equipment. Each set includes a Radio Up-Converter/Diplexer ODU (Outdoor Unit) and a DS3 Data Interface IDU (Indoor Unit) and support equipment that includes two notebook PC's. Test Setup: For this test, one set - ODU-B S/N 01 and IDU S/N 4 - is tested for conducted emissions. The fundamental frequency is 5.300GHz. The ODU is connected to the IDU via a single 50-ft, RG-6, 75-ohm, coaxial cable. The IDU is connected to the Dell PC via a 6-ft, Cat 5, Ethernet cable. The IDU is connected to the IBM notebook via a 6-ft serial cable. The units are constantly transmitting and receiving autonomously. An RG-58 cable connects DS3 IN and DS3 OUT in loopback. A 6-ft coaxial cable is connected to the IDU RF connector port and is terminated with a 50-ohm dummy load. The units are constantly transmitting and receiving autonomously. AC Power = 120vac, 60-Hz

Measurement Data: Reading listed by margin. Test Lead: White

#	Freq MHz	Rdng dBμV	cond_ dB	LISN dB	WHT-L dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	27.131M	43.5	+1.0	+1.2	+3.6	+0.0	49.3	48.0	+1.3	White
								Ambient spike.		
2	22.446M	41.8	+1.0	+0.9	+2.9	+0.0	46.6	48.0	-1.4	White
								Ambient spike.		
3	3.550M	44.0	+0.3	+0.5	+0.0	+0.0	44.8	48.0	-3.2	White
^	3.549M	45.6	+0.3	+0.5	+0.0	+0.0	46.4	48.0	-1.6	White
5	20.014M	38.2	+0.9	+0.7	+2.4	+0.0	42.2	48.0	-5.8	White
^	20.015M	41.8	+0.9	+0.7	+2.4	+0.0	45.8	48.0	-2.2	White
7	1.884M	41.6	+0.2	+0.4	-0.1	+0.0	42.1	48.0	-5.9	White

8	6.920M	40.4	+0.5	+0.5	+0.2	+0.0	41.6	48.0	-6.4	White
9	721.200k	41.2	+0.2	+0.4	-0.2	+0.0	41.6	48.0	-6.4	White
10	972.500k	41.2	+0.1	+0.4	-0.2	+0.0	41.5	48.0	-6.5	White
11	4.464M	40.2	+0.4	+0.5	+0.0	+0.0	41.1	48.0	-6.9	White
QP										
^	4.464M	42.5	+0.4	+0.5	+0.0	+0.0	43.4	48.0	-4.6	White
13	10.150M	36.7	+0.6	+0.6	+0.4	+0.0	38.3	48.0	-9.7	White

CKC Laboratories, Inc. Date: 01/18/2001 Time: 14:31:53 WO#: 75966
FCC 15.207 Test Lead: White Sequence#: 20
dB μ V Model ODU-B, White Lead, 120vac, 60Hz

