



NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), MIMO-Ant 1, Channel Bandwidth: 80 MHz

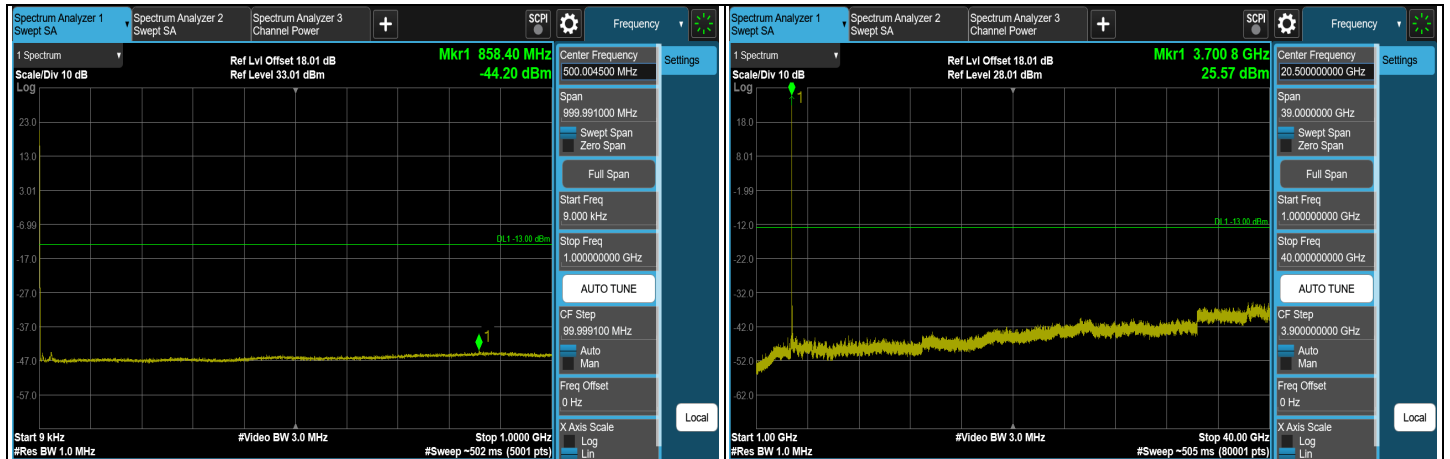

CH 649334 (3740.01 MHz)

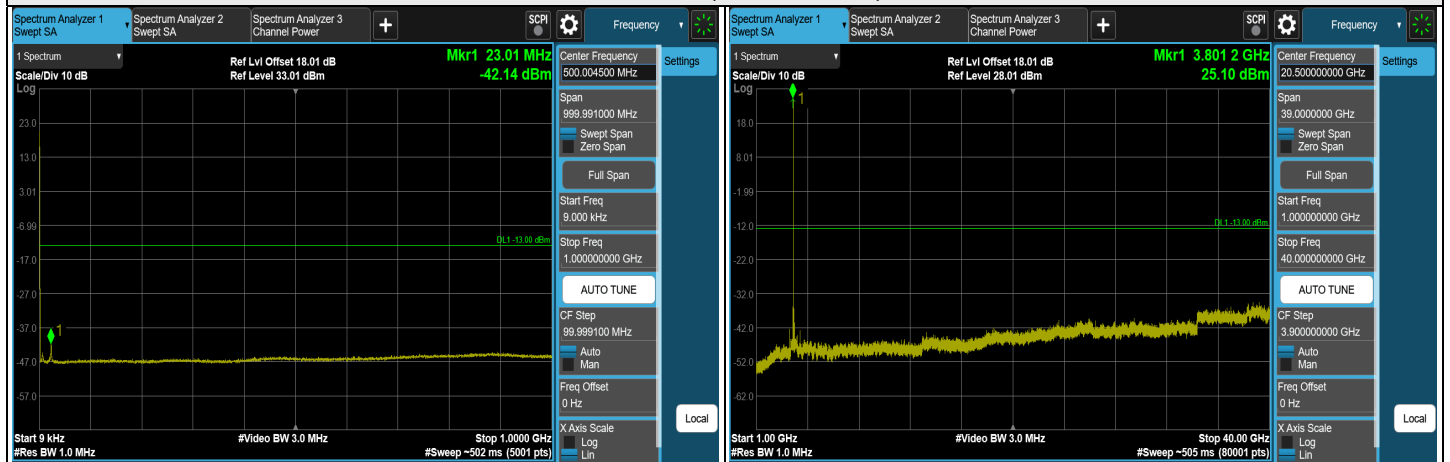

CH 656000 (3840 MHz)




CH 662666 (3939.99 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.


NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), MIMO-Ant 1, Channel Bandwidth: 80 MHz

CH 649334 (3740.01 MHz)

1 RB

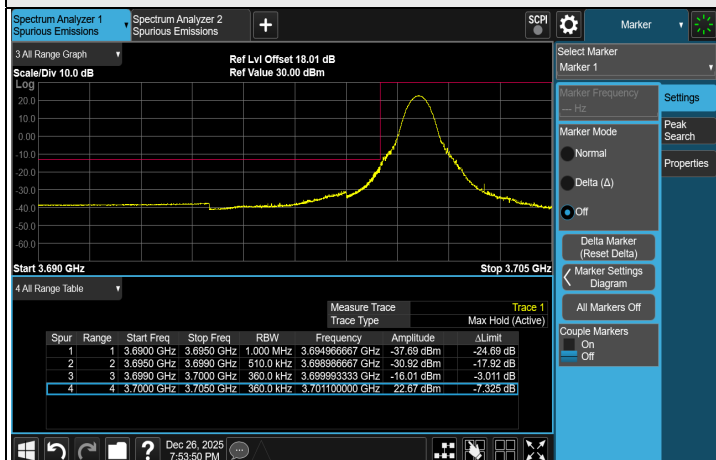


FULL RB

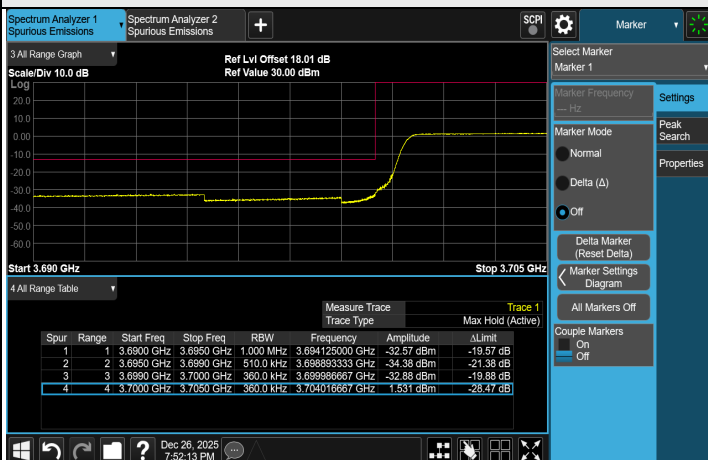


CH 662666 (3939.99 MHz)


1 RB

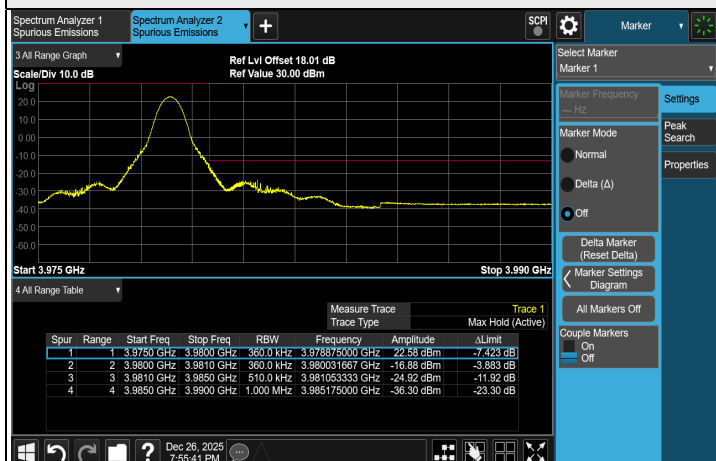


FULL RB

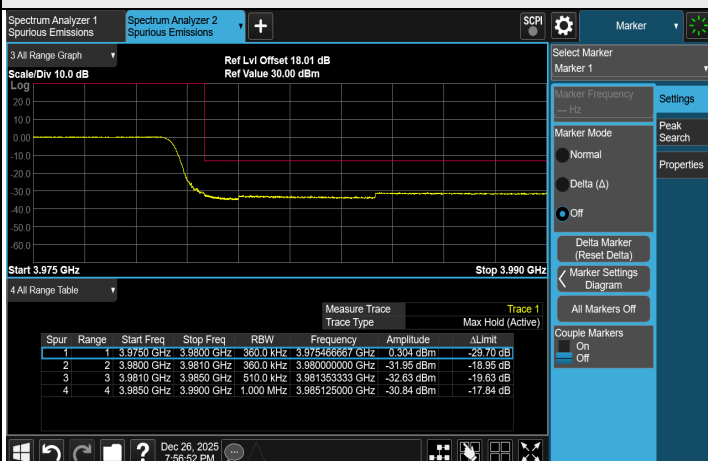


NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), MIMO-Ant 1, Channel Bandwidth: 90 MHz

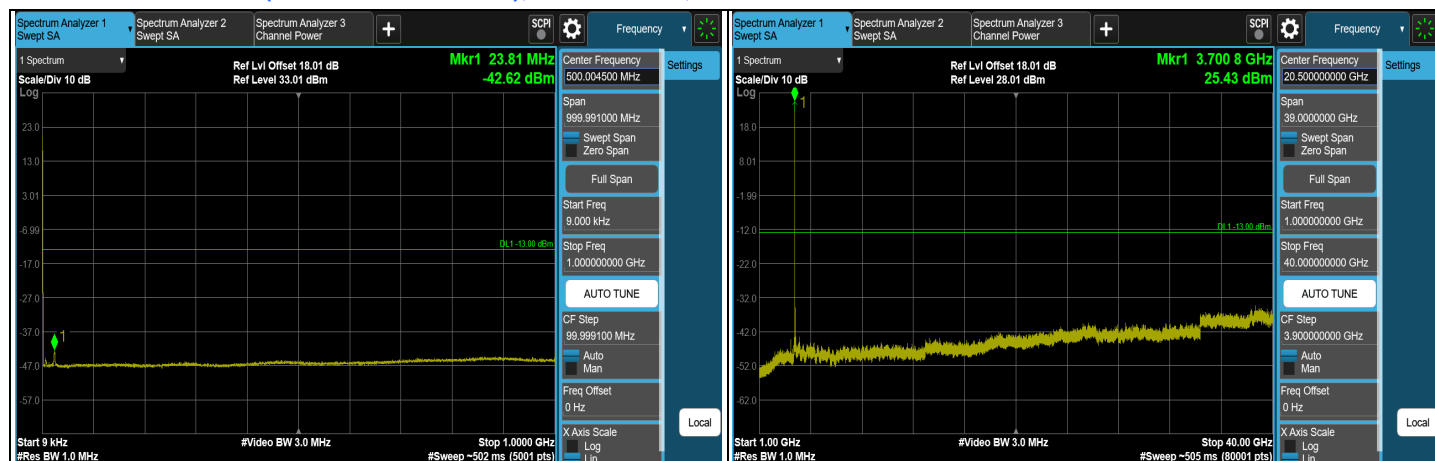

CH 649668 (3745.02 MHz)

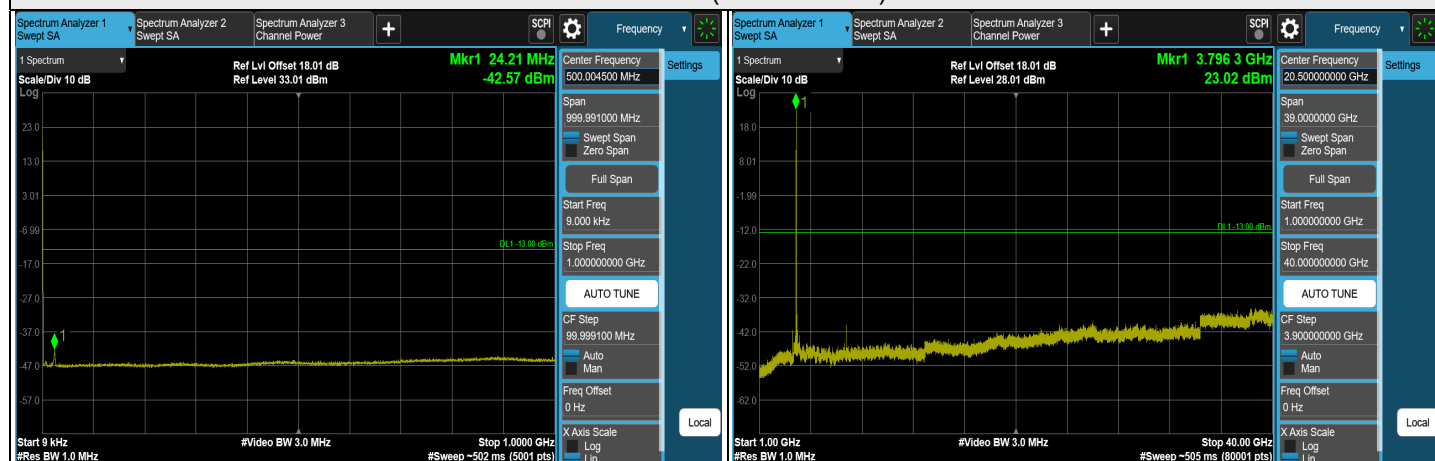

CH 656000 (3840 MHz)

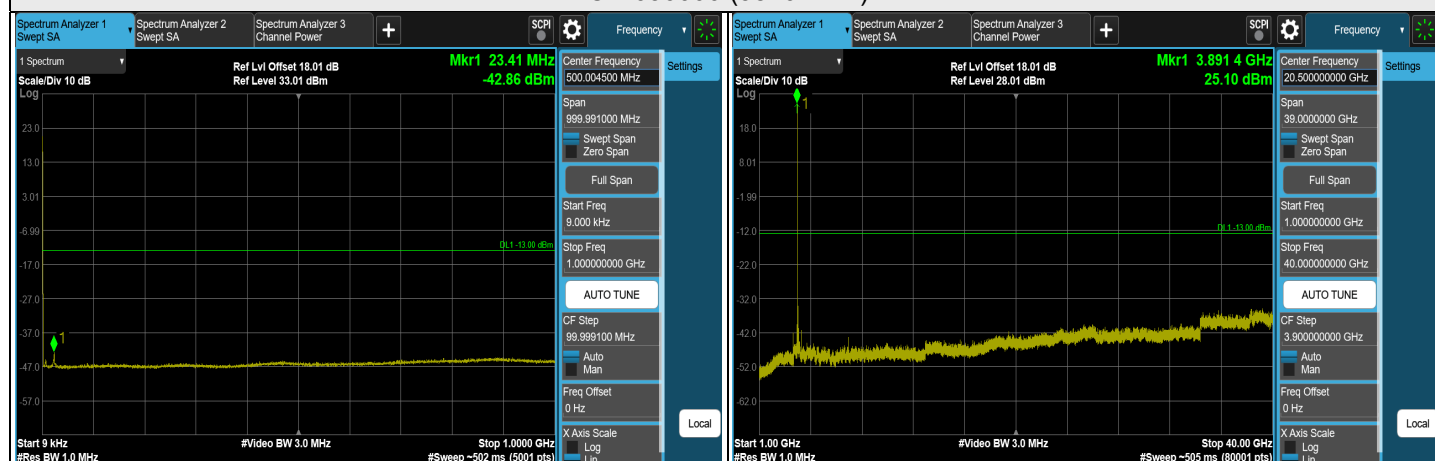


CH 662332 (3934.98 MHz)


Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), MIMO-Ant 1, Channel Bandwidth: 90 MHz


CH 649668 (3745.02 MHz)

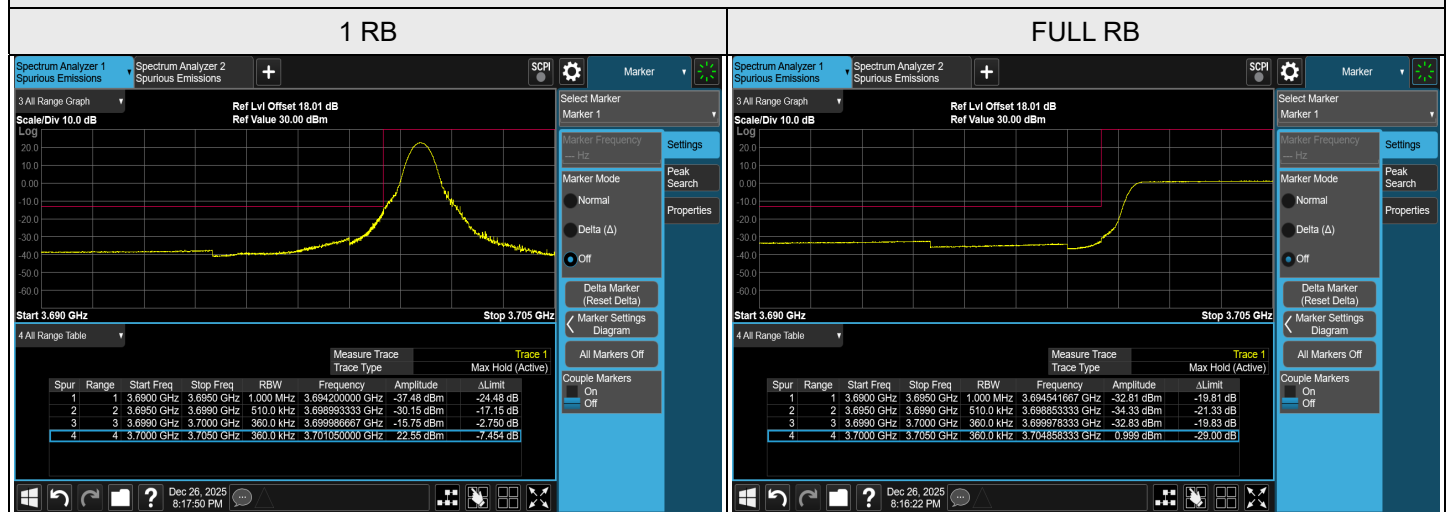


CH 662332 (3934.98 MHz)

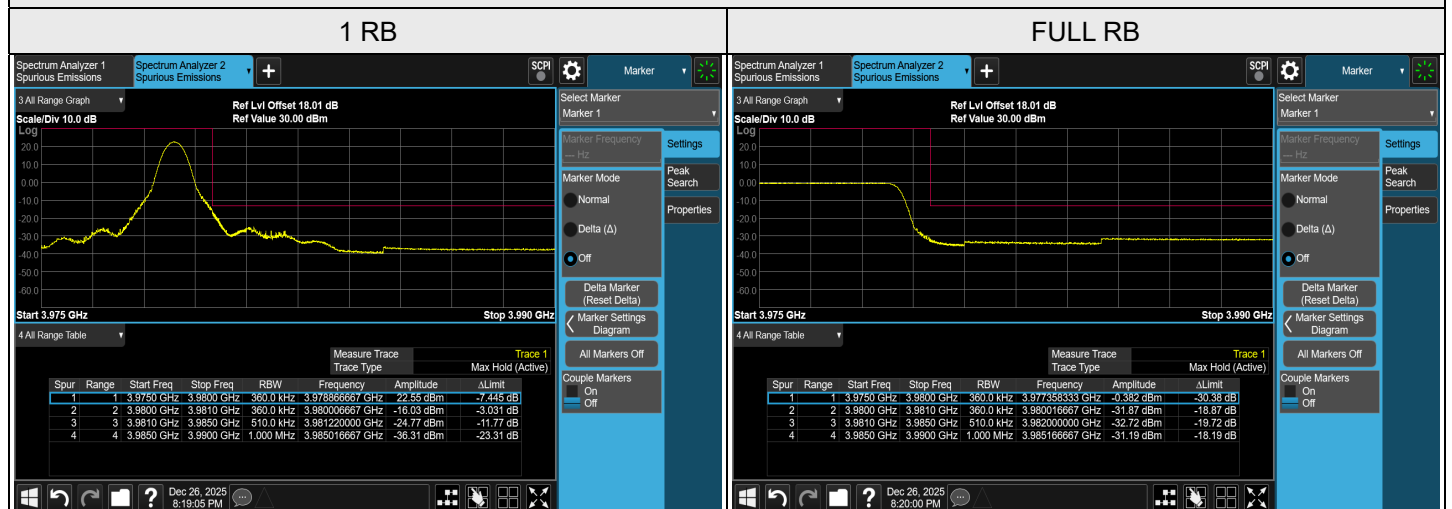


NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), MIMO-Ant 1, Channel Bandwidth: 100 MHz

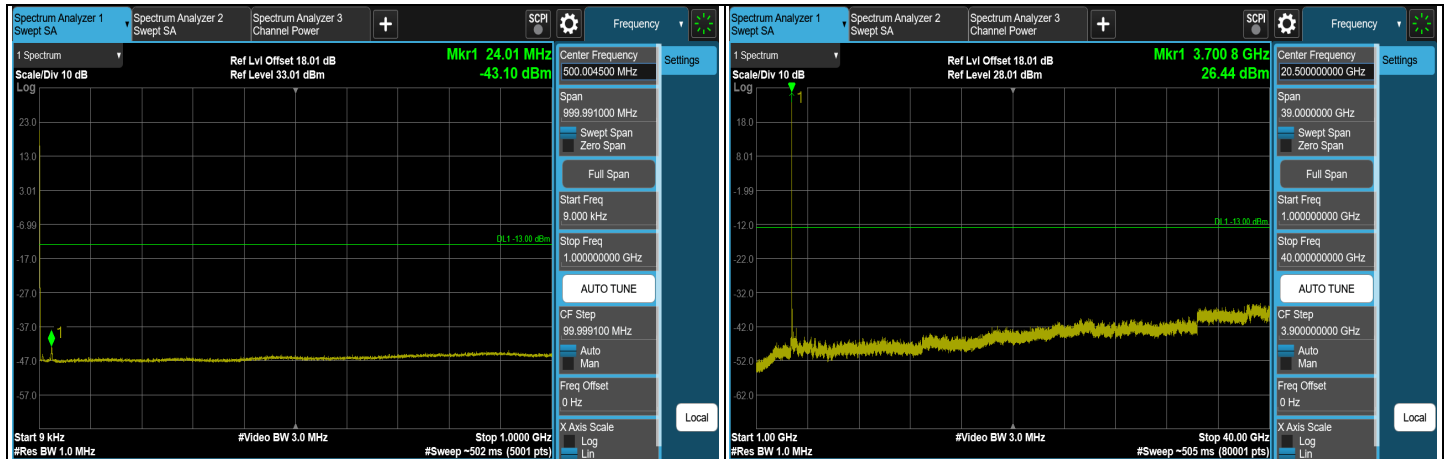

CH 650000 (3750 MHz)

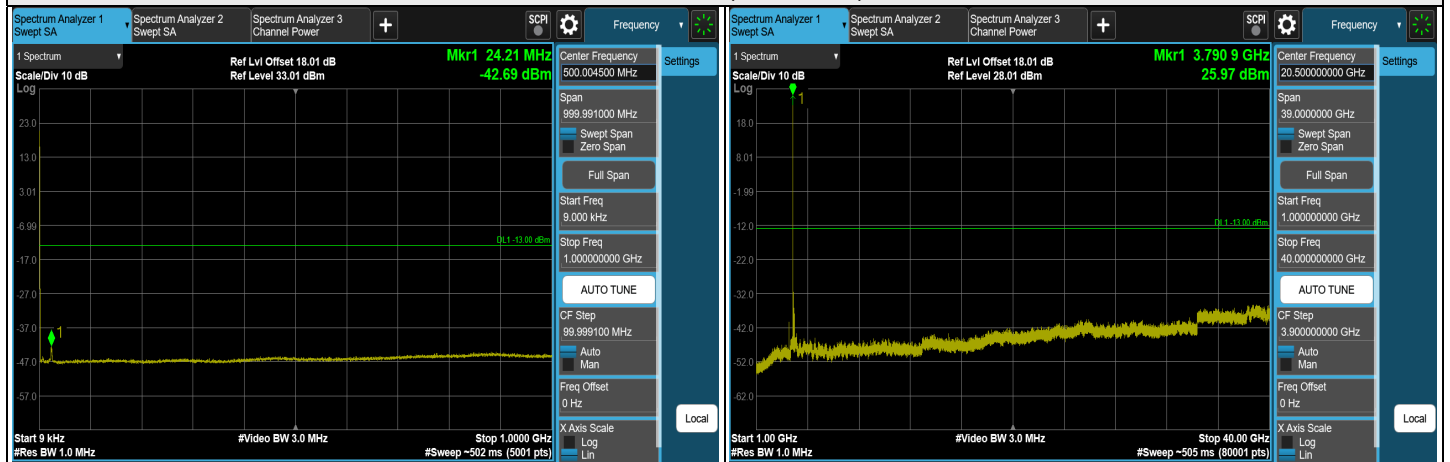

CH 656000 (3840 MHz)

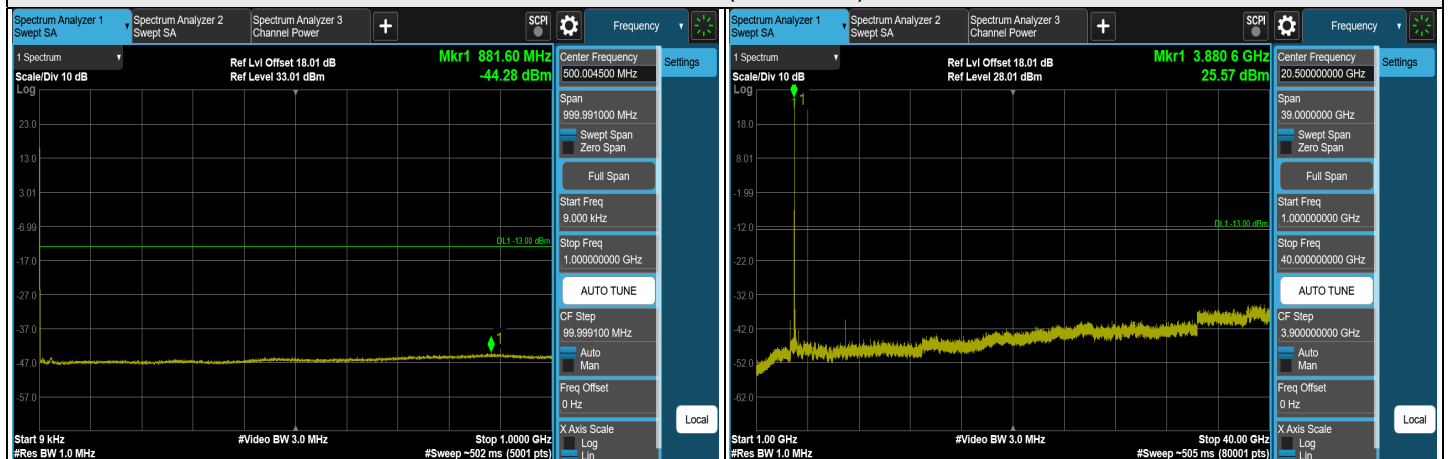


CH 662000 (3930 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.


NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), MIMO-Ant 1, Channel Bandwidth: 100 MHz

CH 650000 (3750MHz)

1 RB

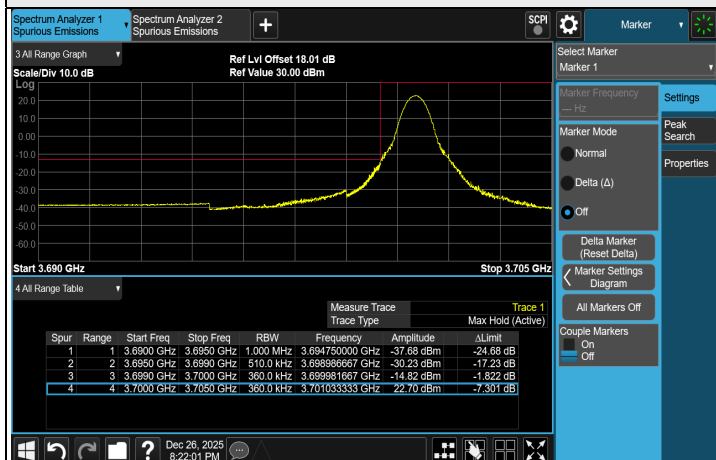


FULL RB

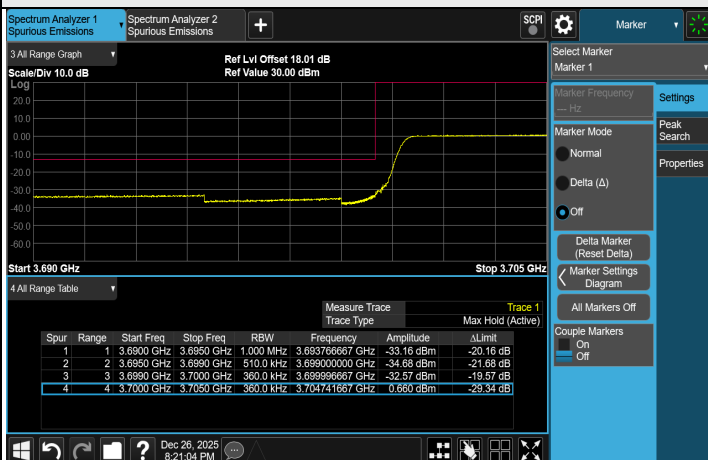


CH 662000 (3930 MHz)

1 RB

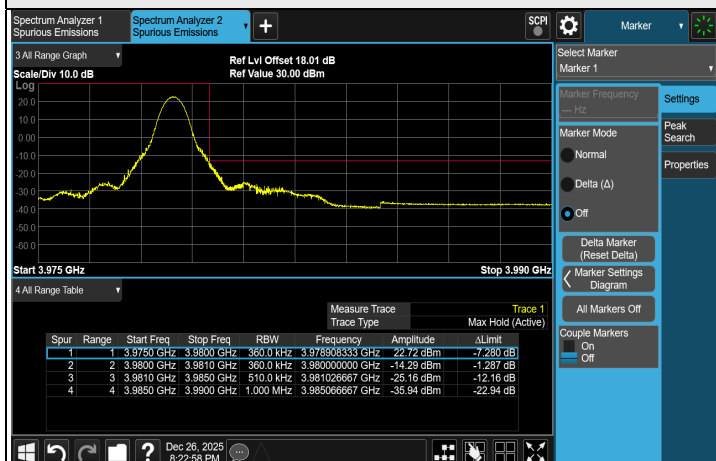

FULL RB

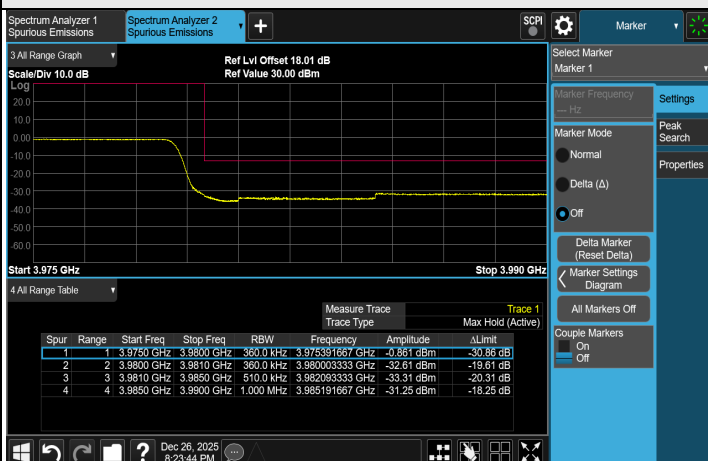

7.6 Radiated Spurious Emissions below 1GHz


7.6.1 NR n2 SCS 15 kHz

RF Mode	NR n2 Channel Bandwidth: 40MHz	Channel	CH 378000 : 1890 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	-47.45	-13.00	-34.45	1.00 H	359	64.37	-111.82
2	154.16	-55.11	-13.00	-42.11	1.00 H	292	52.21	-107.32
3	206.54	-54.98	-13.00	-41.98	1.00 H	136	55.78	-110.76
4	625.58	-46.89	-13.00	-33.89	2.00 H	211	52.20	-99.09
5	749.74	-43.68	-13.00	-30.68	1.00 H	213	52.23	-95.91
6	874.87	-49.19	-13.00	-36.19	2.00 H	348	46.14	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

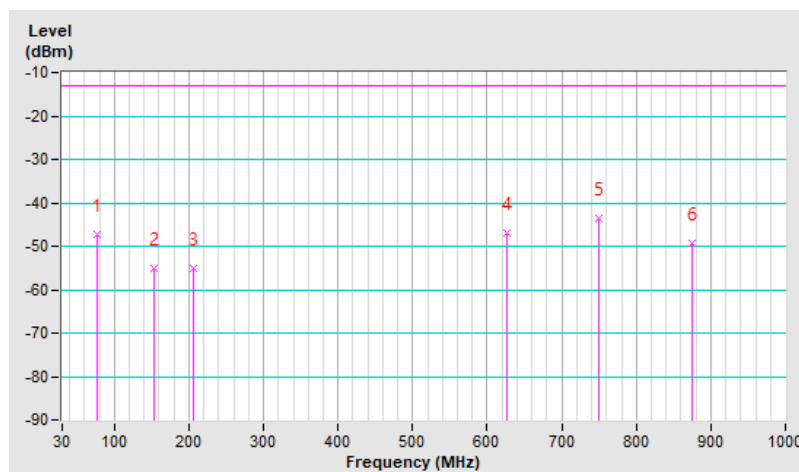


RF Mode	NR n2 Channel Bandwidth: 40MHz	Channel	CH 378000 : 1890 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.55	-43.63	-13.00	-30.63	1.00 V	233	63.67	-107.30
2	147.37	-53.27	-13.00	-40.27	1.00 V	190	54.24	-107.51
3	198.78	-55.04	-13.00	-42.04	1.00 V	333	55.71	-110.75
4	468.44	-56.60	-13.00	-43.60	1.50 V	25	45.79	-102.39
5	624.61	-42.53	-13.00	-29.53	1.00 V	156	56.57	-99.10
6	749.74	-46.82	-13.00	-33.82	1.50 V	94	49.09	-95.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

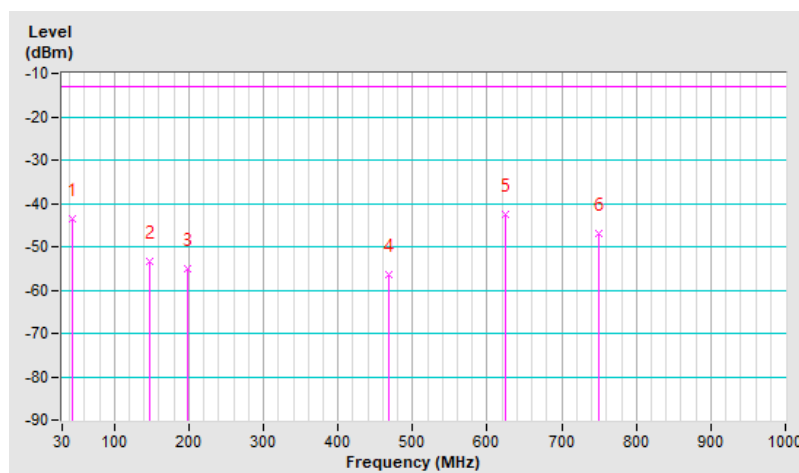


7.6.2 NR n5 SCS 15 kHz

RF Mode	NR n5 Channel Bandwidth: 20MHz	Channel	CH 167300 : 836.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	-50.03	-13.00	-37.03	1.00 H	1	63.94	-113.97
2	161.92	-56.97	-13.00	-43.97	1.00 H	265	52.74	-109.71
3	202.66	-57.03	-13.00	-44.03	1.00 H	146	55.91	-112.94
4	624.61	-49.41	-13.00	-36.41	2.00 H	211	51.84	-101.25
5	749.74	-46.04	-13.00	-33.04	2.00 H	214	52.02	-98.06
6	874.87	-51.58	-13.00	-38.58	1.50 H	240	45.90	-97.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

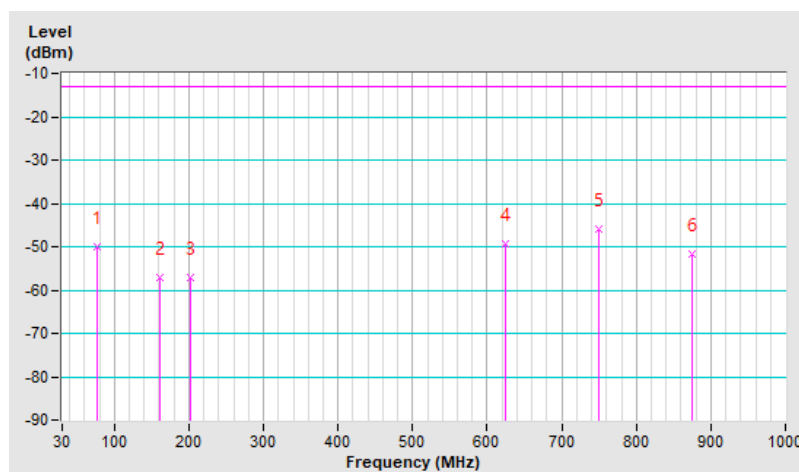


RF Mode	NR n5 Channel Bandwidth: 20MHz	Channel	CH 167300 : 836.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-44.19	-13.00	-31.19	1.00 V	83	66.26	-110.45
2	69.77	-51.06	-13.00	-38.06	1.00 V	136	60.86	-111.92
3	198.78	-56.70	-13.00	-43.70	1.50 V	335	56.20	-112.90
4	469.41	-58.78	-13.00	-45.78	1.00 V	6	45.73	-104.51
5	624.61	-44.41	-13.00	-31.41	1.00 V	155	56.84	-101.25
6	749.74	-49.32	-13.00	-36.32	1.00 V	88	48.74	-98.06
7	874.87	-52.49	-13.00	-39.49	1.50 V	116	44.99	-97.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

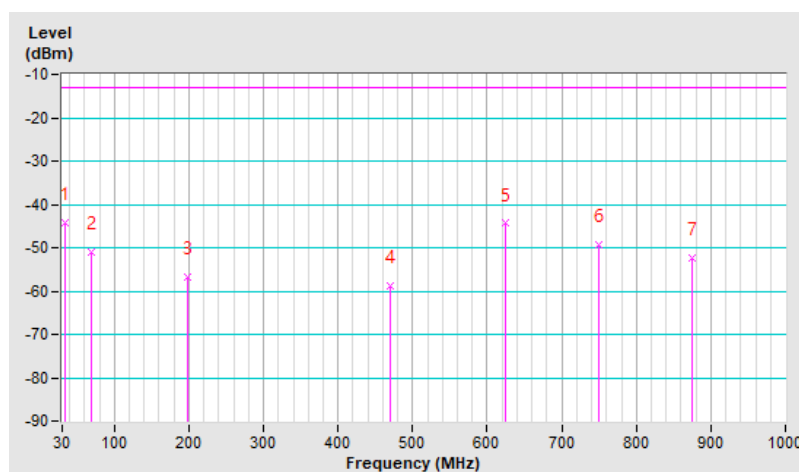


7.6.3 NR n14 SCS 15 kHz

RF Mode	NR n14 Channel Bandwidth: 10MHz	Channel	CH 158600 : 793 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-50.16	-13.00	-37.16	1.00 H	180	64.05	-114.21
2	155.13	-56.51	-13.00	-43.51	1.00 H	262	53.08	-109.59
3	625.58	-49.20	-13.00	-36.20	1.00 H	211	52.04	-101.24
4	717.73	-51.93	-13.00	-38.93	2.00 H	16	47.66	-99.59
5	749.74	-46.16	-13.00	-33.16	1.00 H	218	51.90	-98.06
6	874.87	-51.30	-13.00	-38.30	2.00 H	32	46.18	-97.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

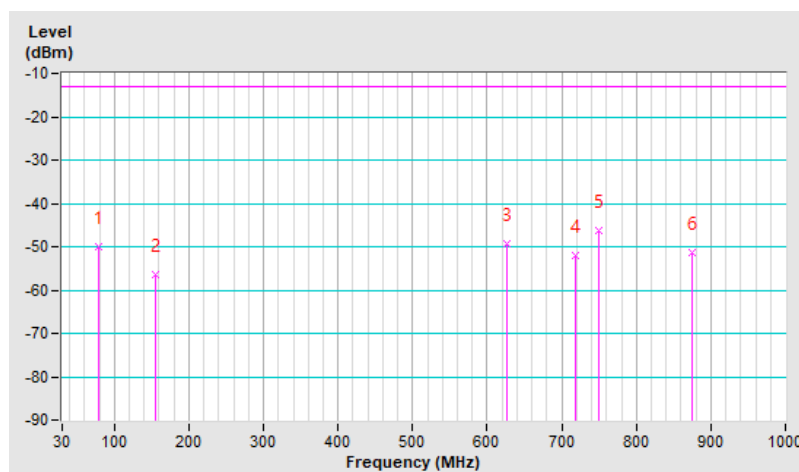


RF Mode	NR n14 Channel Bandwidth: 10MHz	Channel	CH 158600 : 793 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-44.29	-13.00	-31.29	1.00 V	138	66.16	-110.45
2	201.69	-56.61	-13.00	-43.61	1.00 V	308	56.32	-112.93
3	460.68	-58.94	-13.00	-45.94	1.00 V	7	45.75	-104.69
4	624.61	-44.48	-13.00	-31.48	1.00 V	157	56.77	-101.25
5	749.74	-49.29	-13.00	-36.29	2.00 V	94	48.77	-98.06
6	874.87	-52.50	-13.00	-39.50	1.50 V	125	44.98	-97.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

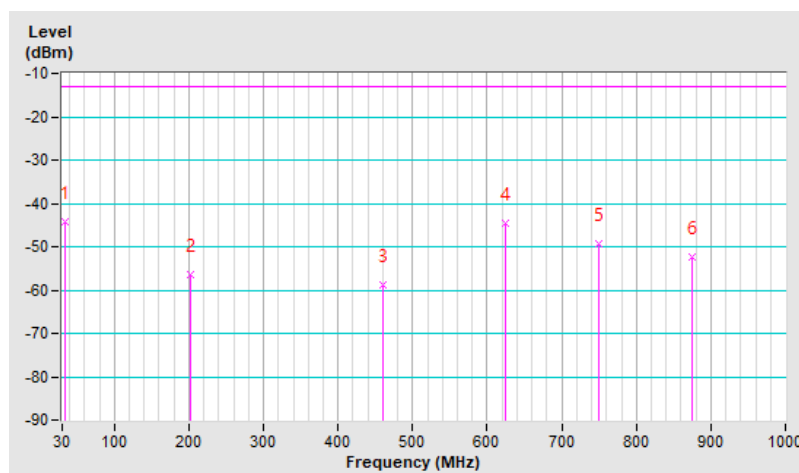


7.6.4 NR n30 SCS 15 kHz

RF Mode	NR n30 Channel Bandwidth: 10MHz	Channel	CH 462000 : 2310 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-48.04	-40.00	-8.04	1.00 H	4	64.02	-112.06
2	154.16	-54.18	-40.00	-14.18	1.00 H	283	53.14	-107.32
3	200.72	-54.21	-40.00	-14.21	1.00 H	144	56.58	-110.79
4	624.61	-46.85	-40.00	-6.85	1.00 H	209	52.25	-99.10
5	749.74	-43.82	-40.00	-3.82	1.00 H	4	52.09	-95.91
6	874.87	-49.70	-40.00	-9.70	2.00 H	42	45.63	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

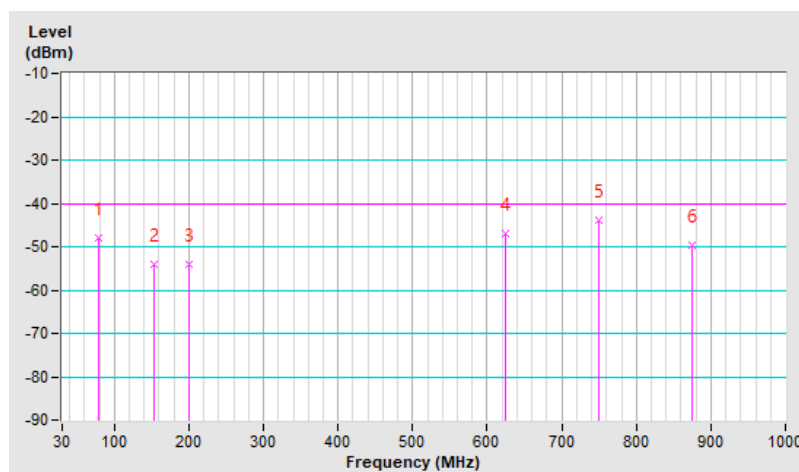


RF Mode	NR n30 Channel Bandwidth: 10MHz	Channel	CH 462000 : 2310 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	-41.85	-40.00	-1.85	1.00 V	306	66.14	-107.99
2	69.77	-47.36	-40.00	-7.36	2.00 V	146	62.41	-109.77
3	499.48	-53.94	-40.00	-13.94	1.00 V	212	47.62	-101.56
4	624.61	-42.19	-40.00	-2.19	1.00 V	158	56.91	-99.10
5	749.74	-47.18	-40.00	-7.18	1.50 V	89	48.73	-95.91
6	874.87	-49.99	-40.00	-9.99	1.50 V	117	45.34	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

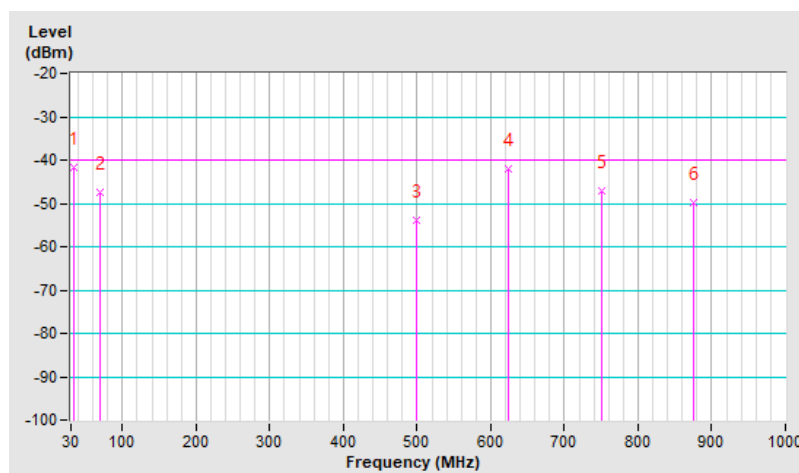


7.6.5 NR n41 SCS 30 kHz

RF Mode	NR n41 Channel Bandwidth: 100MHz	Channel	CH 518598 : 2592.99 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.56	-47.83	-25.00	-22.83	1.00 H	206	63.77	-111.60
2	159.01	-54.69	-25.00	-29.69	1.00 H	275	52.80	-107.49
3	204.60	-55.67	-25.00	-30.67	2.00 H	131	55.14	-110.81
4	624.61	-47.02	-25.00	-22.02	1.00 H	209	52.08	-99.10
5	749.74	-43.77	-25.00	-18.77	1.00 H	217	52.14	-95.91
6	874.87	-49.62	-25.00	-24.62	2.00 H	351	45.71	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

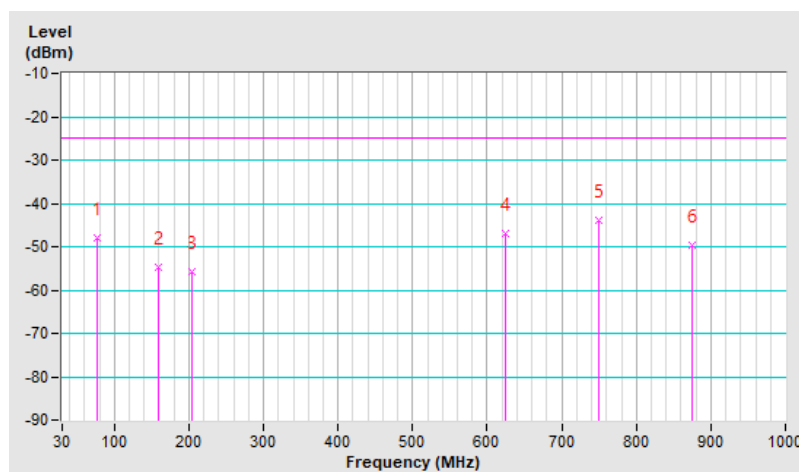


RF Mode	NR n41 Channel Bandwidth: 100MHz	Channel	CH 518598 : 2592.99 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-41.83	-25.00	-16.83	1.00 V	57	66.47	-108.30
2	199.75	-54.66	-25.00	-29.66	1.00 V	332	56.11	-110.77
3	476.20	-56.73	-25.00	-31.73	1.00 V	4	45.51	-102.24
4	624.61	-42.10	-25.00	-17.10	1.50 V	158	57.00	-99.10
5	749.74	-46.95	-25.00	-21.95	1.00 V	86	48.96	-95.91
6	874.87	-49.88	-25.00	-24.88	1.50 V	112	45.45	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

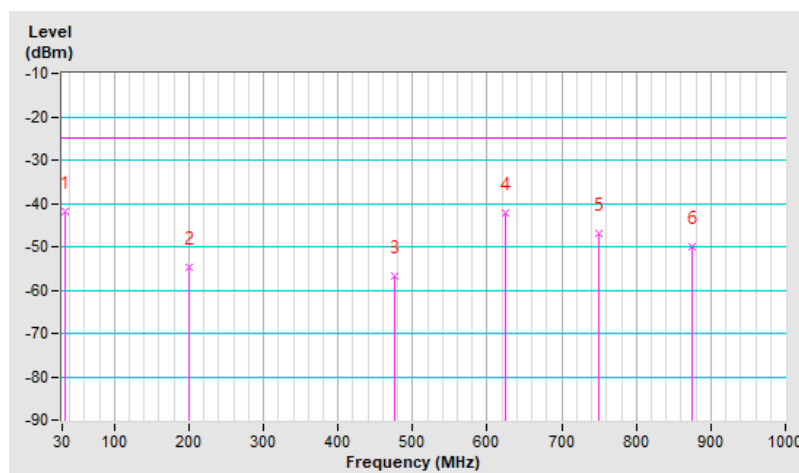


7.6.6 NR n66 SCS 15 kHz

RF Mode	NR n66 Channel Bandwidth: 40MHz	Channel	CH 349000 : 1745 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-48.06	-13.00	-35.06	1.00 H	355	64.00	-112.06
2	155.13	-53.83	-13.00	-40.83	1.00 H	254	53.61	-107.44
3	201.69	-54.90	-13.00	-41.90	2.00 H	144	55.88	-110.78
4	624.61	-47.23	-13.00	-34.23	1.00 H	203	51.87	-99.10
5	749.74	-44.18	-13.00	-31.18	2.00 H	18	51.73	-95.91
6	897.18	-48.65	-13.00	-35.65	2.00 H	321	46.54	-95.19

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

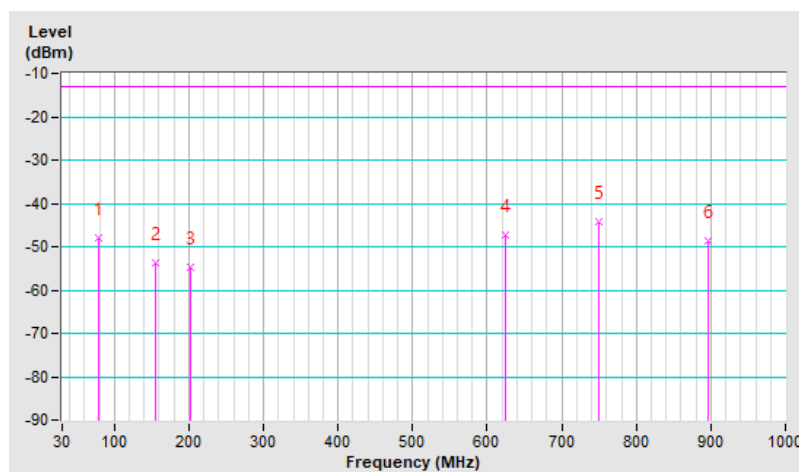


RF Mode	NR n66 Channel Bandwidth: 40MHz	Channel	CH 349000 : 1745 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-41.97	-13.00	-28.97	1.00 V	256	66.33	-108.30
2	197.81	-54.90	-13.00	-41.90	1.00 V	346	55.85	-110.75
3	457.77	-56.41	-13.00	-43.41	1.00 V	13	46.19	-102.60
4	624.61	-42.17	-13.00	-29.17	1.50 V	158	56.93	-99.10
5	749.74	-47.36	-13.00	-34.36	1.00 V	90	48.55	-95.91
6	898.15	-42.13	-13.00	-29.13	1.50 V	13	53.05	-95.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

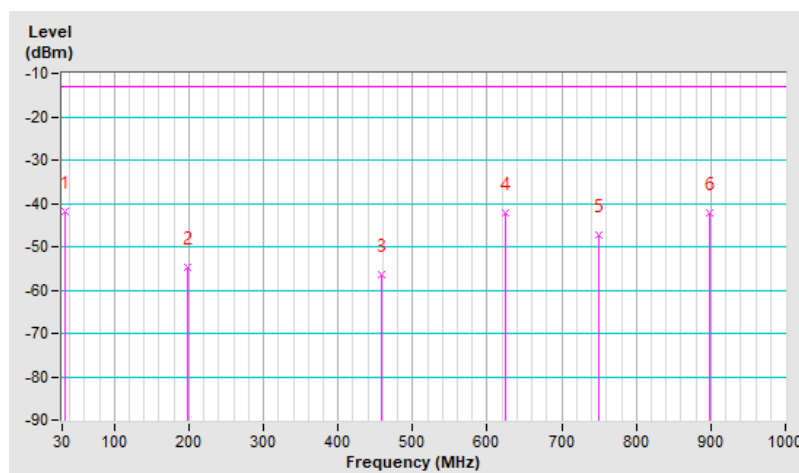


7.6.7 NR n71 SCS 15 kHz

RF Mode	NR n71 Channel Bandwidth: 20MHz	Channel	CH 136100 : 680.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-56.88	-13.00	-43.88	2.00 H	79	53.57	-110.45
2	77.53	-50.14	-13.00	-37.14	2.00 H	37	63.83	-113.97
3	158.04	-57.75	-13.00	-44.75	1.00 H	300	51.92	-109.67
4	624.61	-49.51	-13.00	-36.51	1.50 H	209	51.74	-101.25
5	729.37	-43.20	-13.00	-30.20	1.50 H	24	55.83	-99.03
6	874.87	-51.21	-13.00	-38.21	1.00 H	26	46.27	-97.48

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

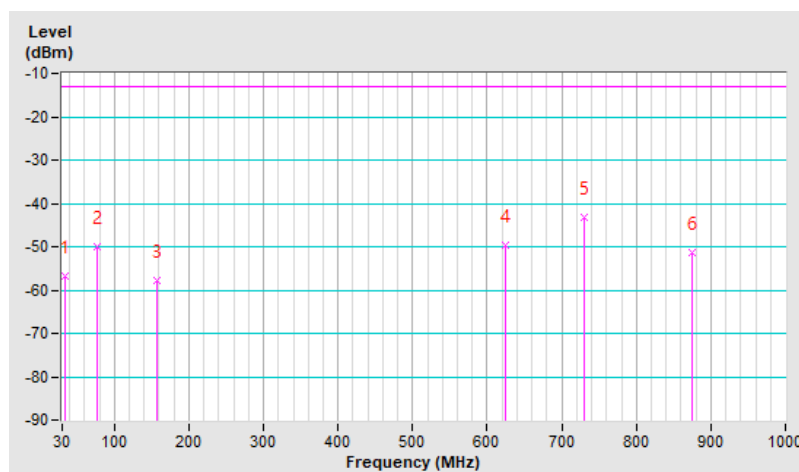


RF Mode	NR n71 Channel Bandwidth: 20MHz	Channel	CH 136100 : 680.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-41.29	-13.00	-28.29	1.00 V	134	69.16	-110.45
2	203.63	-55.03	-13.00	-42.03	1.50 V	320	57.92	-112.95
3	500.45	-52.69	-13.00	-39.69	1.00 V	212	50.99	-103.68
4	624.61	-43.37	-13.00	-30.37	2.00 V	155	57.88	-101.25
5	749.74	-46.34	-13.00	-33.34	1.50 V	91	51.72	-98.06
6	874.87	-50.38	-13.00	-37.38	2.00 V	116	47.10	-97.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + $20\log(D) - 104.8 - 2.15$
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

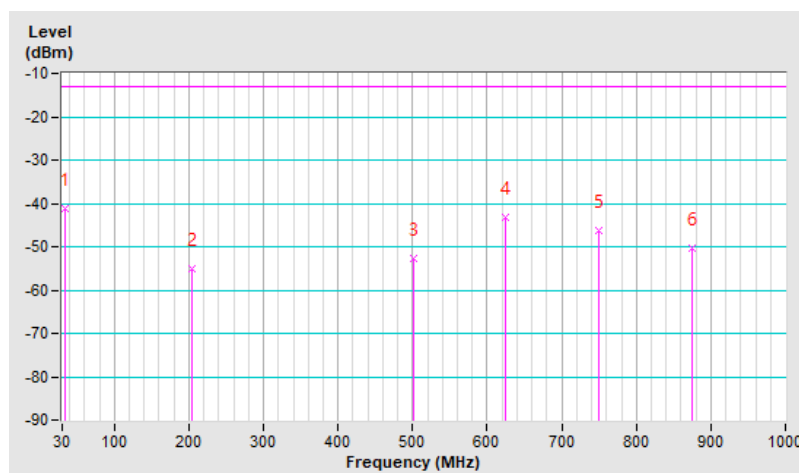


7.6.8 NR n77 SCS 30 kHz (3.45 GHz ~ 3.55 GHz)

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 636332 : 3544.98 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	-47.78	-13.00	-34.78	2.00 H	18	64.04	-111.82
2	161.92	-56.00	-13.00	-43.00	1.00 H	288	51.56	-107.56
3	625.58	-47.65	-13.00	-34.65	1.50 H	213	51.44	-99.09
4	708.03	-45.39	-13.00	-32.39	2.00 H	219	52.31	-97.70
5	749.74	-43.45	-13.00	-30.45	1.00 H	216	52.46	-95.91
6	874.87	-48.71	-13.00	-35.71	1.50 H	22	46.62	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

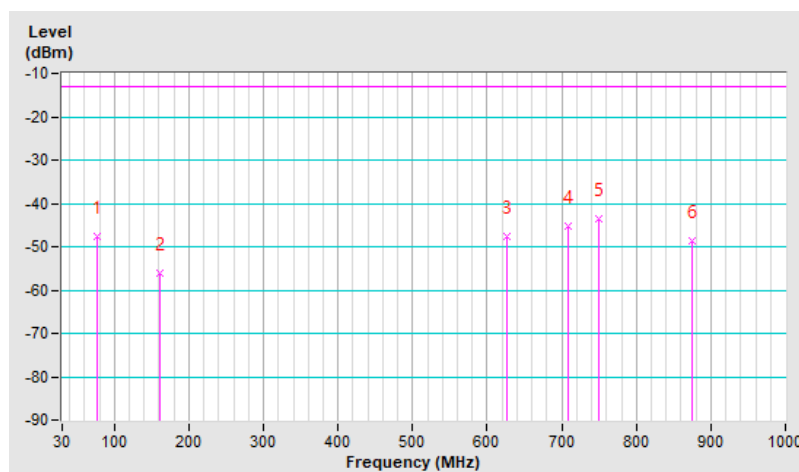


RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 636332 : 3544.98 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-41.56	-13.00	-28.56	1.00 V	349	66.74	-108.30
2	206.54	-55.24	-13.00	-42.24	1.50 V	332	55.52	-110.76
3	499.48	-51.70	-13.00	-38.70	2.00 V	216	49.86	-101.56
4	624.61	-43.47	-13.00	-30.47	1.00 V	154	55.63	-99.10
5	749.74	-46.09	-13.00	-33.09	1.50 V	99	49.82	-95.91
6	901.06	-41.52	-13.00	-28.52	2.00 V	140	53.65	-95.17

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

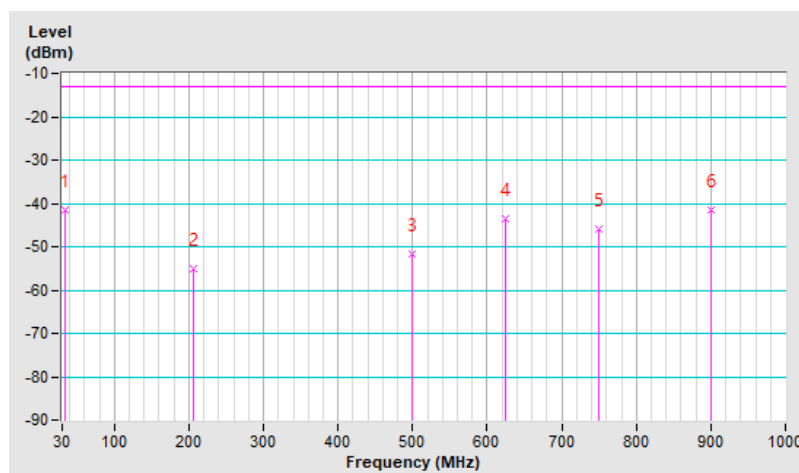


7.6.9 NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz)

RF Mode	NR n77 Channel Bandwidth: 100MHz	Channel	CH 662000 : 3930 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.56	-47.88	-13.00	-34.88	2.00 H	208	63.72	-111.60
2	162.89	-54.73	-13.00	-41.73	2.00 H	100	52.90	-107.63
3	624.61	-47.71	-13.00	-34.71	1.00 H	217	51.39	-99.10
4	729.37	-47.03	-13.00	-34.03	1.50 H	334	49.85	-96.88
5	749.74	-43.30	-13.00	-30.30	2.00 H	222	52.61	-95.91
6	874.87	-48.61	-13.00	-35.61	1.50 H	36	46.72	-95.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

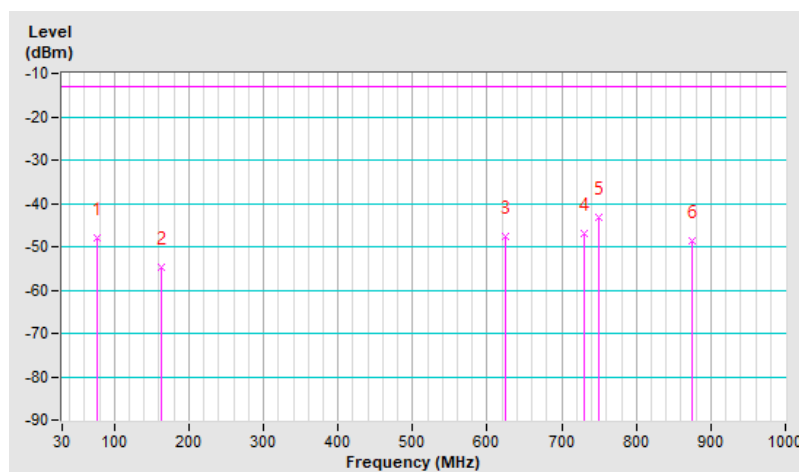


RF Mode	NR n77 Channel Bandwidth: 100MHz	Channel	CH 662000 : 3930 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-41.69	-13.00	-28.69	1.00 V	350	66.61	-108.30
2	202.66	-54.64	-13.00	-41.64	1.50 V	323	56.15	-110.79
3	499.48	-52.66	-13.00	-39.66	2.00 V	212	48.90	-101.56
4	625.58	-43.39	-13.00	-30.39	1.00 V	154	55.70	-99.09
5	749.74	-46.11	-13.00	-33.11	1.00 V	89	49.80	-95.91
6	896.21	-47.35	-13.00	-34.35	1.50 V	137	47.85	-95.20

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

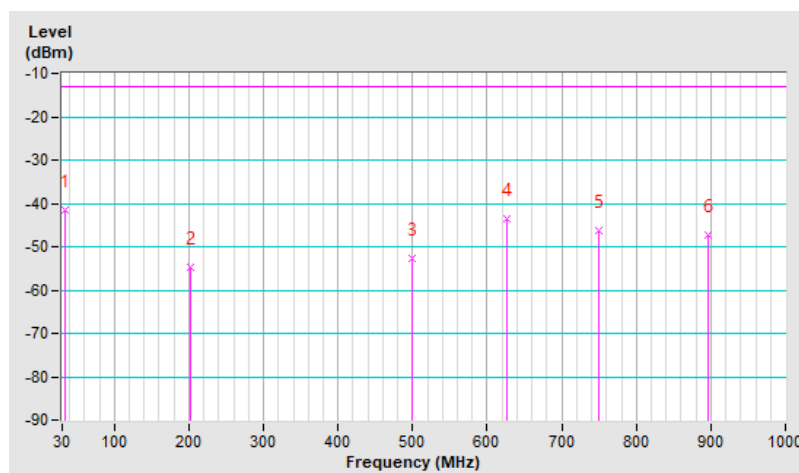

7.7 Radiated Spurious Emissions above 1GHz

7.7.1 NR n2 SCS 15 kHz

RF Mode	NR n2 Channel Bandwidth: 5MHz	Channel	CH 370500 : 1852.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-44.73	-13.00	-31.73	1.16 H	158	47.18	-91.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-43.27	-13.00	-30.27	2.35 V	186	48.64	-91.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 5MHz	Channel	CH 376000 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-44.46	-13.00	-31.46	1.35 H	158	47.24	-91.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-43.13	-13.00	-30.13	2.35 V	196	48.57	-91.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 5MHz	Channel	CH 381500 : 1907.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-44.51	-13.00	-31.51	1.38 H	158	47.11	-91.62
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-43.05	-13.00	-30.05	2.15 V	169	48.57	-91.62

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 20MHz	Channel	CH 372000 : 1860 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-44.98	-13.00	-31.98	1.10 H	173	46.88	-91.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-43.51	-13.00	-30.51	2.45 V	217	48.35	-91.86

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 20MHz	Channel	CH 376000 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-44.65	-13.00	-31.65	1.39 H	155	47.05	-91.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-43.41	-13.00	-30.41	2.23 V	176	48.29	-91.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 20MHz	Channel	CH 380000 : 1900 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-44.42	-13.00	-31.42	1.32 H	151	47.18	-91.60
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-43.25	-13.00	-30.25	2.21 V	165	48.35	-91.60

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 40MHz	Channel	CH 374000 : 1870 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3740.00	-44.65	-13.00	-31.65	1.19 H	193	47.12	-91.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3740.00	-43.31	-13.00	-30.31	2.32 V	196	48.46	-91.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 40MHz	Channel	CH 376000 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-44.36	-13.00	-31.36	1.24 H	163	47.34	-91.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-42.98	-13.00	-29.98	2.40 V	203	48.72	-91.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n2 Channel Bandwidth: 40MHz	Channel	CH 378000 : 1890 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3780.00	-44.37	-13.00	-31.37	1.12 H	153	47.28	-91.65
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3780.00	-42.96	-13.00	-29.96	2.64 V	215	48.69	-91.65

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.2 NR n5 SCS 15 kHz

RF Mode	NR n5 Channel Bandwidth: 5MHz	Channel	CH 165300 : 826.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-58.01	-13.00	-45.01	2.34 H	126	42.02	-100.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-56.49	-13.00	-43.49	1.38 V	246	43.54	-100.03

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n5 Channel Bandwidth: 5MHz	Channel	CH 167300 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.35	-13.00	-44.35	2.31 H	147	42.56	-99.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.09	-13.00	-43.09	1.38 V	249	43.82	-99.91

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n5 Channel Bandwidth: 5MHz	Channel	CH 169300 : 846.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-57.23	-13.00	-44.23	2.38 H	129	42.57	-99.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-56.06	-13.00	-43.06	1.32 V	241	43.74	-99.80

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n5 Channel Bandwidth: 20MHz	Channel	CH 166800 : 834 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1668.00	-57.52	-13.00	-44.52	2.31 H	156	42.43	-99.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1668.00	-56.30	-13.00	-43.30	1.39 V	231	43.65	-99.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

RF Mode	NR n5 Channel Bandwidth: 20MHz	Channel	CH 167300 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.16	-13.00	-44.16	2.46 H	123	42.75	-99.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.02	-13.00	-43.02	1.46 V	232	43.89	-99.91

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n5 Channel Bandwidth: 20MHz	Channel	CH 167800 : 839 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1678.00	-57.26	-13.00	-44.26	2.31 H	98	42.63	-99.89
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1678.00	-56.17	-13.00	-43.17	1.33 V	245	43.72	-99.89

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

7.7.3 NR n14 SCS 15 kHz

RF Mode	NR n14 Channel Bandwidth: 5MHz	Channel	CH 158100 : 790.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1581.00	-55.61	-40.00	-15.61	1.39 H	325	42.24	-97.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1581.00	-54.43	-40.00	-14.43	2.26 V	176	43.42	-97.85

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n14 Channel Bandwidth: 5MHz	Channel	CH 158600 : 793 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-55.72	-40.00	-15.72	1.36 H	324	42.12	-97.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-54.30	-40.00	-14.30	2.16 V	186	43.54	-97.84

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n14 Channel Bandwidth: 5MHz	Channel	CH 159100 : 795.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1591.00	-55.66	-40.00	-15.66	1.46 H	287	42.17	-97.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1591.00	-54.18	-40.00	-14.18	2.24 V	183	43.65	-97.83

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n14 Channel Bandwidth: 10MHz	Channel	CH 158600 : 793 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-55.41	-40.00	-15.41	1.32 H	314	42.43	-97.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-54.11	-40.00	-14.11	2.14 V	193	43.73	-97.84

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.4 NR n30 SCS 15 kHz

RF Mode	NR n30 Channel Bandwidth: 5MHz	Channel	CH 461500 : 2307.5 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4615.00	-48.39	-40.00	-8.39	1.65 H	229	41.65	-90.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4615.00	-46.94	-40.00	-6.94	1.15 V	128	43.10	-90.04

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n30 Channel Bandwidth: 5MHz	Channel	CH 462000 : 2310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-48.26	-40.00	-8.26	1.68 H	216	41.76	-90.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-46.81	-40.00	-6.81	1.29 V	126	43.21	-90.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n30 Channel Bandwidth: 5MHz	Channel	CH 462500 : 2312.5 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4625.00	-48.25	-40.00	-8.25	1.65 H	214	41.76	-90.01
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4625.00	-46.90	-40.00	-6.90	1.26 V	126	43.11	-90.01

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	NR n30 Channel Bandwidth: 10MHz	Channel	CH 462000 : 2310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-47.95	-40.00	-7.95	1.73 H	224	42.07	-90.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-46.59	-40.00	-6.59	1.23 V	113	43.43	-90.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.5 NR n41 SCS 30 kHz

RF Mode	NR n41 Channel Bandwidth: 10MHz	Channel	CH 500202 : 2501.01 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5002.02	-46.24	-25.00	-21.24	1.97 H	216	43.24	-89.48
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5002.02	-45.13	-25.00	-20.13	1.37 V	169	44.35	-89.48

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 10MHz	Channel	CH 518598 : 2592.99 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5189.98	-45.59	-25.00	-20.59	1.79 H	211	43.46	-89.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5189.98	-44.77	-25.00	-19.77	1.29 V	165	44.28	-89.05

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 10MHz	Channel	CH 537000 : 2685 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5370.00	-45.80	-25.00	-20.80	1.96 H	267	43.41	-89.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5370.00	-45.07	-25.00	-20.07	1.45 V	201	44.14	-89.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 50MHz	Channel	CH 504204 : 2521.02 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5042.04	-45.75	-25.00	-20.75	1.65 H	215	43.24	-88.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5042.04	-44.65	-25.00	-19.65	1.16 V	168	44.34	-88.99

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 50MHz	Channel	CH 518598 : 2592.99 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-45.79	-25.00	-20.79	1.69 H	211	43.24	-89.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-44.68	-25.00	-19.68	1.16 V	165	44.35	-89.03

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 50MHz	Channel	CH 532998 : 2664.99 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5329.98	-46.03	-25.00	-21.03	1.63 H	212	43.32	-89.35
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5329.98	-45.14	-25.00	-20.14	1.09 V	165	44.21	-89.35

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 100MHz	Channel	CH 509202 : 2546.01 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5092.02	-45.33	-25.00	-20.33	1.69 H	215	43.35	-88.68
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5092.02	-44.47	-25.00	-19.47	1.16 V	189	44.21	-88.68

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 100MHz	Channel	CH 518598 : 2592.99 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-45.41	-25.00	-20.41	1.75 H	227	43.62	-89.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-44.46	-25.00	-19.46	1.23 V	173	44.57	-89.03

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	NR n41 Channel Bandwidth: 100MHz	Channel	CH 528000 : 2640 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	-46.09	-25.00	-21.09	1.65 H	218	43.24	-89.33
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	-44.99	-25.00	-19.99	1.19 V	165	44.34	-89.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.6 NR n66 SCS 15 kHz

RF Mode	NR n66 Channel Bandwidth: 5MHz	Channel	CH 342500 : 1712.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-50.28	-13.00	-37.28	1.86 H	245	42.34	-92.62
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-49.11	-13.00	-36.11	1.29 V	38	43.51	-92.62

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 5MHz	Channel	CH 349000 : 1745 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-49.86	-13.00	-36.86	1.96 H	276	42.32	-92.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.65	-13.00	-35.65	1.29 V	68	43.53	-92.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 5MHz	Channel	CH 355500 : 1777.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-49.63	-13.00	-36.63	2.04 H	207	42.29	-91.92
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-48.80	-13.00	-35.80	1.16 V	73	43.12	-91.92

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 20MHz	Channel	CH 344000 : 1720 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-49.93	-13.00	-36.93	1.75 H	232	42.57	-92.50
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-49.16	-13.00	-36.16	1.18 V	49	43.34	-92.50

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 20MHz	Channel	CH 349000 : 1745 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-49.97	-13.00	-36.97	1.75 H	233	42.21	-92.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.64	-13.00	-35.64	1.13 V	67	43.54	-92.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 20MHz	Channel	CH 354000 : 1770 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-49.70	-13.00	-36.70	1.75 H	239	42.26	-91.96
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-48.48	-13.00	-35.48	1.27 V	82	43.48	-91.96

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 40MHz	Channel	CH 346000 : 1730 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3460.00	-50.02	-13.00	-37.02	1.75 H	233	42.34	-92.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3460.00	-48.95	-13.00	-35.95	1.14 V	86	43.41	-92.36

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 40MHz	Channel	CH 349000 : 1745 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-49.53	-13.00	-36.53	1.83 H	241	42.65	-92.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.40	-13.00	-35.40	1.23 V	97	43.78	-92.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n66 Channel Bandwidth: 40MHz	Channel	CH 352000 : 1760 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3520.00	-49.62	-13.00	-36.62	1.76 H	233	42.41	-92.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3520.00	-48.46	-13.00	-35.46	1.29 V	87	43.57	-92.03

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.7 NR n71 SCS 15 kHz

RF Mode	NR n71 Channel Bandwidth: 5MHz	Channel	CH 133100 : 665.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-52.63	-13.00	-39.63	2.32 H	154	47.28	-99.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-51.80	-13.00	-38.80	1.36 V	298	48.11	-99.91

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n71 Channel Bandwidth: 5MHz	Channel	CH 136100 : 680.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-52.76	-13.00	-39.76	2.32 H	155	47.11	-99.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-51.74	-13.00	-38.74	1.15 V	298	48.13	-99.87

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

RF Mode	NR n71 Channel Bandwidth: 5MHz	Channel	CH 139100 : 695.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-52.58	-13.00	-39.58	2.36 H	120	47.22	-99.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-51.79	-13.00	-38.79	1.26 V	335	48.01	-99.80

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n71 Channel Bandwidth: 20MHz	Channel	CH 134600 : 673 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-52.74	-13.00	-39.74	2.32 H	129	47.16	-99.90
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-51.86	-13.00	-38.86	1.29 V	326	48.04	-99.90

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n71 Channel Bandwidth: 20MHz	Channel	CH 136100 : 680.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-52.44	-13.00	-39.44	2.47 H	123	47.43	-99.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-51.62	-13.00	-38.62	1.25 V	319	48.25	-99.87

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	NR n71 Channel Bandwidth: 20MHz	Channel	CH 137600 : 688 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-52.60	-13.00	-39.60	2.31 H	128	47.24	-99.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-51.74	-13.00	-38.74	1.29 V	326	48.10	-99.84

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

7.7.8 NR n77 SCS 30 kHz (3.45 GHz ~ 3.55 GHz)

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 630334 : 3455.01 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6910.02	-43.80	-13.00	-30.80	2.75 H	159	42.12	-85.92
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6910.02	-42.50	-13.00	-29.50	1.45 V	215	43.42	-85.92

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 633334 : 3500.01 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.02	-43.32	-13.00	-30.32	2.71 H	125	42.12	-85.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.02	-42.06	-13.00	-29.06	1.15 V	219	43.38	-85.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 636332 : 3544.98 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7089.96	-42.82	-13.00	-29.82	2.72 H	159	42.14	-84.96
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7089.96	-41.71	-13.00	-28.71	1.13 V	198	43.25	-84.96

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 50MHz	Channel	CH 631668 : 3475.02 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6950.04	-43.91	-13.00	-30.91	2.57 H	133	41.96	-85.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6950.04	-42.62	-13.00	-29.62	1.29 V	218	43.25	-85.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 50MHz	Channel	CH 633334 : 3500.01 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.02	-43.40	-13.00	-30.40	2.54 H	165	42.04	-85.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.02	-42.29	-13.00	-29.29	1.29 V	216	43.15	-85.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 50MHz	Channel	CH 635000 : 3525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7050.00	-42.95	-13.00	-29.95	2.65 H	138	42.09	-85.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7050.00	-41.80	-13.00	-28.80	1.13 V	210	43.24	-85.04

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 100MHz	Channel	CH 633334 : 3500.01 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.02	-43.17	-13.00	-30.17	2.76 H	143	42.27	-85.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.02	-41.87	-13.00	-28.87	1.26 V	225	43.57	-85.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.9 NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz)

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 647000 : 3705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7410.00	-43.17	-13.00	-30.17	2.75 H	155	41.69	-84.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7410.00	-41.59	-13.00	-28.59	1.56 V	222	43.27	-84.86

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 656000 : 3840 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7680.00	-43.41	-13.00	-30.41	2.73 H	163	41.93	-85.34
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7680.00	-42.11	-13.00	-29.11	1.67 V	228	43.23	-85.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 10MHz	Channel	CH 665000 : 3975 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7950.00	-42.75	-13.00	-29.75	2.75 H	169	42.01	-84.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7950.00	-41.42	-13.00	-28.42	1.21 V	225	43.34	-84.76

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 50MHz	Channel	CH 648334 : 3725.01 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7450.02	-42.92	-13.00	-29.92	2.54 H	163	42.06	-84.98
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7450.02	-41.74	-13.00	-28.74	1.32 V	225	43.24	-84.98

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 50MHz	Channel	CH 656000 : 3840 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7680.00	-43.29	-13.00	-30.29	2.45 H	163	42.05	-85.34
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7680.00	-42.10	-13.00	-29.10	1.28 V	225	43.24	-85.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 50MHz	Channel	CH 663666 : 3954.99 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7909.98	-42.71	-13.00	-29.71	2.61 H	163	41.97	-84.68
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7909.98	-41.40	-13.00	-28.40	1.40 V	239	43.28	-84.68

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 100MHz	Channel	CH 650000 : 3750 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7500.00	-42.82	-13.00	-29.82	2.34 H	152	41.98	-84.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7500.00	-41.55	-13.00	-28.55	1.48 V	225	43.25	-84.80

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 100MHz	Channel	CH 656000 : 3840 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7680.00	-43.21	-13.00	-30.21	2.65 H	167	42.13	-85.34
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7680.00	-41.91	-13.00	-28.91	1.35 V	218	43.43	-85.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	NR n77 Channel Bandwidth: 100MHz	Channel	CH 662000 : 3930 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 63% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7860.00	-42.69	-13.00	-29.69	2.72 H	179	42.01	-84.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7860.00	-41.38	-13.00	-28.38	1.38 V	225	43.32	-84.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.8 Frequency Stability

Environmental Conditions:	25°C, 60% RH	Tested By:	Charles Hsiao
---------------------------	--------------	------------	---------------

7.8.1 NR n2 SCS 15 kHz

NR n2 SCS 15 kHz, Channel Bandwidth: 40 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 374000 (1870 MHz)		CH 378000 (1890 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.60	1870.000003	0.0016	1889.999999	-0.0005	Pass
3.85	1869.999993	-0.0037	1889.999991	-0.0048	Pass
4.30	1869.999998	-0.0011	1890	0	Pass

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 374000 (1870 MHz)		CH 378000 (1890 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1869.999995	-0.0027	1889.999992	-0.0043	Pass
-20	1870.000001	0.0005	1890	0	Pass
-10	1869.999998	-0.0011	1889.999995	-0.0027	Pass
0	1870.000005	0.0027	1890.000003	0.0016	Pass
10	1869.999991	-0.0048	1889.999992	-0.0043	Pass
20	1869.999999	-0.0005	1890.000002	0.0011	Pass
30	1870.000003	0.0016	1890.000003	0.0016	Pass
40	1870.000005	0.0027	1890.000001	0.0053	Pass
50	1870.000002	0.0011	1890.000003	0.0016	Pass

7.8.2 NR n5 SCS 15 kHz

NR n5 SCS 15 kHz, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 166800 (834 MHz)		CH 167800 (839 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.60	834.000004	0.0048	839.000006	0.0072	Pass
3.85	833.999995	-0.006	838.999994	-0.0072	Pass
4.30	834.000003	0.0036	839	0	Pass

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 166800 (834 MHz)		CH 167800 (839 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	834.000001	0.0012	838.999998	-0.0024	Pass
-20	834.000002	0.0024	839.000007	0.0084	Pass
-10	833.999994	-0.0072	838.999999	-0.0012	Pass
0	834.000004	0.0048	839.000005	0.006	Pass
10	834.000008	0.0096	839.000004	0.0048	Pass
20	834.000001	0.012	839.000007	0.0084	Pass
30	833.999996	-0.0048	838.999993	-0.0084	Pass
40	833.999999	-0.0012	839.000002	0.0024	Pass
50	834.000006	0.0072	839.000003	0.0036	Pass

7.8.3 NR n14 SCS 15 kHz

NR n14 SCS 15 kHz, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 158600 (793 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	793.000001	0.0013
3.85	793.000005	0.0063
4.30	792.999994	-0.0076

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 158600 (793 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	793.000007	0.0088
-20	792.999998	-0.0025
-10	793.000004	0.005
0	792.999997	-0.0038
10	792.999999	-0.0013
20	793.000007	0.0088
30	792.999993	-0.0088
40	793.000009	0.0113
50	793.000002	0.0025

7.8.4 NR n30 SCS 15 kHz

NR n30 SCS 15 kHz, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 462000 (2310 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	2310	0
3.85	2310	0
4.30	2309.999999	-0.0004

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 462000 (2310 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	2310.000001	0.0004
-20	2309.999995	-0.0022
-10	2309.999999	-0.0004
0	2310.000002	0.0009
10	2309.999994	-0.0026
20	2310.000004	0.0017
30	2309.999999	-0.0004
40	2310.000005	0.0022
50	2310.000006	0.0026

7.8.5 NR n41 SCS 30 kHz

NR n41 SCS 30 kHz, Channel Bandwidth: 100 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 509202 (2546.01 MHz)		CH 528000 (2640 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.60	2546.010007	0.0027	2640.000009	0.0035	Pass
3.85	2546.009994	-0.0024	2639.99999	-0.0039	Pass
4.30	2546.010004	0.0016	2640.000003	0.0012	Pass

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 509202 (2546.01 MHz)		CH 528000 (2640 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2546.009996	-0.0016	2639.999992	-0.0031	Pass
-20	2546.009999	-0.0004	2639.999997	-0.0012	Pass
-10	2546.009992	-0.0031	2639.999991	-0.0035	Pass
0	2546.010002	0.0008	2640.000005	0.002	Pass
10	2546.010006	0.0024	2640.000007	0.0027	Pass
20	2546.009996	-0.0016	2639.999999	-0.0004	Pass
30	2546.009995	-0.002	2639.999995	-0.002	Pass
40	2546.010005	0.002	2640.000004	0.0016	Pass
50	2546.010005	0.002	2640.000005	0.002	Pass

7.8.6 NR n66 SCS 15 kHz

NR n66 SCS 15 kHz, Channel Bandwidth: 40 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 346000 (1730 MHz)		CH 352000 (1760 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.60	1730.000007	0.004	1760.000006	0.0035	Pass
3.85	1729.999993	-0.004	1759.999998	-0.0012	Pass
4.30	1729.999996	-0.0023	1759.999994	-0.0035	Pass

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 346000 (1730 MHz)		CH 352000 (1760 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1730.000004	0.0023	1760	0	Pass
-20	1730.000002	0.0012	1760.000004	0.0023	Pass
-10	1730.000003	0.0017	1760.000007	0.004	Pass
0	1730.000008	0.0046	1760.000007	0.004	Pass
10	1730.000006	0.0035	1760.000009	0.0052	Pass
20	1729.999991	-0.0052	1759.999993	-0.004	Pass
30	1730.000004	0.0023	1760.000009	0.0052	Pass
40	1729.999997	-0.0017	1759.999999	-0.0006	Pass
50	1729.999992	-0.0046	1759.999997	-0.0017	Pass

7.8.7 NR n71 SCS 15 kHz

NR n71 SCS 15 kHz, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 134600 (673 MHz)		CH 137600 (688 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.60	672.999991	-0.0134	687.999993	-0.0104	Pass
3.85	673.000007	0.0104	688.000001	0.0149	Pass
4.30	673.000006	0.0089	688.000001	0.0149	Pass

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 134600 (673 MHz)		CH 137600 (688 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	673.000003	0.0045	688.000003	0.0045	Pass
-20	673.000003	0.0045	688	0	Pass
-10	672.999999	-0.0015	687.999998	-0.003	Pass
0	672.999992	-0.0119	687.999993	-0.0104	Pass
10	672.999991	-0.0134	687.999991	-0.0134	Pass
20	673.000007	0.0104	688.000009	0.0134	Pass
30	672.999998	-0.003	687.999993	-0.0104	Pass
40	672.999992	-0.0119	687.999992	-0.0119	Pass
50	672.999999	-0.0149	687.999999	-0.0149	Pass

7.8.8 NR n77 SCS 30 kHz (3.45 GHz ~ 3.55 GHz)

NR n77 SCS 30 kHz (3.45 GHz ~ 3.55 GHz), Channel Bandwidth: 100 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 633334 (3500.01 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	3500.010006	0.0017
3.85	3500.009991	-0.0026
4.30	3500.010006	0.0017

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 633334 (3500.01 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	3500.010001	0.0003
-20	3500.009991	-0.0026
-10	3500.01	0
0	3500.009999	-0.0003
10	3500.00999	-0.0029
20	3500.010003	0.0009
30	3500.01001	0.0029
40	3500.010009	0.0026
50	3500.00999	-0.0029

7.8.9 NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz)

NR n77 SCS 30 kHz (3.7 GHz ~ 3.98 GHz), Channel Bandwidth: 100 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 650000 (3750 MHz)		CH 662000 (3930 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.60	3750	0	3929.999995	-0.0013	Pass
3.85	3749.999995	-0.0013	3929.999991	-0.0024	Pass
4.30	3749.999999	-0.0003	3929.999998	-0.0005	Pass

Note: The applicant defined the normal working voltage is from 3.6 to 4.3 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 650000 (3750 MHz)		CH 662000 (3930 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	3750.000007	0.0019	3930.000008	0.0021	Pass
-20	3749.999992	-0.0021	3929.999996	-0.0011	Pass
-10	3750.000007	0.0019	3930.000003	0.0008	Pass
0	3749.999998	-0.0005	3930	0	Pass
10	3749.999992	-0.0021	3929.999996	-0.0011	Pass
20	3749.999991	-0.0024	3929.999991	-0.0024	Pass
30	3749.999998	-0.0005	3930.000003	0.0008	Pass
40	3749.999999	-0.0027	3929.999995	-0.0013	Pass
50	3749.999997	-0.0008	3929.999997	-0.0008	Pass

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---