


NR n5 SCS 15 kHz, Channel Bandwidth: 20 MHz

CH 166800 (834 MHz)




CH 167800 (839 MHz)

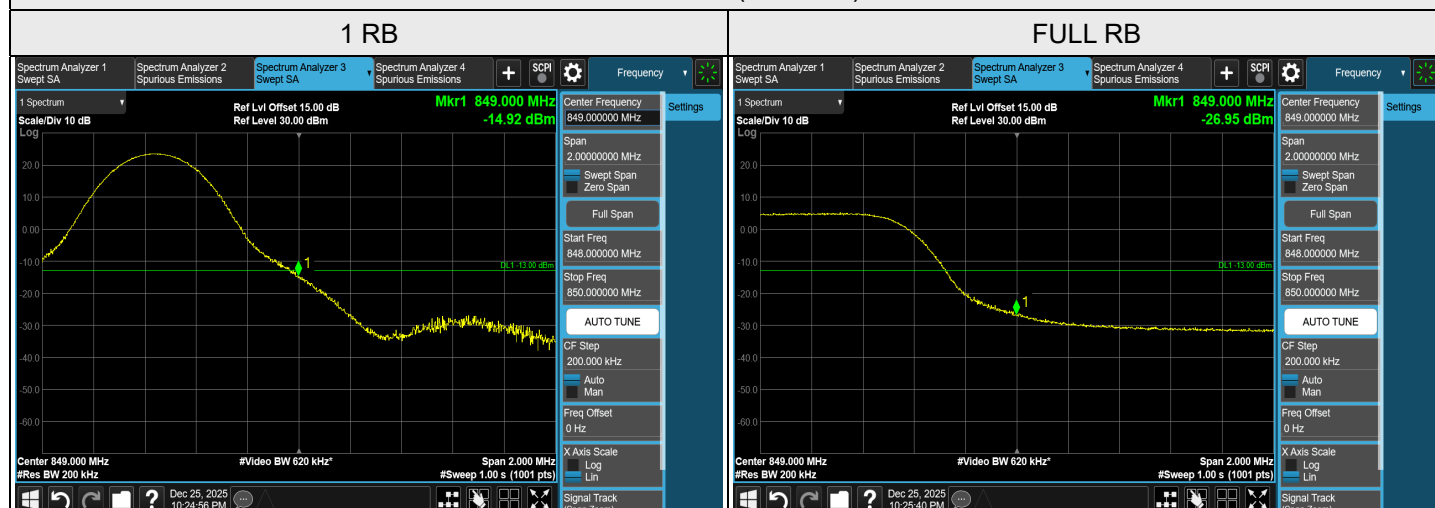

7.5.3 NR n14 SCS 15 kHz

NR n14 SCS 15 kHz, Channel Bandwidth: 5 MHz

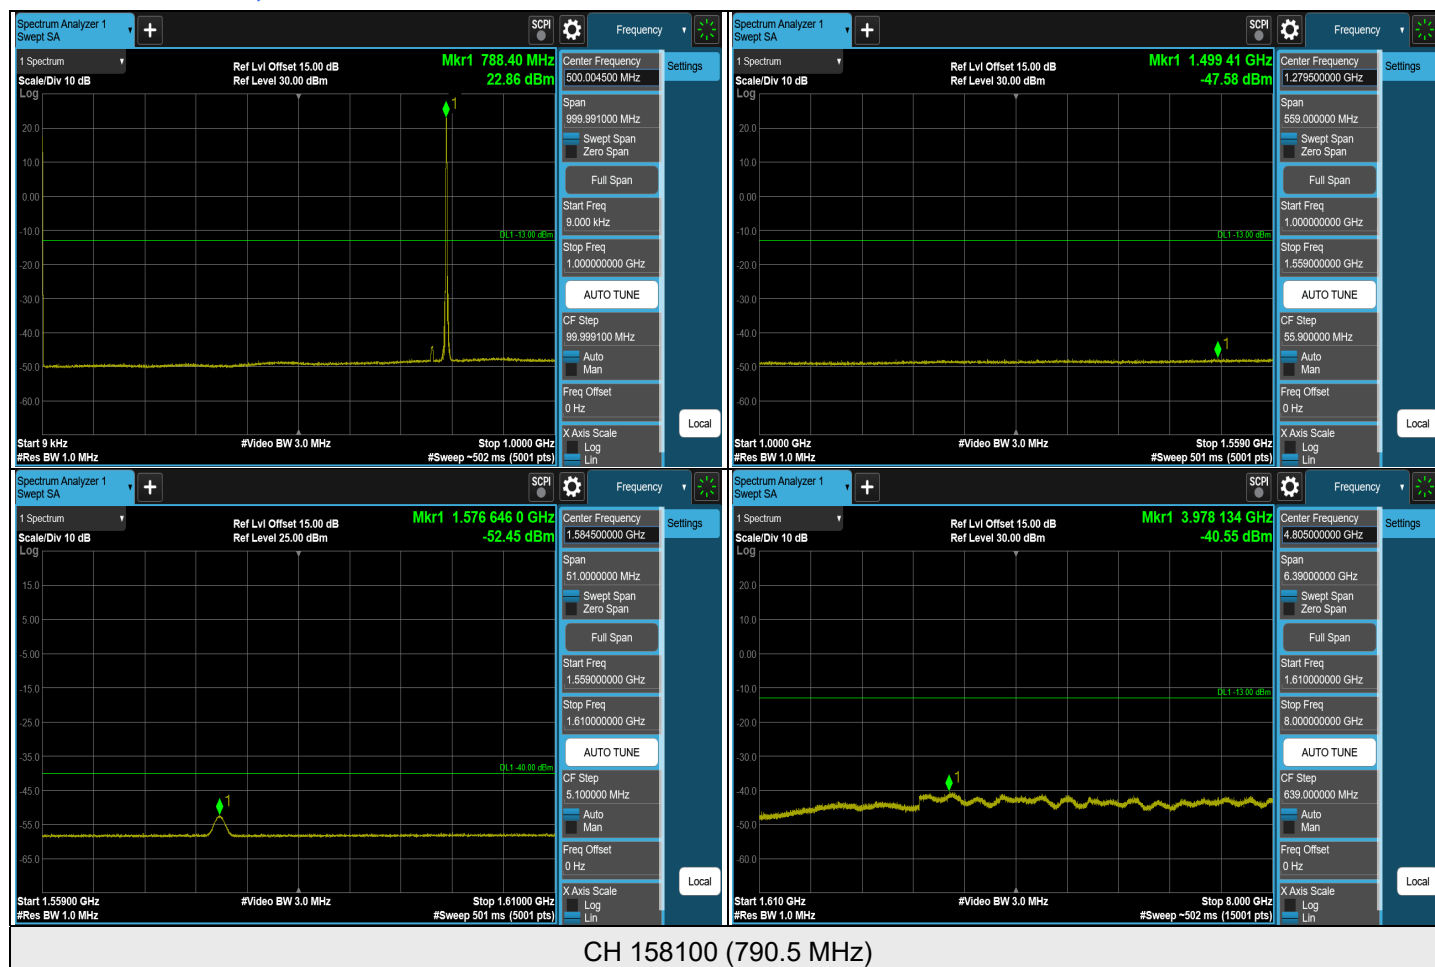



CH 158600 (793 MHz)




CH 159100 (795.5 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.


NR n14 SCS 15 kHz, Channel Bandwidth: 5 MHz

CH 158100 (790.5 MHz)

1 RB

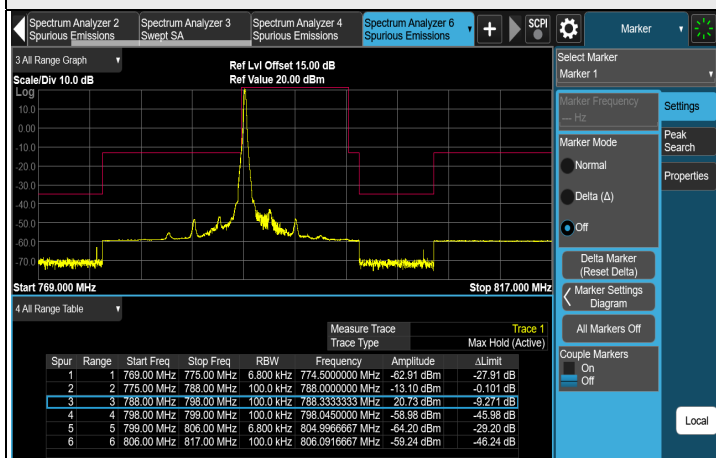


FULL RB

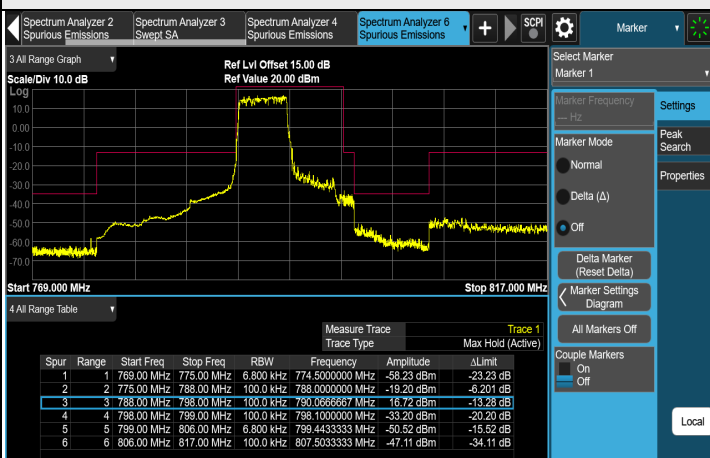


CH 159100 (795.5 MHz)


1 RB

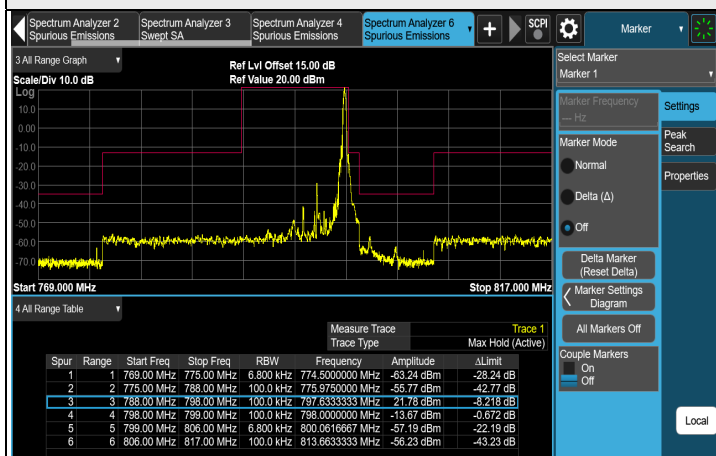

FULL RB

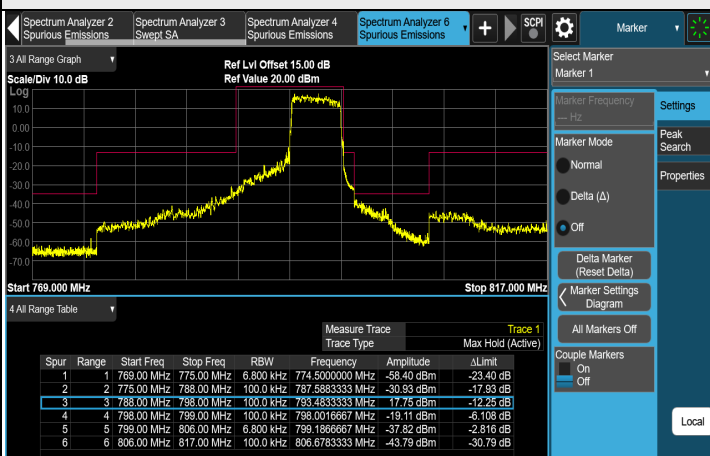

NR n14 SCS 15 kHz, Channel Bandwidth: 10 MHz

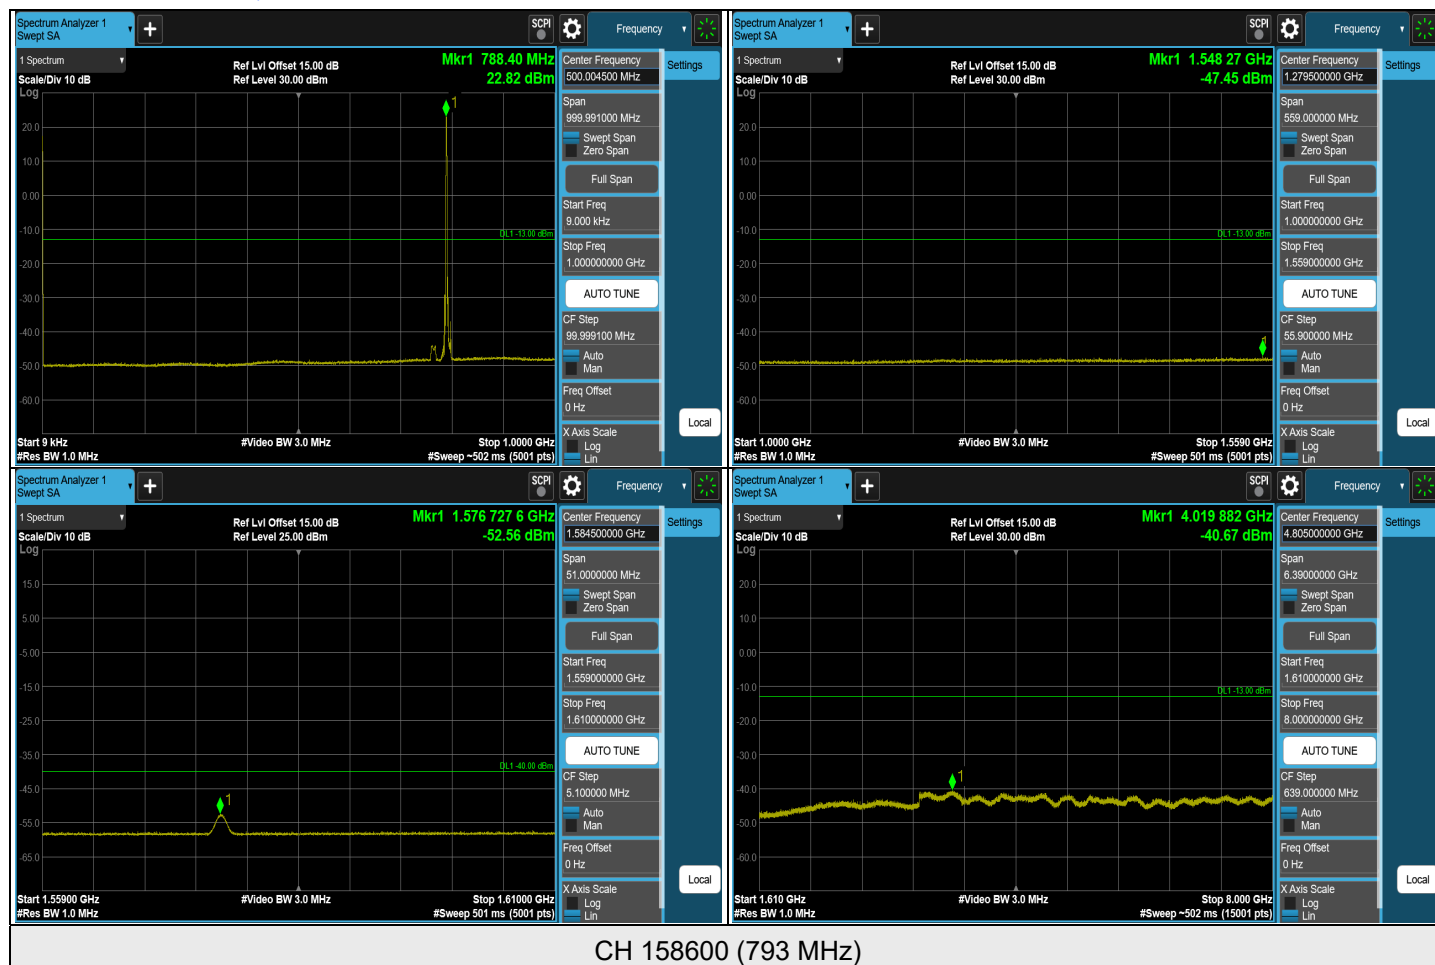


Note: The signal at 9 kHz is IF signal from spectrum analyzer.


NR n14 SCS 15 kHz, Channel Bandwidth: 10 MHz

CH 158600 (793 MHz)

1 RB

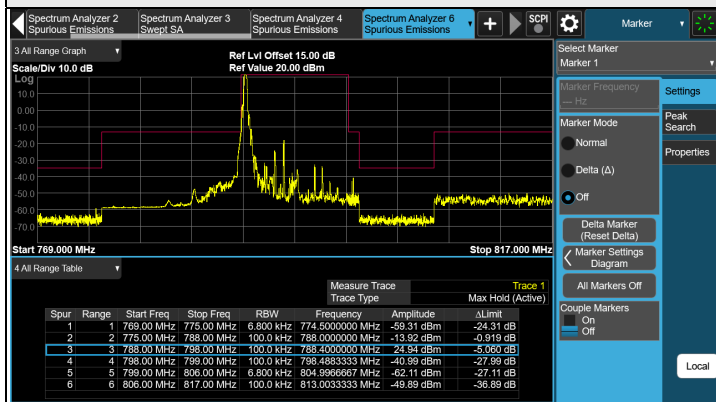


FULL RB

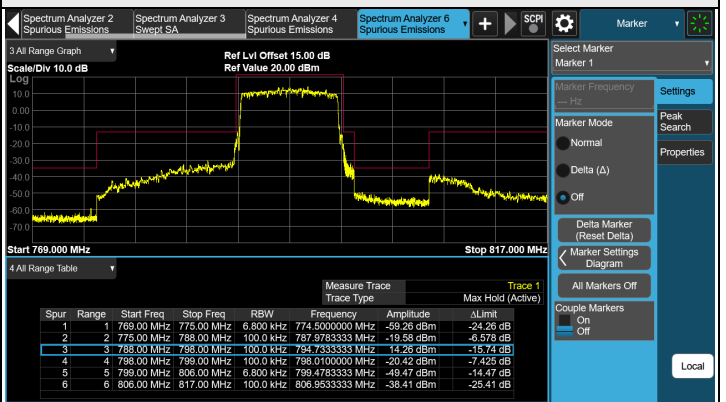

CH 158600 (793 MHz)

1 RB

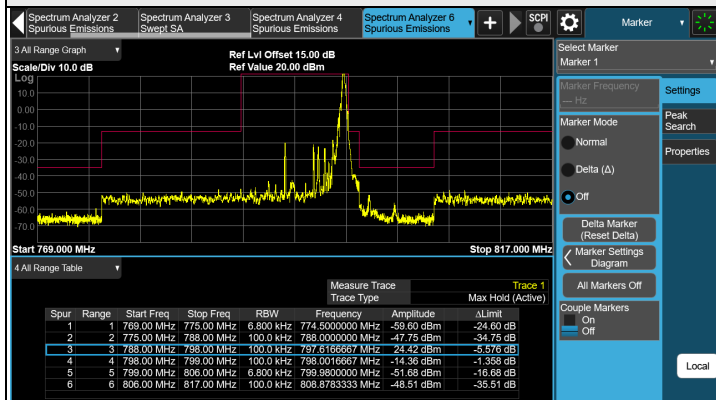



FULL RB




7.5.4 NR n30 SCS 15 kHz

NR n30 SCS 15 kHz, Channel Bandwidth: 5 MHz

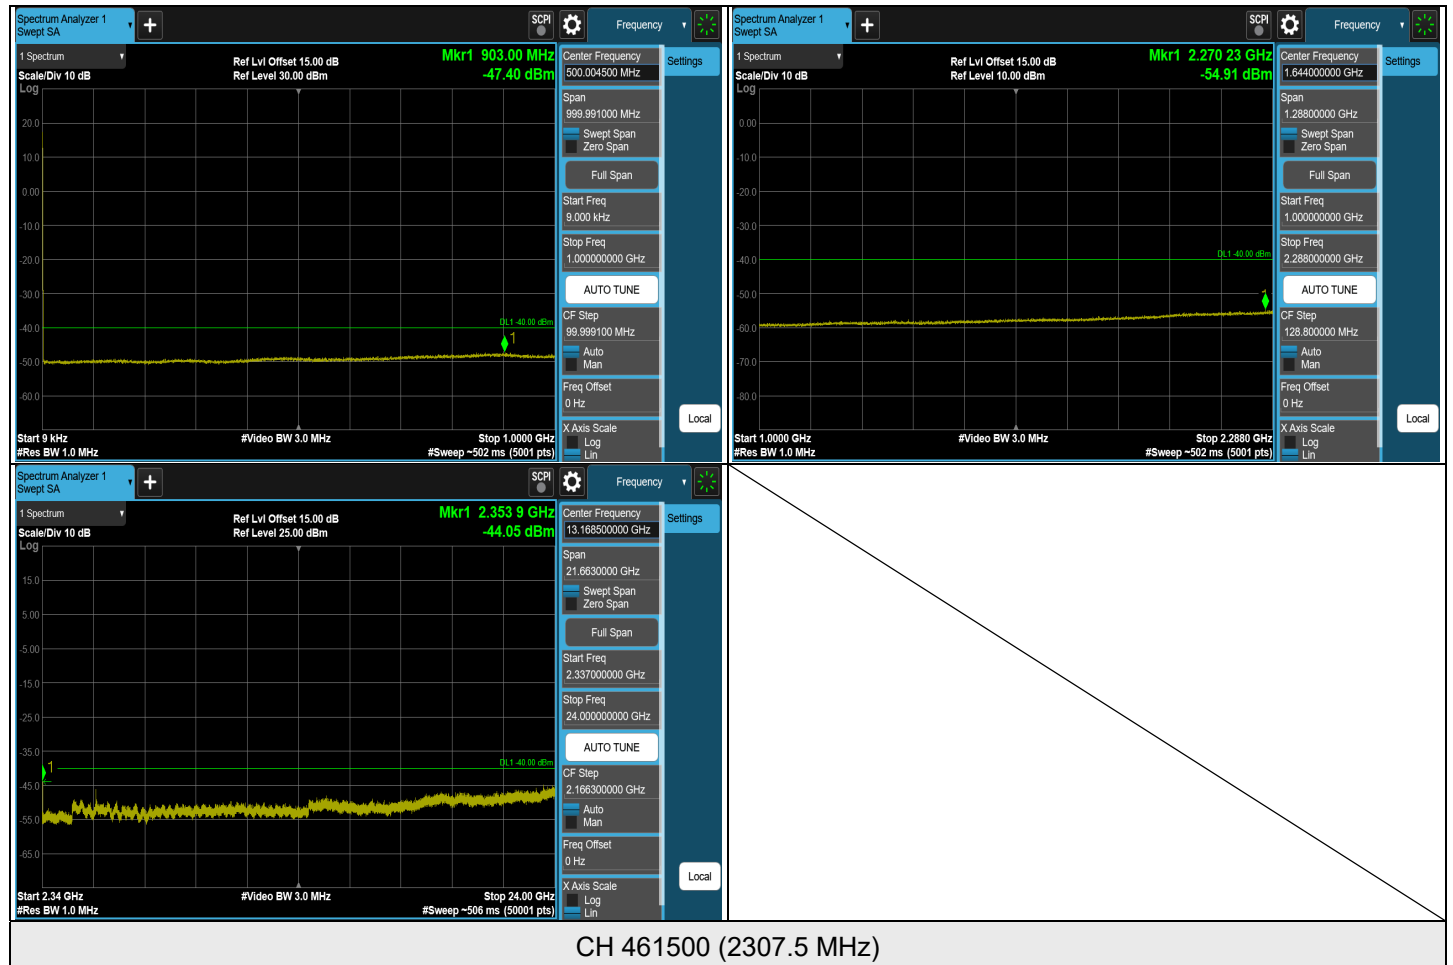


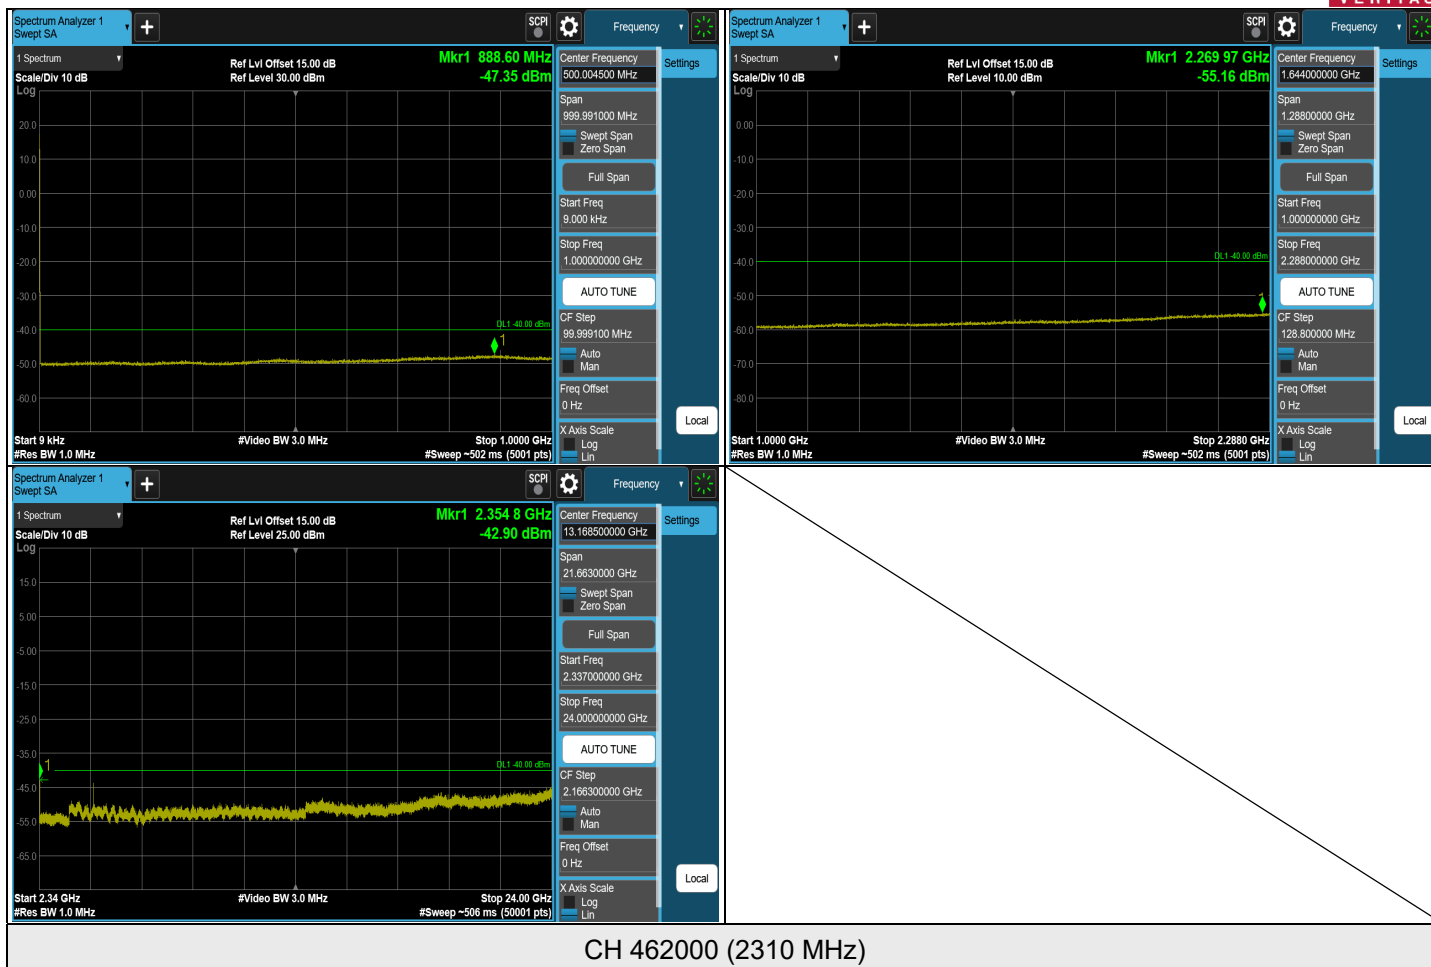

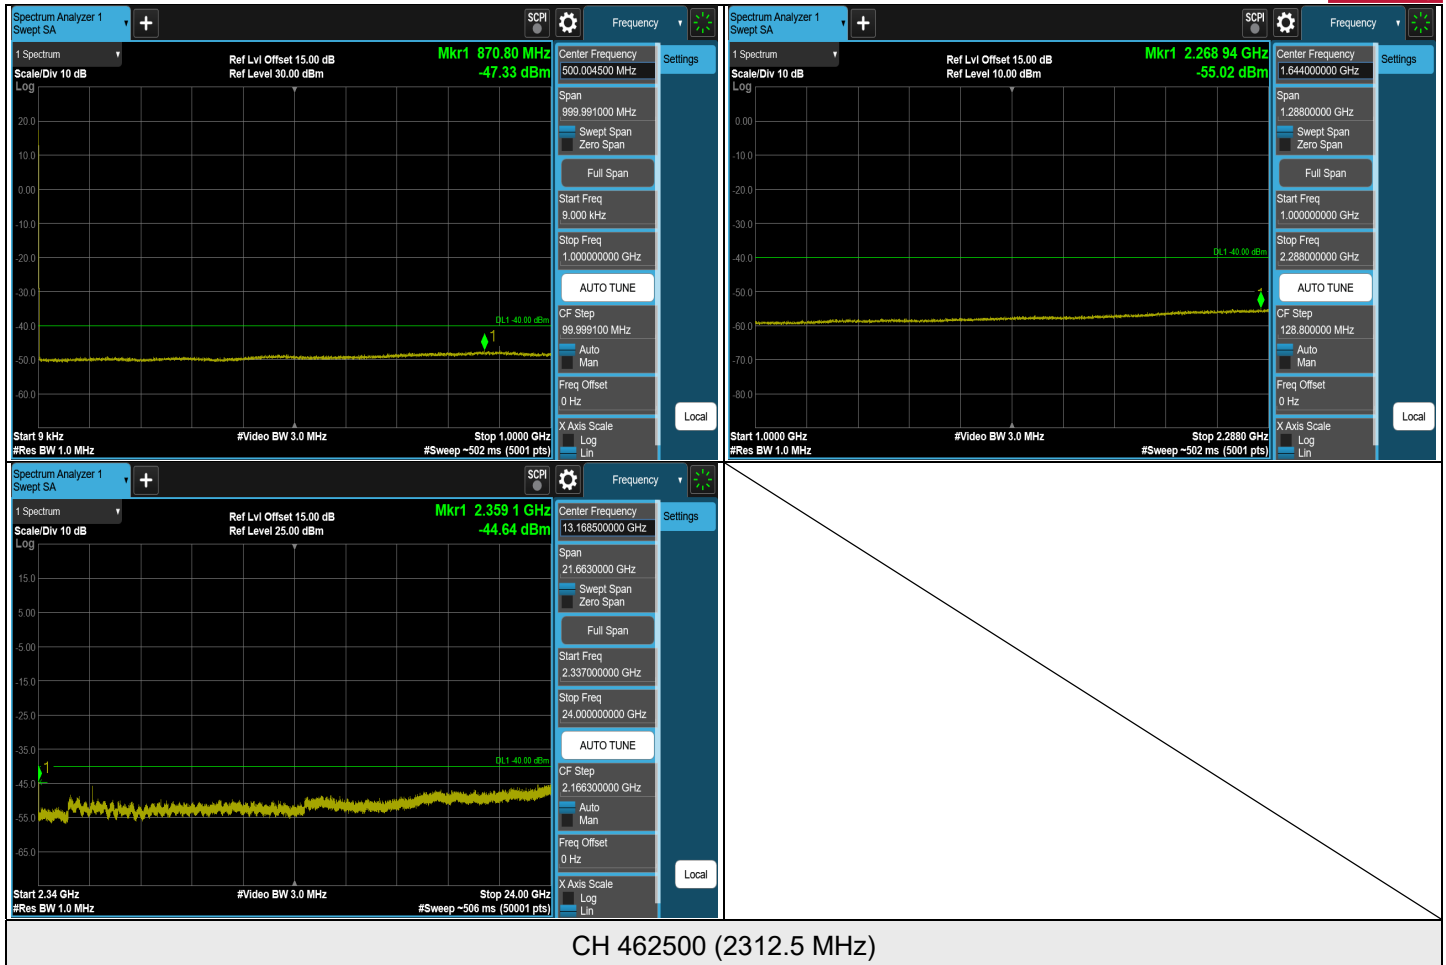

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n30 SCS 15 kHz, Channel Bandwidth: 5 MHz

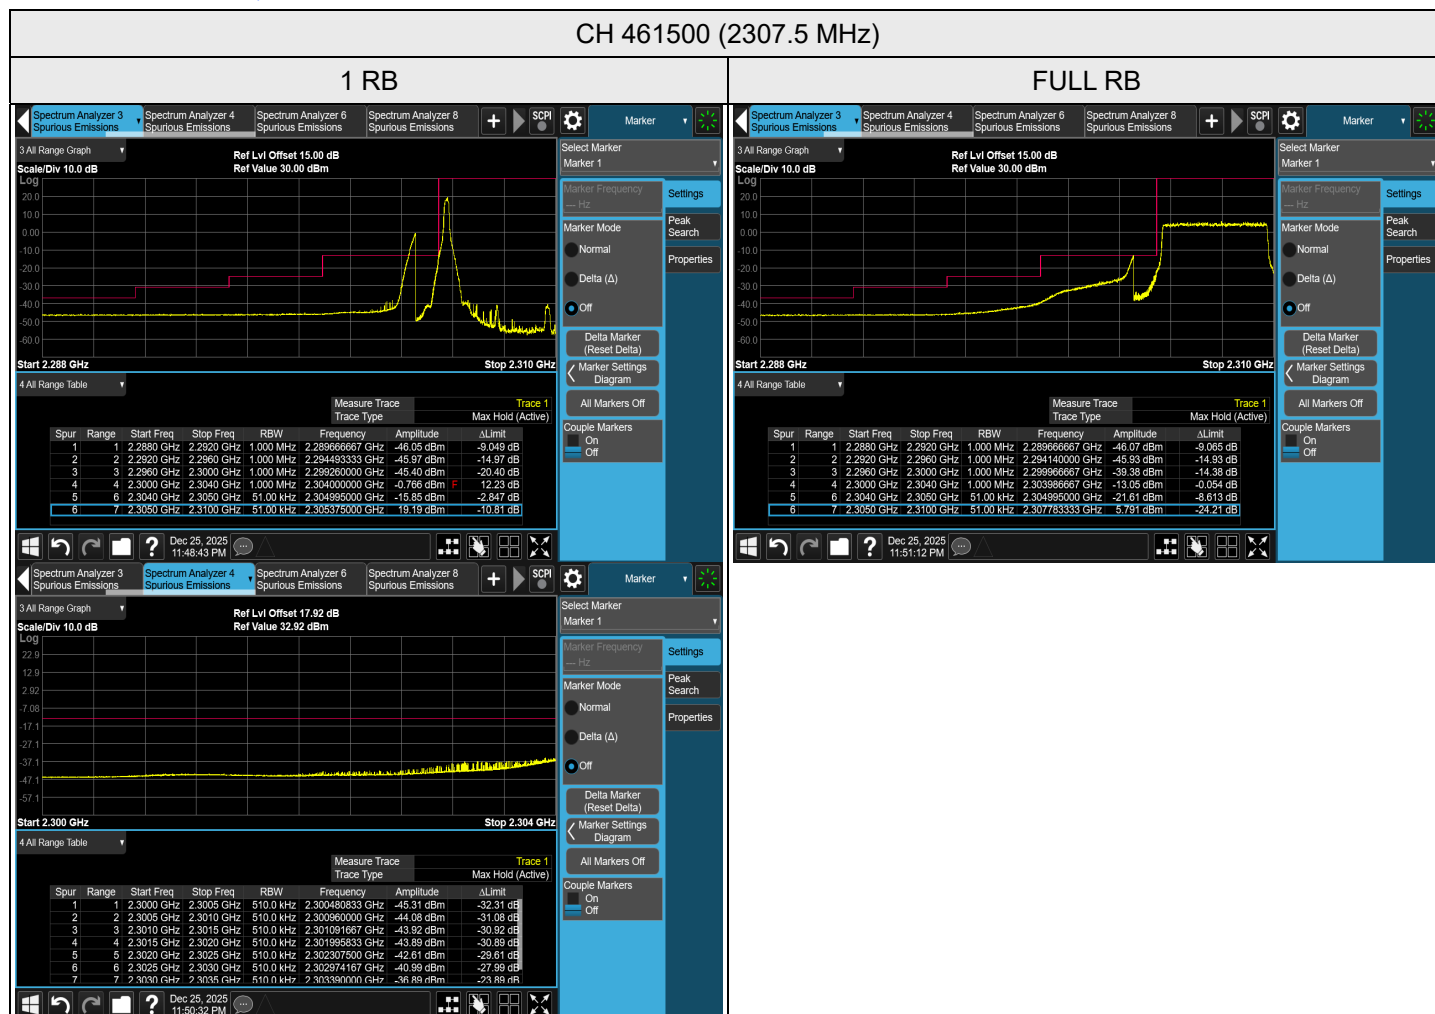


[RBW = 510 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

CH 462500 (2312.5 MHz)

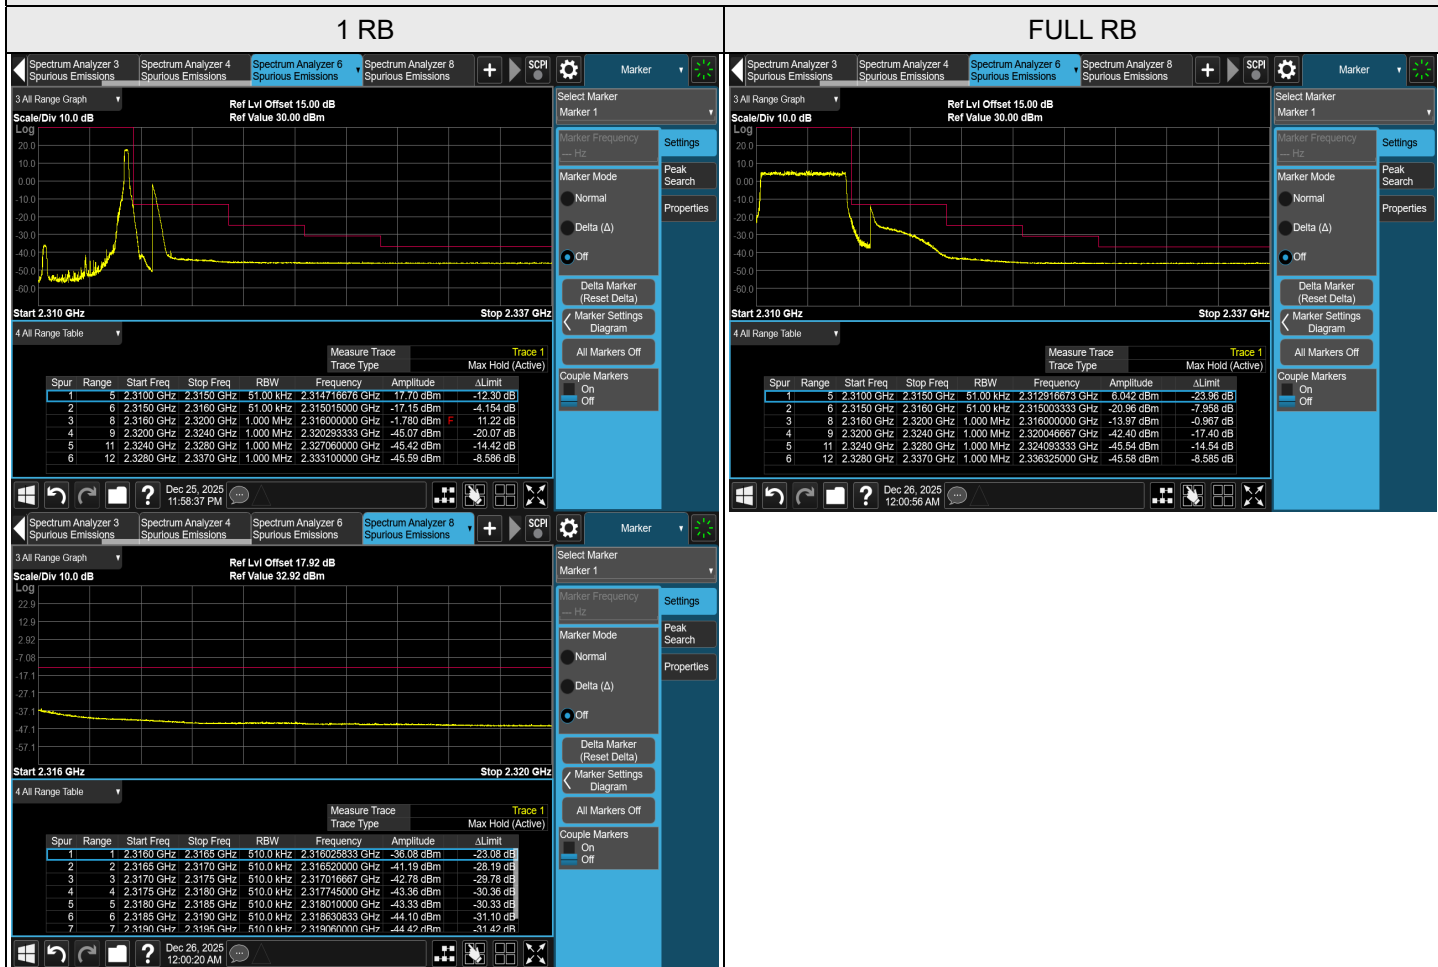


[RBW = 510 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset


NR n30 SCS 15 kHz, Channel Bandwidth: 10 MHz

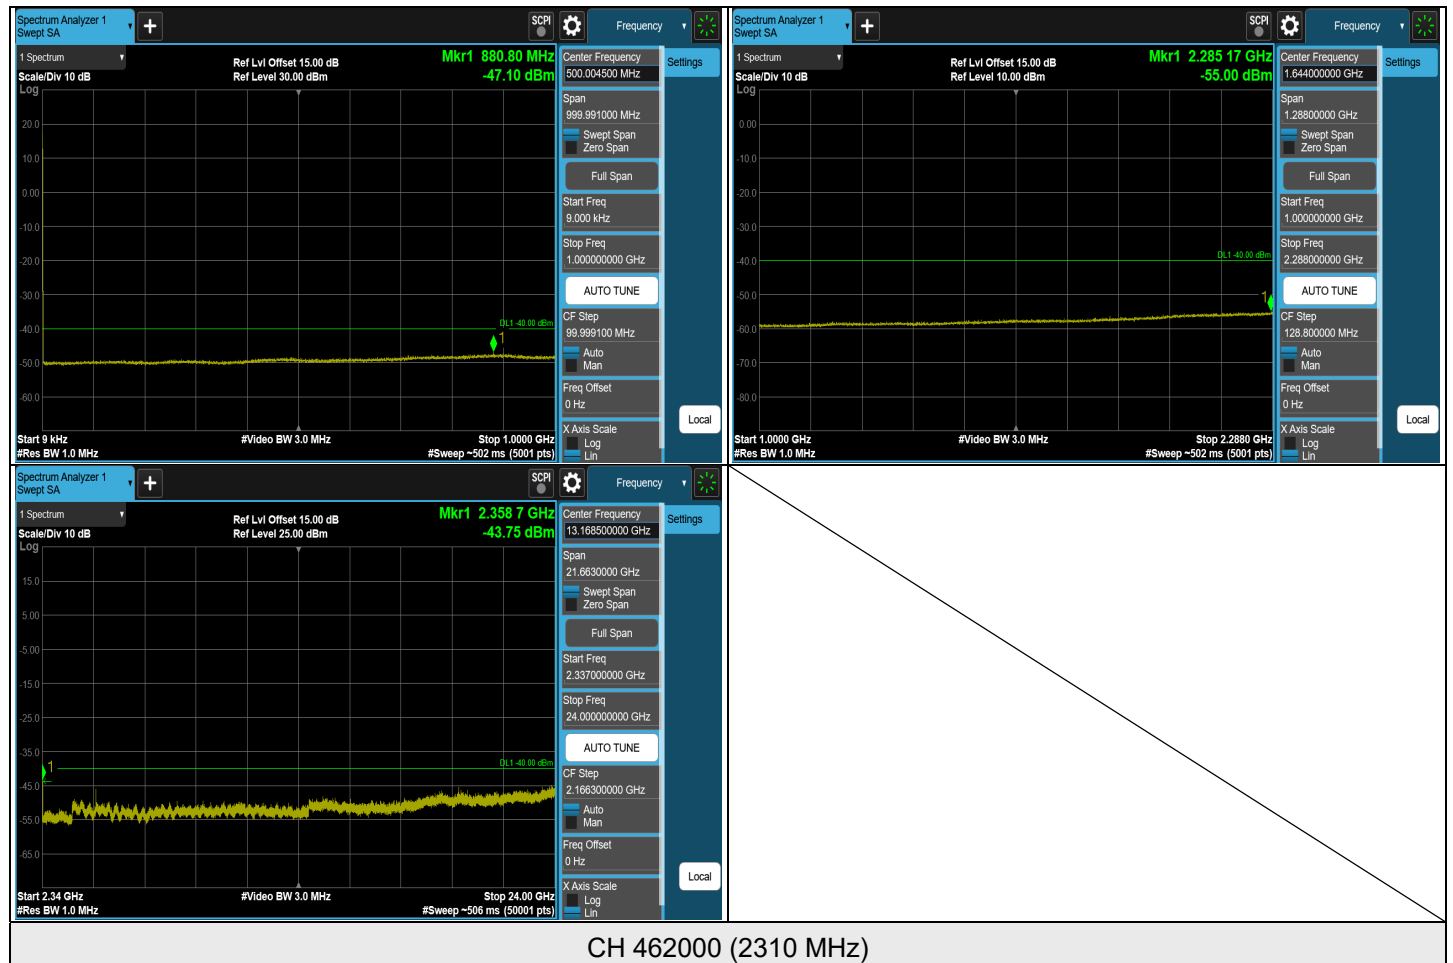

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n30 SCS 15 kHz, Channel Bandwidth: 10 MHz

CH 462000 (2310 MHz)

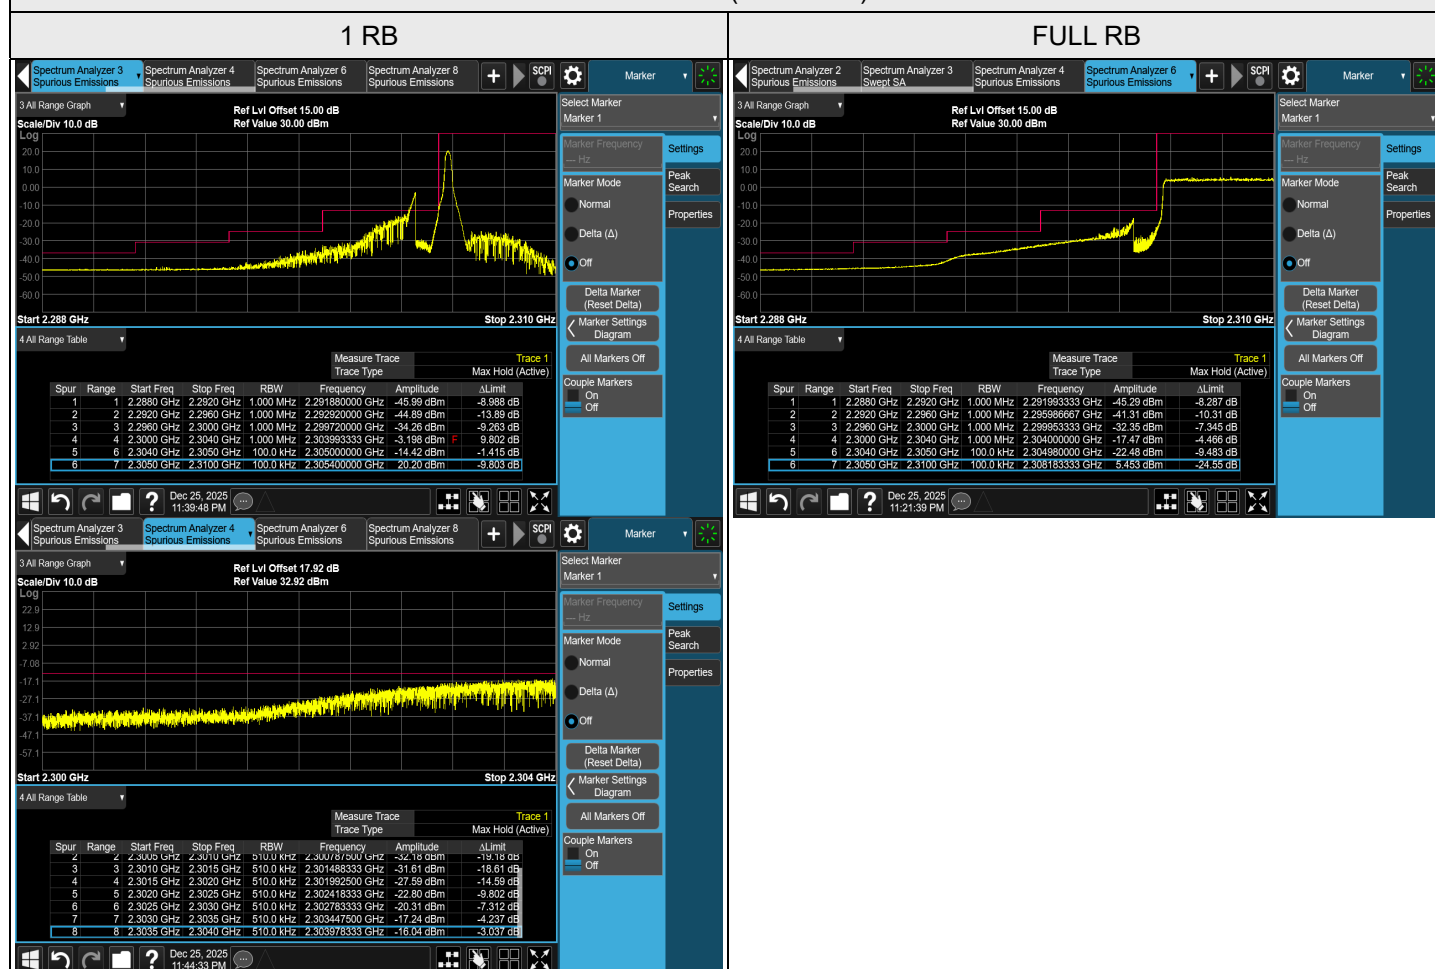


[RBW = 510 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

CH 462000 (2310 MHz)

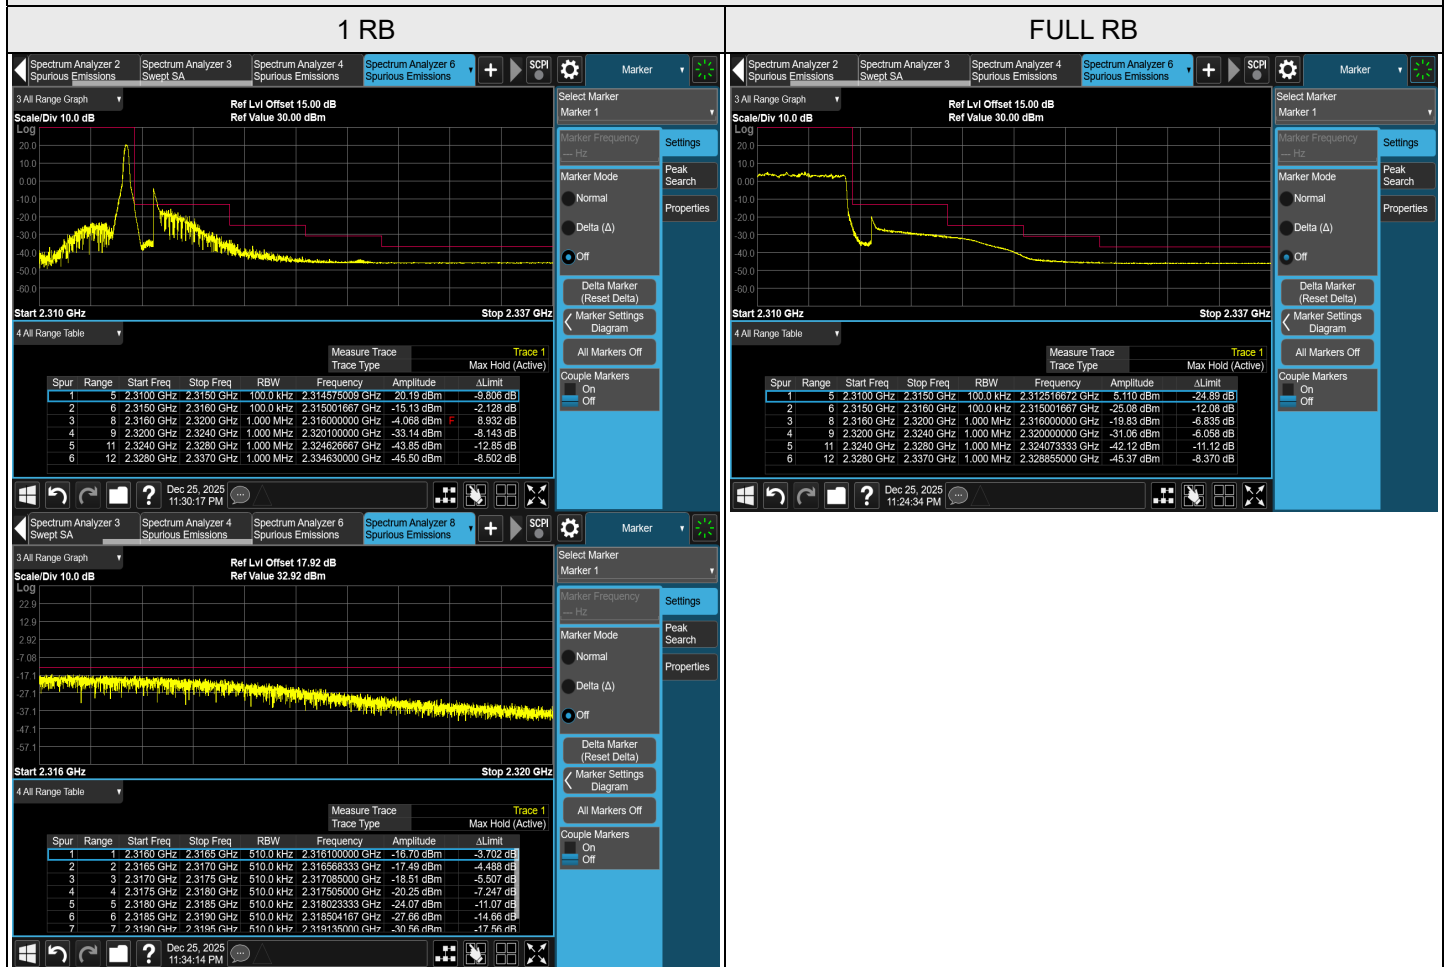

[RBW = 510 kHz / Reference RBW = 1 MHz]


Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

7.5.5 NR n41 SCS 30 kHz

NR n41 SCS 30 kHz, MIMO-Ant 0, Channel Bandwidth: 10 MHz

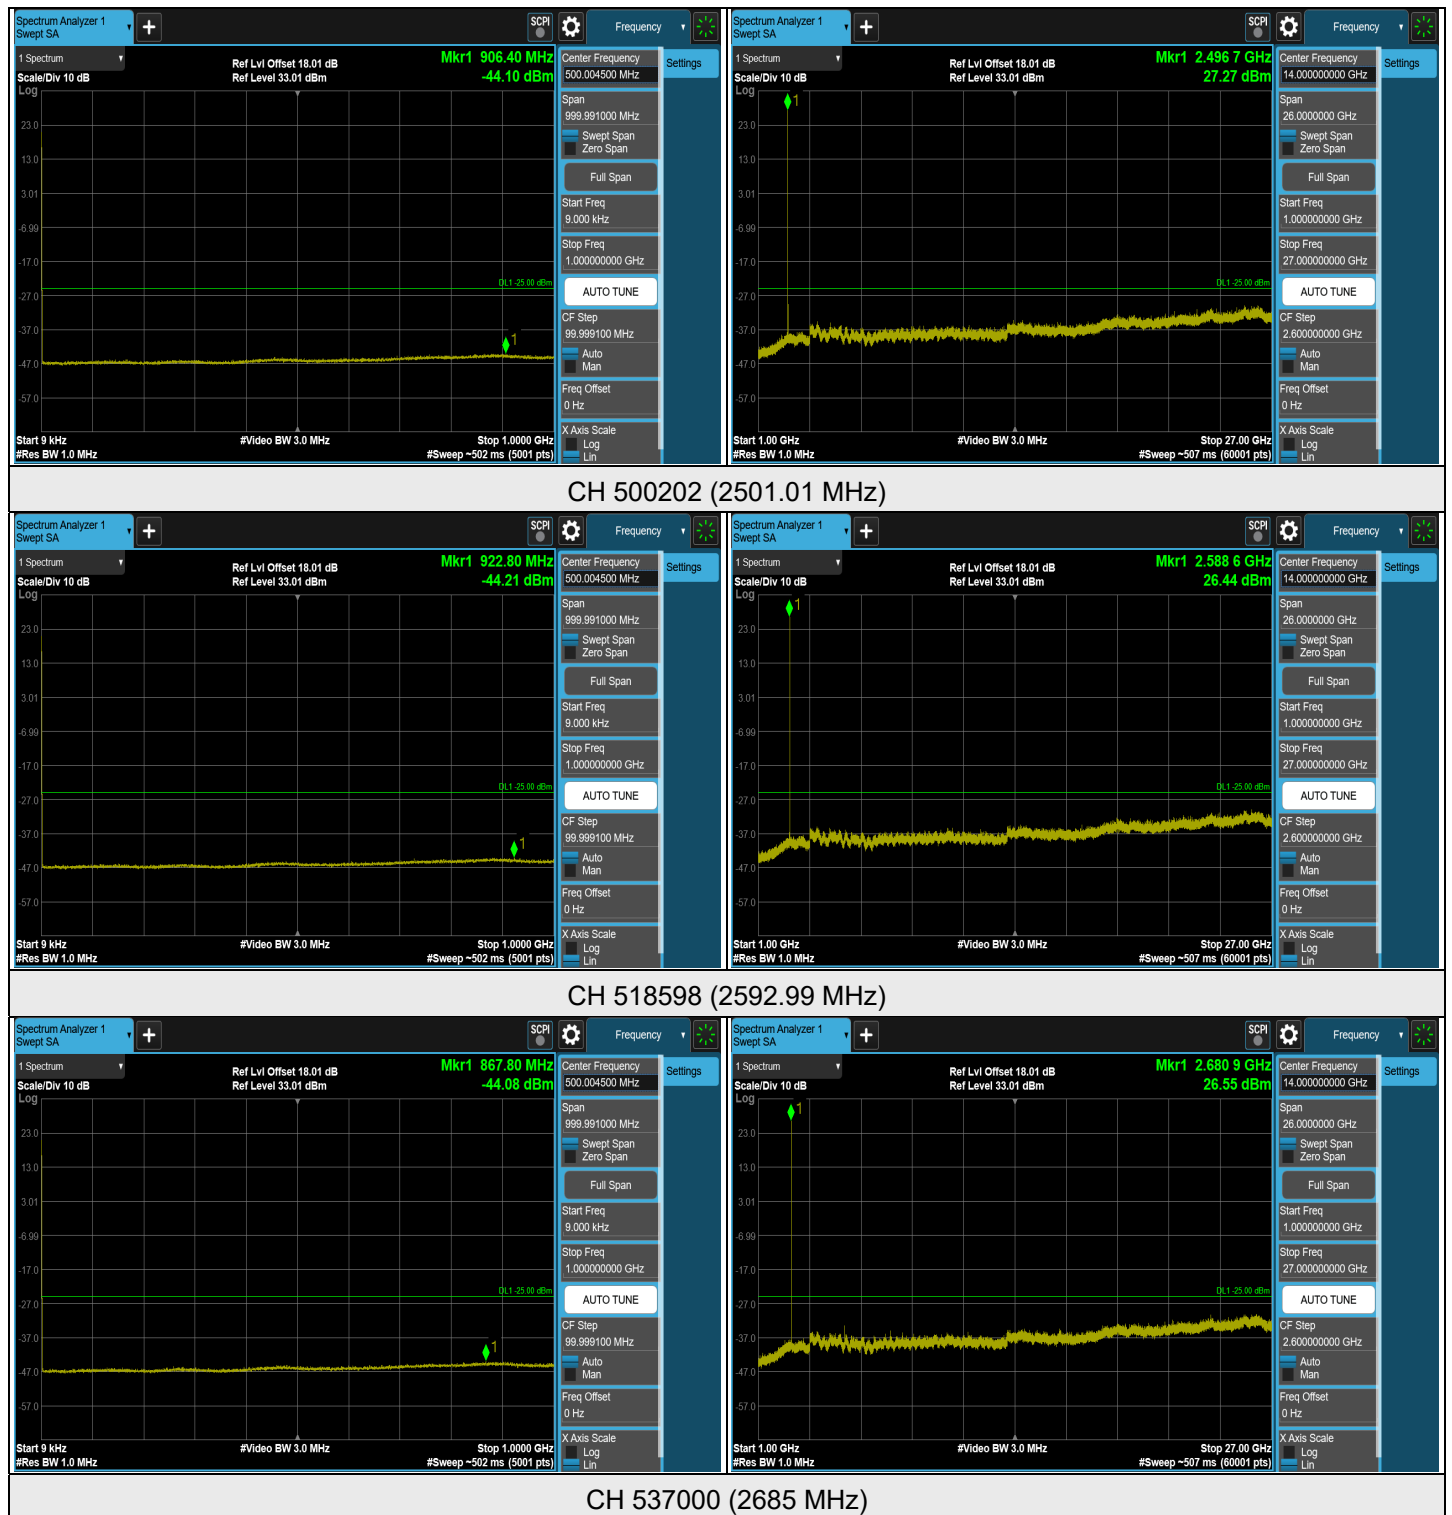


Note: The signal at 9 kHz is IF signal from spectrum analyzer.


NR n41 SCS 30 kHz, MIMO-Ant 0, Channel Bandwidth: 10 MHz

CH 500202 (2501.01 MHz) QPSK

1 RB

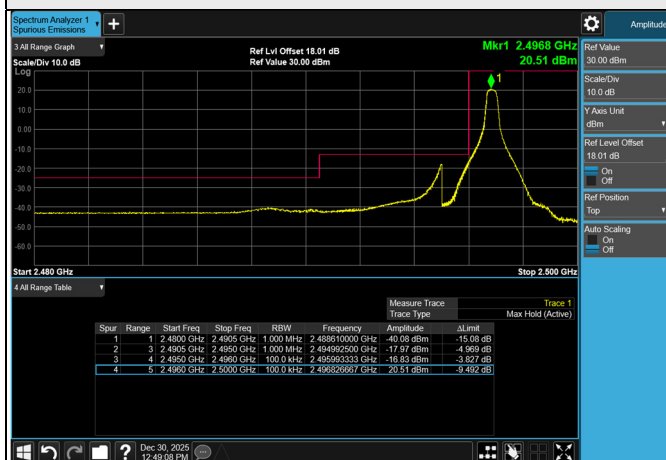


FULL RB

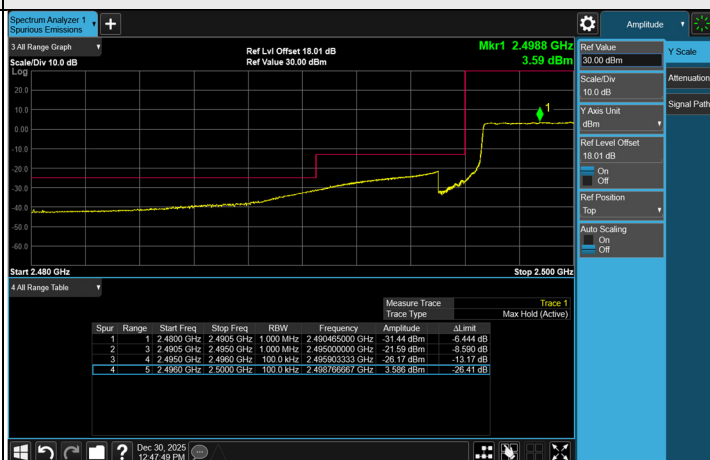


CH 537000 (2685 MHz) QPSK

1 RB

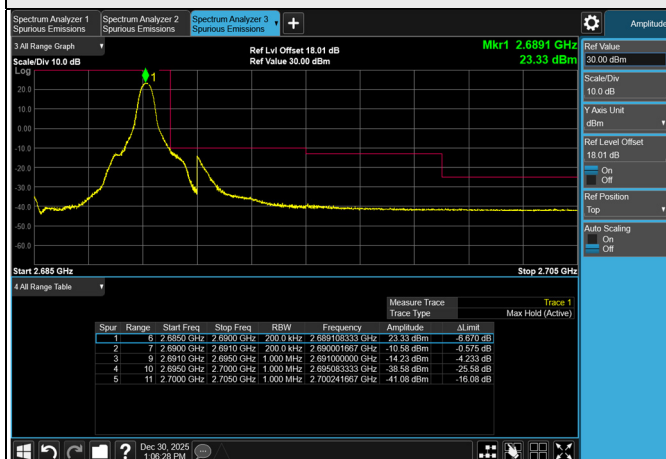

FULL RB

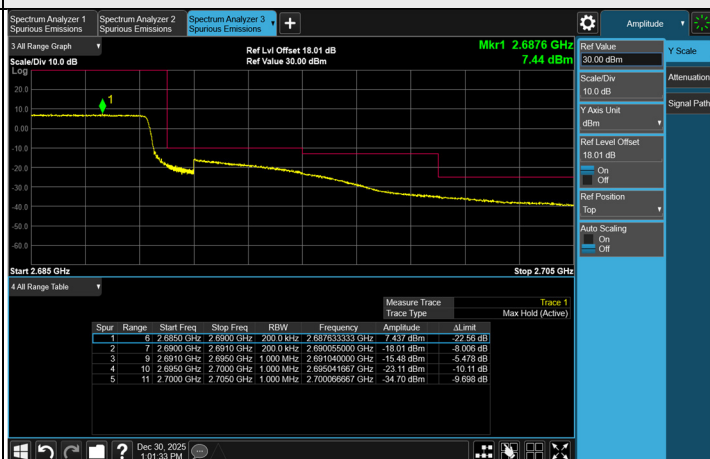


NR n41 SCS 30 kHz, MIMO-Ant 0, Channel Bandwidth: 15 MHz



CH 500700 (2503.5 MHz)



CH 518598 (2592.99 MHz)

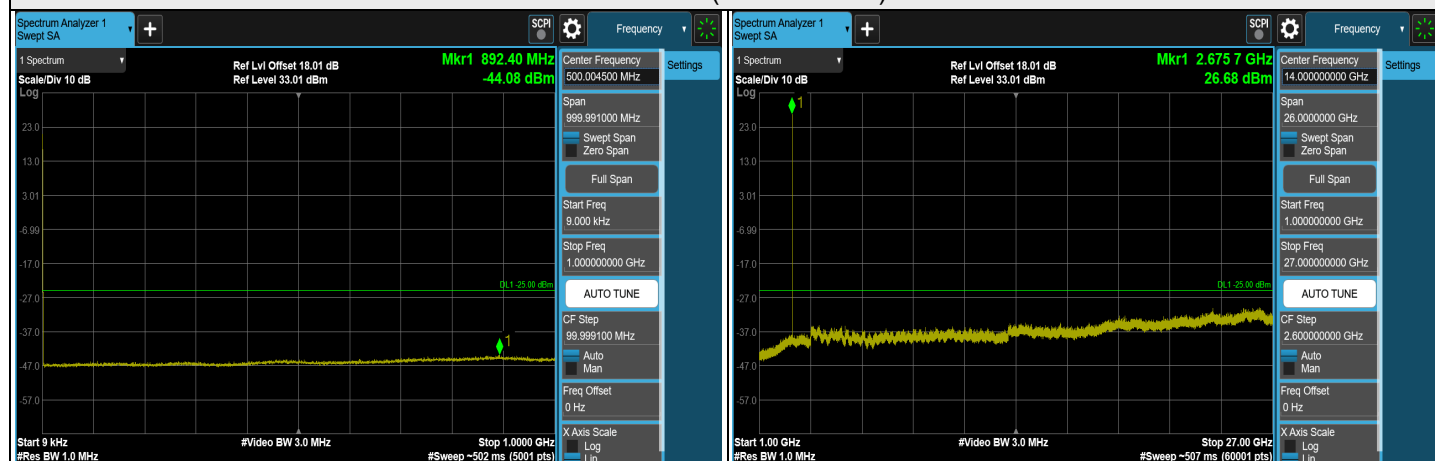

CH 536496 (2682.48 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.