

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	100.0 x 100.0 x 100.0	3.2.0.1840	5G Verification Source

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 5.55	30000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1109	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4ip Sn1823, 2025–07–11

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

Date	2026–04–01
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	33.0
psPDtot+ [W/m ²]	33.4
H _{max} [A/m]	0.354
E _{max} [V/m]	131
max _(Stot) [W/m ²]	43.8
Power Drift [dB]	–0.01

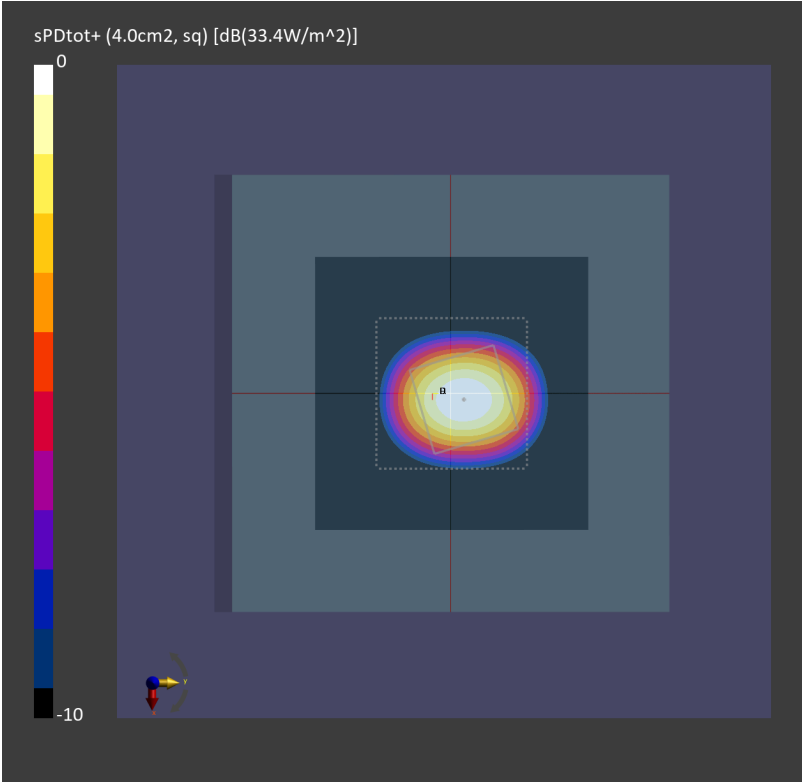

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	100.0 x 100.0 x 100.0	3.2.0.1840	5G Verification Source

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 5.55	30000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn656, 2026–01–15

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

Date	2026–04–07
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	34.9
psPDtot+ [W/m ²]	35.3
H _{max} [A/m]	0.351
E _{max} [V/m]	134
max _(Stot) [W/m ²]	44.8
Power Drift [dB]	0.03

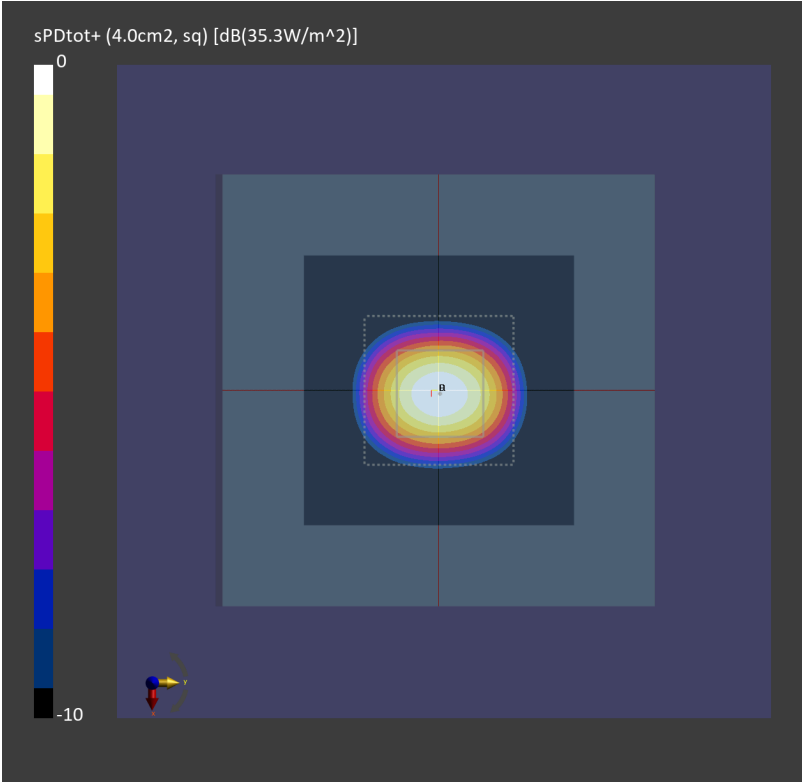

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	100.0 x 100.0 x 100.0	3.2.0.1840	5G Verification Source

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 5.55	30000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2026–02–13

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

Date	2026–04–14
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	30.2
psPDtot+ [W/m ²]	30.6
H _{max} [A/m]	0.345
E _{max} [V/m]	126
max _(Stot) [W/m ²]	40.6
Power Drift [dB]	–0.03

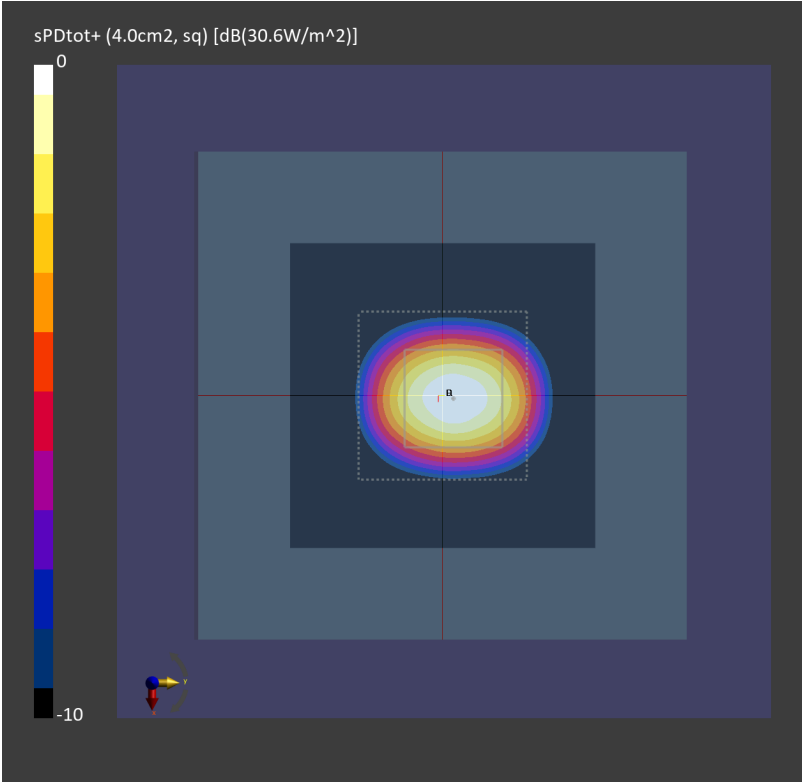

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	100.0 x 100.0 x 100.0	3.2.0.1840	5G Verification Source

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 5.55	30000.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn699, 2026–02–13

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

Date	2026-05-11
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	48.1
psPDtot+ [W/m ²]	48.6
H _{max} [A/m]	0.404
E _{max} [V/m]	159
max _(Stot) [W/m ²]	62.4
Power Drift [dB]	0.05

