

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	150.0 x 74.0 x 20.0	3.2.0.1840	Hotspot

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 35.00	28000.1	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn699, 2026–02–13

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	35.0

Measurement Results

Date	2026-05-12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	7.31
psPDtot+ [W/m ²]	7.41
H _{max} [A/m]	0.169
E _{max} [V/m]	64.8
max _(Stot) [W/m ²]	10.8
Power Drift [dB]	0.15

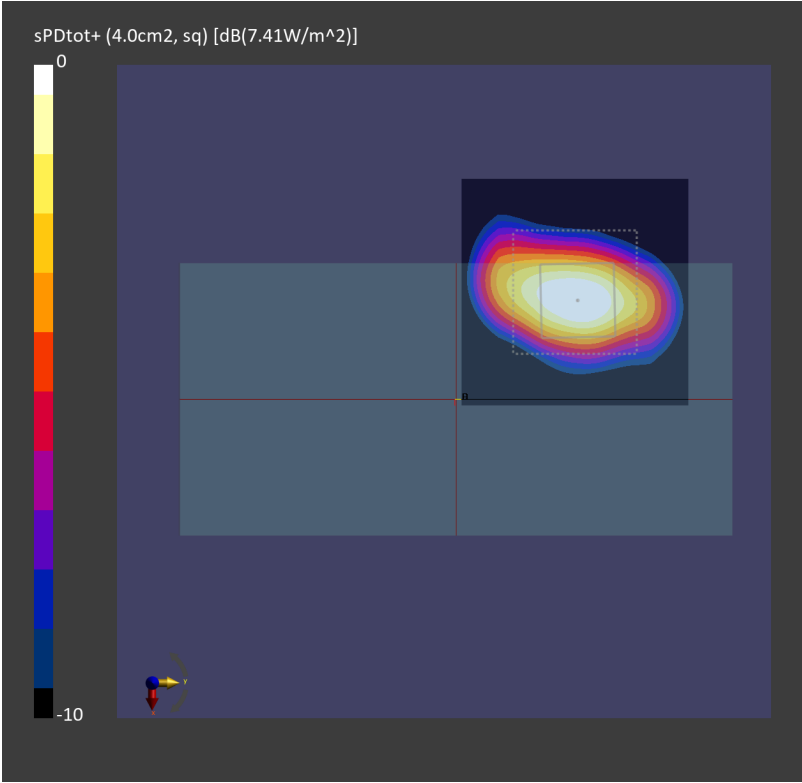

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	150.0 x 74.0 x 20.0	3.2.0.1840	Hotspot

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 35.00	38500.1	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn699, 2026–02–13

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	35.0

Measurement Results

Date	2026–05–12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	7.05
psPDtot+ [W/m ²]	7.09
H _{max} [A/m]	0.169
E _{max} [V/m]	65.5
max _(Stot) [W/m ²]	10.9
Power Drift [dB]	0.04

