

Nemko Test Report: 2L0041RUS6

Applicant: Navini Networks
2240 Campbell Creek Blvd. Suite 110
Richardson, TX 75082

**Equipment Under Test:
(E.U.T.)** 2.4 GHz CPE, Release 1

In Accordance With: **FCC Part 15, Subpart C, 15.247**
Direct Sequence Spread Spectrum Transmitters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By:



Tom Tidwell, Wireless Group Manager

Date: 8/28/02

Total Number of Pages: 48

Table of Contents

Section 1.	Summary of Test Results.....	3
Section 2.	Equipment Under Test (E.U.T.).....	5
Section 3.	Powerline Conducted Emissions.....	7
Section 4.	Minimum 6 dB Bandwidth	15
Section 5.	Maximum Peak Output Power	19
Section 6.	RF Exposure	20
Section 7.	Spurious Emissions (conducted)	22
Section 8.	Spurious Emissions (radiated)	27
Section 9.	Peak Power Spectral Density.....	32
Section 10.	Test Equipment List	36
ANNEX A - TEST DETAILS		37
ANNEX B - TEST DIAGRAMS.....		46

Section 1. Summary of Test Results

Manufacturer: Navini Networks

Model No.: 2.4 GHz CPE, Release 1

Serial No.: 001

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Direct Sequence Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP LAB CODE: 100426-0

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
Powerline Conducted Emissions	15.207(a)	48 dB μ V	Complies
Minimum 6 dB Bandwidth	15.247(a)(2)	>500 kHz	Complies
Maximum Peak Power Output	15.247(b)(1)	<1 Watt	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	-20 dBc/100kHz	Complies
Spurious Emissions (Restricted Bands)	15.247(c)	< 74 dBuV/m Peak < 54 dBuV/m Avg	Complies
Peak Power Spectral Density	15.247(d)	+8 dBm/3kHz	Complies

Footnotes:

¹It is Navini's understanding that measurements to determine the minimum processing gain will not be required subsequent to the Commission's adoption of the Second Report and Order in ET Docket No. 99231.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Operating Band: 2.4012 GHz – 2.4785 GHz

User Frequency Adjustment: Software controlled. Not adjustable by user.

Description of Modification for Modification Filing

Not Applicable


Family List Rational

Not Applicable

Description of Operation

The EUT is a CPE (Customer Premise Equipment) transceiver operating in the 2.4 GHz band. The transceiver serves as a wireless link between a BTS and a customer site. The EUT uses a multi-antenna system for improved coverage and diversity. **Only one antenna transmits at any time.** The transmitter is digitally modulated and produces a spread spectrum waveform.

System Diagram

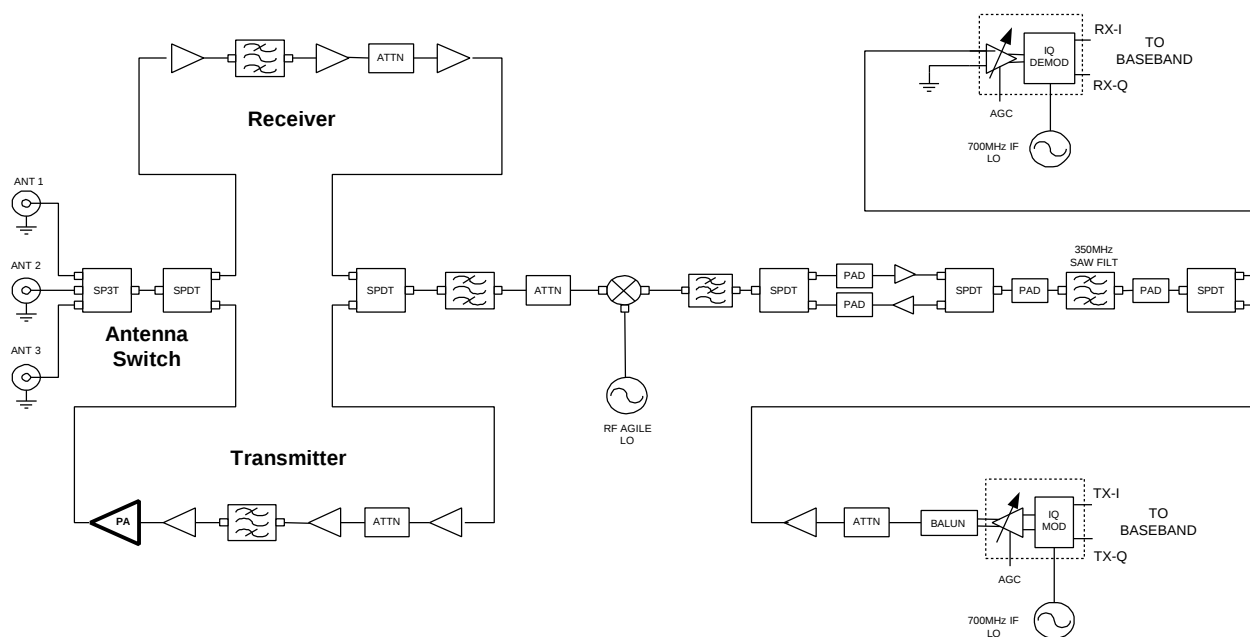

Section 3. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
TESTED BY: David Light	DATE:4/10/2002

Test Results: Complies.

Measurement Data: See attached plots.

Measurement Uncertainty: +/- 1.7 dB

NOTE: The device can be supplied with one of three possible power supplies. In the following data tables these are identified as shown below:

Power Supply #1 – Phihong PSA10A-050

Power Supply #2 – Phihong PSC15A-050S

Power Supply #3 – Achme AM138B05S10

Test Data – Powerline Conducted Emissions, Power Supply #1



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Powerline Conducted Emissions																									
Page 1 of 2		Complete <u>X</u>																									
Job No.: 2L0041R	Date: 4/10/2002	Preliminary: _____																									
Specification: 15.207	Temperature(°C): 22																										
Tested By: David Light	Relative Humidity(%): 40																										
E.U.T.: 2.4 GHz CPE																											
Configuration: TX FULL POWER																											
Sample Number: 1																											
Location: Lab 4	RBW: 10 kHz	Measurement																									
Detector Type: Peak	VBW: 10 kHz	Distance: _____ m																									
Test Equipment Used																											
Antenna: _____	L.I.S.N.: 1258																										
Pre-Amp: _____	Cable #1: 1534																										
Filter: 1555	Cable #2: 1038																										
Receiver: 1036	Cable #3: _____																										
Attenuator #1: _____	Cable #4: _____																										
Attenuator #2: _____	Limiter: 674																										
Additional equipment used: _____																											
Measurement Uncertainty: +/-1.7 dB																											
<table border="1"> <thead> <tr> <th>Ref</th> <th>Lvl</th> <th>Unit</th> </tr> </thead> <tbody> <tr> <td>93.9</td> <td>dBμV</td> <td></td> </tr> <tr> <td>44.05</td> <td>dBμV</td> <td></td> </tr> <tr> <td>3.05561122</td> <td>MHz</td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>RBW</th> <th>VBW</th> <th>SWT</th> <th>RF Att</th> </tr> </thead> <tbody> <tr> <td>10 kHz</td> <td>10 kHz</td> <td>740 ms</td> <td>10 dB</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Start</th> <th>Stop</th> </tr> </thead> <tbody> <tr> <td>450 kHz</td> <td>30 MHz</td> </tr> </tbody> </table> Date: 10.APR.2002 12:31:17				Ref	Lvl	Unit	93.9	dBμV		44.05	dBμV		3.05561122	MHz		RBW	VBW	SWT	RF Att	10 kHz	10 kHz	740 ms	10 dB	Start	Stop	450 kHz	30 MHz
Ref	Lvl	Unit																									
93.9	dBμV																										
44.05	dBμV																										
3.05561122	MHz																										
RBW	VBW	SWT	RF Att																								
10 kHz	10 kHz	740 ms	10 dB																								
Start	Stop																										
450 kHz	30 MHz																										
Notes: L1																											


Test Data – Powerline Conducted Emissions, Power Supply #1



Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

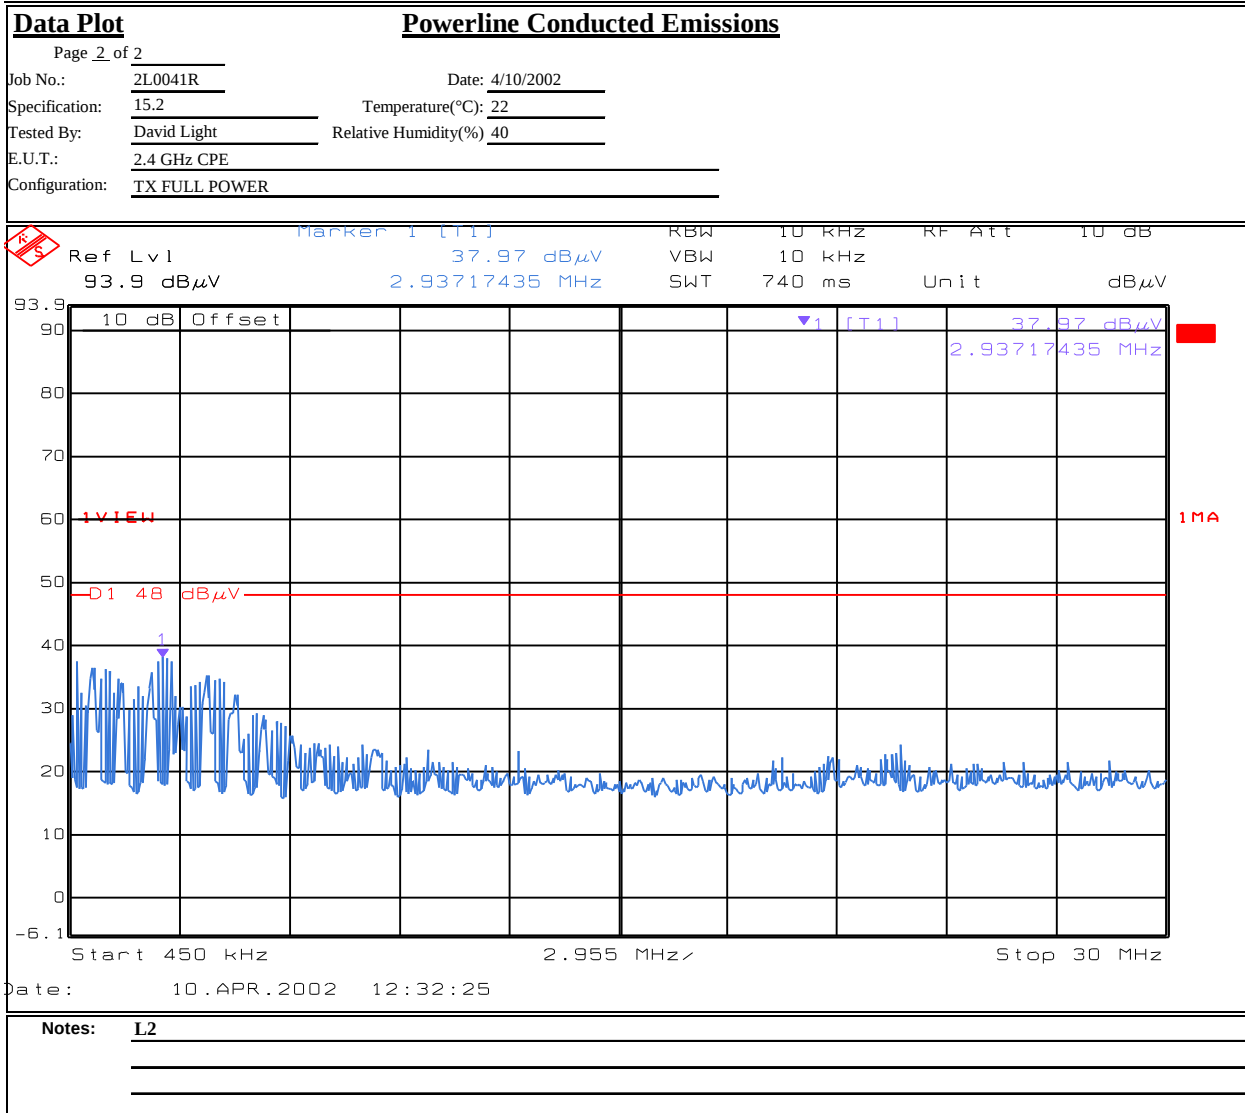


Test Data – Powerline Conducted Emissions, Power Supply #2


Data Plot		Powerline Conducted Emissions	
Page 1 of 2		Complete ☒ Preliminary ☐	
Job No.: 2L0041R	Date: 4/16/2002		
Specification: 15.207	Temperature(°C): 24		
Tested By: Eldon Berry	Relative Humidity(%): 52		
E.U.T.: 2.4 GHz CPE with Phihong PSC15A-050S power supply			
Configuration: TX FULL POWER			
Sample Number: 1			
Location: Lab 4	RBW: 10 kHz	Measurement	
Detector Type: Peak	VBW: 10 kHz	Distance: _____ m	
Test Equipment Used			
Antenna: _____	L.I.S.N.: 1258		
Pre-Amp: _____	Cable #1: 1534		
Filter: 1555	Cable #2: 1038		
Receiver: 1036	Cable #3: _____		
Attenuator #1: _____	Cable #4: _____		
Attenuator #2: _____	Limiter: 674		
Additional equipment used: _____			
Measurement Uncertainty: +/-1.7 dB			
Date: 16.APR.2002 14:28:47			
Notes: L1			

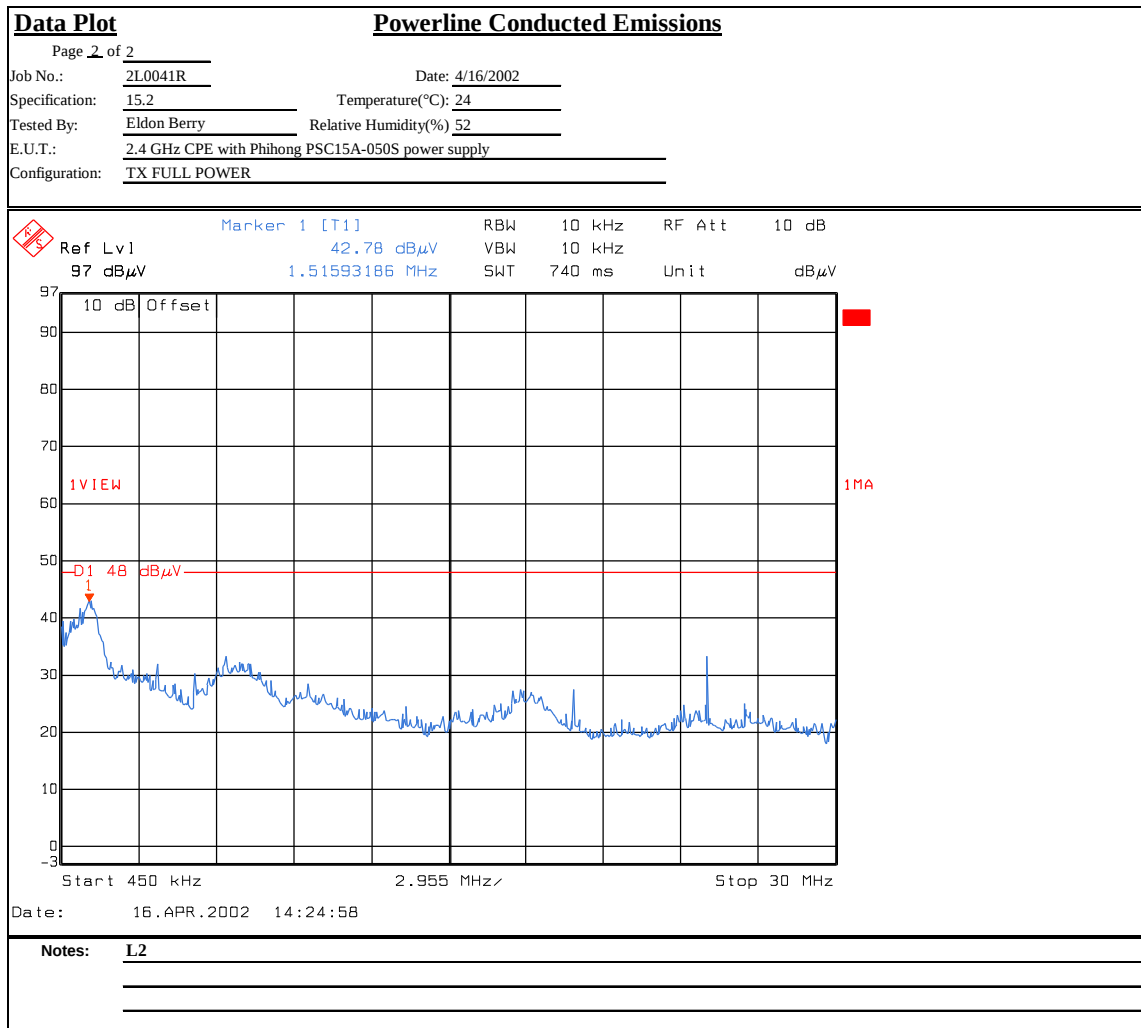

Test Data – Powerline Conducted Emissions, Power Supply #3

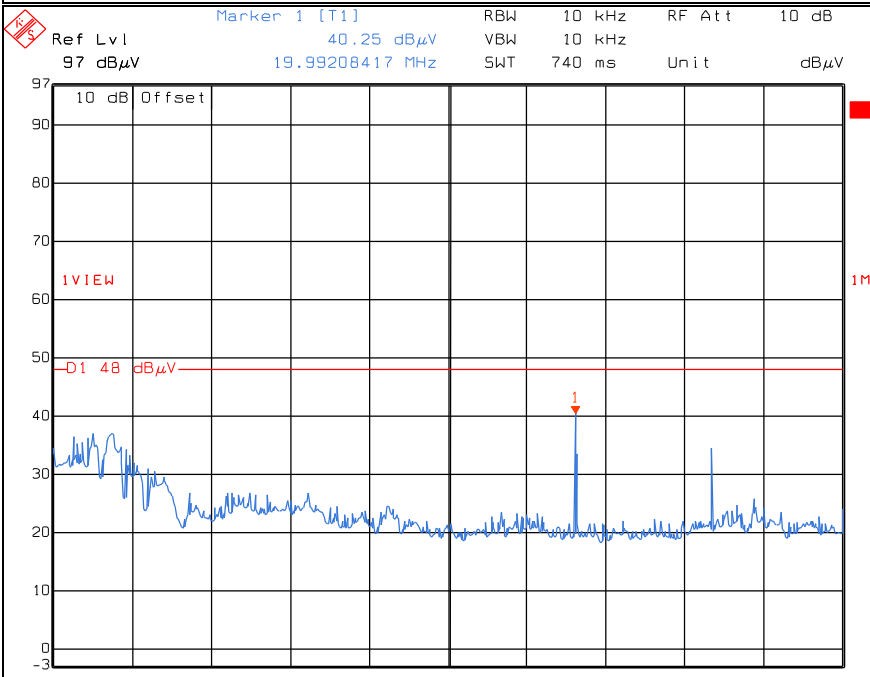Data Plot		Powerline Conducted Emissions	
Page 1 of 2			
Job No.:	2L0041R	Date:	4/16/2002
Specification:	15.207	Temperature(°C):	24
Tested By:	Eldon Berry	Relative Humidity(%)	52
E.U.T.:	2.4 GHz CPE with Achme AM138B05S10 power supply		
Configuration:	TX FULL POWER		
Sample Number:	1		
Location:	Lab 4	RBW:	10 kHz
Detector Type:	Peak	VBW:	10 kHz
		Measurement	Distance: _____ m
Test Equipment Used			
Antenna:		L.I.S.N.:	1258
Pre-Amp:		Cable #1:	1534
Filter:	1555	Cable #2:	1038
Receiver:	1036	Cable #3:	
Attenuator #1:		Cable #4:	
Attenuator #2:		Limiter	674
Additional equipment used:			
Measurement Uncertainty:	+/-1.7 dB		
			
Date: 16.APR.2002 14:35:01			
Notes: L1			

Test Data – Powerline Conducted Emissions, Power Supply #3

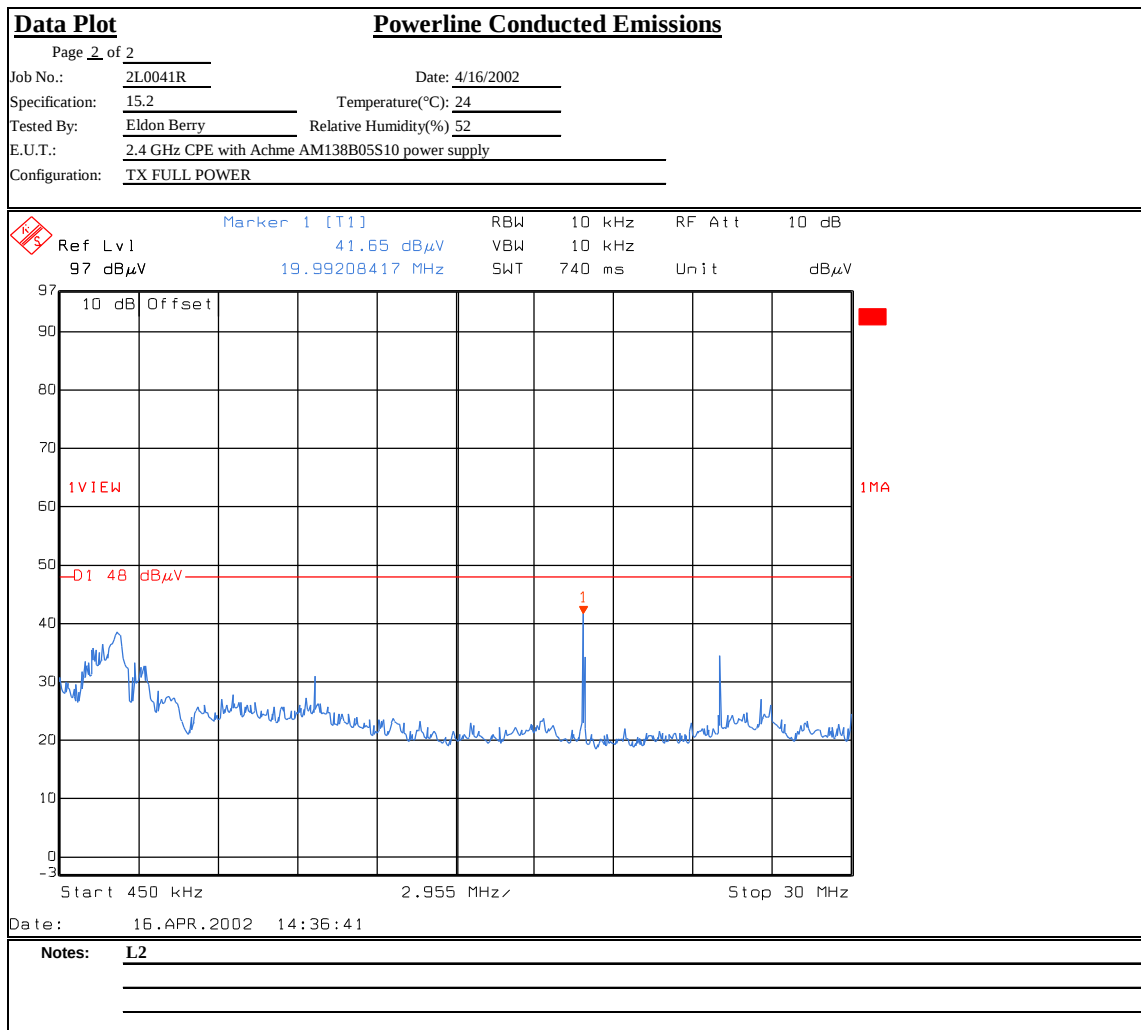

Photos – Powerline Conducted Emissions

Front



Side



Section 4. Minimum 6 dB Bandwidth

NAME OF TEST: Minimum 6 dB Bandwidth	PARA. NO.: 15.247(a)(2)
TESTED BY: David Light	DATE: 4/10/2002

Test Results: Complies.

Measurement Data:

Measured 6 dB bandwidth: **1.96 MHz**

Measurement Uncertainty: +/- 0.7 dB

Test Data – 6 dB Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Page 1 of 3

Job No.: 2L0041R Date: 4/10/2002
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%): 40
E.U.T.: 2.4 GHz CPE
Configuration: Tx IN TEST FIXTURE


Sample Number: 1
Location: Lab 2 RBW: 100 kHz
Detector Type: Peak VBW: 100 kHz

Complete X
Preliminary:

Measurement
Distance: N/A m

Test Equipment Used

Antenna: Directional Coupler:
Pre-Amp: Cable #1: 1629
Filter: Cable #2:
Receiver: 1036 Cable #3:
Attenuator #1: 1469 Cable #4:
Attenuator #2: Mixer:
Additional equipment used: Anaren 20 dB Directional coupler Model 1C0872-20, 0.5-4.0 GHz
Measurement Uncertainty: +/-1.7 dB

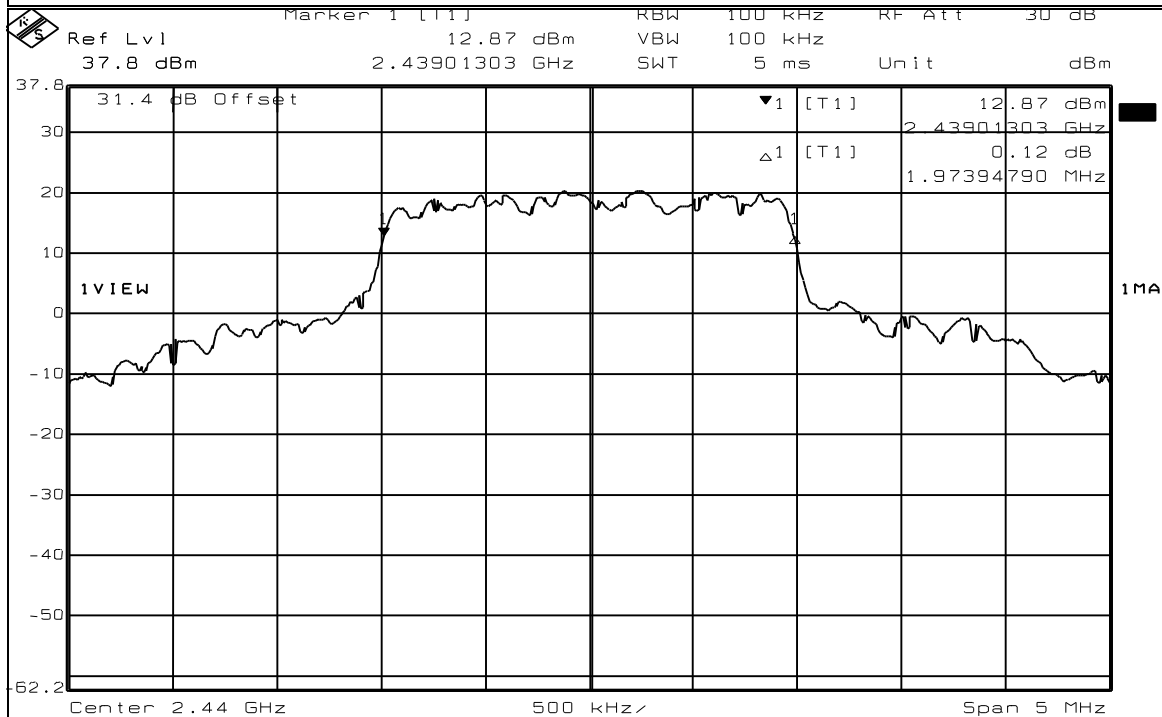

Date: 10.APR.2002 10:37:33

Notes: Mid channel


Test Data – 6 dB Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

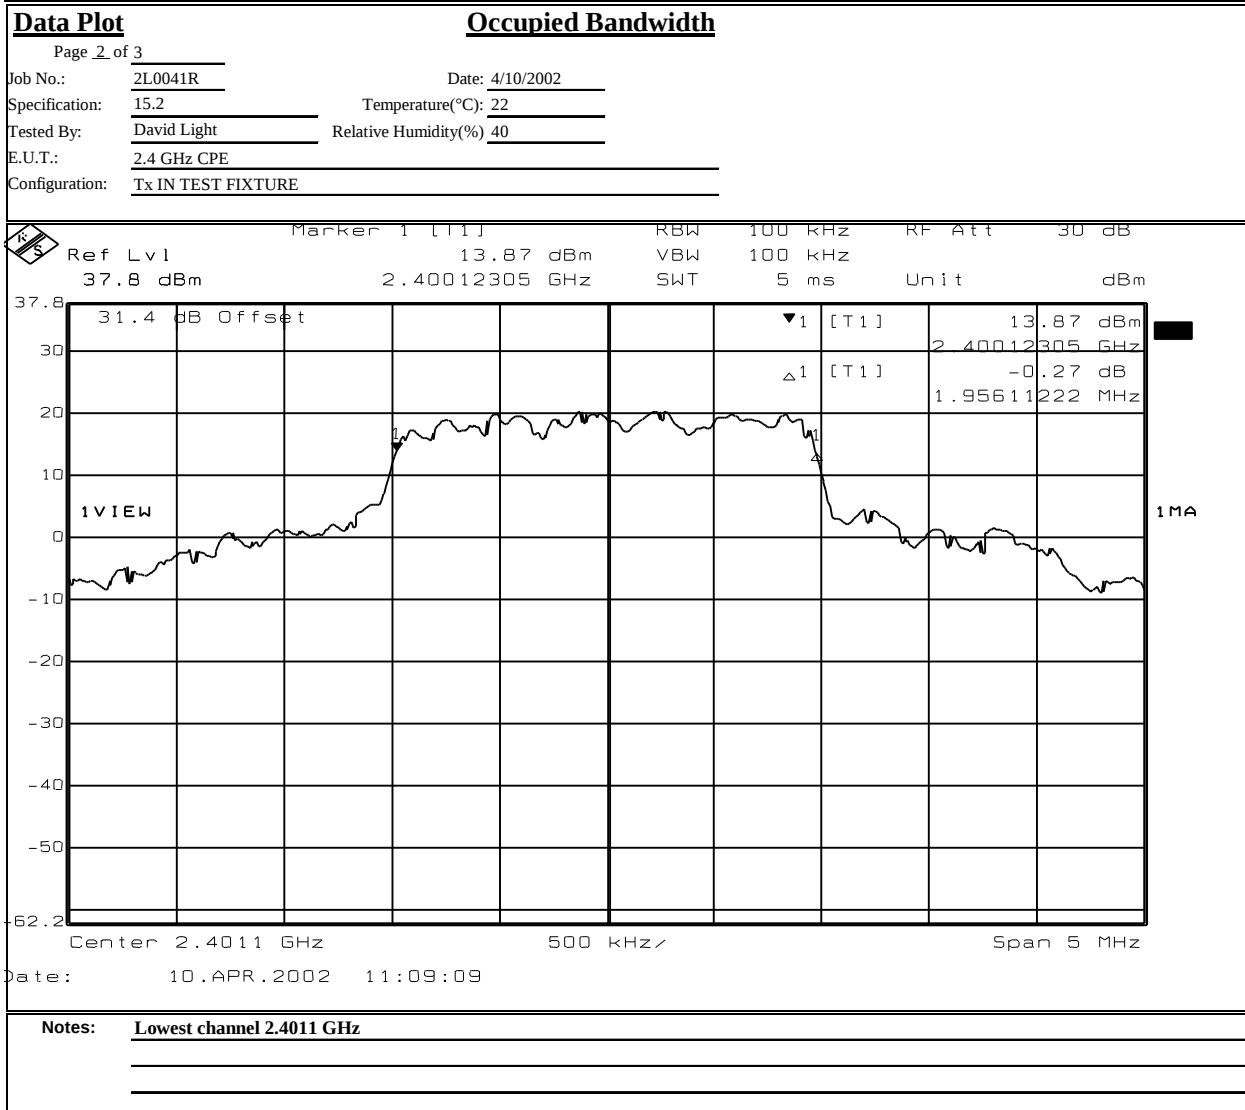

Test Data – 6 dB Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 3 of 3

Job No.: 2L0041R Date: 4/10/2002
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 40
E.U.T.: 2.4 GHz CPE
Configuration: Tx IN TEST FIXTURE

Occupied Bandwidth

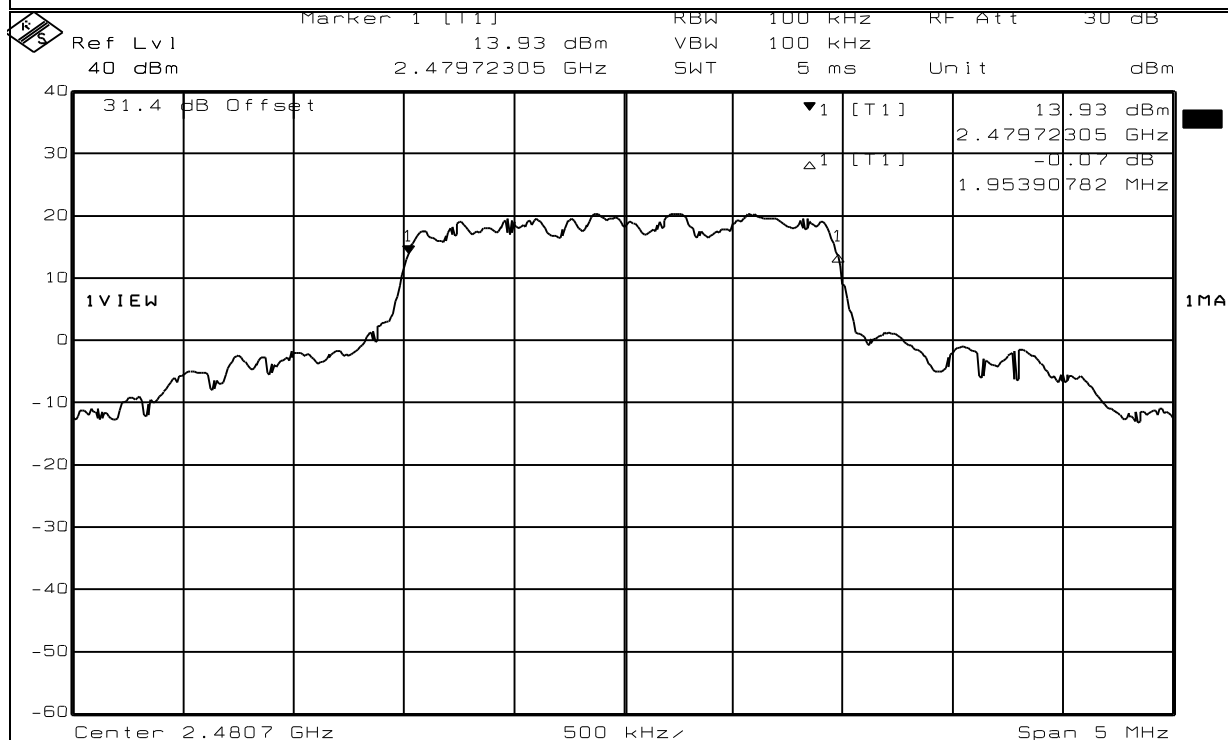

Date: 10.APR.2002 11:14:30

Notes: Highest channel 2.4807 GHz

Section 5. Maximum Peak Output Power

NAME OF TEST: Maximum Peak Output power	PARA. NO.: 15.247(b)(1)
TESTED BY: David Light	DATE: 04/10/2002

Test Results: Complies.

Measurement Data:

Channel	Freq (GHz)	Measurement (dBm)	Measurement (Watts)
High	2.4785	28.3	0.676
Mid	2.4400	28.3	0.676
Low	2.4011	28.3	0.676

Note – AC supply voltage was varied +/- 15% with no effect on output power

Equipment Used: 1036-1469-1926
Anaren 20 dB directional coupler Model 1C0870-20 (0.5-4.0 GHz)

Measurement Uncertainty: +/- 0.67 dB

Temperature: 22 °C

Relative Humidity: 40 %

Section 6. RF Exposure

NAME OF TEST: RF Exposure	PARA. NO.: 15.247(b)(4)
TESTED BY:	DATE:

Test Results: Complies.

Measurement Data: See attached data sheet.

FCC ID: PL6-ISM-CPE-R1

Prediction of MPE Limit

OET Bulletin 65, Edition 97-01

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

S= power density
P= power input to the antenna
G= power gain of the antenna in the direction of interest relative to an isotropic radiator
R= distance to the center of radiation of the antenna

Choose

↓

Occupational/Controlled -(BTS) ☐

General Population/Uncontrolled -(CPE) ☒

ENTER

↓

Tx Frequency: 2400.00 (MHz)

Maximum Peak Power at Antenna Input Terminal: 28.30 (dBm)

Antenna gain (typical) of highest gain antenna (Patch): 7.00 (dBi)

S= 1.00 (mW/cm²)

P= 676.08 (mW)

G= 5.01 (numeric)

R = 16.42 (cm)

NOTE: The following warning must appear in the installation manual.

CAUTION:

This device is a radio frequency transmitter. It is required to comply with FCC RF exposure requirements for mobile transmitting devices. A minimum separation distance of **20.00** cm or more must be maintained between the antenna and all persons during device operations to ensure compliance with the FCC's rules for Radio Frequency Exposure. If this minimum distance cannot be maintained, exposure to RF levels that exceed the FCC's limits may result.

Section 7. Spurious Emissions (conducted)

NAME OF TEST: Spurious Emissions (conducted)	PARA. NO.: 15.247(c)
TESTED BY: David Light	DATE: 4/10/2002

Test Results: Complies.

Measurement Data: See attached plots.

Measurement Uncertainty: +/- 0.7 dB

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Spurious Emissions at Antenna Terminals	
Page 1 of 3		Complete <u>X</u>	
Job No.: 2L0041R	Date: 4/10/2002	Preliminary: _____	
Specification: 15.247	Temperature(°C): 22		
Tested By: David Light	Relative Humidity(%): 40		
E.U.T.: 2.4 GHz CPE			
Configuration: Tx IN TEST FIXTURE			
Sample Number: 1			
Location: Lab 2	RBW: 100 kHz	Measurement	
Detector Type: Peak	VBW: 100 kHz	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: 1629		
Filter: _____	Cable #2: _____		
Receiver: 1036	Cable #3: _____		
Attenuator #1: 1469	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: Anaren 20 dB Directional coupler Model 1C0872-20, 0.5-4.0 GHz			
Measurement Uncertainty: +/-1.7 dB			
Ref Lvl 27.8 dBm Marker 1 [T1] 19.49 dBm 2.44000000 GHz RBW 100 kHz VBW 100 kHz SWT 6.4 s Unit dBm Center 12.515 GHz 2.497 GHz Span 24.97 GHz Date: 10.APR.2002 10:33:00			
Notes: Mid Channel - 2.4400 GHz Display line indicates -20 dBc Marker indicates Carrier			


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

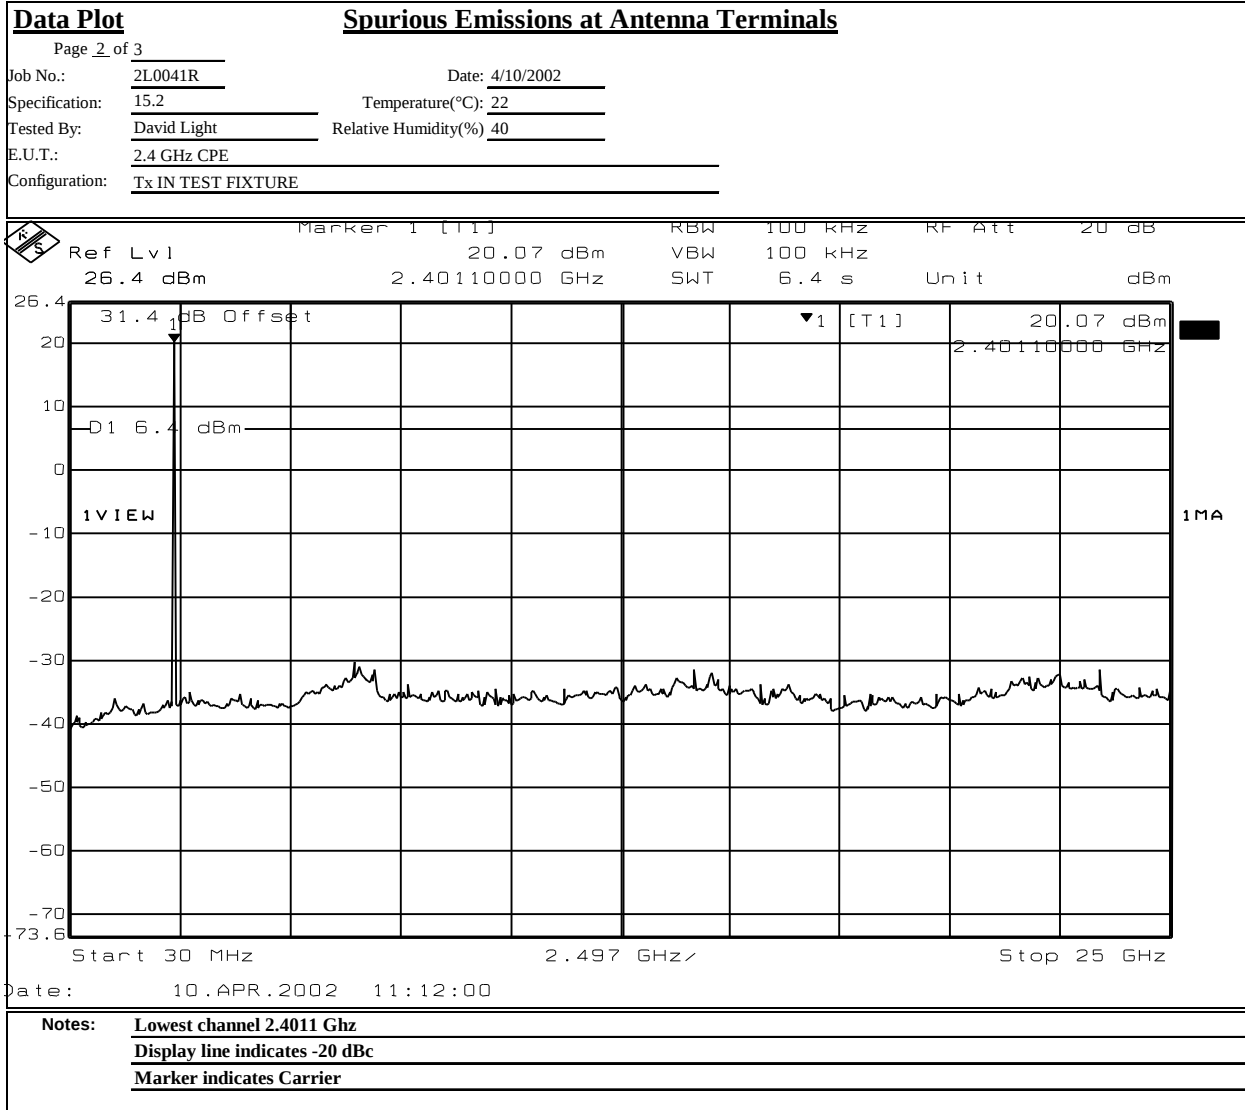


Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.


Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

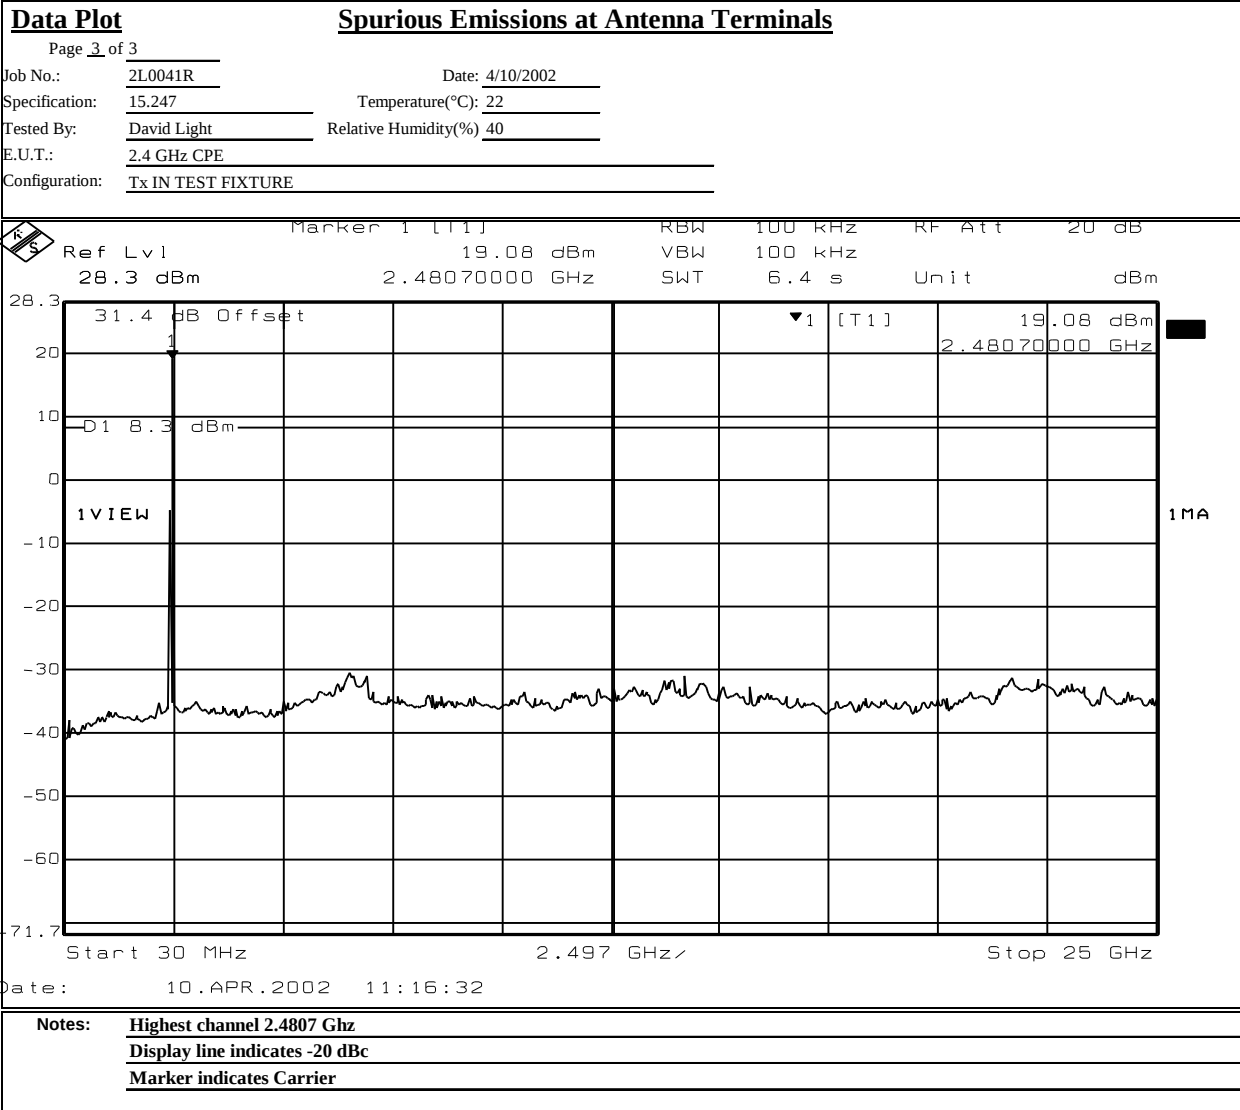

Test Data – Spurious Emissions at Antenna Terminals

 Delta 1 [T1] RBW 100 kHz RF Att 0 dB
Ref Lvl 22.44 dB VBW 100 kHz Mixer -10 dBm
26.3 dBm 631.26252505 kHz SWT 5 ms Unit dBm

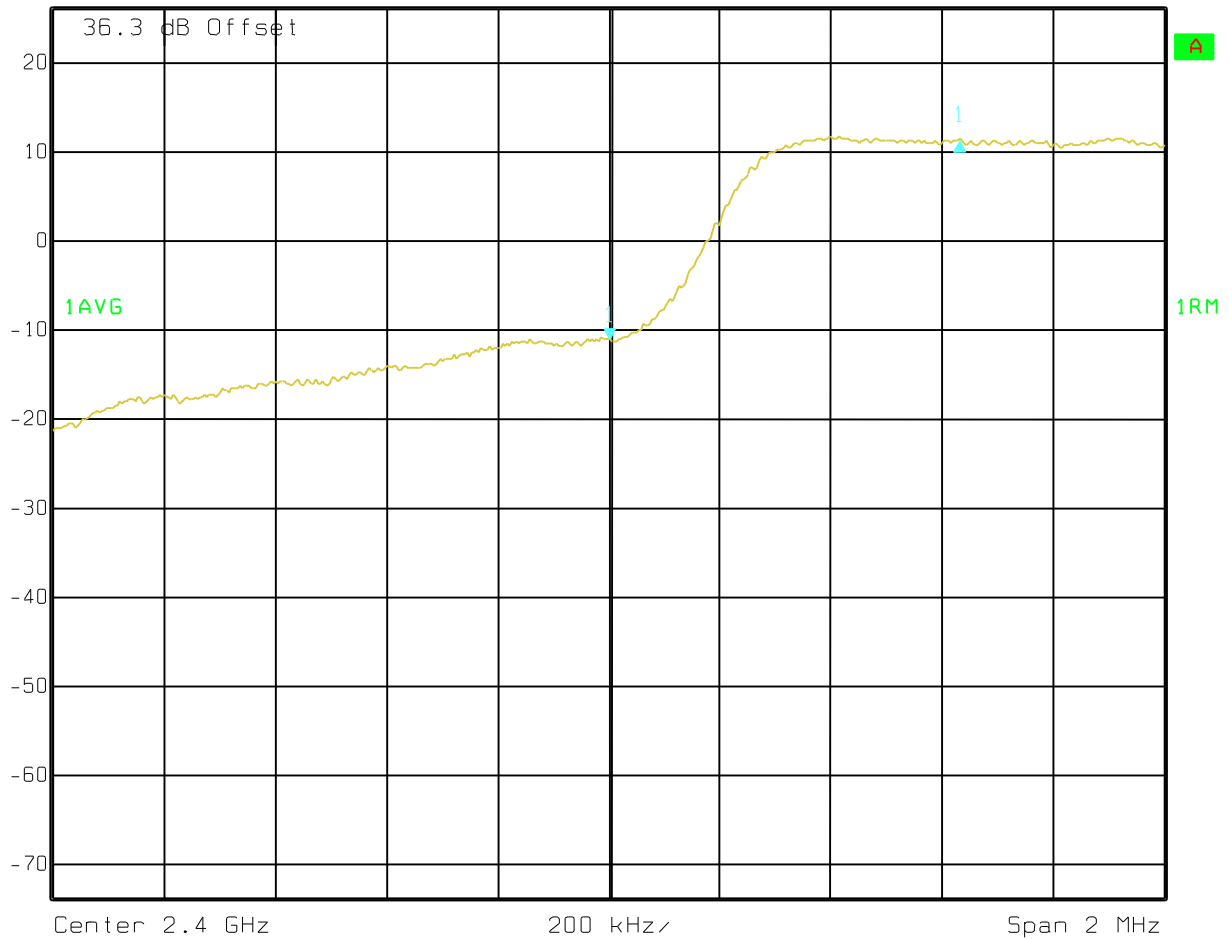

Date: 28.AUG.2002 10:39:36

Center of TX channel is 2.4012 GHz

Section 8. Spurious Emissions (radiated)

NAME OF TEST: Spurious Emissions (radiated)	PARA. NO.: 15.247 (c)
TESTED BY: David Light	DATE:4/9/2002

Test Results: Complies.

Measurement Data: See attached table.

NOTE: Where the measured peak value of an emission was found to be below the average limit, an average measurement was not taken.

Duty Cycle Calculation:

Duty Cycle correction factor(dB) = $20 \log (rf_{ON} \text{ in ms}/100\text{ms})$

The transceiver was tested in CW mode for test purposes. In normal operation the transmitter is in TDD mode (50 ms transmit, 50 ms receive). The duty cycle factor for average measurements is – 6dB. The 6 dB correction factor was only used when measuring compliance at the band edge.

Measurement Uncertainty: +/- 0.7 dB

Test Data – Radiated Spurious Emissions (Restricted Bands)



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy

Lewisville, TX 75057

Tel: (972) 436-9600

Fax: (972) 436-2667

Radiated Emissions								
Page 1 of 3								
Job No.:		Date: 4/9/02						
Specification:		Temperature(°C): 22						
Tested By: David Light		Relative Humidity(%) 40						
E.U.T.:		2.4 GHz CPE						
Configuration:		TYPICAL / Tx Full Power						
Sample Number: 1								
Location: AC 3		RBW: 1 MHz						
Detector Type: Peak		VBW: 1 MHz						
Test Equipment Used								
Antenna: #N/A		Directional Coupler: #N/A						
Pre-Amp: 1016		Cable #1: 1484						
Filter: 1482		Cable #2: 1485						
Receiver: 1464		Cable #3: #N/A						
Attenuator #1: #N/A		Cable #4: #N/A						
Attenuator #2: #N/A		Mixer: #N/A						
Anaron 20 dB directional coupler Model 1C0870-20 (0.5-4.0 GHz)								
Measurement Uncertainty: +/-3.6 dB								
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
Tx @ 2.480 GHz								
4.960	48.5	33.9	4.3	33.5	53.2	74	-20.8	Patch 0 - Vertical Peak
4.960	37.5	33.9	4.3	33.5	42.2	54	-11.8	Average
7.440	41.3	36.3	5.3	33	49.9	54	-4.1	Peak
12.400	40.2	39.9	7.3	34.7	52.7	54	-1.3	Peak
Patch 0 - Horizontal								
4.960	44.5	33.9	4.3	33.5	49.2	54	-4.8	Peak
7.440	42.3	36.3	5.3	33	50.9	54	-3.1	Peak
12.400	40.2	39.9	7.3	34.7	52.7	54	-1.3	Peak
Patch 1 - Vertical								
4.960	45.5	33.9	4.3	33.5	50.2	54	-3.8	Peak
7.440	42.2	36.3	5.3	33	50.8	54	-3.2	Peak
12.400	40.8	39.9	7.3	34.7	53.3	54	-0.7	Peak
Patch 1 - Horizontal								
4.960	46.3	33.9	4.3	33.5	51.0	54	-3.0	Peak
7.440	41.8	36.3	5.3	33	50.4	54	-3.6	Peak
12.400	40.8	39.9	7.3	34.7	53.3	54	-0.7	Peak
Omni - Vertical								
4.960	50.5	33.9	4.3	33.5	55.2	74	-18.8	Peak
4.960	39.2	33.9	4.3	33.5	43.9	54	-10.1	Average
7.440	42	36.3	5.3	33	50.6	54	-3.4	Peak
12.400	40.8	39.9	7.3	34.7	53.3	54	-0.7	Peak
Omni - Horizontal								
4.960	45.2	33.9	4.3	33.5	49.9	54	-4.1	Peak
7.440	42	36.3	5.3	33	50.6	54	-3.4	Peak
12.400	40.8	39.9	7.3	34.7	53.3	54	-0.7	Peak
Notes:								

Test Data – Radiated Spurious Emissions (Restricted Bands)



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Radiated Spurious Emissions								
Page 1 of		Continuation Page						
Job No.:		Date: 4/10/02						
Specification: CFR 47, Part 15		Temperature(°F): 72						
Tested By: #N/A		Relative Humidity(%) 50						
E.U.T.:		2.4 GHz CPE						
Configuration:		TYPICAL / Tx Full Power						
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
Tx @ 2.44 Ghz								Patch 0 - Vertical
4.880	51.7	33.9	4.3	33.5	56.4	74	-17.6	Peak
4.880	43.2	33.9	4.3	33.5	47.9	54	-6.1	Average
7.320	38.2	36.3	5.3	33	46.8	54	-7.2	Peak
12.200	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
								Patch 0 - Horizontal
4.880	45	33.9	4.3	33.5	49.7	54	-4.3	Peak
7.320	38.2	36.3	5.3	33	46.8	54	-7.2	Peak
12.200	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
								Patch 1 - Vertical
4.880	46	33.9	4.3	33.5	50.7	54	-3.3	Peak
7.320	38.2	36.3	5.3	33	46.8	54	-7.2	Peak
12.200	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
								Patch 1 - Horizontal
4.880	43.3	33.9	4.3	33.5	48.0	54	-6.0	Peak
7.320	38.2	36.3	5.3	33	46.8	54	-7.2	Peak
12.200	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
								Omni - Vertical
4.880	48	33.9	4.3	33.5	52.7	74	-21.3	Peak
4.880	32.7	33.9	4.3	33.5	37.4	54	-16.6	Average
7.320	38.2	36.3	5.3	33	46.8	54	-7.2	Peak
12.200	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
								Omni - Horizontal
4.880	45.3	33.9	4.3	33.5	50.0	54	-4.0	Peak
7.320	38.2	36.3	5.3	33	46.8	54	-7.2	Peak
12.200	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Notes:								

Test Data – Radiated Spurious Emissions (Restricted Bands)



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Radiated Spurious Emissions								
Continuation Page								
Page 3 of 3								
Job No.:	2L0041R		Date: 4/9/02					
Specification:	CFR 47, Part 15		Temperature(°C): 22					
Tested By:	David Light		Relative Humidity(%) 40					
E.U.T.:	2.4 GHz CPE							
Configuration:	TYPICAL / Tx Full Power							
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
Tx @ 2.412 Ghz								Patch 0 - Vertical
4.824	45	33.9	4.3	33.5	49.7	54	-4.3	Peak
7.236	38	36.3	5.3	33	46.6	54	-7.4	Peak
12.060	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Patch 0 - Horizontal								
4.824	46.3	33.9	4.3	33.5	51.0	54	-3.0	Peak
7.236	38	36.3	5.3	33	46.6	54	-7.4	Peak
12.060	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Patch 1 - Vertical								
4.824	45.3	33.9	4.3	33.5	50.0	54	-4.0	Peak
7.236	38	36.3	5.3	33	46.6	54	-7.4	Peak
12.060	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Patch 1 - Horizontal								
4.824	41	33.9	4.3	33.5	45.7	54	-8.3	Peak
7.236	38	36.3	5.3	33	46.6	54	-7.4	Peak
12.060	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Omni - Vertical								
4.824	45.8	33.9	4.3	33.5	50.5	74	-23.5	Peak
7.236	38	36.3	5.3	33	46.6	54	-7.4	Peak
12.060	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Omni - Horizontal								
4.824	40	33.9	4.3	33.5	44.7	54	-9.3	Peak
7.236	38	36.3	5.3	33	46.6	54	-7.4	Peak
12.060	41	39.9	7.3	34.7	53.5	54	-0.5	Peak
Tx @ 2.480 Ghz								Vertical
2.4835	62.5	28.2	3.1	33.8	60.0	74	-14.0	Patch 0 - Peak
2.4835	52	28.2	3.1	33.8	49.5	54	-4.5	Patch 0 - Average
2.4835	41.7	28.2	3.1	33.8	39.2	74	-34.8	Patch 1 - Peak
2.4835	32.3	28.2	3.1	33.8	29.8	54	-24.2	Patch 1 - Average
2.4835	65.7	28.2	3.1	33.8	63.2	74	-10.8	Omni - Peak
2.4835	54.8	28.2	3.1	33.8	52.3	54	-1.7	Omni - Average
Horizontal								
2.4835	52.7	28.2	3.1	33.8	50.2	74	-23.8	Patch 0 - Peak
2.4835	42.5	28.2	3.1	33.8	40.0	54	-14.0	Patch 0 - Average
2.4835	34	28.2	3.1	33.8	31.5	74	-42.5	Patch 1 - Peak
2.4835	26	28.2	3.1	33.8	23.5	54	-30.5	Patch 1 - Average
2.4835	58	28.2	3.1	33.8	55.5	74	-18.5	Omni - Peak
2.4835	48	28.2	3.1	33.8	45.5	54	-8.5	Omni - Average
Notes: Used -6 dB correction at bandedge only								

Radiated Photographs (Worst Case Configuration)

Front



Rear



Section 9. Peak Power Spectral Density

NAME OF TEST: Peak Power Spectral Density	PARA. NO.: 15.247(d)
TESTED BY: David Light	DATE: 4/10/2002

Test Results: Complies.

Measurement Data: See attached plots.

Measurement Uncertainty: +/- 1.7 dB

Test Data – Peak Power Spectral Density



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Peak Power Spectral Density	
Page <u>1</u> of <u>3</u>			
Job No.: 2L0041R	Date: 4/10/2002	Complete: <u>X</u>	
Specification: 15.247	Temperature(°C): 22	Preliminary: _____	
Tested By: David Light	Relative Humidity(%): 40		
E.U.T.: 2.4 GHz CPE			
Configuration: Tx IN TEST FIXTURE			
Sample Number: 1			
Location: Lab 2	RBW: 3 kHz	Measurement	
Detector Type: Peak	VBW: 3 kHz	Distance: <u>N/A</u> m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: 1629		
Filter: _____	Cable #2: _____		
Receiver: 1036	Cable #3: _____		
Attenuator #1: 1469	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: Anaren 20 dB directional coupler Model 1C0870-20 (0.5-4.0 GHz)			
Measurement Uncertainty: +/-1.7 dB			
Date: 10.APR.2002 09:32:20 Notes: <u>HIGHEST CHANNEL</u>			


Test Data – Peak Power Spectral Density



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

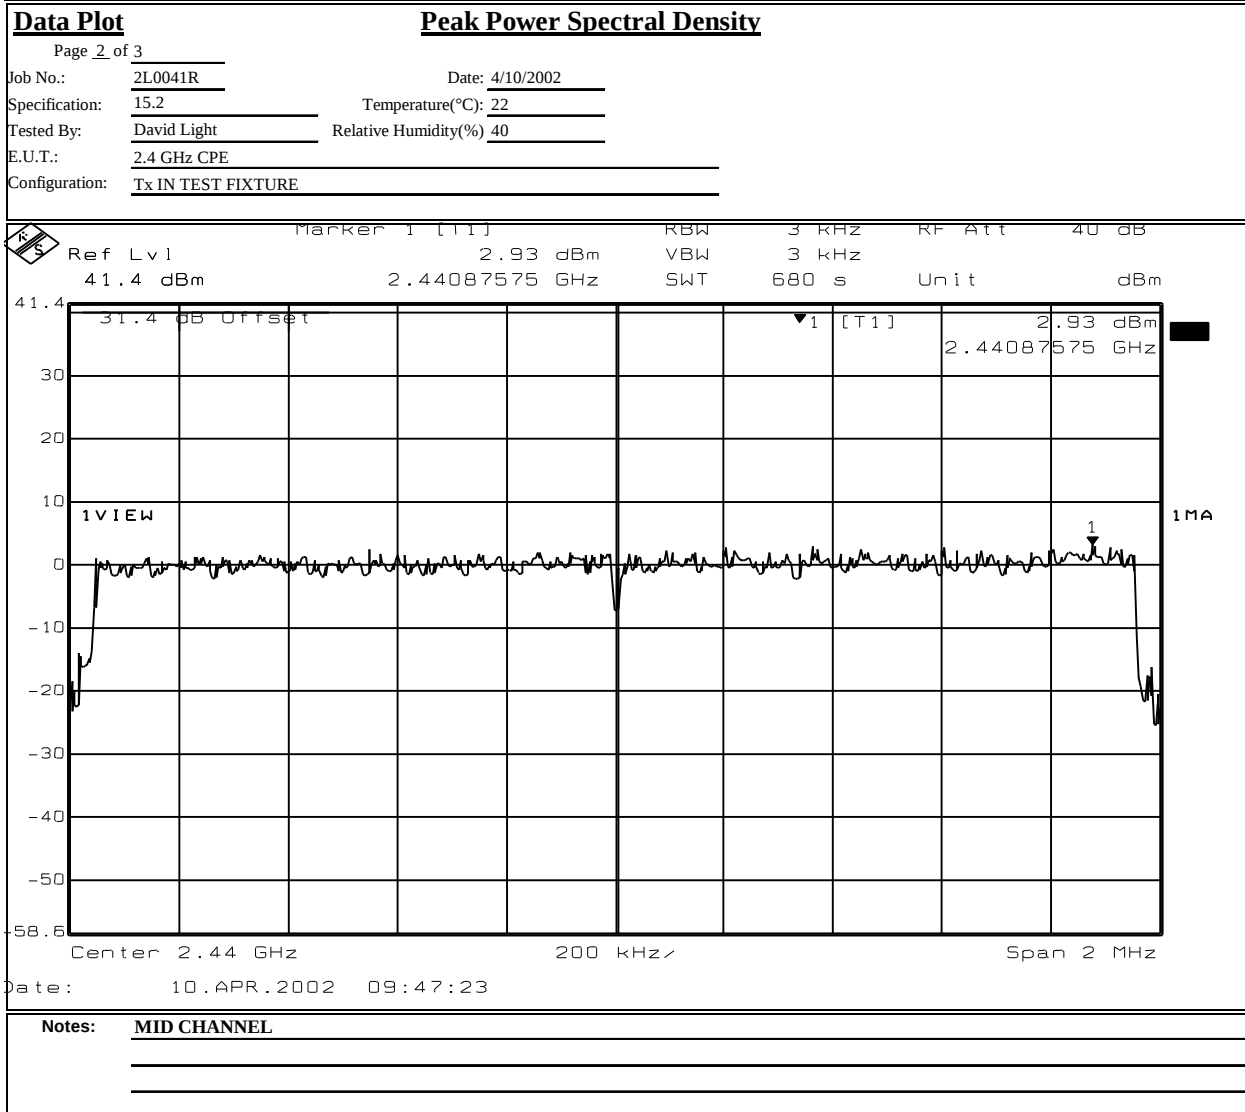


Test Data – Peak Power Spectral Density



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

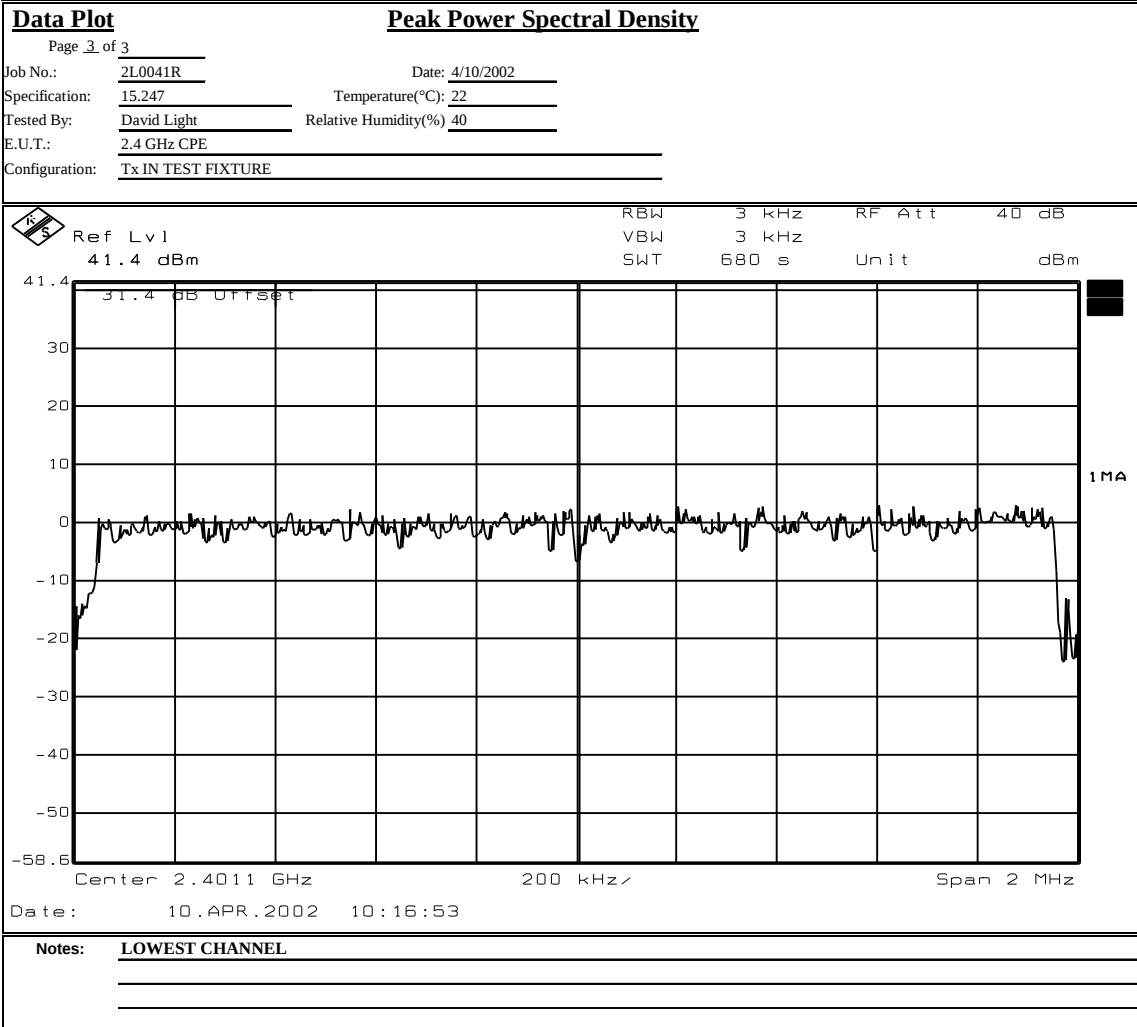

Section 10. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date
1555	Filter high pass 5KHz	Solar Electronics 7930-5.0	933125	06/06/02
1258	LISN .15mhz-30mhz	EMCO 0	1305	07/09/02
1534	CABLE, 9M	KTL RG223	NA	06/13/01
1038	CABLE, .5m	KTL RG223	N/A	06/06/02
674	LIMITER	HP 11947A	3107A02200	11/04/00
1469	10 db Attenuator DC 18 Ghz	MCL Inc. BW-S10W2 10db-2WDC	NONE	CBU
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	12/18/01 2 yr cal
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/02/01
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	06/01/01
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	06/01/01
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/30/01
1482	Band Pass Filter	K & L 11SH10-4000/T12000-0/0	2	Cal B4 Use
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	07/30/01
Prop of Navini	20 dB Directional coupler 0.5-4 GHz	Aneren 1C0870-20	None	CBU

ANNEX A - TEST DETAILS

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
---	----------------------

Minimum Standard:

The R.F. that is conducted back onto the AC power line on any frequency within the band 0.45 to 30 MHz shall not exceed 250 μ V (48 dB μ V) across 50 ohms.

Nemko Dallas

FCC PART 15, SUBPART C

DIRECT SEQUENCE SPREAD SPECTRUM TRANSMITTER

EQUIPMENT: 2.4 GHz CPE, Release 1

PROJECT NO.: 2L0041RUS6

NAME OF TEST: Minimum 6 dB bandwidth	PARA. NO.: 15.247(a)(2)
--------------------------------------	-------------------------

Minimum Standard:

The minimum 6 dB bandwidth shall be at least 500 kHz

NAME OF TEST: Maximum Peak Output Power

PARA. NO.: 15.247(b)(1)

Minimum Standard:

The maximum peak output power shall not exceed 1 watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

Calculation Of EIRP For Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

The RBW of the spectrum analyzer shall be set to a value greater than the measured 6 dB occupied bandwidth of the E.U.T.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: RF Exposure	PARA. NO.: 15.247(b)(4)
---------------------------	-------------------------

Minimum Standard:

Systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines stipulated in 1.1307(b)(1) of CFR 47.

NAME OF TEST: Spurious Emissions(conducted)

PARA. NO.: 15.247(c)

Minimum Standard:

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (mV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM IS SEARCHED TO THE 10th HARMONIC OF THE HIGHEST FREQUENCY GENERATED IN THE EUT.

Method Of Measurement:

30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ: Peak of highest spurious level below center frequency.

Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ: Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard:

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (mV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Transmitter Power Density

PARA. NO.: 15.247(d)

Minimum Standard: The transmitted power density averaged over any 1 second interval shall not be greater than +8 dBm in any 3 kHz bandwidth.

Method Of Measurement: The spectrum analyzer is set as follows:

RBW: 3 kHz

VBW: >3 kHz

Span: => measured 6 dB bandwidth

Sweep: Span(kHz)/3 (i.e. for a span of 1.5 MHz the sweep rate is $1500/3 = 500$ sec.

LOG dB/div.: 2 dB

Note: For devices with spectrum line spacing ≤ 3 kHz, the RBW of the analyzer is reduced until the spectral lines are resolved. The measurement data is normalized to 3 kHz by summing the power of all the individual spectral lines within a 3 kHz band in linear power units.

For Devices With Integral Antenna:


For devices with non-detachable antennas, the received field strength is peaked and the spectrum analyzer is set as above. The peak emission level is then measured and converted to a field strength by adding the appropriate antenna factor and cable loss. This field strength is then converted to an equivalent isotropic radiated power using the same method as described for Peak Power output.

Number of channels tested:


Tuning Range	Number Of Channels Tested	Channel Location In Band
1 MHz or Less	1	Middle
1 to 10 MHz	2	Top And Bottom
More Than 10 MHz	3	Top, Middle, Bottom

ANNEX B - TEST DIAGRAMS


Test Site For Radiated Emissions

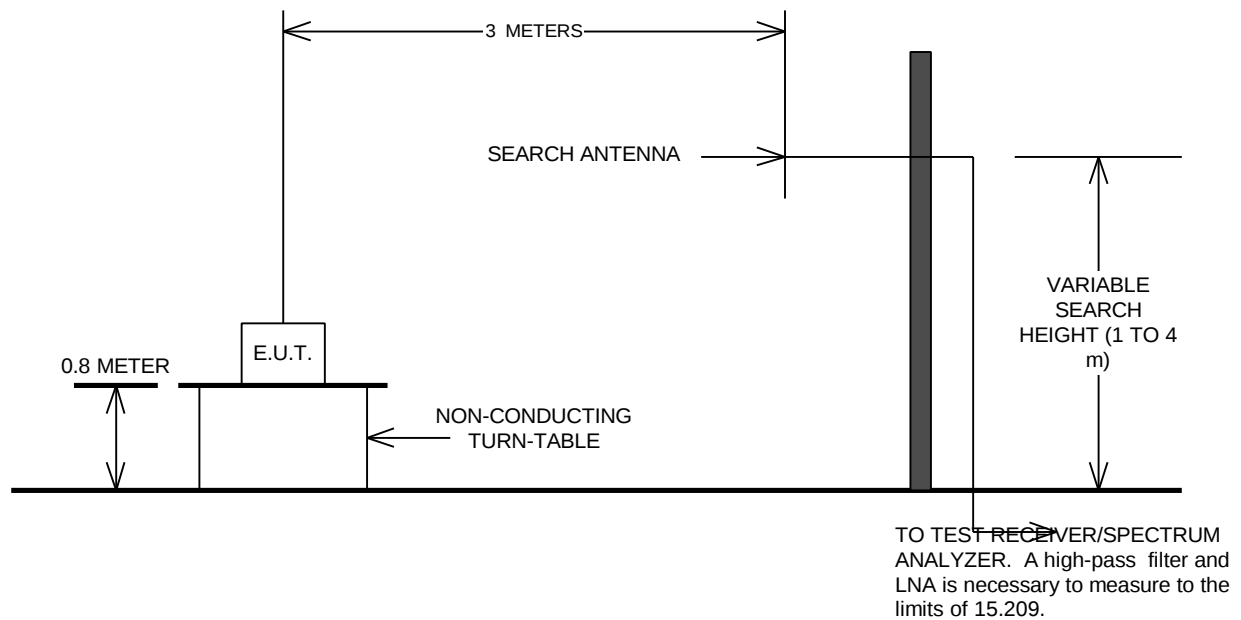

Conducted Emissions

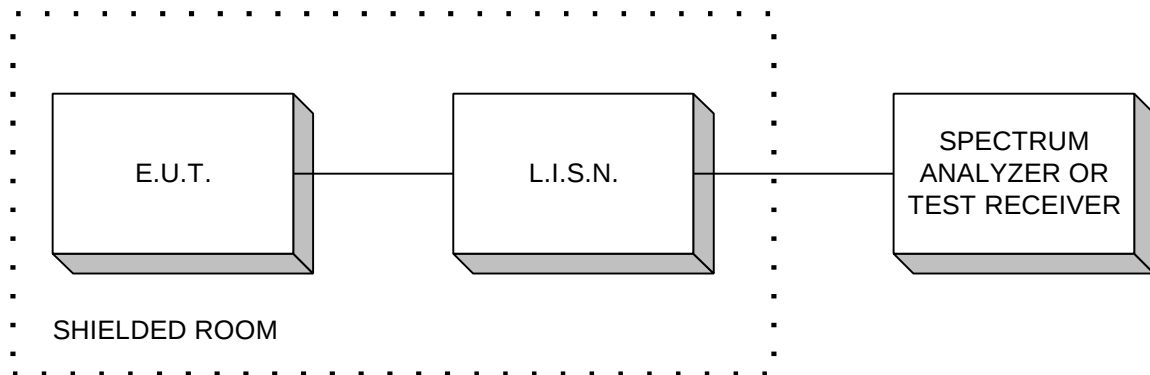

Peak Power At Antenna Terminals

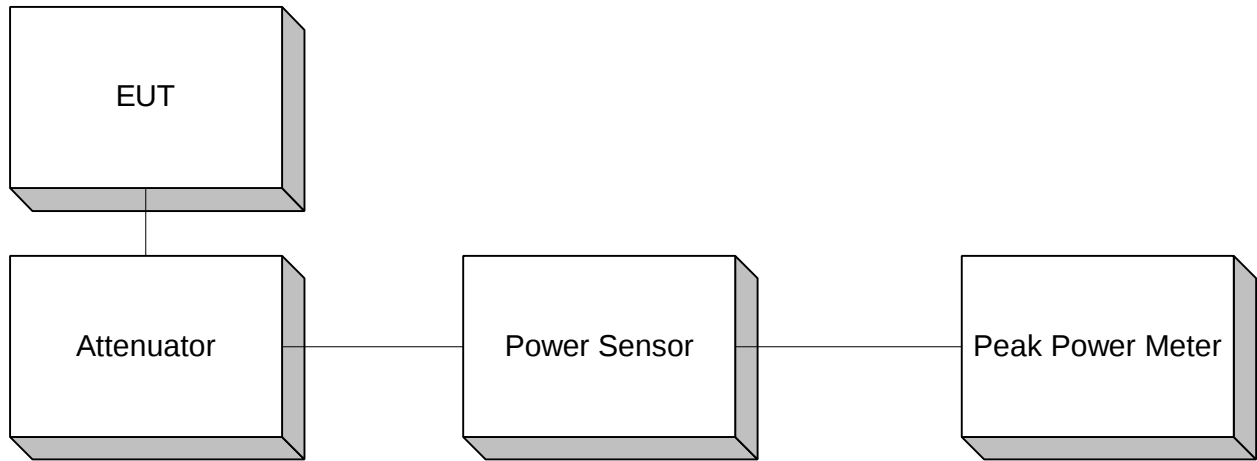

**Minimum 6 dB Bandwidth
Peak Power Spectral Density
Spurious Emissions (conducted)**

