



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5863

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 1(802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:20:07

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

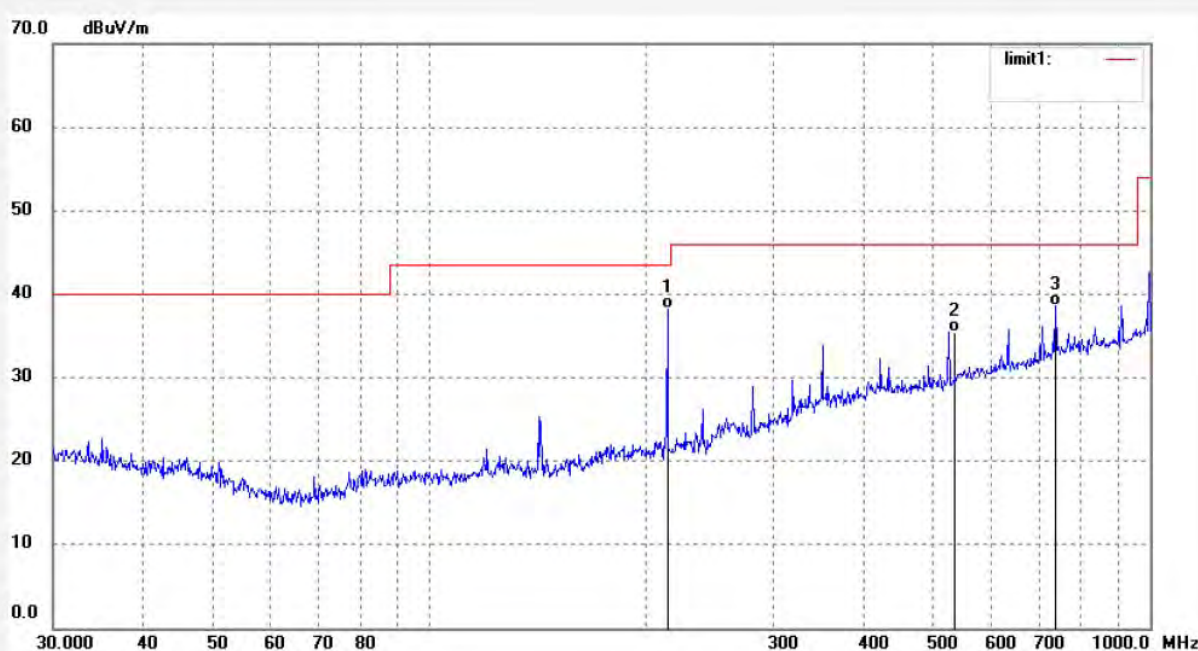

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	21.75	16.47	38.22	43.50	-5.28	QP			
2	533.3000	10.92	24.47	35.39	46.00	-10.61	QP			
3	740.0000	11.01	27.51	38.52	46.00	-7.48	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5862

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 1(802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:15:41

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

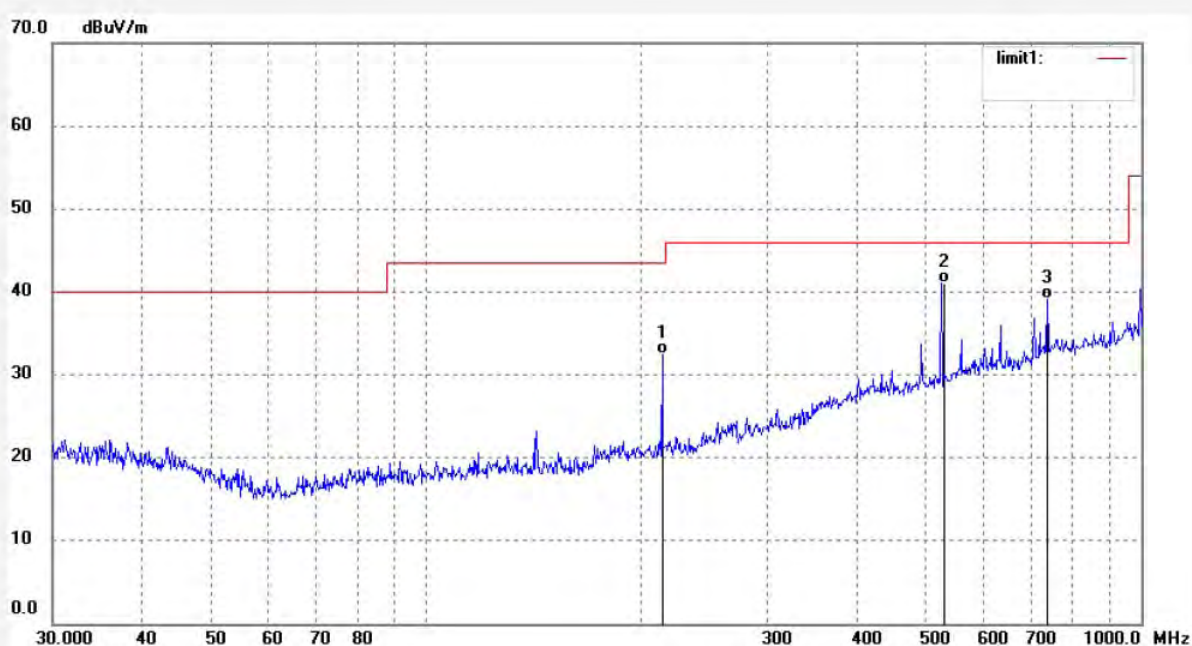

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	15.90	16.48	32.38	43.50	-11.12	QP			
2	533.3000	16.64	24.47	41.11	46.00	-4.89	QP			
3	740.0000	11.52	27.51	39.03	46.00	-6.97	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2574

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 1 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:05:30

Engineer Signature: Bob

Distance: 3m

Note: Report No.: ATE20121979

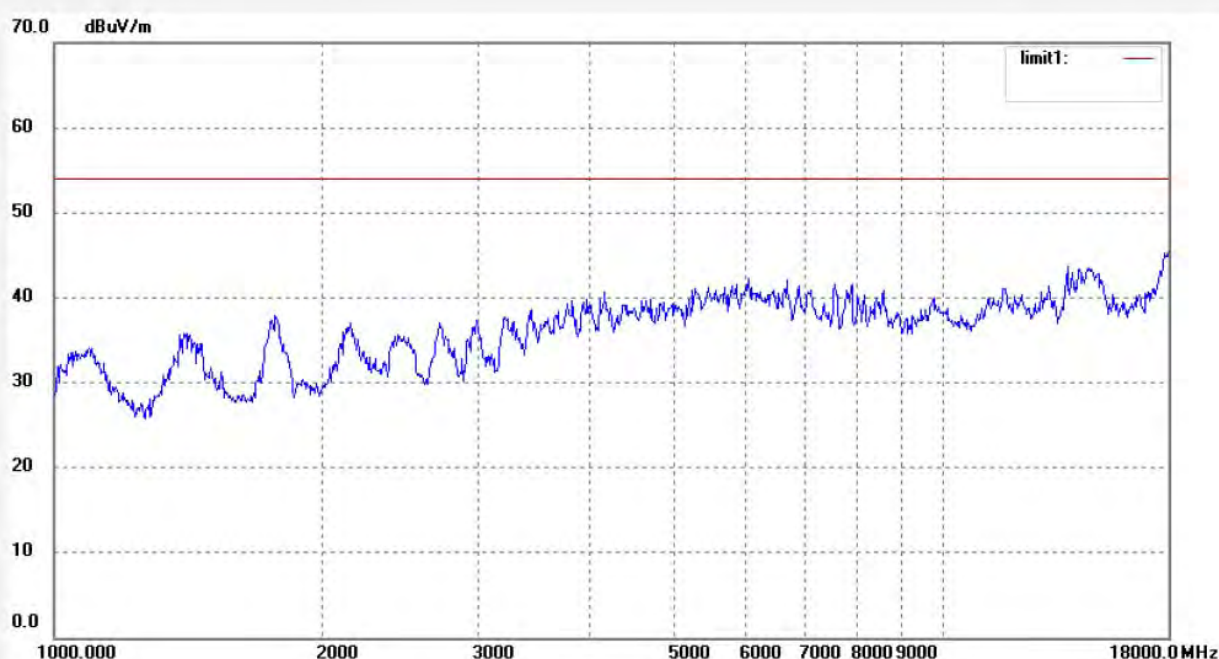

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #2573

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 1 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:01:35

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

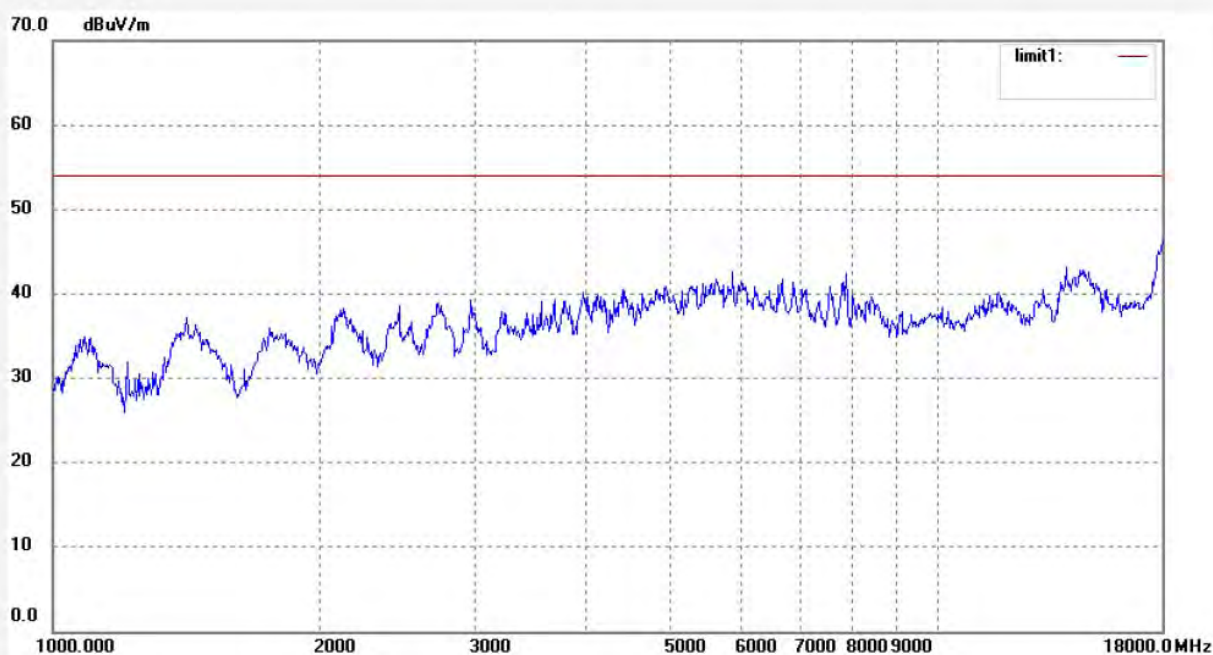

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1608

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 1 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:35:56

Engineer Signature: Bob

Distance: 3m

Note: Report No.: ATE20121979

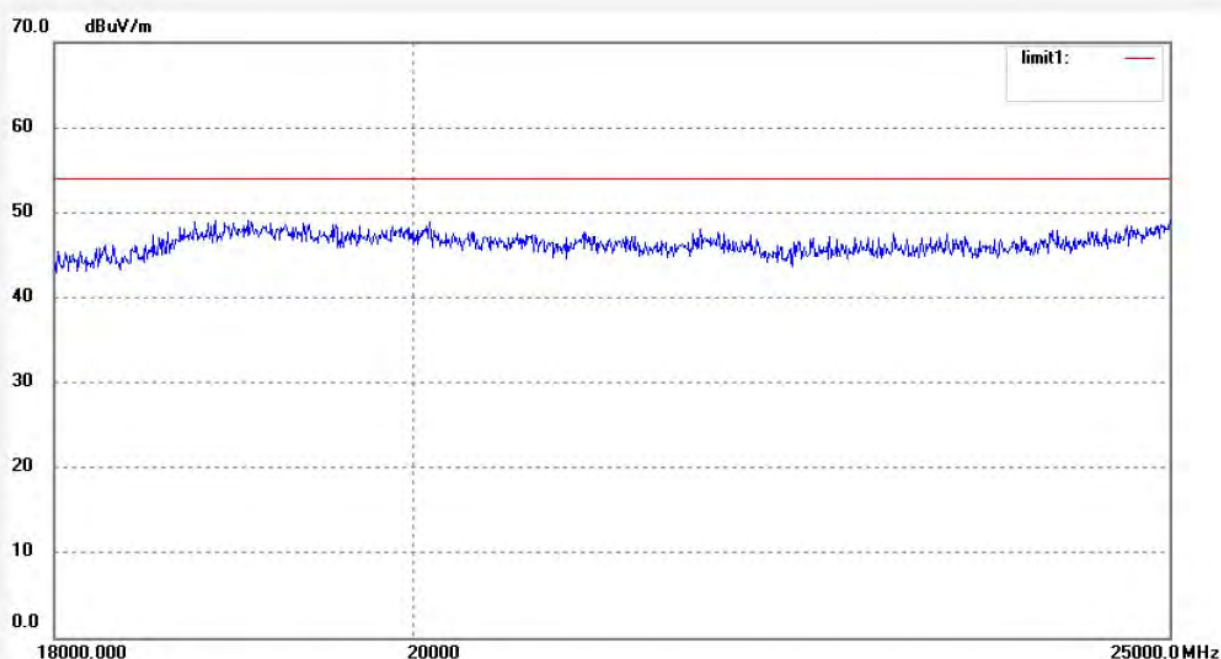

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1607

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 1 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:32:05

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

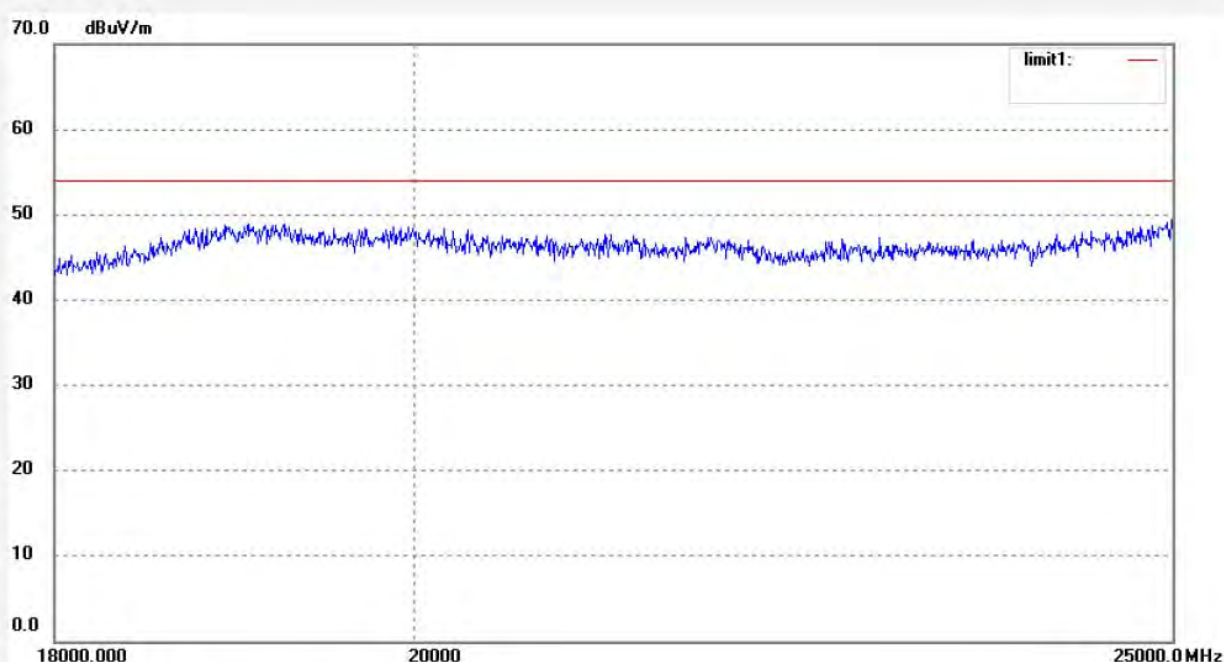

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5864

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:24:02

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

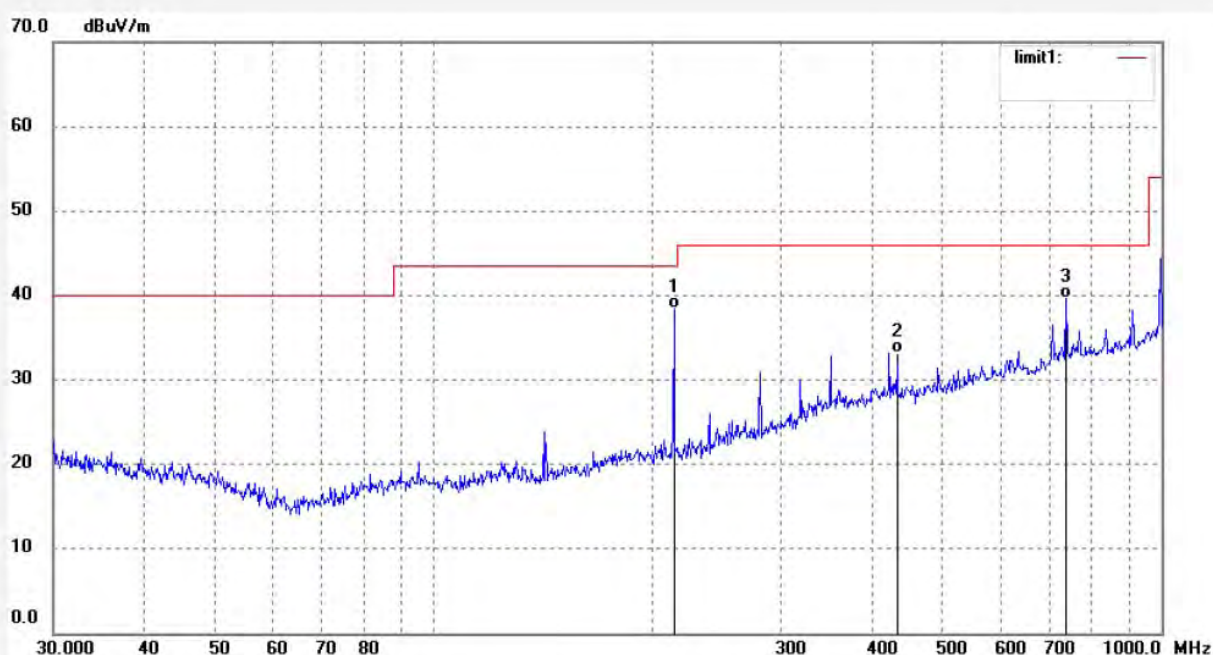

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	21.88	16.47	38.35	43.50	-5.15	QP			
2	433.3000	10.19	22.95	33.14	46.00	-12.86	QP			
3	740.0000	12.09	27.51	39.60	46.00	-6.40	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5865

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:29:04

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

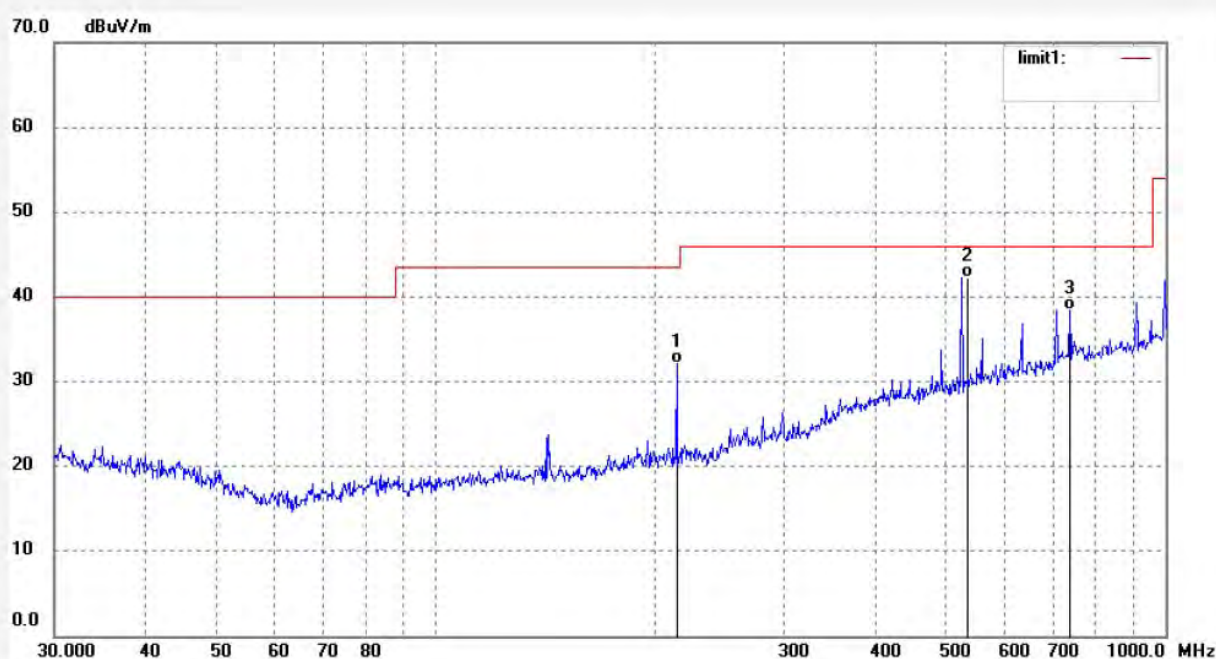

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	15.68	16.48	32.16	43.50	-11.34	QP			
2	533.3000	17.76	24.47	42.23	46.00	-3.77	QP			
3	740.0000	10.91	27.51	38.42	46.00	-7.58	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2575

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:09:47

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

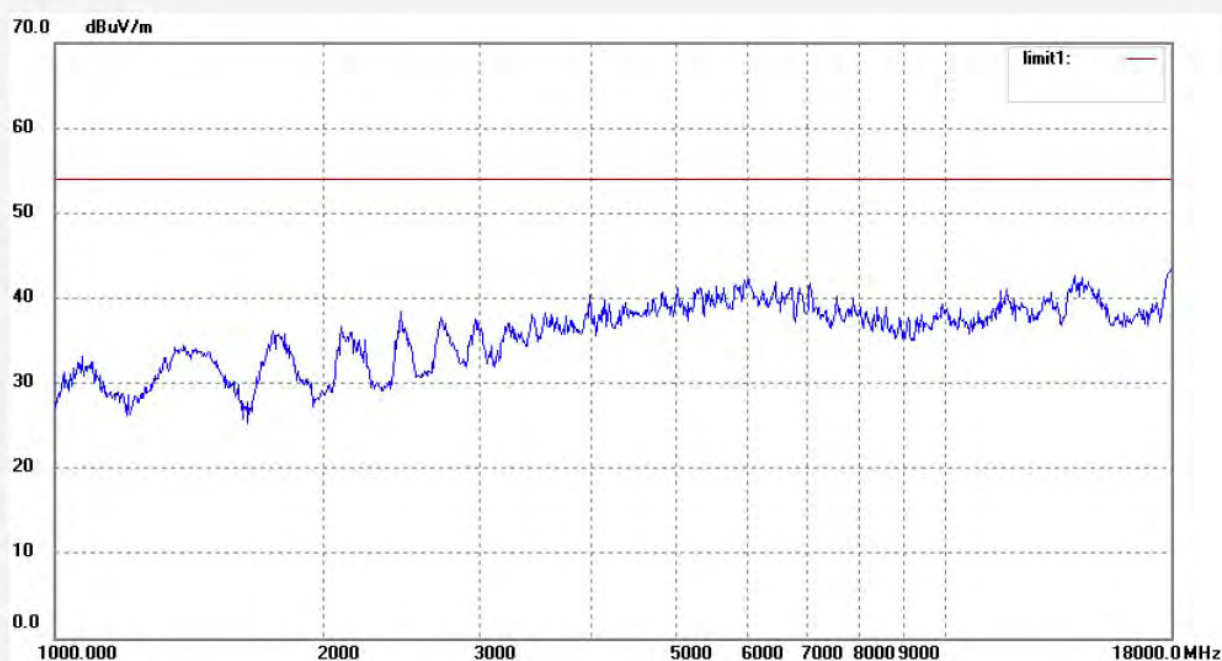

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2576

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:13:30

Engineer Signature: Bob

Distance: 3m

Note: Report No.: ATE20121979

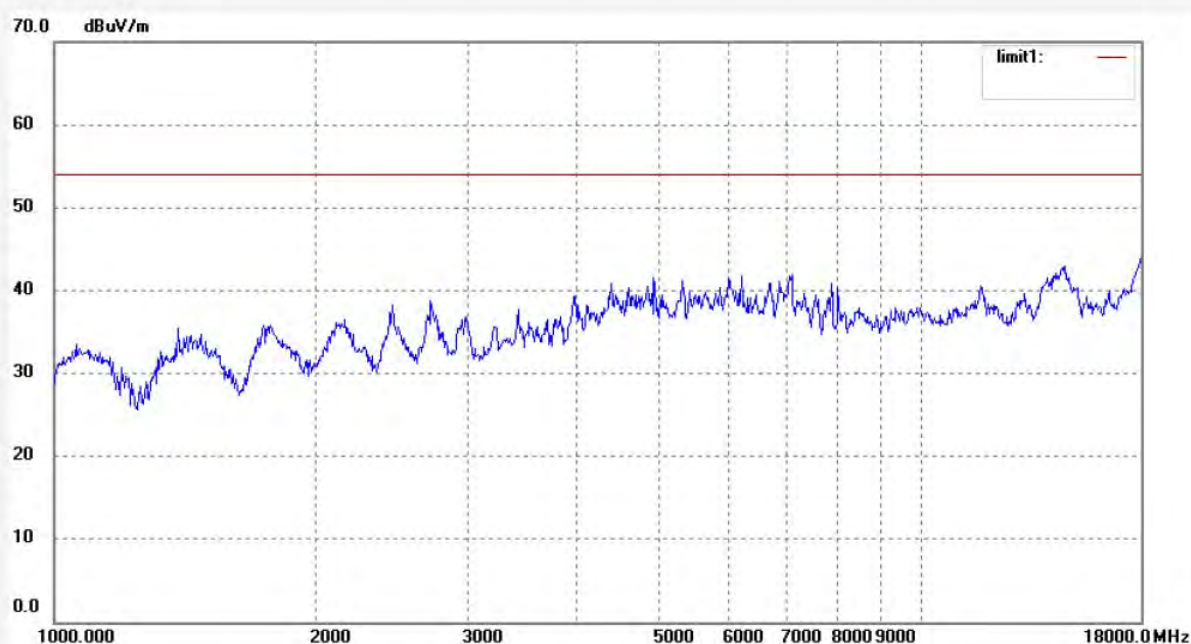

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1609

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:38:38

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

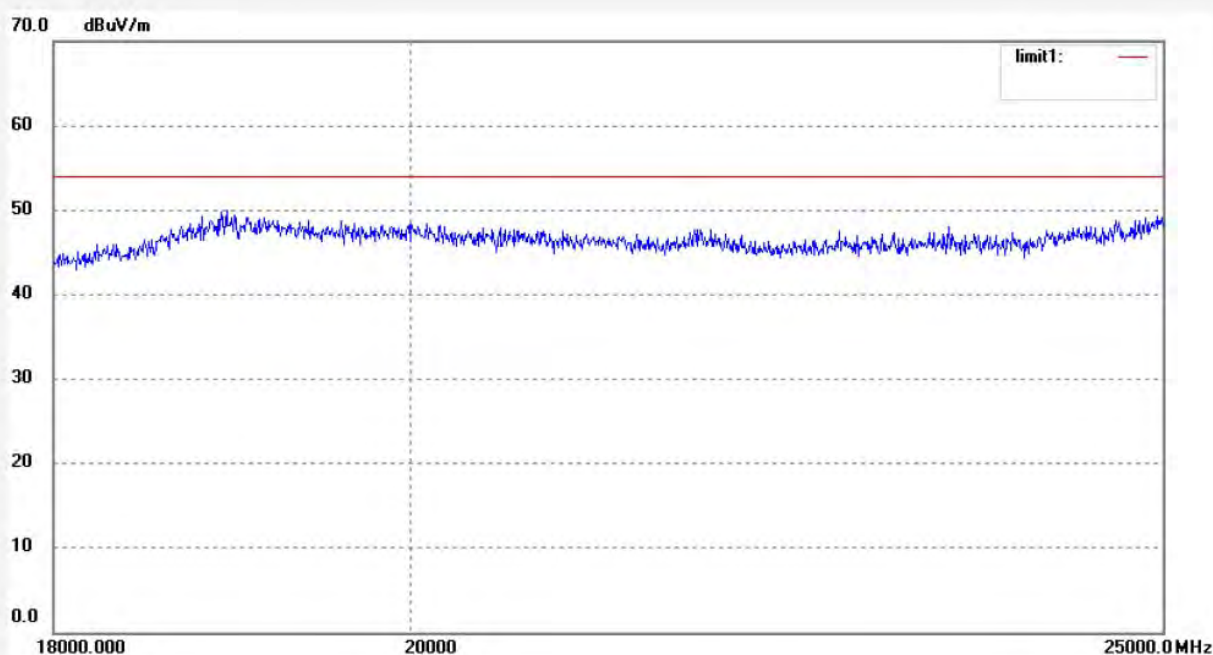

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1610

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:43:17

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

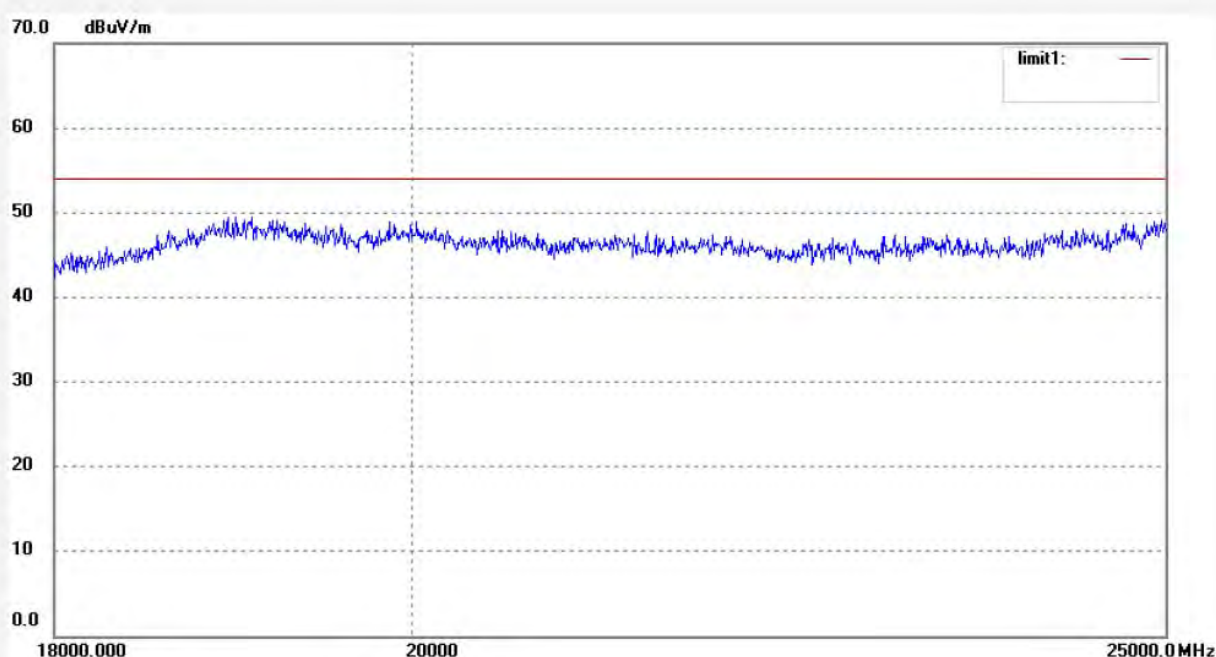

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5867
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 51 %
EUT: Tablet PC
Mode: TX Channel 11(802.11g)
Model: P073A
Manufacturer: Xinwei

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/08/22
Time: 22:36:13
Engineer Signature: Bob
Distance:

Note: Report No.:ATE20121979

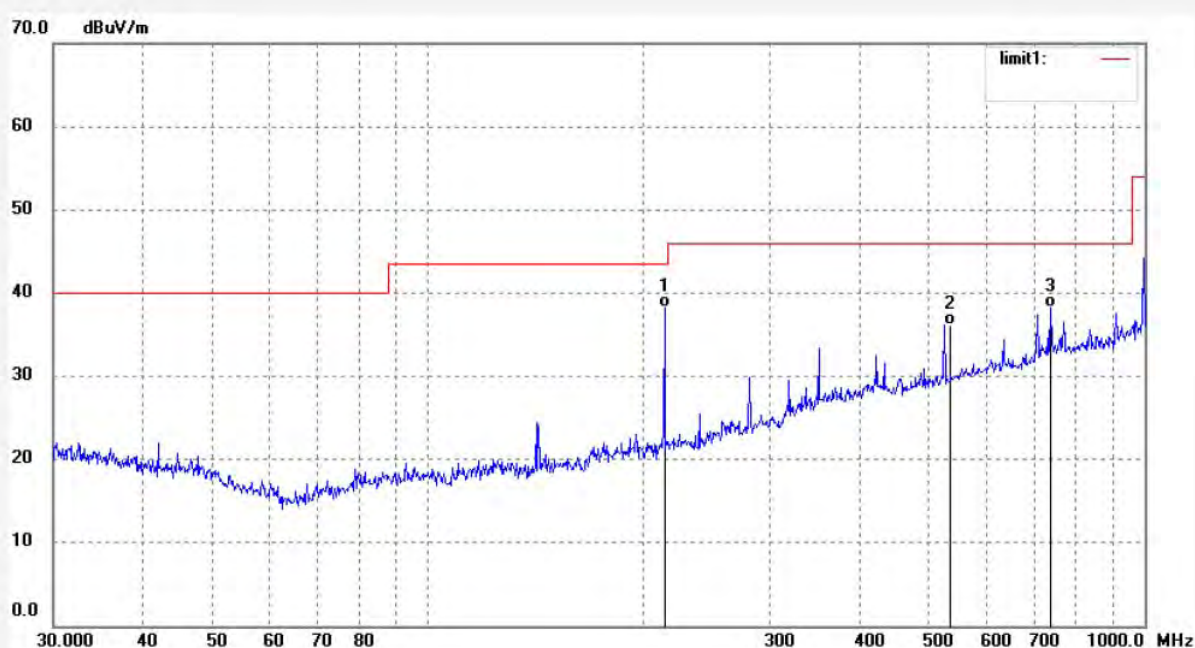

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	21.77	16.47	38.24	43.50	-5.26	QP			
2	533.3000	11.62	24.47	36.09	46.00	-9.91	QP			
3	740.0000	10.76	27.51	38.27	46.00	-7.73	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5866

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:32:51

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

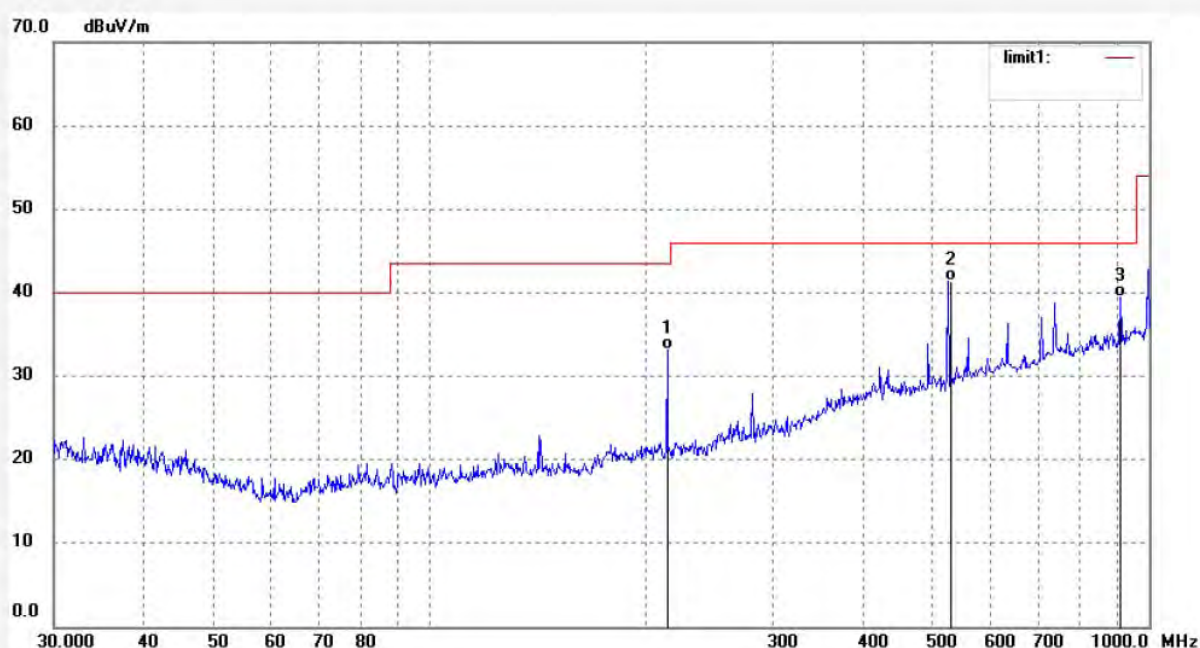

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	16.68	16.48	33.16	43.50	-10.34	QP			
2	533.2000	16.93	24.46	41.39	46.00	-4.61	QP			
3	912.6952	10.54	28.87	39.41	46.00	-6.59	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2578

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:18:54

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

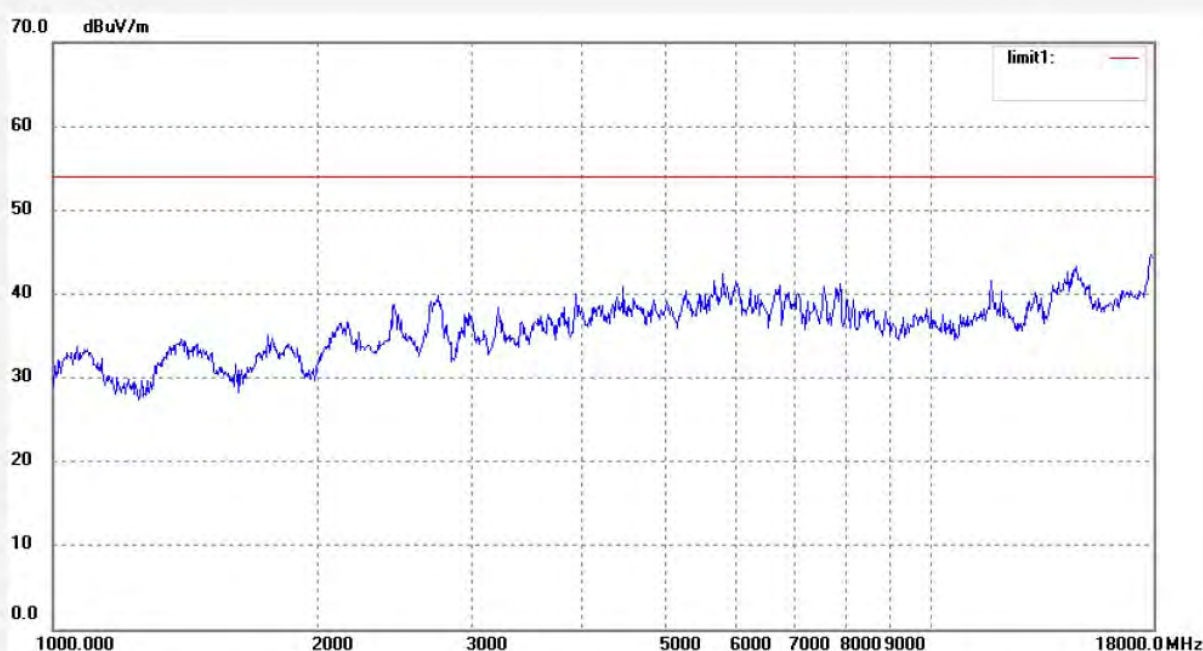

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2577

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:15:47

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

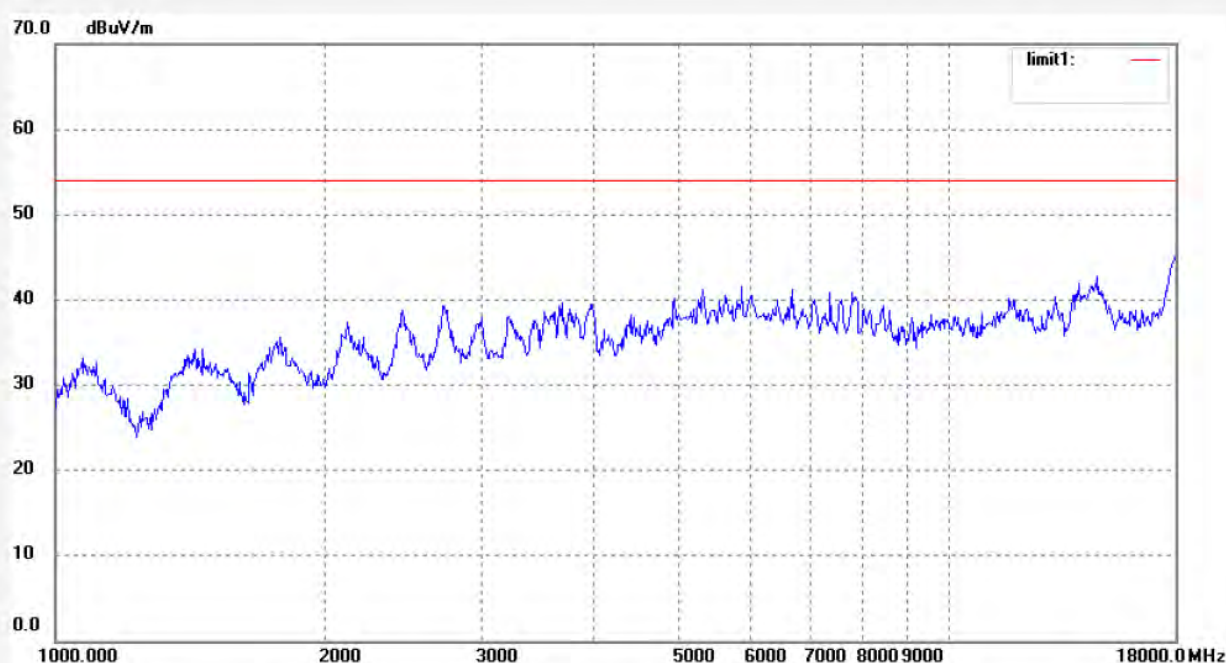

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1612

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:50:47

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

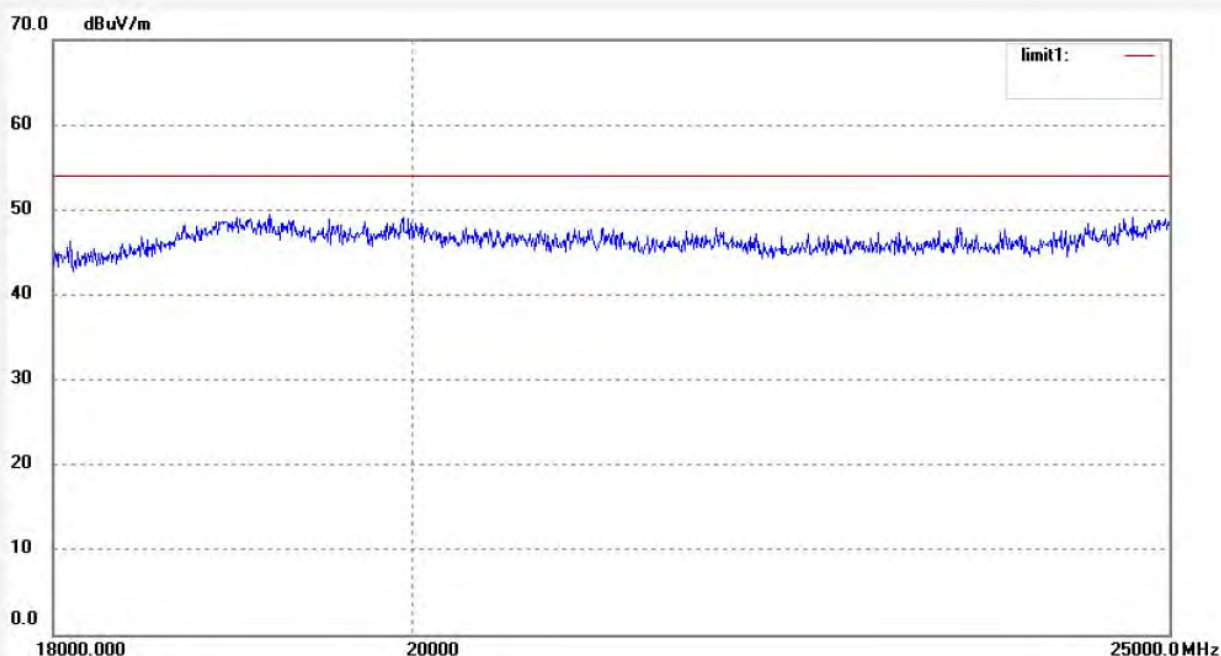

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1611

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11g)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:47:55

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

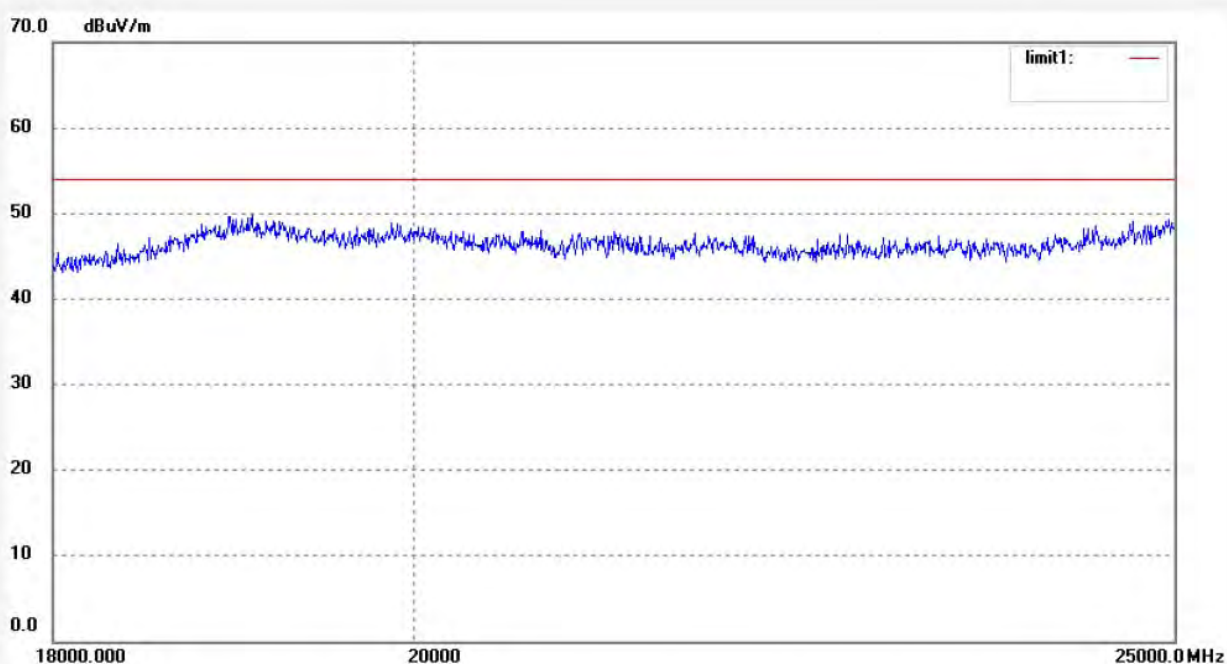

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5868

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 1(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:39:50

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

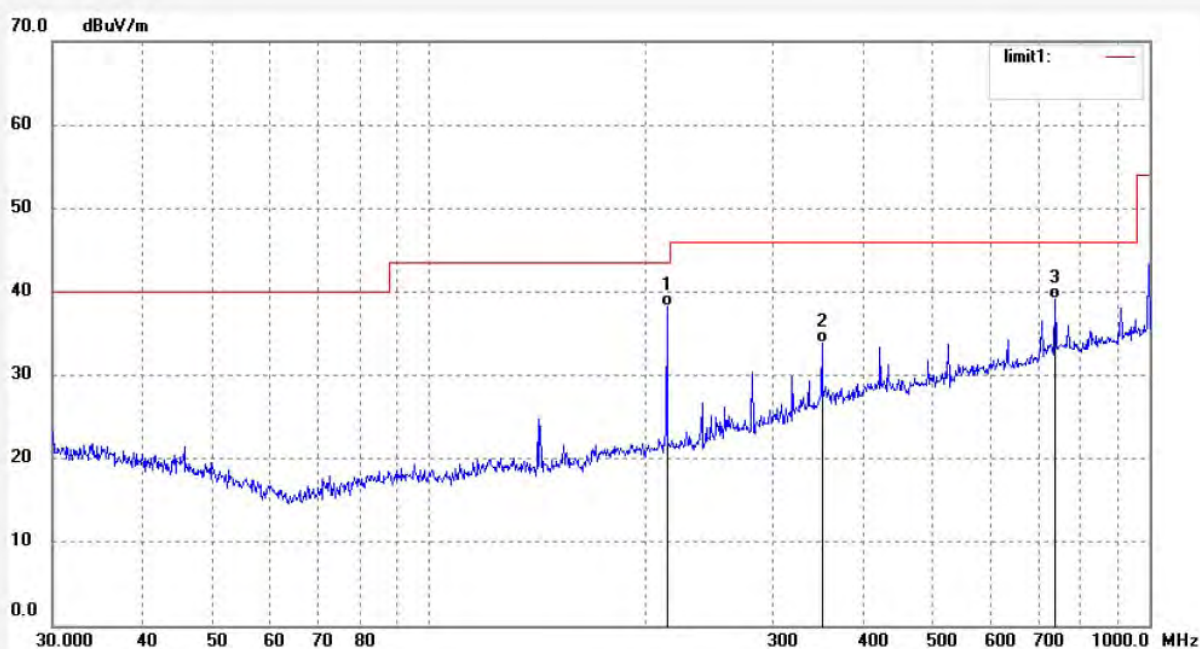

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	21.80	16.47	38.27	43.50	-5.23	QP			
2	350.9721	12.95	20.85	33.80	46.00	-12.20	QP			
3	740.0000	11.58	27.51	39.09	46.00	-6.91	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5869

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 1(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:43:46

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

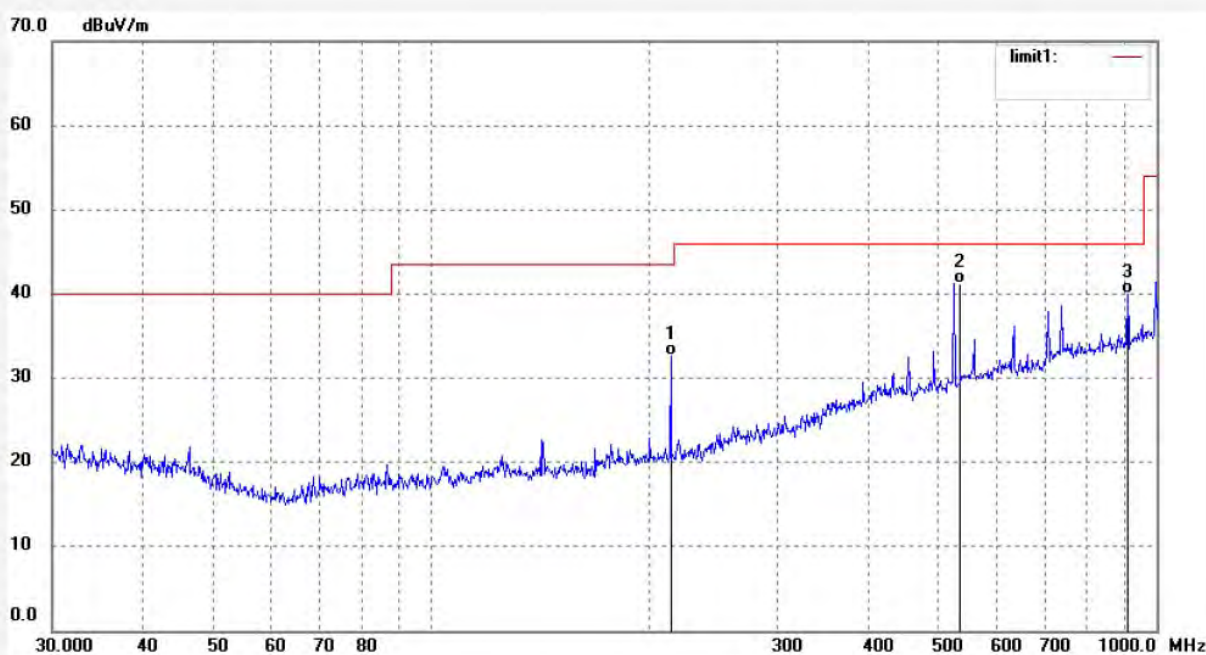

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	16.24	16.48	32.72	43.50	-10.78	QP			
2	533.3000	16.81	24.47	41.28	46.00	-4.72	QP			
3	912.6953	11.06	28.87	39.93	46.00	-6.07	QP			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #2579
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Tablet PC
Mode: TX Channel 1 (802.11n)
Model: P073A
Manufacturer: Xinwei

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/08/23/
Time: 12:21:30
Engineer Signature: Bob
Distance: 3m

Note: Report No.: ATE20121979

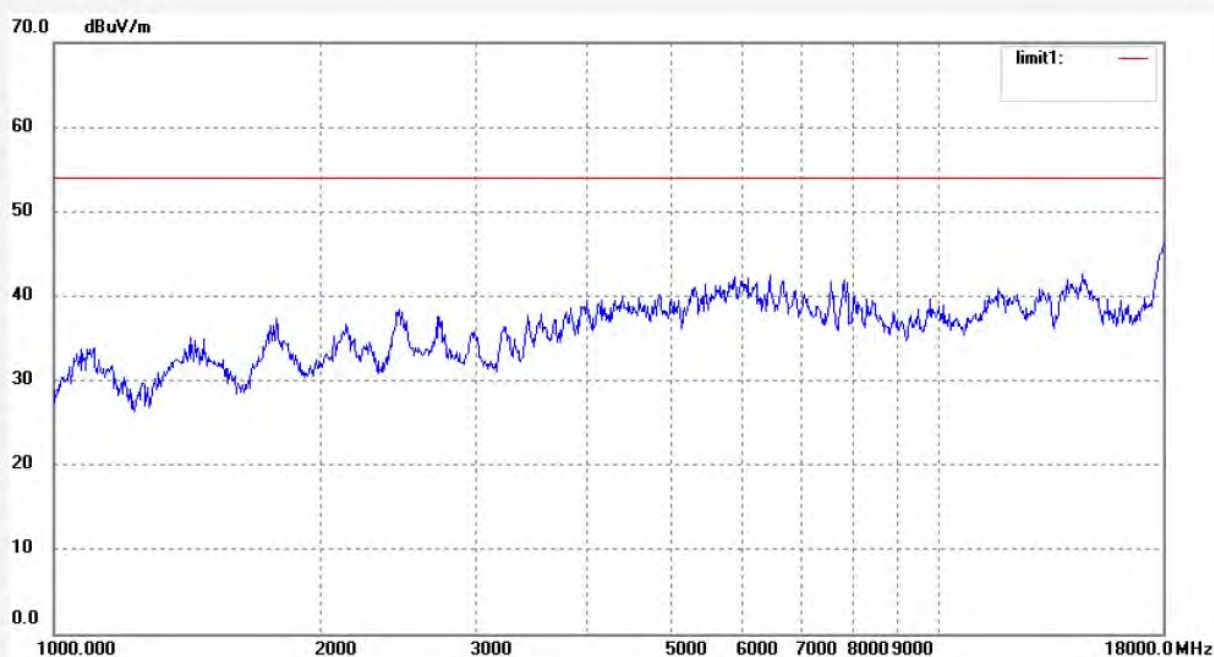

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #2580
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Tablet PC
Mode: TX Channel 1 (802.11n)
Model: P073A
Manufacturer: Xinwei

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/08/23/
Time: 12:23:06
Engineer Signature: Bob
Distance: 3m

Note: Report No.:ATE20121979

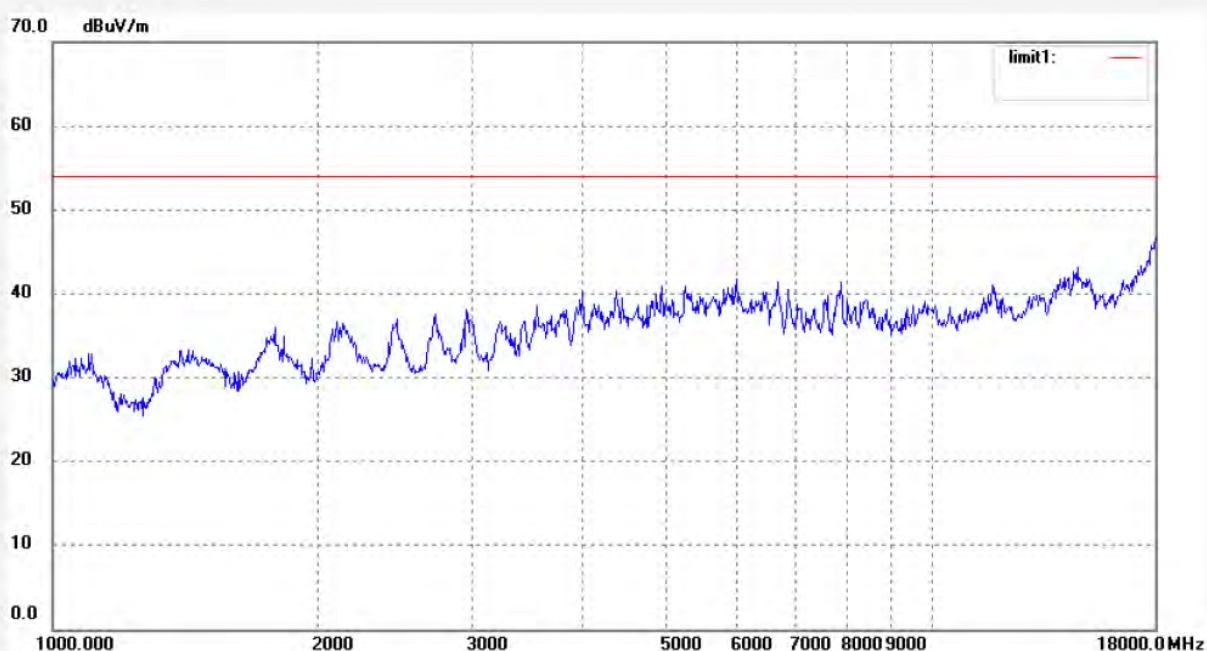

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1617

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 1 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 11:09:37

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

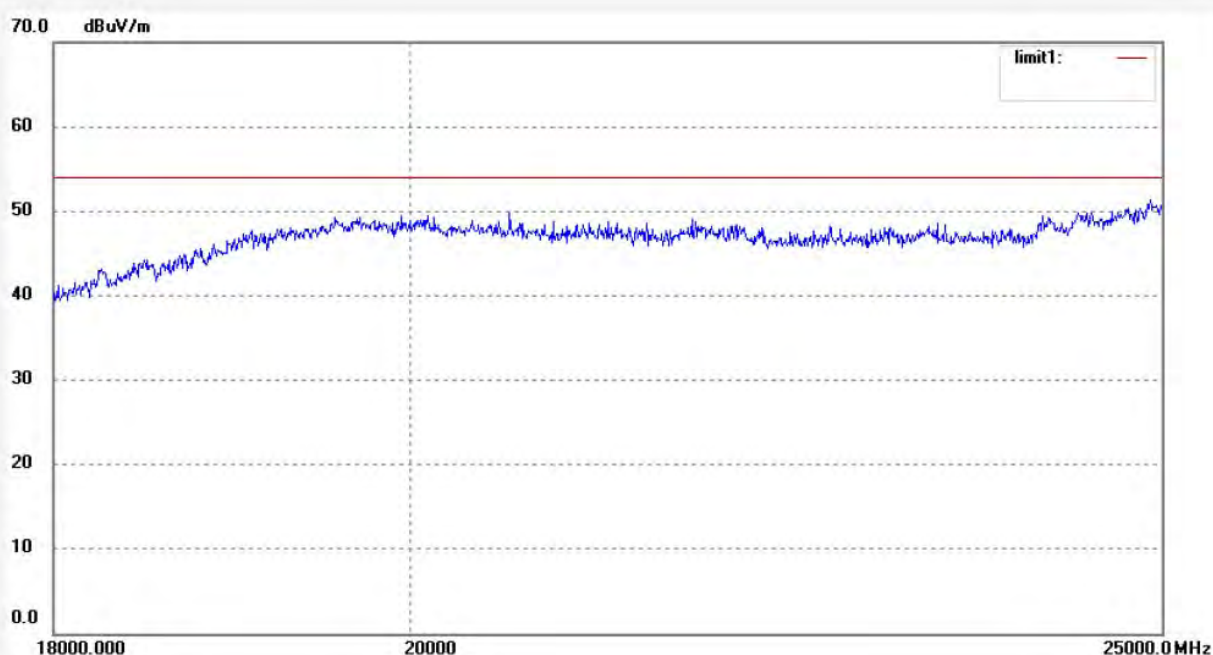

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1618

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 1 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 11:14:41

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

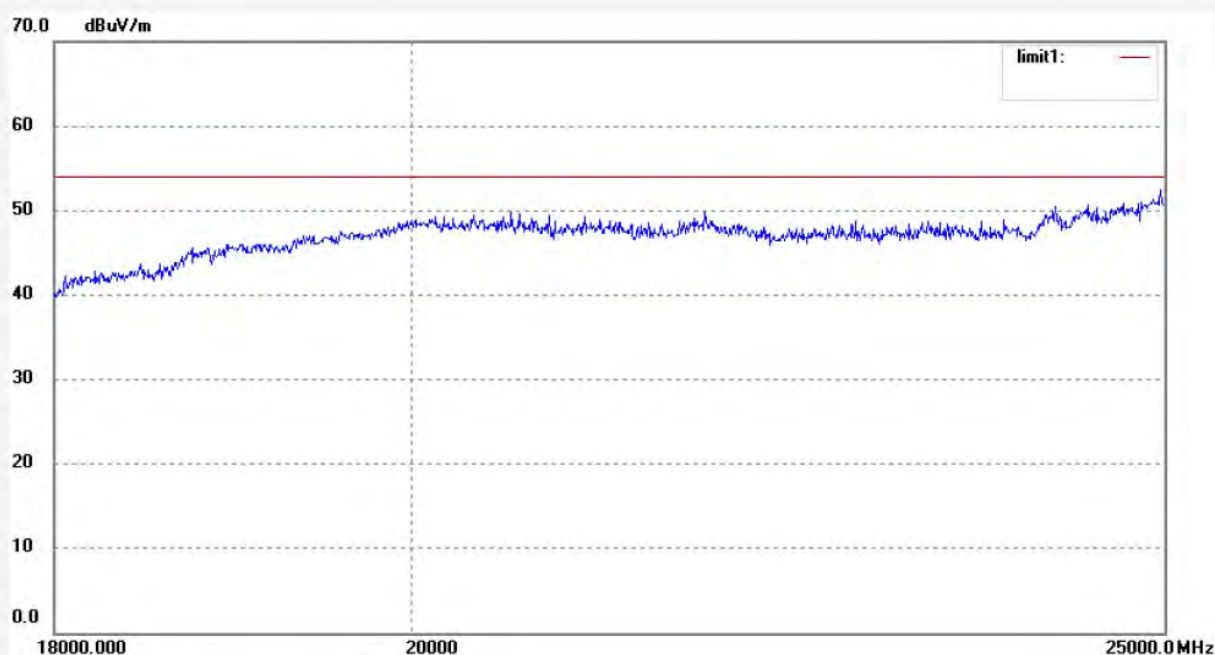

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5871

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:50:11

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

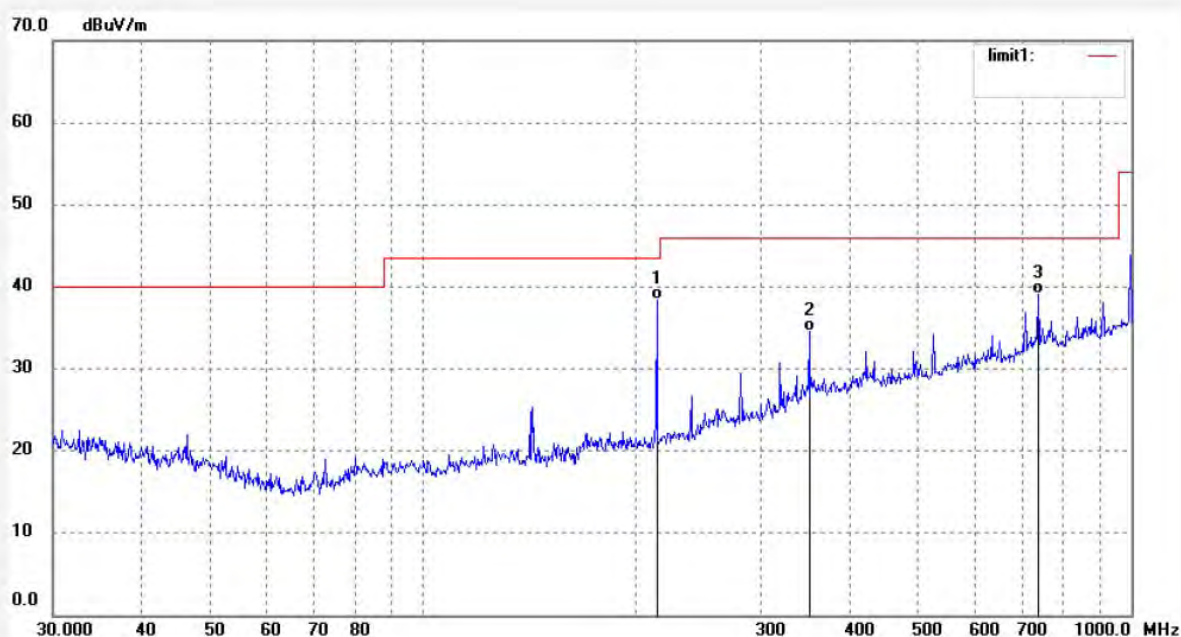

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3535	21.86	16.47	38.33	43.50	-5.17	QP			
2	350.9722	13.63	20.85	34.48	46.00	-11.52	QP			
3	740.0000	11.67	27.51	39.18	46.00	-6.82	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5870

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:47:37

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

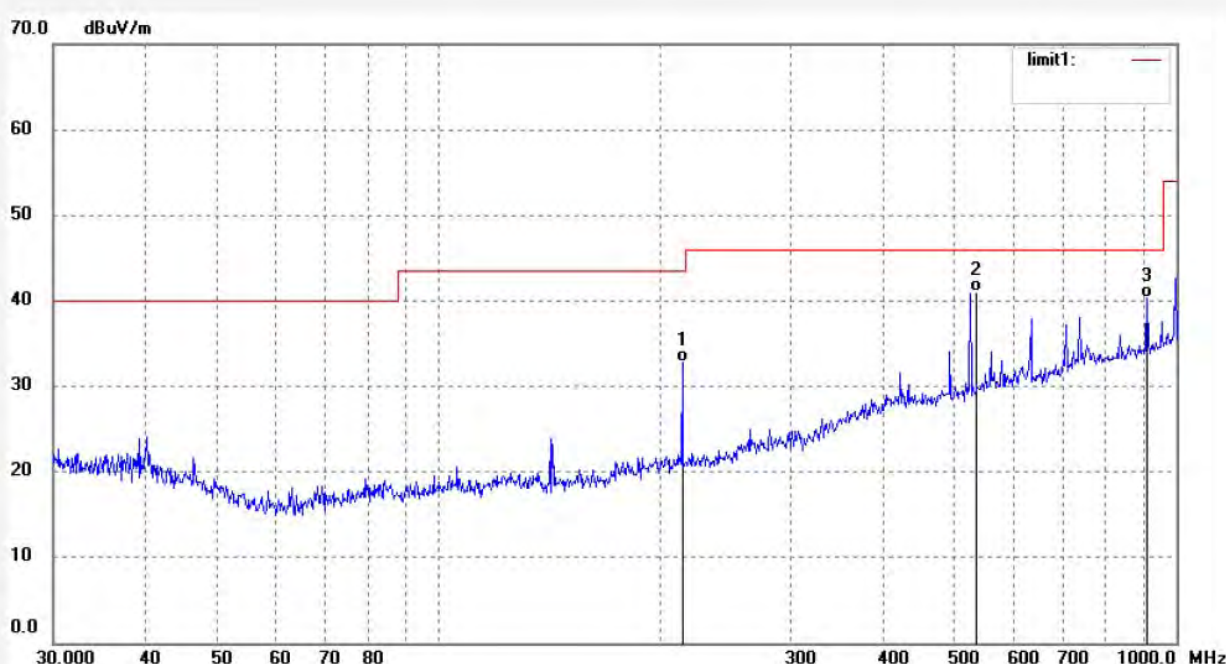

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3340	16.40	16.48	32.88	43.50	-10.62	QP			
2	533.3201	16.48	24.47	40.95	46.00	-5.05	QP			
3	912.6952	11.44	28.87	40.31	46.00	-5.69	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2582

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:29:53

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

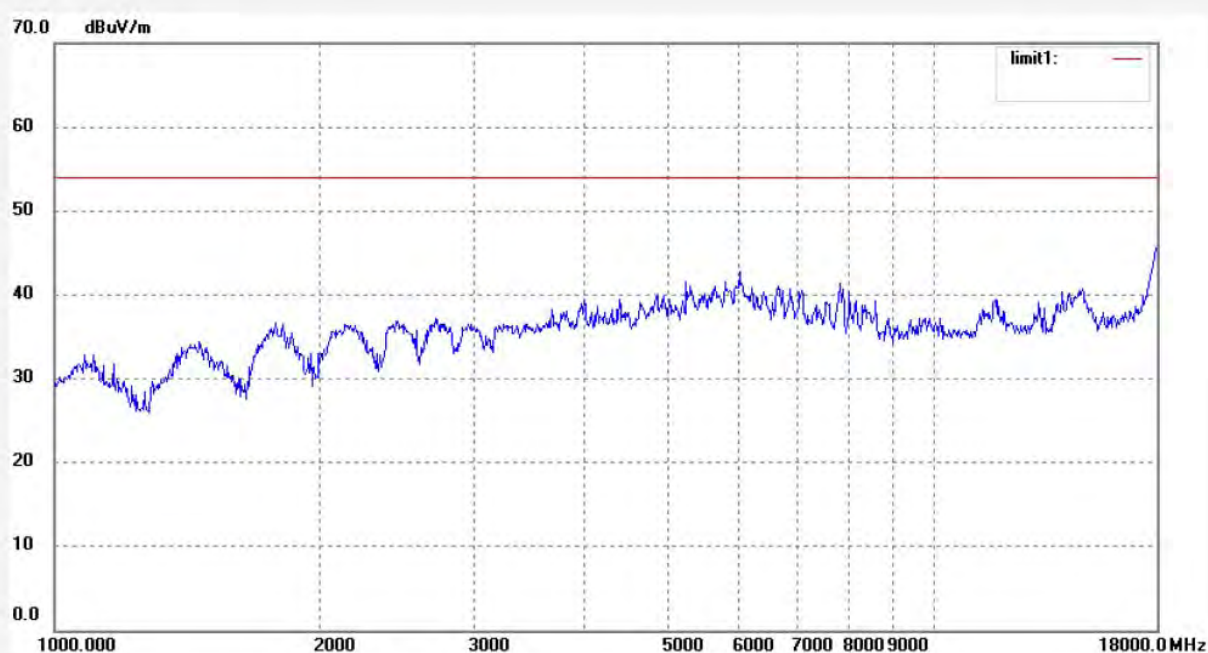

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2581

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:26:47

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

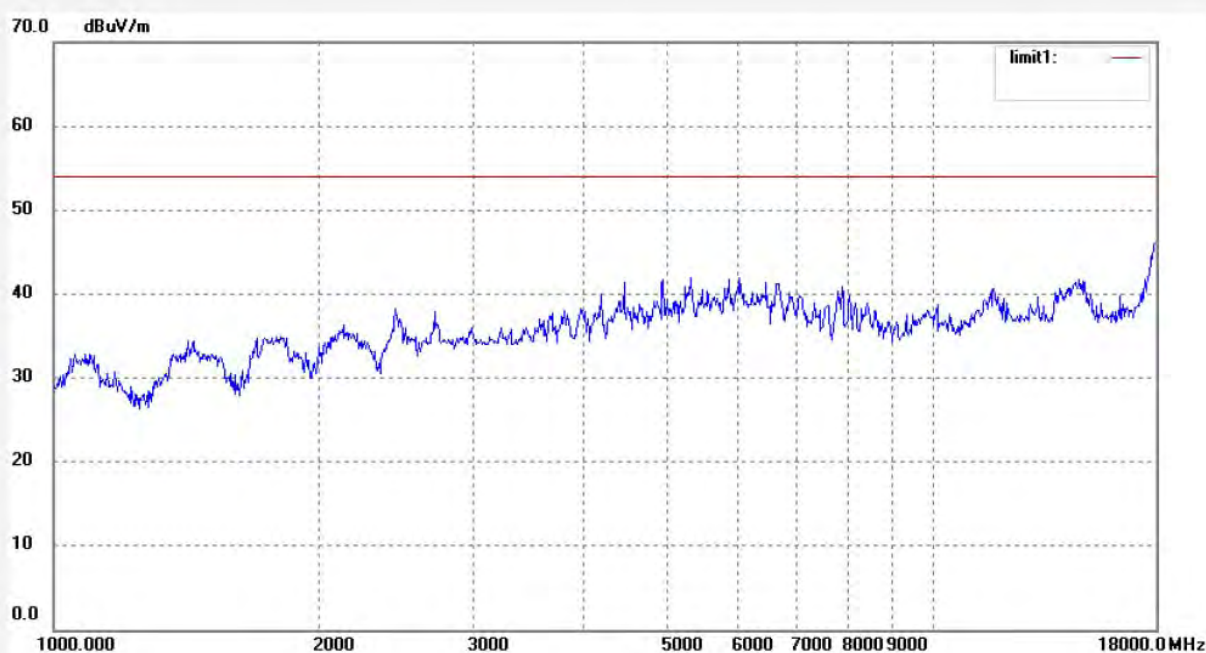

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1616

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 11:05:58

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

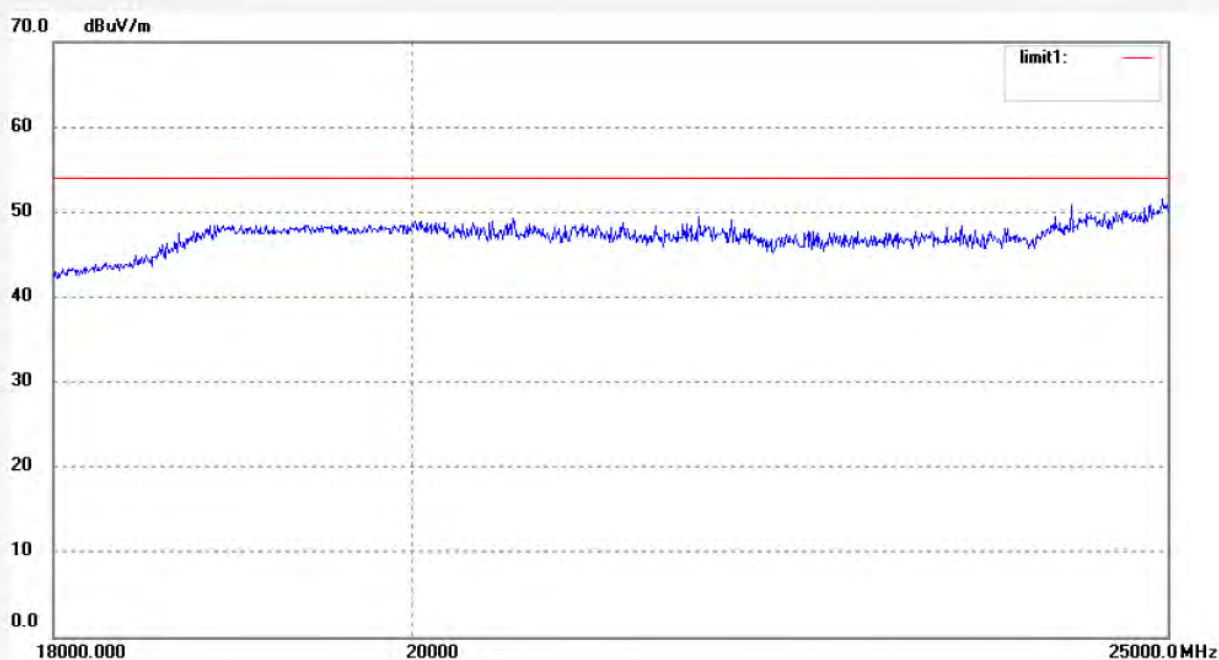

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1615

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 11:02:36

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

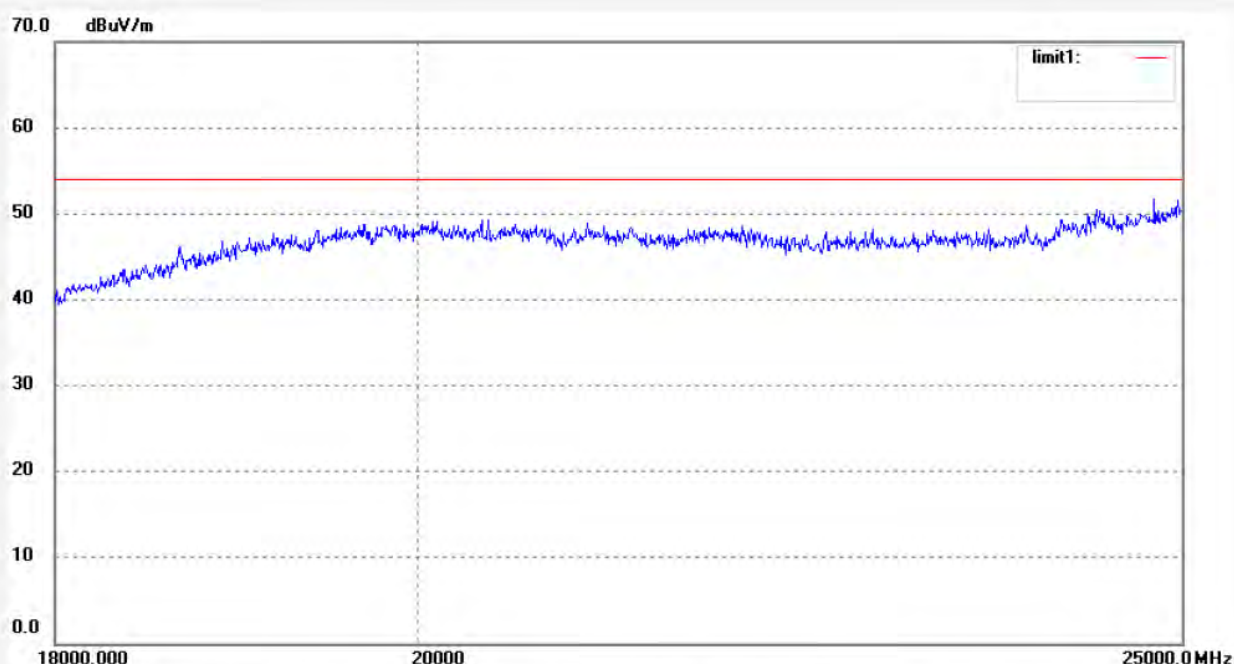

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5872

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:54:06

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

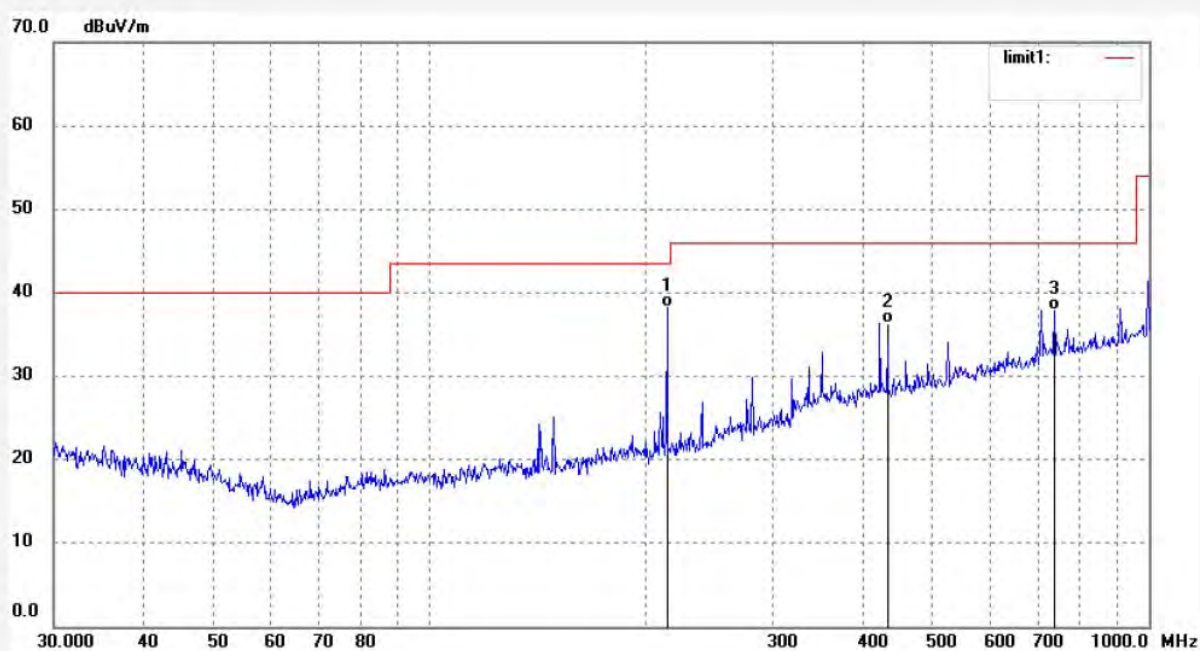

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	21.74	16.47	38.21	43.50	-5.29	QP			
2	433.3000	13.40	22.95	36.35	46.00	-9.65	QP			
3	740.0000	10.44	27.51	37.95	46.00	-8.05	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5873

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 22:59:15

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

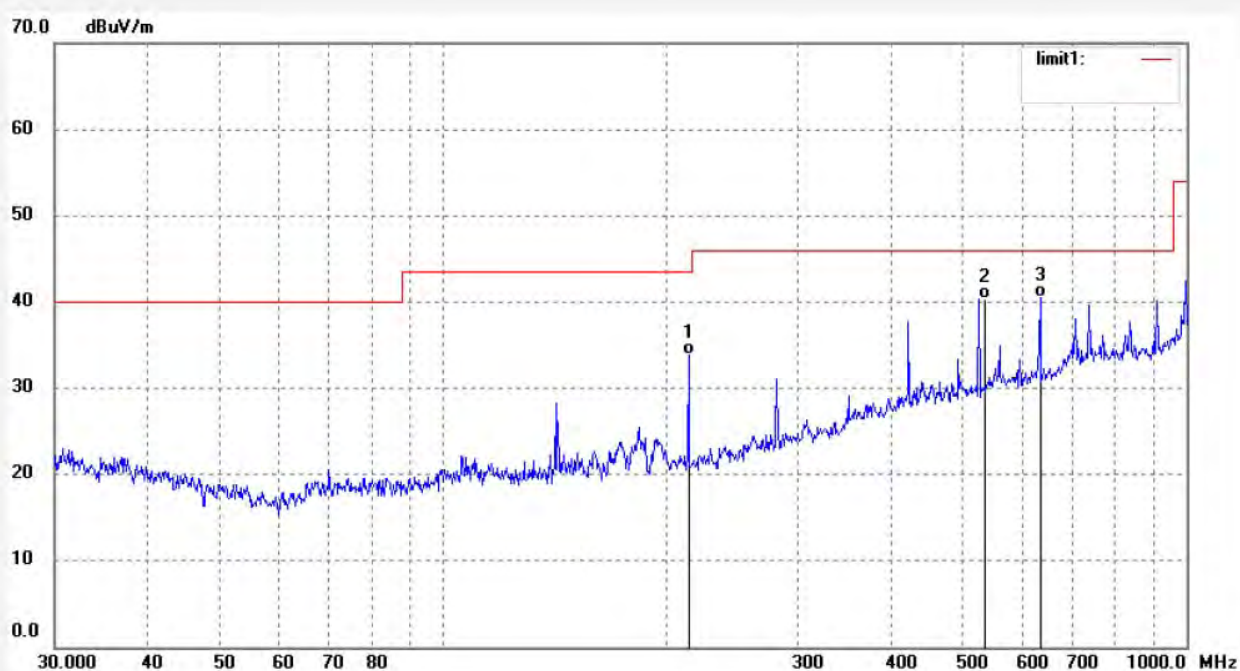

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	17.30	16.48	33.78	43.50	-9.72	QP			
2	533.3000	15.92	24.47	40.39	46.00	-5.61	QP			
3	640.0000	14.40	26.08	40.48	46.00	-5.52	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2583

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:33:17

Engineer Signature: Bob

Distance: 3m

Note: Report No.:ATE20121979

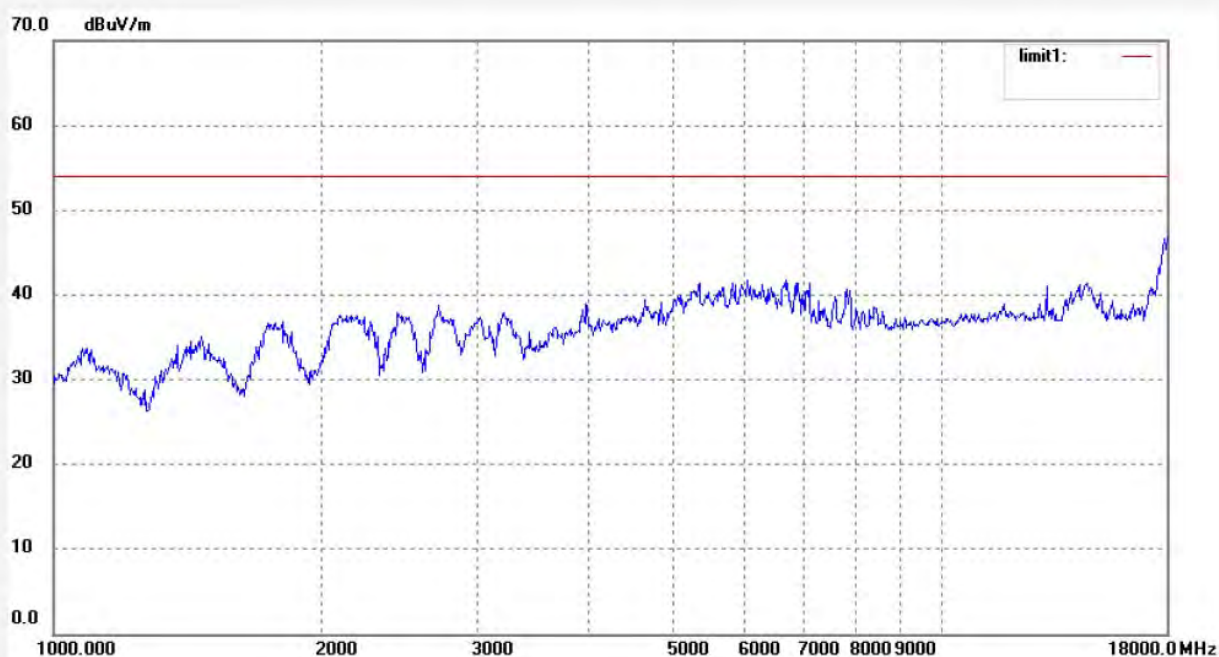

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2584

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:36:07

Engineer Signature: Bob

Distance: 3m

Note: Report No.: ATE20121979

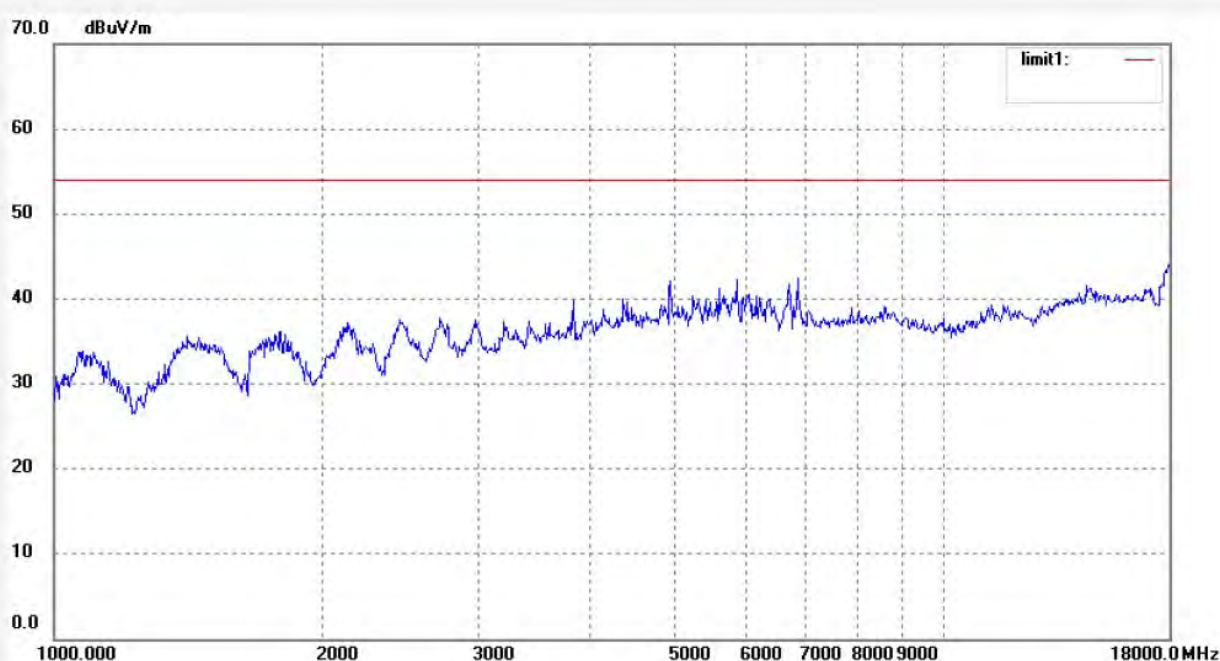

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1613

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:53:17

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

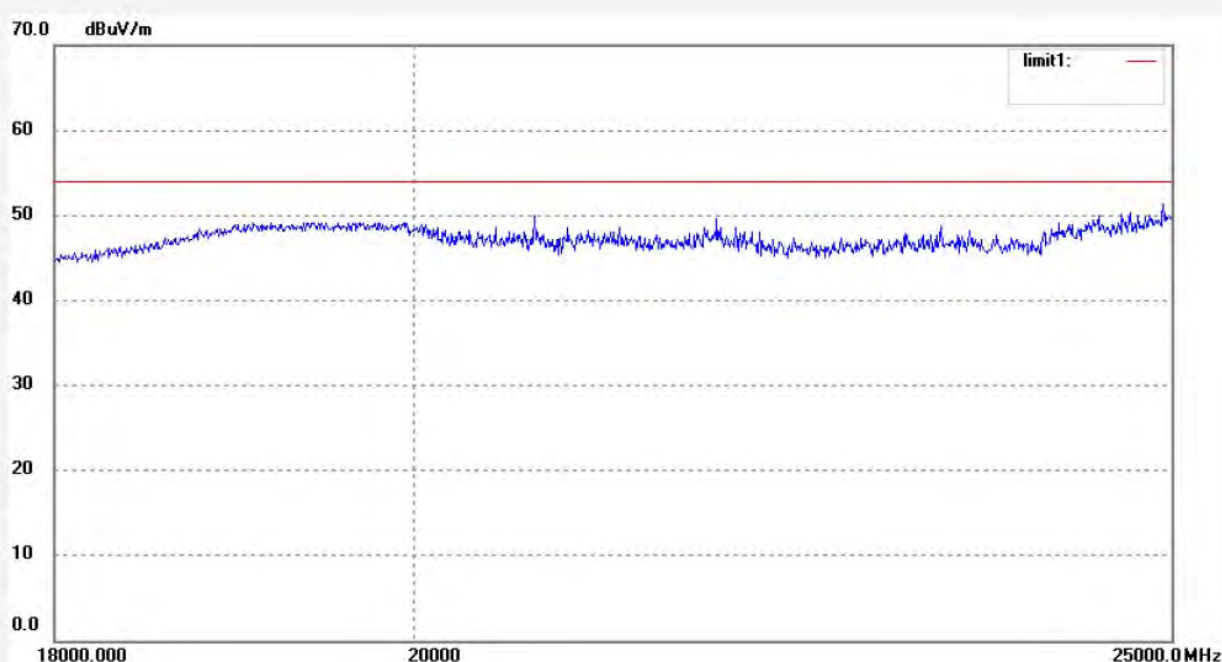

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1614

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet PC

Mode: TX Channel 11 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 10:57:05

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

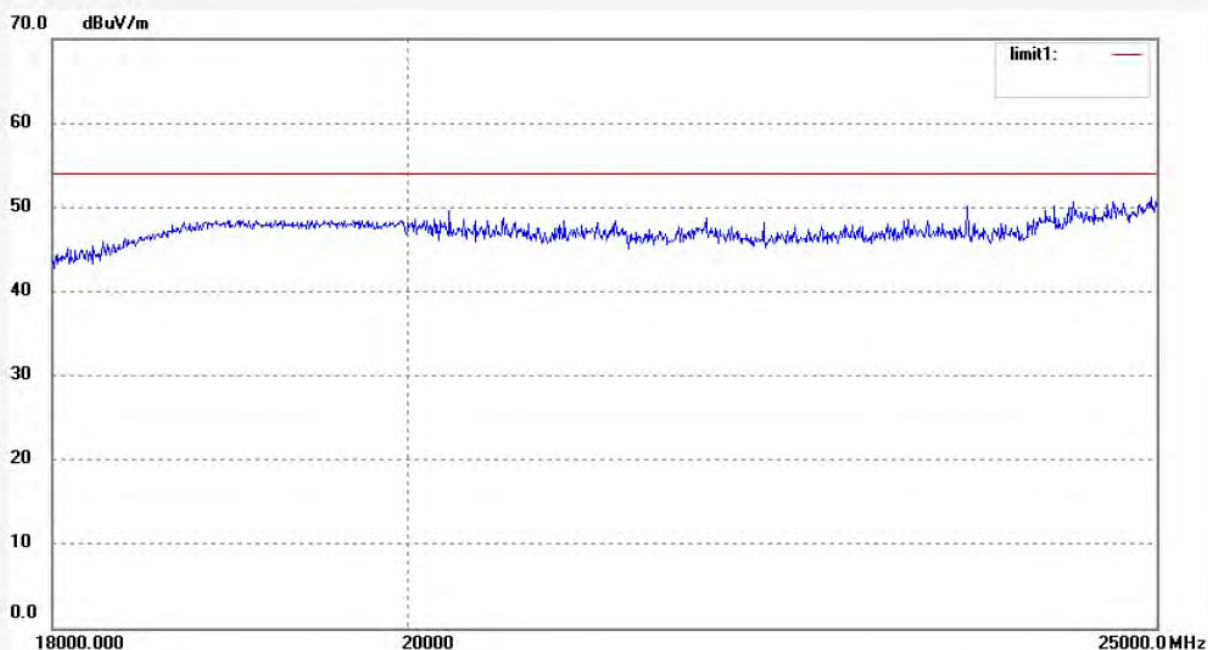

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5875

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 3(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 23:06:23

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

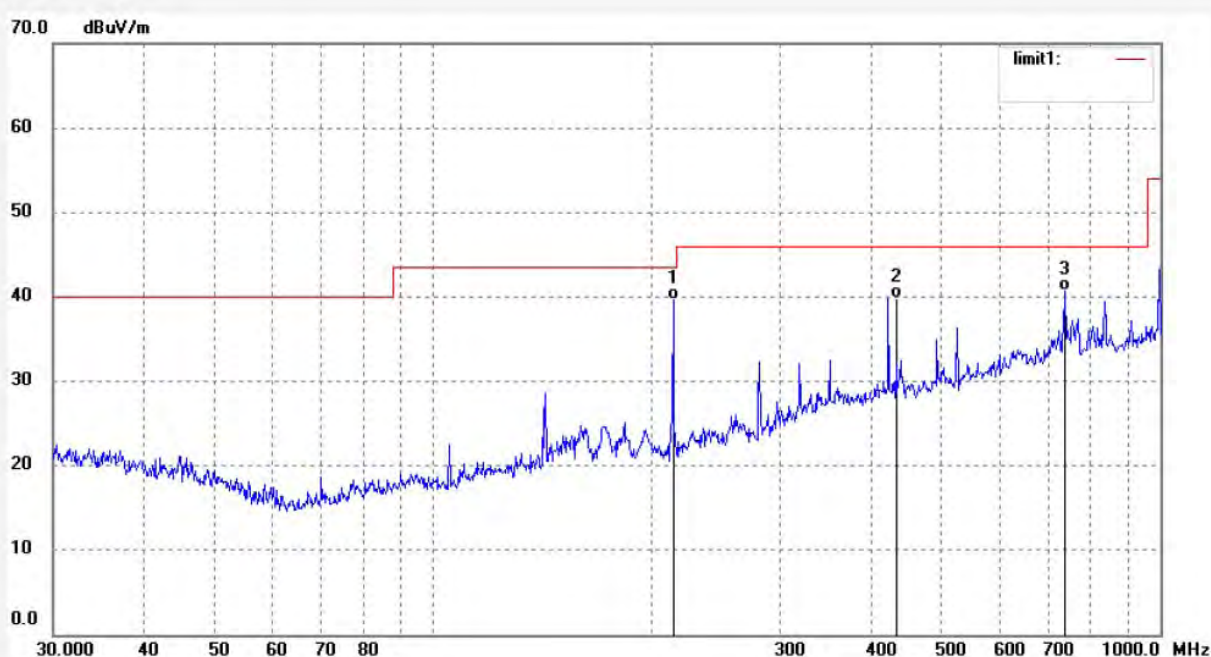

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	23.19	16.47	39.66	43.50	-3.84	QP			
2	433.3000	16.81	22.95	39.76	46.00	-6.24	QP			
3	740.0000	13.20	27.51	40.71	46.00	-5.29	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5874

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 3(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 23:02:44

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

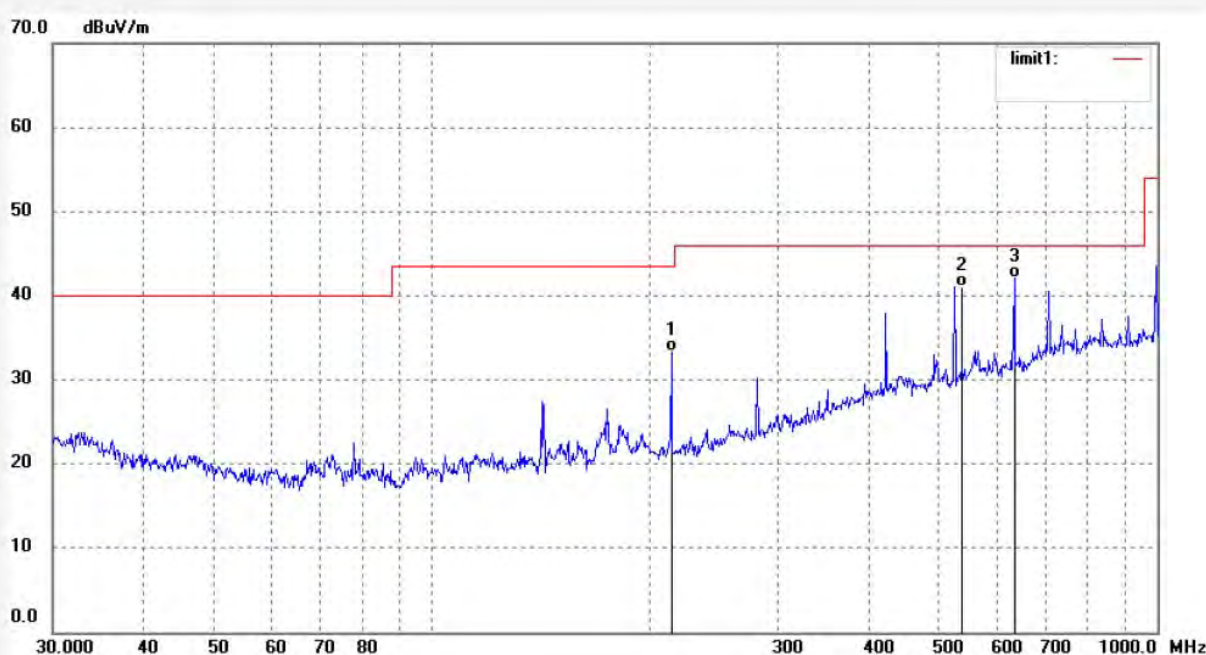

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	16.83	16.48	33.31	43.50	-10.19	QP			
2	533.3000	16.49	24.47	40.96	46.00	-5.04	QP			
3	640.0000	16.04	26.08	42.12	46.00	-3.88	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2586

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 3(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 9/18/19

Engineer Signature:

Distance:

Note: Report NO.:ATE20121979

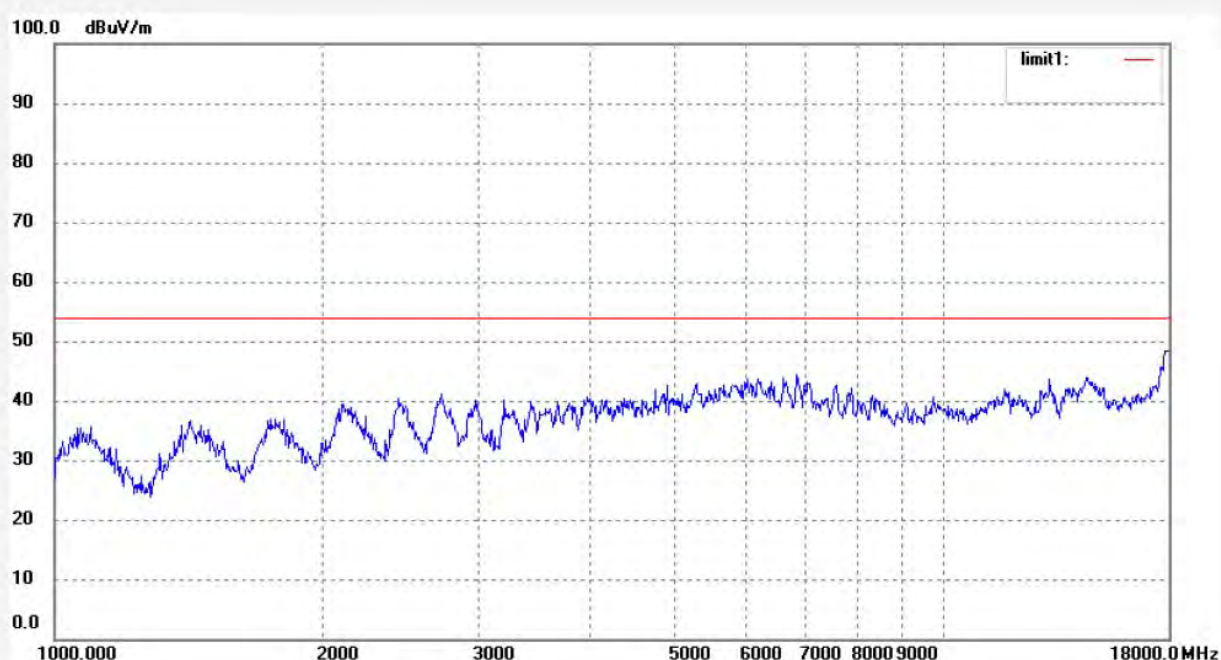

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2585

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 3(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 9/15/37

Engineer Signature:

Distance:

Note: Report NO.:ATE20121979

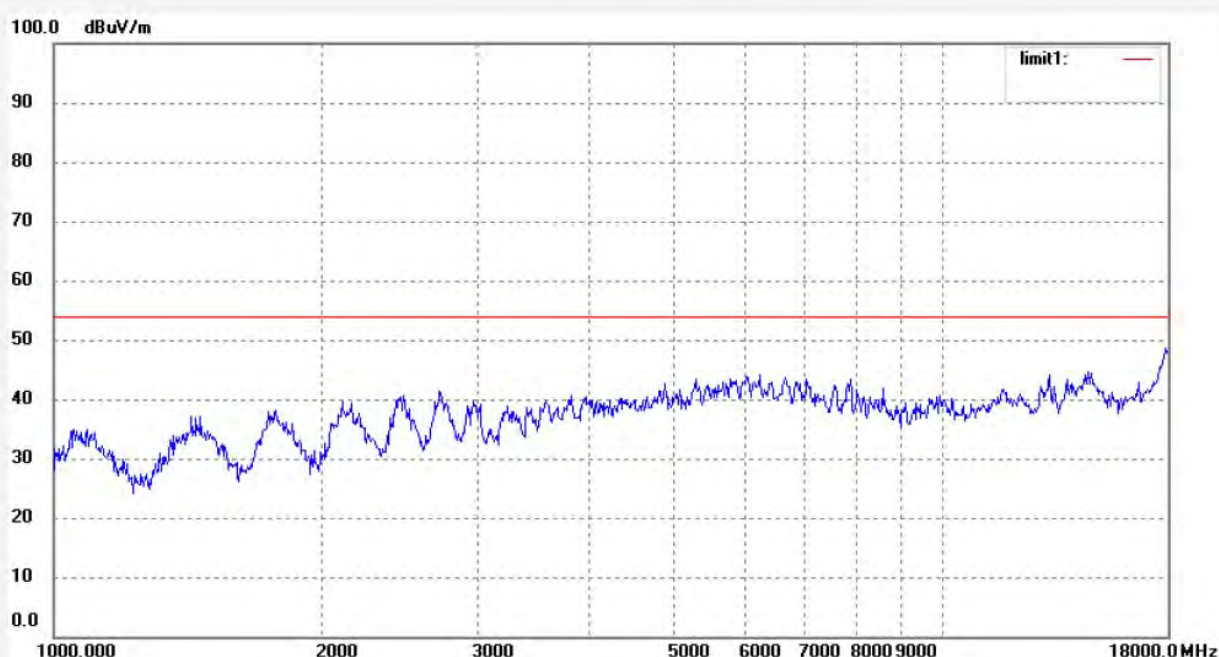

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5916

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 3 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 11:52:09

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

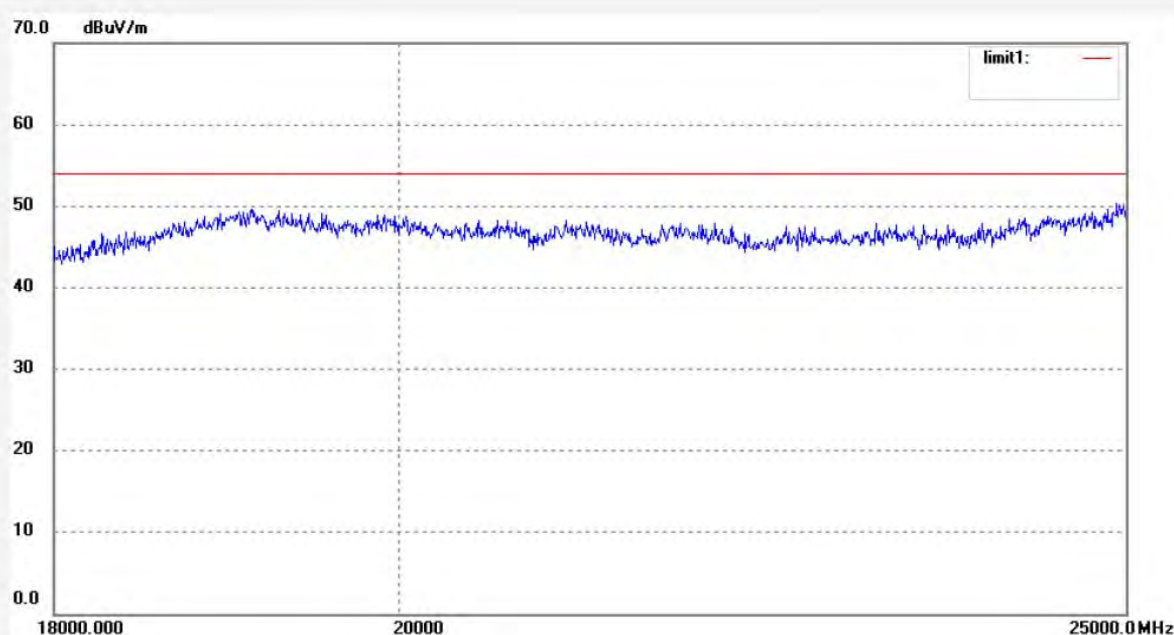

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5917

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 3 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 11:56:43

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

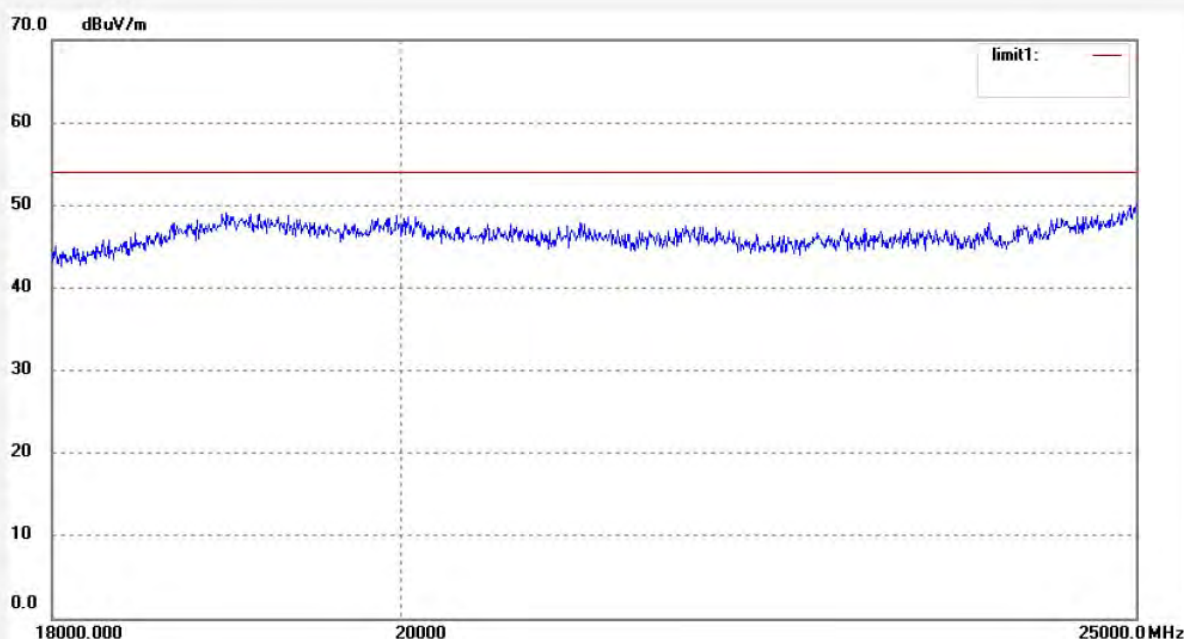

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5876

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 23:11:29

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

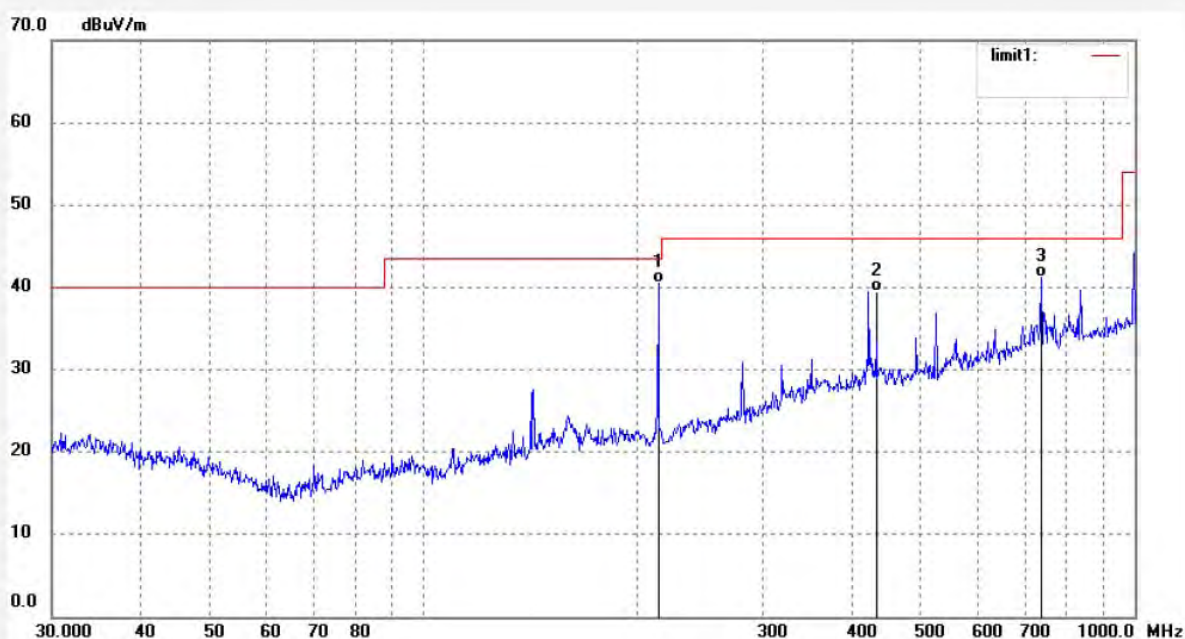

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	24.01	16.47	40.48	43.50	-3.02	QP			
2	433.3000	16.57	22.95	39.52	46.00	-6.48	QP			
3	740.0000	13.75	27.51	41.26	46.00	-4.74	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #5877
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 51 %
EUT: Tablet PC
Mode: TX Channel 6(802.11n)
Model: P073A
Manufacturer: Xinwei

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/08/22
Time: 23:16:47
Engineer Signature: Bob
Distance:

Note: Report No.: ATE20121979

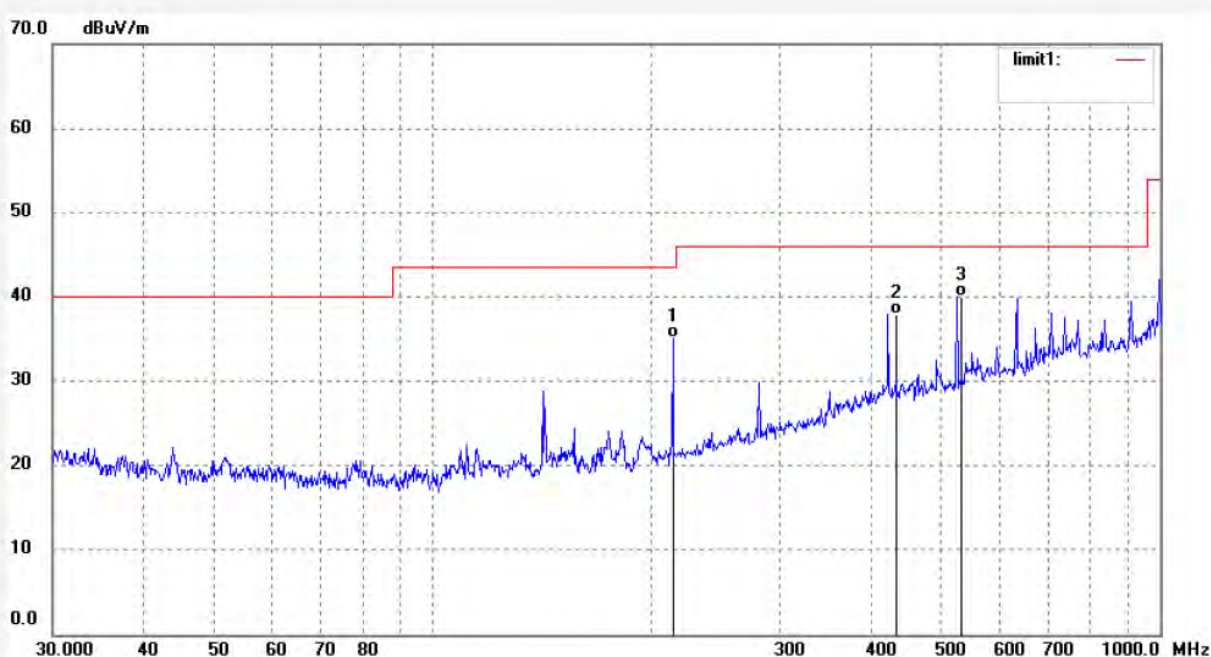

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	18.56	16.48	35.04	43.50	-8.46	QP			
2	433.1000	14.98	22.95	37.93	46.00	-8.07	QP			
3	533.3000	15.54	24.47	40.01	46.00	-5.99	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2587

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 9/22/38

Engineer Signature:

Distance:

Note: Report NO.:ATE20121979

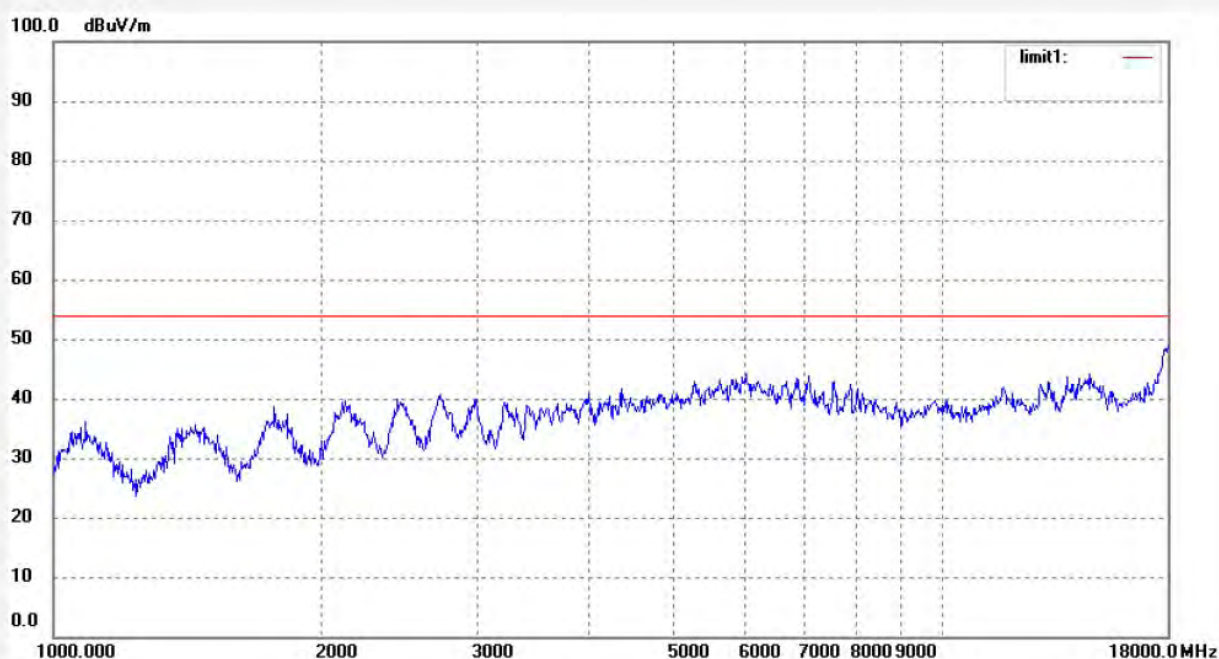

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #2588

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 9/25/22

Engineer Signature:

Distance:

Note: Report NO.:ATE20121979

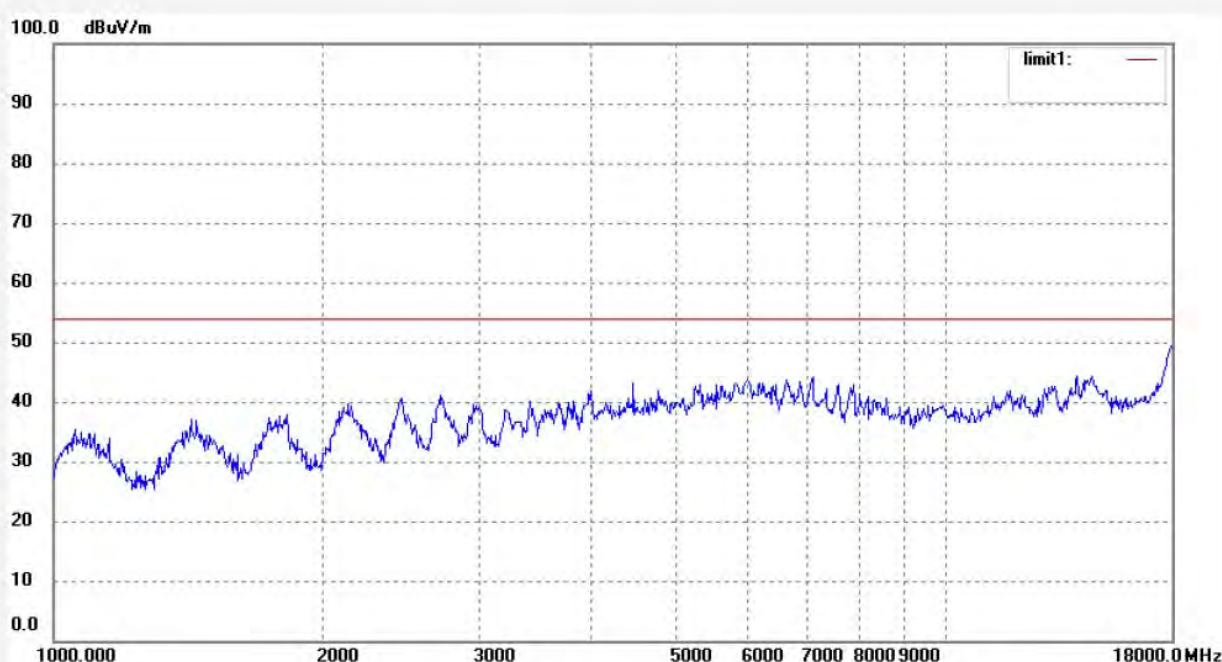

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5919

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:05:30

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

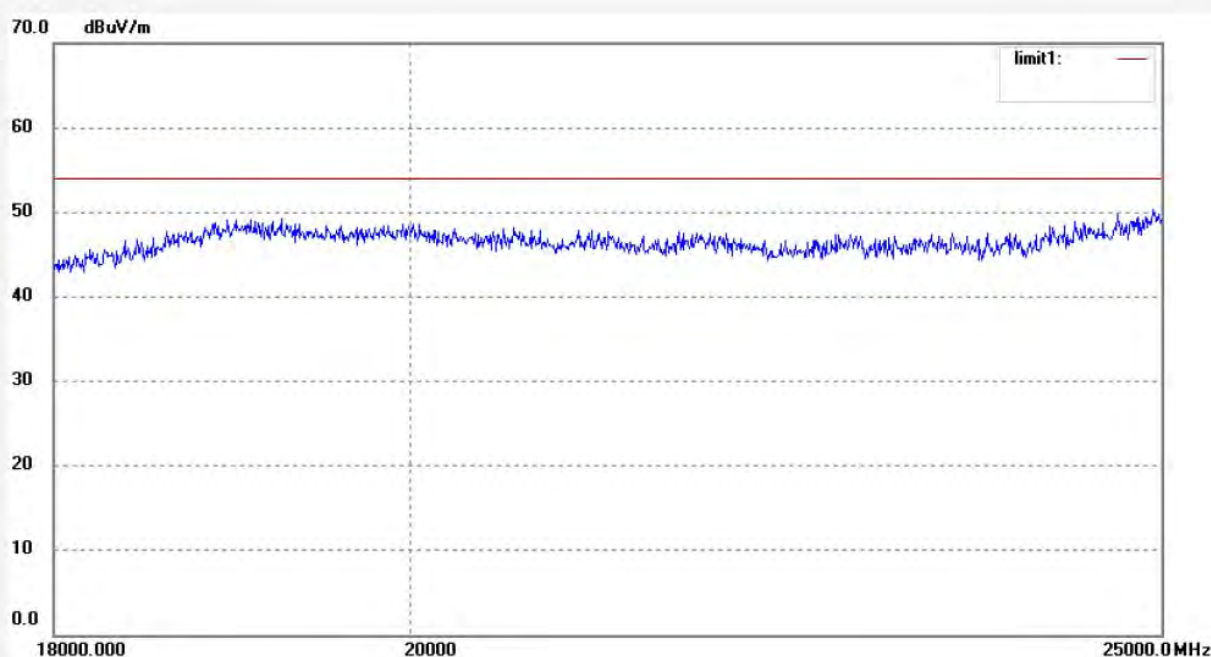

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5918

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 6 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:01:19

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

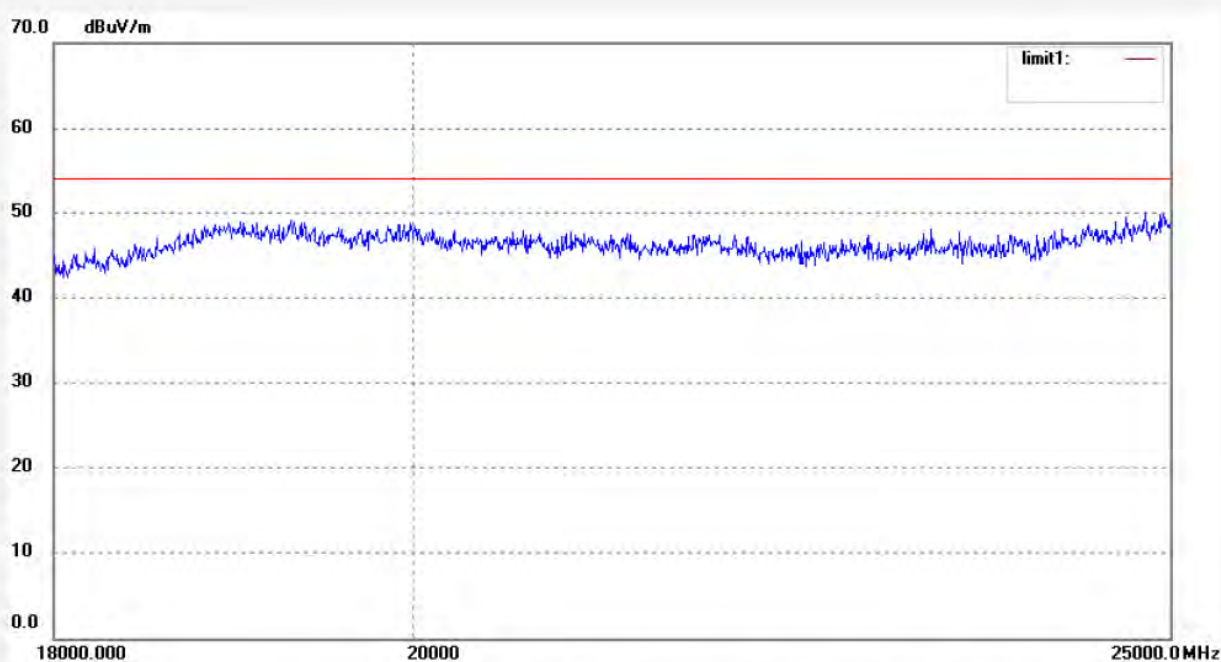

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5879

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 9(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 23:24:16

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

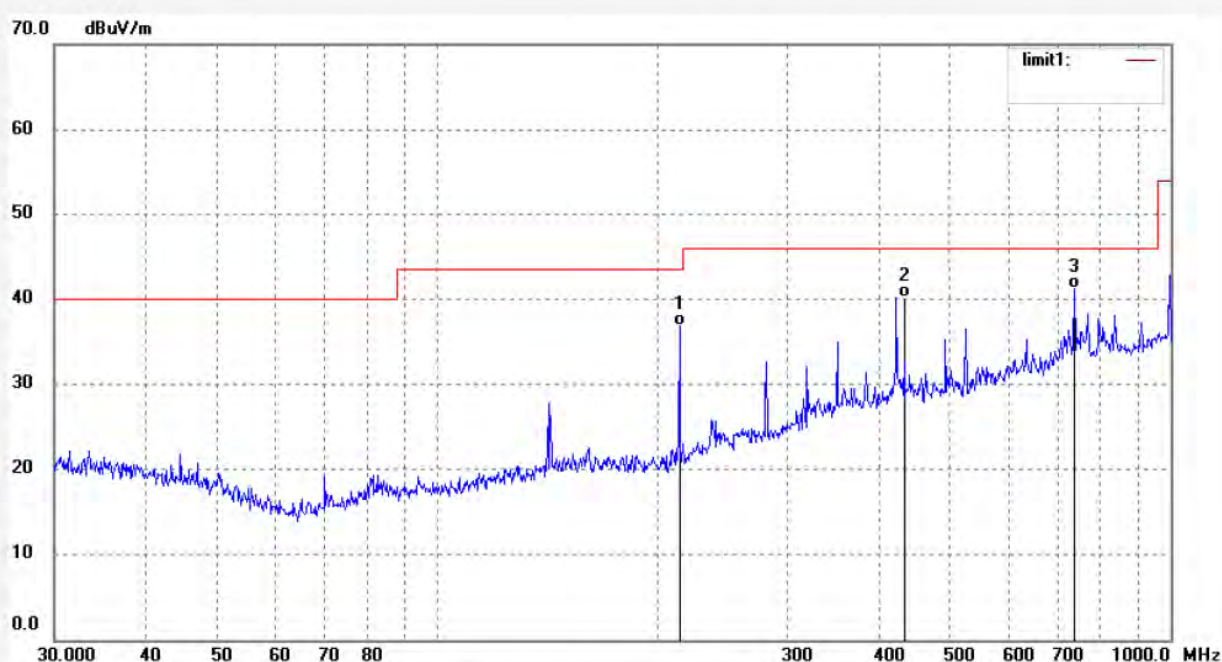

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3535	20.30	16.47	36.77	43.50	-6.73	QP			
2	433.3100	17.25	22.95	40.20	46.00	-5.80	QP			
3	740.1000	13.62	27.51	41.13	46.00	-4.87	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5878

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 9(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/08/22

Time: 23:20:13

Engineer Signature: Bob

Distance:

Note: Report No.:ATE20121979

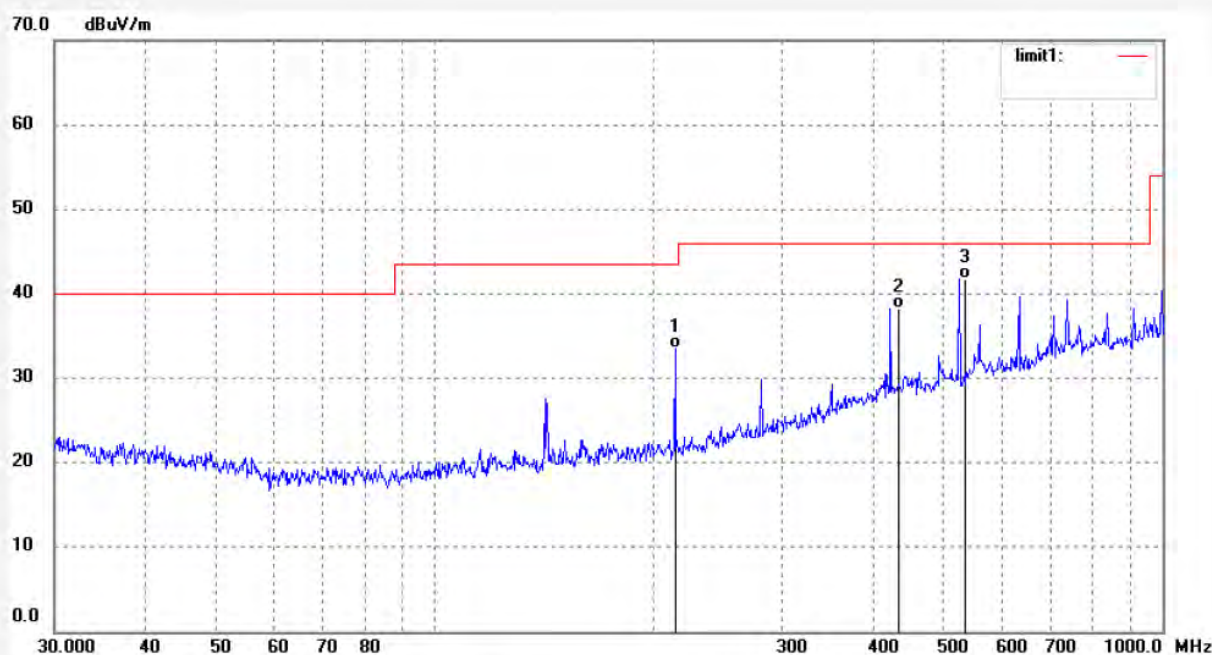

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.3000	16.97	16.48	33.45	43.50	-10.05	QP			
2	433.3000	15.21	22.95	38.16	46.00	-7.84	QP			
3	533.0000	17.35	24.45	41.80	46.00	-4.20	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2590

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 9(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 9/32/54

Engineer Signature:

Distance:

Note: Report NO.:ATE20121979

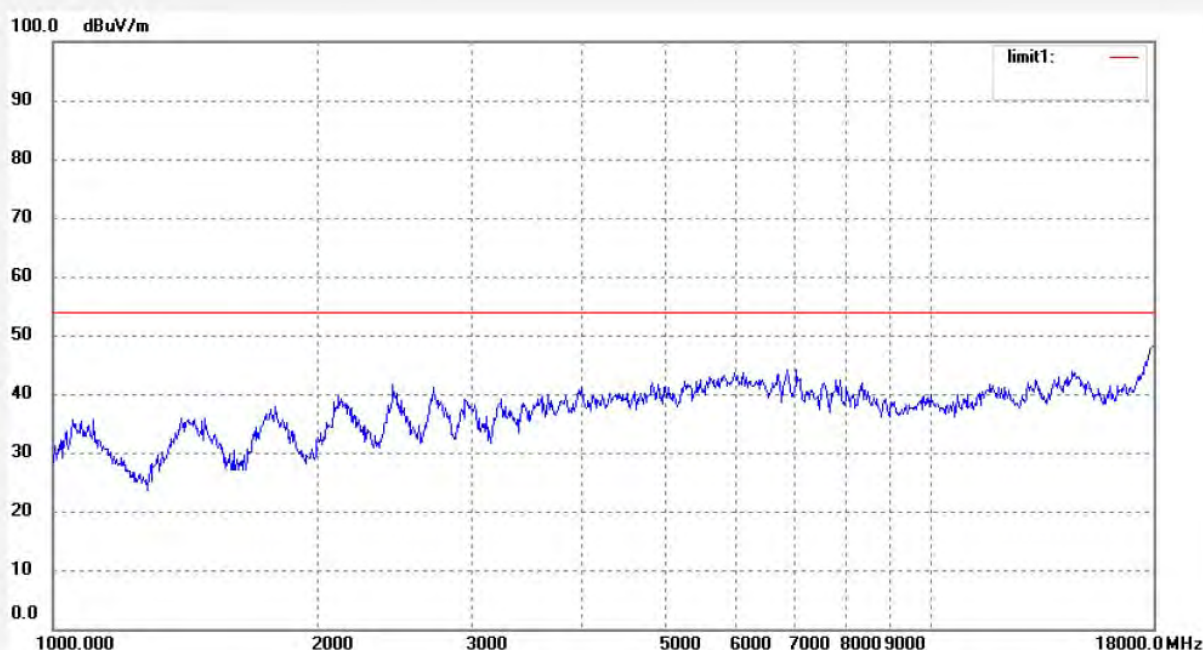

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #2589

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet PC

Mode: TX Channel 9(802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 9/28/51

Engineer Signature:

Distance:

Note: Report NO.:ATE20121979

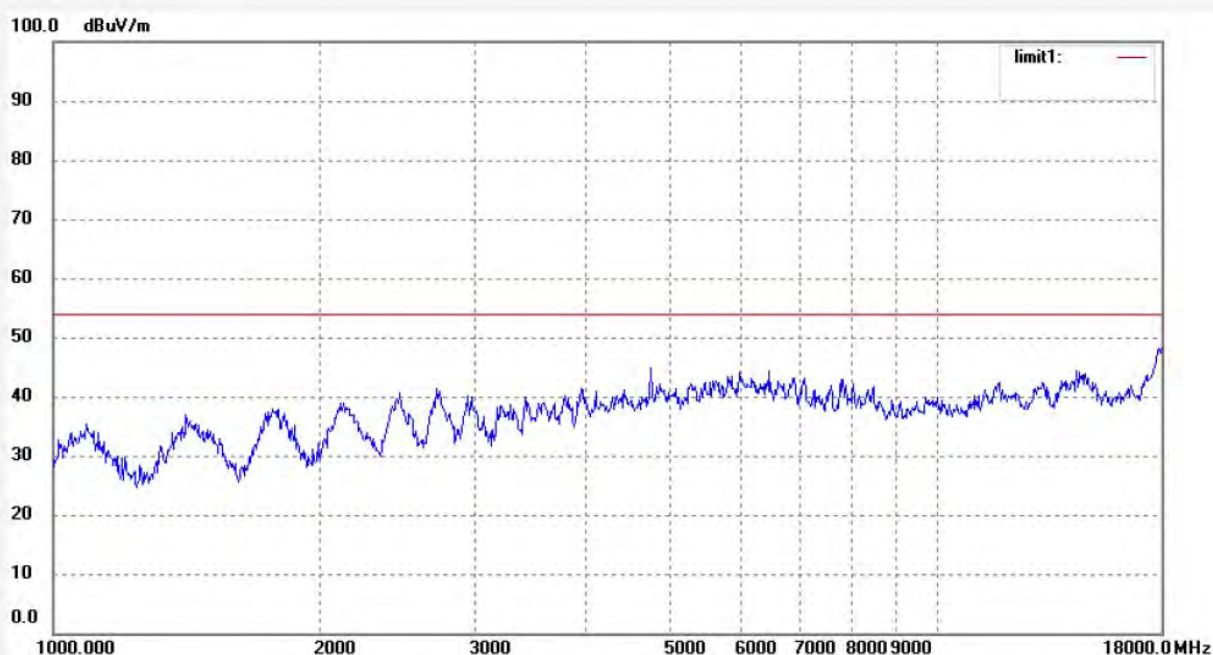

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5920

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 9 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:10:41

Engineer Signature: Bob

Distance:

Note: Report No.: ATE20121979

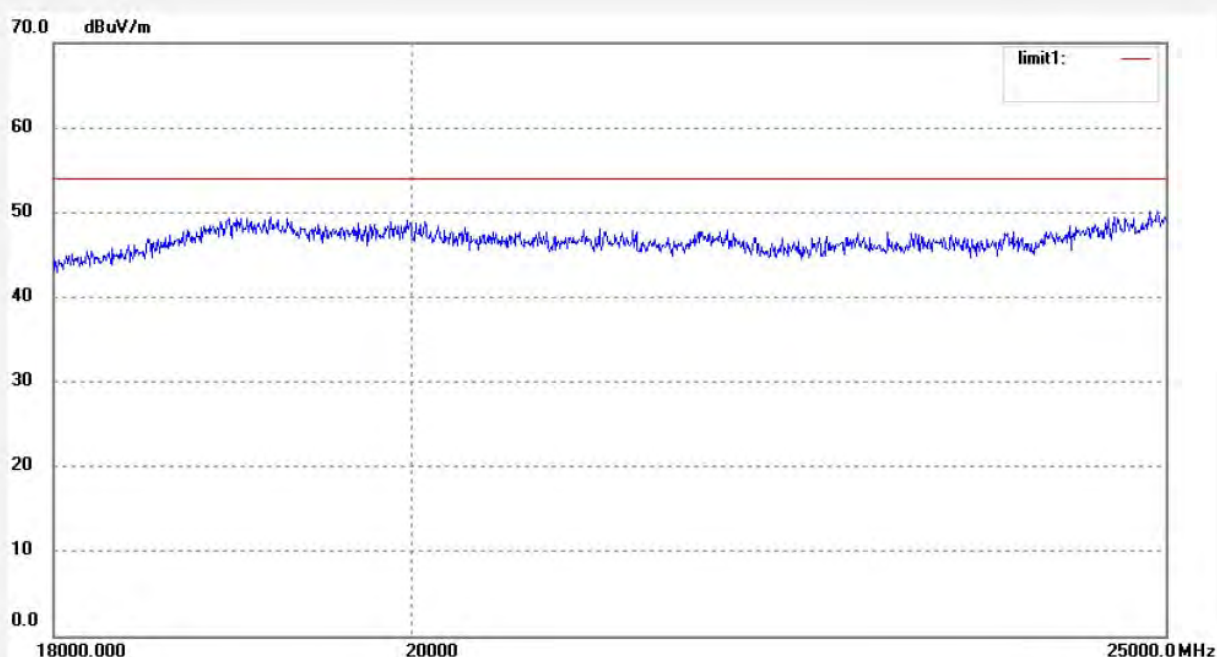

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #5921

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX Channel 9 (802.11n)

Model: P073A

Manufacturer: Xinwei

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/08/23/

Time: 12:15:08

Engineer Signature: Bob

Distance:


Note: Report No.:ATE20121979

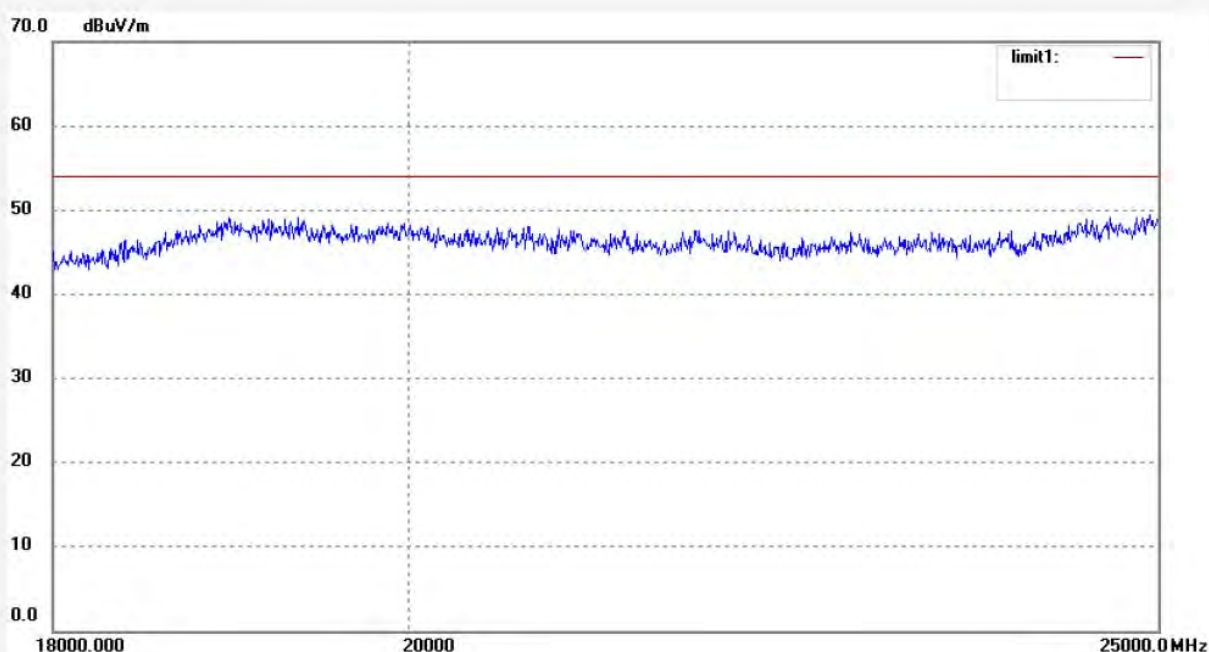

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1.Block Diagram of Test Setup



(EUT: Tablet PC)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.Tablet PC (EUT)

Model Number	:	P073A
Serial Number	:	N/A
Manufacturer	:	Xinwei Electronic Industrial Co., Ltd. Fujian

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

10.5.3.Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


10.5.4.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


TX 802.11b Channel Low 2412MHz (30MHz-1GHz)

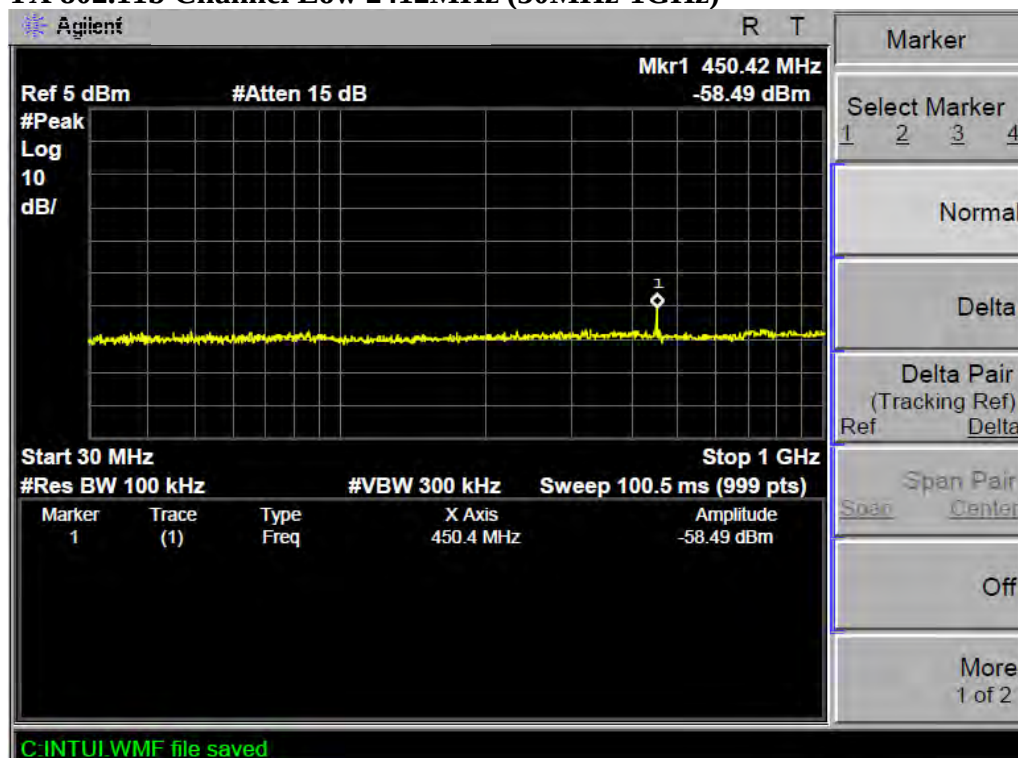


TX 802.11b Channel Low 2412MHz (1GHz-25GHz)

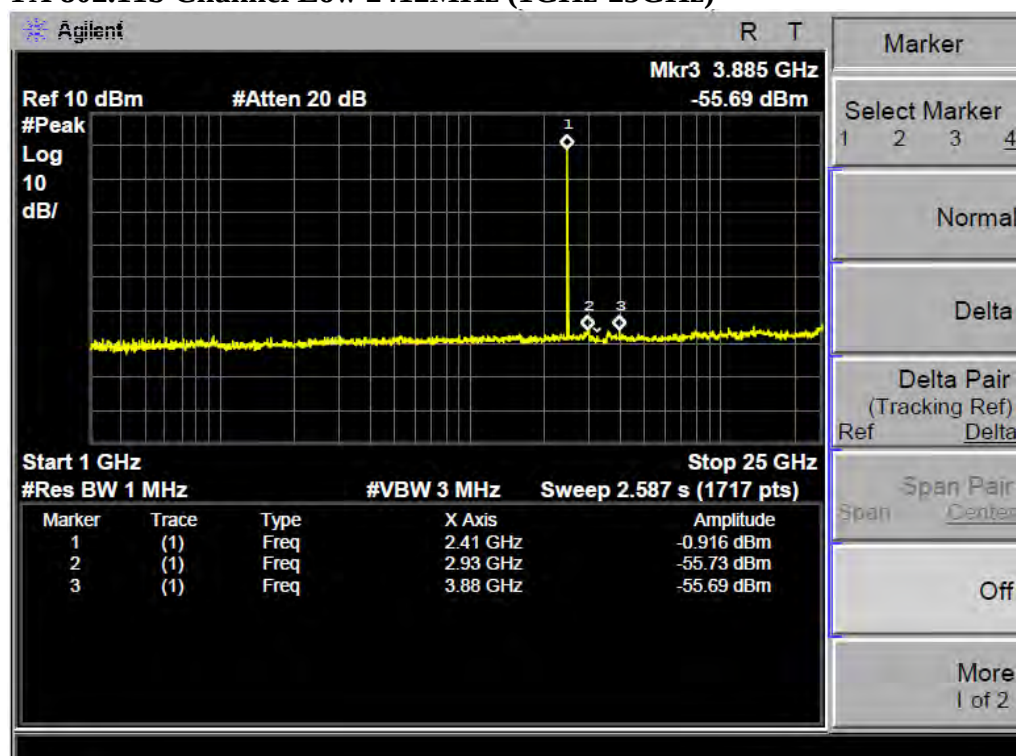


TX 802.11b Channel Middle 2437MHz (30MHz-1GHz)

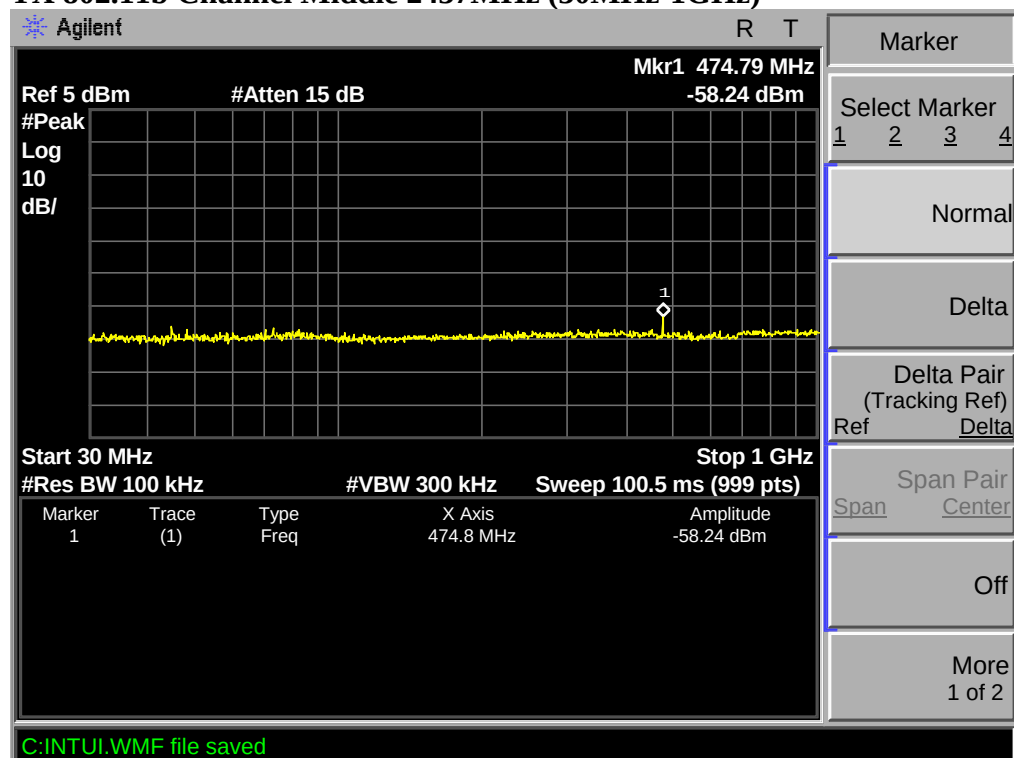


TX 802.11b Channel Middle 2437MHz (1GHz-25GHz)

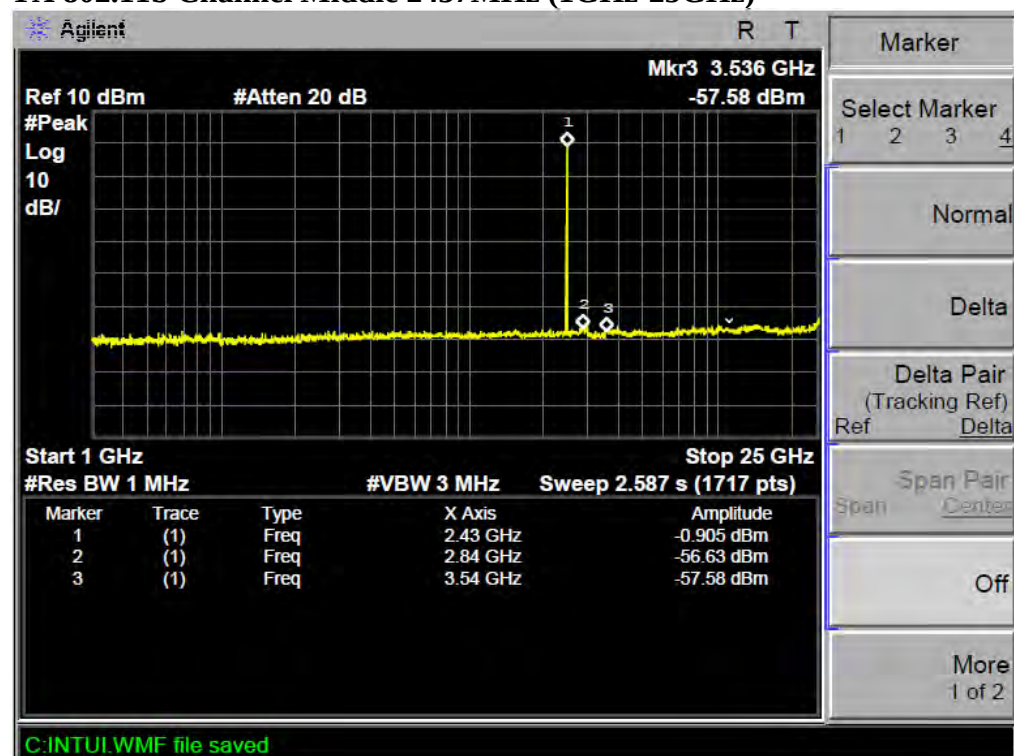


TX 802.11b Channel High 2462MHz (30MHz-1GHz)

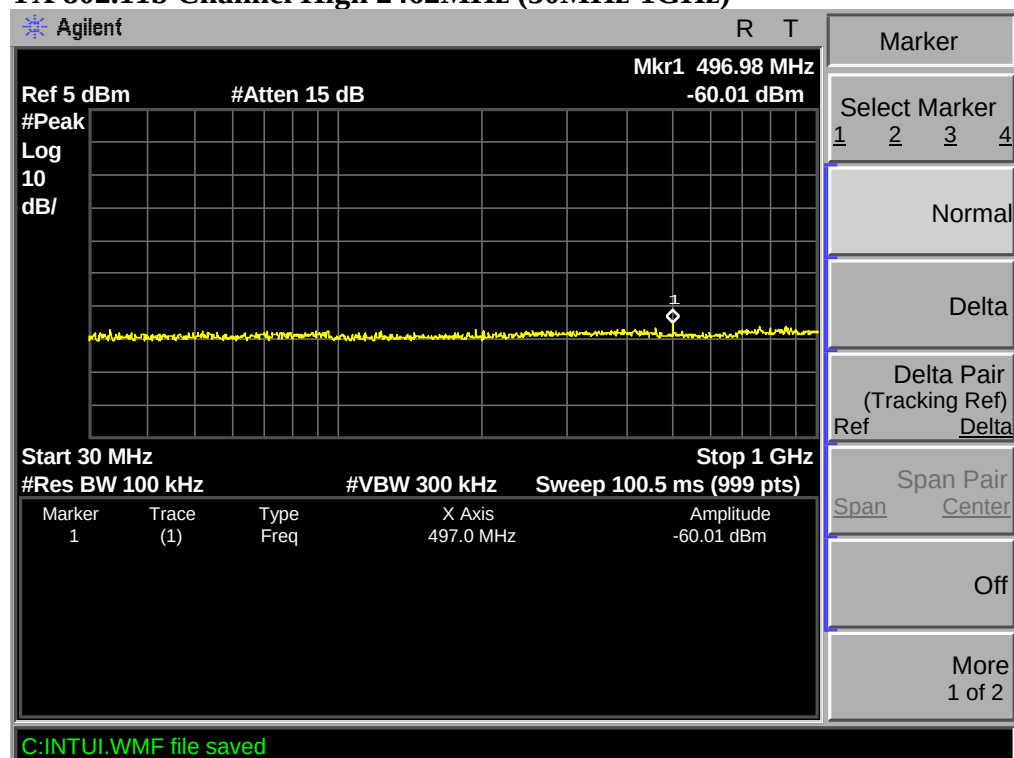


TX 802.11b Channel High 2462MHz (1GHz-25GHz)

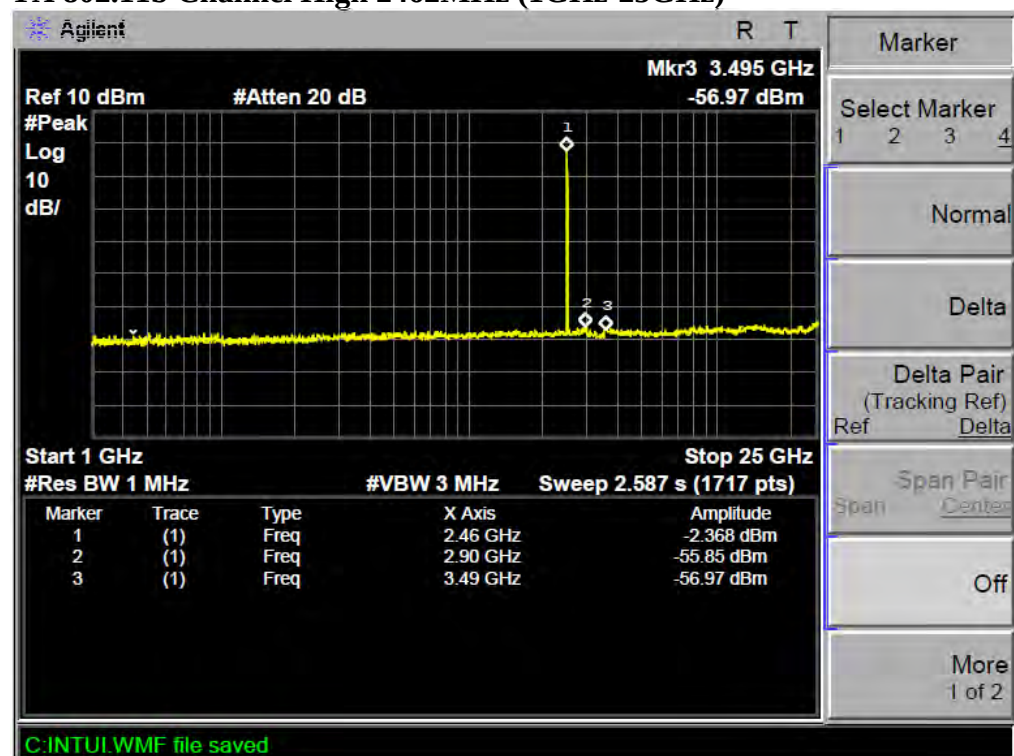


TX 802.11g Channel Low 2412MHz (30MHz-1GHz)

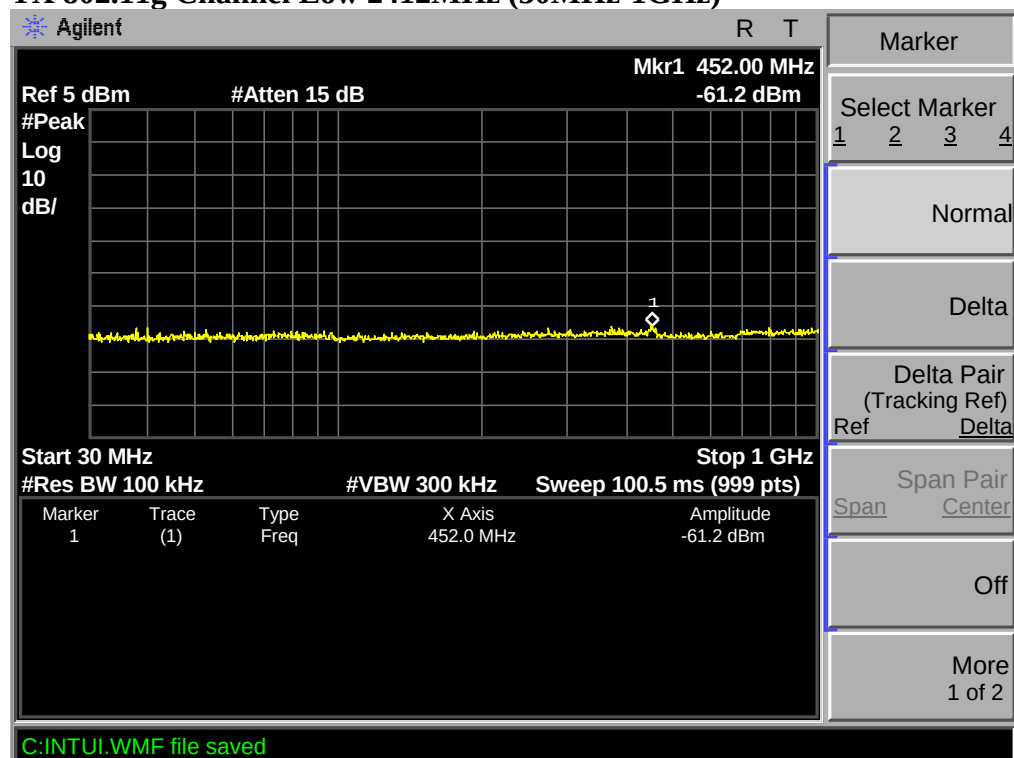


TX 802.11g Channel Low 2412MHz (1GHz-25GHz)

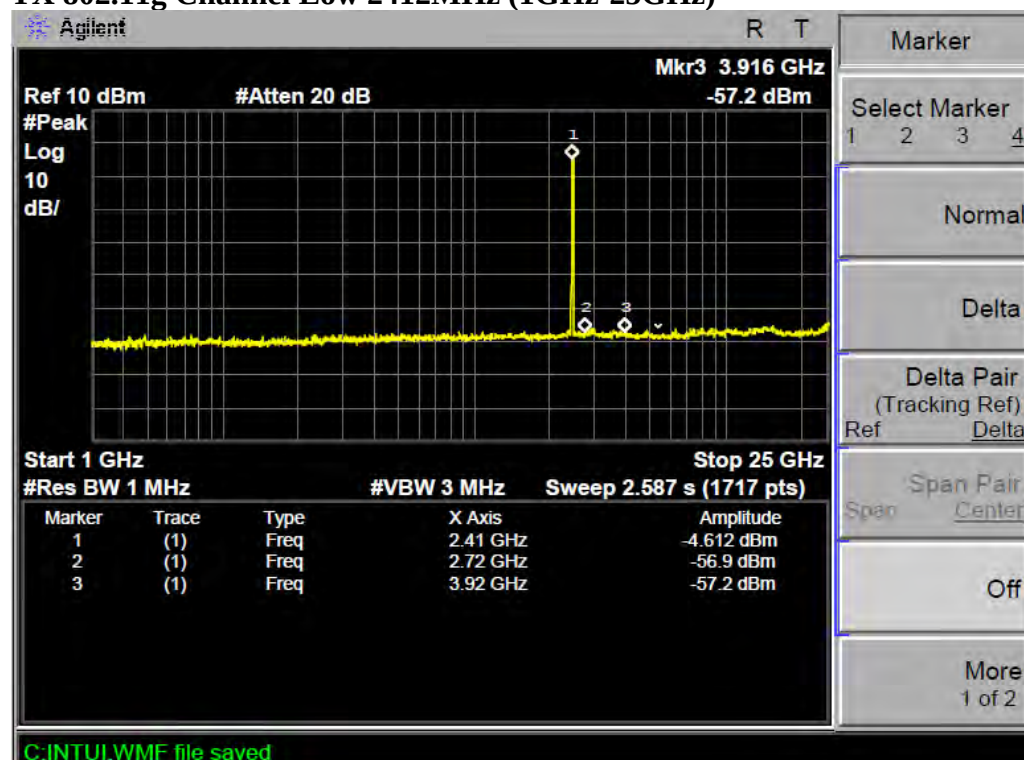


TX 802.11g Channel Middle 2437MHz (30MHz-1GHz)

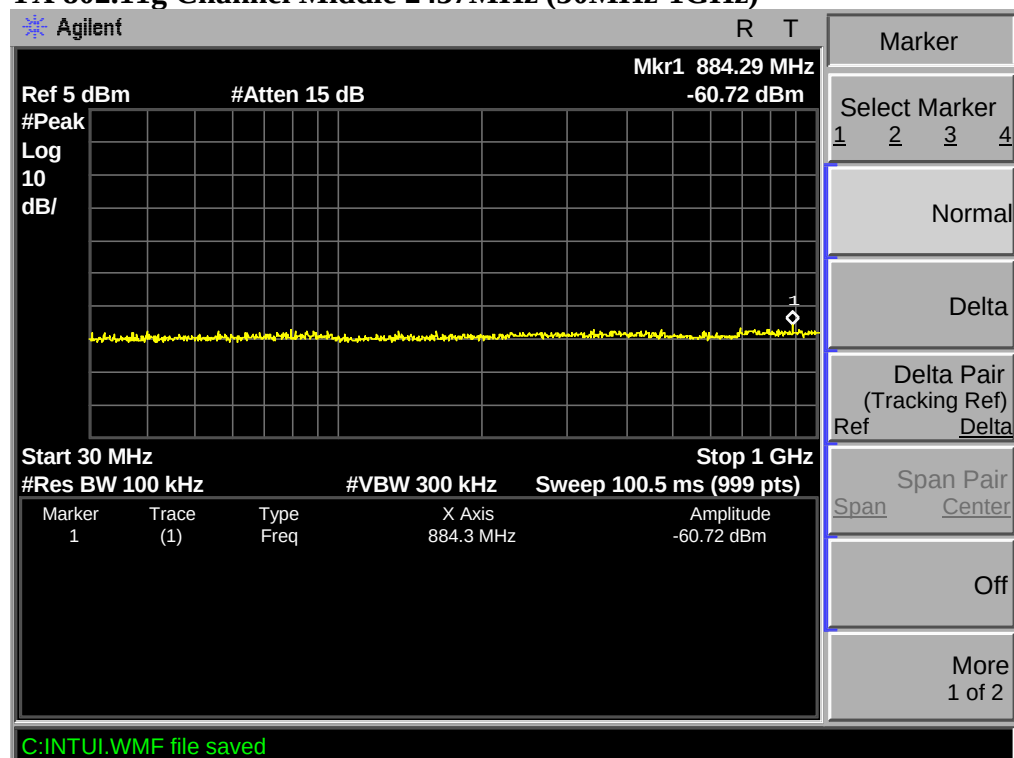


TX 802.11g Channel Middle 2437MHz

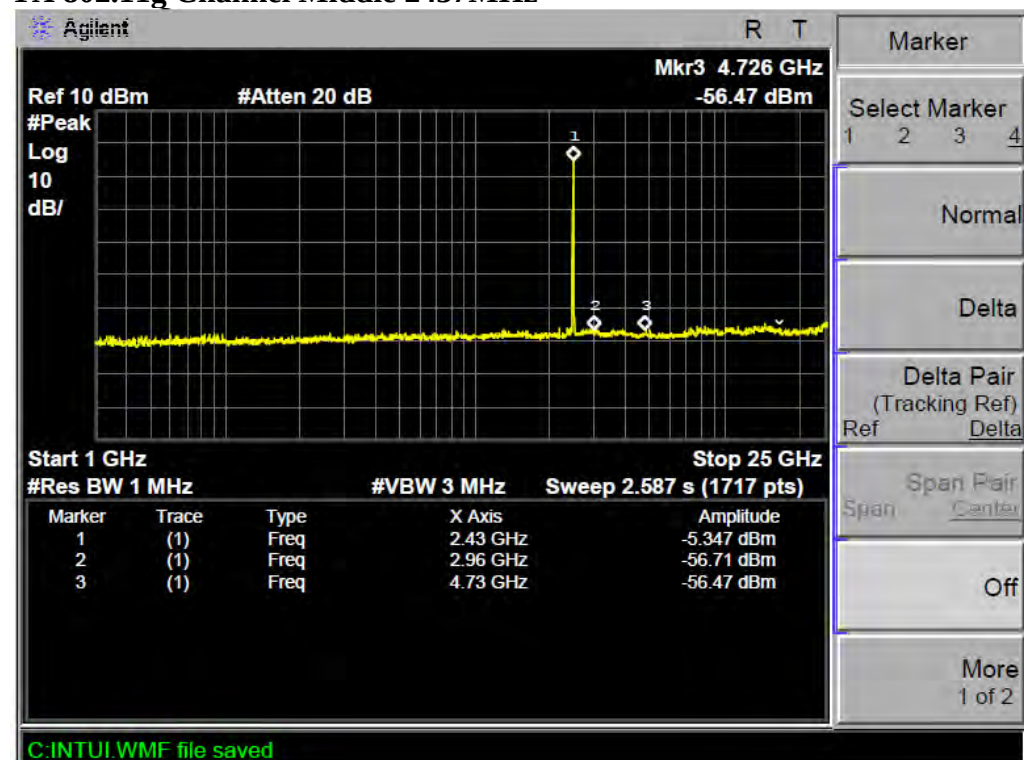


TX 802.11g Channel High 2462MHz (30MHz-1GHz)

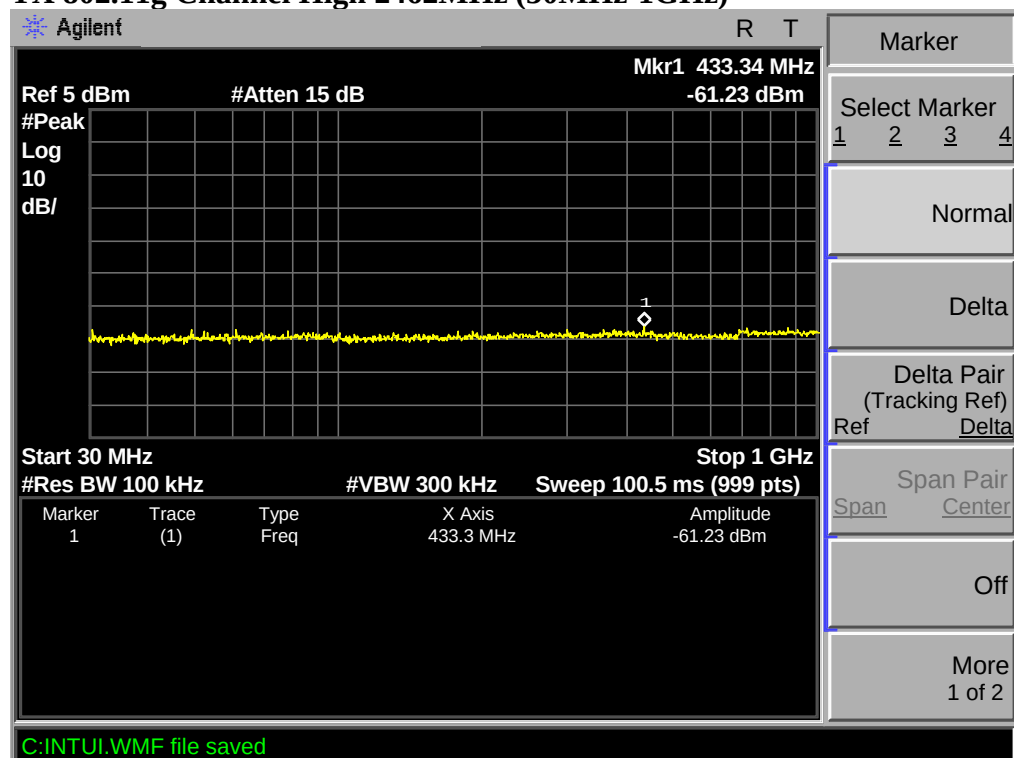


TX 802.11g Channel High 2462MHz (1GHz-25GHz)

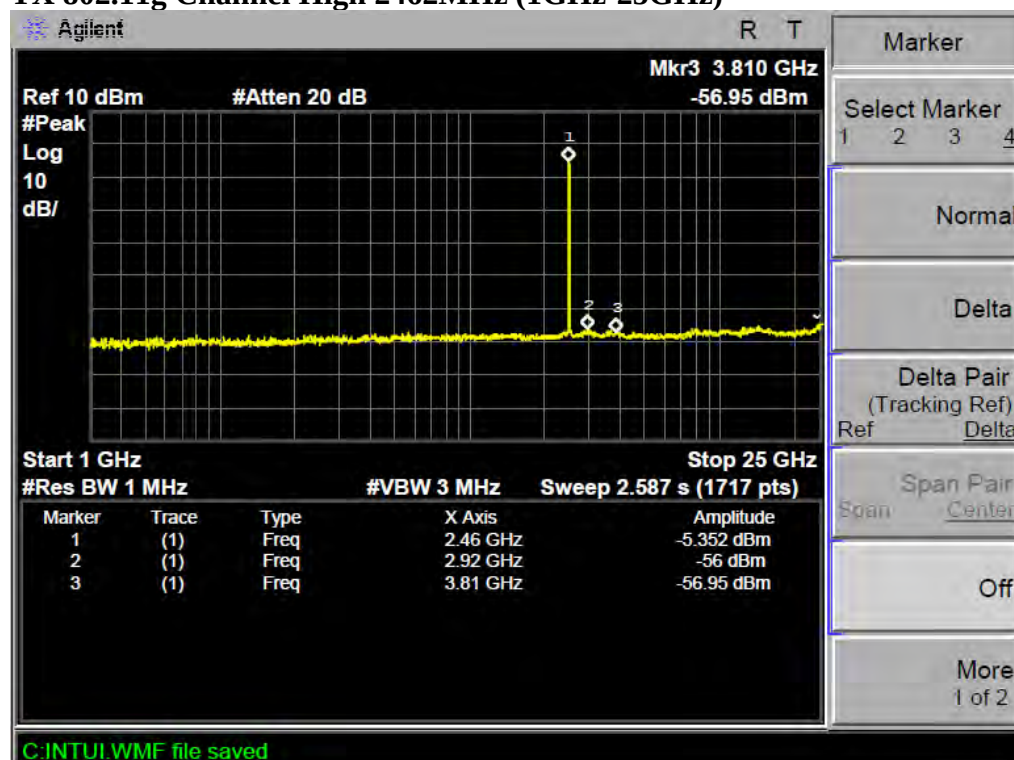


TX 802.11n Channel Low 2412MHz (20MHz) (30MHz-1GHz)

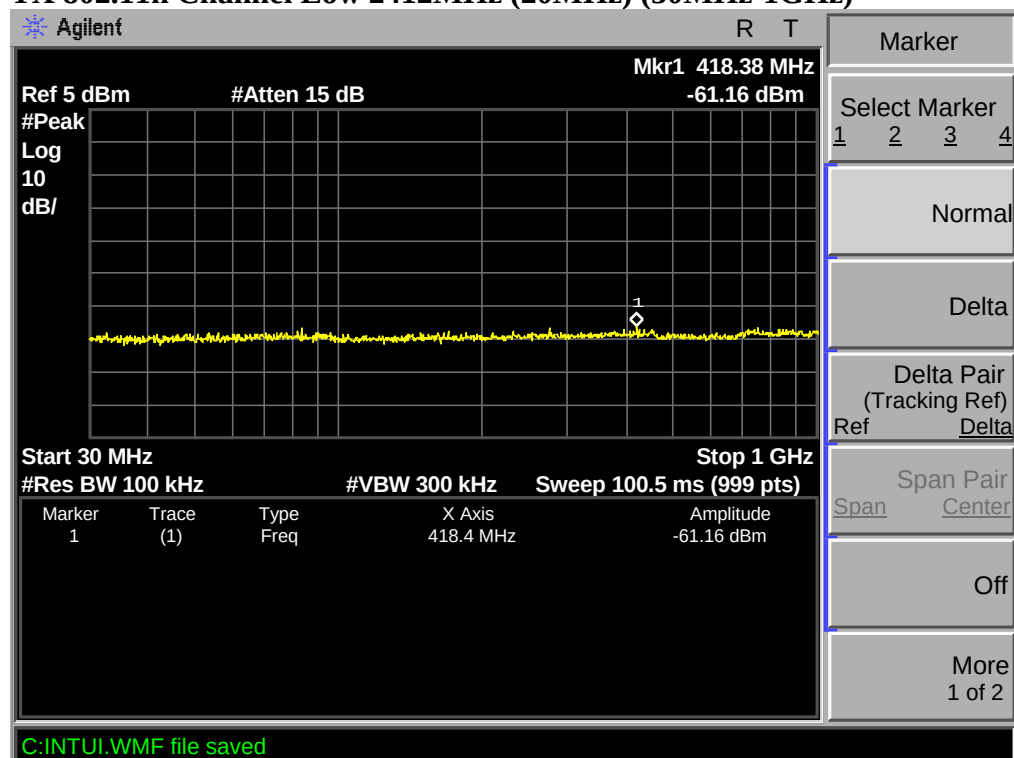


TX 802.11n Channel Low 2412MHz (20MHz) (1GHz-25GHz)

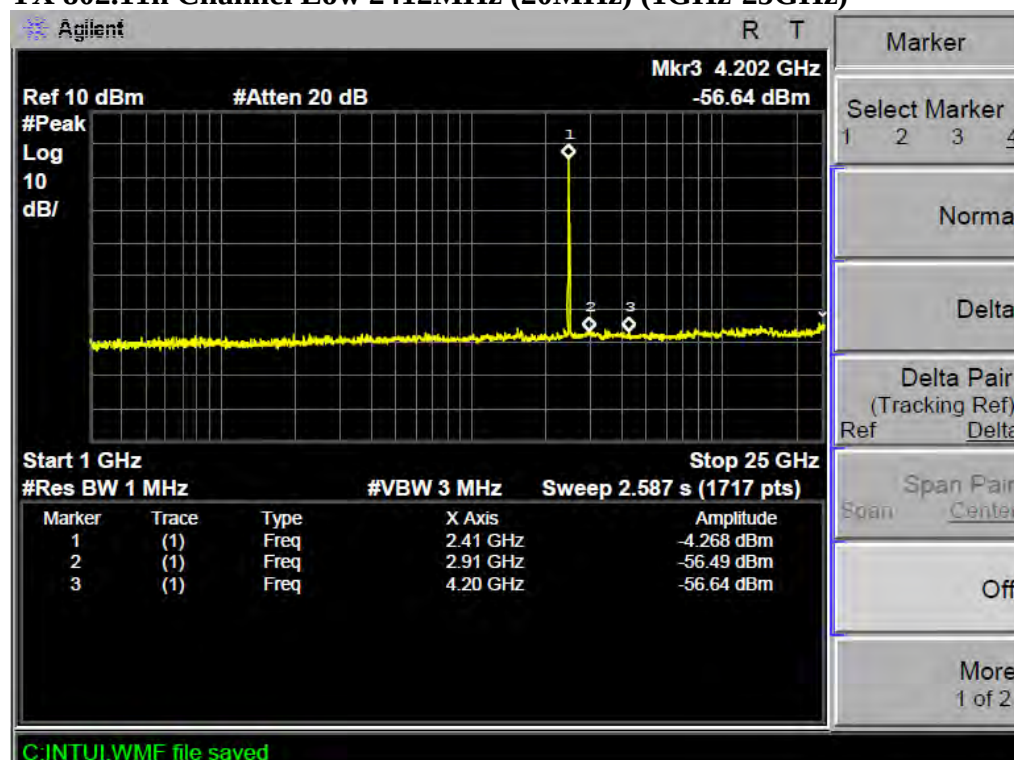


TX 802.11n Channel Middle 2437MHz (20MHz) (30MHz-1GHz)

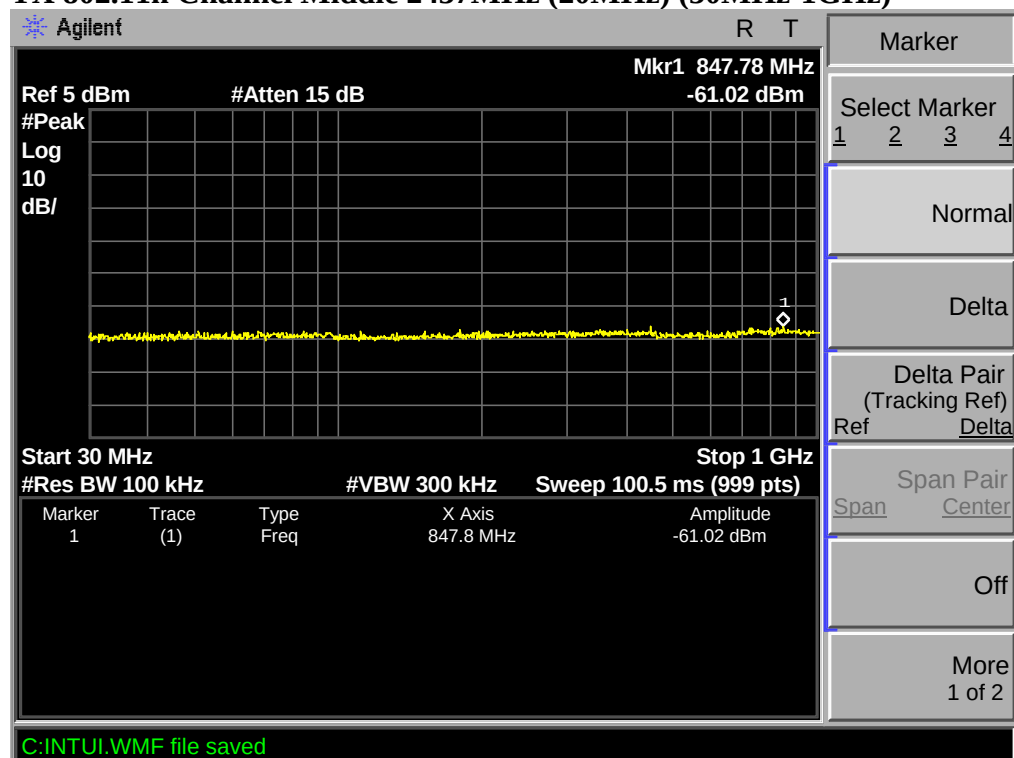


TX 802.11n Channel Middle 2437MHz (20MHz) (1GHz-25GHz)

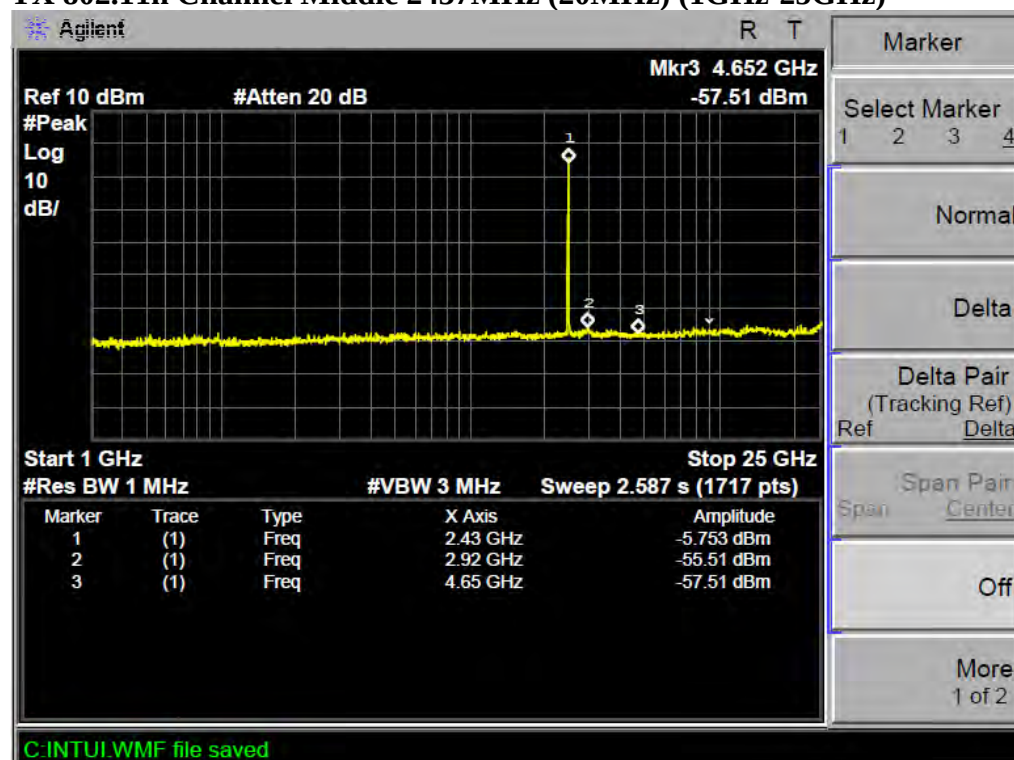


TX 802.11n Channel High 2462MHz (20MHz) (30MHz-1GHz)

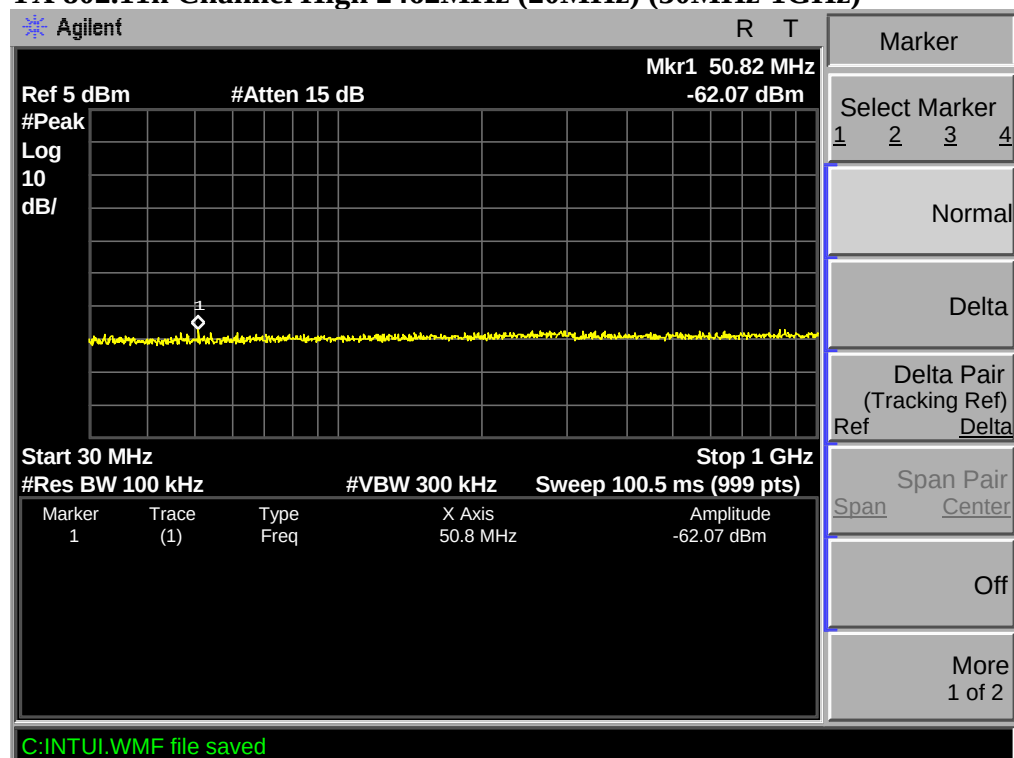


TX 802.11n Channel High 2462MHz (20MHz) (1GHz-25GHz)

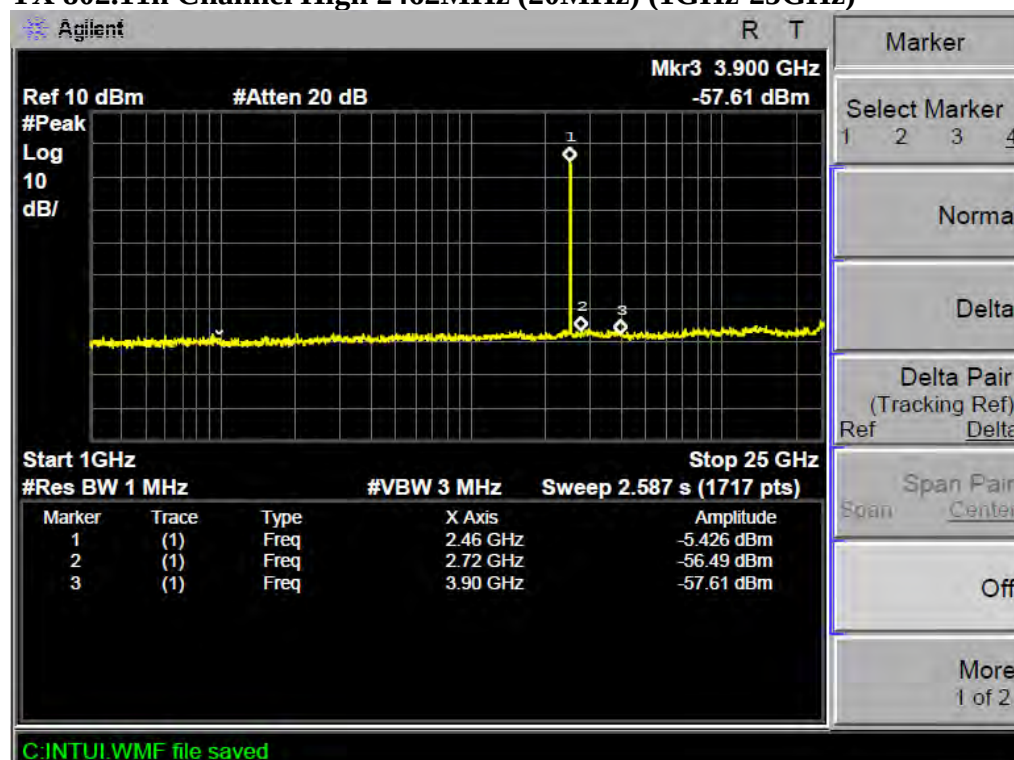


TX 802.11n Channel Low 2422MHz (40MHz) (30MHz-1GHz)

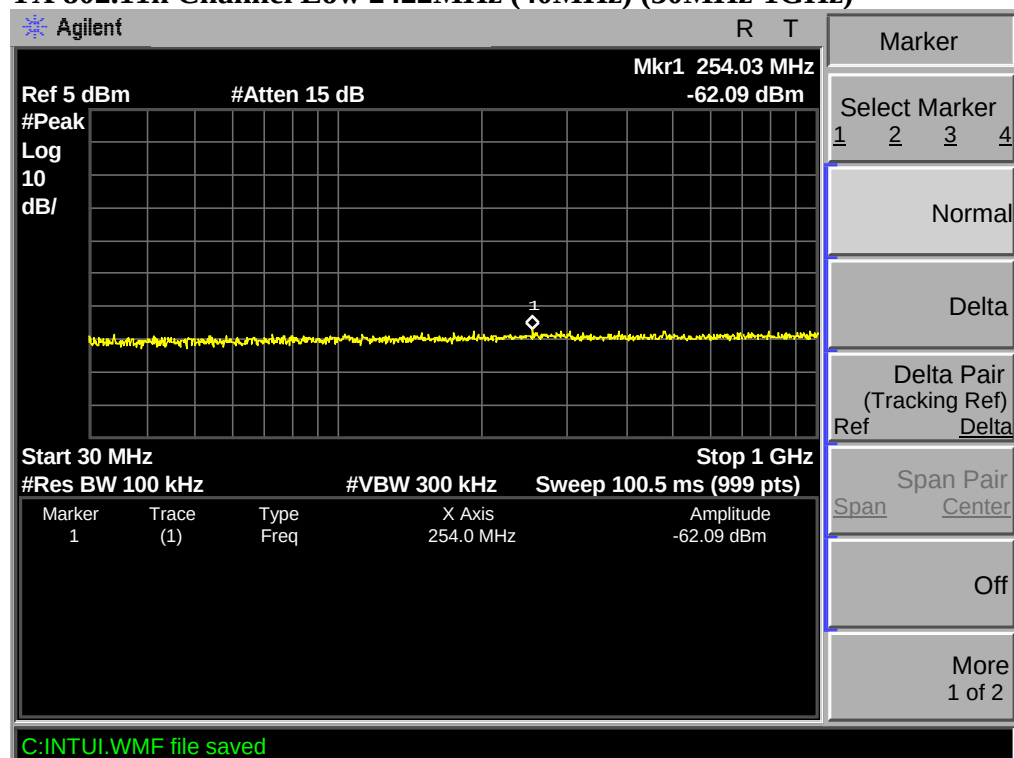


TX 802.11n Channel Low 2422MHz (40MHz) (1GHz-25GHz)

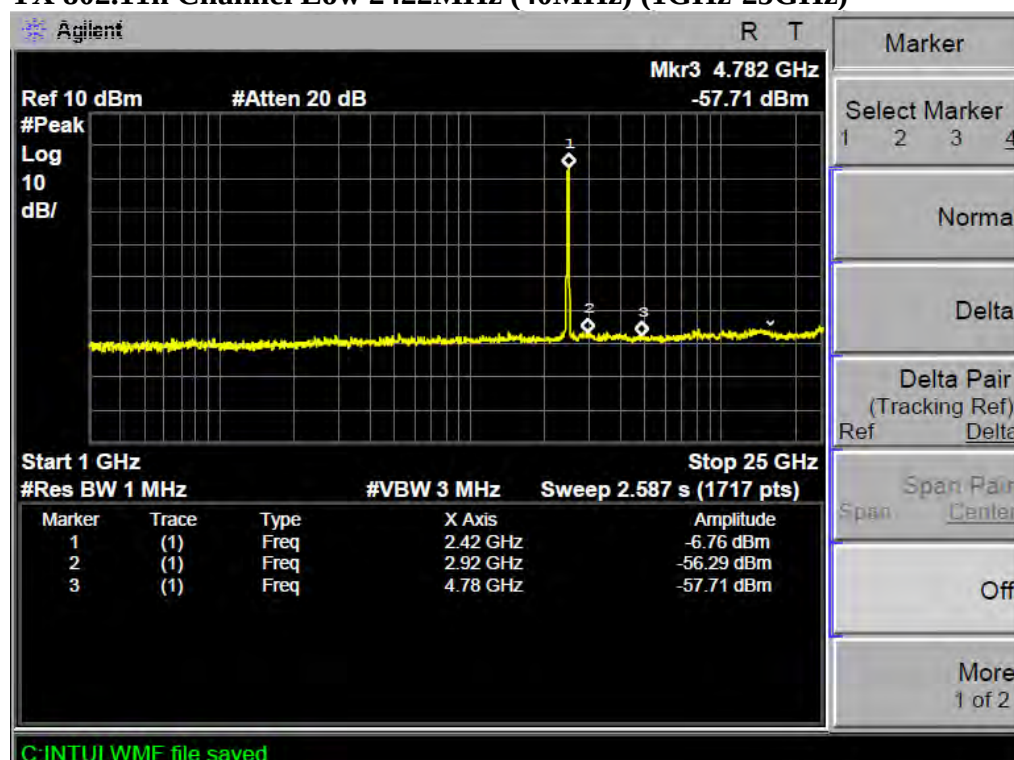


TX 802.11n Channel Middle 2437MHz (40MHz) (30MHz-1GHz)

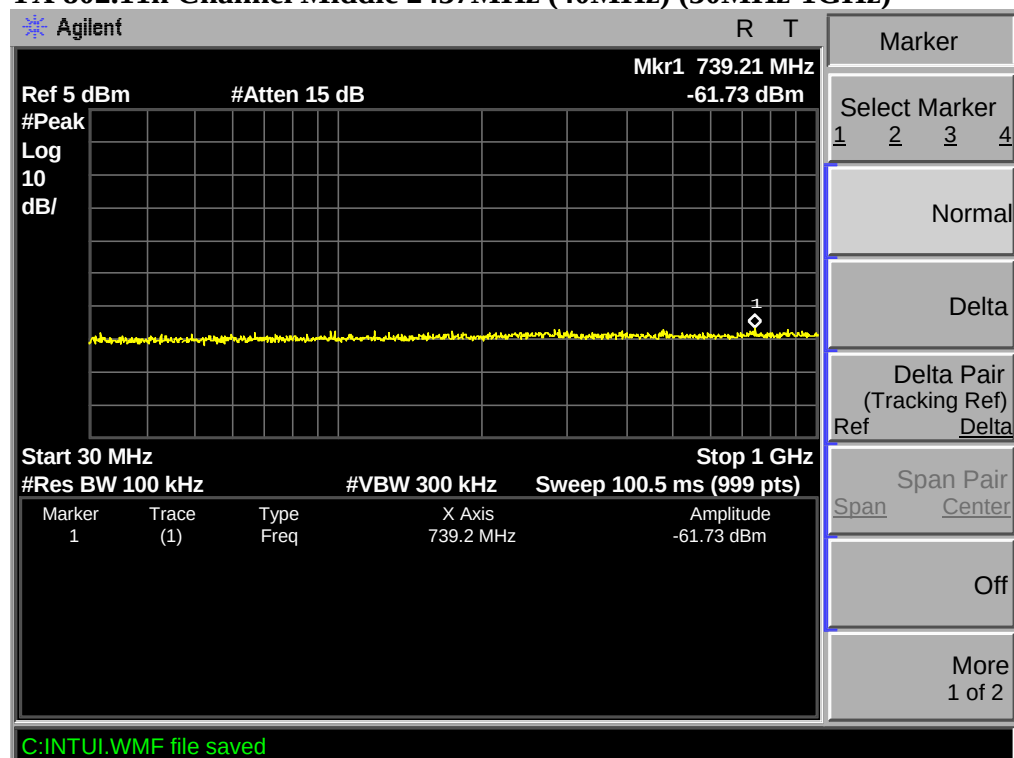


TX 802.11n Channel Middle 2437MHz (40MHz) (1GHz-25GHz)

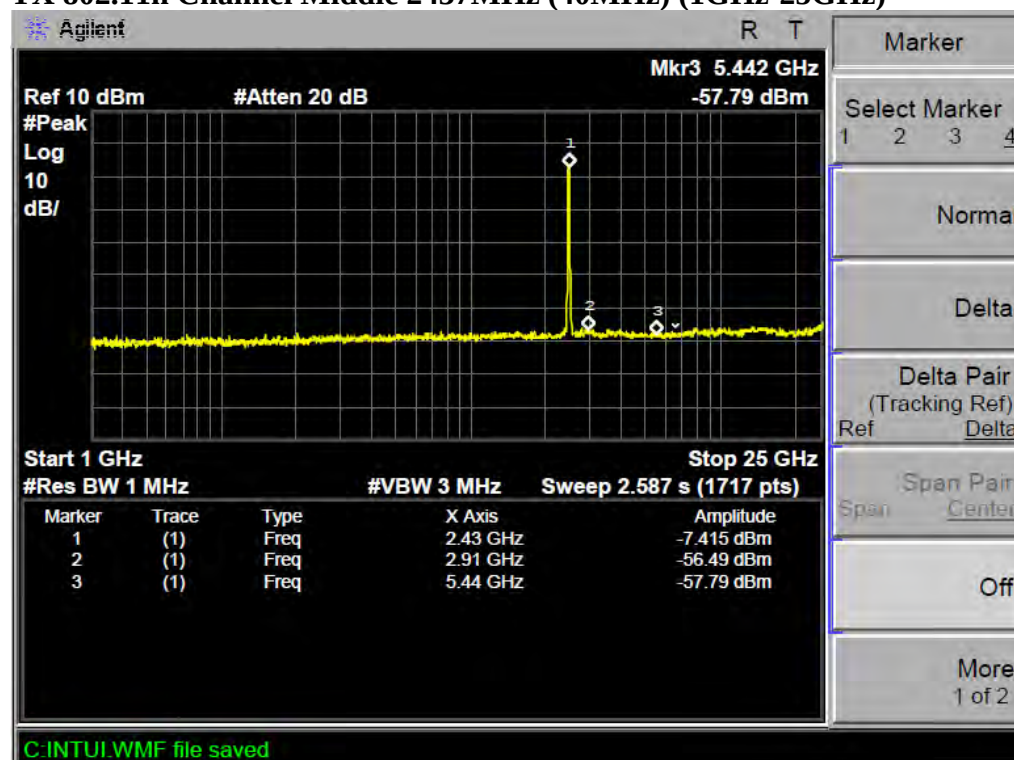

TX 802.11n Channel High 2452MHz (40MHz) (30MHz-1GHz)

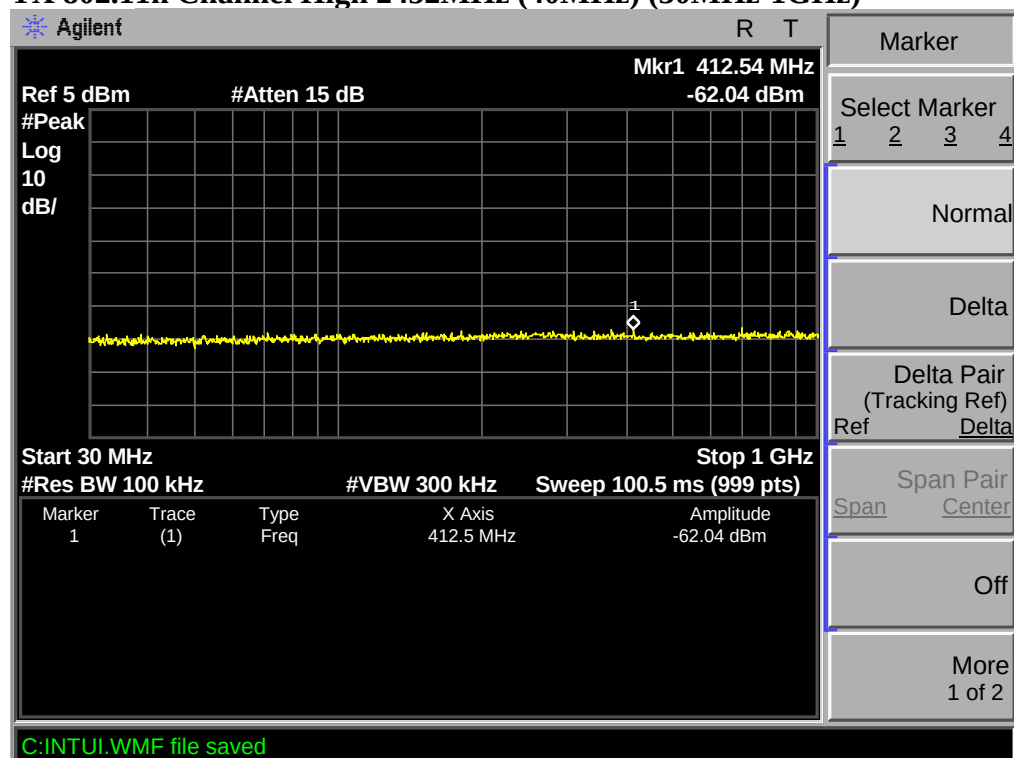


TX 802.11n Channel High 2452MHz (40MHz) (1GHz-25GHz)

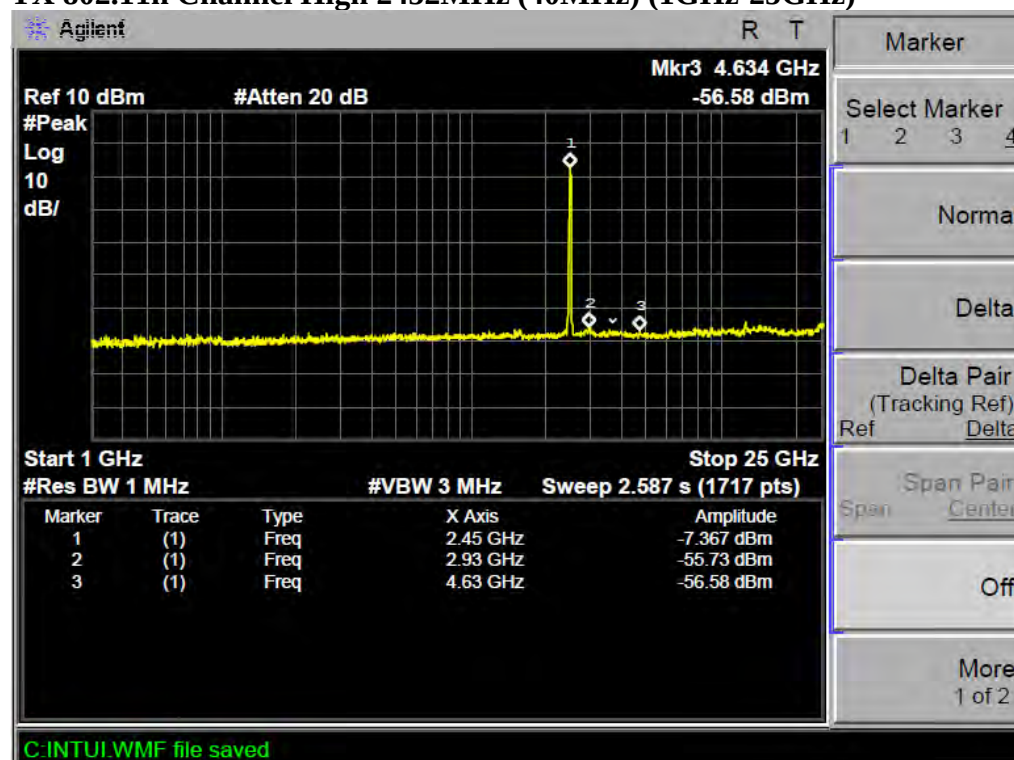

11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)


11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators



(EUT: Tablet PC)

11.1.2.Shielding Room Test Setup Diagram

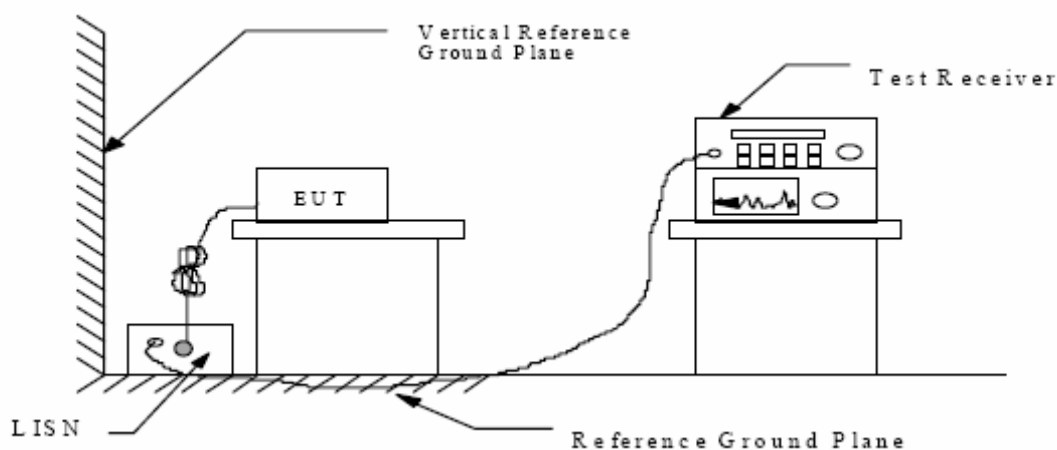

(EUT: Tablet PC)

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1.Tablet PC (EUT)

Model Number	:	P073A
Serial Number	:	N/A
Manufacturer	:	Xinwei Electronic Industrial Co., Ltd. Fujian

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

11.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>August 23, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Tablet PC</u>	Humidity:	<u>50%</u>
Model No.:	<u>P073A</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>Tx</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.224490	39.70	63	-23.0	QP	Neutral
3.715321	31.20	56	-24.8	QP	
8.321591	40.10	60	-19.9	QP	
0.171121	29.20	55	-25.7	AV	
3.760084	24.80	46	-21.2	AV	
8.288437	33.70	50	-16.3	AV	
0.208092	42.30	63	-21.0	QP	Live
0.546782	36.80	56	-19.2	QP	
3.443942	31.20	56	-24.8	QP	
0.227194	32.20	53	-20.4	AV	
0.529596	27.50	46	-18.5	AV	
2.328906	22.00	46	-24.0	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART15 15.207(a)**

EUT: Tablet PC M/N:P073A
 Manufacturer: Xinwei
 Operating Condition: TX
 Test Site: 1#Shielding Room
 Operator: Bob
 Test Specification: L 120V/60Hz
 Comment: Mains port
 Report NO.:ATE20121979

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

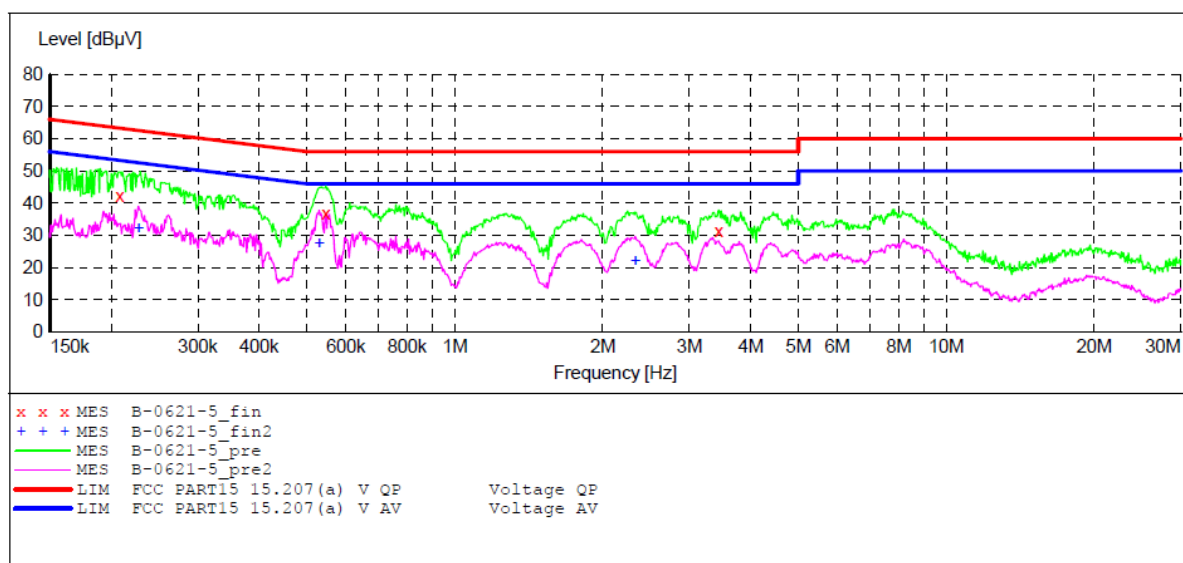**MEASUREMENT RESULT: "B-0621-5_fin"**

8/23/2012 3:58PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.208092	42.30	11.3	63	21.0	QP	L1	GND
0.546782	36.80	12.0	56	19.2	QP	L1	GND
3.443942	31.20	11.5	56	24.8	QP	L1	GND

MEASUREMENT RESULT: "B-0621-5_fin2"

8/23/2012 3:58PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.227194	32.20	11.3	53	20.4	AV	L1	GND
0.529596	27.50	12.0	46	18.5	AV	L1	GND
2.328906	22.00	11.6	46	24.0	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART15 15.207(a)**

EUT: Tablet PC M/N:P073A
 Manufacturer: Xinwei
 Operating Condition: TX
 Test Site: 1#Shielding Room
 Operator: Bob
 Test Specification: N 120V/60Hz
 Comment: Mains port
 Report NO.: ATE20121979

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 150.0 kHz	Frequency 30.0 MHz	Step Width 0.8 %	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

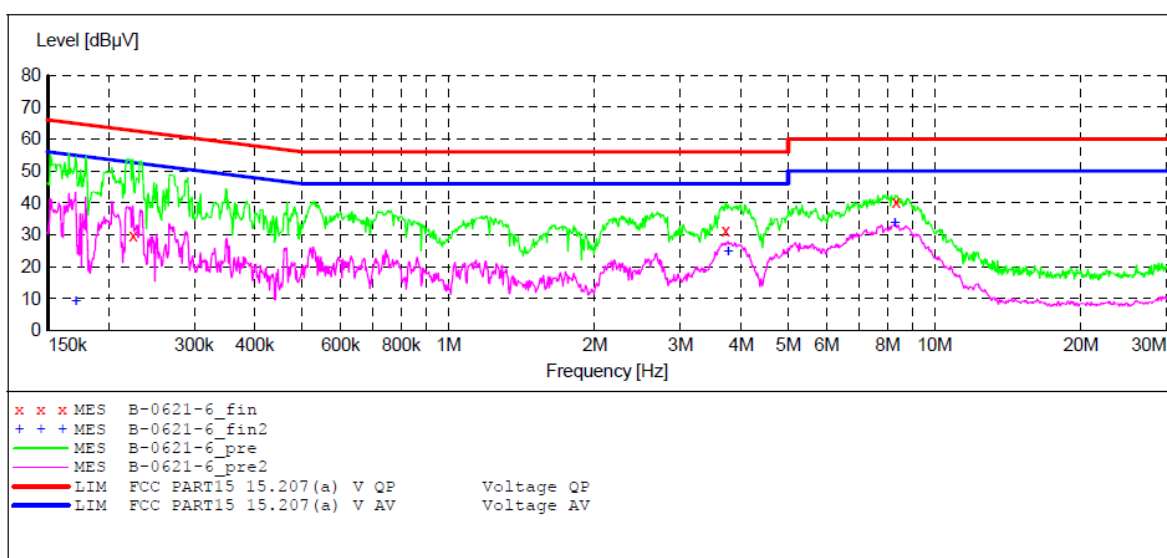**MEASUREMENT RESULT: "B-0621-6_fin"**

8/23/2012 4:01PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.224490	39.70	11.3	63	23.0	QP	N	GND
3.715321	31.20	11.5	56	24.8	QP	N	GND
8.321591	40.10	11.3	60	19.9	QP	N	GND

MEASUREMENT RESULT: "B-0621-6_fin2"

8/23/2012 4:01PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.171121	29.20	11.1	55	25.7	AV	N	GND
3.760084	24.80	11.5	46	21.2	AV	N	GND
8.288437	33.70	11.3	50	16.3	AV	N	GND


12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

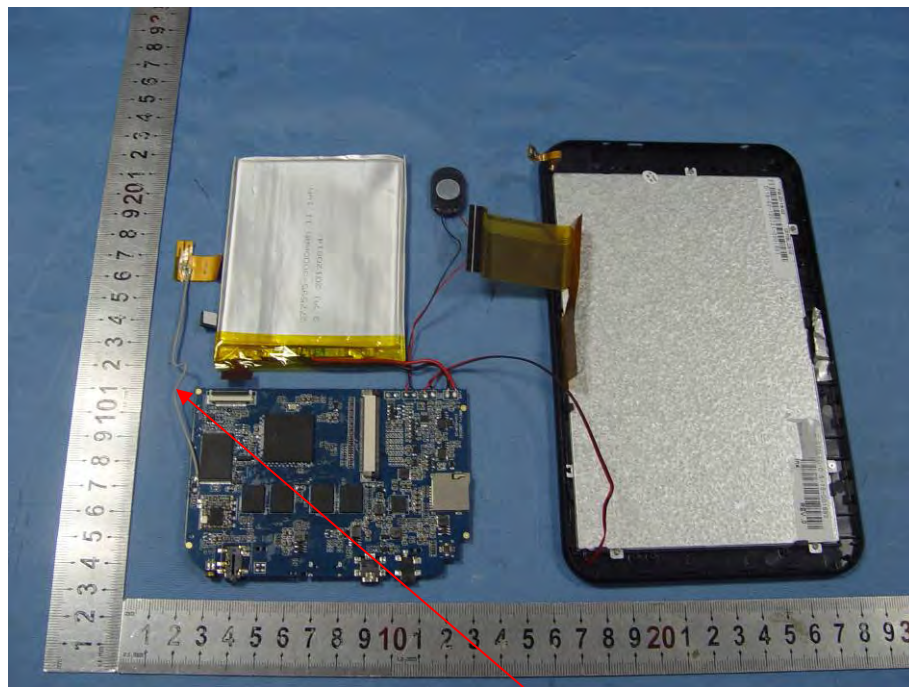

Antenna