
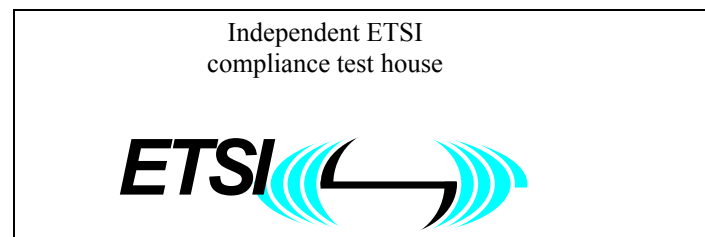


Radio Satellite Communication
Untertürkheimer Straße 6–10, D-66117 Saarbrücken,
Telephone +49 (0) 681 598- 0, Fax +49 (0) 598 9075

Test report No.: 2-3605-01-03/04

This test report consists of 27 pages Page 1 (25)

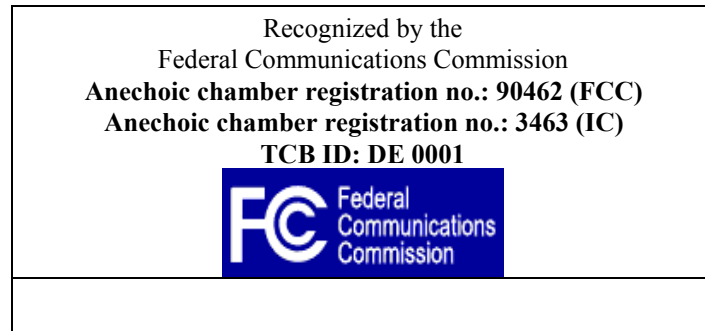

Accredited Bluetooth™ Test Facility (BQTF)

Test report No. : 2-3605-01-03/04
Standard : Part 15.231
Applicant : Nice SPA
Type : Plano series
FCC–ID No : PML433PL

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

Table of contents

1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test specifications

2 Technical test


- 2.1 Summary of test results
- 2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

| | | | |
|------------|------------|---------|---|
| 2004-04-23 | RSC - 8414 | Ames H. |  |
| Date | Section | Name | Signature |

Technical responsibility for area of testing:

| | | | |
|------------|------------|---------------|--|
| 2004-04-23 | RSC - 8412 | Hausknecht D. |  |
| Date | Section | Name | Signature |

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 0

Telefax : + 49 681 598 - 9075

E-mail : info@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-081/94-D0

Listed by: Federal Communications Commission (FCC)

Identification/Registration No: 90462

Anechoic chamber registration no.: 3463 (IC)

Accredited BluetoothTM Test Facility (BQTF)

BLUETOOTHTM is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Nice SpA

Street : Viia Pezza Alltta,, 13 Z..II.. Rusttiignè

City : I-31046 Oderzo (TV)

Country : Italy

Telephone: +39 0422 853838

Fax : +39 0422 853585

E-mail : info@niceforyou.com

Contact person:

Name : Mr. Oscar Marchetto

Telephone : +39 0422 853838

Telex : +39 0422 853585

E-mail : o.marchetto@niceforyou.com

1.4 Application details

Date of receipt of test item : 2004-04-08

Date of test : 2004-04-21

Person(s) who have been present during the test : Mr. Paolo Campagnaro

1.5 Test item

Type of equipment : Remote Control Transmitter
Type designation : **Plano Series** consists of:
Plano 1/U (wall 3 buttons transmitter)
Plano 4/U (wall 5 buttons transmitter)
Plano 6/U (wall 5 buttons transmitter)
Manufacturer : Same as applicant
Street :
City :
Country :
Serial number : - / -

Additional information :

Frequency : 433.92 MHz
Type of modulation : 10K0A1D
Channel spacing : >25 kHz
Number of channels : 1
Antenna : Integral printed board antenna
Max. ERP : Peak: 81.3 dB μ V/m ; Average: 78.7 dB μ V/m at 3m distance
Power supply : 6.0 V DC by 2 x 3.0 VDC Li-Mn Batteries
Temperature range : -10°C - +55°C
FCC ID : PML433PL

**1.6 Test specifications: FCC Part 15 §15.209
FCC Part 15 §15.231
CANADA RSS-210**

2 Technical test

2.1 Summary of test results

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual re-measurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

The detector function and selection of bandwidth are according ANSI C63.2-1996 item 8.2.1 and ANSI C63.4-1992 Item 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, wave-guide horn

All measurement settings are according to FCC 15.35, 15.205, 15.209,15.231.

The product fulfills also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

2.2 Test report

TEST REPORT

Test report no. : 2-3085-01-01/02

TEST REPORT REFERENCE


LIST OF MEASUREMENTS

| Paragraph | PARAMETER TO BE MEASURED | PAGE |
|-------------------------------|-------------------------------------|-------------|
| TRANSMITTER PARAMETERS | | |
| § 15.231 (e) | Timing of the transmitter | 9 |
| § 15.231 (e) | Emission limitations | 11 |
| § 15.231 (c) | Occupied bandwidth | 15 |
| | Test equipment listing | 19 |
| | Photographs of the equipment | 21 |

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

| | | | | | |
|--|--------------|---------------|---------|---------|----------|
| | Delta 1 [T1] | RBW | 200 kHz | RF Att | 10 dB |
| | Ref Lvl | 0.48 dB | VBW | 200 kHz | |
| | -20 dBm | 581.442886 ms | SWT | 3 s | Unit dBm |

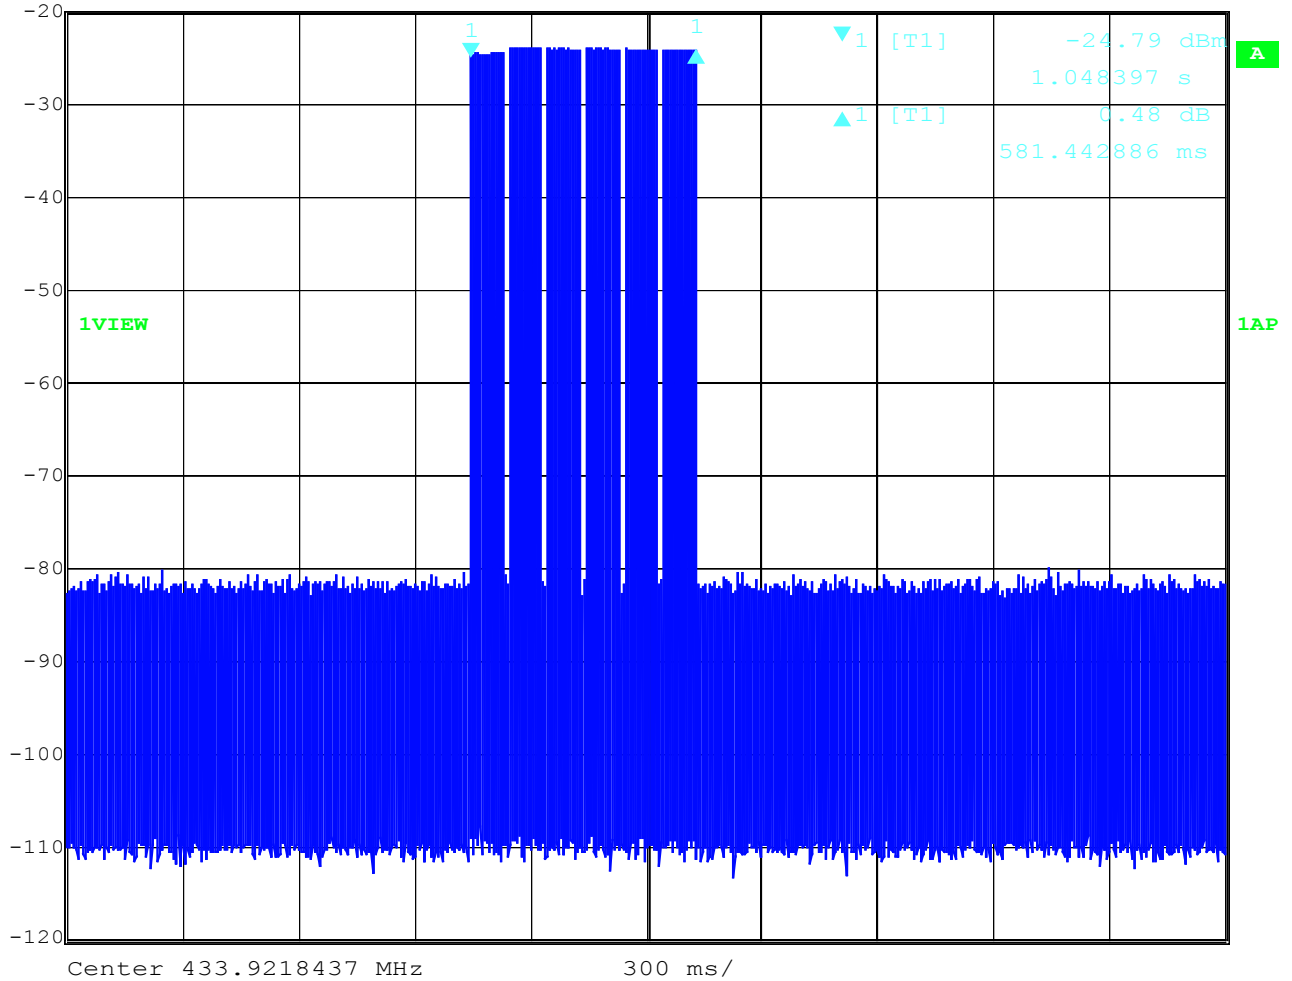

Date: 21.APR.2004 13:12:06


Minimum transmit time: 581.4 ms
 Transmit button pressed shorter than 1 s.

So the product complies with the FCC requirements.

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

| | | | | | |
|--|---------------|--------------|---------|---------|----------|
| | Marker 1 [T1] | RBW | 200 kHz | RF Att | 10 dB |
| | Ref Lvl | -26.03 dBm | VBW | 200 kHz | |
| | -20 dBm | 24.529058 ms | SWT | 180 ms | Unit dBm |

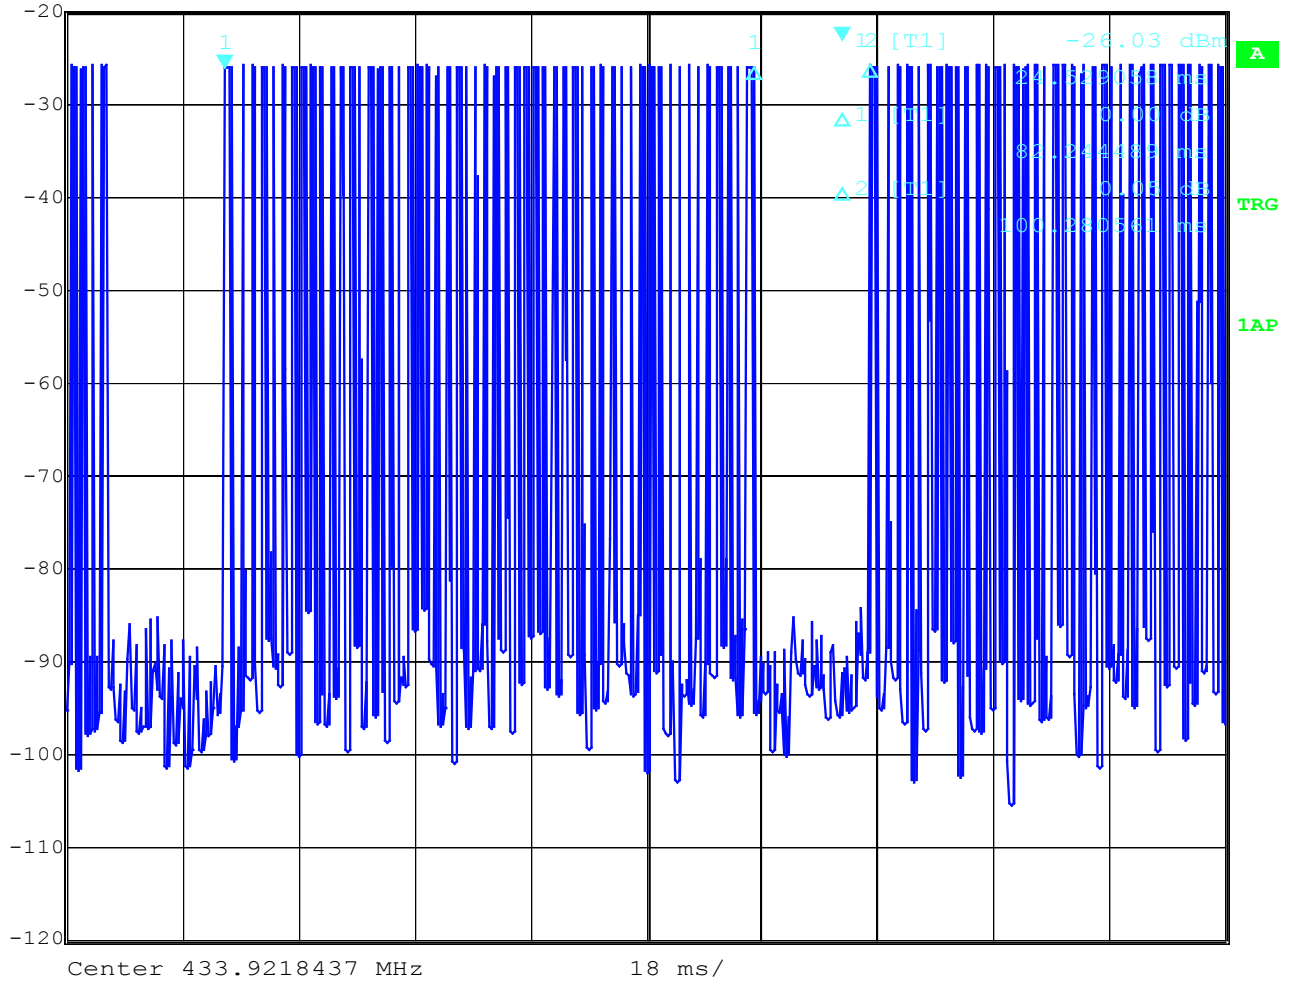


Date: 21.APR.2004 13:00:36

Remark: The pulse train length is ~ 100ms. (Including gap)
The ON – time of transmitter is ~ 82ms.
The OFF- time is 100ms – 80ms = ~ 18 ms

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

Transmit behavior after releasing the TX-Button

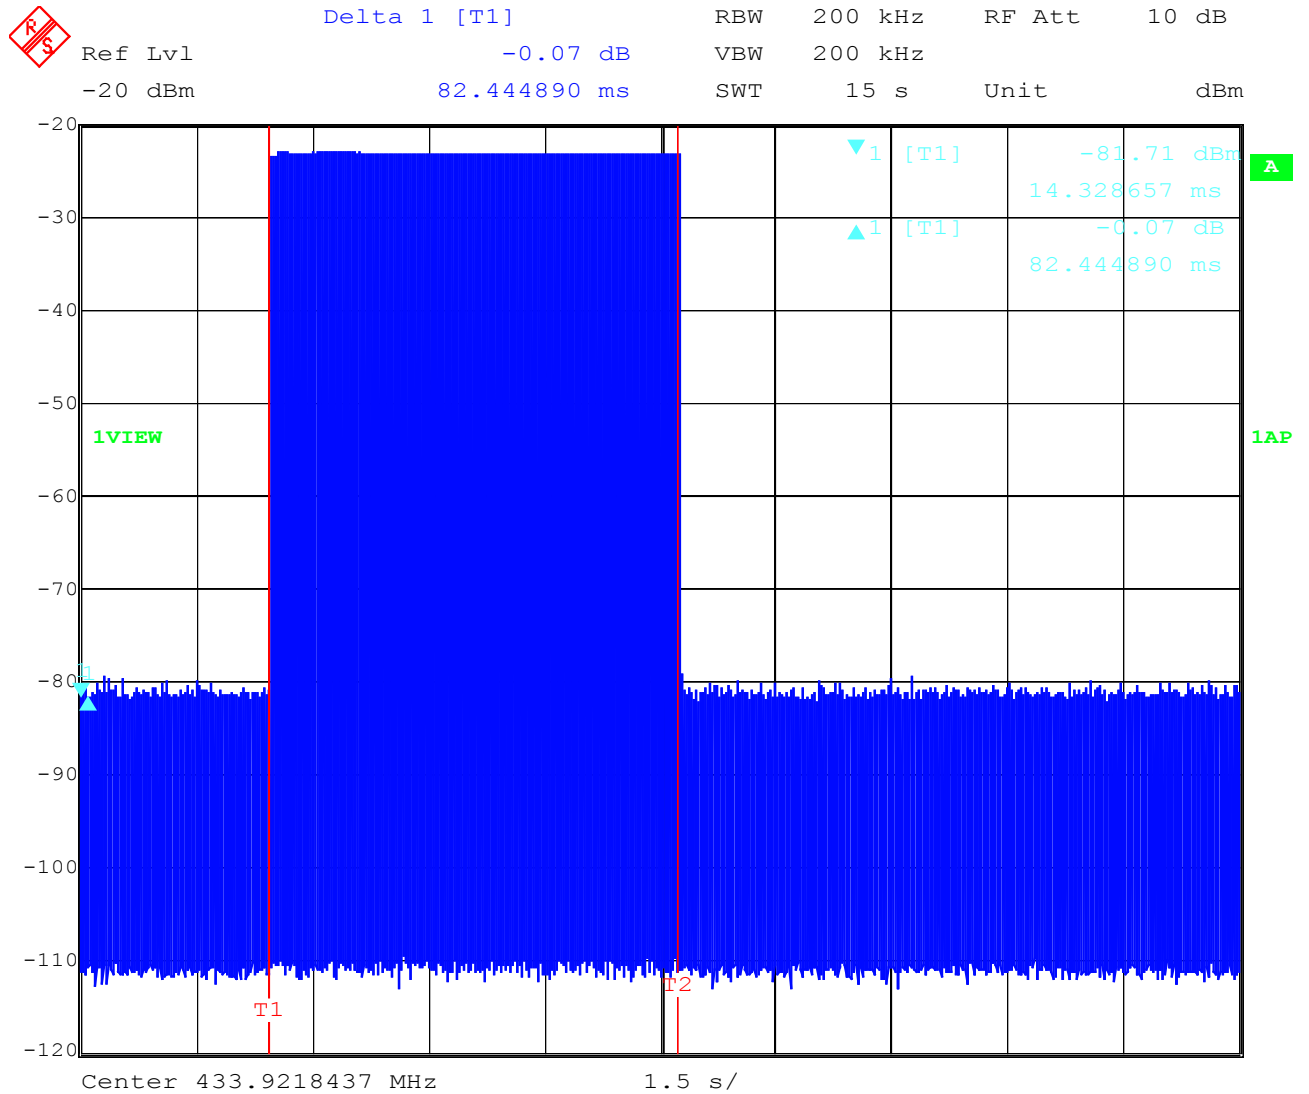

Date: 21.APR.2004 13:08:28

- T 1 : Press button
- T 2 : Release button

The transmitter stops transmitting immediately after releasing the button


So the product complies with the FCC requirements.

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

Typical pulse train of a signal

| | | | | | |
|--|--------------|--------------|---------|---------|-------|
| | Delta 1 [T1] | RBW | 200 kHz | RF Att | 10 dB |
| | Ref Lvl | 0.00 dB | VBW | 200 kHz | |
| | -20 dBm | 82.444890 ms | SWT | 110 ms | Unit |
| | | | | | dBm |

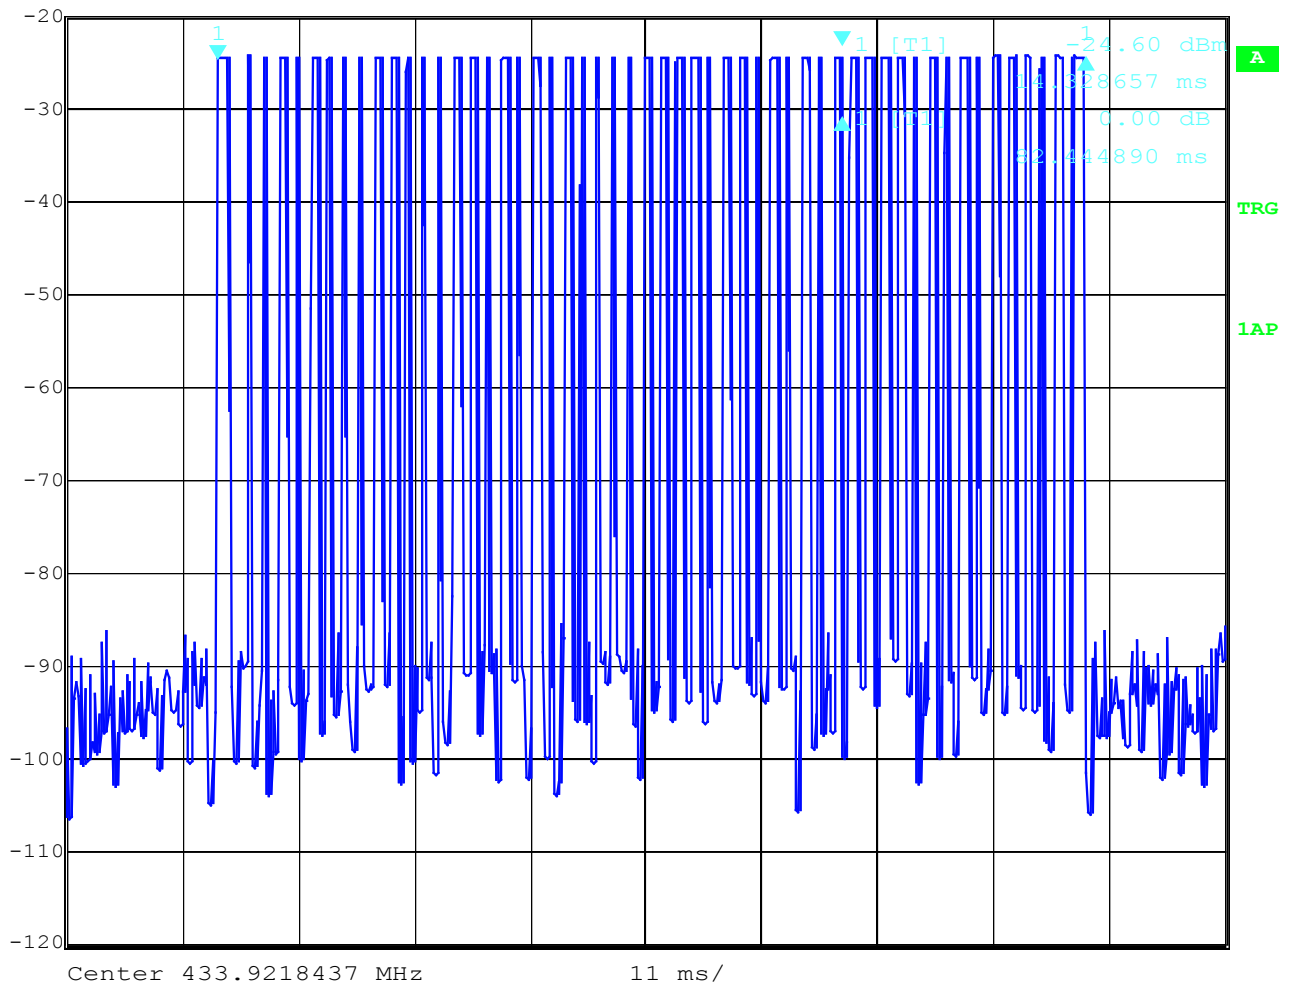

Date: 21.APR.2004 13:05:06

Duty Cycle:

During TX On time, the worst case is 66.6% TX On and 33.3% TX Off

Regarding to 100 ms, we have a TX-On time of ~82 ms

In this time we have a Duty Cycle of max. 66.6%

66.6% of 82 ms → 54.6 ms

So we have an average correction factor of $10 \log (0.533) = -2.62 \text{ dB}$

Radiated output power is 81.3 dBμV/m at 3m distance PEAK .

The calculated AVERAGE is 81.3 dBμV/m – 2.62 dB = 78.68 dBμV/m at 3m distance.

The limit for 433.9 MHz according to FCC15.231 is 80.8 dBμV/m.

So the product complies with the FCC requirements.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED : 65
 (for reference numbers see test equipment listing)

SPURIOUS EMISSION (radiated)

§ 15.247 (b) (1)

| EMISSION LIMITATIONS | | | | | |
|--------------------------------|--|---|---|----------------|---------------------|
| f (MHz) | amplitude of emission (dBµV/m) Average/QP | limit max. allowed emmission power | actual attenuation below frequency of operation (dB) | results | |
| 433,92 | 78.7 AV | 80.8 dBµV/m Average | | | Operating frequency |
| 867.8 | 41.7 AV | 20 dBc | 37.0 | | complies |
| 1301 | 49.2 AV | 20 dBc | 29.5 | | complies |
| 1736 | 47.2 AV | 20 dBc | 31.5 | | complies |
| 2169 | 44.6 AV | 20 dBc | 34.1 | | complies |
| 3037 | 48.0 AV | 20 dBc | 30.7 | | complies |
| | | | | | |
| | | | | | |
| | | | | | |
| Measurement uncertainty | | ± 3dB | | | |

So the product complies with the FCC requirements.

LIMITS


SUBCLAUSE § 15.247 (e)

| Fundamental Frequency (MHz) | Field Strength of the Fundamental (microvolts/meter) | Field Strength of Spurious Emissions (microvolts/meter) |
|------------------------------------|---|--|
| 40.66 – 40.70 | 1,000 / 60dBµV/m | 100 / 40 dBµV/m |
| 70 – 130 | 500 / 54 dBµV/m | 50 / 34 dBµV/m |
| 130 – 174 | 500, to 1,500 ** | 50 to 150 ** 34 – 43.5 dBµV/m |
| 174 – 260 | 1,500 / 63.5 dBµV/m | 150 / 43.5 dBµV/m |
| 260 – 470 | 1,500 to 5,000** | 150 to 500 ** 43.5 – 54.0 dBµV/m |
| Above 470 | 5,000 / 74 dBµV/m | 500 / 54 dBµV/m |

** linear interpolations



SPURIOUS EMISSION (radiated) < 30 MHz

§ 15.247 (b) (1)

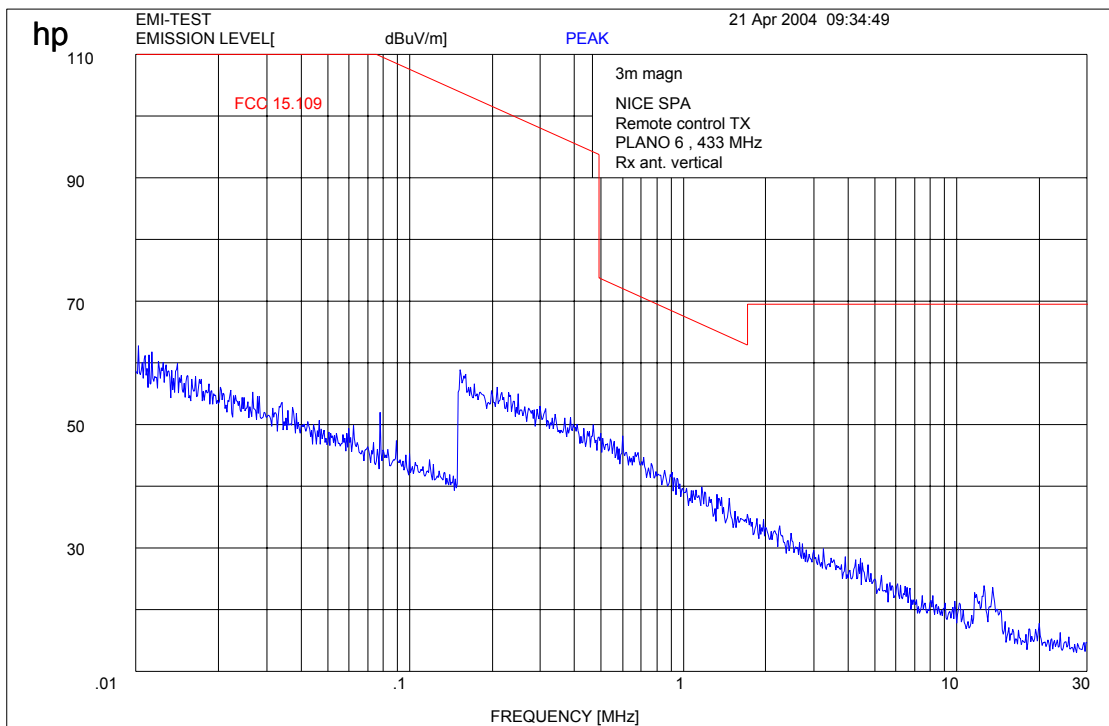

SPURIOUS EMISSION (radiated) > 30 MHz


§ 15.247 (b) (1)

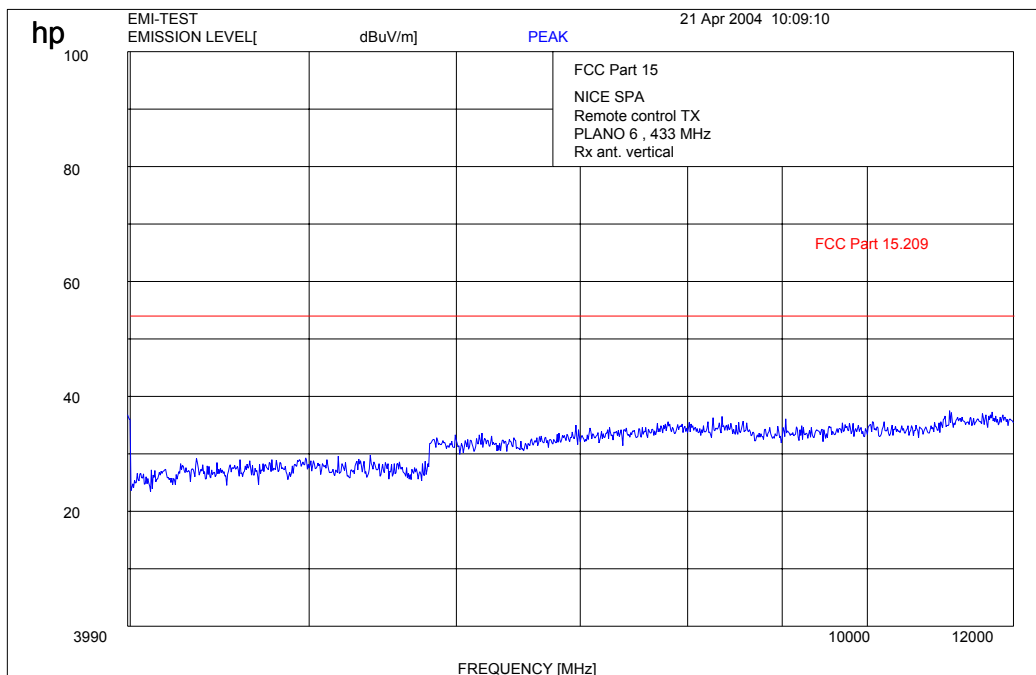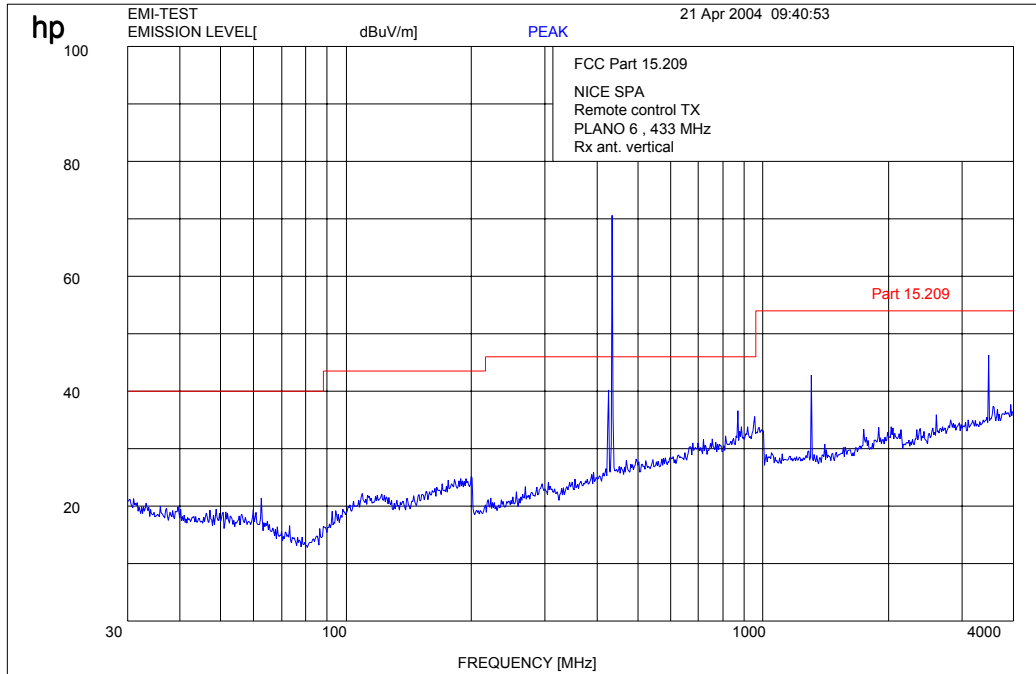

Occupied bandwidth

FCC 15.231 (c)

| | | | | | | |
|--|---------|--------------------|-----|--------|--------|-------|
| | Ref Lvl | Marker 1 [T1 ndB] | RBW | 10 kHz | RF Att | 10 dB |
| | -25 dBm | ndB 20.00 dB | VBW | 10 kHz | | |
| | | BW 44.71442886 kHz | SWT | 15 ms | Unit | dBm |

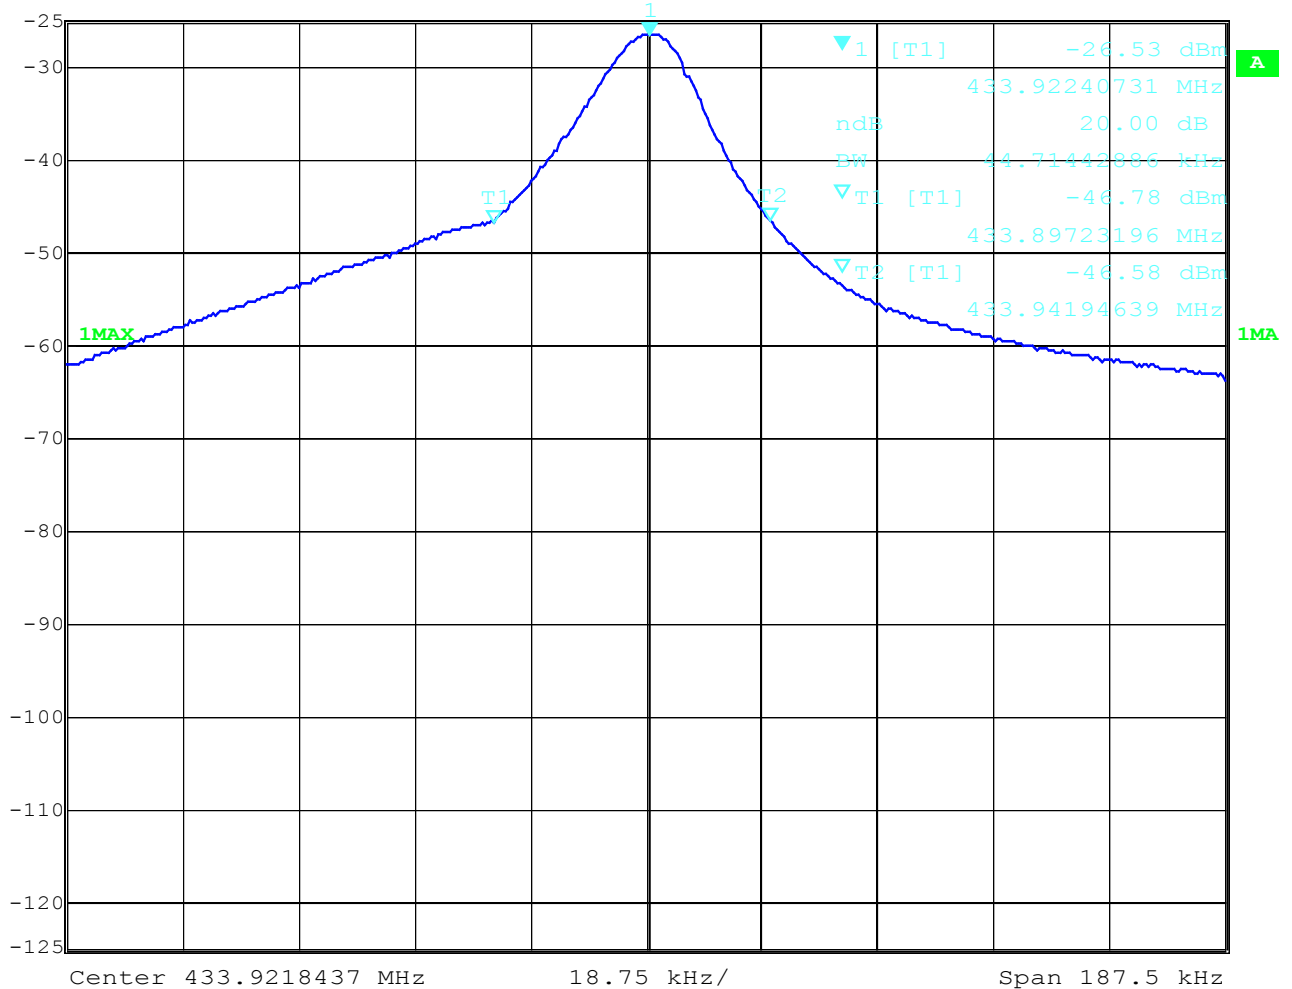

Date: 21.APR.2004 14:48:04

Marker 1↓ : 433.897 232 MHz
 Marker 1↑ : 433.941 947 MHz

The occupied bandwidth is 44.72 kHz at -20 dB points.

So the product complies with the FCC requirements.

| | |
|--|-----------------------|
| Limit | SUBCLAUSE § 15.231(c) |
| < 0.25% of the centre frequency, here 1.08 MHz | |


TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


| No | Instrument/Ancillary | Type | Manufacturer | Serial No. |
|----|------------------------------|-----------|-----------------|-------------|
| 01 | Spectrum Analyzer | 8566 A | Hewlett-Packard | 1925A00257 |
| 02 | Analyzer Display | 8566 A | Hewlett-Packard | 1925A00860 |
| 03 | Oscilloscope | 7633 | Tektronix | 230054 |
| 04 | Radio Communication Analyzer | CMTA 54 | Rohde & Schwarz | 894 043/010 |
| 05 | System Power Supply | 6038 A | Hewlett-Packard | 2848A07027 |
| 06 | Signal Generator | 8111 A | Hewlett-Packard | 2215G00867 |
| 07 | Signal Generator | 8662 A | Hewlett-Packard | 2224A01012 |
| 08 | Function Generator | AFGU | Rohde & Schwarz | 862 480/032 |
| 09 | Regulating Transformer | MPL | Erfi | 91350 |
| 10 | LISN | NNLA 8120 | Schwarzbeck | 8120331 |
| 11 | Relay-Matrix | PSU | Rohde & Schwarz | 893 285/020 |
| 12 | Power-Meter | 436 A | Hewlett-Packard | 2101A12378 |
| 13 | Power-Sensor | 8484 A | Hewlett-Packard | 2237A10156 |
| 14 | Power-Sensor | 8482 A | Hewlett-Packard | 2237A00616 |
| 15 | Modulation Meter | 9008 | Racal-Dana | 2647 |
| 16 | Frequency Counter | 5340 A | Hewlett-Packard | 1532A03899 |
| 17 | Anechoic Chamber | --- | MWB | 87400/002 |
| 18 | Spectrum Analyzer | 85660 B | Hewlett-Packard | 2747A05306 |
| 19 | Analyzer Display | 85662 A | Hewlett-Packard | 2816A16541 |
| 20 | Quasi Peak Adapter | 85650 A | Hewlett-Packard | 2811A01131 |
| 21 | RF-Preselector | 85685 A | Hewlett-Packard | 2833A00768 |
| 22 | Biconical Antenna | 3104 | Emco | 3758 |
| 23 | Log. Per. Antenna | 3146 | Emco | 2130 |
| 24 | Double Ridged Horn | 3115 | Emco | 3088 |
| 25 | EMI-Testreceiver | ESAI | Rohde & Schwarz | 863 180/013 |
| 26 | EMI-Analyzer-Display | ESAI-D | Rohde & Schwarz | 862 771/008 |
| 27 | Biconical Antenna | HK 116 | Rohde & Schwarz | 888 945/013 |
| 28 | Log. Per. Antenna | HL 223 | Rohde & Schwarz | 825 584/002 |
| 29 | Relay-Switch-Unit | RSU | Rohde & Schwarz | 375 339/002 |
| 30 | Highpass | HM985955 | FSY Microwave | 001 |
| 31 | Amplifier | P42-GA29 | Tron-Tech | B 23602 |
| 32 | Anechoic Chamber | | Frankonia | |
| 33 | Control Computer | PSM 7 | Rohde & Schwarz | 834 621/004 |
| 34 | EMI Test Receiver | ESMI | Rohde & Schwarz | 827 063/010 |
| 35 | EMI Test Receiver | Display | Rohde & Schwarz | 829 808/010 |

| No | Instrument/Ancillary | Type | Manufacturer | Serial No. |
|----|---------------------------------------|-----------|-----------------|--------------|
| 36 | Control Computer | HD 100 | Deisel | 100/322/93 |
| 37 | Relay Matrix | PSN | Rohde & Schwarz | 829 065/003 |
| 38 | Control Unit | GB 016 A2 | Rohde & Schwarz | 344 122/008 |
| 39 | Relay Switch Unit | RSU | Rohde & Schwarz | 316 790/001 |
| 40 | Power Supply | 6032A | Hewlett Packard | 2846A04063 |
| 41 | Spectrum Monitor | EZM | Rohde & Schwarz | 883 720/006 |
| 42 | Measuring Receiver | ESH 3 | Rohde & Schwarz | 890 174/002 |
| 43 | Measuring Receiver | ESVP | Rohde & Schwarz | 891 752/005 |
| 44 | Bicon Ant. 20-300MHz | HK 116 | Rohde & Schwarz | 833 162/011 |
| 45 | Logper Ant. 0.3-1 GHz | HL 223 | Rohde & Schwarz | 832 914/010 |
| 46 | Amplifier 0.1-4 GHz | AFS4 | Miteq Inc. | 206461 |
| 47 | Logper Ant. 1-18 GHz | HL 024 A2 | Rohde & Schwarz | 342 662/002 |
| 48 | Polarisation Network | HL 024 Z1 | Rohde & Schwarz | 341 570/002 |
| 49 | Double Ridged Horn Antenna 1-26.5 GHz | 3115 | EMCO | 9107-3696 |
| 50 | Microw. Sys. Amplifier 0.5- 26.5 GHz | 8317A | Hewlett Packard | 3123A00105 |
| 51 | Audio Analyzer | UPD | Rohde & Schwarz | 1030.7500.04 |
| 52 | Controler | PSM 7 | Rohde & Schwarz | 883 086/026 |
| 53 | DC V-Network | ESH3-Z6 | Rohde & Schwarz | 861 406/005 |
| 54 | DC V-Network | ESH3-Z6 | Rohde & Schwarz | 893 689/012 |
| 55 | AC 2 Phase V-Network | ESH3-Z5 | Rohde & Schwarz | 861 189/014 |
| 56 | AC 2 Phase V-Network | ESH3-Z5 | Rohde & Schwarz | 894 981/019 |
| 57 | AC-3 Phase V-Network | ESH2-Z5 | Rohde & Schwarz | 882 394/007 |
| 58 | Power Supply | 6032A | Rohde & Schwarz | 2933A05441 |
| 59 | RF-Test Receiver | ESVP.52 | Rohde & Schwarz | 881 487/021 |
| 60 | Spectrum Monitor | EZM | Rohde & Schwarz | 883 086/026 |
| 61 | RF-Test Receiver | ESH3 | Rohde & Schwarz | 881 515/002 |
| 62 | Relay Matrix | PSU | Rohde & Schwarz | 882 943/029 |
| 63 | Relay Matrix | PSU | Rohde & Schwarz | 828 628/007 |
| 64 | Spectrum Analyzer | FSIQ 26 | Rohde & Schwarz | 119.6001.27 |
| 65 | Spectrum Analyzer | HP 8565E | Hewlett Packard | 3473A00773 |
| 66 | | | | |
| 67 | | | | |
| 68 | | | | |

Test site

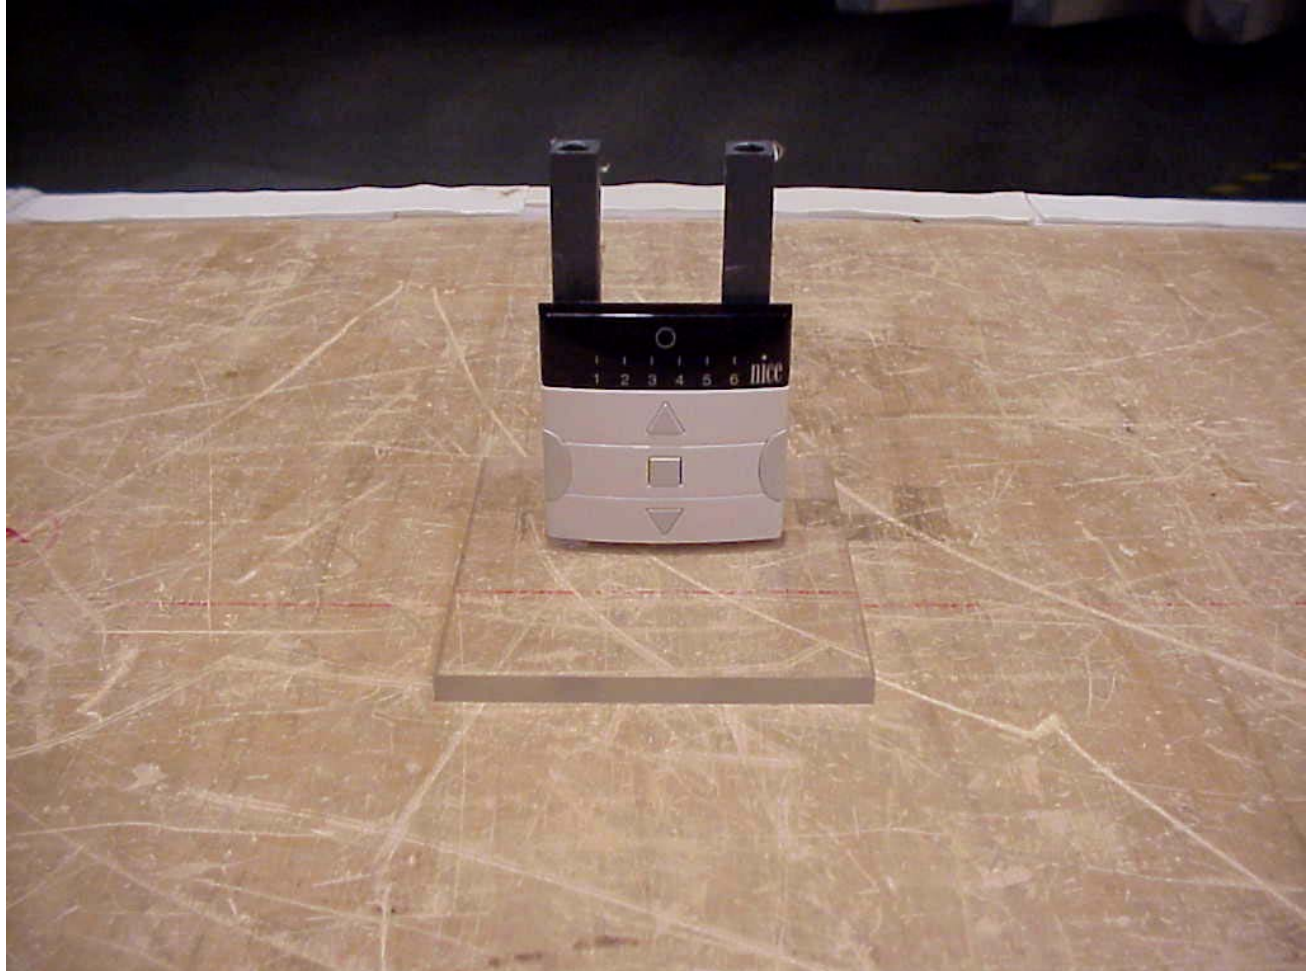

Test site

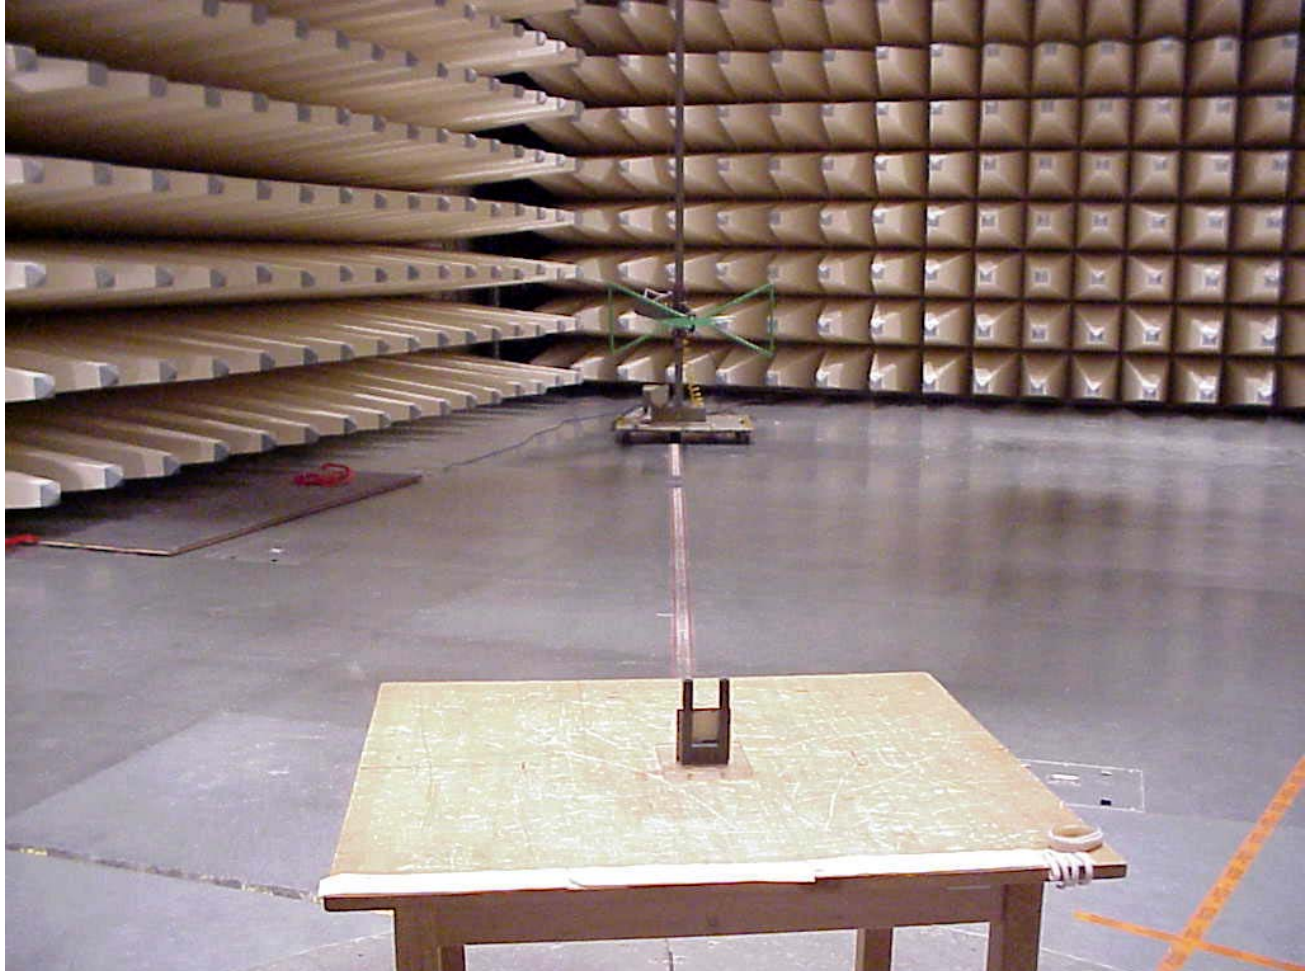

Photographs of the equipment

Photograph no.: 1



Photographs of the equipment

Photograph no.: 2




Photographs of the equipment

Photograph no.: 3



Photographs of the equipment

Photograph no.: 4

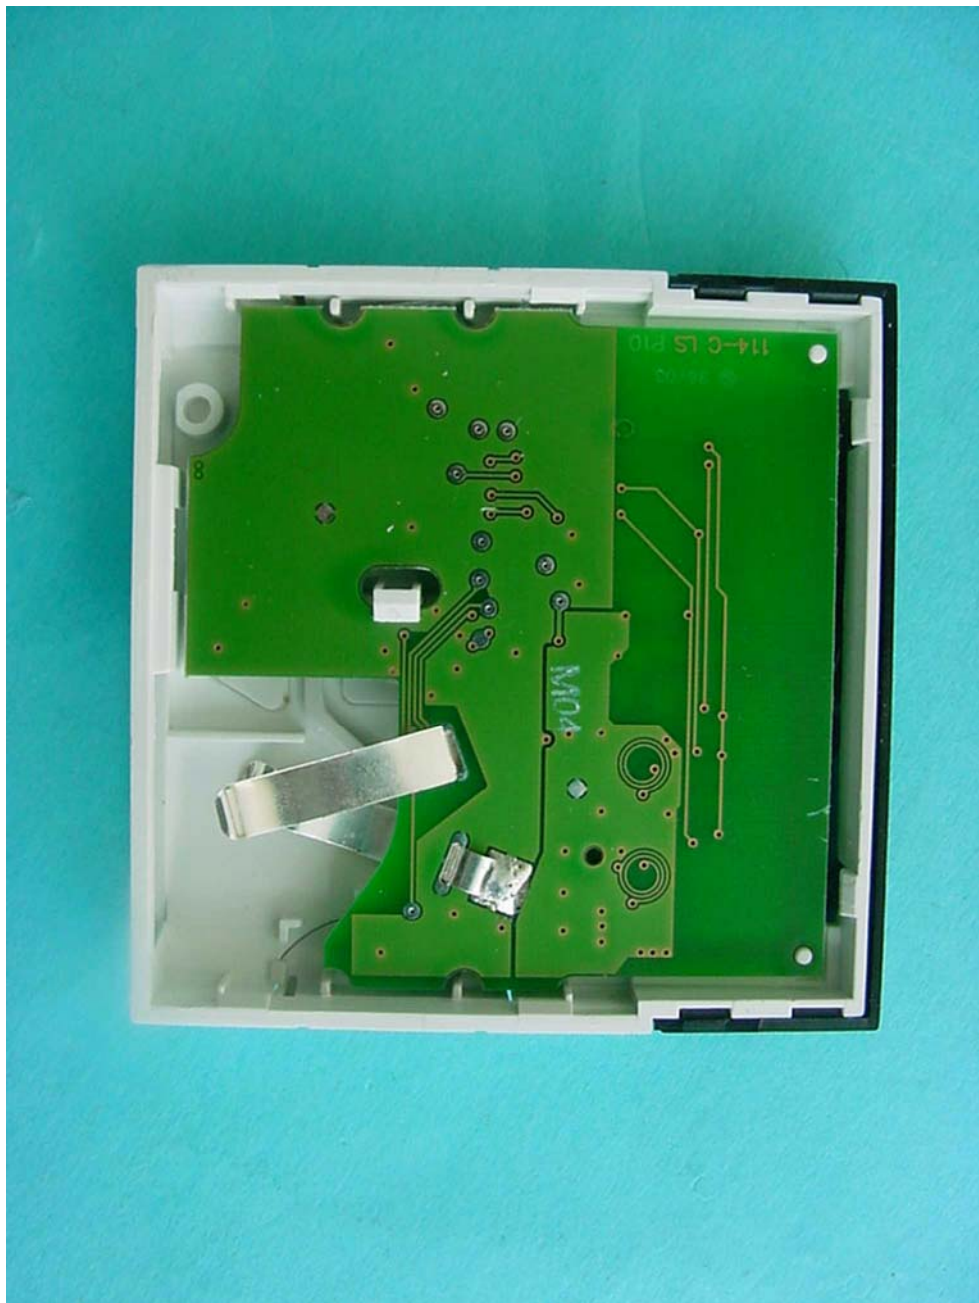

Photographs of the equipment

Photograph no.: 5

