



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test report file number : E043R-075

Applicant : InsideTNC Co., Ltd.

Address : #899-6, Hogye-Dong, Dongan-Gu, Anyang-City, Kyungki-Do, Korea

Manufacturer : InsideTNC Co., Ltd.

Address : #899-6, Hogye-Dong, Dongan-Gu, Anyang-City, Kyungki-Do, Korea

Type of Equipment : MAGIC PRESENTER

FCC ID : PMUMP100TX

Model Name : MP-T100

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 12 pages (including this page)

Date of Incoming : March 04, 2004

Date of Issuing : March 24, 2004

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART C, SECTION 15.231**.

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: G. W. Lee
G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by: Y. K. Kwon
Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES:	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	4
2.6 TEST FACILITY	4
3. SYSTEM TEST CONFIGURATION.....	5
3.1 JUSTIFICATION	5
3.2 EUT EXERCISE SOFTWARE.....	5
3.3 EQUIPMENT MODIFICATIONS	5
3.4 CONFIGURATION OF TEST SYSTEM	5
3.5 ANTENNA REQUIREMENT	6
4. PRELIMINARY TEST.....	6
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	6
4.2 RADIATED EMISSIONS TESTS.....	6
5. FINAL RESULT OF MEASUREMENT	7
5.1 MAXIMUM MODULATION PERCENTAGE (MMP).....	7
5.2 FIELD STRENGTH OF THE CARRIER TEST	10
5.3 SPURIOUS EMISSION TEST	11
5.4 BANDWIDTH OF THE OPERATING FREQUENCY	12
6. FIELD STRENGTH CALCULATION	14
7. LIST OF TEST EQUIPMENT.....	15

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : InsideTNC Co., Ltd.
- ADDRESS : #899-6, Hogye-Dong, Dongan-Gu, Anyang-City, Kyungki-Do, Korea
- CONTACT PERSON : Mr. Kyung-Sik, Jeon / Manager
- TELEPHONE NO : +82-31-424-1900
- FCC ID : PMUMP100TX
- MODEL NO/NAME : MP-T100
- SERIAL NUMBER : N/A
- DATE : March 24, 2004

DEVICE TYPE	MAGIC PRESENTER - Transmitter
E.U.T. DESCRIPTION	Remote Control & Laser Pointer for Presentation
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C, 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The InsideTNC Co., Ltd., Model MP-T100 (referred to as the EUT in this report) is a MAGIC PRESENTER that is a laser pointer and a PC remote control. The associated receiver is manufactured by InsideTNC Co., Ltd., Model No: MP-R100, FCC ID: PMUMP100RX. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Non-Metal
TX FREQUENCY	311.0625 MHz
MODULATION	ASK
ANTENNA TYPE	Built-in on the PCB in the EUT
RATED SUPPLY VOLTAGE	DC 3V, 25mA (Lithium Battery)
NUMBER OF LAYERS	2 LAYERS
DIMENSION	127mm(L) x 23mm(H) x 25mm(W)
WEIGHT	25 grams (w/o battery)

Remark: This equipment automatically deactivates the transmitter within not more than 1 second of being released.

2.2 Model Differences:

The difference(s) compared to the EUT is as follows: none

2.3 Related Submittal(s) / Grant(s)

-. None

2.4 Test System Details

The EUT was tested with the following all equipment used in the tested systems are: None.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2002. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	InsideTNC Co., Ltd.	IVC-311ATX-B	N/A

3.2 EUT exercise Software

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal. During the testing, the battery of the EUT was changed with a new battery.

3.3 Equipment Modifications

-. None

3.4 Configuration of Test System

Line Conducted Test: It needs not to test this requirement, because the EUT supplies from a DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The picture is taken at 50 kHz/division frequency span, 10 kHz resolution bandwidth and 10dB/division logarithmic display from an 8566B spectrum analyzer.



3.5 Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is built-in on the PCB in the EUT, no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
N/A	N/A
It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X



5. FINAL RESULT OF MEASUREMENT


5.1 Maximum Modulation Percentage (MMP)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT.


We measured the duty cycle according to the clause I4 (10) in ANSI C63.4: 2002.

The pulse train from the EUT was consisting of long and short pulse. The calculation of measured values is as follows.


Long Pulse (LP1)	Long Pulse (LP2)	Short Pulse (SP)	Total sum of LP1	Total sum of LP2	Total sum of SP	Pulse Width
2.54 ms	0.75 ms	0.33 ms	1	5	7	19.83 ms
Duty Cycle			$(1 \times 2.54 + 5 \times 0.75 + 7 \times 0.33) / 19.83 = 0.4336$			
Maximum Modulation Percentage(MMP)			Duty Cycle x 100 % = 43.36 %			
Average Level Factor			-7.26 dB			

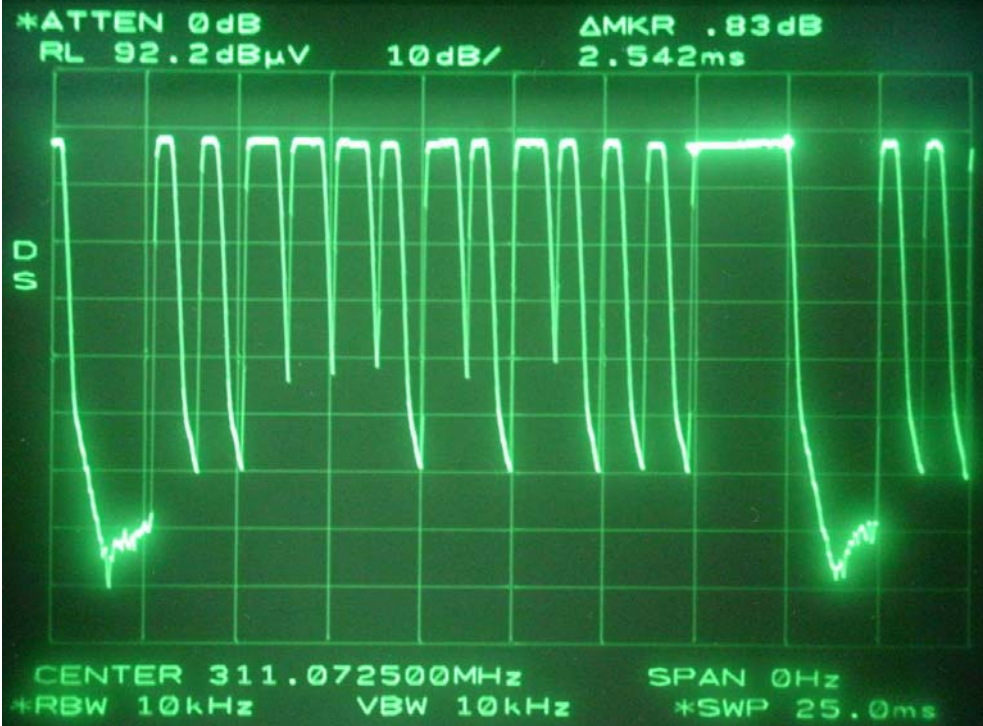


Long Pulse 1: 2.542 ms

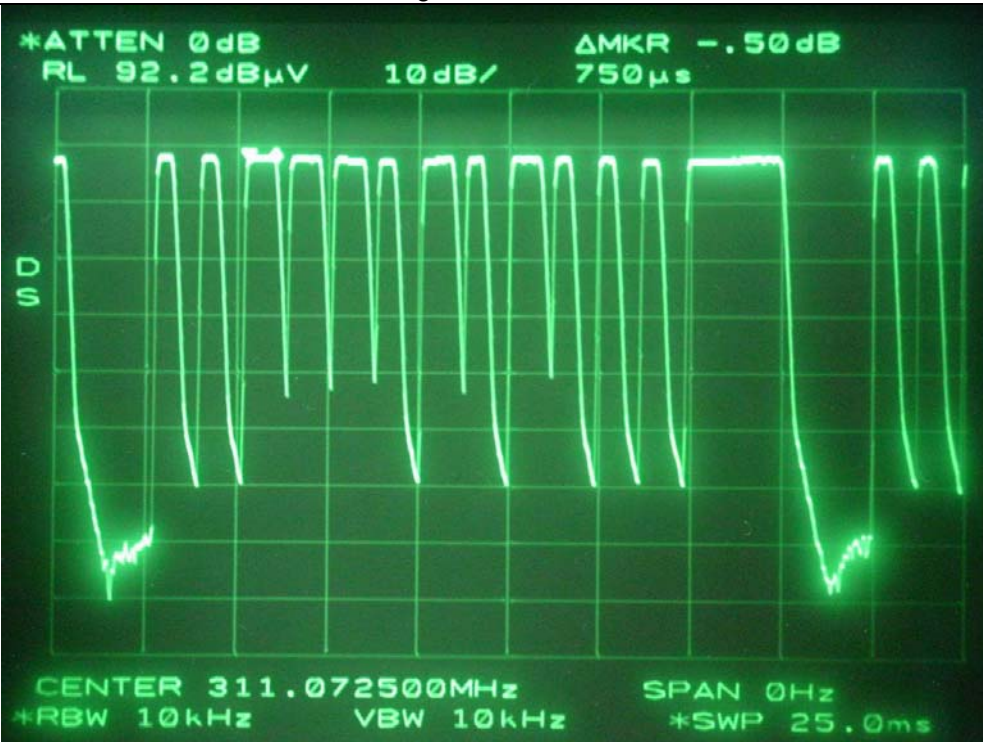

Long Pulse 2: 0.75 ms

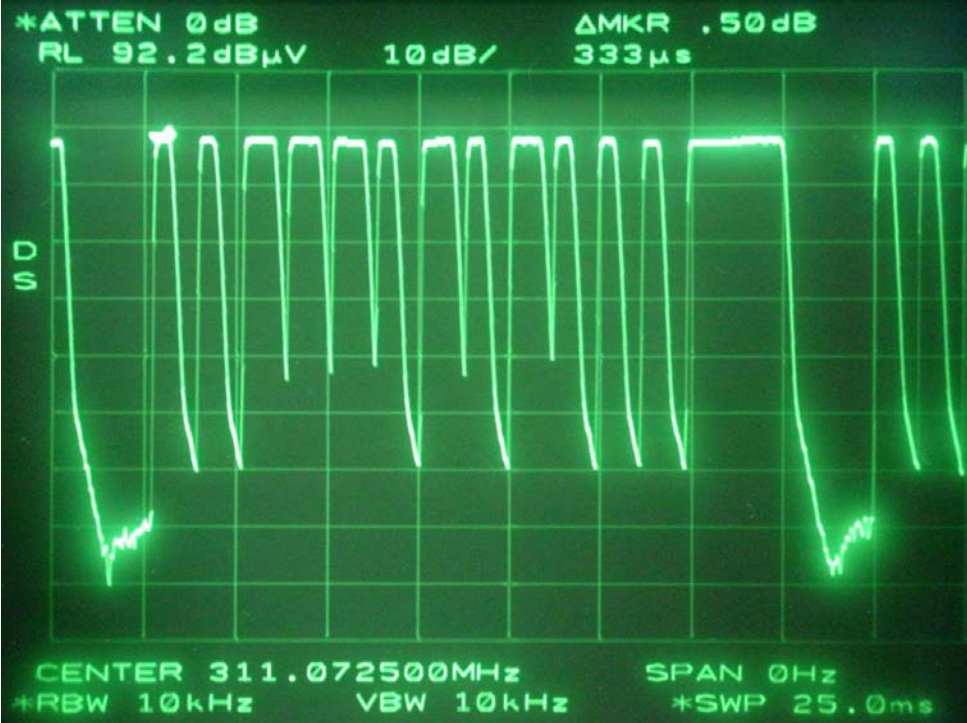

Short Pulse: 0.33 ms

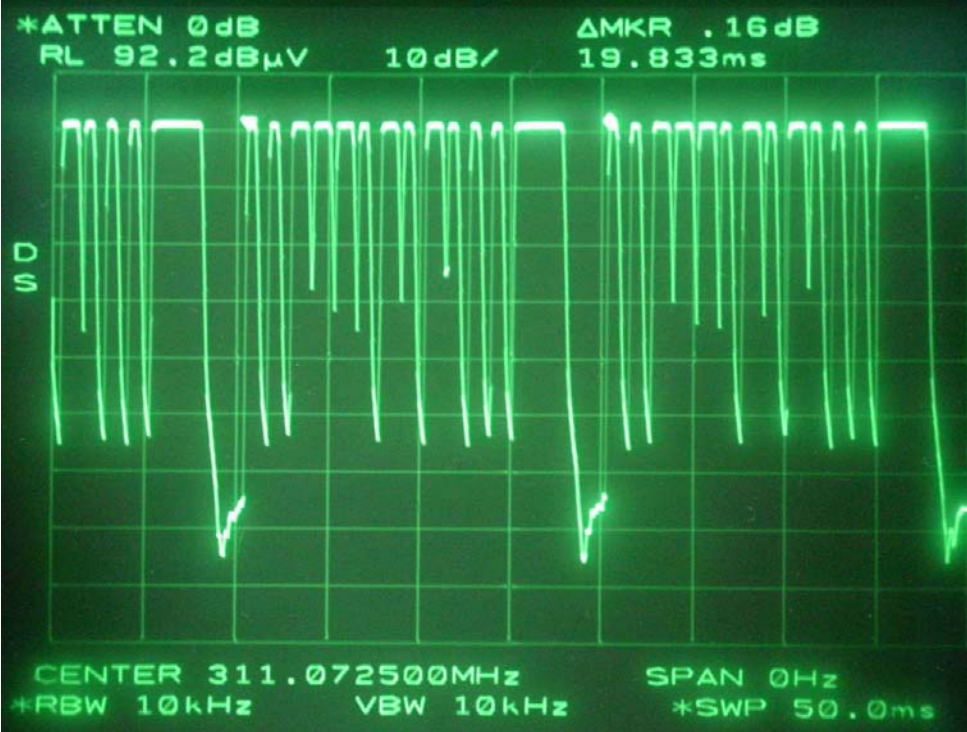

Pulse Width: 19.83 ms

**5.2 Field Strength of the Carrier Test**

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 41 % Temperature: 21 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)
Type of Test : Transmitter
Result : PASSED BY -23.53 dB

EUT : MAGIC PRESENTER Date: March 22, 2004
Operating Condition : TX mode
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
Distance : 3 Meter

Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Ant. (dB/m)	Cable (dB)	Average Level Factor	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
311.07	56.40	Peak	H	14.69	2.07	7.26	65.90	75.38	-9.48

Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Tested by: Dan-Gi, Lee / Project Engineer

**5.3 Spurious Emission Test**

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 41 % Temperature : 21 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)
 Type of Test : Transmitter
 Result : PASSED BY -21.11dB at 936.00 MHz

EUT : MAGIC PRESENTER Date: March 22, 2004
 Operating Condition : TX mode
 Detector : Below 1GHz, Quasi-Peak/Peak (RBW: 120 kHz)
 Above 1GHz, Average/Peak (RBW: 1MHz)
 Distance : 3 Meter

Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Ant. (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
362.49	22.30	Peak	H	14.53	2.33	7.26	31.90	55.38	-23.48
622.15	20.50	Peak	H	19.16	2.99	7.26	35.39	55.38	-19.99
933.21	17.40	Peak	H	22.89	4.05	7.26	37.08	55.38	-18.30
1244.00	12.30	Peak	H	25.04	4.84	7.26	34.92	55.38	-20.46
1555.00*	13.03	Peak	H	26.98	5.73	7.26	38.48	54.00	-15.52
1867.00	10.30	Peak	H	29.14	6.22	7.26	38.40	55.38	-16.98
Other spurious frequencies were not found up to 3500 MHz.									

Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“*” Marked frequency is fall in the restricted band.

Tested by: Dan-Gi, Lee / Project Engineer


**5.4 Bandwidth of the operating frequency**

Humidity Level : 41 % Temperature: 21 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (c)
Type of Test : Transmitter
Result : PASSED

EUT : MAGIC PRESENTER Date: March 22, 2004
Operating Condition : TX mode
Minimum Resolution
Bandwidth : 10 kHz

Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
311.0725	46.0 (Refer to next page)	$311.0725 \times 0.25\% = 777.681$	<u>The point 20dB down from the modulated carrier</u>

Tested by: Dan-Gi, Lee / Project Engineer

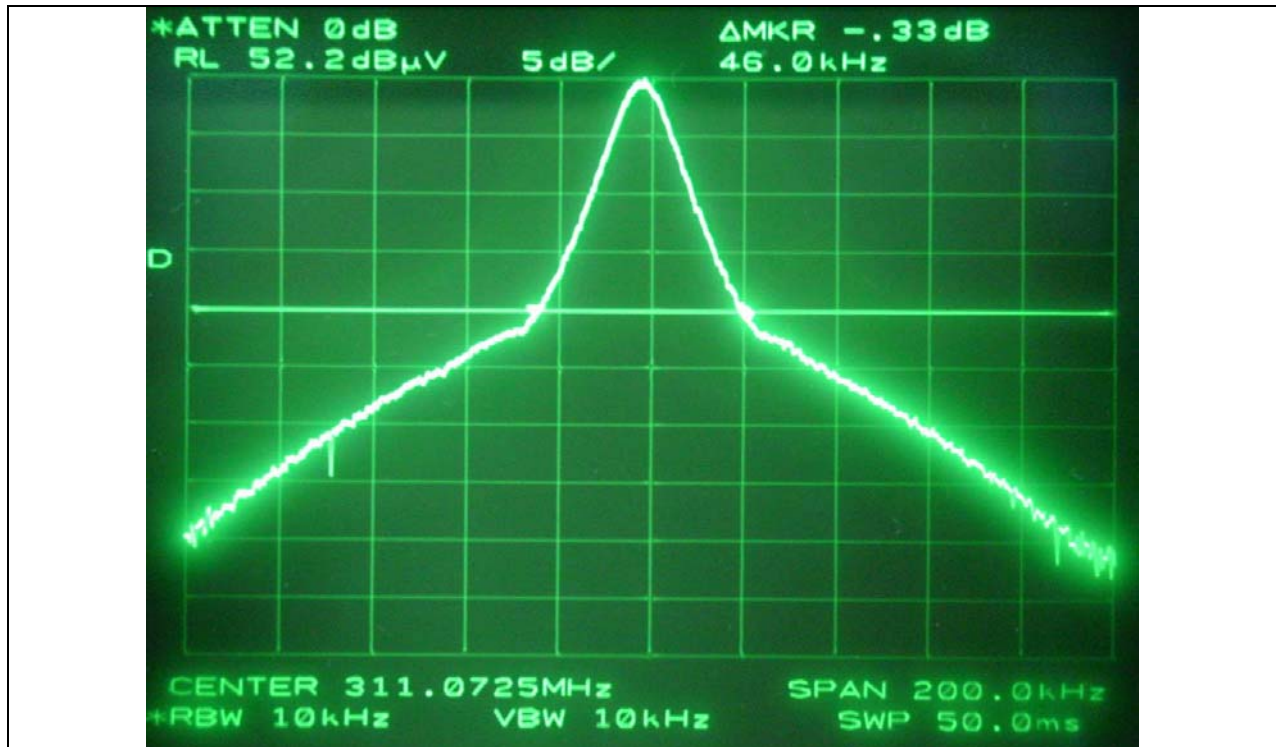



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	DEC/03	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/03	12MONTH	
3.	Spectrum analyzer	HP	8566B	3407A08547	MAY/03	12MONTH	■
4.	Spectrum analyzer	HP	8568B	3109A05456	MAY/03	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	MAY/03	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAY/03	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/03	12MONTH	■
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/03	12MONTH	■
				9109-4444	JUL/03		
		Schwarzbeck	VHA9103	91031852	JAN/04		
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3214	JUL/03		■
				9109-3217	MAY/03		
		Schwarzbeck	9108-A(494)	62281001	JAN/04		
10.	LISN	EMCO	3825/2	9109-1867	AUG/03	12MONTH	
				9109-1869	OCT/03		
11.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
12.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
13.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■