



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test Report No. : E051R-022

Applicant : Macro Image Technology, Inc.

Address : East Bldg., 6th Floor, IT Venture Tower, 78, Garakbon-Dong, Songpa-Gu, Seoul,
138-803, Korea

Manufacturer : Macro Image Technology, Inc.

Address : East Bldg., 6th Floor, IT Venture Tower, 78, Garakbon-Dong, Songpa-Gu, Seoul,
138-803, Korea

Type of Equipment : HDTV Receiving PC Card

FCC ID : PN7MDP-130

Model Name : MDP-130

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : November 29, 2004


Date of Issuing : January 10, 2005

SUMMARY

The equipment complies with the regulation; **FCC CFR 47 PART 15 SUBPART B, Class B.**

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production

Prepared by: 
Seung-Hyun, Nam / Project Engineer
EMC Div.

Reviewed by: 
Gea-Won, Lee / Chief Engineer
EMC Div.



ONETECH

Testing & Evaluation Lab.

Page 2 of 13

FCC ID. : PN7MDP-130

Report No. : E051R-022

ONETECH Corp.

ONETECH Corp.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-

2

9

0

4

)



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	4
2. GENERAL INFORMATION.....	5
2.1 PRODUCT DESCRIPTION.....	5
2.2 MODEL DIFFERENCES.....	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 TEST SYSTEM DETAILS	5
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 JUSTIFICATION	7
3.2 EUT EXERCISE SOFTWARE.....	7
3.3 CABLE DESCRIPTION	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	8
3.5 EQUIPMENT MODIFICATIONS	8
3.6 CONFIGURATION OF TEST SYSTEM	8
4. PRELIMINARY TEST.....	9
4.1 AC POWER LINE CONDUCTED EMISSION TEST	9
4.2 RADIATED EMISSION TEST	9
5. FINAL RESULT OF MEASUREMENT	10
5.1 CONDUCTED EMISSION TEST.....	10
5.2 RADIATED EMISSION TEST	12
6. FIELD STRENGTH CALCULATION	13
7. LIST OF TEST EQUIPMENT.....	14

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : Macro Image Technology, Inc.
ADDRESS : East Bldg., 6th Floor, IT Venture Tower, 78, Garakbon-Dong, Songpa-Gu, Seoul, 138-803, Korea
CONTACT PERSON : Mr. Seung-Chol, Ryu / Researcher
TELEPHONE NO : +82-2-2142-4058
FCC ID : PN7MDP-130
MODEL NAME : MDP-130
SERIAL NUMBER : N/A
DATE : January 10, 2005

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	HDTV Receiving PC Card
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR 47 PART 15 §15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The Macro Image Technology, Inc., Model MDP-130 (referred to as the EUT in this report) is a Digital TV Receiving PC Card which is PCI-based card for enjoying Digital TV on a PC. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	PC Card (PCI Slot)
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	13.5MHz, 18.432MHz and 20.250MHz on Main Board
NUMBER OF LAYERS	4 Layers
USED TUNER	Model No: TUV1236D, Manufacturer: Philips
ELECTRICAL RATING	DC 5V and 12V supplied by a personal computer
EXTERNAL TERMINALS	2 Antenna Connector, Video Connector, Audio Out, 2 DVI Connector, Optical Connector.

2.2 Model Differences

The difference(s) compared to the EUT is as follows: none

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
MDP-130	Macro Image Technology, Inc.	PN7MDP-130	HDTV Receiving PC Card (EUT)	Inside PC
MDP130R	Macro Image Technology, Inc.	"	Remote Control Receiver (EUT)	PC
Pavilion 8961	HP	DoC	PC	-
JGM-4800	CHIC Technology	DoC	MOUSE	PC
SK-8110	SILITEK	DoC	KEYBOARD	PC
2225C	HP	DSI6XU2225	PRINTER	PC
NP201DTP	NewQ System	DoC	MONITOR	EUT (VGA Out)
N/A	Nexphil	N/A	DVD Player	EUT



2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
DVI Board	Macro Image Technology, Inc.	MDP-130_DVI	N/A
DTV Board	Macro Image Technology, Inc.	MDP-130	N/A
Remote Receiving Board	Macro Image Technology, Inc.	N/A	N/A

3.2 EUT exercise Software

The EUT was received the signal of the terrestrial broadcast continuously via antenna input port and displaying the picture on the screen of the PC monitor.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
HDTV Receiving PC Card (EUT)	-	Y	3.0(D) – DTV B/D 1.0(D) – DVI B/D
Remote Control Receiver (EUT)	N/A	Y	1.0(D)
PC	N	-	1.5(P)
MOUSE	N/A	N	1.5(D)
KEYBOARD	N/A	N	1.5(D)
PRINTER	N	Y	1.5(P), 1.5(D)
MONITOR	N	Y	1.5(P), 1.8(D)
DVD PLAYER	N	N	1.5(P), 1.5(D)

* The marked “(P)” means the Power Cable and “(D)” means Signal Cable.



3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
HDTV Receiving PC Card (EUT)	Y N	BOTH END (DVI B/D) N/A (DTV B/D)	Y	BOTH END
Remote Control Receiver (EUT)	N	N/A	Y	PC
PC	-	-	-	-
MOUSE	N	N/A	Y	PC END
KEYBOARD	N	N/A	Y	PC END
PRINTER	N	N/A	Y	BOTH END
MONITOR	Y	BOTH END	Y	BOTH END
DVD PLAYER	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test: The EUT was inserted into the PC, and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The signal of the terrestrial broadcast receiving via antenna input port and displaying the picture on the screen of the PC monitor.	X
External A/V source input mode	

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The signal of the terrestrial broadcast receiving via antenna input port and displaying the picture on the screen of the PC monitor.	X
External A/V source input mode	



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 38 % Temperature : 22□
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107(a)
 Type of Test : CLASS B
 Result : PASSED BY -14.43 dB at 4.90 MHz

EUT : HDTV Receiving PC Card Date: December 09, 2004
 Operating Condition : Terrestrial broadcast receiving mode on the screen of the monitor.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.18	H	46.38	64.49	-18.11
0.36	N	39.20	58.61	-19.41
0.54	H	38.36	56.00	-17.64
1.45	H	41.38	56.00	-14.62
4.90	H	41.57	56.00	-14.43
8.89	H	40.54	60.00	-19.46
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
-				
-				



Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line

Average data was not measured, because Peak values were under the Average limit.

See next page for an overview sweep performed with peak detector.

Tested by: Eung-Chan, Kim / Test Engineer

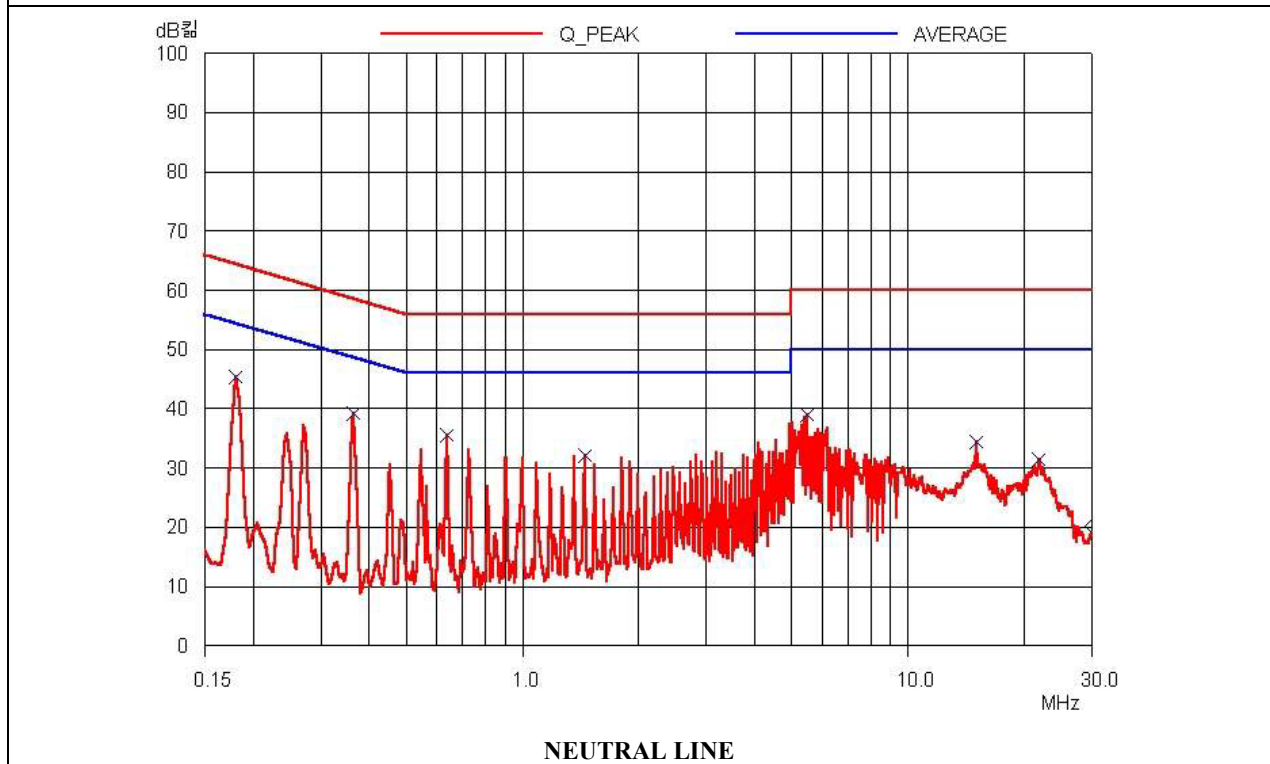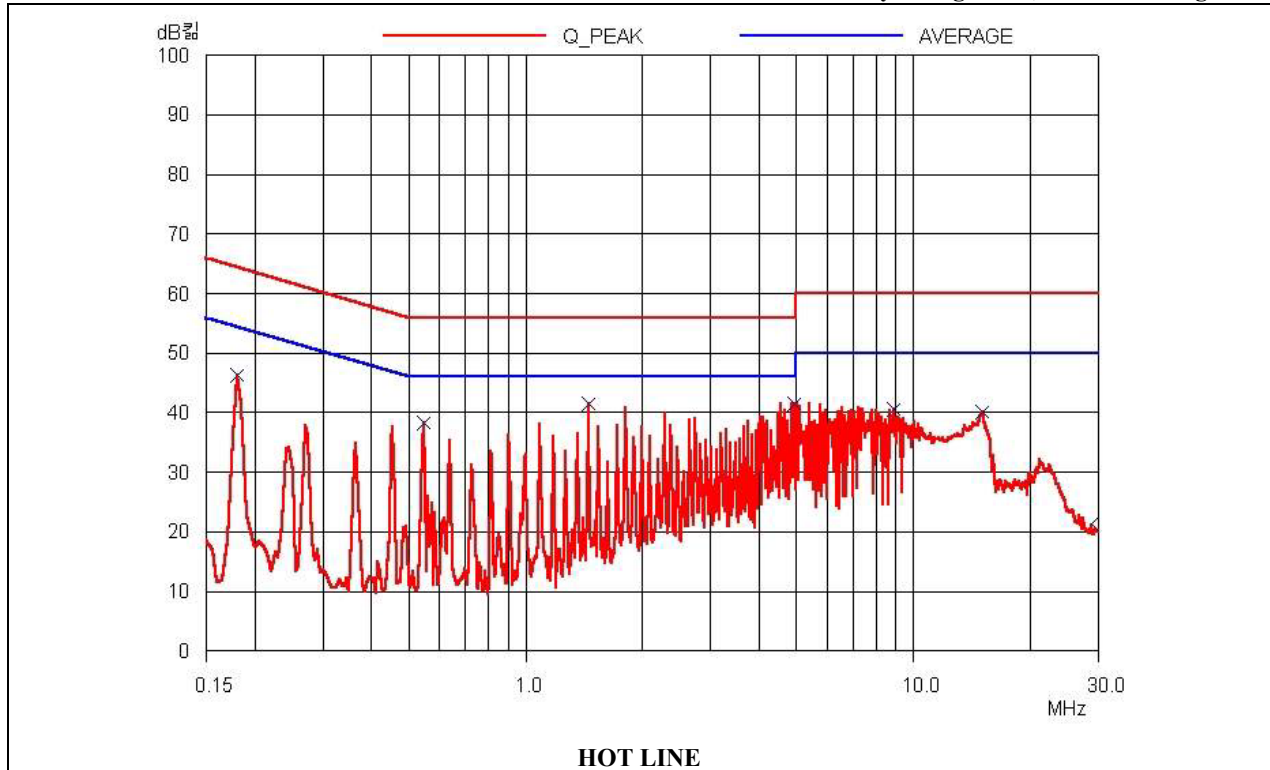

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 40 %

Temperature :

19°C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109(a)

Type of Test : CLASS B

Result : PASSED BY -6.06 dB at 39.80 MHz

EUT : HDTV Receiving PC Card

Date: November 30, 2004

Operating Condition : Terrestrial broadcast receiving mode on the screen of the monitor.

Frequency Range : 30 MHz – 1000 MHz

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
39.80	18.00	V	14.75	1.19	33.94	40.00	-6.06
77.80	21.10	V	5.73	1.60	28.43	40.00	-11.57
148.00	18.10	V	14.31	2.06	34.47	43.52	-9.05
222.00	16.50	V	16.86	2.46	35.82	46.02	-10.20
246.00	17.00	V	17.14	2.58	36.72	46.02	-9.30
444.70	16.10	H	16.86	3.46	36.42	46.02	-9.60

Radiated Emission Tabulated Data

Tested by: Eung-Chan, Kim / Test Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	DEC/03	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/04	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/04	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	JUL/04	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/04	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	JUL/04	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/04	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/04		■
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	JAN/04		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	■
				9109-1869	OCT/04		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■