


Prüfbericht-Nr.: <i>Test report no.:</i>	CN26TREE 002	Auftrags-Nr.: <i>Order no.:</i>	27221692	Seite 1 von 17 <i>Page 1 of 17</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-02-03	
Auftraggeber: <i>Client:</i>	Axis Communications AB Gränden 1, SE-223 69 Lund, Sweden			
Prüfgegenstand: <i>Test item:</i>	Network Video Intercom			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	AXIS I8217-LVE			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	47 CFR FCC Part 15 Subpart C, 15.225 47 CFR FCC Part 15 Subpart C, 15.209 47 CFR FCC Part 15 Subpart C, 15.207		RSS-210 Issue 11 June 2024 RSS-Gen Issue 5 with Amendment 1 & 2 February 2021	
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-03-10	Refer to Photo Documentation		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004213713 001			
Prüfzeitraum: <i>Testing period:</i>	2026-03-25 – 2026-04-20			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	 Hardy Suo		genehmigt von: <i>authorized by:</i>	 Lin Lin
Datum: <i>Date:</i>	2026-06-23		Ausstellungsdatum: <i>Issue date:</i>	2026-06-23
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / <i>Other:</i>	FCC ID: PNB-AXIS I8217-LVE IC:3919A-I8217LVE HVIN: I8217-LVE			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26TREE 002
Test report no.:

Seite 2 von 17
Page 2 of 17

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 3 von 17
Page 3 of 17

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20 dB AND OCCUPIED BANDWIDTH

RESULT: Pass

5.1.3 FREQUENCY STABILITY

RESULT: Pass

5.1.4 RADIATED EMISSIONS – IN-BAND AND OUT OF BAND

RESULT: Pass

5.1.5 CONDUCTED EMISSIONS ON AC MAINS

RESULT: Pass

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 4 von 17
Page 4 of 17

CONTENTS

1	General Remarks	5
1.1	COMPLEMENTARY MATERIALS	5
1.2	LIST OF DOCUMENT CHANGE	5
2	Test Sites	5
2.1	TEST FACILITIES	5
2.2	TESTING PERIOD.....	5
2.3	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.4	TRACEABILITY	7
2.5	CALIBRATION.....	7
2.6	MEASUREMENT UNCERTAINTY	7
2.7	LOCATION OF ORIGINAL DATA.....	7
2.8	STATUS OF FACILITY USED FOR TESTING	7
3	General Product Information	8
3.1	GENERAL DESCRIPTION	8
3.2	TECHNICAL DATA.....	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS.....	9
4	Test Set-up and Operation Modes.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE RADIO SPECTRUM COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	11
5	Test Results.....	12
5.1	ESSENTIAL REQUIREMENTS OF TRANSMITTER	12
5.1.1	Antenna Requirement	12
5.1.2	20 dB and Occupied bandwidth	13
5.1.3	Frequency Stability.....	14
5.1.4	Radiated Emissions – In-band and Out of band.....	15
5.1.5	Conducted Emissions on AC Mains.....	16
6	Photographs of the Test Setup.....	17
7	List of Tables.....	17

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 5 von 17
Page 5 of 17

1 GENERAL REMARKS

1.1 COMPLEMENTARY MATERIALS

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of RFID operating

Appendix B: Photographs of the Test Set-up

1.2 LIST OF DOCUMENT CHANGE

No.	Report No.	Description
1	CN26TREE 001	First release.
2	CN26TREE 002	Correction of a typo on page 8.

2 TEST SITES

2.1 TEST FACILITIES

Test Facility 1:

TÜV Rheinland (Shenzhen) Co., Ltd.

Address: 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

A2LA accreditation certification number: 5162.01

2.2 TESTING PERIOD

Date of test: 2026-03-25 to 2026-04-20

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 6 von 17
Page 6 of 17

2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Table 1: List of Test and Measurement Equipment

Test Facility 1: TÜV Rheinland (Shenzhen) Co., Ltd.						
☒ Unwanted Emission Testing (TS9975)						
Equip. No.	Description	Manufacturer	Model	Serial No.	Calibrated Date (DD.MM.YYYY)	Calibrated until (DD.MM.YYYY)
G1826021	EMI Test Receiver	R&S	ESR 7	102021	22.09.2025	21.09.2026
G1826023	Signal Analyzer	R&S	FSV 40	101439	22.09.2025	21.09.2026
G1826024	System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
G1826025	Filterbank	R&S	Wlan	100759	22.09.2025	21.09.2026
G1826026	OSP	R&S	OSP 120	102040	N/A	N/A
G1826028	Pre-amplifier	R&S	SCU08F1	08320031	22.09.2025	21.09.2026
G1826029	Amplifier	R&S	SCU-18F	180070	22.09.2025	21.09.2026
G1826030	Amplifier	R&S	SCU40A	100475	22.09.2025	21.09.2026
G1826031	Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	28.09.2024	27.09.2026
G1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	28.09.2024	27.09.2026
G1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	28.09.2024	27.09.2026
G1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	28.09.2024	27.09.2026
G1826036	Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
G1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
G1826433	3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC1715 1-SAC	14.09.2024	13.09.2027
☒ Conducted Emissions						
Equip. No.	Description	Manufacturer	Model	Serial No.	Calibrated Date (YYYY-MM-DD)	Calibrated until (YYYY-MM-DD)
GC-SZ 004632	EMI Test Receiver	R&S	ESR3	102680	2026-02-09	2027-02-08
GC-SZ 001010	Artificial Mains Network	R&S	ENV216	102333	2025-07-19	2026-07-18
GC-SZ 004633	Artificial Mains Network	R&S	ENV216	101445	2026-02-09	2027-02-08
G1825091	EMC32 test software	R&S	EMC32(Ver. 10.50.00)		N/A	N/A

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 7 von 17
Page 7 of 17

2.4 TRACEABILITY

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.5 CALIBRATION

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.6 MEASUREMENT UNCERTAINTY

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: System Measurement Uncertainty

Parameter	Condition	Extended Uncertainty
Radiated emissions	9 kHz < f ≤ 30 MHz	± 5.6 dB
	30 MHz < f ≤ 1 GHz	± 4.6 dB
	1 GHz < f ≤ 18 GHz	± 4.4 dB
	18 GHz < f ≤ 40 GHz	± 5.1 dB
Conducted Emission	9 kHz < f ≤ 150 kHz	± 3.7 dB
	150 kHz < f ≤ 30 GHz	± 3.3 dB
Remark: 95% Confidence Levels, k=2.		

2.7 LOCATION OF ORIGINAL DATA

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.8 STATUS OF FACILITY USED FOR TESTING

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 8 von 17
Page 8 of 17

3 GENERAL PRODUCT INFORMATION

3.1 GENERAL DESCRIPTION

The EUTs are network video intercom, providing door intercom solutions including video, audio and lock control features. It supports RFID and T-coil induction technology.

The EUT is powered either by PoE via the ethernet connector or the AC/DC power supply.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 TECHNICAL DATA

Table 3: Rating of EUT

General Information of EUT	Description
Kind of Equipment	Network Video Intercom
Type Designation	AXIS I8217-LVE
Trademark	AXIS
Operating Temperature Range	-40 °C - +60 °C
Operating Voltage	DC 24V via AC/DC adapter or DC 56V via PoE power supply
Extreme Voltage	DC 18V ~ 28V via AC/DC adapter, DC 44V ~ 57V via PoE

Table 4: Technical Specification of EUT

Raido Characteristics	Description
Permitted Frequency Band:	13.553 MHz to 13.567 MHz; 119 kHz to 140 kHz
Operating Frequency:	13.56 MHz; 125 kHz
Transmitter Level:	40.33 dBuV/m for 13.56 MHz 42.53 dBuV/m for 125 kHz
Type of Modulation:	ASK
Channel Number:	1 Channel
Antenna Type:	Internal Coil Antenna
Product Class:	1

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 9 von 17
Page 9 of 17

3.3 INDEPENDENT OPERATION MODES

The basic operation modes are:

- A. On, RFID active
 - 1. 13.56 MHz operating
 - 2. 125 kHz operating
- B. Idle
- C. Off

3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS

Refer to the Circuit Diagram.

3.5 SUBMITTED DOCUMENTS

- | | |
|---|--|
| ☒ User Manual | ☒ Rating Label |
| ☒ Circuit Diagram | ☒ PCB Layout |
| ☒ Block Diagram | ☒ Photo Document |
| ☐ Model Difference Letter | ☒ Parts List |

4 TEST SET-UP AND OPERATION MODES

4.1 PRINCIPLE OF CONFIGURATION SELECTION

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 TEST OPERATION AND TEST SOFTWARE

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10-2020 for FCC approval and ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 for ISED approval.

According to the description in clause 3.1, all tests were performed on model AX/IS I8217-LVE with AC/DC power supply as representative configuration and recorded in this report.

4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT

The EUT was tested together with the following accessories and auxiliary equipment:

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Laptop PC	Lenovo	Thinkpad T480	10Q67059
AC/DC Power Supply	Axis Communications	FSP040-DAAN3	N/A
PoE Midspan	Axis Communications	POEA30U-1ATE	02172-004

Table 6: List of Ports and Cables

Description	Specification	Max. Length	Cable Classification
Ethernet Cable	CAT5E/6 STP Cable, shielded	≥ 30 m	Wired Network Port
Relay cable	Two wire conductor cable, 24VD, unshielded	≤ 30 m	Signal/Control Port
I/O cable	Multi conductor cable, 4 x I/O ports, unshielded	≤ 30 m	Signal/Control Port
RS-485 cable	Multi conductor cable, RS-485 A/B type, unshielded	≥ 30 m	Signal/Control Port

4.4 COUNTERMEASURES TO ACHIEVE RADIO SPECTRUM COMPLIANCE

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 TEST SETUP DIAGRAM

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

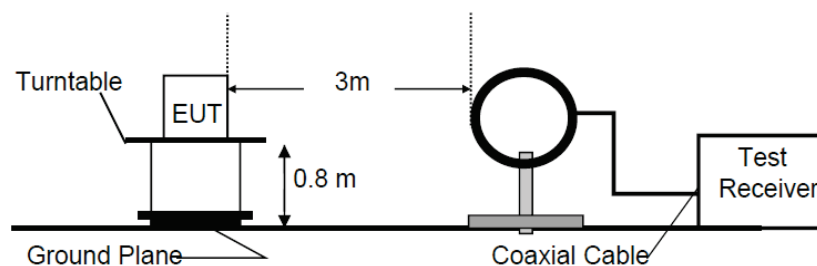


Diagram of Measurement Configuration for Radiation Test (30MHz to 1GHz)


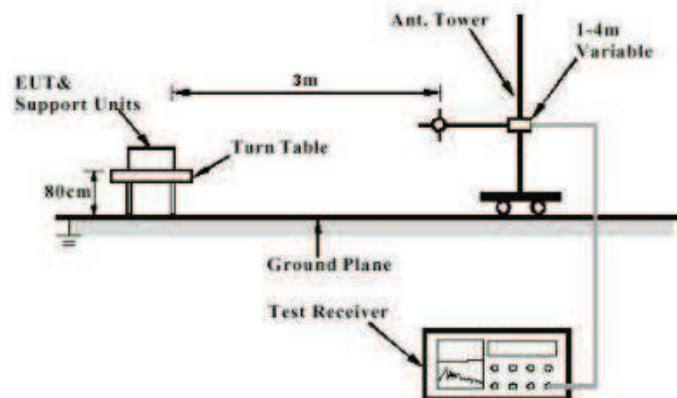


Diagram of Measurement Configuration for Mains Conduction Measurement

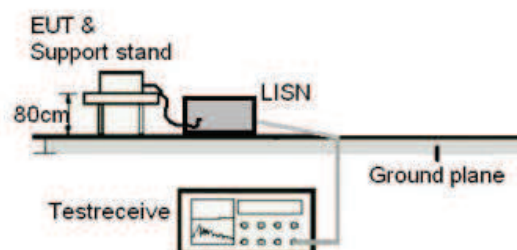

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 12 von 17
Page 12 of 17

5 TEST RESULTS

5.1 ESSENTIAL REQUIREMENTS OF TRANSMITTER

5.1.1 ANTENNA REQUIREMENT

RESULT:

Pass

Test standard : 47 CFR FCC Part 15 Subpart C, 15.203
RSS-Gen Issue 5 with Amendment 1 & 2 February 2021, section 6.8

According to the manufacturer's declaration, the EUT has an internal coil antenna, the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore, the EUT is considered sufficient to comply with the provision.

Note:
N/A

Refer to EUT Photo for details.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 13 von 17
Page 13 of 17

5.1.2 20 dB AND OCCUPIED BANDWIDTH

RESULT:

Pass

Test standard	:	47 CFR FCC Part 15 Subpart C, 15.215 RSS-Gen Issue 5 with Amendment 1 & 2 February 2021
Requirement	:	47 CFR FCC Part 15 Subpart C, 15.215, section (c) RSS-Gen Issue 5 with Amendment 1 & 2 February 2021, section 6.7
Basic standard	:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 ANSI C63.10-2020
Limits	:	Within assigned band
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2026-03-25 to 2026-04-20
Input Voltage	:	DC 24V via AC/DC power supply
Operation mode	:	A
Test conditions	:	☒ Normal conditions; ☐ Extreme conditions
Ambient temperature	:	23 °C
Relative humidity	:	50%
Atmospheric pressure	:	101.0 kPa

Note:
N/A

Refer to attached Appendix A for details of test results.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 14 von 17
Page 14 of 17

5.1.3 FREQUENCY STABILITY

RESULT:

Pass

Test standard	:	47 CFR FCC Part 15 Subpart C, 15.225 RSS-210 Issue 11 June 2024
Requirement	:	47 CFR FCC Part 15 Subpart C, 15.225, section (e) RSS-210 Issue 11 June 2024, Annex B.6 b)
Basic standard	:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 ANSI C63.10-2020
Limits	:	±0.01% of the operating frequency less than ±100 ppm
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2026-03-25 to 2026-04-20
Input Voltage	:	DC 24V via AC/DC power supply
Operation mode	:	A.1
Test conditions	:	☒ Normal conditions; ☒ Extreme conditions
Ambient temperature	:	23 °C
Relative humidity	:	50%
Atmospheric pressure	:	101.0 kPa

Note:
N/A

Refer to attached Appendix A for details of test results.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 15 von 17
Page 15 of 17

5.1.4 RADIATED EMISSIONS – IN-BAND AND OUT OF BAND

RESULT:

Pass

Test standard	:	47 CFR FCC Part 15 Subpart C, 15.225 RSS-210 Issue 11 June 2024
Requirement	:	47 CFR FCC Part 15 Subpart C, 15.225, section (a), (b), (c) & (d) RSS-210 Issue 11 June 2024, Annex B.6 a)
Basic standard	:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 ANSI C63.10-2020
Frequency range	:	47 CFR FCC Part 15 Subpart C, 15.209 & 15.205 9 kHz – 30 MHz 30 – 1000 MHz
Limits	:	i. 15.848 mV/m (84 dBμV/m) at 30 m, within the band 13.553-13.567 MHz ii. 334 μV/m (50.47 dBμV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz iii. 106 μV/m (40.51 dBμV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz iv. General field strength limits for frequencies outside the band 13.110 14.010 MHz 47 CFR 15.209(a) and RSS-Gen Issue 5 with Amendment 1 & 2 February 2021, section 8.9
Kind of test site	:	3m Semi-Anechoic Chamber

Test Setup

Date of testing	:	2026-03-25 to 2026-04-20
Input Voltage	:	DC 24V via AC/DC power supply
Operation mode	:	A
Test conditions	:	☒ Normal conditions; ☐ Extreme conditions
Ambient temperature	:	23 °C
Relative humidity	:	50%
Atmospheric pressure	:	101.0 kPa

Note:

In accordance with 47 CFR 15.31(f)(2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is:

Extrapolation (dB) = $40\log(300/3) = 80$ dB

Extrapolation (dB) = $40\log(30/3) = 40$ dB

Refer to attached Appendix A for details of test results.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 16 von 17
Page 16 of 17

5.1.5 CONDUCTED EMISSIONS ON AC MAINS

RESULT:

Pass

Test standard	:	47 CFR FCC Part 15 Subpart C, 15.207 RSS-Gen Issue 5 with Amendment 1 & 2 February 2021
Requirement	:	47 CFR FCC Part 15 Subpart C, 15.207, section (a) RSS-Gen Issue 5 with Amendment 1 & 2 February 2021, section 8.8
Basic standard	:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 ANSI C63.10-2020
Frequency range	:	0.15 – 30 MHz
Limits	:	47 CFR FCC Part 15 Subpart C, 15.207, section (a) RSS-Gen Issue 5 with Amendment 1 & 2 February 2021, Table 4 0.15 – 0.5 MHz, 66 to 56 dBuV (Quasi-peak), 56 to 46 dBuV (Average) 0.5 – 5 MHz, 56 dBuV (Quasi-peak), 46 dBuV (Average) 5 – 30 MHz, 60 dBuV (Quasi-peak), 50 (Average)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2026-03-25 to 2026-04-20
Input Voltage	:	DC 24V via AC/DC power supply
Operation mode	:	A
Test conditions	:	☒ Normal conditions; ☐ Extreme conditions
Ambient temperature	:	Refer to attached appendix
Relative humidity	:	Refer to attached appendix
Atmospheric pressure	:	Refer to attached appendix

Note:
N/A

Refer to attached Appendix A for details of test results.

Prüfbericht - Nr.: CN26TREE 002
Test Report No.:

Seite 17 von 17
Page 17 of 17

6 PHOTOGRAPHS OF THE TEST SETUP

For photographs of the test setup, refer to attached Appendix B.

7 LIST OF TABLES

Table 1: List of Test and Measurement Equipment.....	6
Table 2: System Measurement Uncertainty	7
Table 3: Rating of EUT	8
Table 4: Technical Specification of EUT.....	8
Table 5: List of Accessories and Auxiliary Equipment.....	10
Table 6: List of Ports and Cables	10



===== END OF REPORT =====

APPENDIX A: TEST RESULTS OF RFID OPERATING



APPENDIX A: TEST RESULTS OF RFID OPERATING	1
APPENDIX A.1: 20 dB BANDWIDTH AND OCCUPIED BANDWIDTH	2
RFID 13.56 MHz operating	2
RFID 125 kHz operating (informative information)	3
APPENDIX A.2: FREQUENCY STABILITY	4
RFID 13.56 MHz operating	4
APPENDIX A.3: CONDUCTED EMISSIONS ON AC MAINS	5
RFID 13.56 MHz & 125 kHz operating	5
Live	5
Neutral	6
APPENDIX A.4: RADIATED EMISSIONS – IN-BAND AND OUT OF BAND	7
RFID 13.56 MHz operating – In-band emissions	7
Polarization – X	7
Polarization – Y	8
Polarization – Z	9
RFID 13.56 MHz operating – Out of Band, frequency range 9 kHz to 30 MHz	10
Polarization – X	10
Polarization – Y	11
Polarization – Z	12
RFID 13.56 MHz operating – Out of Band, frequency range 30 MHz to 1 GHz	13
Polarization – Horizontal	13
Polarization – Vertical	14
RFID 125 kHz operating – Out of Band, frequency range 9 kHz to 30 MHz	15
Polarization – X	15
Polarization – Y	16
Polarization – Z	17
RFID 125 kHz operating – Out of Band, frequency range 30 MHz to 1 GHz	18
Polarization – Horizontal	18
Polarization – Vertical	19

APPENDIX A.1: 20 dB BANDWIDTH AND OCCUPIED BANDWIDTH

RFID 13.56 MHz operating

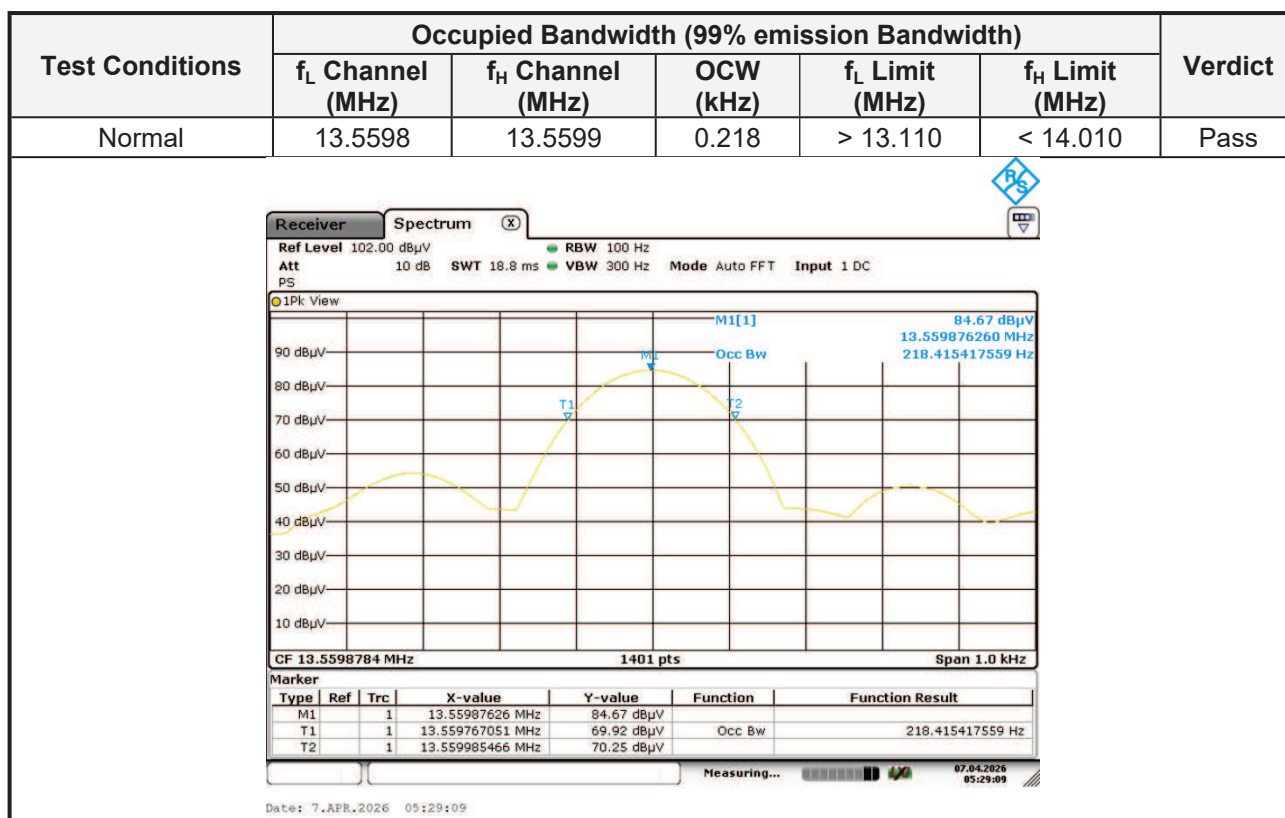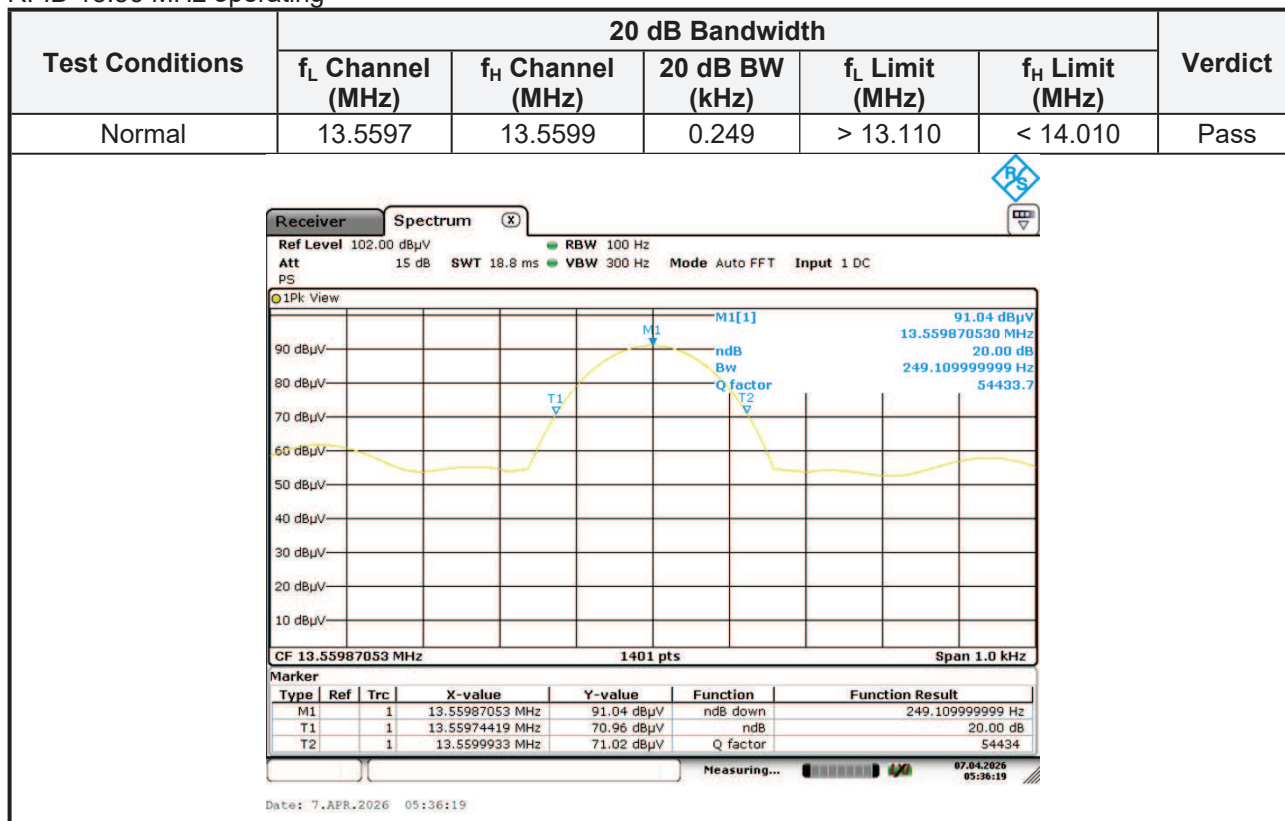

RFID 125 kHz operating (informative information)

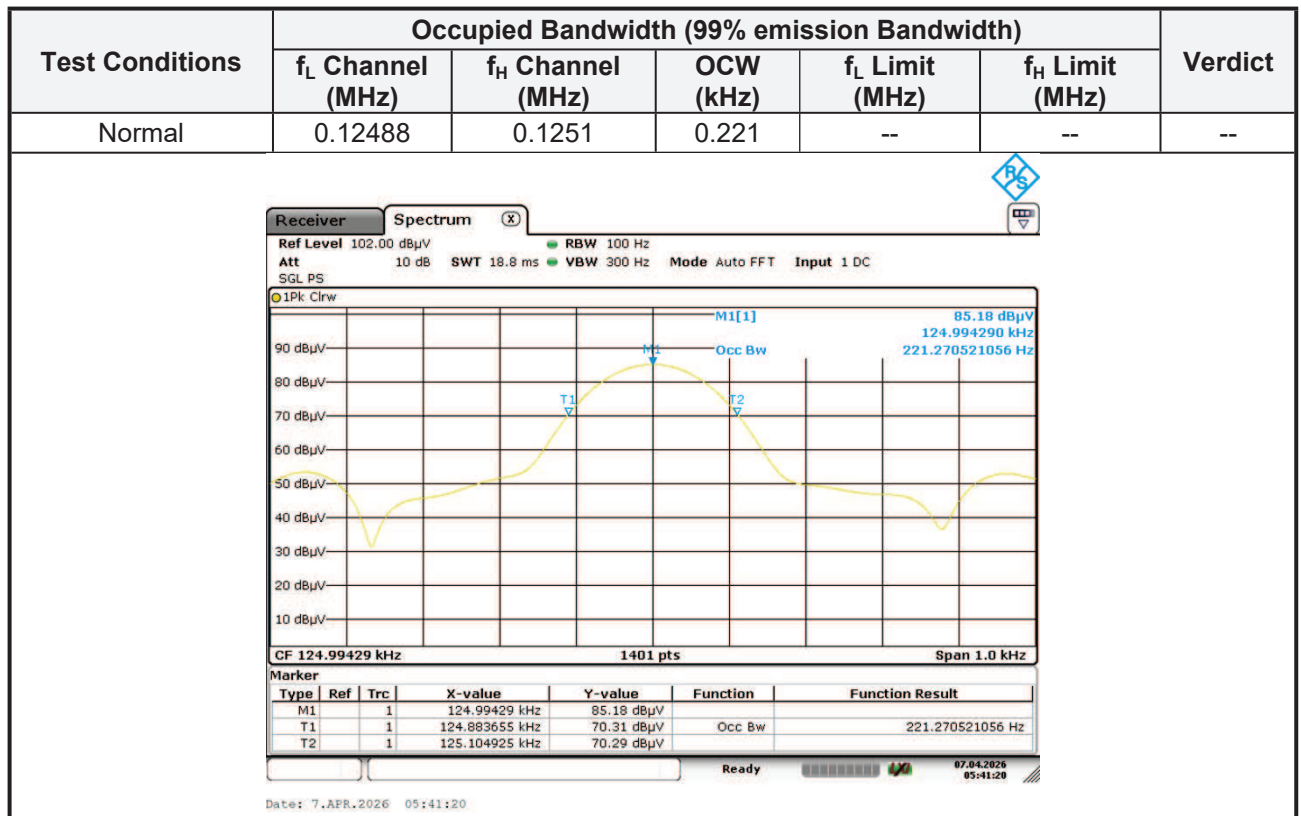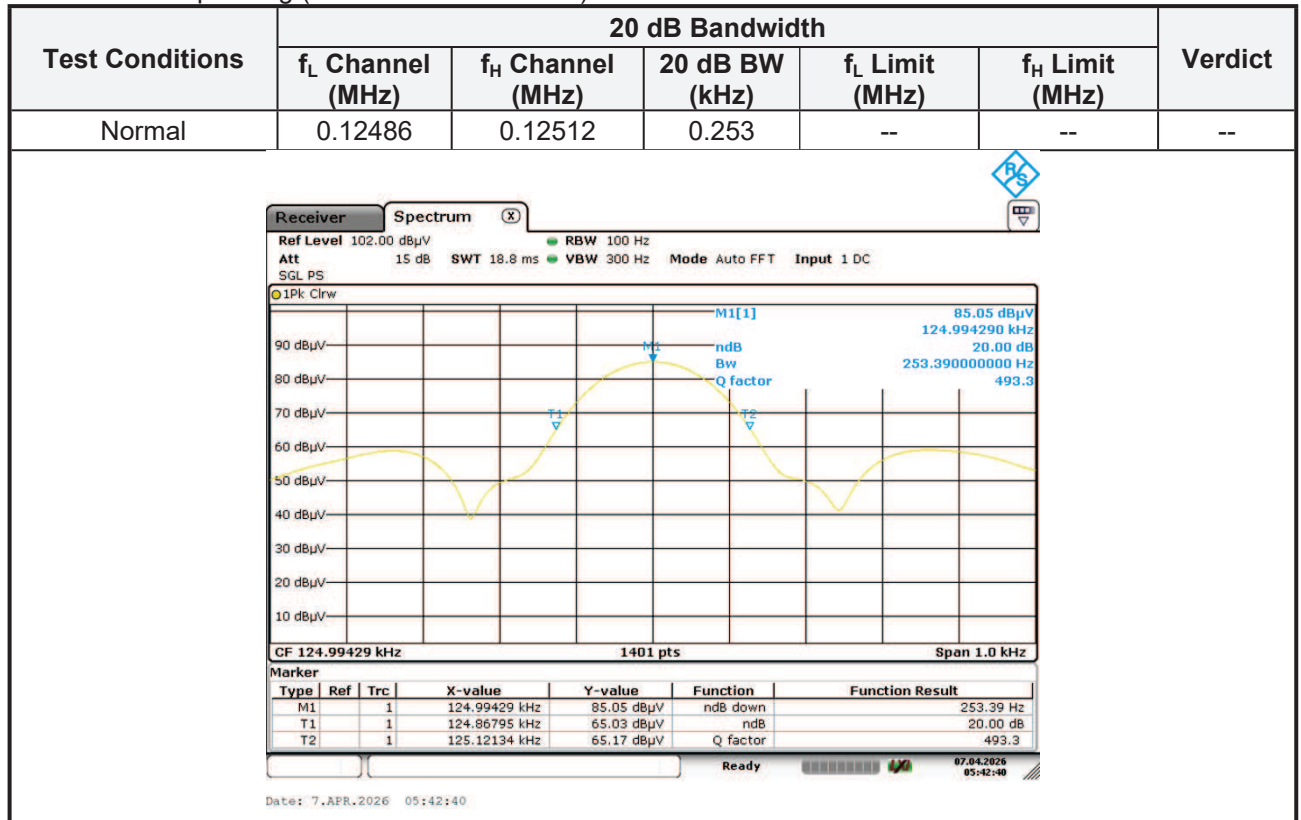

APPENDIX A.2: FREQUENCY STABILITY

RFID 13.56 MHz operating

Test Frequency f_c (MHz)	Test Conditions		Test Results (MHz)	Deviation (kHz)	Limit	Result
	Temp(°C)	Volt (V DC)				
13.56	-20	24	13.560712	0.712	100ppm $\pm 0.01\%$ of f_c (1.356 kHz)	Pass
	-10	24	13.560889	0.889		Pass
	0	24	13.560715	0.715		Pass
	10	24	13.560894	0.894		Pass
	20	24	13.560618	0.618		Pass
	30	24	13.560748	0.748		Pass
	40	24	13.560847	0.847		Pass
	50	24	13.560869	0.869		Pass
	20	20.4	13.560799	0.799		Pass
		24	13.560834	0.834		Pass
		27.6	13.560824	0.824		Pass

Note: Deviation (kHz) = (Test Result- f_c)*1000


APPENDIX A.3: CONDUCTED EMISSIONS ON AC MAINS

RFID 13.56 MHz & 125 kHz operating

Live

EUT Information

EUT Name:	Network Video Intercom
Order Number:	27221692
Model:	AXIS I8217-LVE
Test Mode:	On, Normal operating with RFID and T-Coil active, powered by AC/DC adapter
Test Voltage:	AC 120V/ 60Hz
Test By:/Review By	Dawn Shen / Charlie Zha
Tem./Hum./Pressure:	24.1°C/51.0%/101kPa
Remark:	Live

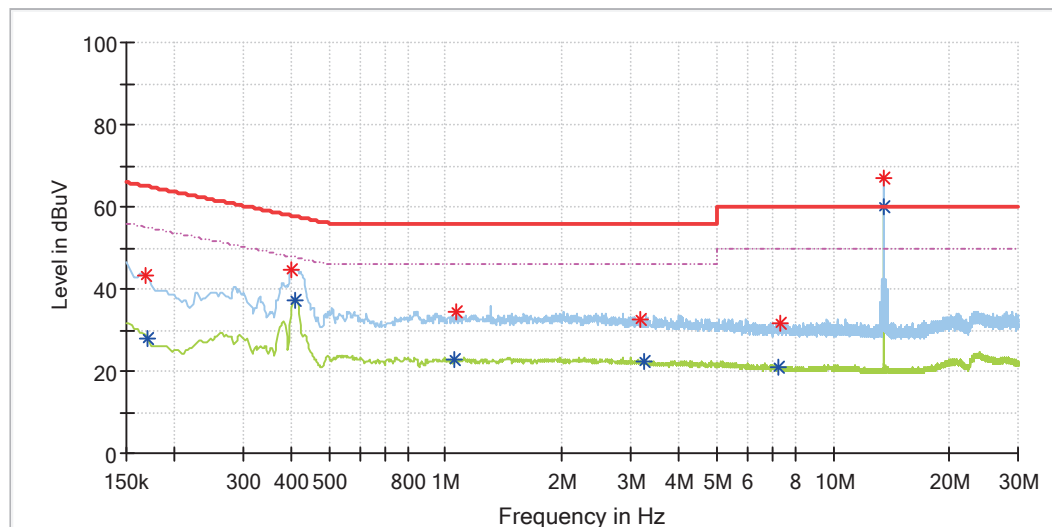

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.167	43.3	---	65.09	21.79	N	9.8
0.170	---	28.0	54.97	26.97	N	9.8
0.401	44.5	---	57.83	13.33	N	9.9
0.409	---	37.4	47.68	10.28	N	9.9
1.055	---	22.9	46.00	23.10	N	9.8
1.068	34.2	---	56.00	21.80	N	9.8
3.195	32.6	---	56.00	23.40	N	9.8
3.254	---	22.3	46.00	23.70	N	9.8
7.200	---	21.0	50.00	29.00	N	9.9
7.331	31.4	---	60.00	28.60	N	9.9
13.560	---	59.8	50.00	-9.80	N	9.6
13.560	66.8	---	60.00	-6.80	N	9.6


Remark:

The frequencies exceeding the limit is RFID operating frequency, therefore it is not subject to the limits.

Neutral

EUT Information

EUT Name: Network Video Intercom
Order Number: 27221692
Model: AXIS I8217-LVE
Test Mode: On, Normal operating with RFID and T-Coil active, powered by AC/DC adapter
Test Voltage: AC 120V/ 60Hz
Test By:/Review By: Dawn Shen / Charlie Zha
Tem./Hum./Pressure: 24.1°C/51.0%/101kPa
Remark: Neutral

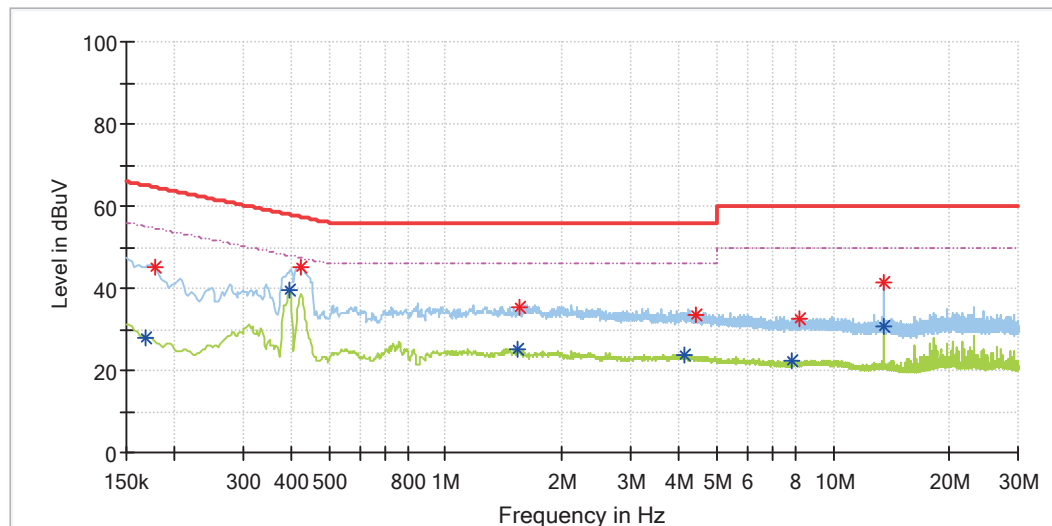

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.167	---	28.1	55.09	26.99	L1	9.6
0.177	45.2	---	64.61	19.41	L1	9.7
0.396	---	39.4	47.93	8.53	L1	9.5
0.421	44.9	---	57.43	12.53	L1	9.5
1.541	---	25.1	46.00	20.90	L1	9.6
1.555	35.3	---	56.00	20.70	L1	9.6
4.145	---	23.6	46.00	22.40	L1	9.7
4.443	33.7	---	56.00	22.30	L1	9.7
7.864	---	22.1	50.00	27.90	L1	9.9
8.170	32.6	---	60.00	27.40	L1	9.9
13.560	41.4	---	60.00	18.60	L1	9.6
13.560	---	30.7	50.00	19.30	L1	9.6


APPENDIX A.4: RADIATED EMISSIONS – IN-BAND AND OUT OF BAND

RFID 13.56 MHz operating – In-band emissions

Polarization – X

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

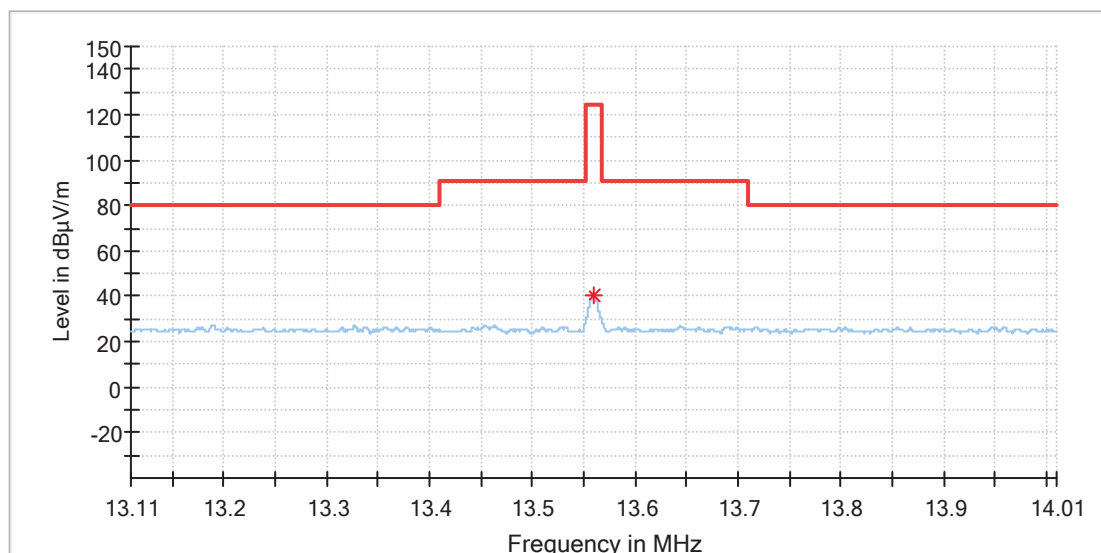

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.559868	40.33	124.00	83.67	100.0	X	14.0	20.0


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Y

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

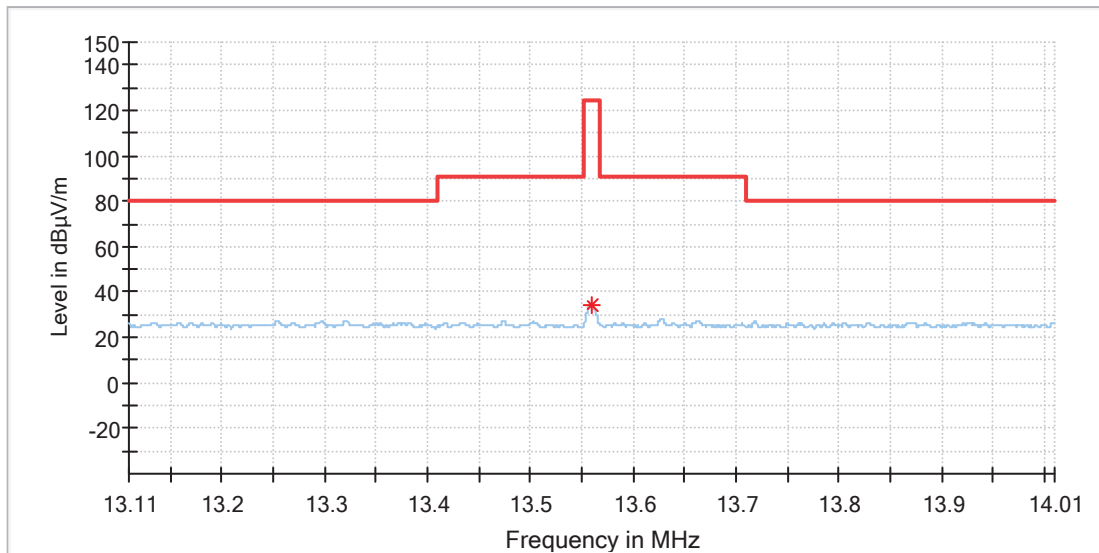

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.559074	34.30	124.00	89.70	100.0	Y	321.0	20.0


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Z

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

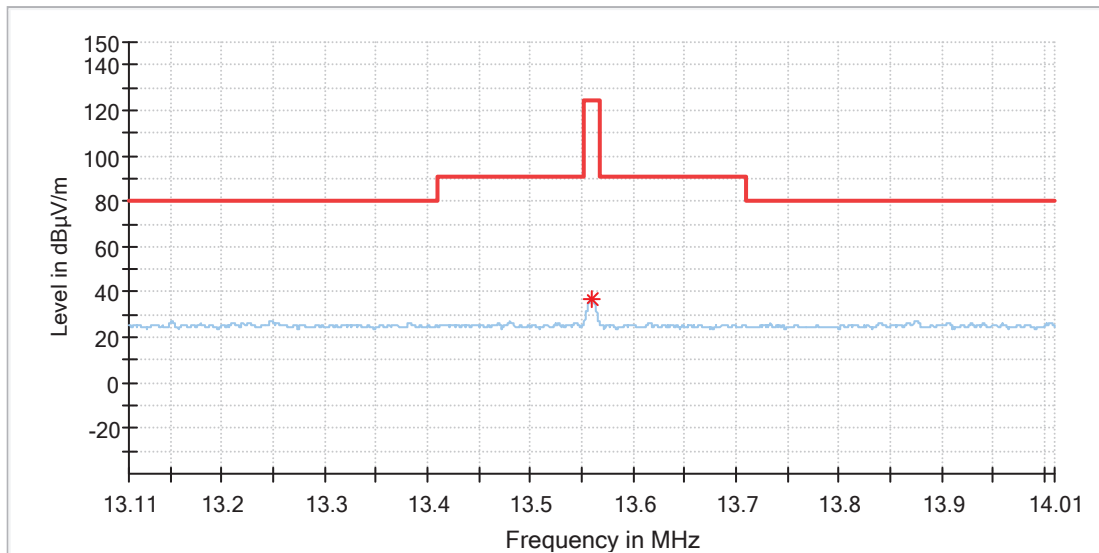

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	37.21	124.00	86.79	100.0	Z	55.0	20.0

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

RFID 13.56 MHz operating – Out of Band, frequency range 9 kHz to 30 MHz

Polarization – X

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

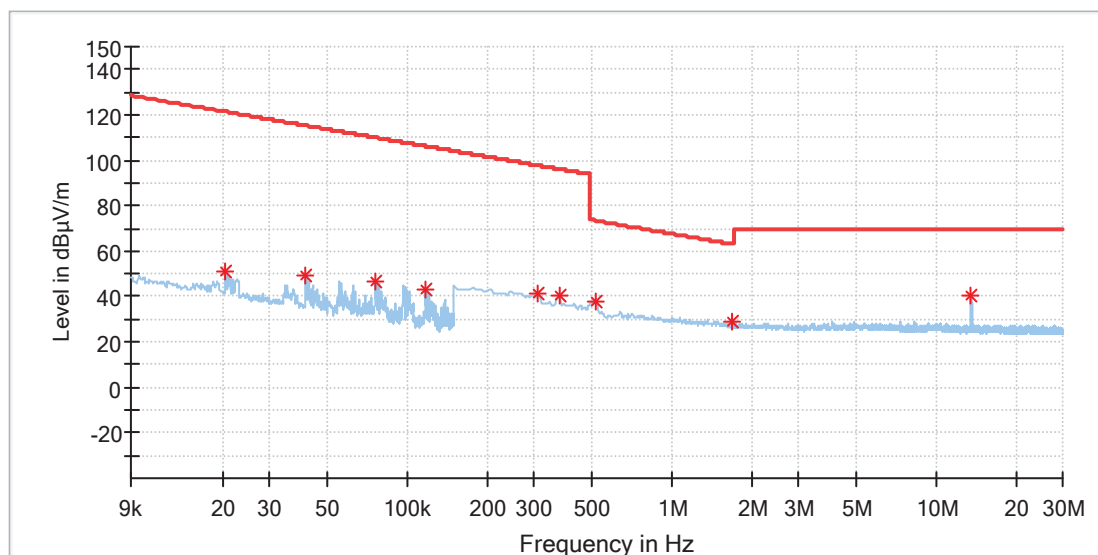

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020582	50.68	121.32	70.64	100.0	X	109.0	19.9
0.041329	49.14	115.27	66.12	100.0	X	109.0	19.9
0.075874	46.67	109.99	63.32	100.0	X	109.0	19.9
0.117369	42.79	106.21	63.42	100.0	X	109.0	19.9
0.312419	41.51	97.71	56.19	100.0	X	93.0	19.9
0.373875	40.36	96.15	55.79	100.0	X	231.0	19.9
0.518735	37.48	73.31	35.82	100.0	X	125.0	19.9
1.690787	28.91	63.07	34.16	100.0	X	356.0	20.0
13.560552	40.43	69.50	29.07	100.0	X	4.0	20.3


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Y

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

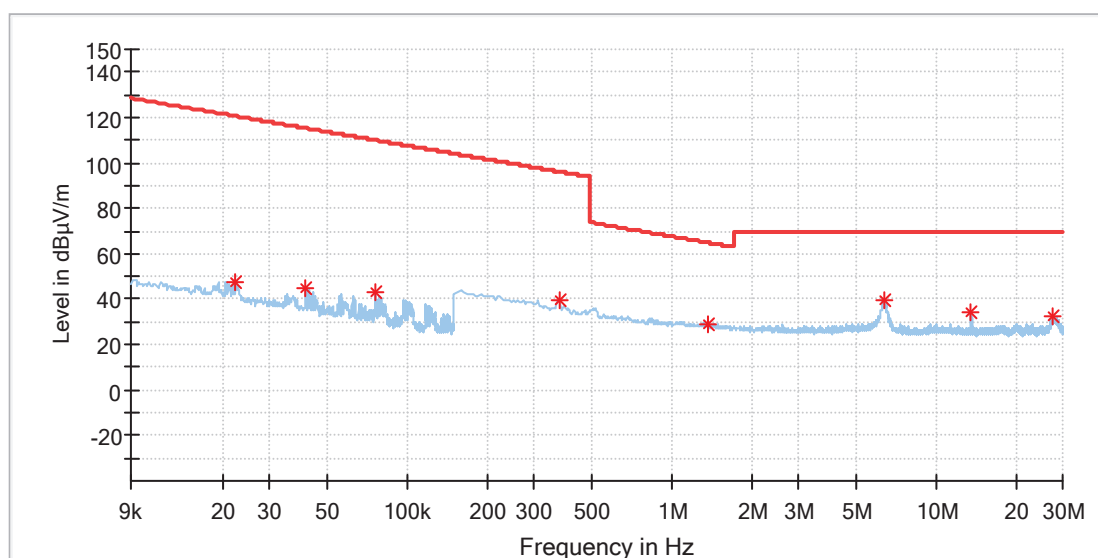

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.022395	47.47	120.59	73.12	100.0	Y	65.0	19.9
0.041329	44.61	115.27	70.66	100.0	Y	44.0	19.9
0.075774	42.67	110.01	67.34	100.0	Y	77.0	19.9
0.373875	39.94	96.15	56.21	100.0	Y	271.0	19.9
1.374728	29.26	64.87	35.60	100.0	Y	157.0	19.9
6.335096	39.44	69.50	30.06	100.0	Y	184.0	20.1
13.560552	34.10	69.50	35.40	100.0	Y	298.0	20.3
27.581272	32.49	69.50	37.01	100.0	Y	132.0	20.5


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Z

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

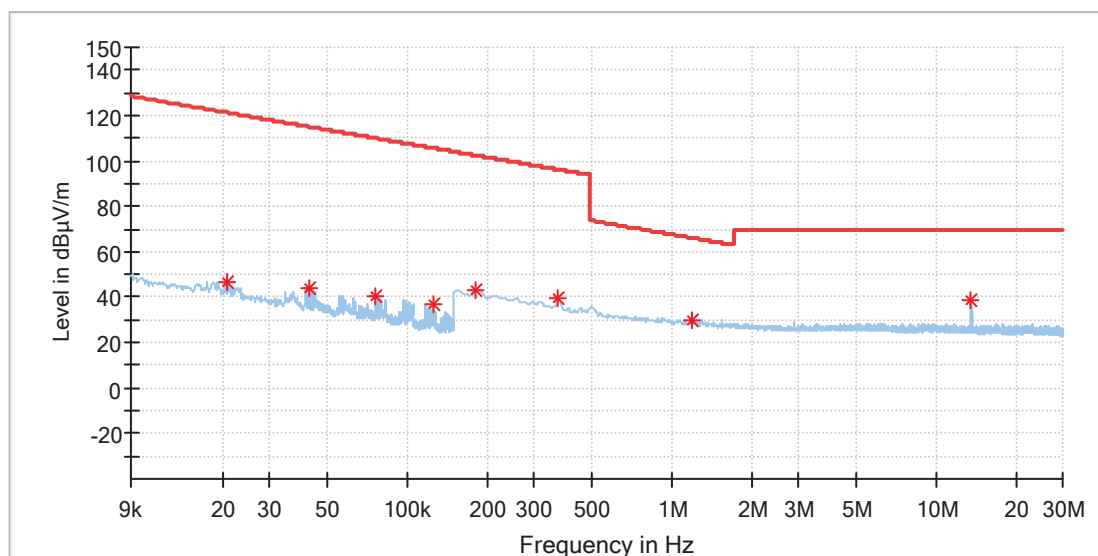

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020683	46.74	121.28	74.54	100.0	Z	121.0	19.9
0.042437	43.86	115.04	71.18	100.0	Z	100.0	19.9
0.075774	40.68	110.01	69.33	100.0	Z	115.0	19.9
0.125023	36.68	105.66	68.97	100.0	Z	218.0	19.9
0.180728	43.14	102.46	59.32	100.0	Z	105.0	19.8
0.369485	39.55	96.25	56.70	100.0	Z	226.0	19.9
1.185971	30.00	66.14	36.14	100.0	Z	257.0	19.9
13.560552	38.54	69.50	30.96	100.0	Z	358.0	20.3

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

RFID 13.56 MHz operating – Out of Band, frequency range 30 MHz to 1 GHz

Polarization – Horizontal

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

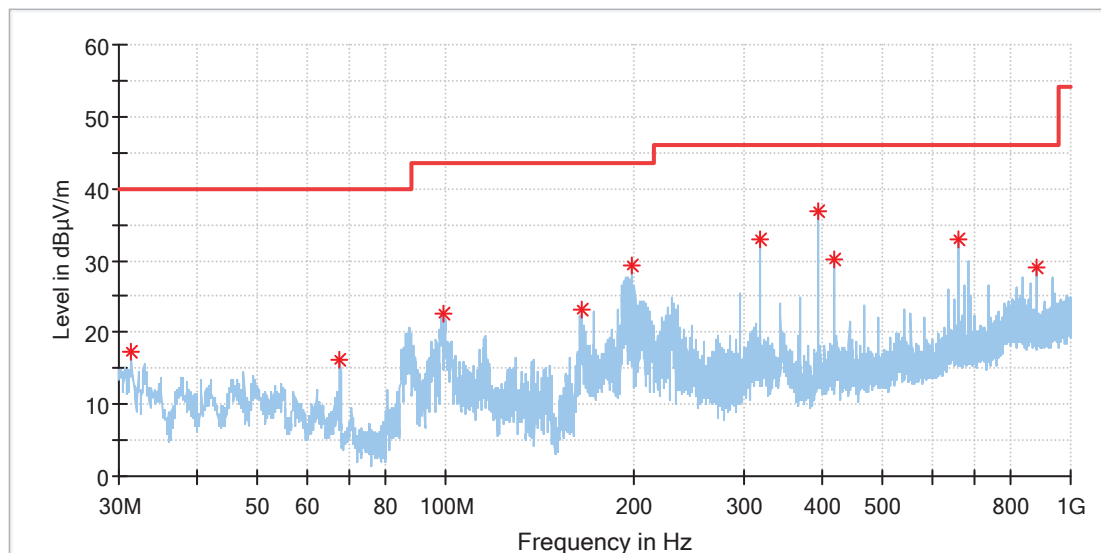

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.401111	17.32	40.00	22.68	100.0	H	0.0	-22.8
67.776111	16.22	40.00	23.78	100.0	H	86.0	-21.2
99.247222	22.61	43.50	20.89	100.0	H	55.0	-19.2
165.315000	23.26	43.50	20.24	100.0	H	148.0	-21.5
199.049444	29.38	43.50	14.12	100.0	H	124.0	-19.1
319.491111	32.92	46.00	13.08	100.0	H	177.0	-15.7
393.211111	36.94	46.00	9.06	100.0	H	16.0	-13.9
417.784444	30.07	46.00	15.93	100.0	H	39.0	-13.3
663.571667	33.02	46.00	12.98	100.0	H	46.0	-8.6
884.785556	29.04	46.00	16.96	100.0	H	69.0	-5.0


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Vertical

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 13.56 MHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

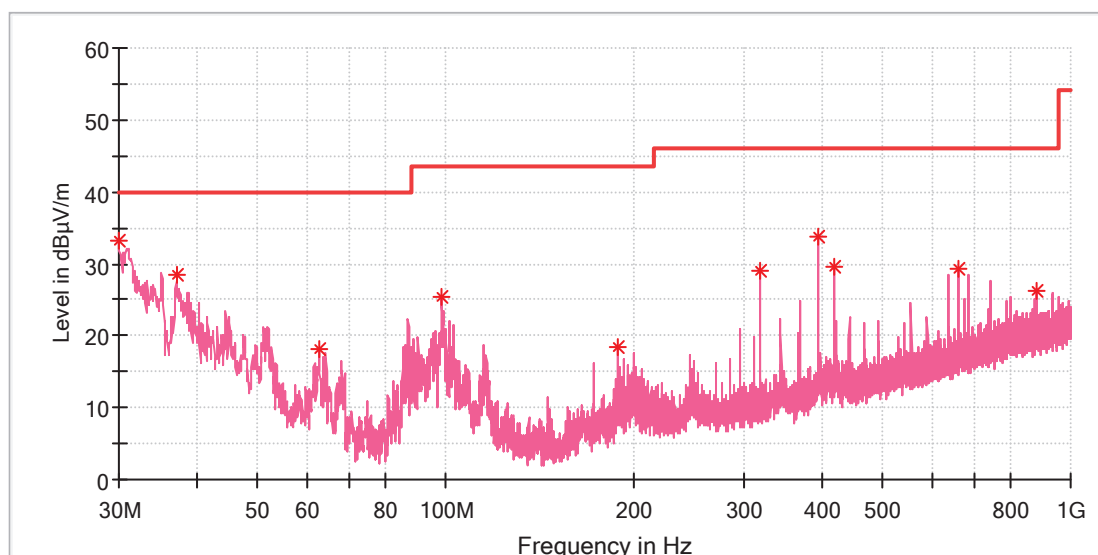

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.000000	33.32	40.00	6.68	100.0	V	39.0	-23.0
37.167222	28.38	40.00	11.62	100.0	V	121.0	-21.1
62.764444	18.15	40.00	21.85	100.0	V	81.0	-19.7
98.762222	25.27	43.50	18.23	100.0	V	55.0	-19.3
188.864444	18.45	43.50	25.05	100.0	V	81.0	-19.7
319.491111	29.07	46.00	16.93	100.0	V	150.0	-15.7
393.211111	33.88	46.00	12.12	100.0	V	341.0	-13.9
417.784444	29.49	46.00	16.51	100.0	V	312.0	-13.3
663.571667	29.25	46.00	16.75	100.0	V	188.0	-8.6
884.731667	26.29	46.00	19.71	100.0	V	276.0	-5.0

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

RFID 125 kHz operating – Out of Band, frequency range 9 kHz to 30 MHz

Polarization – X

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 125 kHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

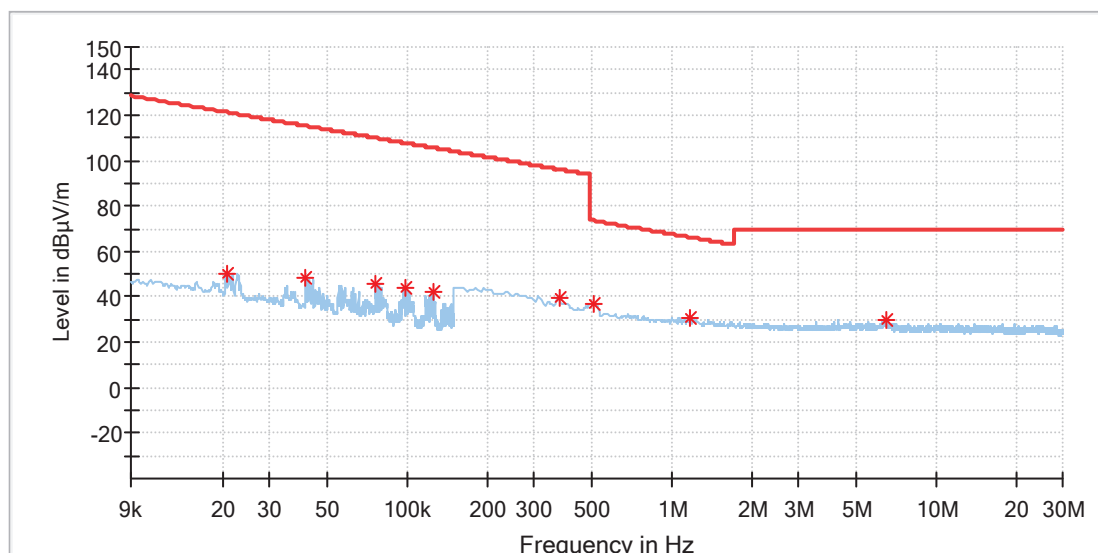

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020683	50.25	121.28	71.03	100.0	X	104.0	19.9
0.041329	48.07	115.27	67.19	100.0	X	101.0	19.9
0.075874	45.56	109.99	64.43	100.0	X	107.0	19.9
0.098938	44.02	107.69	63.67	100.0	X	122.0	19.9
0.125023	42.53	105.66	63.13	100.0	X	265.0	19.9
0.373875	39.73	96.15	56.41	100.0	X	157.0	19.9
0.509956	37.25	73.45	36.21	100.0	X	114.0	19.9
1.172802	30.78	66.24	35.46	100.0	X	356.0	19.9
6.506294	29.94	69.50	39.56	100.0	X	229.0	20.1


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Y

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 125 kHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

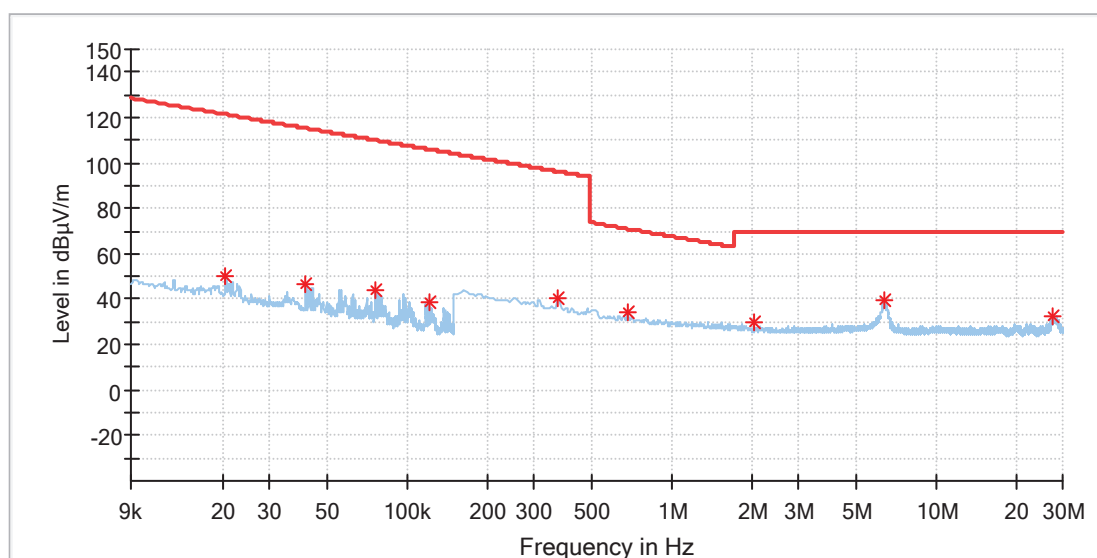

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020582	49.92	121.32	71.40	100.0	Y	60.0	19.9
0.041229	46.54	115.29	68.74	100.0	Y	60.0	19.9
0.075673	43.63	110.02	66.39	100.0	Y	60.0	19.9
0.120088	38.33	106.01	67.68	100.0	Y	60.0	19.9
0.369485	40.05	96.25	56.20	100.0	Y	169.0	19.9
0.681155	34.07	70.95	36.88	100.0	Y	328.0	19.9
2.046353	29.83	69.50	39.67	100.0	Y	56.0	20.0
6.313147	39.56	69.50	29.94	100.0	Y	282.0	20.1
27.638338	32.41	69.50	37.09	100.0	Y	91.0	20.5


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Z

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 125 kHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

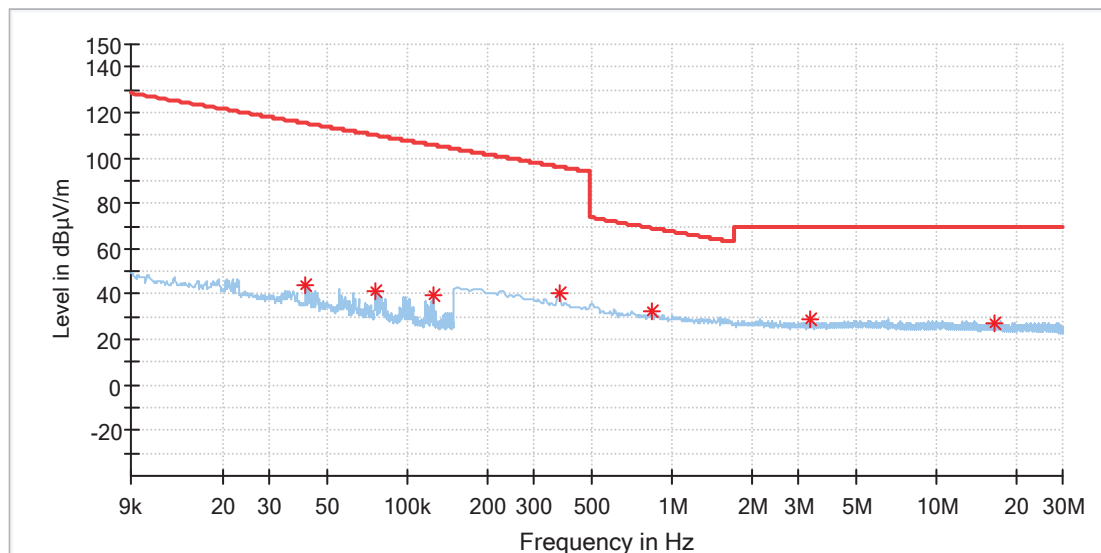

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.041329	44.14	115.27	71.13	100.0	Z	112.0	19.9
0.075874	41.65	109.99	68.34	100.0	Z	112.0	19.9
0.125023	39.23	105.66	66.43	100.0	Z	189.0	19.9
0.373875	40.29	96.15	55.86	100.0	Z	145.0	19.9
0.834794	32.30	69.19	36.89	100.0	Z	45.0	19.9
3.350096	29.13	69.50	40.37	100.0	Z	8.0	20.0
16.712360	27.42	69.50	42.08	100.0	Z	156.0	20.3

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

RFID 125 kHz operating – Out of Band, frequency range 30 MHz to 1 GHz

Polarization – Horizontal

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 125 kHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

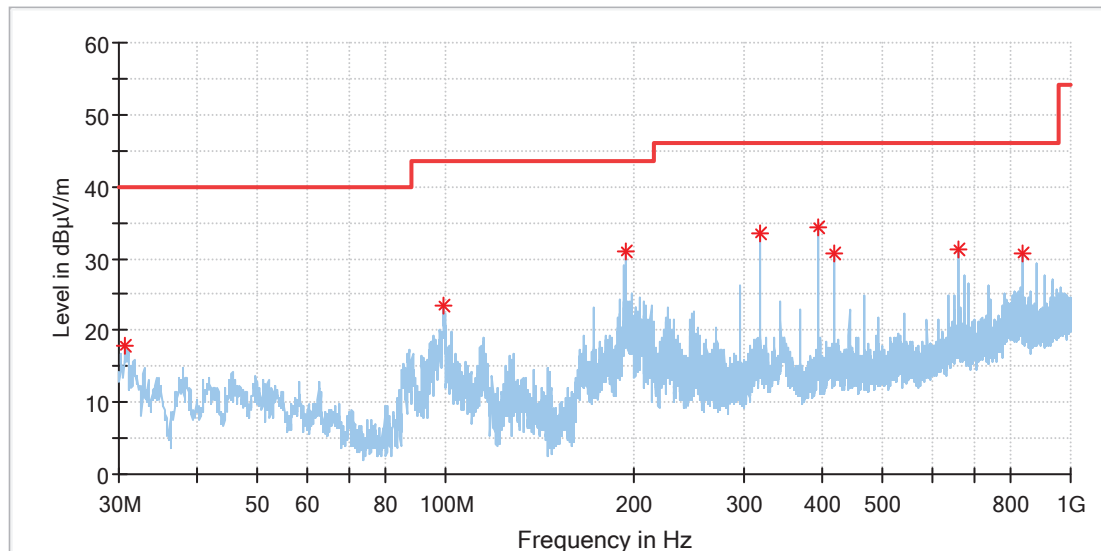

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.700556	17.73	40.00	22.27	100.0	H	0.0	-22.9
99.301111	23.46	43.50	20.04	100.0	H	183.0	-19.2
194.522778	30.93	43.50	12.57	100.0	H	108.0	-19.3
319.491111	33.58	46.00	12.42	100.0	H	190.0	-15.7
393.211111	34.33	46.00	11.67	100.0	H	30.0	-13.9
417.784444	30.78	46.00	15.22	100.0	H	38.0	-13.3
663.571667	31.27	46.00	14.73	100.0	H	94.0	-8.6
835.585000	30.59	46.00	15.41	100.0	H	140.0	-5.6


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Polarization – Vertical

EUT Information

EUT Name:	Network Video Intercom
Model:	AXIS I8217-LVE
Test Mode:	Mode A, 125 kHz operating
Order No/Sample No:	27221692/A004213713-001
Test Voltage:	DC 24V via AC/DC adapter
Remark:	Temp 23 Humi:53%
Test Standard:	FCC PART 15C / RSS-210
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

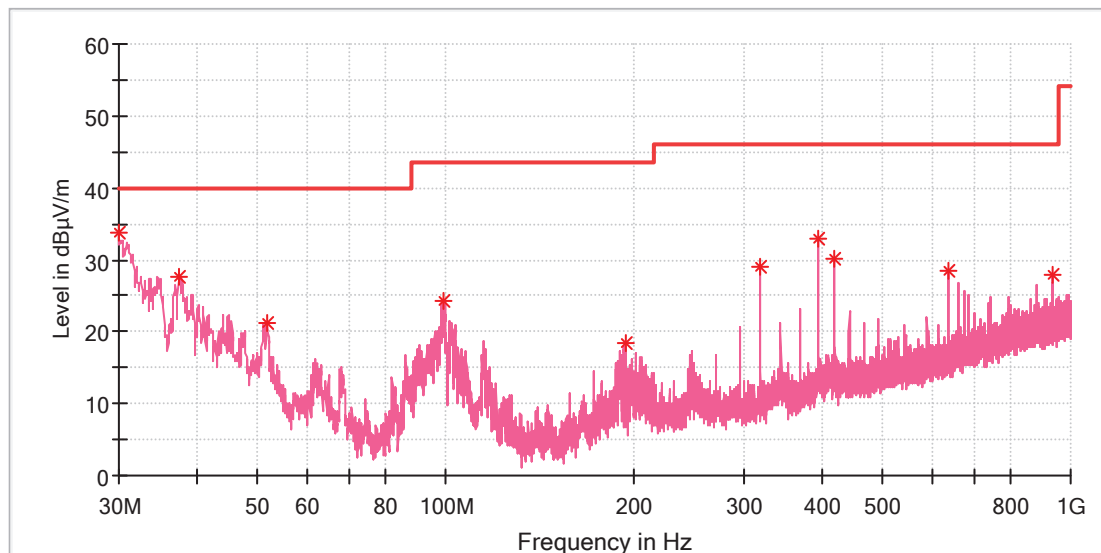

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.053889	33.82	40.00	6.18	100.0	V	86.0	-23.0
37.436667	27.71	40.00	12.29	100.0	V	45.0	-21.0
51.717222	21.21	40.00	18.79	100.0	V	93.0	-18.4
99.516667	24.30	43.50	19.20	100.0	V	78.0	-19.2
194.091667	18.53	43.50	24.97	100.0	V	69.0	-19.3
319.491111	28.88	46.00	17.12	100.0	V	154.0	-15.7
393.211111	32.86	46.00	13.14	100.0	V	0.0	-13.9
417.784444	30.03	46.00	15.97	100.0	V	309.0	-13.3
638.998333	28.44	46.00	17.56	100.0	V	154.0	-9.0
938.458889	27.82	46.00	18.18	100.0	V	30.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

===== END OF APPENDIX =====