CERTIFICATE OF COMPLIANCE
SAR EVALUATION

Test Lab:	**Applicant Information:**
CELLTECH RESEARCH INC. Testing and Engineering Lab 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250 - 860-3130 Fax: 250 - 860-3110 Toll Free: 1-877-545-6287 e-mail: info@celltechlabs.com web site: www.celltechlabs.com	**WITHUS IT CO., LTD.** 2F. DongNam Bldg. 448-16 Shingil-5Dong, YongDungPo-Ku, Seoul, Korea Contact: Mr. David Oh

FCC ID:	**POQ-WPE-1000**
Model(s):	**WPE-1000**
Equipment Type:	**Single-Mode PCS CDMA Phone**
Classification:	**Part 24 Licensed Portable Transmitter Held to Ear (PCE)**
Tx Frequency Range:	**1851.25 - 1908.75 MHz**
Max. RF Output Power:	**24.5 dBm (Conducted)**
FCC Rule Part(s):	**2.1093; ET Docket 96.326**

This wireless portable device has been shown to be compliant for localized Specific Absorption Rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and has been tested in accordance with the measurement procedures specified in ANSI/IEEE Std. C95.3-1999.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Celltech Research Inc. certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

Shawn McMillen
General Manager
Celltech Research Inc.

© 2001 Celltech Research Inc.

TABLE OF CONTENTS

1.0 **INTRODUCTION**…… 1

2.0 **DESCRIPTION OF EUT**……..……..…… 1

3.0 **SAR MEASUREMENT SYSTEM** …… 2

4.0 **MEASUREMENT SUMMARY**……..……... 3-4

5.0 **SAR LIMITS**…… 5

6.0 **DETAILS OF SAR EVALUATION**……. 5

7.0 **EVALUATION PROCEDURES**……..…….. 6

8.0 **SYSTEM VALIDATION**……..... 6

9.0 **SIMULATED EQUIVALENT TISSUES**…….……. 7

10.0 **TISSUE PARAMETERS**…… 7

11.0 **SYSTEM SPECIFICATIONS**.……... 8

12.0 **TEST EQUIPMENT LIST**……..…… 9

13.0 **MEASUREMENT UNCERTAINTIES**……. 10

14.0 **REFERENCES**……. 11

APPENDIX A - SAR MEASUREMENT DATA……..…….. 12
APPENDIX B - DIPOLE VALIDATION……..……. 13
APPENDIX C - PROBE CALIBRATION……..…… 14
APPENDIX D - SAR TEST SETUP PHOTOGRAPHS…… 15

© 2001 Celltech Research Inc.

1.0 INTRODUCTION

This measurement report shows compliance of the WITHUS IT CO., LTD. Model: WPE-1000 Single-Mode PCS CDMA Phone FCC ID: POQ-WPE-1000 with FCC Part 2.1093, ET Docket 96-326 Rules for mobile and portable devices. The test procedures, as described in American National Standards Institute C95.1-1992 (1), FCC OET Bulletin 65-1997 were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION of Equipment Under Test (EUT)

EUT Type	Single-Mode PCS CDMA Phone	**FCC ID**	POQ-WPE-1000
Equipment Class	Part 24 Licensed Portable Transmitter Held to Ear (PCE)	**Model No.(s)**	WPE-1000
FCC Rule Part(s)	§ 2.1093, Docket 96-326	**Application Type**	Part 24 Certification
Tx Frequency Range	1851.25-1908.75 MHz	**S/N No.**	Pre-production
Rx Frequency Range	1931.25-1988.75 MHz	**Max. RF Output Power**	24.5 dBm (Conducted)
Modulation	CDMA	**Battery Type(s)**	3.7V Lithium Ion Battery
Antenna Type	Whip	**Antenna Length**	68 mm

Front Profile

Left Profile

Right Profile

Rear Profile

3.0 SAR MEASUREMENT SYSTEM

Celltech Research SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY system is comprised of the robot controller, computer, near-field probe, probe alignment sensor, and the generic twin phantom containing brain or muscle equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE3 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

DASY3 SAR Measurement System

4.0 MEASUREMENT SUMMARY

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the EUT are reported in Appendix A.

HEAD SAR MEASUREMENT RESULTS

Freq. (MHz)	Channel	Modulation	Conducted Power (dBm)	Battery Type	Antenna Position	Phantom Position	SAR (w/kg)
1851.25	25	CDMA	24.5	Standard	Retracted	Left Ear	0.671
1851.25	25	CDMA	24.5	Standard	Extended	Left Ear	1.31
1880.00	600	CDMA	24.1	Standard	Retracted	Left Ear	0.727
1880.00	600	CDMA	24.1	Standard	Extended	Left Ear	1.45
1908.75	1175	CDMA	24.2	Standard	Retracted	Left Ear	0.646
1908.75	1175	CDMA	24.2	Standard	Extended	Left Ear	1.45
Mixture Type: BRAIN Dielectric Constant: 40.5 Conductivity: 1.35			**ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population BRAIN: 1.6 W/kg (averaged over 1 gram)**				

Notes:
1. The SAR values found were below the maximum limit of 1.6 w/kg.
2. The highest head SAR value found was 1.45 w/kg.
3. The EUT was tested for head SAR using the standard battery, which is the only battery option for this phone.



Head SAR Test Setup

MEASUREMENT SUMMARY (CONT.)

BODY SAR TEST RESULTS

Freq. (MHz)	Channel	Modulation	Conducted Power (dBm)	Phantom Section	Separation Distance (cm)	Antenna Position	SAR (w/kg)
1851.25	25	CDMA	24.5	Flat	1.0	Retracted	0.546
1851.25	25	CDMA	24.5	Flat	1.0	Extended	1.38
1880.00	600	CDMA	24.1	Flat	1.0	Retracted	0.735
1880.00	600	CDMA	24.1	Flat	1.0	Extended	1.39
1908.75	1175	CDMA	24.2	Flat	1.0	Retracted	0.773
1908.75	1175	CDMA	24.2	Flat	1.0	Extended	1.42
Mixture Type: Muscle Dielectric Constant: 54.6 Conductivity: 1.39			**ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population BODY: 1.6 W/kg (averaged over 1 gram)**				

Notes:

1. The SAR values found were below the maximum limit of 1.6 w/kg.
2. The highest body SAR value found was 1.42 w/kg.
3. The EUT was tested for body SAR with a 1.0cm separation distance between the back of the phone and the outer surface of the planar phantom.
4. The EUT was tested for body SAR using the standard battery, which is the only battery option for this phone.



Body SAR Test Setup
with 1.0cm spacing

5.0 SAR SAFETY LIMITS

EXPOSURE LIMITS (General Population / Uncontrolled Exposure Environment)	**SAR** (W/Kg)
Spatial Average (averaged over the whole body)	0.08
Spatial Peak (averaged over any 1g of tissue)	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.00

Notes: 1. The FCC SAR safety limits specified in the table above apply to devices operated in the General Population / Uncontrolled Exposure environment.

2. Uncontrolled environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

6.0 DETAILS OF SAR EVALUATION

The WITHUS IT CO., LTD. Model: WPE-1000 Single-Mode PCS CDMA Phone FCC ID: POQ-WPE-1000 was found to be compliant for localized Specific Absorption Rate (SAR) based on the following test provisions and conditions:

1) The handset was placed in a normal operating position with the center of the ear-piece aligned with the ear canal on the phantom.
2) With the ear-piece touching the phantom the center line of the handset was aligned with an imaginary plane (X and Y axis) consisting of three lines connecting both ears and the mouth.
3) The handset was gradually moved towards the cheek until any point of the mouth-piece or keypad touched the cheek.
4) The EUT was tested for body SAR with a 1.0cm separation distance between the back of the phone and the outer surface of the planar phantom.
5) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimize drift. The conducted power levels were checked before and after each test.
6) The device was keyed to operate continuously in the transmit mode for the duration of the test.
7) The location of the maximum spatial SAR distribution (Hot Spot) was determined relative to the handset and its antenna.
8) The EUT was tested with a fully charged battery.

7.0 EVALUATION PROCEDURES

The Specific Absorption Rate (SAR) evaluation was performed in the following manner:

a. (i) The evaluation was performed in an applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated at the center frequency of the band at maximum power. The ear position that produced the greatest SAR determined which side of the phantom would be used for the entire evaluation. FCC OET Bulletin 65 Supplement C dictated the positioning of the ear-held device relative to the phantom.

(ii) For face-held and body-worn devices, or devices which can be operated within 20cm of the body, the planar section of the phantom was used. The type of device being evaluated determined the distance of the EUT to the outer surface of the planar phantom.

b. The SAR was determined by a pre-defined procedure within the DASY3 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 20mm x 20mm.

c. For frequencies below 500MHz a 4x4x7 matrix was performed around the greatest spatial SAR distribution found during the area scan of the applicable exposed region. For frequencies above 500MHz a 5x5x7 matrix was performed. SAR values were then calculated using a 3-D spline interpolation algorithm and averaged over spatial volumes of 1 and 10 grams.

d. If the EUT had any appreciable drift over the course of the evaluation, then the EUT was re-evaluated. Any unusual anomalies over the course of the test also warranted a re-evaluation.

8.0 SYSTEM VALIDATION

Prior to the assessment, the system was verified in the planar region of the phantom. For devices operating below 1GHz, an 835MHz dipole or 900MHz was used, depending on the operating frequency of the EUT. For devices operating above 1GHz, an 1800MHz dipole was used. A forward power of 250mW was applied to the dipole, and the system was verified to a tolerance of ±3%. The applicable verification is as follows (see Appendix B for validation test plot):

Dipole Validation Kit	Target SAR 1g (w/kg)	Measured SAR 1g (w/kg)
D1800V2	9.32	9.60

9.0 SIMULATED TISSUES

The 1800MHz brain and muscle mixture consists of Glycol-monobutyl, water, and salt. The fluid was prepared in accordance with standardized procedures, and measured for dielectric parameters (permitivity and conductivity).

INGREDIENT	MIXTURE (%)	
	Brain 1800MHz	Muscle 1800MHz
Water	54.88	69.91
Glycol Monobutyl	44.91	29.96
Salt	0.21	0.13

1800MHz Brain & Muscle Mixture

INGREDIENT	MIXTURE (%)
	1800MHz Brain (Validation)
Water	45.0
Sugar	53.9
Salt	0.0
HEC	0.1
Bactericide	1.0

1800MHz Brain (Validation) Mixture

10.0 TISSUE PARAMETERS

The dielectric parameters of the fluids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer. The dielectric parameters of the fluid are as follows:

Equivalent Tissue (1800MHz)	Dielectric Constant e_r	Conductivity s (mho/m)	r (Kg/m^3)
Brain	40.5 ± 5%	1.35 ± 10%	1000
Muscle	54.6 ± 5%	1.39 ± 10%	1000
Brain (Validation)	41.2 ± 5%	1.68 ± 10%	1000

11.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER:	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability:	0.02 mm
No. of axis:	6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor:	Pentium III
Clock Speed:	450 MHz
Operating System:	Windows NT
Data Card:	DASY3 PC-Board

Data Converter

Features:	Signal Amplifier, multiplexer, A/D converter, and control logic
Software:	DASY3 software
Connecting Lines:	Optical downlink for data and status info. Optical uplink for commands and clock

PC Interface Card

Function:	24 bit (64 MHz) DSP for real time processing Link to DAE3 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot

E-Field Probe

Model:	ET3DV6
Serial No.:	1387
Construction:	Triangular core fiber optic detection system
Frequency:	10 MHz to 6 GHz
Linearity:	± 0.2 dB (30 MHz to 3 GHz)

Phantom

Phantom:	Generic Twin
Shell Material:	Fiberglass
Thickness:	2.0 ± 0.1 mm

12.0 TEST EQUIPMENT LIST

SAR MEASUREMENT SYSTEM		
EQUIPMENT	***SERIAL NO.***	***CALIBRATION DATE***
DASY3 System -Robot -ET3DV6 E-Field Probe -DAE -835MHz Validation Dipole -900MHz Validation Dipole -1800MHz Validation Dipole -Generic Twin Phantom V3.0	 599396-01 1387 383 411 054 247 N/A	 N/A Sept 1999 Sept 1999 Aug 1999 Aug 1999 Aug 1999 N/A
85070C Dielectric Probe Kit	N/A	N/A
Gigatronics 8652A Power Meter -Power Sensor 80701A -Power Sensor 80701A	1835272 1833535 1833542	Oct 1999 Oct 1999 Oct 1999
E4408B Spectrum Analyzer	US39240170	Nov 1999
8594E Spectrum Analyzer	3543A02721	Mar 2000
8753E Network Analyzer	US38433013	Nov 1999
8648D Signal Generator	3847A00611	N/A
5S1G4 Amplifier Research Power Amplifier	26235	N/A

13.0 MEASUREMENT UNCERTAINTIES

Uncertainty Description	Error	Distribution	Weight	Standard Deviation	Offset
Probe Uncertainty					
Axial isotropy	±0.2 dB	U-Shaped	0.5	±2.4 %	
Spherical isotropy	±0.4 dB	U-Shaped	0.5	±4.8 %	
Isotropy from gradient	±0.5 dB	U-Shaped	0	±	
Spatial resolution	±0.5 %	Normal	1	±0.5 %	
Linearity error	±0.2 dB	Rectangle	1	±2.7 %	
Calibration error	±3.3 %	Normal	1	±3.3 %	
SAR Evaluation Uncertainty					
Data acquisition error	±1 %	Rectangle	1	±0.6 %	
ELF and RF disturbances	±0.25 %	Normal	1	±0.25 %	
Conductivity assessment	±10 %	Rectangle	1	±5.8 %	
Spatial Peak SAR Evaluation Uncertainty					
Extrapolated boundary effect	±3 %	Normal	1	±3 %	±5 %
Probe positioning error	±0.1 mm	Normal	1	±1 %	
Integrated and cube orientation	±3 %	Normal	1	±3 %	
Cube Shape inaccuracies	±2 %	Rectangle	1	±1.2 %	
Device positioning	±6 %	Normal	1	±6 %	
Combined Uncertainties				±11.7 %	±5 %

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, the estimated measurement uncertainties in SAR are less than 15-25 %.

According to ANSI/IEEE C95.3, the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2dB can be expected.

According to CENELEC, typical worst-case uncertainty of field measurements is ± 5 dB.
For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

14.0 REFERENCES

(1) ANSI, *ANSI/IEEE C95.1: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 Ghz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992;*

(2) Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, FCC, Washington, D.C. 20554, 1997;

(3) Thomas Schmid, Oliver Egger, and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE *Transaction on Microwave Theory and Techniques,* Vol. 44, pp. 105 – 113, January, 1996.

(4) Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with know precision", IEICE Transactions of Communications, vol. E80-B, no. 5, pp. 645 – 652, May 1997.

APPENDIX A - SAR MEASUREMENT DATA

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Left Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 0.671 mW/g, SAR (10g): 0.376 mW/g

Head SAR
Model: WPE-1000
Antenna In
PCS CDMA Mode
Channel 25 [1851.25 MHz]
Conducted Power: 24.5 dBm
Date Tested: May 24, 2001

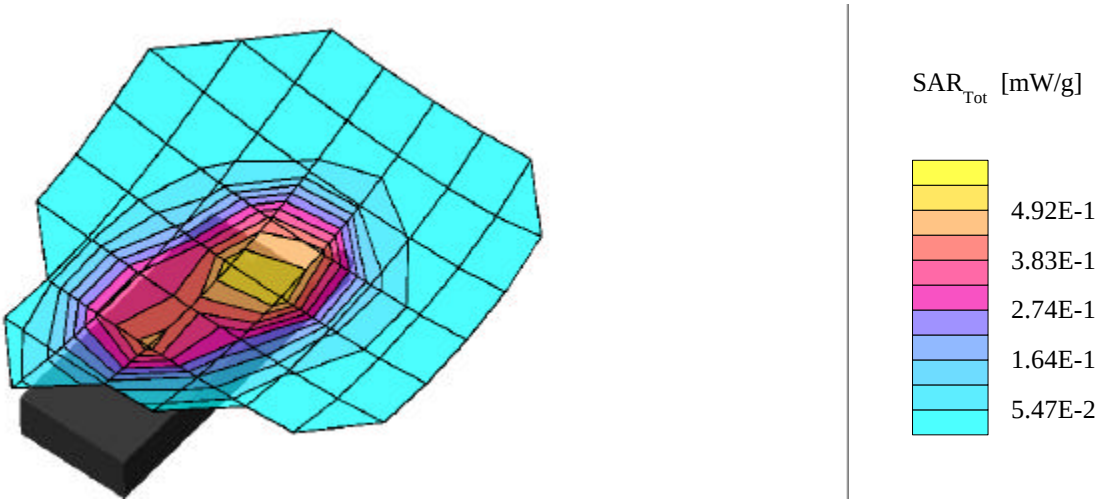

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Left Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.31 mW/g, SAR (10g): 0.741 mW/g

Head SAR
Model: WPE-1000
Antenna Out
PCS CDMA Mode
Channel 25 [1851.25 MHz]
Conducted Power: 24.5 dBm
Date Tested: May 24, 2001

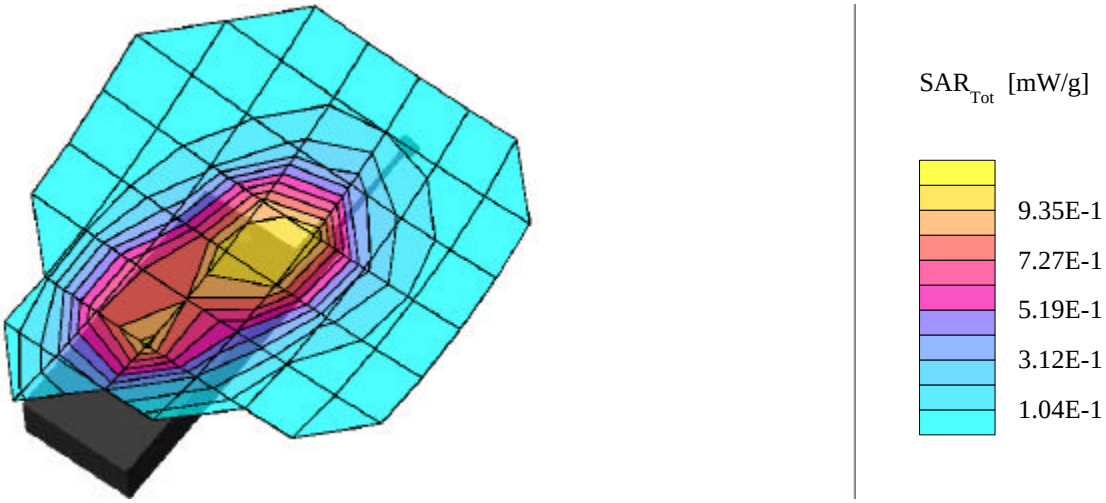

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Left Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 0.727 mW/g, SAR (10g): 0.412 mW/g

Head SAR
Model: WPE-1000
Antenna In
PCS CDMA Mode
Channel 600 [1880.00 MHz]
Conducted Power: 24.1 dBm
Date Tested: May 24, 2001

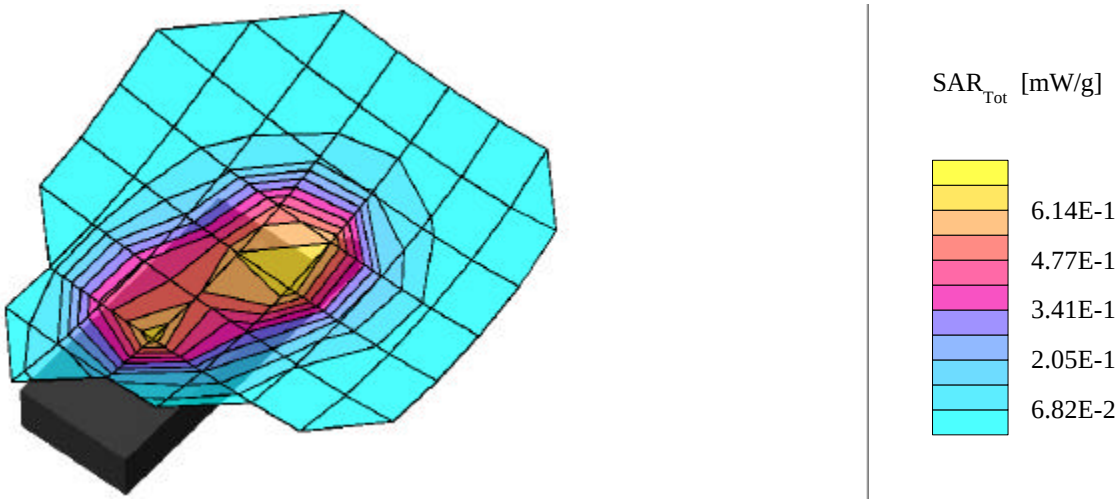

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Left Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.45 mW/g, SAR (10g): 0.830 mW/g

Head SAR
Model: WPE-1000
Antenna Out
PCS CDMA Mode
Channel 600 [1880.00 MHz]
Conducted Power: 24.1 dBm
Date Tested: May 24, 2001

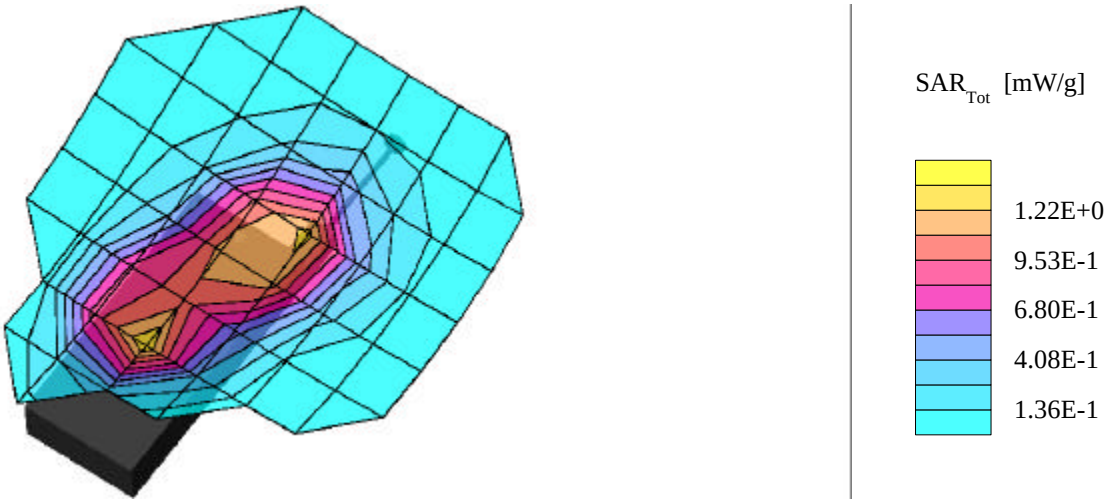

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Left Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 0.646 mW/g, SAR (10g): 0.358 mW/g

Head SAR
Model: WPE-1000
Antenna In
PCS CDMA Mode
Channel 1175 [1908.75 MHz]
Conducted Power: 24.2 dBm
Date Tested: May 24, 2001

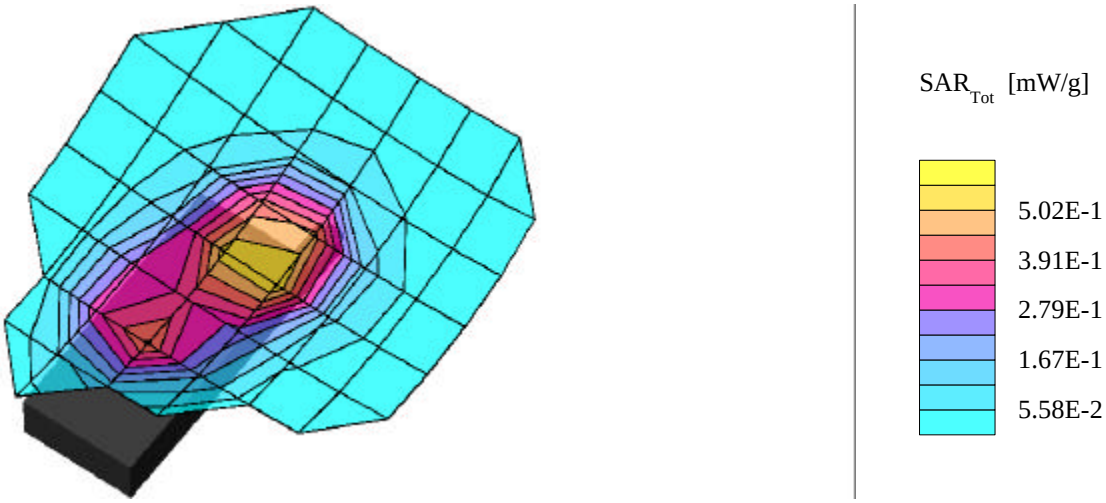

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Left Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.45 mW/g, SAR (10g): 0.810 mW/g

Head SAR
Model: WPE-1000
Antenna Out
PCS CDMA Mode
Channel 1175 [1908.75 MHz]
Conducted Power: 24.2 dBm
Date Tested: May 24, 2001

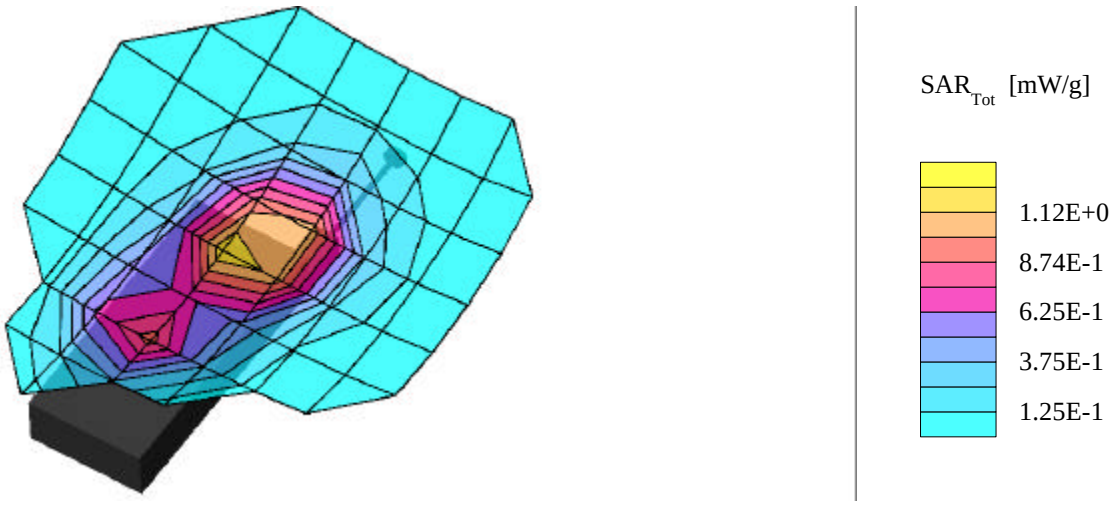

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Right Hand Section; Position: (75°,65°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Brain: σ = 1.35 mho/m ε_r = 40.5 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.46 mW/g, SAR (10g): 0.878 mW/g

Right Head SAR
Antenna Out
Model: WPE-1000
PCS CDMA Mode
Channel 1175 [1908.75 MHz]
Conducted Power: 24.2 dBm
Date Tested: May 24, 2001

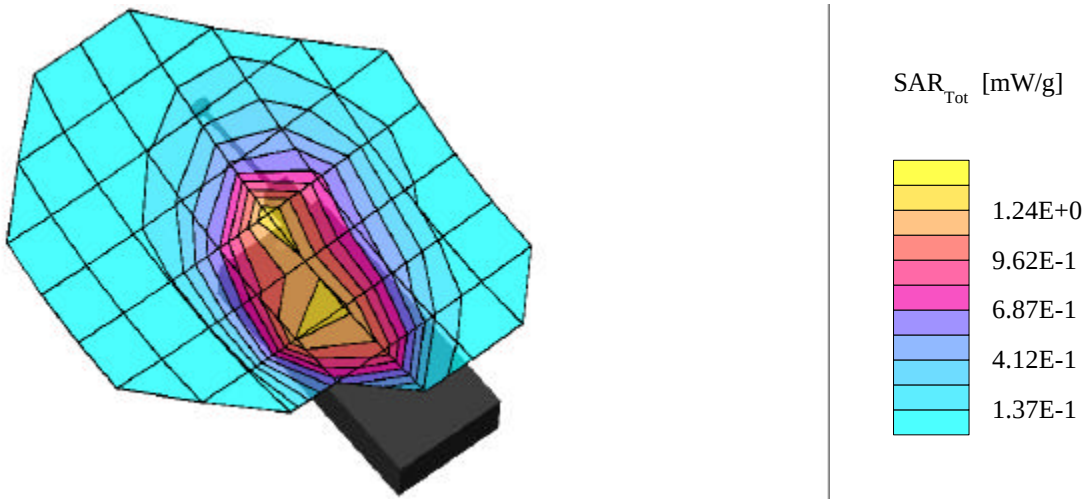

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Muscle: σ = 1.39 mho/m ε_r = 54.6 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 0.546 mW/g, SAR (10g): 0.321 mW/g

Body SAR with 1.0cm Separation Distance
Model: WPE-1000
Antenna In
PCS CDMA Mode
Channel 25 [1851.25 MHz]
Conducted Power: 24.5 dBm
Date Tested: May 24, 2001

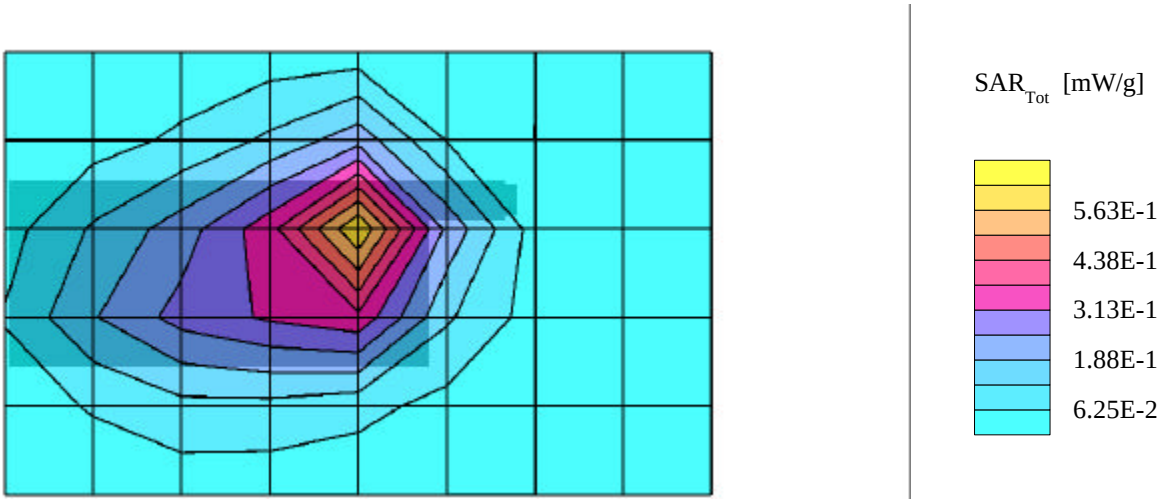

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Muscle: σ = 1.39 mho/m ε_r = 54.6 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.38 mW/g, SAR (10g): 0.803 mW/g

Body SAR with 1.0cm Separation Distance
Model: WPE-1000
Antenna Out
PCS CDMA Mode
Channel 25 [1851.25 MHz]
Conducted Power: 24.5 dBm
Date Tested: May 24, 2001

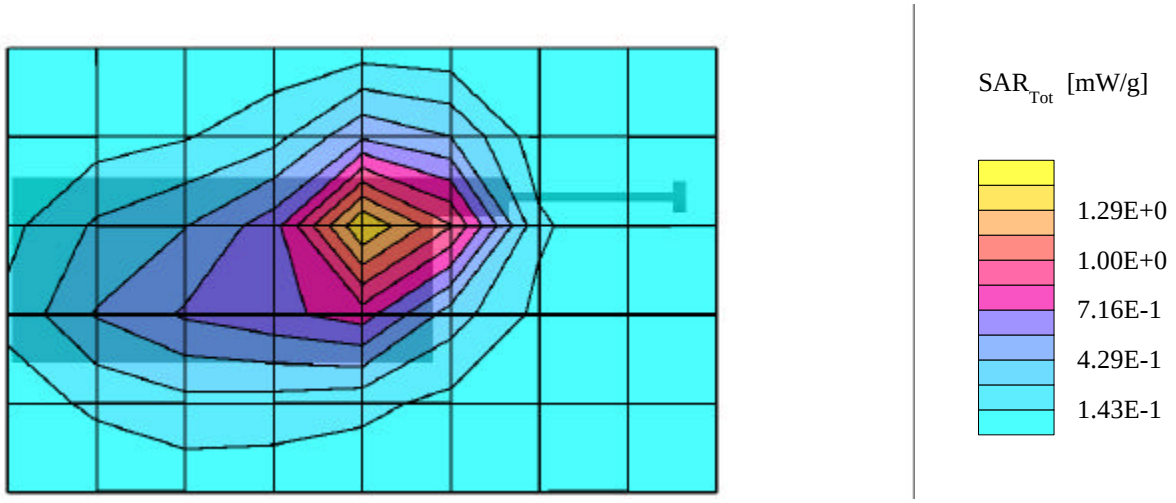

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Muscle: σ = 1.39 mho/m ε_r = 54.6 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 0.735 mW/g, SAR (10g): 0.431 mW/g

Body SAR with 1.0cm Separation Distance
Model: WPE-1000
Antenna In
PCS CDMA Mode
Channel 600 [1880.00 MHz]
Conducted Power: 24.1 dBm
Date Tested: May 24, 2001

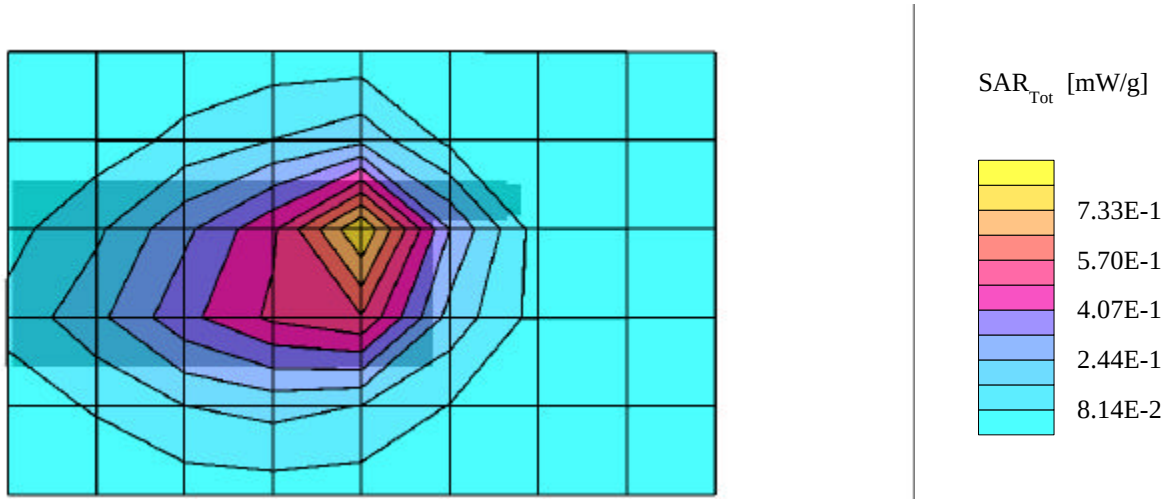

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Muscle: σ = 1.39 mho/m ε_r = 54.6 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.39 mW/g, SAR (10g): 0.815 mW/g

Body SAR with 1.0cm Separation Distance
Model: WPE-1000
Antenna Out
PCS CDMA Mode
Channel 600 [1880.00 MHz]
Conducted Power: 24.1 dBm
Date Tested: May 24, 2001

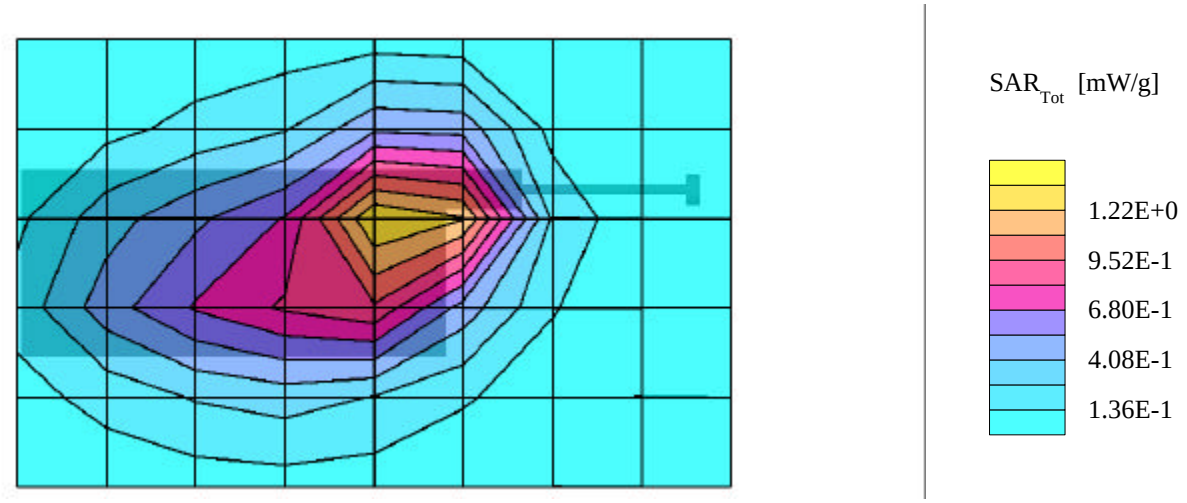

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Muscle: σ = 1.39 mho/m ε_r = 54.6 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 0.773 mW/g, SAR (10g): 0.423 mW/g

Body SAR with 1.0cm Separation Distance
Model: WPE-1000
Antenna In
PCS CDMA Mode
Channel 1175 [1908.75 MHz]
Conducted Power: 24.2 dBm
Date Tested: May 24, 2001

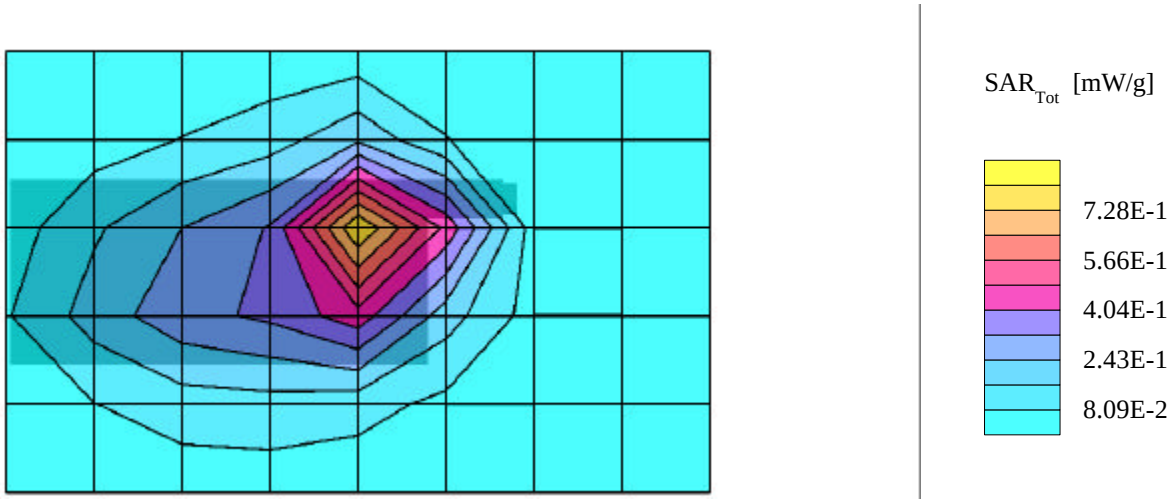

Withus IT Co., Ltd. FCC ID: POQ-WPE-1000

Generic Twin Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0
1800MHz Muscle: σ = 1.39 mho/m ε_r = 54.6 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0;
Cube 5x5x7
SAR (1g): 1.42 mW/g, SAR (10g): 0.800 mW/g

Body SAR with 1.0cm Separation Distance
Model: WPE-1000
Antenna Out
PCS CDMA Mode
Channel 1175 [1908.75 MHz]
Conducted Power: 24.2 dBm
Date Tested: May 24, 2001

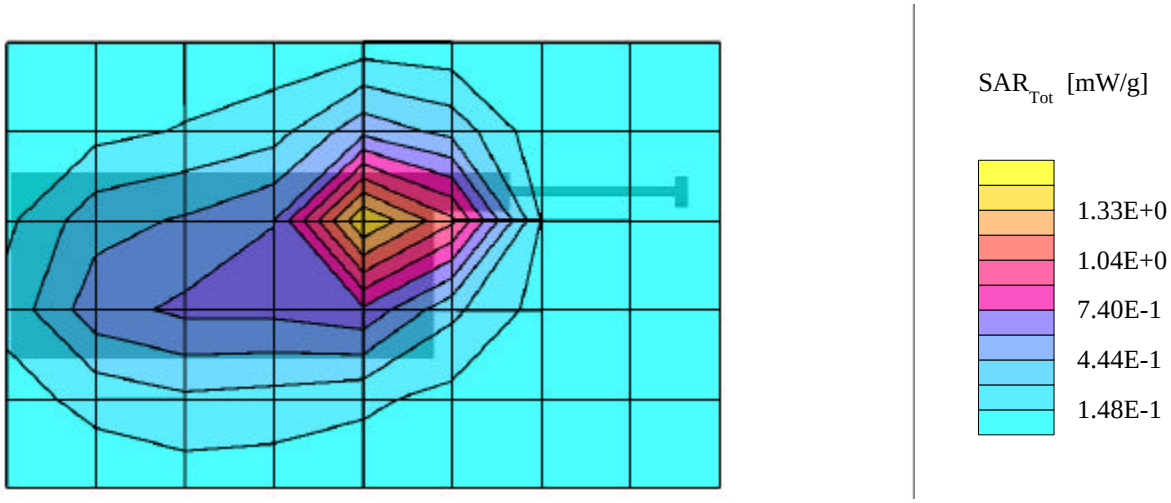

APPENDIX B - DIPOLE VALIDATION

Dipole 1800 MHz

Generic Twin Phantom; Flat Section; Position: (90°,90°);
Probe: ET3DV6 - SN1387; ConvF(5.50,5.50,5.50); Crest factor: 1.0;
1800MHz Brain: σ = 1.68 mho/m ε_r = 41.2 ρ = 1.00 g/cm^3
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 9.60 mW/g, SAR (10g): 4.82 mW/g

Date Tested: May 24, 2001

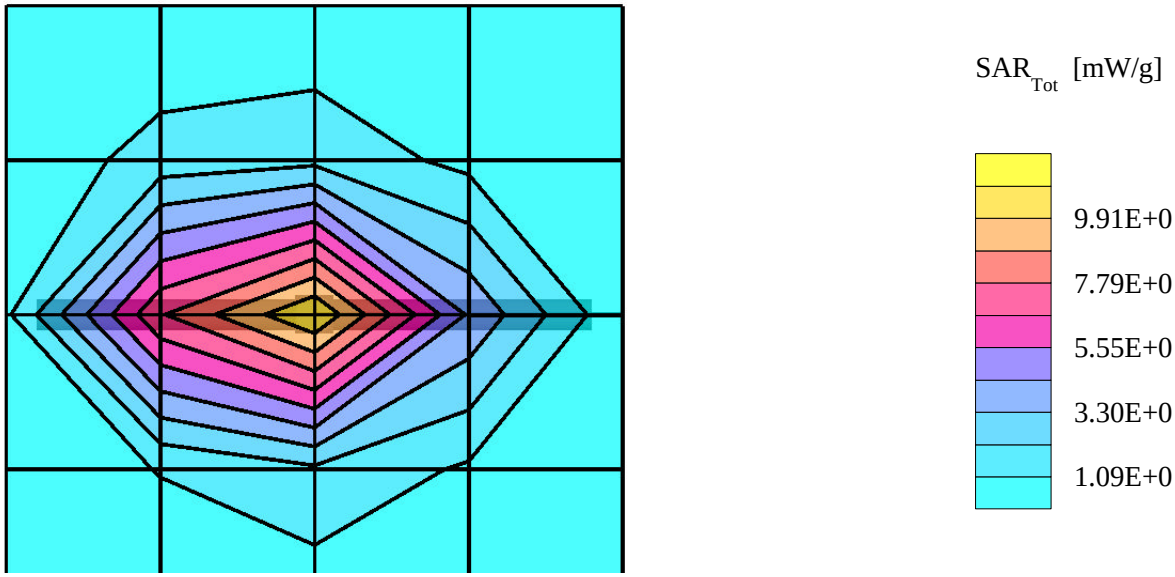

Validation Dipole D1800V2 SN:247, d = 10mm

Frequency: 1800 MHz; Antenna Input Power: 250 [mW]
Generic Twin Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV5 - SN1342/DAE3; ConvF(4.84,4.84,4.84); Brain 1800 MHz: σ = 1.68 mho/m ε_r = 41.2 ρ = 1.00 g/cm^3
Cubes (2): Peak: 17.6 mW/g ± 0.02 dB, SAR (1g): 9.32 mW/g ± 0.04 dB, SAR (10g): 4.76 mW/g ± 0.06 dB, (Worst-case extrapolation)
Penetration depth: 7.5 (7.4, 8.0) [mm]
Powerdrift: -0.00 dB

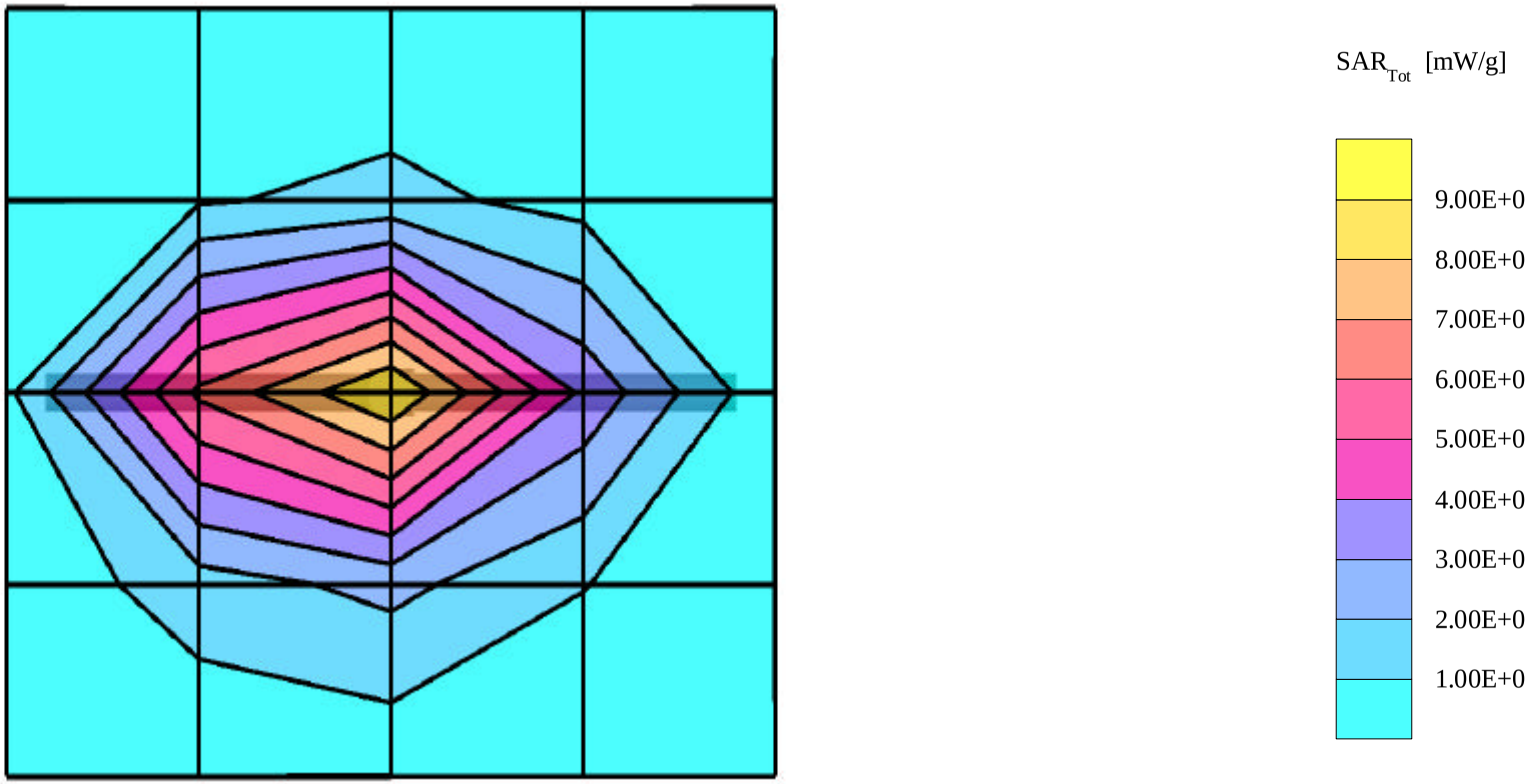

APPENDIX C - PROBE CALIBRATION

Schmid & Partner
Engineering AG

Staffelstrasse 8, 8045 Zurich, Switzerland, Telefon +41 1 280 08 60, Fax +41 1 280 08 64

Probe ET3DV6

SN:1387

Manufactured:	September 21, 1999
Last calibration:	September 22, 1999

Calibrated for System DASY3

DASY3 - Parameters of Probe: ET3DV6 SN:1387

Sensitivity in Free Space

NormX	**1.55**	$\mu V/(V/m)^2$
NormY	**1.65**	$\mu V/(V/m)^2$
NormZ	**1.64**	$\mu V/(V/m)^2$

Diode Compression

DCP X	**98**	mV
DCP Y	**98**	mV
DCP Z	**98**	mV

Sensitivity in Tissue Simulating Liquid

Brain **450 MHz** e_r **= 48 ± 5%** s **= 0.50 ± 10% mho/m**

ConvF X	**6.76**	extrapolated	Boundary effect:	
ConvF Y	**6.76**	extrapolated	Alpha	**0.30**
ConvF Z	**6.76**	extrapolated	Depth	**2.52**

Brain **900 MHz** e_r **= 42.5 ± 5%** s **= 0.86 ± 10% mho/m**

ConvF X	**6.34**	± 7% (k=2)	Boundary effect:	
ConvF Y	**6.34**	± 7% (k=2)	Alpha	**0.47**
ConvF Z	**6.34**	± 7% (k=2)	Depth	**2.25**

Brain **1500 MHz** e_r **= 41 ± 5%** s **= 1.32 ± 10% mho/m**

ConvF X	**5.78**	interpolated	Boundary effect:	
ConvF Y	**5.78**	interpolated	Alpha	**0.69**
ConvF Z	**5.78**	interpolated	Depth	**1.88**

Brain **1800 MHz** e_r **= 41 ± 5%** s **= 1.69 ± 10% mho/m**

ConvF X	**5.50**	± 7% (k=2)	Boundary effect:	
ConvF Y	**5.50**	± 7% (k=2)	Alpha	**0.81**
ConvF Z	**5.50**	± 7% (k=2)	Depth	**1.70**

Sensor Offset

Probe Tip to Sensor Center	**2.7**	mm
Optical Surface Detection	**1.6 ± 0.2**	mm

Receiving Pattern (f) , q = 0°

f = 30 MHz, TEM cell ifi110

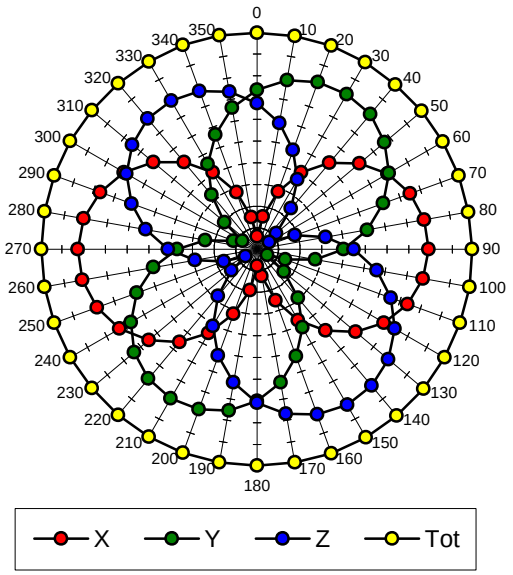

f = 100 MHz, TEM cell ifi110

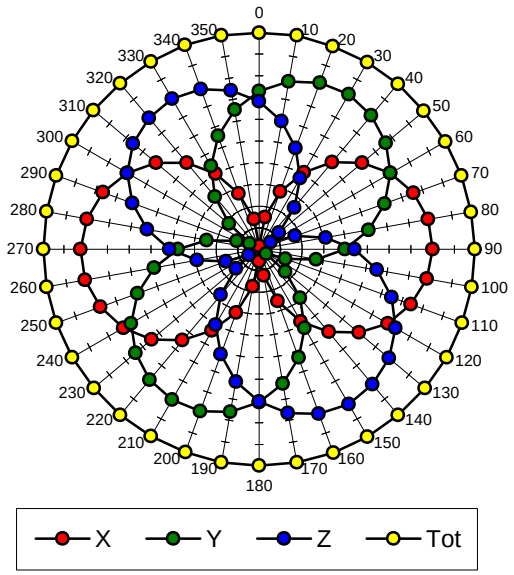

f = 300 MHz, TEM cell ifi110

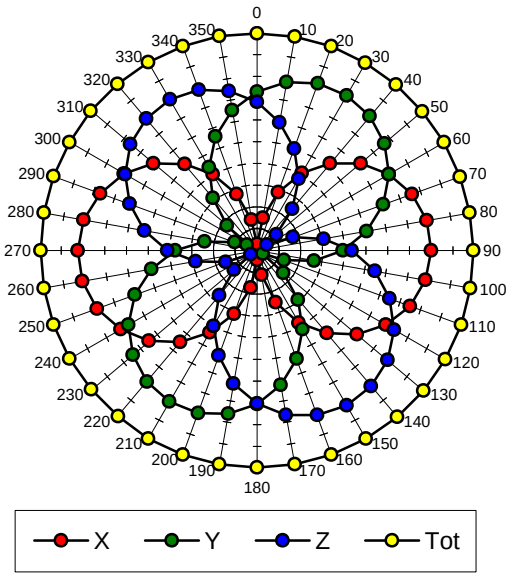

f = 900 MHz, TEM cell ifi110

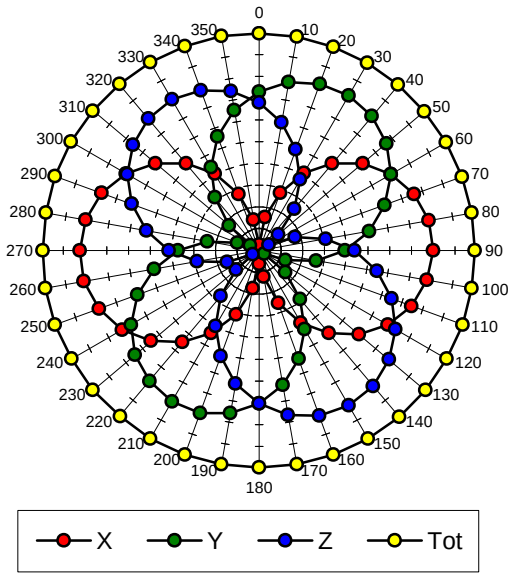

ET3DV6 SN:1387

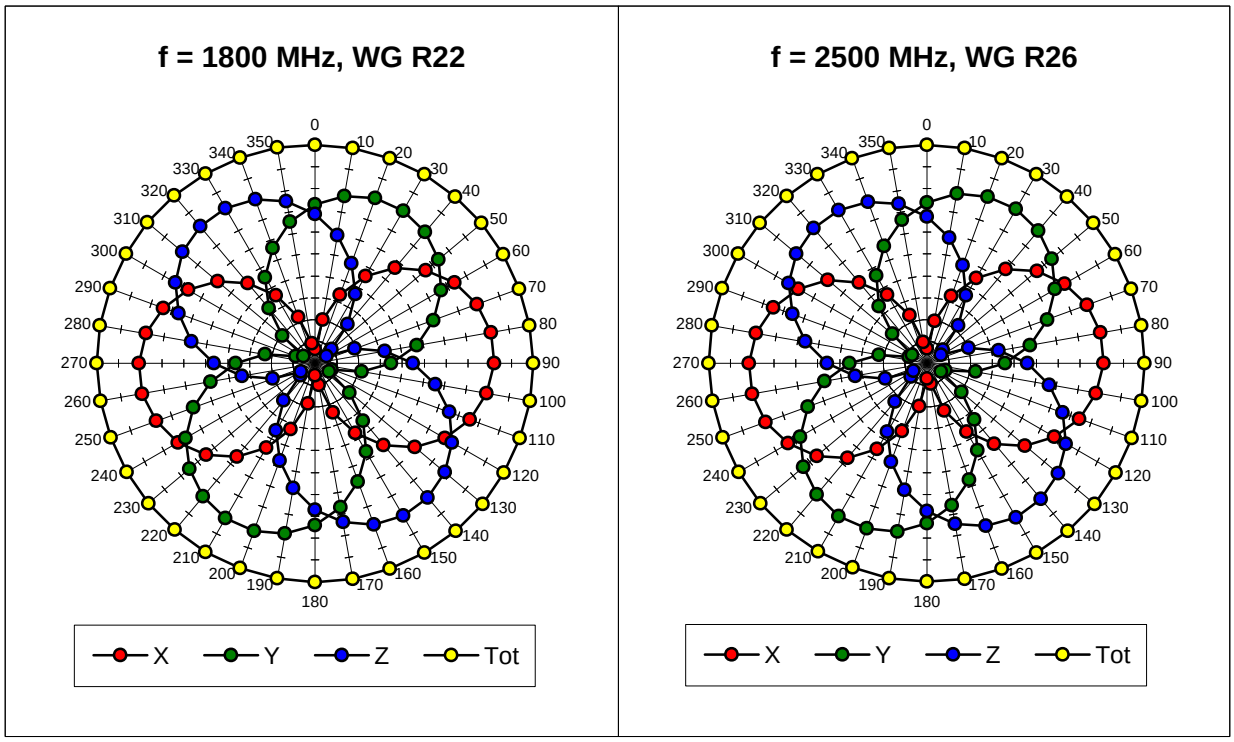

Isotropy Error (f), q = 0°

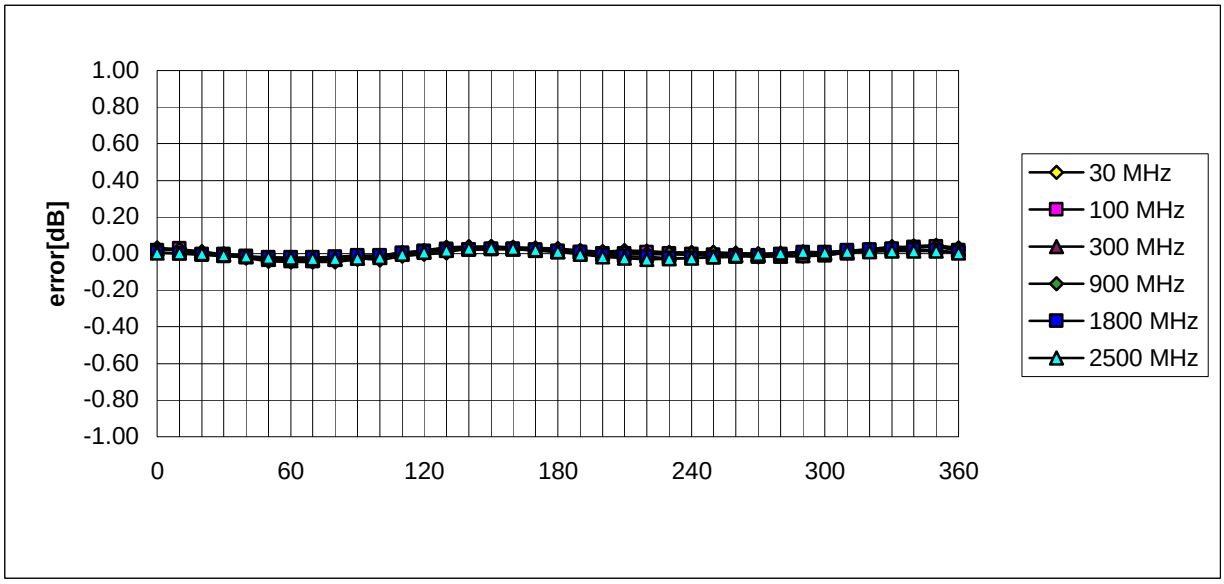

Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22, R26)

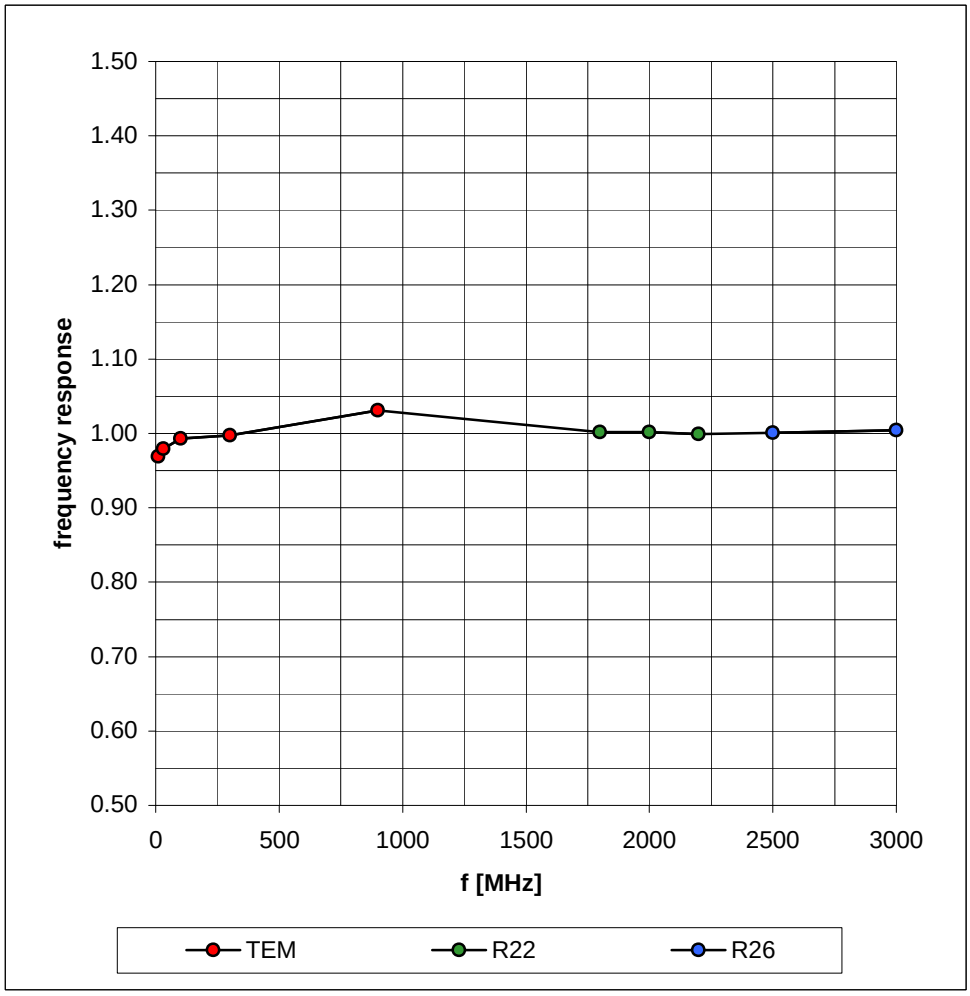

Dynamic Range f(SAR_{brain})

(TEM-Cell:ifi110)

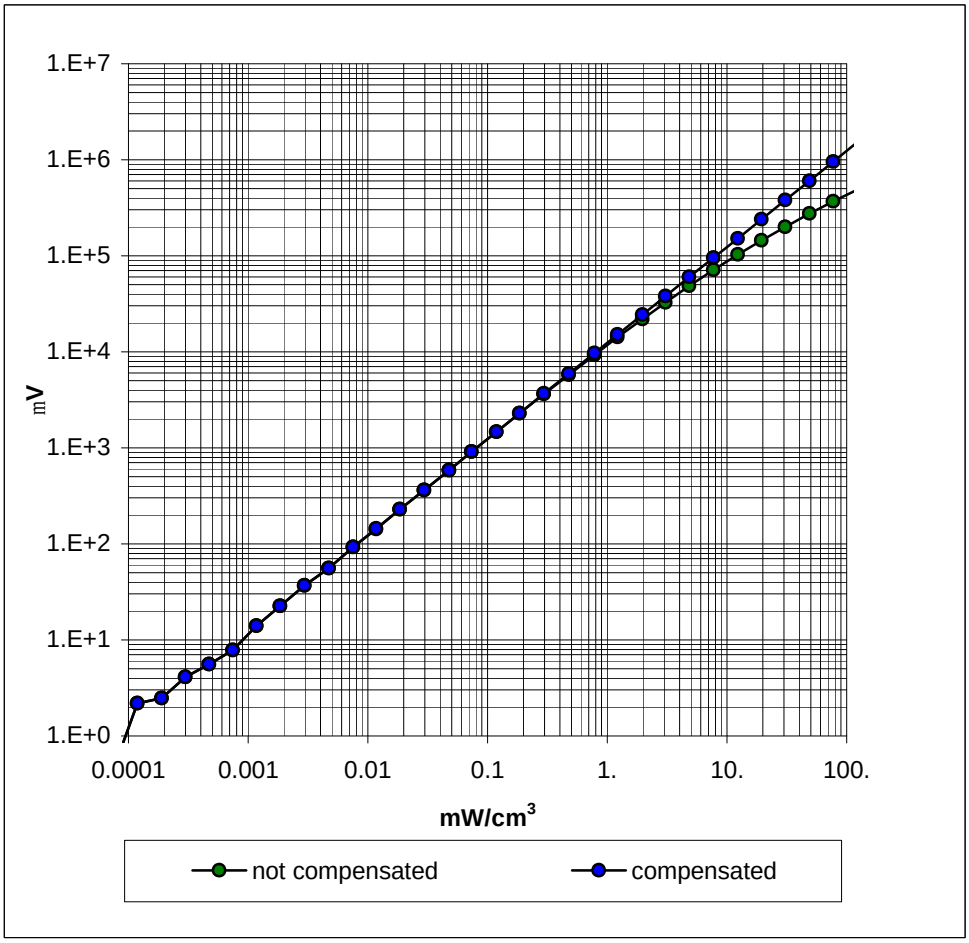

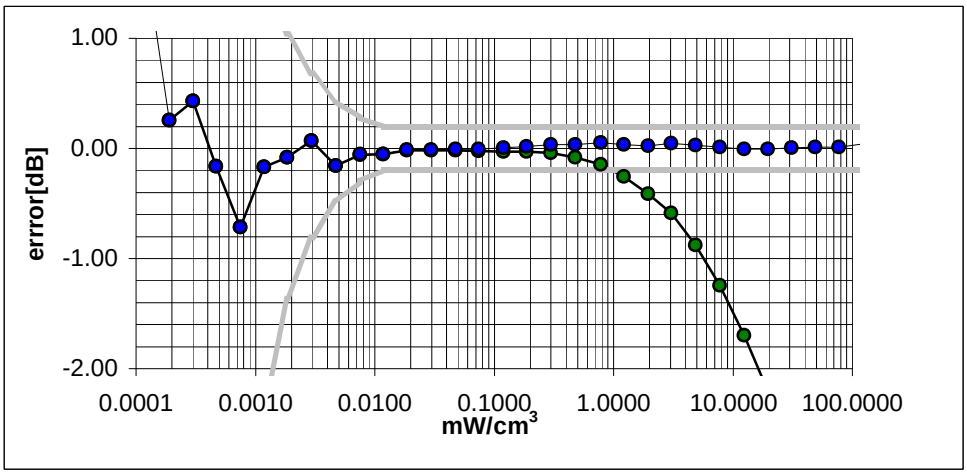

Conversion Factor Assessment

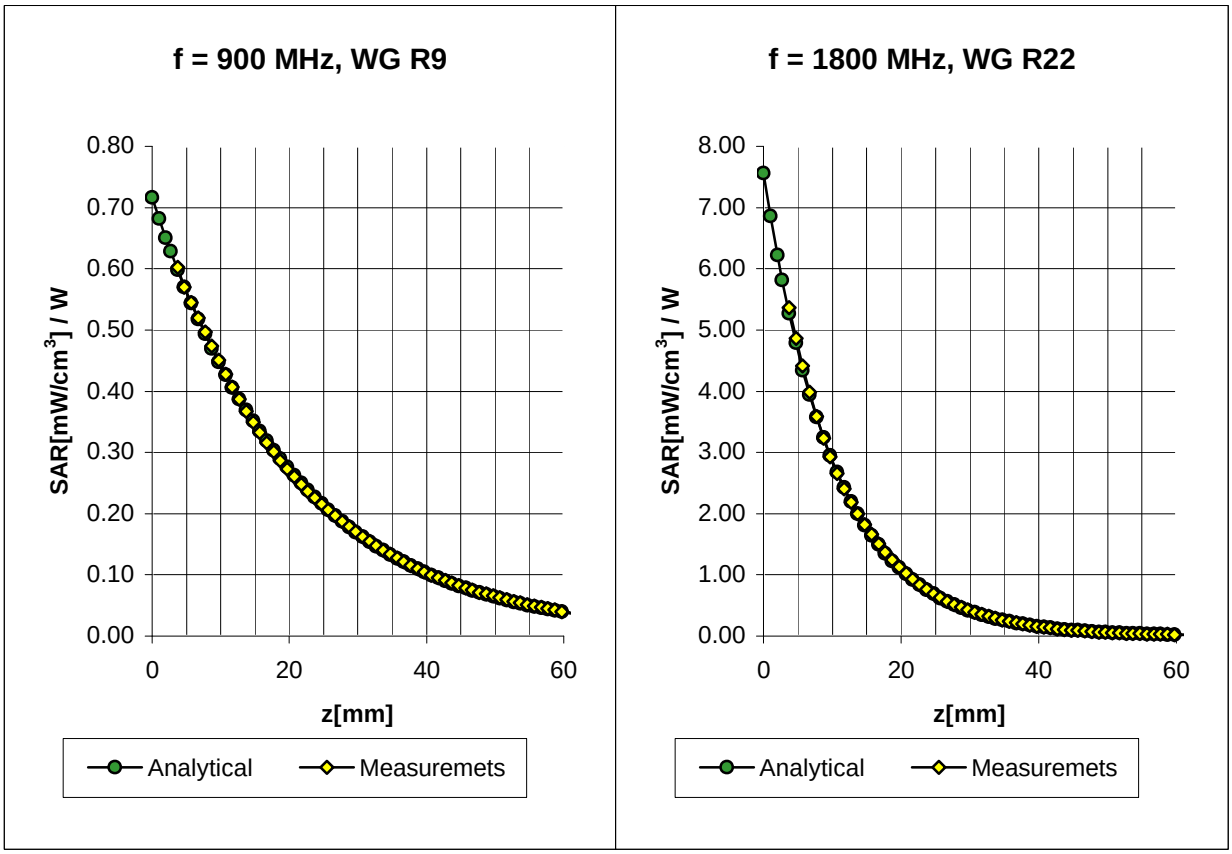

Receiving Pattern (f)

(in brain tissue, z = 5 mm)

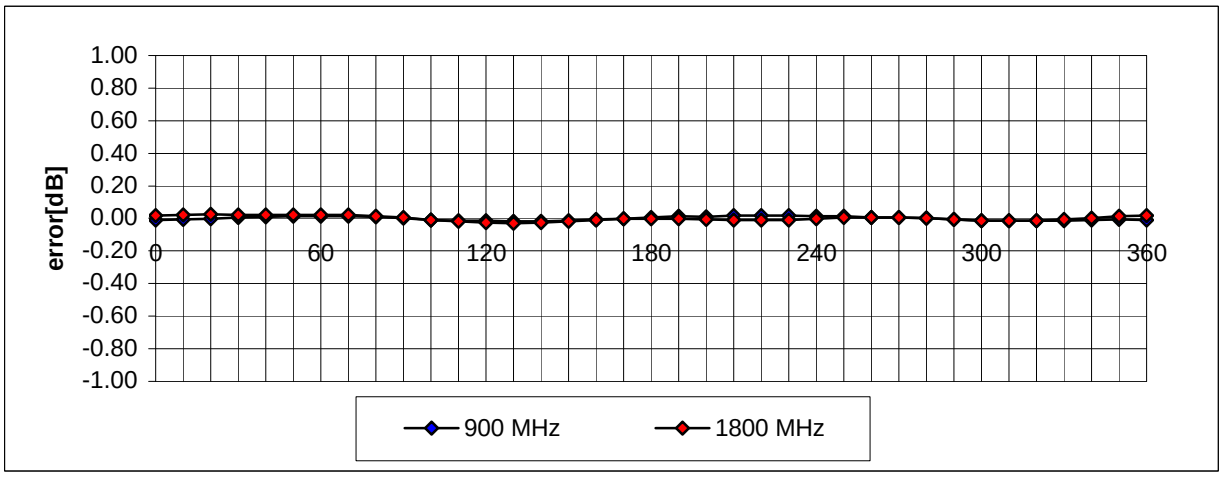

APPENDIX D - SAR TEST SETUP PHOTOGRAPHS

HEAD SAR TEST SETUP PHOTOGRAPHS

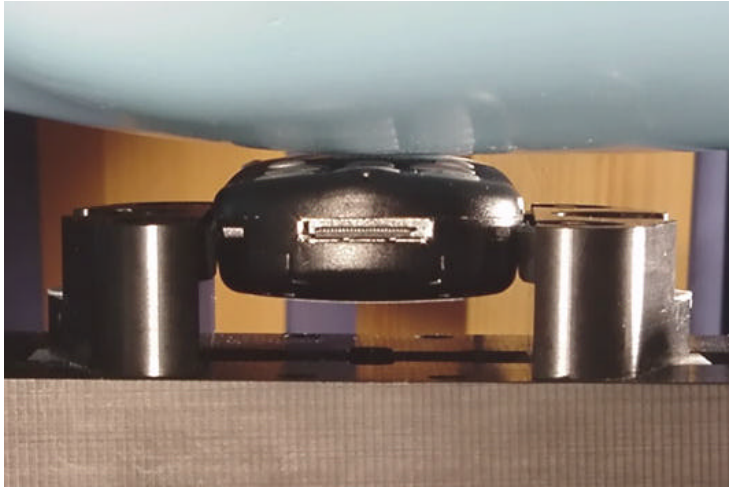

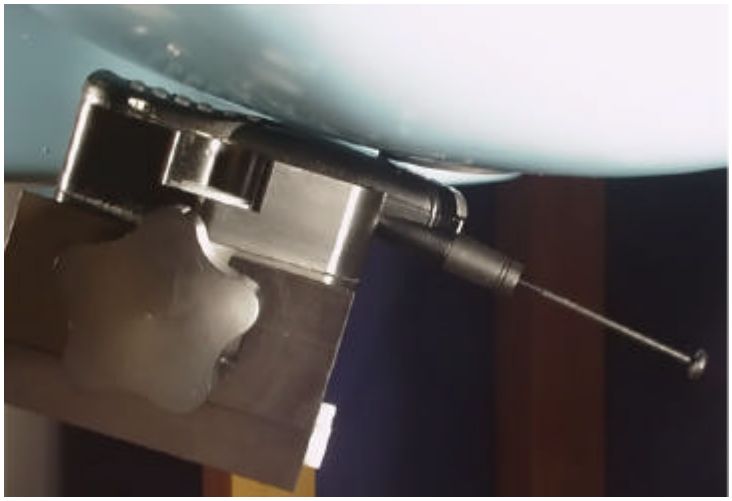
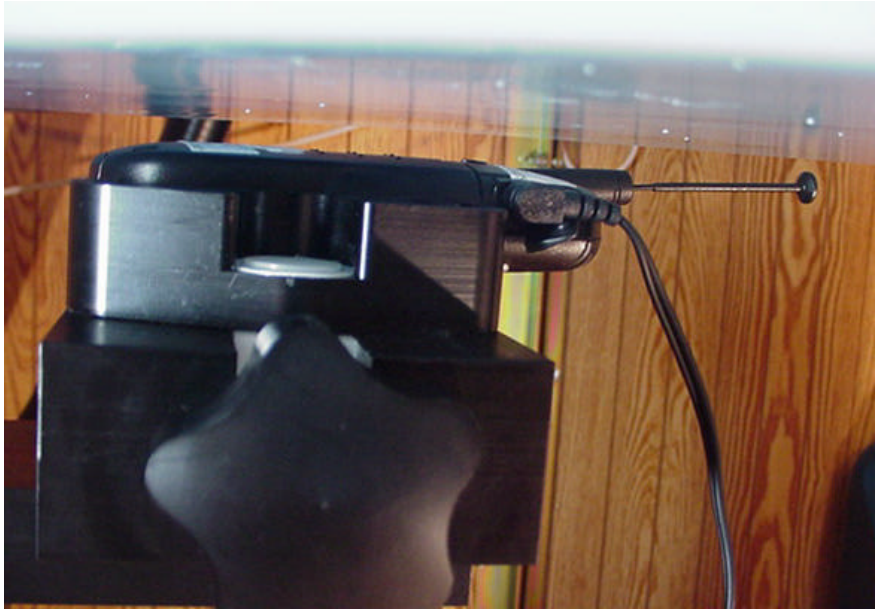
BODY SAR TEST SETUP PHOTOGRAPHS
1.0cm Separation Distance