

CERTIFICATE OF COMPLIANCE **FCC PART 24 CERTIFICATION**

Test Lab:

CELLTECH RESEARCH INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250 - 860-3130
Fax: 250 - 860-3110
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information:


MODOTTEL CO., LTD.
2F. DongNam Bldg. 448-16
Shingil-5Dong, YongDungPo-Ku,
Seoul, Korea

FCC Classification:	Part 24 Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24(E), §2
FCC ID:	POQWPE-2300
Model(s):	WPE-2300
Equipment Type:	Single-Mode PCS CDMA Phone
Tx Frequency Range:	1851.25 - 1908.75 MHz
Rx Frequency Range:	1931.25 - 1988.75 MHz
Rated Conducted Power:	24.5 dBm (+/- 0.2 dBm)
Max. RF Output Power:	0.416 Watts (EIRP)
Frequency Tolerance:	150 Hz
Emission Designator:	1M25F9W
Antenna Type:	Retractable Whip (1/4λ)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Research Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Shawn McMillen
General Manager
Celltech Research Inc.



TABLE OF CONTENTS

1.1	SCOPE	1
1.2	GENERAL INFORMATION (2.1033(a))	1
2.1	MEASUREMENT PROCEDURES	2
	RF Output Power (§2.1046)	2
	Occupied Bandwidth Emission Limits (§2.1049(c), §24.238)	2
	Spurious Emissions at Antenna Terminal (§2.1051)	2
	Emission Designator (§2.202)	2
	Field Strength of Spurious Radiation (§2.1053)	3
	Frequency Stability / Temperature Variation (§2.1055, §24.235)	4
3.1	TEST DATA	5
	Effective Isotropic Radiated Power Output (§24.232(b))	5
	Field Strength of Spurious Radiation (§2.1053)	6-8
	Frequency Stability (§2.1055, §24.235)	9
4.1	LIST OF TEST EQUIPMENT	10
5.1	CONCLUSION	11

MEASUREMENT REPORT - FCC PART 24(E)

1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 GENERAL INFORMATION - §2.1033(a)

<u>APPLICANT:</u> MODOTTEL CO., LTD. 2F. DongNam Bldg. 448-16 Shingil-5Dong, YongDungPo-Ku, Seoul, Korea	
FCC ID	POQWPE-2300
Model(s)	WPE-2300
EUT Type	Single-Mode PCS CDMA Phone
Classification	Licensed Portable Transmitter Held to Ear (PCE)
Rule Part(s)	§24(E), §2
Rated Conducted Power	24.5 dBm (+/- 0.2 dBm)
Max. RF Output Power	0.416 Watts (EIRP)
Tx Freq. Range	1851.25 - 1908.75 MHz
Rx Freq. Range	1931.25 - 1988.75 MHz
Frequency Tolerance	± 150 Hz
Emission Designator	1M25F9W
Modulation	PCS CDMA
Battery Type(s)	Standard Life: 3.7V 550mA/h Lithium Ion Extended Life: 3.7V 950mA/h Lithium Ion
Antenna Type	Retractable Whip (1/4λ)

2.1 MEASUREMENT PROCEDURES

2.2 RF OUTPUT POWER MEASUREMENT - §2.1046

The conducted power was measured with a Gigatronics 8650A Universal Power Meter using modulated average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed before the sensor input. The transmitter terminal was coupled to the power meter and the EUT was placed into test mode via keypad access or a base station simulator at a full data rate in the "always up" power control mode. All subsequent tests were performed using the same tune up procedures.

2.3 OCCUPIED BANDWIDTH EMISSION LIMITS - §2.1049(c), §24.238

The antenna output terminal of the EUT was connected to the input of a 50 Ω spectrum analyzer through a matched 30dB attenuator. The radio transmitter was operating at maximum output power. 100% of the in-band modulation was below the specified mask per §24.238.

Specified Limits:

- (a) On any frequency removed from the assigned carrier frequency by more than 20kHz, up to and including 45kHz, the sideband was at least 26dB below the carrier.
- (b) On any frequency removed from the assigned carrier frequency by more than 45kHz, up to and including 90kHz, the sideband was at least 45dB below the carrier.
- (c) On any frequency removed from the assigned carrier frequency by more than 90kHz, up to the first multiple of the carrier frequency, the sideband was at least 60dB below the carrier of $40 + \log_{10}$ (mean power output in Watts) dB, whichever was the smaller attenuation.

2.4 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051


The level of the carrier and the various conducted spurious frequencies were measured by means of a calibrated spectrum analyzer. The spectrum was scanned from 10MHz to 20GHz. The antenna output terminal of the EUT was connected to the input of a 50 Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable.

2.5 EMISSION DESIGNATOR - §2.202


Calculation: 2M + 2DK
CDMA BW = 1.25 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

2.6 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053

Radiated and harmonic emissions were measured on a 3-meter outdoor site. The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied in height from 1 to 4 meters and the polarization was varied (horizontal and vertical) to determine the worst-case emission level.

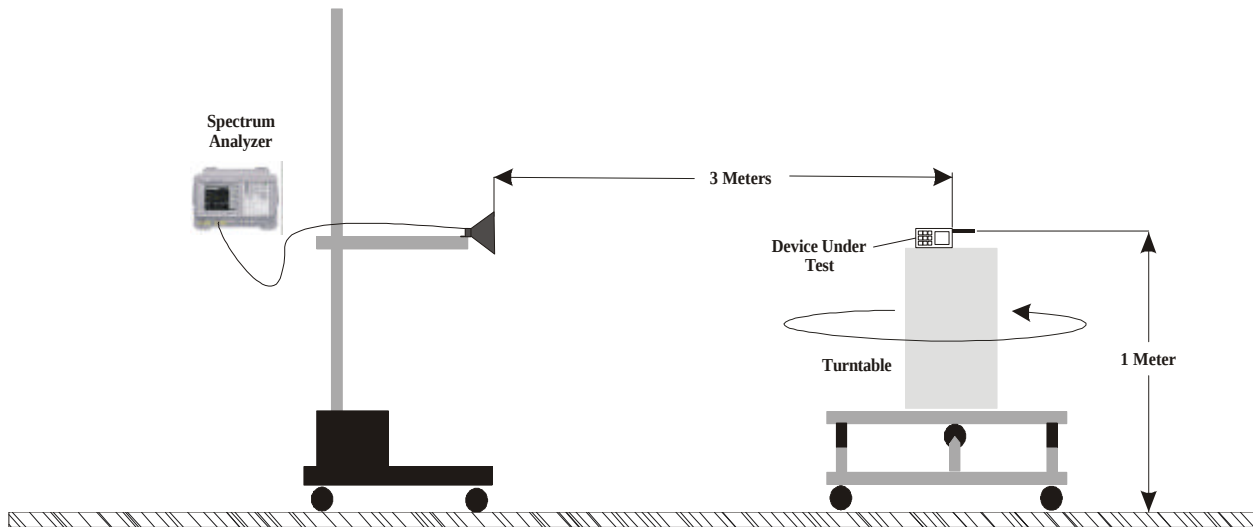

Radiated Measurement Test Setup Diagram

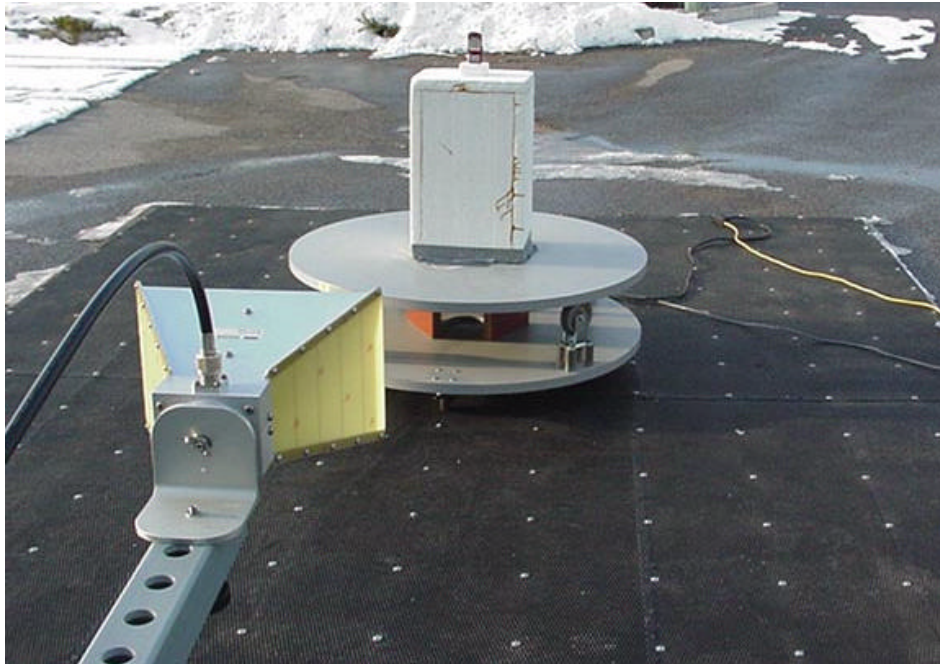

Radiated Measurement Test Setup Photograph

2.7 FREQUENCY STABILITY / TEMPERATURE VARIATION - §24.235

The minimum frequency stability shall be $\pm 150\text{Hz}$ referenced to a received carrier frequency from a base station. This meets the requirement for operational accuracy of 0.00005% in digital mode. A base station simulator was used to measure the error in the frequency.

Measurement Method:

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from -30°C to $+60^{\circ}\text{C}$ at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.

Time Period and Procedure:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C , the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to $+60^{\circ}\text{C}$, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

3.1 TEST DATA

3.2 EFFECTIVE ISOTROPIC RADIATED POWER OUTPUT - §24.232(b)

PCS CDMA MODE

Freq. Tuned	EUT Conducted Power	Max. Field Strength of EUT (dBm) (Horizontal Polarization)		Horn Gain	Horn Forward Conducted Power	EIRP of EUT Horn Gain + Horn Forward Conducted Power	
		Antenna Retracted	Antenna Extended			(dBm)	Watts
1851.25	24.5	- 16.23	- 12.90	6.67	17.90	24.57	0.286
1880.00	24.5	- 15.11	- 11.80	6.68	19.51	26.19	0.416
1908.75	24.5	- 16.34	- 13.00	6.69	18.76	25.45	0.351
1880.00	24.5	- 15.38	- 12.04	6.68	19.42	26.10	0.407*

EIRP Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A horn antenna was substituted in place of the EUT. A CDMA signal with the same bandwidth as the EUT was generated, amplified, and fed through a directional coupler. The height and direction of the horn antenna was adjusted in order to give the field of maximum intensity. The power to the antenna was adjusted in order to give the same field strength reading as previously recorded for the EUT. The power at the coupler port was recorded at this point. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The EIRP level was determined by adding the horn forward conducted power and the horn antenna gain in dB.

Notes:

1. EIRP measurements were performed for both horizontal and vertical antenna polarizations. The worst-case configuration is reported.
2. EIRP measurements were performed using the standard battery and *extended life batteries.

3.3 FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

Operating Frequency (MHz): 1851.25
Channel: 25 (Low)
Measured Cond. Pwr. (dBm): 24.50
Measured ERP (dBm): 24.57
Modulation: PCS CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 37.56 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
3702.50	-90.42	-57.53	6.6	H	-50.93	-53.07	77.64
5553.75	-91.23	-53.43	7.8	H	-45.63	-47.77	72.34
7405.00	-92.65	-56.07	7.8	H	-48.27	-50.41	74.98
9256.25	-94.33	-56.31	7.6	H	-48.71	-50.85	75.42
11107.50	-96.20	-59.84	8.5	H	-51.34	-53.48	78.05
12958.75	-97.87	-59.99	8.8	H	-51.19	-53.33	77.90
14810.00	-99.14	-61.26	9.6	H	-51.66	-53.80	78.37
16661.25	-100.58	-62.75	9.0	H	-53.75	-55.89	80.46
18512.50	-101.61	-65.40	9.3	H	-56.10	-58.24	82.81

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The video bandwidth and resolution bandwidth were set to 3MHz. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A horn antenna was substituted in place of the EUT. A CDMA signal with the same bandwidth as the EUT was generated, amplified, and fed through a directional coupler. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward power for the antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the horn antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.
3. Radiated spurious measurements were performed using the standard and extended life batteries. The worst-case configuration is reported (standard life battery).

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

Operating Frequency (MHz): 1880.00
Channel: 600 (Mid)
Measured Cond. Pwr. (dBm): 24.50
Measured ERP (dBm): 26.19
Modulation: PCS CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 39.19 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
3760.00	-89.19	-57.30	6.6	H	-50.70	-52.84	79.03
5640.00	-91.53	-58.73	7.8	H	-50.93	-53.07	79.26
7520.00	-92.29	-59.71	7.8	H	-51.91	-54.05	80.24
9400.00	-94.88	-62.66	7.6	H	-55.06	-57.20	83.39
11280.00	-96.97	-64.71	8.5	H	-56.21	-58.35	84.54
13160.00	-97.64	-65.06	8.8	H	-56.26	-58.40	84.59
15040.00	-99.11	-67.23	9.6	H	-57.63	-59.77	85.96
16920.00	-100.73	-68.20	9.0	H	-59.20	-61.34	87.53
18800.00	-101.62	-70.41	9.3	H	-61.11	-63.25	89.44

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The video bandwidth and resolution bandwidth were set to 3MHz. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward power for the antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the horn antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.
3. Radiated spurious measurements were performed using the standard and extended life batteries. The worst-case configuration is reported (standard life battery).

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

Operating Frequency (MHz): 1908.75
Channel: 1175 (High)
Measured Cond. Pwr. (dBm): 24.50
Measured ERP (dBm): 25.45
Modulation: PCS CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 38.45 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
3817.50	-88.45	-55.56	6.6	H	-48.96	-51.10	76.55
5726.25	-89.49	-49.69	7.8	H	-41.89	-44.03	69.48
7635.00	-91.63	-55.05	7.8	H	-47.25	-49.39	74.84
9543.75	-92.37	-54.35	7.6	H	-46.75	-48.89	74.34
11452.50	-94.86	-58.50	8.5	H	-50.00	-52.14	77.59
13361.25	-96.98	-59.10	8.8	H	-50.30	-52.44	77.89
15270.00	-98.08	-60.20	9.6	H	-50.60	-52.74	78.19
17178.75	-100.12	-64.59	9.0	H	-55.59	-57.73	83.18
19087.50	-101.74	-65.53	9.3	H	-56.23	-58.37	83.82

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The video bandwidth and resolution bandwidth were set to 3MHz. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward power for the antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the horn antenna gain in dB.


Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.
3. Radiated spurious measurements were performed using the standard and extended life batteries. The worst-case configuration is reported (standard life battery).

3.4 FREQUENCY STABILITY - § 24.235

Carrier Frequency (GHz): 1.88
Channel: 600
Mode: PCS CDMA
Deviation Limit (PPM): 0.08

Temperature (C)	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	3.7	-1.02	-0.001	0.08	-0.08
-30	100	3.7	6.82	0.004	0.08	-0.08
-20	100	3.7	4.41	0.002	0.08	-0.08
-10	100	3.7	-12.10	-0.006	0.08	-0.08
0	100	3.7	-15.33	-0.008	0.08	-0.08
+10	100	3.7	-8.26	-0.004	0.08	-0.08
+20	100	3.7	10.54	0.006	0.08	-0.08
+30	100	3.7	14.77	0.008	0.08	-0.08
+40	100	3.7	11.28	0.006	0.08	-0.08
+50	100	3.7	-8.86	-0.005	0.08	-0.08
+60	100	3.7	-18.37	-0.010	0.08	-0.08
+20	Battery Endpoint	3.3	-2.05	-0.001	0.08	-0.08

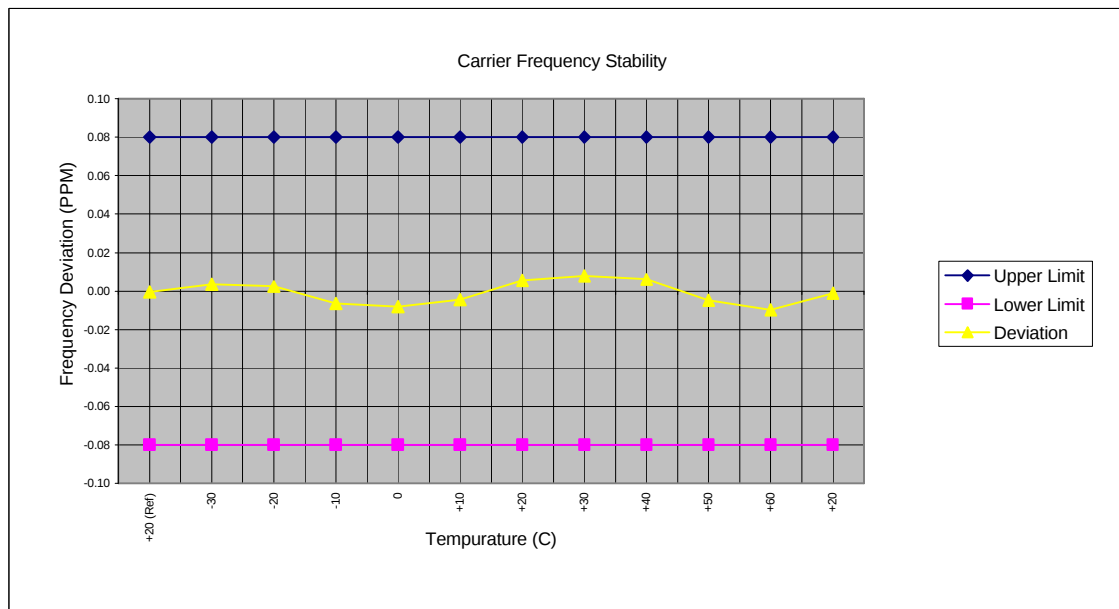

4.1 TEST EQUIPMENT

<u>Type</u>	<u>Model</u>	<u>Calibration Due Date</u>	<u>Serial No.</u>
HP Signal Generator	8648D (9kHz-4.0GHz)	Nov. 2002	3847A00611
Rohde & Schwarz Signal Generator	SMR40 (10MHz-40GHz)	Nov. 2002	835537/022
Gigatronics Power Meter	8652A	Oct. 2002	1835272
Gigatronics Power Sensor	80701A (0.05-18GHz)	Sept. 2002	1833535
Gigatronics Power Sensor	80701A (0.05-18GHz)	Sept. 2002	1833542
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	N/A	26235
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	N/A	3123A00587
Network Analyzer	HP 8753E (30kHz-3GHz)	Nov. 2002	US38433013
Audio Analyzer	HP 8903B	Nov. 2002	3729A18691
Modulation Analyzer	HP 8901A	July 2002	3749A07154
Frequency Counter	HP 53181A (3GHz)	May 2002	3736A05175
DC Power Supply	HP E3611A	N/A	KR83015294
CDMA Base Station Simulator	Agilent E8285A	Feb. 2003	US40332926
Multi-Device Controller	EMCO 2090	N/A	9912-1484
Mini Mast	EMCO 2075	N/A	0001-2277
Tumtable	EMCO 2080-1.2/1.5	N/A	0002-1002
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	Oct. 2002	6267
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	Oct. 2002	6276
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept. 2002	9120A-239
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept. 2002	9120A-240
Roberts Dipoles	ETS DB-4 (400MHz-1GHz)	June 2002	6276
Spectrum Analyzer	HP 8594E	March 2003	3543A02721
Spectrum Analyzer	HP E4408B	Nov. 2002	US39240170
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	N/A	16297
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	Feb. 2003	0510154-B

5.1 CONCLUSION

The data in this measurement report shows that the MODOTTEL CO., LTD. Model: WPE-2300 Single-Mode PCS CDMA Phone FCC ID: POQWPE-2300 complies with all the requirements of Parts 2 and 24(E) of the FCC rules.

TEST PLOTS



10:24:08 Jan 29, 2002

WPE-2300 COND SPURS CH 0025

Ref -6 dBm

Atten 5 dB

Mkr1 2.176 GHz

-32.74 dBm

Peak

Log

10

dB/

Offst

31

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA


Start 10 MHz

*Res BW 3 MHz

VBW 3 MHz

Stop 2.5 GHz

Sweep 5 ms

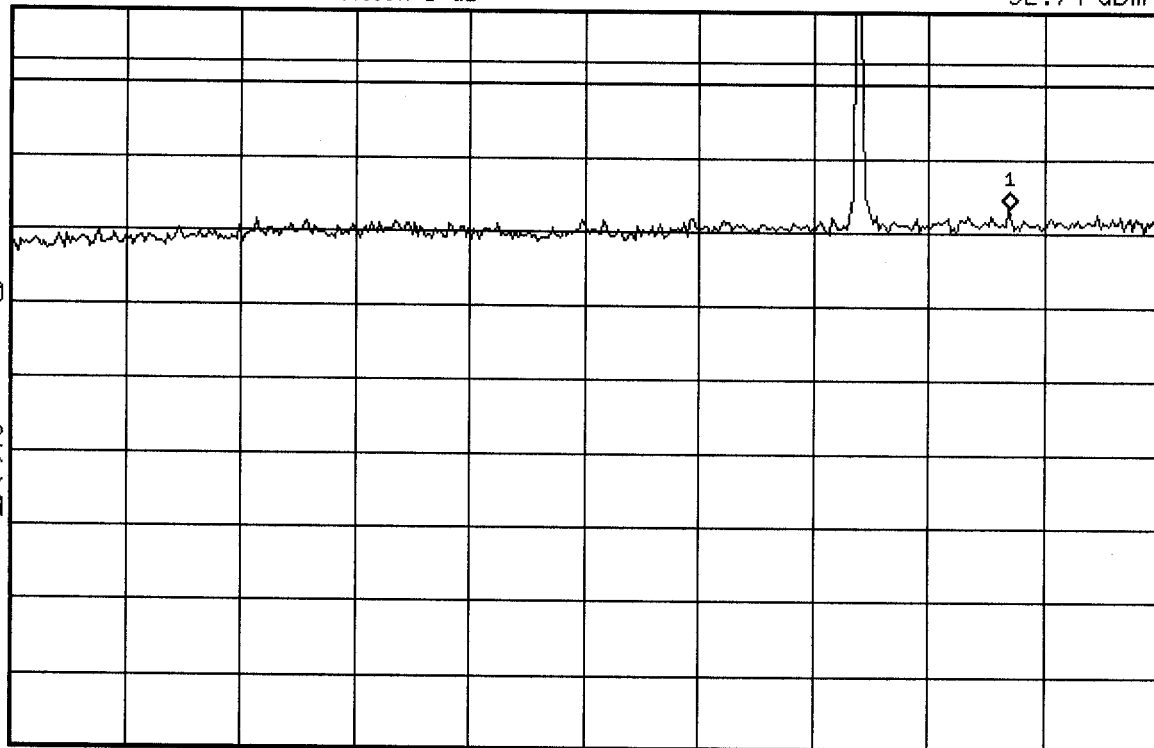



10:23:16 Jan 29, 2002

WPE-2300 COND SPURS CH 0025

Ref -6 dBm

Atten 5 dB

Mkr1 5.556 GHz

-24.44 dBm

Peak

Log

10

dB/

Offst

31

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA


Start 2.5 GHz

*Res BW 3 MHz

VBW 3 MHz

Stop 10 GHz

Sweep 18.75 ms

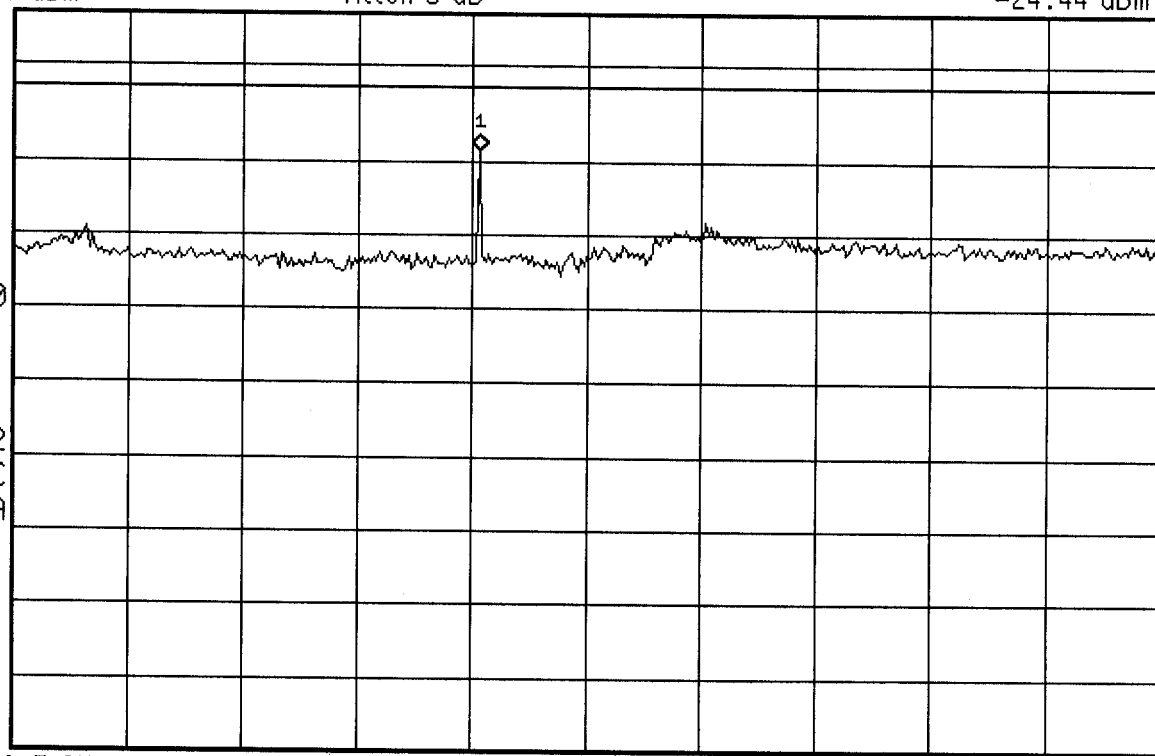



10:24:25 Jan 29, 2002

WPE-2300 COND SPURS CH 0025

Ref -6 dBm

Atten 5 dB

Mkr1 13.70 GHz

-32.24 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

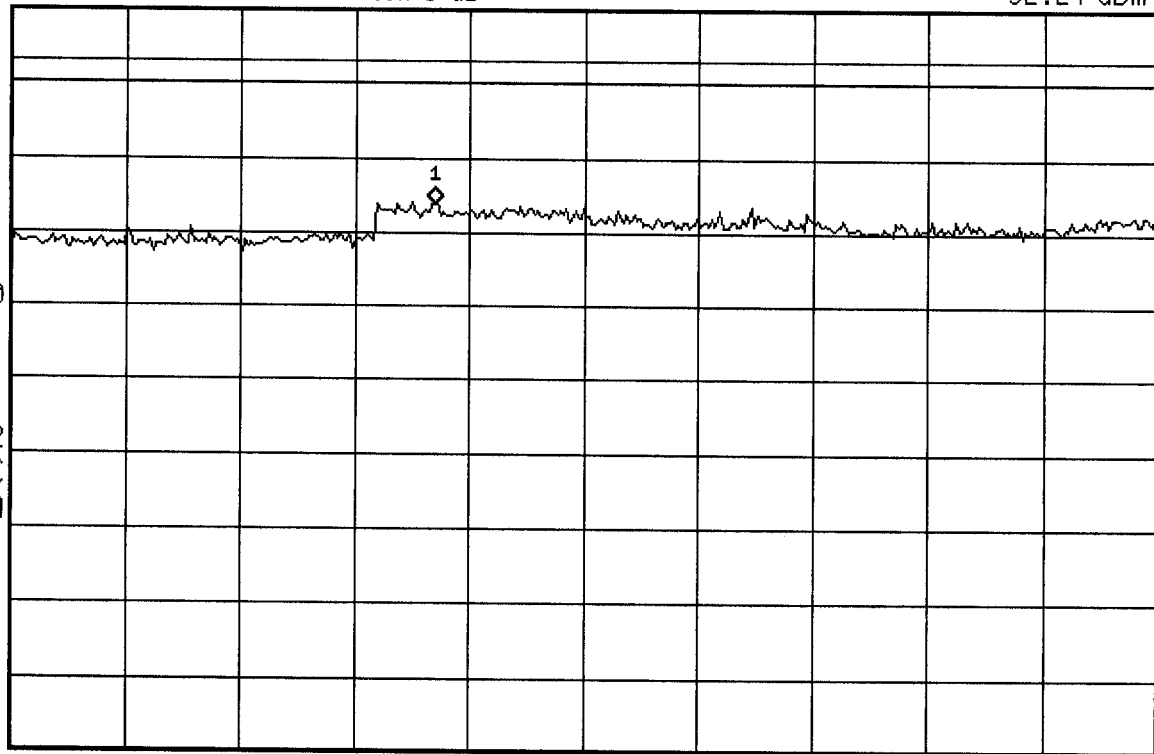

Start 10 GHz

*Res BW 3 MHz

VBW 3 MHz

Stop 20 GHz

Sweep 100 ms



10:25:44 Jan 29, 2002

WPE-2300 COND SPURS CH 600

Ref -6 dBm

Atten 5 dB

Mkr1 2.469 GHz

-33.51 dBm

Peak

Log

10

dB/

Offst

31

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA


Start 10 MHz

*Res BW 3 MHz

VBW 3 MHz

Stop 2.5 GHz

Sweep 5 ms

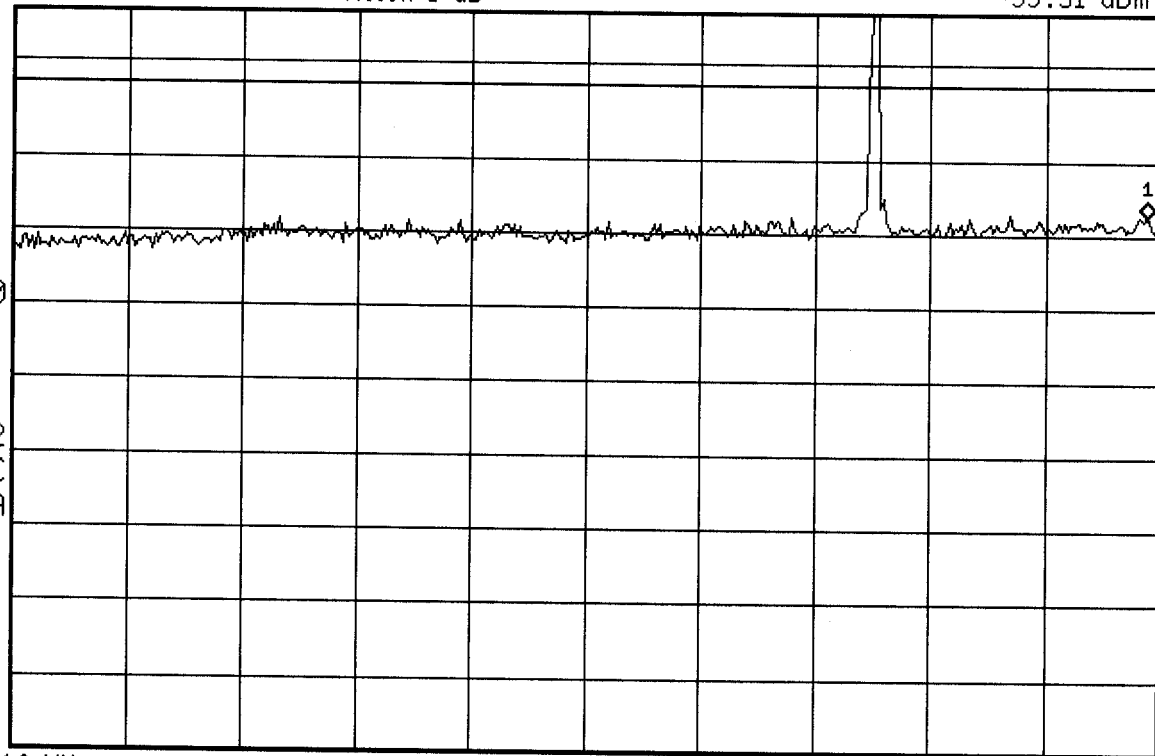



10:25:22 Jan 29, 2002

WPE-2300 COND SPURS CH 600

Ref -6 dBm

Atten 5 dB

Mkr1 5.650 GHz

-22.75 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

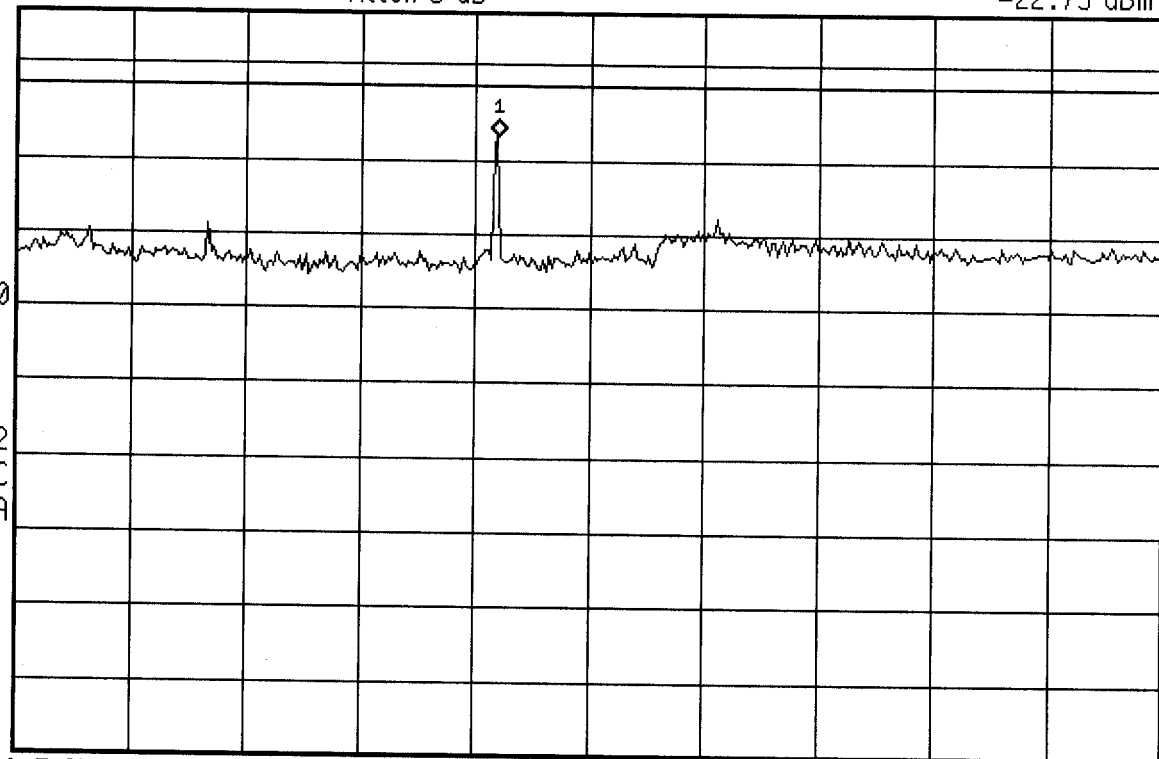

Start 2.5 GHz

*Res BW 3 MHz

VBW 3 MHz

Stop 10 GHz

Sweep 18.75 ms



10:25:01 Jan 29, 2002

WPE-2300 COND SPURS CH 600

Ref -6 dBm

Atten 5 dB

Mkr1 13.50 GHz

-31.82 dBm

Peak

Log

10

dB/

Offset

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

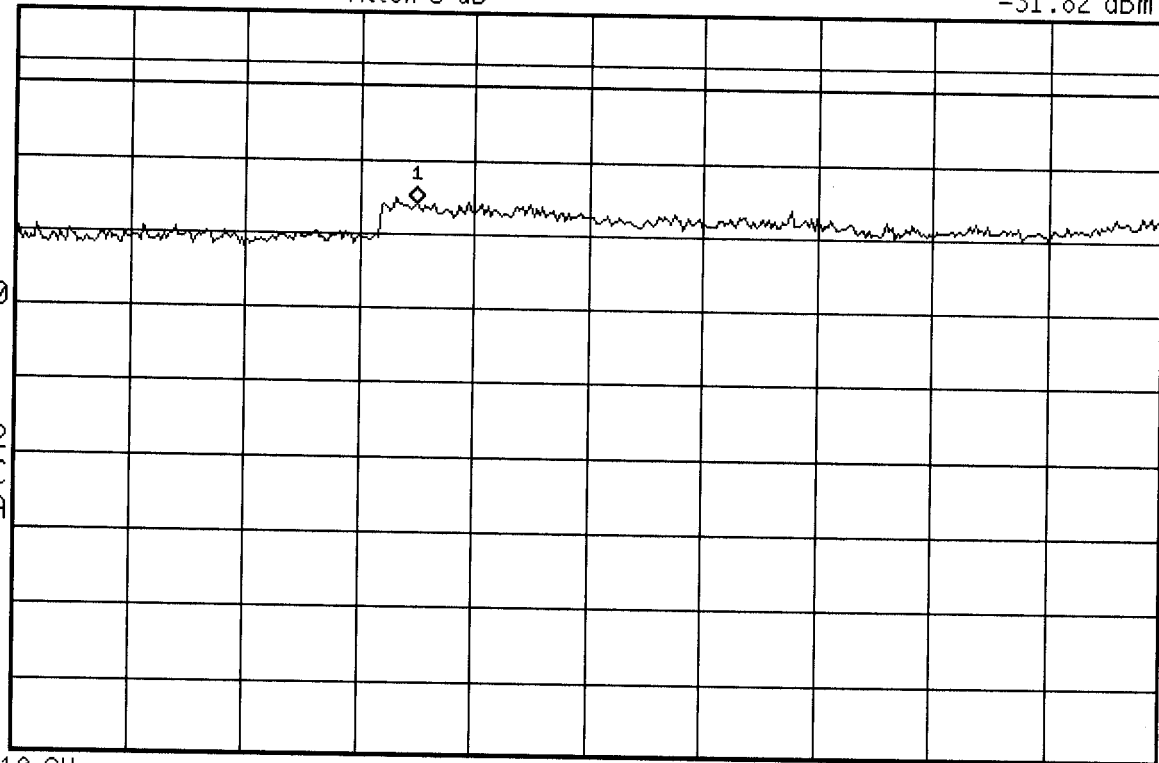

Start 10 GHz

#Res BW 3 MHz

VBW 3 MHz

Stop 20 GHz

Sweep 100 ms



10:26:19 Jan 29, 2002


WPE-2300 COND SPURS CH 1175

Ref -6 dBm

Atten 5 dB

Mkr1 2.301 GHz

-32.92 dBm

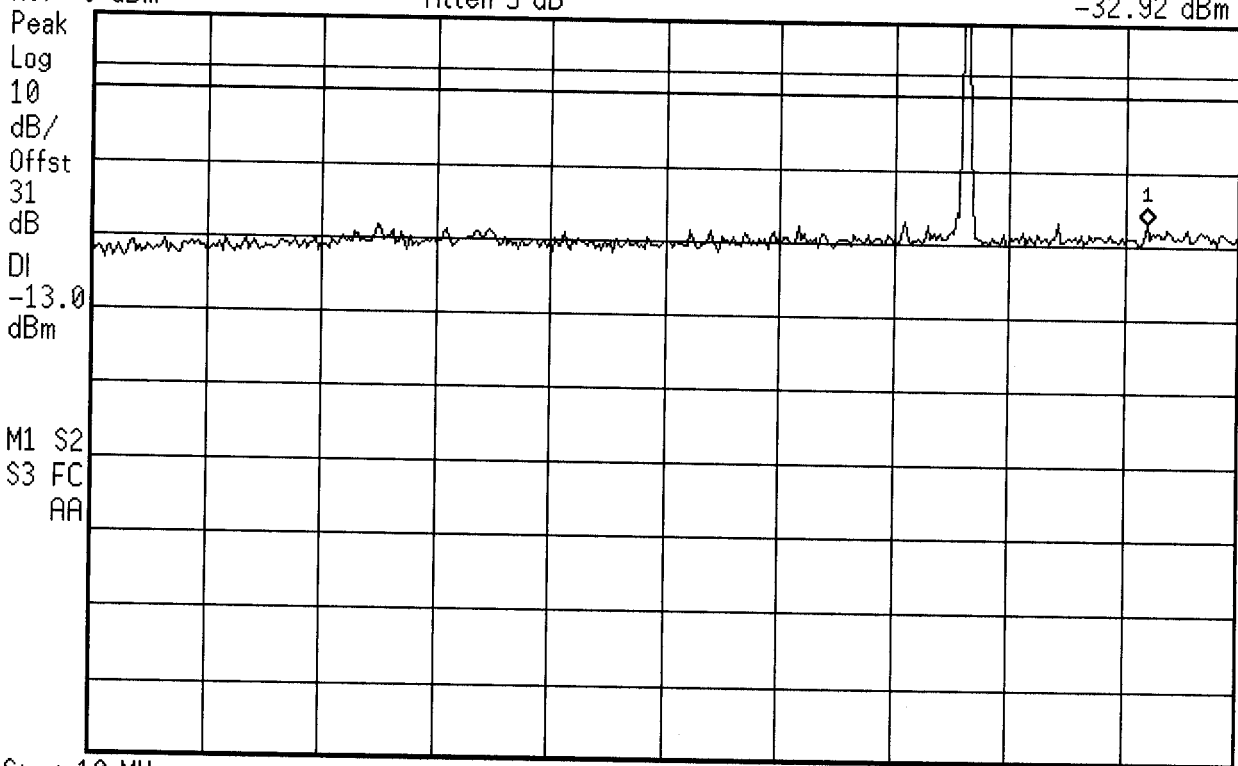

Start 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Stop 2.5 GHz

Sweep 5 ms



10:26:38 Jan 29, 2002


WPE-2300 COND SPURS CH 1175

Ref -6 dBm

Atten 5 dB

Mkr1 5.725 GHz

-32.42 dBm

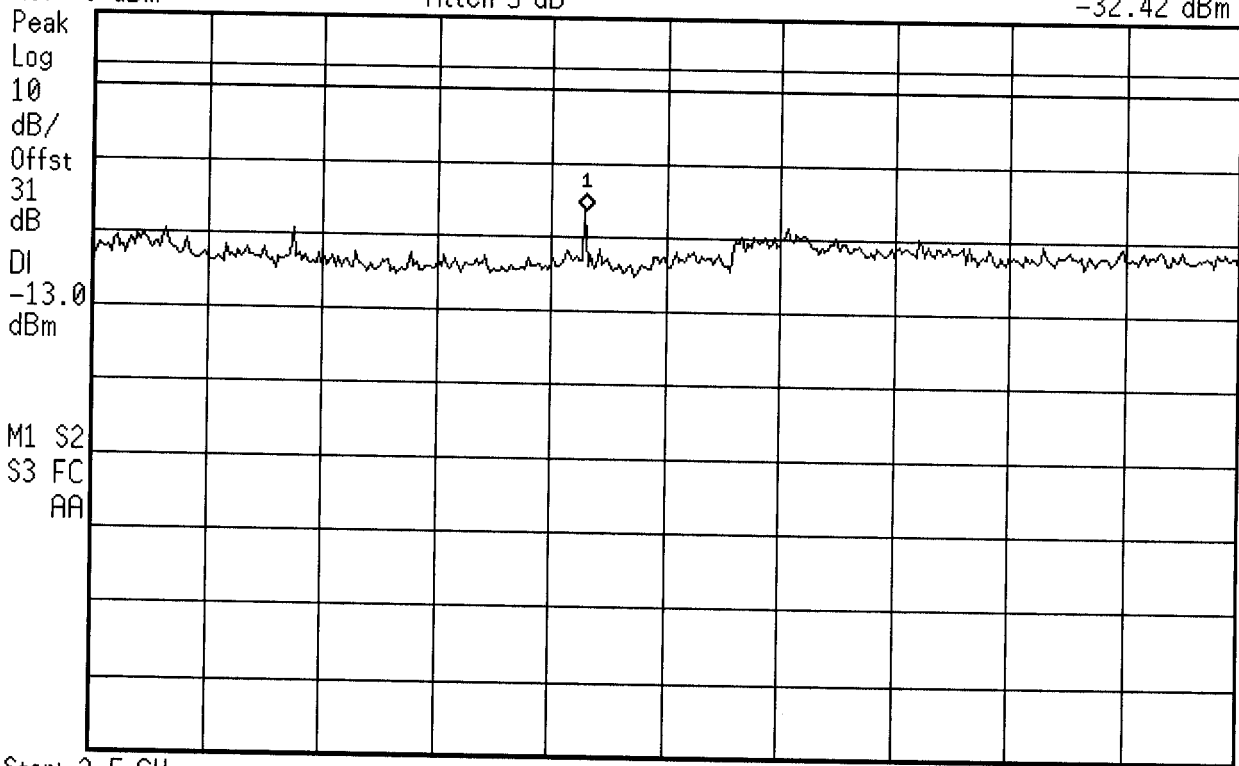

Start 2.5 GHz

*Res BW 3 MHz

VBW 3 MHz

Stop 10 GHz

Sweep 18.75 ms



10:26:54 Jan 29, 2002

WPE-2300 COND SPURS CH 1175

Mkr1 13.20 GHz

Ref -6 dBm

Atten 5 dB

-32.19 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

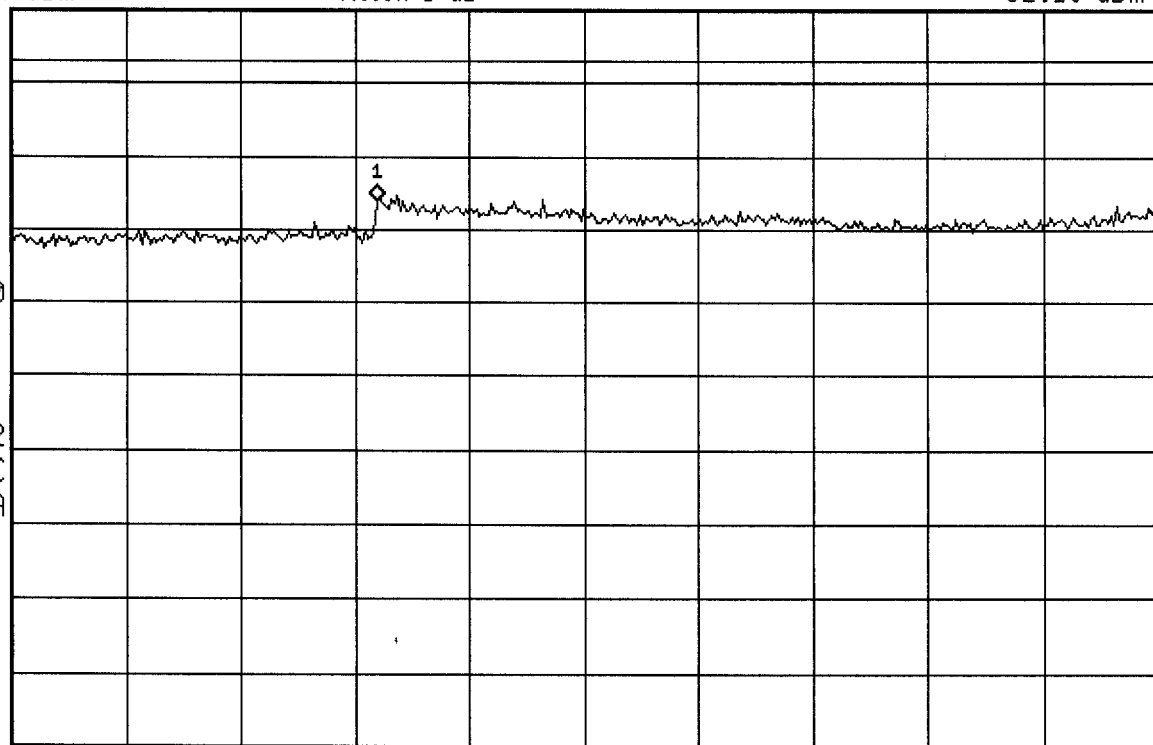

Start 10 GHz

#Res BW 3 MHz

VBW 3 MHz

Stop 20 GHz

Sweep 100 ms



11:57:26 Jan 29, 2002


WITHUS WPE-2300 RECEIVER SPURS

Ref -79 dBm

Atten 5 dB

Mkr1 1.94057 GHz

-88.24 dBm

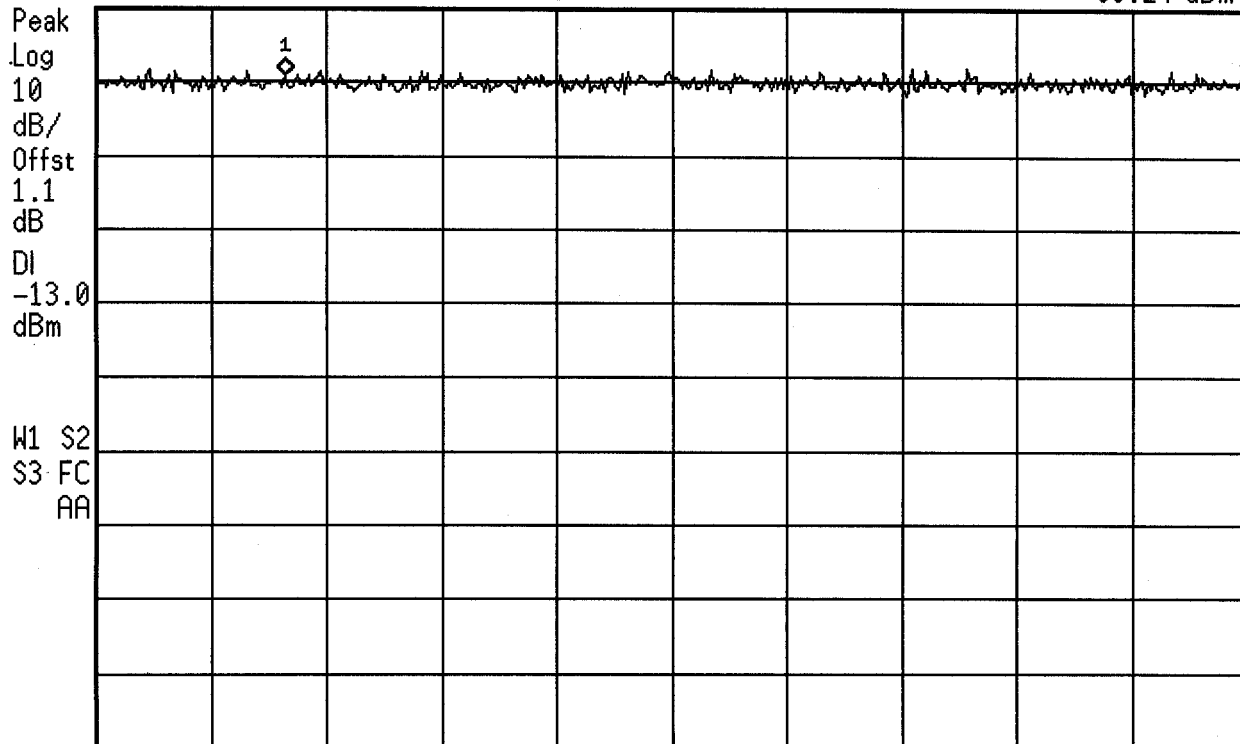

Start 1.931 GHz

*Res BW 30 kHz

VBW 30 kHz

Stop 1.989 GHz

*Sweep 5 s



10:43:59 Jan 29, 2002

WPE-2300 PCS MODE BAND EDGE LOW CH

Ref 24.5 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

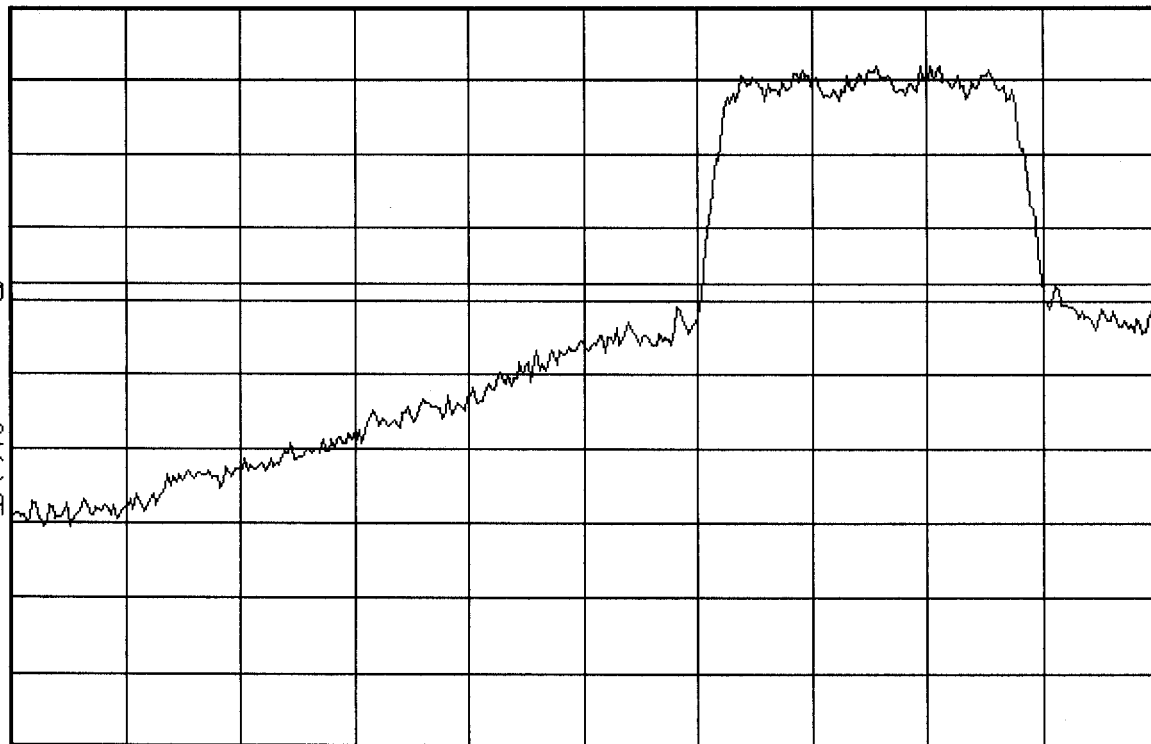

Center 1.85 GHz

#Res BW 30 kHz

VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms



10:42:39 Jan 29, 2002

WPE-2300 PCS MODE BAND EDGE HI CH

Ref 24.5 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

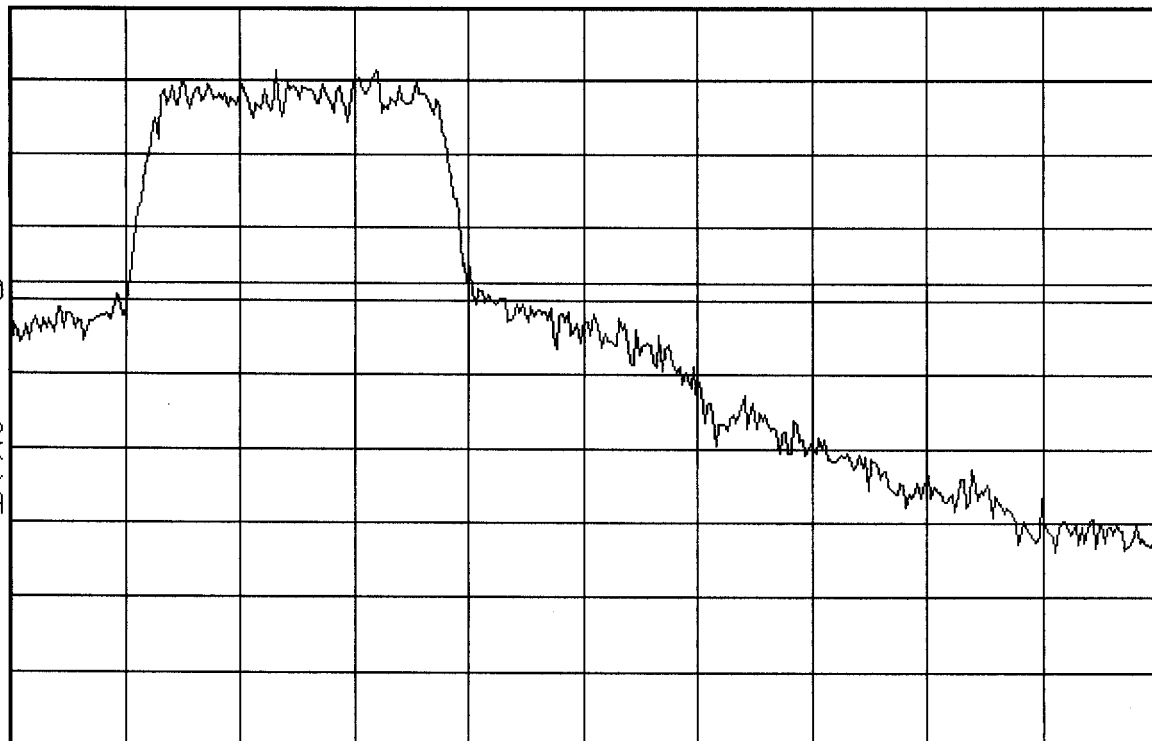

Center 1.91 GHz

*Res BW 30 kHz

VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms



10:45:27 Jan 29, 2002

WPE-2300 PCS MODE OCCUPIED BAND WIDTH

Ref 24.5 dBm

Atten 5 dB

Samp

Log

10

dB/

Offst


31

dB

DI

-13.0

dBm

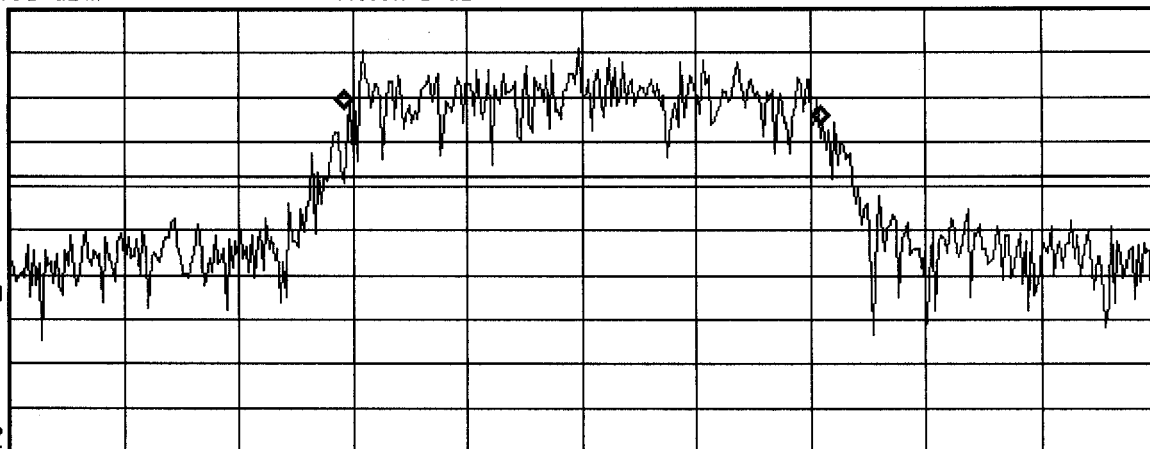

Center 1.88 GHz

Span 3 MHz

*Res BW 30 kHz

*VBW 300 kHz

Sweep 9.167 ms

Occupied Bandwidth Results (measuring..)

Occupied Bandwidth

Occ BW % Pwr 99.00 %

1.253 MHz

Transmit Freq Error 6.157 kHz



 10:36:32 Jan 29, 2002

WPE-2300 PCS MODE CH 0025

Ref 24.5 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

31

dB

D


-13.0

dBm

M1 S2

S3 FC

AA

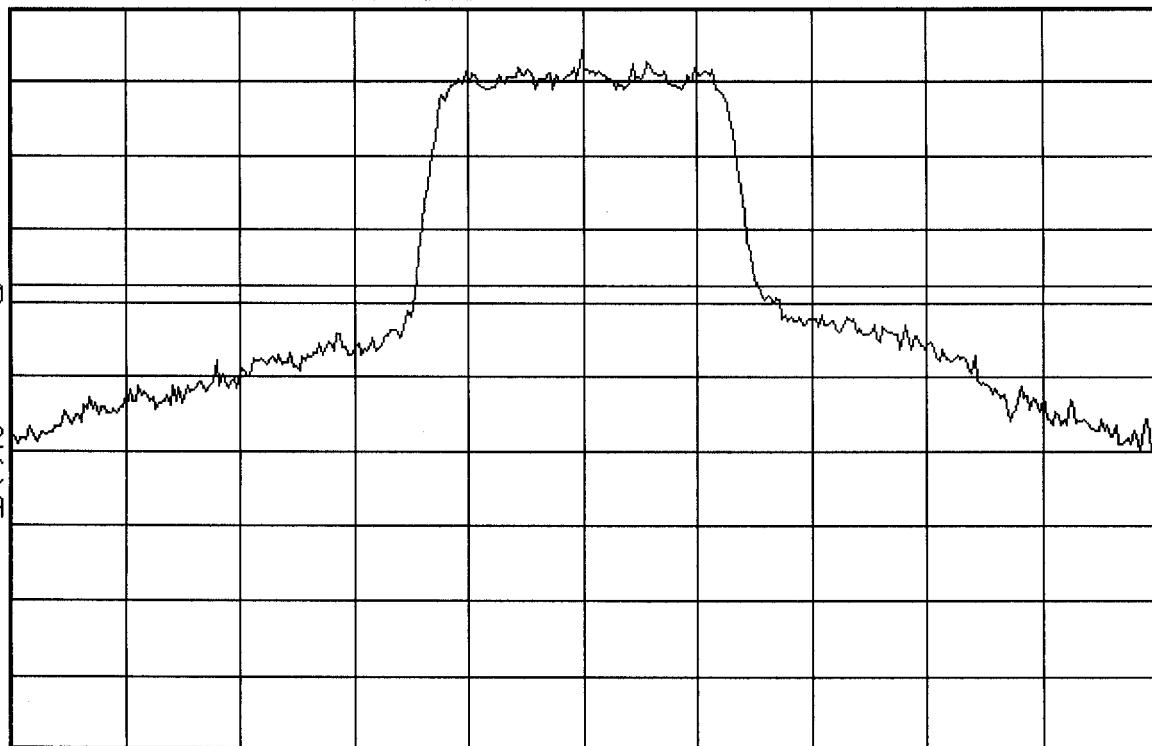

Center 1.851 GHz

```
#Res BW 30 kHz
```

VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms



10:37:21 Jan 29, 2002

WPE-2300 PCS MODE CH 600

Ref 24.5 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

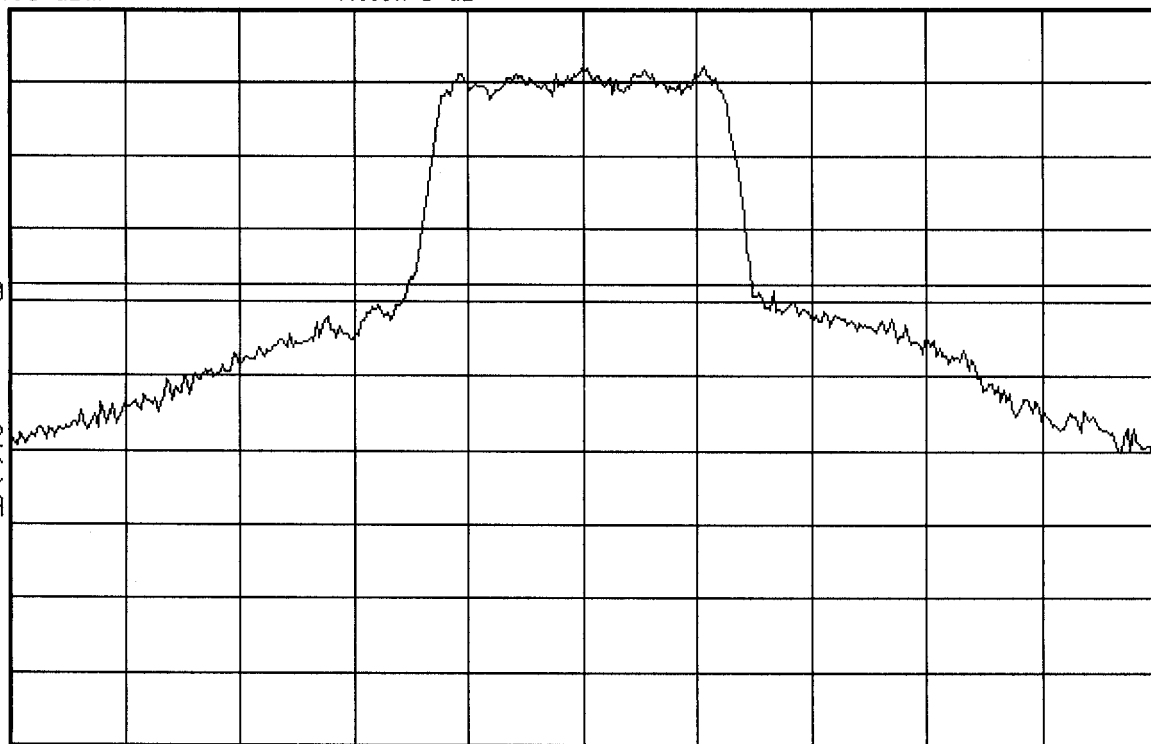

Center 1.88 GHz

#Res BW 30 kHz

VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms



10:41:26 Jan 29, 2002

WPE-2300 PCS MODE CH 1175

Ref 24.5 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

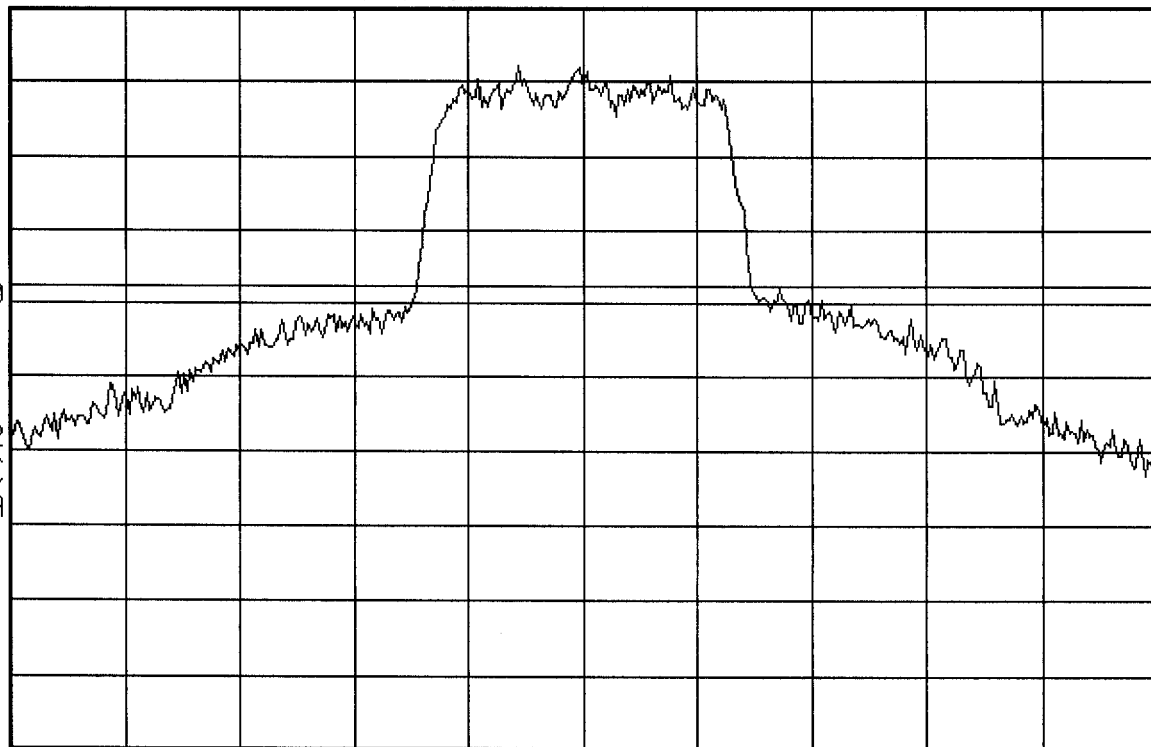

Center 1.909 GHz

*Res BW 30 kHz

VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms