


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOMA NETWORKS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SOMA NETWORKS IS PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
INITIAL	RELEASED FOR QUOTATION / PROTOTYPING / PRODUCTION	4/25/01	
ADD	REVISIONS AND CORRECTIONS LOG		

NOT RELEASED

NOT RELEASED

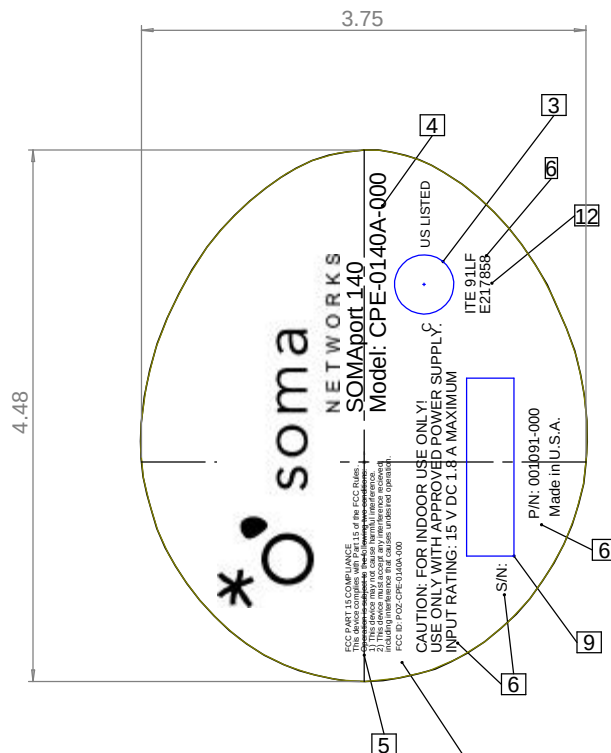

FCC ID added in this location.

1. MARK VENDOR NAME, LABEL DESIGNATION, AND SOMA NETWORKS PART NUMBER ON EACH SHEET OF LABELS.
2. BACKGROUND TO BE BLACK. LETTERING AND GRAPHICS TO BE SILVER.
3. REFER TO APPROPRIATE AGENCY LISTING MARK INFORMATION TO REPLACE REFERENCE SYMBOLS WITH APPROPRIATE REGISTERED MARKS.
4. FONT: ARIAL 14 POINT
5. FONT: ARIAL 5 POINT
6. FONT: ARIAL 9 POINT
7. LABEL CONSTRUCTION TO CONSIST OF A 0.010" THICK POLYCARBONATE LABEL STOCK WITH A 0.005" THICK 3M 468 PRESSURE SENSITIVE ADHESIVE. LABEL MUST BE A COMPONENT MARKING AND LABELING SYSTEM APPROVED BY UL AND CSA FOR THE FOLLOWING CONDITIONS:
 - INDOOR
 - TEMPERATURE RANGE: -40C TO +55C WHEN AFFIXED TO PLASTIC (HAPCO ULTRALOY 912 CAST POLYURETHANE)
8. APPROVED SOURCES OF SUPPLY: BAY AREA LABELS
9. SERIAL NUMBER LABEL TO BE AFFIXED AT INDICATED LOCATION.
10. REFERENCE DOCUMENT "SOMAPORT140 REGULATORY LABEL REV 2.AI" FOR LABEL LAYOUT.
11. REFERENCE DOCUMENT "SOMAPORT140 REGULATORY LABEL REV 2.DXF" FOR LABEL OUTLINE.
12. "ITE 91LF / E217858" AT NOTED LOCATION.

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION		MATERIAL SPECIFICATION	QTY REQD		
PARTS LIST							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE		 NETWORKS			
FRACTIONS	DECIMALS	ANGLES	APPROVALS			DATE	
+	.XX+ .XX	+ .1	DRAWN			A. HUDSON	6/4/01
	.XXX+ .XXX		CHECKED				
MATERIAL	--		RESP ENG			A. HUDSON	6/4/01
FINISH	--		DATE				
			SCALE				
DO NOT SCALE		DUAL ENG		SCALE			
2		2		1			

*** soma NETWORKS**
LABEL, REGULATORY,
U.S.A., CFT-1

NOT RELEASED