



## FCC PART 15.249

### TEST REPORT

For

**ShenZhen Rapoo Technology Co., Ltd**

22,Jinxu Road East,Pingshan District,Shenzhen,China

**FCC ID: PP203055B**

|                                              |                                                                                                                                                                                                            |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report       | <b>Product Name:</b><br>2.4G Nano Receiver                                                                                                                                                                 |
| <b>Test Engineer:</b> Kevin Hu               | <i>Kevin Hu</i>                                                                                                                                                                                            |
| <b>Report Number:</b> RDG170523002           |                                                                                                                                                                                                            |
| <b>Report Date:</b> 2017-07-18               |                                                                                                                                                                                                            |
| <b>Reviewed By:</b> Henry Ding<br>EMC Leader | <i>Henry Ding</i>                                                                                                                                                                                          |
| <b>Test Laboratory:</b>                      | Bay Area Compliance Laboratories Corp. (Chengdu)<br>No.5040, Huilongwan Plaza, No.1, Shawan Road,<br>Jinniu District, Chengdu, Sichuan, China<br>Tel: 028-65525123 , Fax: 028-65525125<br>www.baclcorp.com |

**Note:** This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

## **TABLE OF CONTENTS**

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION .....</b>                                 | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....         | 3         |
| OBJECTIVE .....                                                  | 3         |
| RELATED SUBMITTAL(S)/GRANT(S) .....                              | 3         |
| TEST METHODOLOGY .....                                           | 4         |
| TEST FACILITY .....                                              | 4         |
| <b>SYSTEM TEST CONFIGURATION .....</b>                           | <b>5</b>  |
| JUSTIFICATION .....                                              | 5         |
| EUT EXERCISE SOFTWARE .....                                      | 5         |
| EQUIPMENT MODIFICATIONS .....                                    | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                         | 5         |
| SUPPORT CABLE LIST AND DETAILS .....                             | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                             | <b>7</b>  |
| <b>FCC§15.203 - ANTENNA REQUIREMENT .....</b>                    | <b>8</b>  |
| APPLICABLE STANDARD .....                                        | 8         |
| ANTENNA CONNECTOR CONSTRUCTION .....                             | 8         |
| <b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>       | <b>9</b>  |
| APPLICABLE STANDARD .....                                        | 9         |
| EUT SETUP .....                                                  | 9         |
| EMI TEST RECEIVER SETUP .....                                    | 9         |
| TEST PROCEDURE .....                                             | 10        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                   | 10        |
| TEST EQUIPMENT LIST AND DETAILS .....                            | 10        |
| TEST DATA .....                                                  | 11        |
| <b>FCC§15.205, §15.209&amp;§15.249- RADIATED EMISSIONS .....</b> | <b>14</b> |
| APPLICABLE STANDARD .....                                        | 14        |
| EUT SETUP .....                                                  | 14        |
| TEST EQUIPMENT SETUP .....                                       | 15        |
| TEST PROCEDURE .....                                             | 15        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                   | 16        |
| TEST EQUIPMENT LIST AND DETAILS .....                            | 16        |
| TEST DATA .....                                                  | 17        |
| <b>FCC §15.215(C) – 20 DB BANDWIDTH TESTING .....</b>            | <b>19</b> |
| APPLICABLE STANDARD .....                                        | 19        |
| TEST PROCEDURE .....                                             | 19        |
| TEST EQUIPMENT LIST AND DETAILS .....                            | 19        |
| TEST DATA .....                                                  | 19        |

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The **ShenZhen Rapoo Technology Co., Ltd**'s product, model number: **03055B** (**FCC ID: PP203055B**) (the "EUT") in this report was a **2.4G Nano Receiver**, which was measured approximately: 1.8 cm (L) x 1.2 cm (W) x 0.5 cm (H), rated input voltage: DC 5V from host.

*\*All measurement and test data in this report was gathered from final production sample, serial number: 170523002 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-06-05, and EUT conformed to test requirement.*

### Objective

This type approval report is prepared on behalf of **ShenZhen Rapoo Technology Co., Ltd** in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

### Related Submittal(s)/Grant(s)

Part of systems submissions with FCC ID: PP2M10

## Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All of the measurements detailed in this Test Report were performed by Bay Area Compliance Laboratories Corp. (Chengdu).

The Bay Area Compliance Laboratories Corp. Chengdu's measurement Uncertainties (calculated for a k=2 Coverage Factor corresponding to approximately 95% Coverage) were as follows:

- For all of the AC Line Conducted Emissions Tests reported herein:  $\pm 3.17$  dB.
- For of all of the Direct Antenna Conducted Emissions Tests reported herein:  $\pm 0.56$  dB.
  
- For of all of the direct Radiated Emissions Tests reported herein are:
  - 30 MHz to 200 MHz:  $\pm 4.7$  dB;
  - 200 MHz to 1 GHz:  $\pm 6.0$  dB;
  - 1 GHz to 6 GHz:  $\pm 5.13$ dB; and,
  - 6 GHz to 40 GHz:  $\pm 5.47$ dB.

And the uncertainty will not be taken into consideration for all test data recorded in the report.

## Test Facility

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

16 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 1       | 2402            | 5       | 2425            | 9       | 2446            | 13      | 2471            |
| 2       | 2405            | 6       | 2428            | 10      | 2451            | 14      | 2474            |
| 3       | 2409            | 7       | 2431            | 11      | 2454            | 15      | 2477            |
| 4       | 2413            | 8       | 2434            | 12      | 2457            | 16      | 2479            |

EUT was tested with Channel 1, 9 and 16.

### EUT Exercise Software

Test software: 'EnteryLevelTool' was used in test, the maximum power was configured by system default setting, the software was used for change test modes and channels.

### Equipment Modifications

No modifications were made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description | Model             | Serial Number |
|--------------|-------------|-------------------|---------------|
| DELL         | Laptop      | Ins15-7567-D1845B | X78591D8639   |

### Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To     |
|-------------------|----------------|--------------|------------|-----------|--------|
| Adapter Cable     | yes            | No           | 1.5        | Adapter   | Laptop |

## Block Diagram of Test Setup

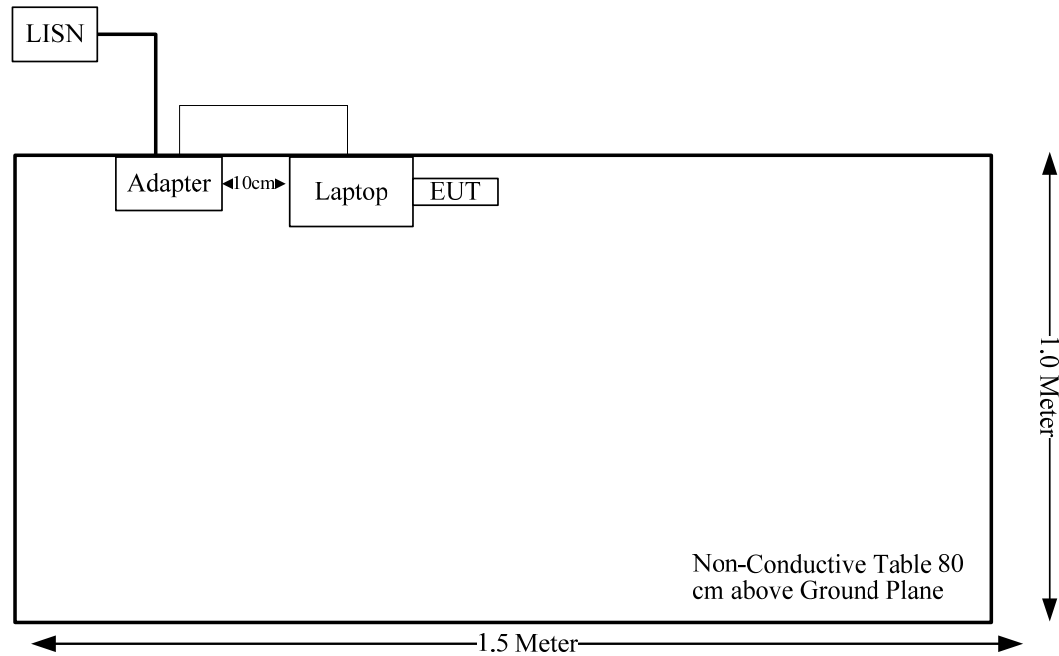

## **SUMMARY OF TEST RESULTS**

---

| <b>FCC Rules</b>         | <b>Description of Test</b> | <b>Result</b> |
|--------------------------|----------------------------|---------------|
| §15.203                  | Antenna Requirement        | Compliance    |
| §15.207(a)               | Conduction Emissions       | Compliance    |
| 15.205, §15.209, §15.249 | Radiated Emissions         | Compliance    |
| §15.215 (c)              | 20 dB Bandwidth            | Compliance    |

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

### **Antenna Connector Construction**

The EUT has an integrated antenna, the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a)

### EUT Setup

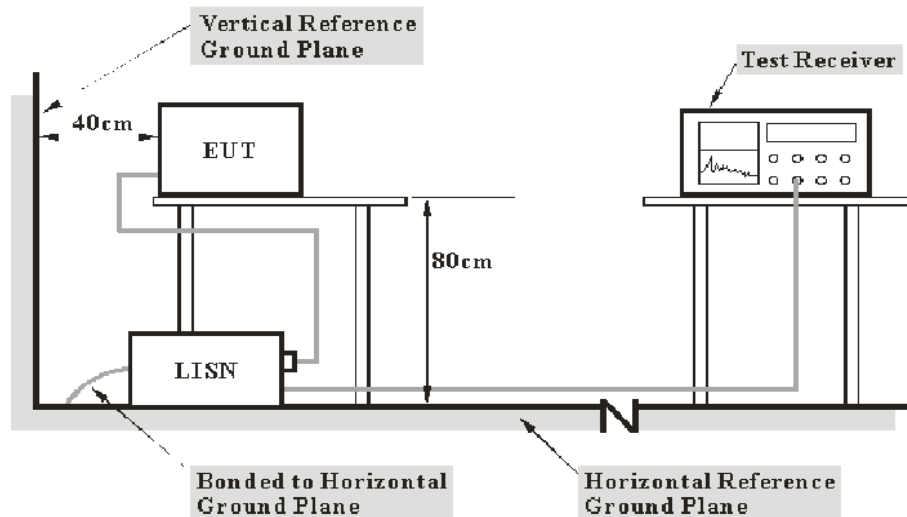

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The Adapter was connected to the main lisn with a 120V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer      | Description       | Model          | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|-------------------|----------------|---------------|------------------|----------------------|
| Rohde & Schwarz   | EMI Test Receiver | ESCS 30        | 836858/0016   | 2016-12-02       | 2017-12-01           |
| Rohde & Schwarz   | L.I.S.N.          | ENV216         | 100018        | 2016-12-02       | 2017-12-01           |
| SOLAR ELECTRONICS | L.I.S.N.          | 9252-50-24-BNC | 984413        | 2016-12-02       | 2017-12-01           |
| Rohde & Schwarz   | PULSE LIMITER     | ESH3Z2         | DE14781       | 2016-10-31       | 2017-10-30           |
| Unknown           | Conducted Cable   | Unknown        | NO.5          | 2016-11-10       | 2017-11-09           |
| R&S               | Test Software     | EMC32          | Version8.53.0 | N/A              | N/A                  |

\* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

## Test Data


### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 27.6°C    |
| <b>Relative Humidity:</b> | 55%       |
| <b>ATM Pressure:</b>      | 100.3 kPa |

*The testing was performed by Kevin Hu on 2017-6-27.*

Test Mode: Transmitting


AC120 V, Line:

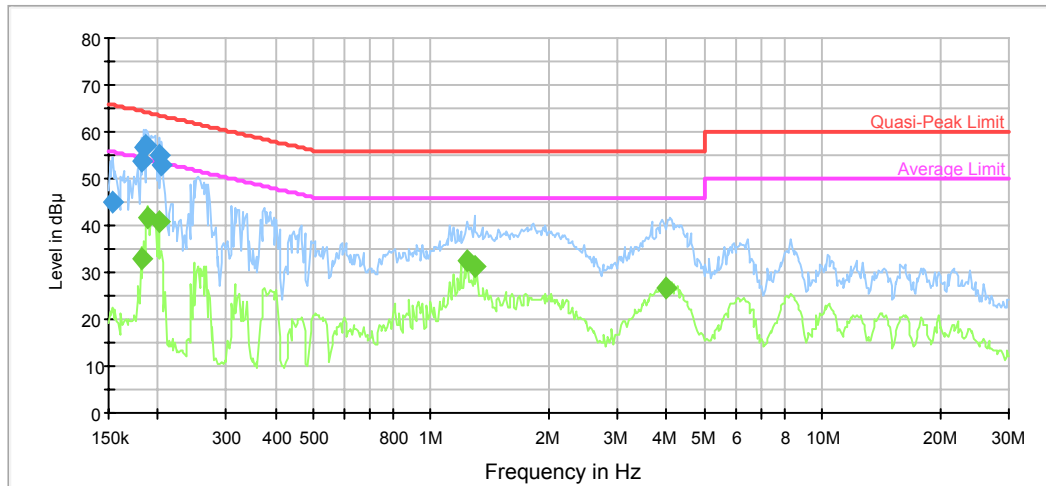

| Frequency (MHz) | Quasi Peak (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment    |
|-----------------|-------------------------|-----------------|------|------------|-------------|--------------------|------------|
| 0.153629        | 45.0                    | 9.000           | L1   | 19.7       | 20.8        | 65.8               | Compliance |
| 0.181612        | 54.0                    | 9.000           | L1   | 19.7       | 10.4        | 64.4               | Compliance |
| 0.184529        | 56.9                    | 9.000           | L1   | 19.7       | 7.4         | 64.3               | Compliance |
| 0.187494        | 57.1                    | 9.000           | L1   | 19.7       | 7.0         | 64.1               | Compliance |
| 0.201433        | 55.0                    | 9.000           | L1   | 19.7       | 8.6         | 63.6               | Compliance |
| 0.204669        | 53.0                    | 9.000           | L1   | 19.7       | 10.4        | 63.4               | Compliance |

| Frequency (MHz) | Average (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment    |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|------------|
| 0.181612        | 33.1                 | 9.000           | L1   | 19.7       | 21.3        | 54.4               | Compliance |
| 0.188994        | 41.6                 | 9.000           | L1   | 19.7       | 12.5        | 54.1               | Compliance |
| 0.201433        | 40.8                 | 9.000           | L1   | 19.7       | 12.8        | 53.6               | Compliance |
| 1.239175        | 32.3                 | 9.000           | L1   | 19.7       | 13.7        | 46.0               | Compliance |
| 1.289541        | 31.2                 | 9.000           | L1   | 19.7       | 14.8        | 46.0               | Compliance |
| 3.997889        | 26.6                 | 9.000           | L1   | 19.7       | 19.4        | 46.0               | Compliance |

**AC120V, Neutral:**

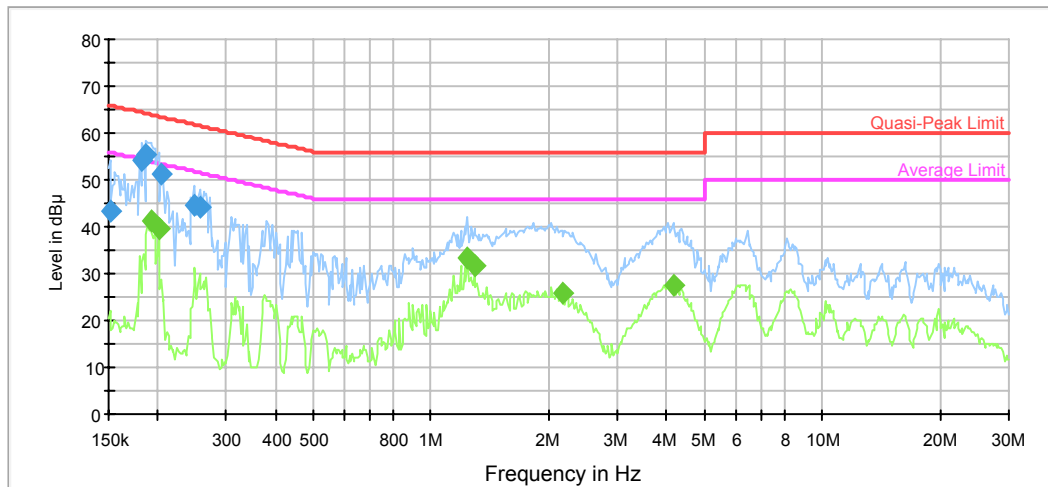

| Frequency (MHz) | Quasi Peak (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment    |
|-----------------|-------------------------|-----------------|------|------------|-------------|--------------------|------------|
| 0.151200        | 43.4                    | 9.000           | N    | 19.7       | 22.5        | 65.9               | Compliance |
| 0.183065        | 54.1                    | 9.000           | N    | 19.6       | 10.2        | 64.3               | Compliance |
| 0.187494        | 55.4                    | 9.000           | N    | 19.6       | 8.7         | 64.1               | Compliance |
| 0.204669        | 51.4                    | 9.000           | N    | 19.6       | 12.0        | 63.4               | Compliance |
| 0.247802        | 44.7                    | 9.000           | N    | 19.6       | 17.1        | 61.8               | Compliance |
| 0.255827        | 44.1                    | 9.000           | N    | 19.6       | 17.5        | 61.6               | Compliance |

| Frequency (MHz) | Average (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment    |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|------------|
| 0.192030        | 41.2                 | 9.000           | N    | 19.6       | 12.7        | 53.9               | Compliance |
| 0.201433        | 39.7                 | 9.000           | N    | 19.6       | 13.9        | 53.6               | Compliance |
| 1.239175        | 33.4                 | 9.000           | N    | 19.6       | 12.6        | 46.0               | Compliance |
| 1.289541        | 31.6                 | 9.000           | N    | 19.6       | 14.4        | 46.0               | Compliance |
| 2.164561        | 25.6                 | 9.000           | N    | 19.7       | 20.4        | 46.0               | Compliance |
| 4.193667        | 27.6                 | 9.000           | N    | 19.7       | 18.4        | 46.0               | Compliance |

## FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

### Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902–928 MHz           | 50                                               | 500                                            |
| 2400–2483.5 MHz       | 50                                               | 500                                            |
| 5725–5875 MHz         | 50                                               | 500                                            |
| 24.0–24.25 GHz        | 250                                              | 2500                                           |

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### EUT Setup

Below 1 GHz:

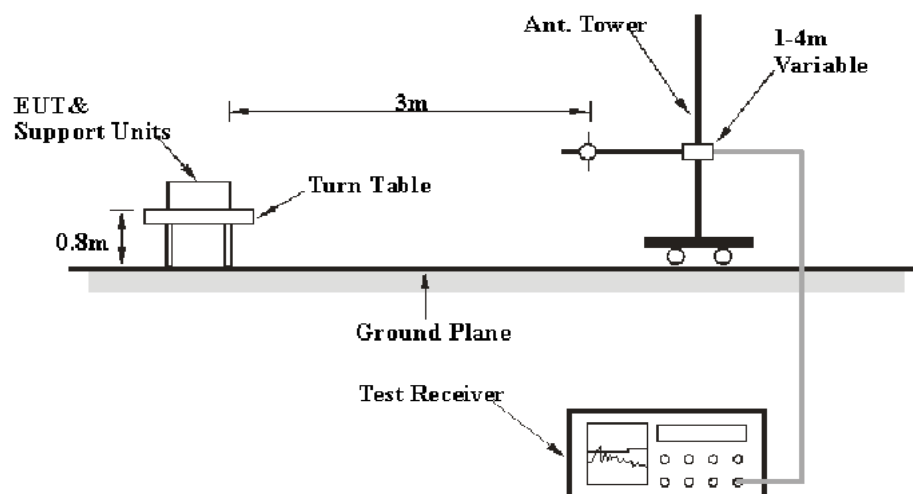

Above 1 GHz:

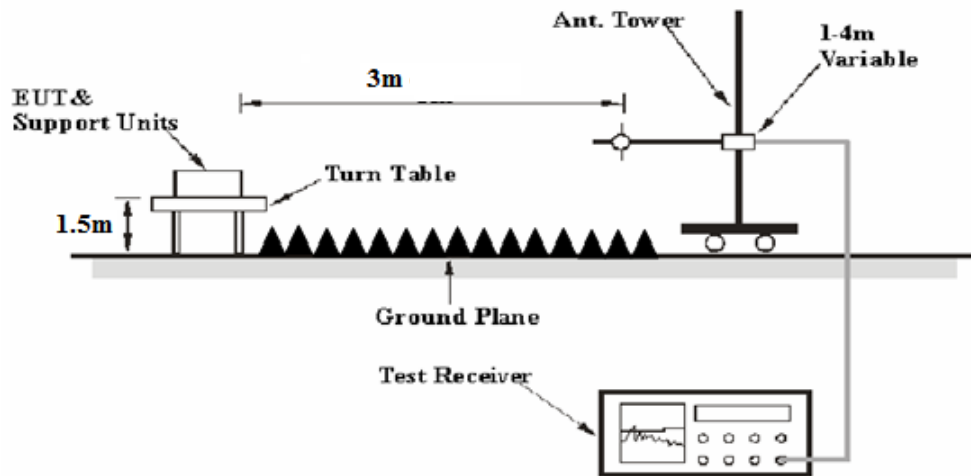

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013 The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

### Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK       |
|                   | 1MHz    | 10 Hz     | /       | AV       |

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer          | Description           | Model           | Serial Number   | Calibration Date | Calibration Due Date |
|-----------------------|-----------------------|-----------------|-----------------|------------------|----------------------|
| Agilent               | Amplifier             | 8447D           | 2944A10442      | 2016-12-02       | 2017-12-01           |
| Rohde & Schwarz       | EMI Test Receiver     | ESCI            | 100028          | 2016-12-02       | 2017-12-01           |
| Sunol Sciences        | Broadband Antenna     | JB3             | A121808         | 2016-04-10       | 2019-04-09           |
| Rohde & Schwarz       | Spectrum Analyzer     | FSEM30          | 100018          | 2016-12-02       | 2017-12-01           |
| ETS                   | Horn Antenna          | 3115            | 003-6076        | 2016-12-02       | 2017-12-01           |
| Ducommun Technologies | Horn Antenna          | ARH-4223-02     | 1007726-0113024 | 2014-06-16       | 2017-06-15           |
| Mini-circuits         | Amplifier             | ZVA-183-S+      | 771001215       | 2017-05-20       | 2018-05-19           |
| EMCT                  | Semi-Anechoic Chamber | 966             | 966-1           | 2015-04-24       | 2018-04-23           |
| Unknown               | RF Cable (below 1GHz) | Unknown         | NO.1            | 2016-11-10       | 2017-11-09           |
| Unknown               | RF Cable (below 1GHz) | Unknown         | NO.4            | 2016-11-10       | 2017-11-09           |
| Unknown               | RF Cable (above 1GHz) | Unknown         | NO.2            | 2016-11-10       | 2017-11-09           |
| Ducommun Technologies | Horn Antenna          | ARH-2823-02     | 1007726-011312  | 2016-08-18       | 2017-08-18           |
| Quinstar              | Amplifier             | QLW-18405536-JO | 15964001032     | 2016-08-18       | 2017-08-18           |
| Agilent               | Spectrum Analyzer     | 8564E           | 5943A01752      | 2016-08-18       | 2017-08-18           |

\* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 38%       |
| ATM Pressure:      | 100.1 kPa |

*The testing was performed by Kevin Hu on 2017-06-15.*

Test Mode: Transmitting

30MHz-25GHz

| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                     | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|---------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB(1/m)) |                       |                           |                                    |                   |                |
| Low Channel: 2402 MHz    |                   |          |                |                     |                       |                           |                                    |                   |                |
| 2402                     | 60.84             | PK       | H              | 23.53               | 3.00                  | 0.00                      | 87.37                              | 114               | 26.63          |
| 2402                     | 46.48             | AV       | H              | 23.53               | 3.00                  | 0.00                      | 73.01                              | 94                | 20.99          |
| 2402                     | 60.75             | PK       | V              | 23.53               | 3.00                  | 0.00                      | 87.28                              | 114               | 26.72          |
| 2402                     | 47.29             | AV       | V              | 23.53               | 3.00                  | 0.00                      | 73.82                              | 94                | 20.18          |
| 2400                     | 31.90             | PK       | H              | 23.54               | 3.00                  | 0.00                      | 58.44                              | 74                | 15.56          |
| 2400                     | 17.88             | AV       | H              | 23.54               | 3.00                  | 0.00                      | 44.42                              | 54                | 9.58           |
| 4780                     | 38.91             | PK       | H              | 30.70               | 5.14                  | 26.87                     | 47.88                              | 74                | 26.12          |
| 4780                     | 29.84             | AV       | H              | 30.70               | 5.14                  | 26.87                     | 38.81                              | 54                | 15.19          |
| 7206                     | 36.65             | PK       | H              | 34.71               | 6.16                  | 26.35                     | 51.17                              | 74                | 22.83          |
| 7206                     | 26.94             | AV       | H              | 34.71               | 6.16                  | 26.35                     | 41.46                              | 54                | 12.54          |
| 2459                     | 43.28             | PK       | H              | 23.34               | 2.99                  | 26.88                     | 42.73                              | 74                | 31.27          |
| 2459                     | 33.96             | AV       | H              | 23.34               | 2.99                  | 26.88                     | 33.41                              | 54                | 20.59          |
| 44.55                    | 50.33             | QP       | H              | 11.82               | 0.34                  | 28.51                     | 33.98                              | 40                | 6.02           |
| 173.56                   | 46.49             | QP       | H              | 11.52               | 0.92                  | 27.96                     | 30.97                              | 43.5              | 12.53          |
| Middle Channel: 2446 MHz |                   |          |                |                     |                       |                           |                                    |                   |                |
| 2446                     | 61.11             | PK       | H              | 23.38               | 3.00                  | 0.00                      | 87.49                              | 114               | 26.51          |
| 2446                     | 47.39             | AV       | H              | 23.38               | 3.00                  | 0.00                      | 73.77                              | 94                | 20.23          |
| 2446                     | 59.62             | PK       | V              | 23.38               | 3.00                  | 0.00                      | 86                                 | 114               | 28             |
| 2446                     | 47.02             | AV       | V              | 23.38               | 3.00                  | 0.00                      | 73.4                               | 94                | 20.6           |
| 4892                     | 38.13             | PK       | H              | 31.05               | 5.08                  | 26.87                     | 47.39                              | 74                | 26.61          |
| 4892                     | 27.74             | AV       | H              | 31.05               | 5.08                  | 26.87                     | 37                                 | 54                | 17             |
| 7338                     | 30.30             | PK       | H              | 34.98               | 6.23                  | 26.41                     | 45.1                               | 74                | 28.9           |
| 7338                     | 19.51             | AV       | H              | 34.98               | 6.23                  | 26.41                     | 34.31                              | 54                | 19.69          |
| 1529                     | 40.17             | PK       | H              | 24.15               | 2.69                  | 26.36                     | 40.65                              | 74                | 33.35          |
| 1529                     | 30.00             | AV       | H              | 24.15               | 2.69                  | 26.36                     | 30.48                              | 54                | 23.52          |
| 2457                     | 44.02             | PK       | H              | 23.35               | 3.00                  | 26.88                     | 43.49                              | 74                | 30.51          |
| 2457                     | 35.78             | AV       | H              | 23.35               | 3.00                  | 26.88                     | 35.25                              | 54                | 18.75          |
| 44.55                    | 50.60             | QP       | H              | 11.82               | 0.34                  | 28.51                     | 34.25                              | 40                | 5.75           |
| 173.56                   | 46.63             | QP       | H              | 11.52               | 0.92                  | 27.96                     | 31.11                              | 43.5              | 12.39          |
| High Channel: 2479 MHz   |                   |          |                |                     |                       |                           |                                    |                   |                |
| 2479                     | 58.92             | PK       | H              | 23.27               | 2.99                  | 0.00                      | 85.18                              | 114               | 28.82          |
| 2479                     | 46.90             | AV       | H              | 23.27               | 2.99                  | 0.00                      | 73.16                              | 94                | 20.84          |
| 2479                     | 57.61             | PK       | V              | 23.27               | 2.99                  | 0.00                      | 83.87                              | 114               | 30.13          |
| 2479                     | 47.66             | AV       | V              | 23.27               | 2.99                  | 0.00                      | 73.92                              | 94                | 20.08          |
| 2483.5                   | 31.49             | PK       | H              | 23.26               | 2.99                  | 0.00                      | 57.74                              | 74                | 16.26          |
| 2483.5                   | 18.99             | AV       | H              | 23.26               | 2.99                  | 0.00                      | 45.24                              | 54                | 8.76           |
| 4958                     | 36.68             | PK       | H              | 31.27               | 5.05                  | 26.88                     | 46.12                              | 74                | 27.88          |
| 4958                     | 26.40             | AV       | H              | 31.27               | 5.05                  | 26.88                     | 35.84                              | 54                | 18.16          |
| 7437                     | 29.47             | PK       | H              | 35.17               | 6.27                  | 26.45                     | 44.46                              | 74                | 29.54          |
| 7437                     | 19.33             | AV       | H              | 35.17               | 6.27                  | 26.45                     | 34.32                              | 54                | 19.68          |
| 1513                     | 41.90             | PK       | H              | 24.12               | 2.68                  | 26.34                     | 42.36                              | 74                | 31.64          |
| 1513                     | 33.26             | AV       | H              | 24.12               | 2.68                  | 26.34                     | 33.72                              | 54                | 20.28          |
| 44.55                    | 51.44             | QP       | H              | 11.82               | 0.34                  | 28.51                     | 35.09                              | 40                | 4.91           |
| 173.56                   | 47.05             | QP       | H              | 11.52               | 0.92                  | 27.96                     | 31.53                              | 43.5              | 11.97          |

## FCC §15.215(c) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

| Manufacturer    | Description     | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26  | 831929/005    | 2016-09-21       | 2017-09-20           |
| Unknown         | RF Cable        | Unknown | C-5           | Each Time        | /                    |

\* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.4 °C   |
| Relative Humidity: | 35 %      |
| ATM Pressure:      | 101.7 kPa |

*The testing was performed by Kevin Hu on 2017-06-13.*


**Test Result:** Compliant.

Please refer to following tables and plots

Test Mode: Transmitting


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------|-----------------|-----------------------|
| Low     | 2402            | 1.57                  |
| Middle  | 2446            | 1.57                  |
| High    | 2479            | 1.57                  |

### Low Channel

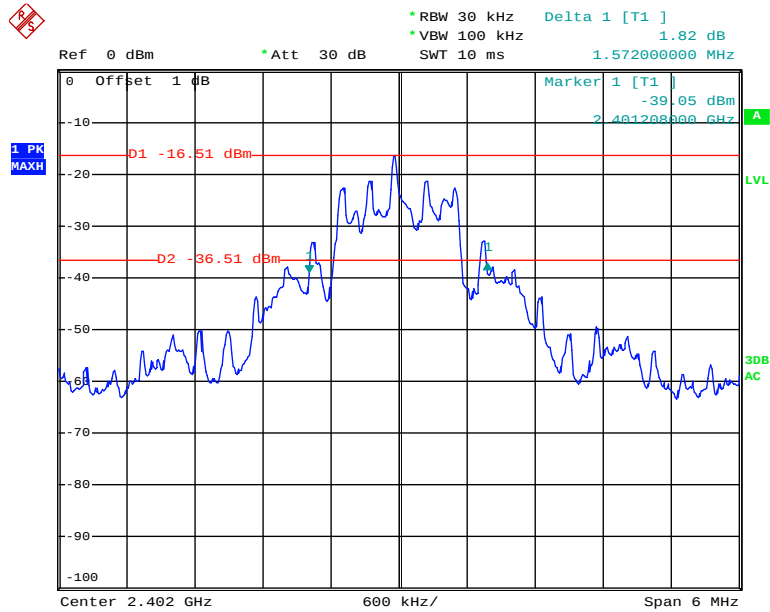


Date: 13.JUN.2017 16:03:28

## Middle Channel

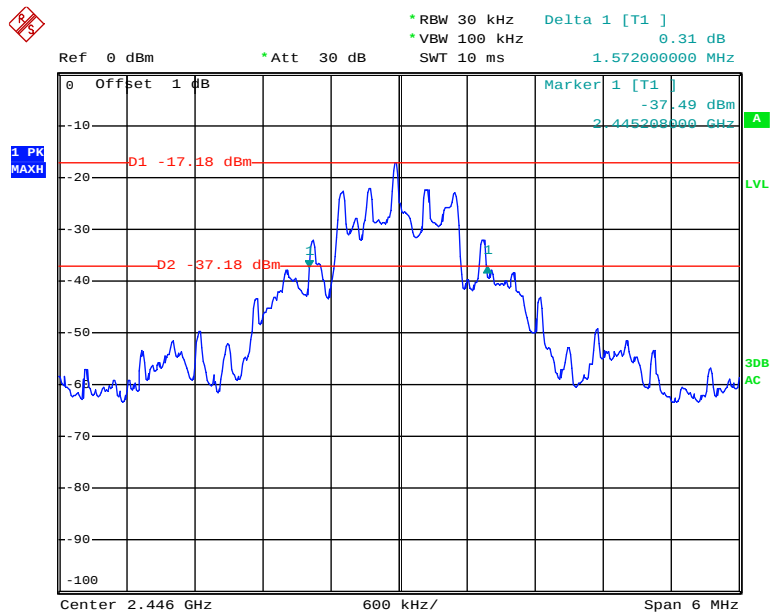

Date: 13.JUN.2017 16:08:01

## High Channel

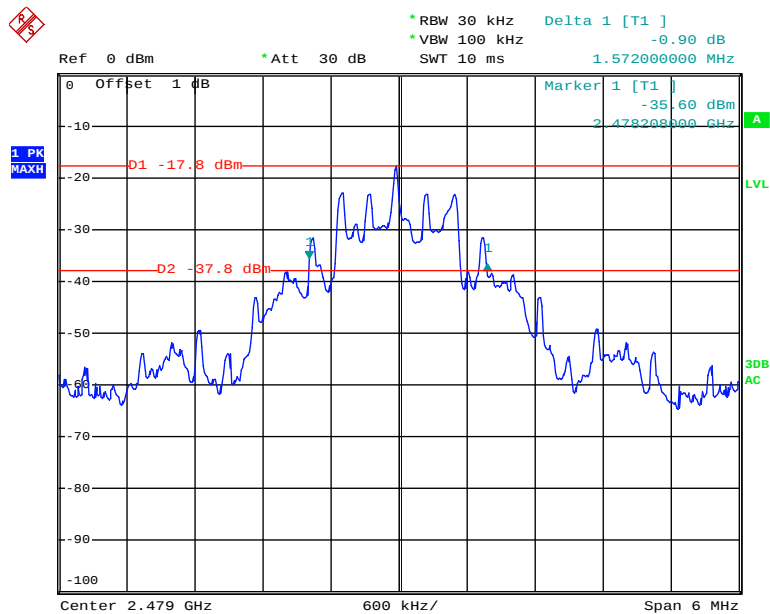

Date: 13.JUN.2017 16:12:10

\*\*\*\*\* END OF REPORT \*\*\*\*\*