

FCC PART 15.407

TEST REPORT

For

Shenzhen Rapoo Technology Co., Ltd.

22, Jinxiu Road East, Pingshan District, Shenzhen, China

FCC ID: PP207005

Report Type: Original Report	Product Type: Wireless Home Entertainment Headphone seat
Test Engineer:	Allen Qiao
Report Number:	R2DG140311006-00A
Report Date:	2014-11-10
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	8
APPLICABLE STANDARD	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) –UNWANTED EMISSION.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.407(b) (1) –BAND EDGE	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	27
FCC §15.407(a) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	29

APPLICABLE STANDARD	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST PROCEDURE	29
TEST DATA	29
FCC §15.407(a) (1) (ii) (4) –MAXIMUM CONDUCTED OUTPUT POWER.....	32
APPLICABLE STANDARD	32
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.407(a) - POWER SPECTRAL DENSITY	36
APPLICABLE STANDARD	36
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Rapoo Technology Co., Ltd.*'s product, model number: 07005 (FCC ID: PP207005) or ("EUT") in this report is a *Wireless Home Entertainment Headphone seat*, which was measured approximately: 18.5 cm (L) x 11.2 cm (W) x 9.7 cm (H), rated input voltage: DC 5.0V from adapter.

Adapter information:

Model:F08L-050150SPACP

Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5.0V, 1.5A

All measurement and test data in this report was gathered from production sample serial number: 140311006 (Assigned by BACL, Dongguan). The EUT was received on 2014-03-12.

Objective

This type approval report is prepared on behalf of *Shenzhen Rapoo Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

N/A.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5150~5250 MHz band, 4 channels are provided to test:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel 36, 40 and 48 were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The software “UTF-8 TeraTerm Pro” was used for testing, and the commands were provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

Test Mode	Test Software Version	UTF-8 TeraTerm Pro		
OFDM	Test Frequency	5180MHz	5200MHz	5240MHz
	Power Level Setting	0	0	0

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
PHILIPS	DVD	DVP3560K/93	KX1C1108079973
Meizu	smartphone	M040	N/A
Rapoo	Wireless Home Entertainment Headphone	H600	N/A

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Audio Cable	Yes	No	1.5	Audio Port Of Phone	EUT
Power Cable	No	No	1.5	DC Port Of Adapter	EUT
Audio Cable	No	No	1.5	Audio Port Of DVD	EUT

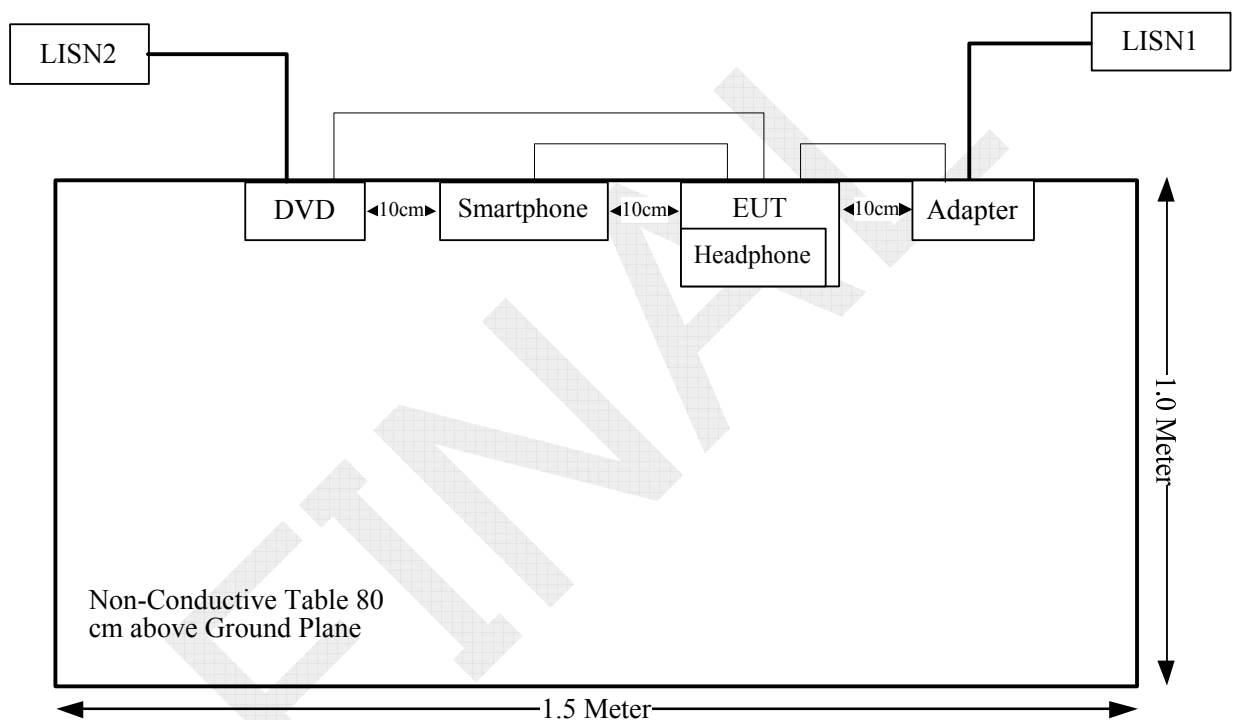Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1),(2),(3),(4)	Out Of Band Emissions	Compliance
§15.407(a) (1)	26 dB Bandwidth	Compliance
§15.407(a)(1),	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(5)	Power Spectral Density	Compliance

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
5180	-4.59	0.35	6.9	4.90	20.00	0.00034	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1), if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an integral printed antennas, and antenna gain is -4.59 dBi. Fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

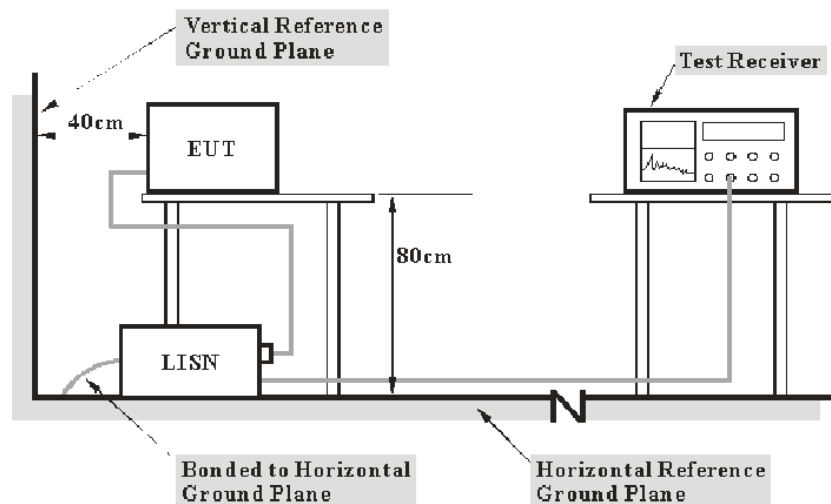

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-16	2015-10-16
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

11.5 dB at 11.910327 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	26.7 °C
Relative Humidity:	46 %
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2014-10-23.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

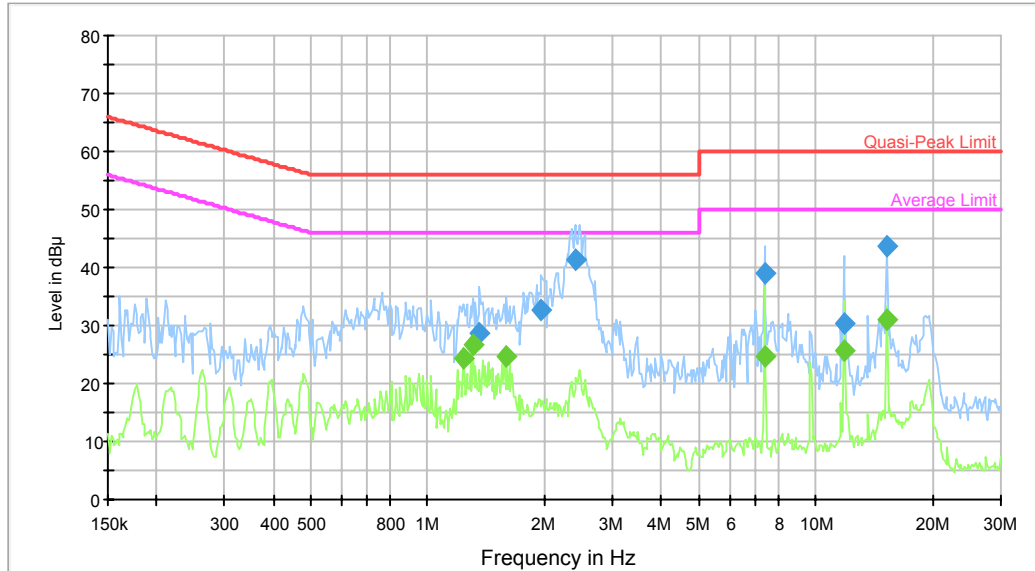

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
1.363512	28.7	9.000	L1	10.4	27.3	56.0	Compliance
1.967177	32.6	9.000	L1	10.4	23.4	56.0	Compliance
2.400804	41.2	9.000	L1	10.5	14.8	56.0	Compliance
7.384001	39.0	9.000	L1	10.7	21.0	60.0	Compliance
11.815800	30.2	9.000	L1	10.6	29.8	60.0	Compliance
15.247554	43.6	9.000	L1	10.6	16.4	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
1.239175	24.4	9.000	L1	10.4	21.6	46.0	Compliance
1.310256	26.5	9.000	L1	10.4	19.5	46.0	Compliance
1.599078	24.5	9.000	L1	10.4	21.5	46.0	Compliance
7.384001	24.6	9.000	L1	10.7	25.4	50.0	Compliance
11.815800	25.6	9.000	L1	10.6	24.4	50.0	Compliance
15.247554	31.0	9.000	L1	10.6	19.0	50.0	Compliance

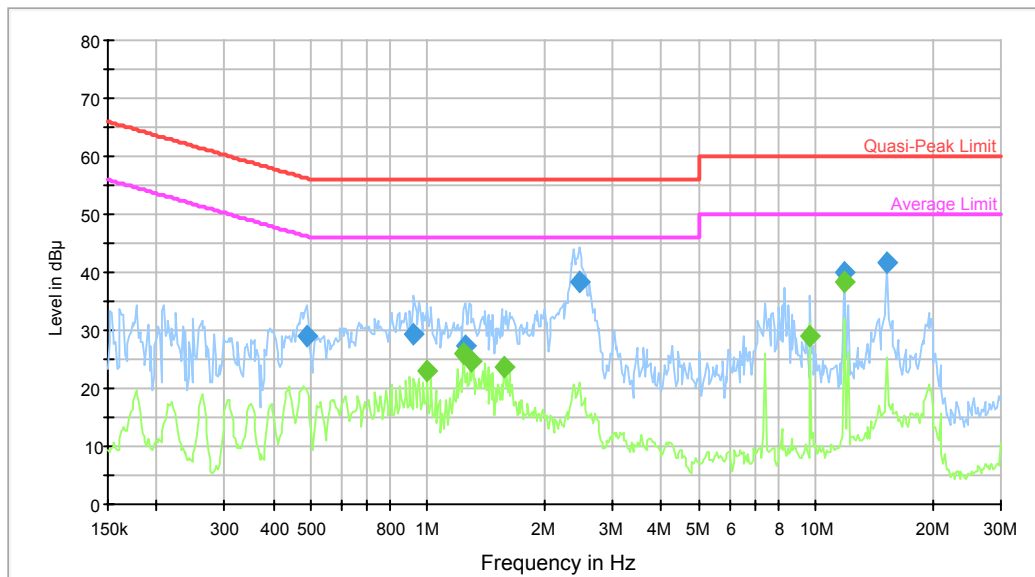AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.487810	29.0	9.000	N	10.4	27.2	56.2	Compliance
0.922769	29.4	9.000	N	10.5	26.6	56.0	Compliance
1.249088	27.2	9.000	N	10.5	28.8	56.0	Compliance
2.458886	38.5	9.000	N	10.5	17.5	56.0	Compliance
11.910327	40.0	9.000	N	10.6	20.0	60.0	Compliance
15.247554	41.5	9.000	N	10.6	18.5	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.999305	23.0	9.000	N	10.5	23.0	46.0	Compliance
1.239175	26.0	9.000	N	10.5	20.0	46.0	Compliance
1.289541	24.8	9.000	N	10.5	21.2	46.0	Compliance
1.573796	23.8	9.000	N	10.5	22.2	46.0	Compliance
9.681660	28.9	9.000	N	10.6	21.1	50.0	Compliance
11.910327	38.5	9.000	N	10.6	11.5	50.0	Compliance

FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) –UNWANTED EMISSION**Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisprr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisprr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisprr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisprr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of $U_{\text{cisp}}r$


Measurement	$U_{\text{cisp}}r$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

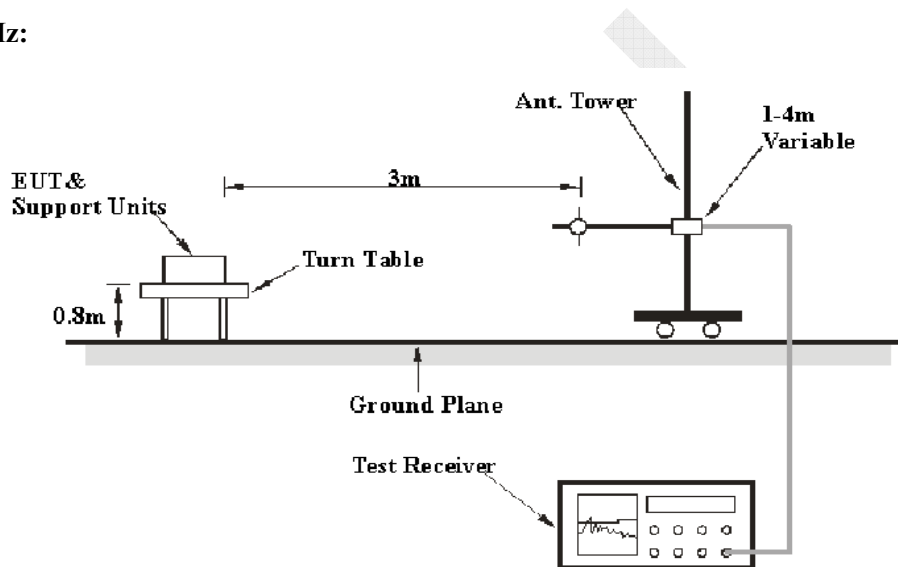

Above 1 GHz:

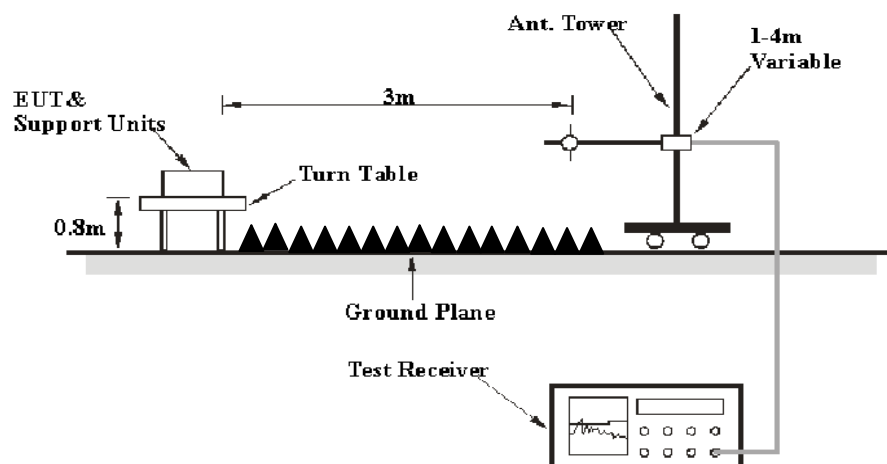

The radiated emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter connected to a 120 VAC/60 Hz power source,

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407, with the worst margin reading of:

3.55 dB at 10360 MHz in the Vertical polarization

Test Data**Environmental Conditions**

Temperature:	27.2 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Allen Qiao on 2014-11-04.

Mode: Transmitting

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
Frequency:5180MHz									
5180	85.39	PK	H	31.46	5.40	27.13	95.12	N/A	N/A
5180	65.45	AV	H	31.46	5.40	27.13	75.18	N/A	N/A
5180	91.32	PK	V	31.46	5.40	27.13	101.05	N/A	N/A
5180	70.56	AV	V	31.46	5.40	27.13	80.29	N/A	N/A
5150	53.98	PK	V	31.40	5.26	27.18	63.46	74.00	10.54
5150	25.12	AV	V	31.40	5.26	27.18	34.60	54.00	19.40
10360	50.64	PK	V	36.97	8.36	25.52	70.45	74.00	3.55 *
10360	29.04	AV	V	36.97	8.36	25.52	48.85	54.00	5.15 *
15540	36.53	PK	V	37.43	14.94	24.98	63.92	74.00	10.08
15540	22.34	AV	V	37.43	14.94	24.98	49.73	54.00	4.27 *
5048.4	48.24	PK	H	31.20	5.28	27.36	57.36	74.00	16.64
5048.4	31.21	AV	H	31.20	5.28	27.36	40.33	54.00	13.67
5442.1	36.02	PK	H	31.98	5.51	26.94	46.57	74.00	27.43
5442.1	22.52	AV	H	31.98	5.51	26.94	33.07	54.00	20.93
282.2	30.9	QP	H	13.77	2.05	21.51	25.21	46.00	20.79
Frequency:5200MHz									
5200	86.28	PK	H	31.50	5.49	27.09	96.18	N/A	N/A
5200	66.35	AV	H	31.50	5.49	27.09	76.25	N/A	N/A
5200	92.01	PK	V	31.50	5.49	27.09	101.91	N/A	N/A
5200	72.12	AV	V	31.50	5.49	27.09	82.02	N/A	N/A
10400	48.57	PK	V	36.98	8.32	25.50	68.37	74.00	5.63
10400	28.35	AV	V	36.98	8.32	25.50	48.15	54.00	5.85
15600	35.04	PK	V	37.32	14.69	24.69	62.36	74.00	11.64
15600	20.18	AV	V	37.32	14.69	24.69	47.50	54.00	6.50
1836.5	35.39	PK	H	24.27	2.94	27.52	35.08	74.00	38.92
1836.5	25.03	AV	H	24.27	2.94	27.52	24.72	54.00	29.28
5048.4	48.33	PK	H	31.20	5.28	27.36	57.45	74.00	16.55
5048.4	31.26	AV	H	31.20	5.28	27.36	40.38	54.00	13.62
5442.1	36.53	PK	H	31.98	5.51	26.94	47.08	74.00	26.92
5442.1	22.68	AV	H	31.98	5.51	26.94	33.23	54.00	20.77
282.2	31.5	QP	H	13.77	2.05	21.51	25.81	46.00	20.19
Frequency:5240MHz									
5240	88.54	PK	H	31.58	5.28	27.07	98.33	N/A	N/A
5240	68.73	AV	H	31.58	5.28	27.07	78.52	N/A	N/A
5240	91.81	PK	V	31.58	5.28	27.07	101.60	N/A	N/A
5240	72.16	AV	V	31.58	5.28	27.07	81.95	N/A	N/A
5350	50.07	PK	V	31.80	5.61	27.02	60.46	74.00	13.54
5350	30.88	AV	V	31.80	5.61	27.02	41.27	54.00	12.73
10480	48.12	PK	V	37.00	8.23	26.01	67.34	74.00	6.66
10480	29.35	AV	V	37.00	8.23	26.01	48.57	54.00	5.43
15720	35.25	PK	V	37.10	14.20	24.92	61.63	74.00	12.37
15720	21.61	AV	V	37.10	14.20	24.92	47.99	54.00	6.01
5048.4	48.06	PK	H	31.20	5.28	27.36	57.18	74.00	16.82
5048.4	31.18	AV	H	31.20	5.28	27.36	40.30	54.00	13.70
5442.1	36.39	PK	H	31.98	5.51	26.94	46.94	74.00	27.06
5442.1	22.81	AV	H	31.98	5.51	26.94	33.36	54.00	20.64
282.2	31.2	QP	H	13.77	2.05	21.51	25.51	46.00	20.49

*Within measurement uncertainty!


Conducted Spurious Emission at Antenna Port

Channel	Conducted Emissions (dBm/MHz)	Ant Gain (dBi)	EIRP Emission (dBm/MHz)	Limits (dBm/MHz)	Result
Low	-34.47	-4.59	-39.06	-27	PASS
Middle	-32.79	-4.59	-37.38	-27	PASS
High	-33.45	-4.59	-38.04	-27	PASS

Note: the antenna gain is -4.59dBi


5150MHz-5250MHz:

Low Channel 30MHz-1GHz

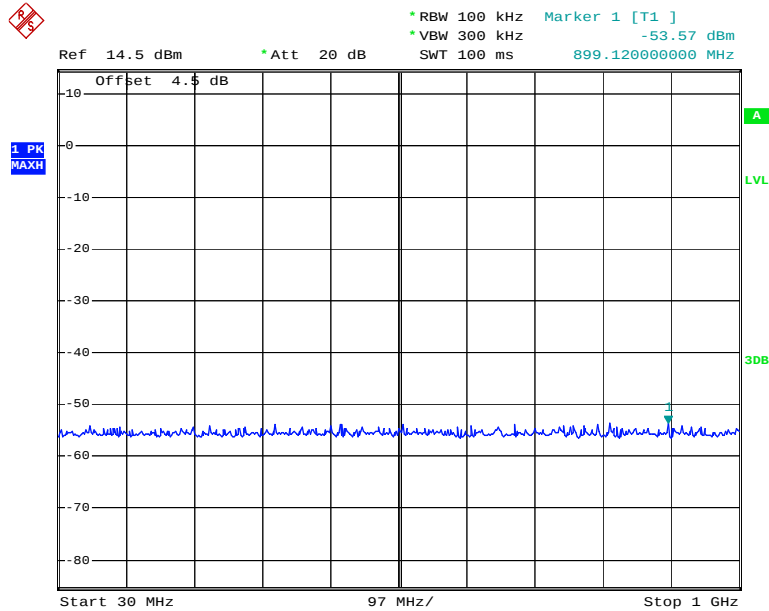


Date: 4.NOV.2014 16:59:12

Low Channel 1GHz-26.5GHz

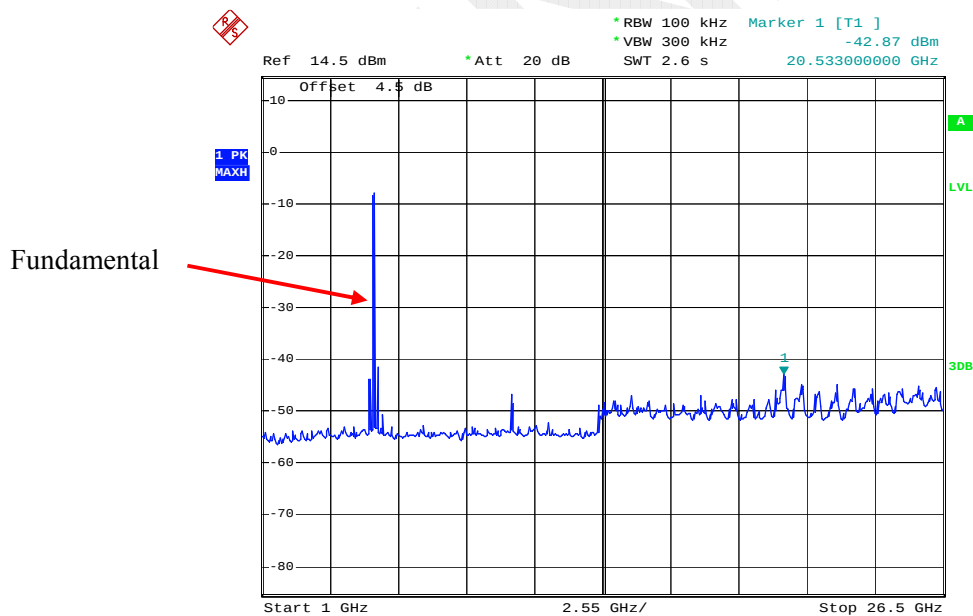


Date: 4.NOV.2014 17:00:41

Low Channel 26.5GHz-40GHz

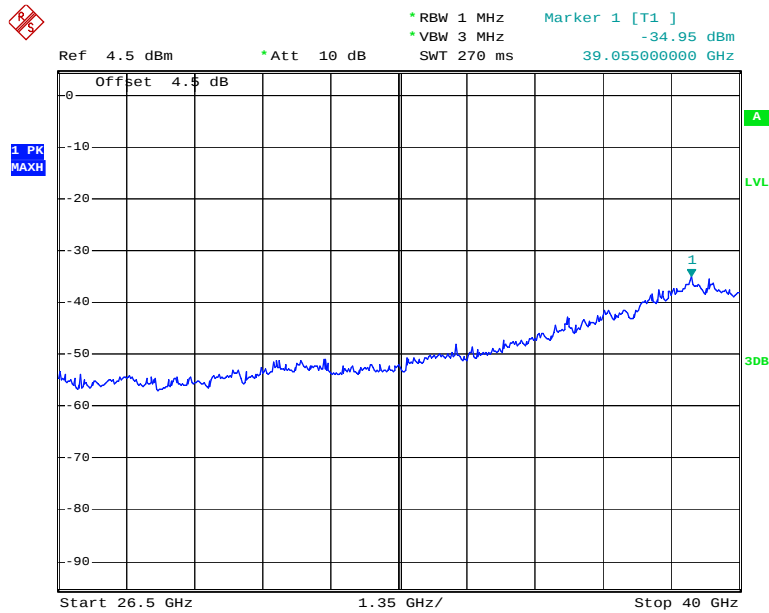


Date: 4.NOV.2014 17:19:40

Middle Channel 30MHz-1GHz

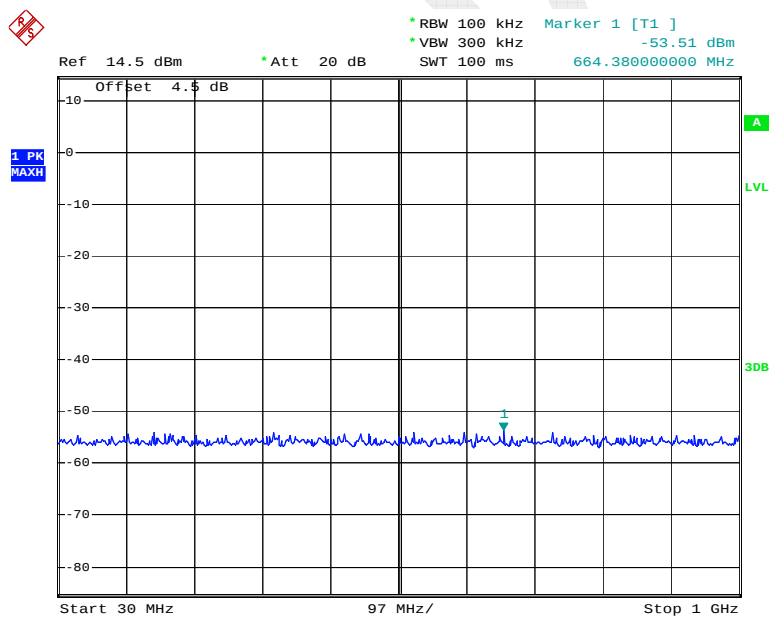


Date: 4.NOV.2014 16:53:22

Middle Channel 1GHz -26.5GHz

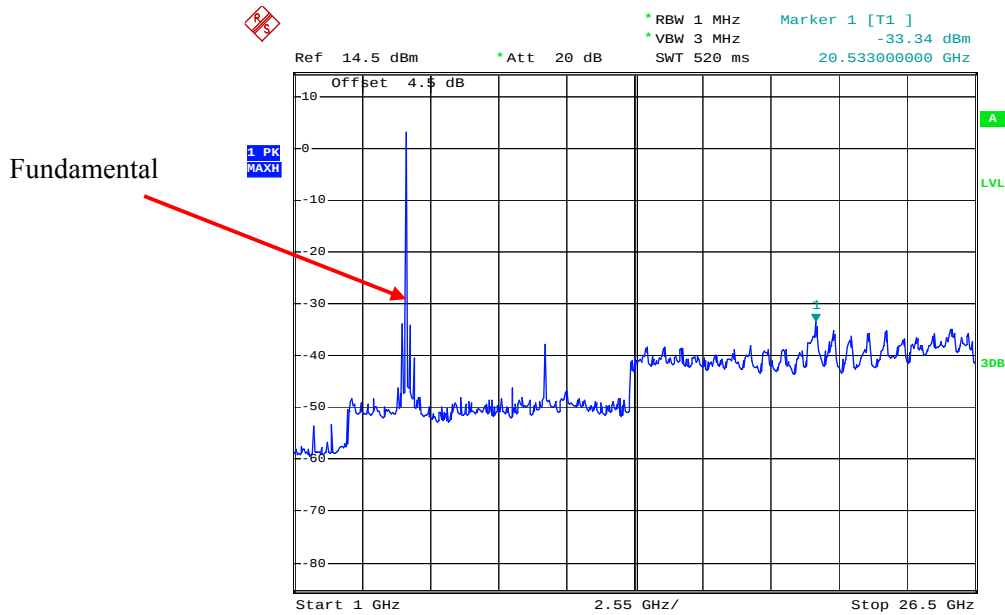


Date: 4.NOV.2014 16:54:55

Middle Channel 26.5GHz-40GHz

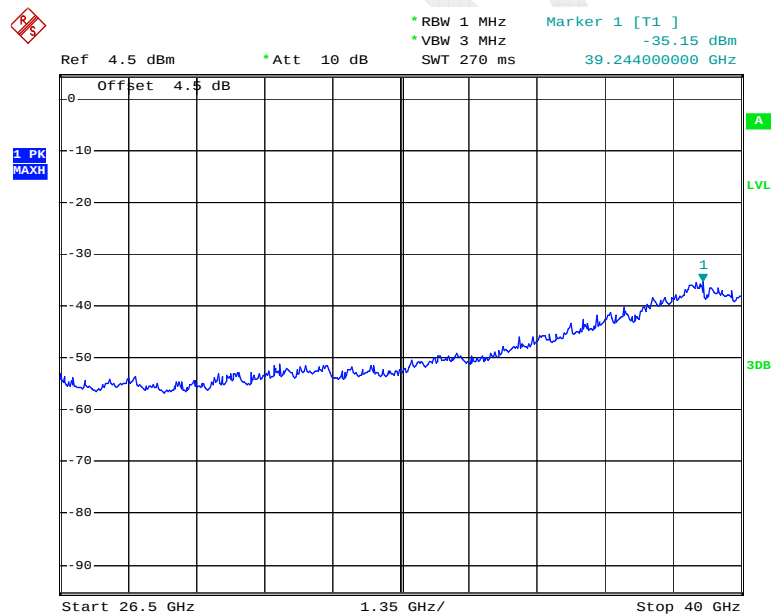


Date: 4.NOV.2014 17:19:24

High Channel 30MHz-1GHz

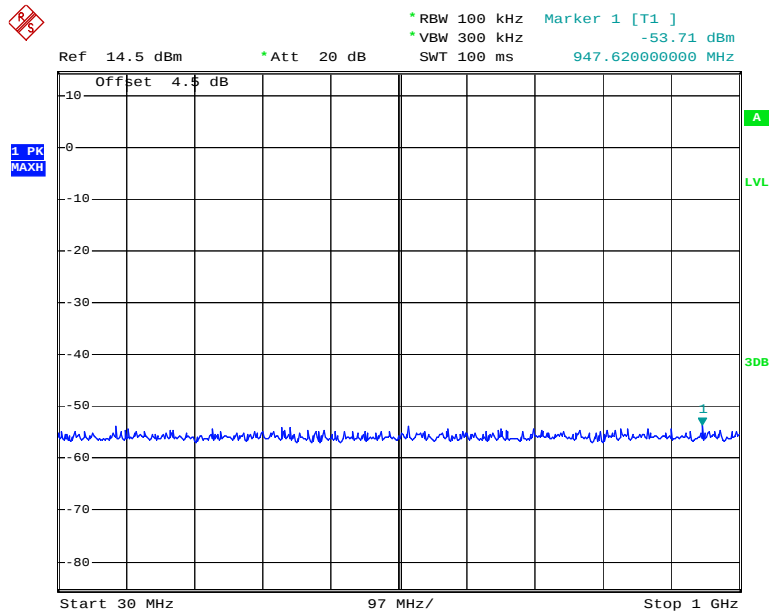


Date: 4.NOV.2014 16:44:57

High Channel 1GHz-26.5GHz

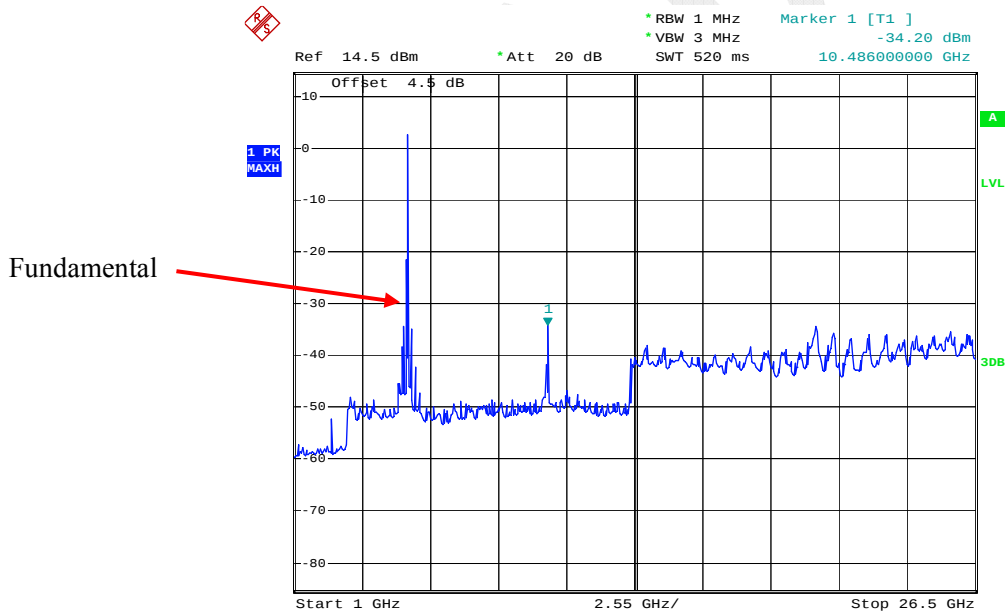

Date: 4.NOV.2014 17:14:47

High Channel 26.5GHz-40GHz

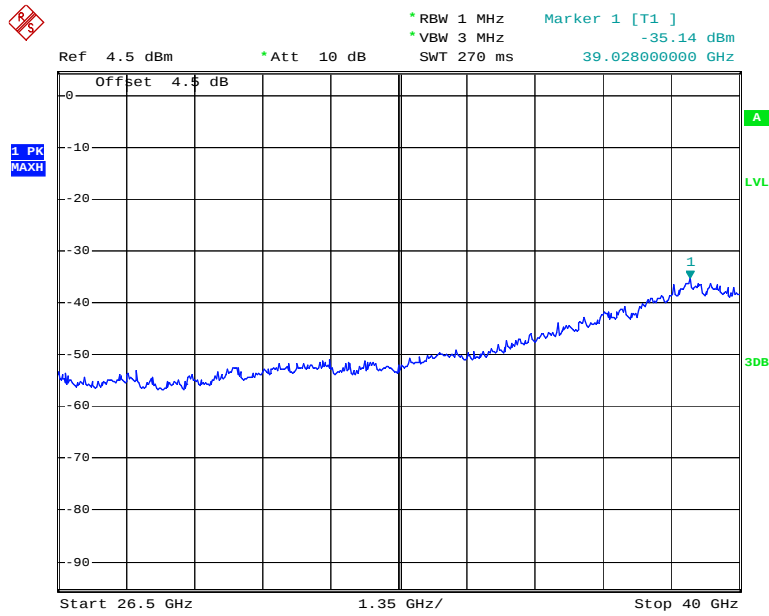

Date: 4.NOV.2014 17:19:07

FCC §15.407(b) (1) –BAND EDGE

Applicable Standard

FCC §15.407 (b) (1), (2), (3), (4);

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.2 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Allen Qiao on 2014-11-04.

Please refer to the following table and plots.


5150MHz-5250MHz:

Channel	Conducted Emissions (dBm/MHz)	Ant Gain (dBi)	EIRP Emission (dBm/MHz)	Limits (dBm/MHz)	Result
Low	-43.22	-4.59	-47.81	-27	PASS
High	-39.83	-4.59	-44.42	-27	PASS

Note: the antenna gain is -4.59dBi


5150MHz-5250MHz:

Band Edge, Left Side

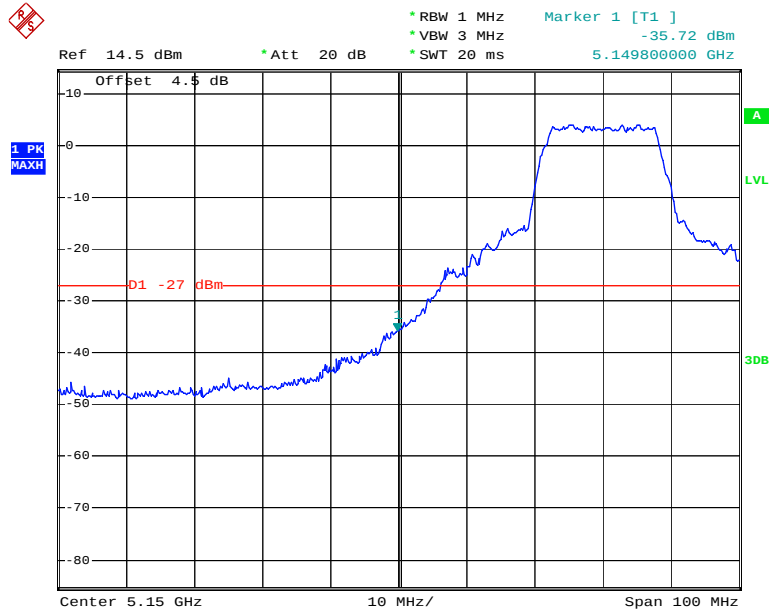

Date: 4.NOV.2014 16:37:42

Band Edge, Right Side

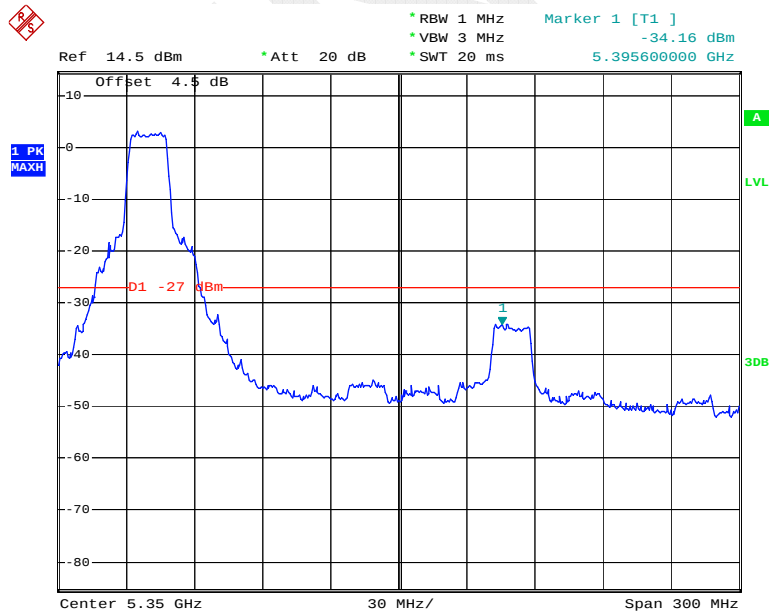

Date: 4.NOV.2014 16:33:56

FCC §15.407(a) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH**Applicable Standard**

15.407(a)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01

Test Data**Environmental Conditions**

Temperature:	27.2 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Allen Qiao on 2014-11-04.

Test Result: Pass.


Please refer to the following tables and plots.

Test mode: Transmitting

5150MHz-5250MHz:


Channel	Frequency MHz	26 dB Bandwidth MHz	99% occupied bandwidth MHz	Result
Low	5180	38.40	20.00	PASS
Middle	5200	38.20	19.70	PASS
High	5240	39.50	21.90	PASS

Low Channel

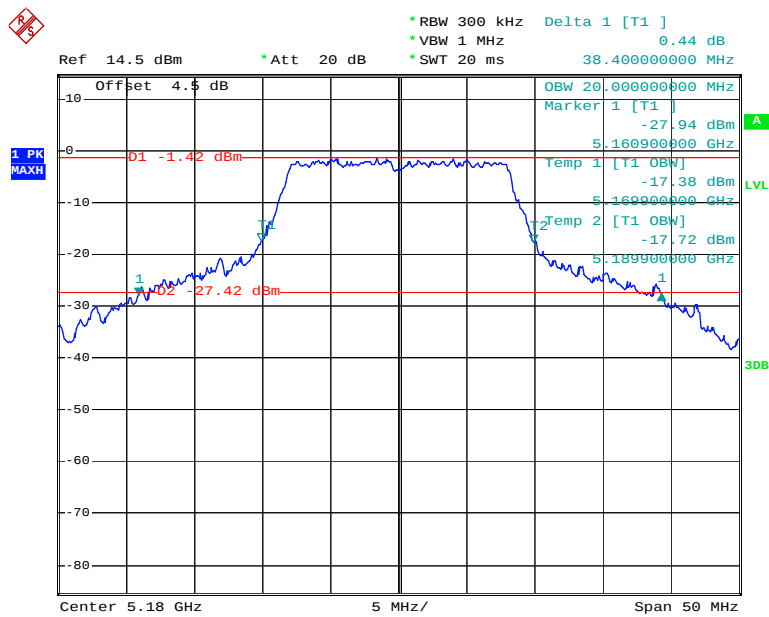


Date: 4.NOV.2014 16:14:57

Middle Channel

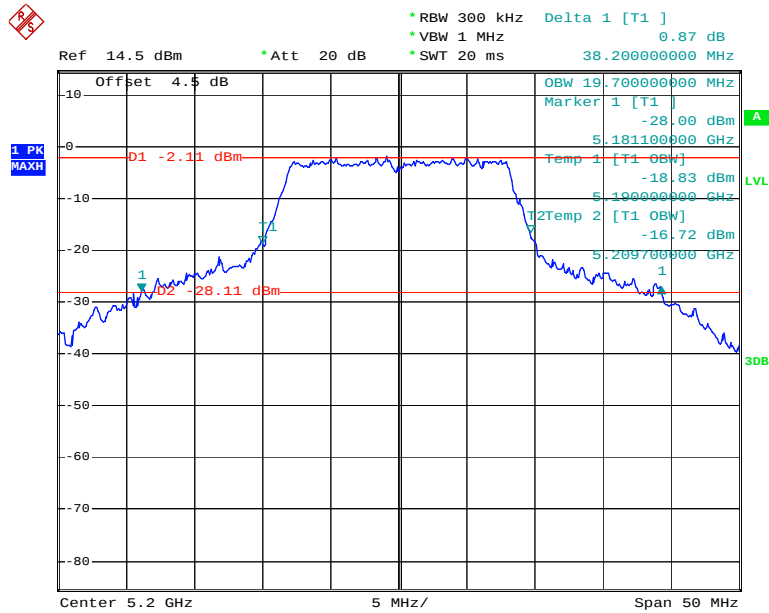

Date: 4.NOV.2014 16:20:56

High Channel

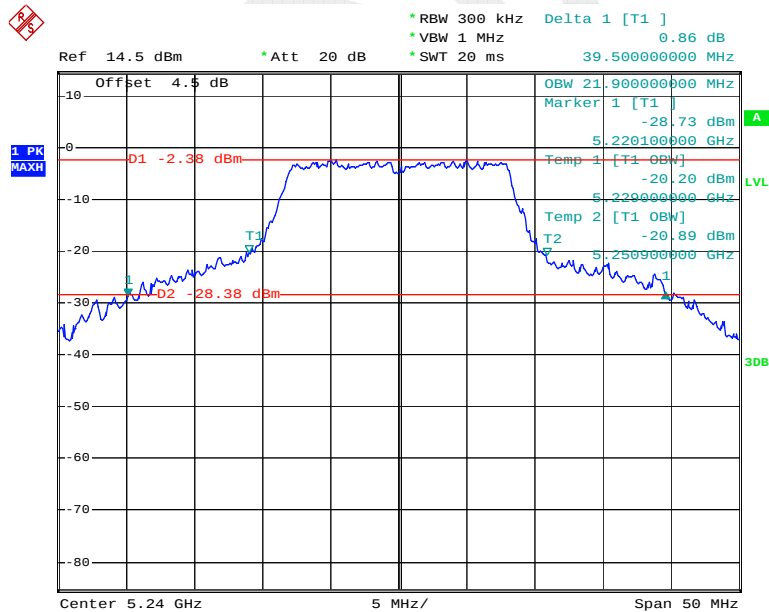

Date: 4.NOV.2014 16:26:53

FCC §15.407(a) (1) (ii) (4) –MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01.

Test Data

Environmental Conditions

Temperature:	27.2 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Allen Qiao on 2014-11-04.


Test Mode: Transmitting

5150MHz-5250MHz:

Channel	Frequency MHz	Conducted Output Power dBm	Limit dBm	Result
Low	5180	6.90	30	PASS
Middle	5200	6.34	30	PASS
High	5240	5.99	30	PASS


Note: The duty cycle is 100%.

RF Output Power, Low Channel

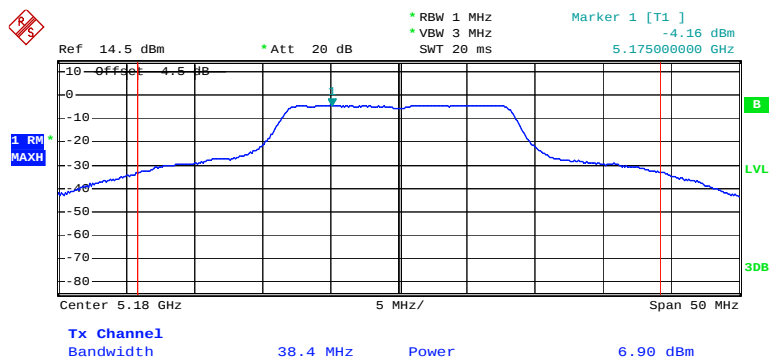


Date: 4.NOV.2014 16:16:46

RF Output Power, Middle Channel

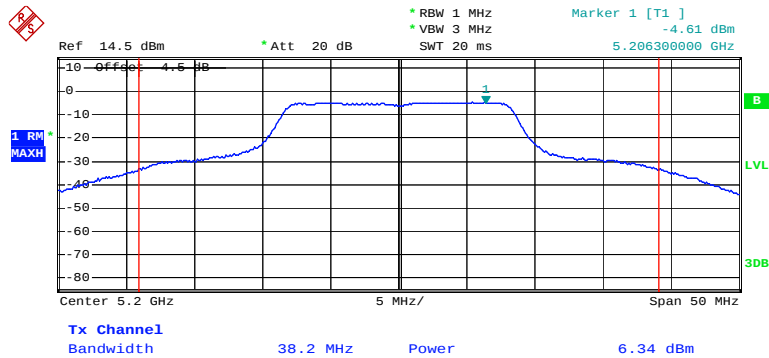

Date: 4.NOV.2014 16:22:04

RF Output Power, High Channel

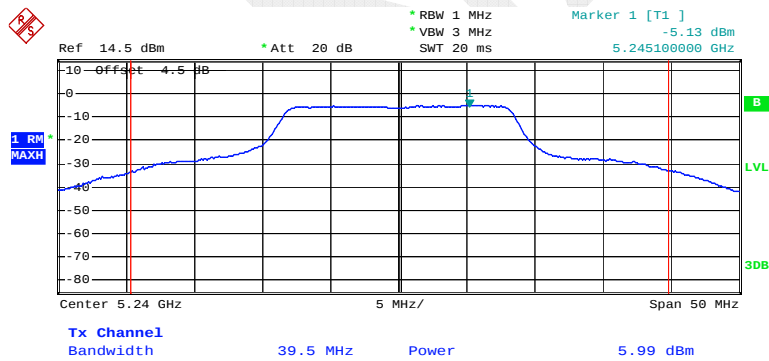

Date: 4.NOV.2014 16:28:14

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.2 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Allen Qiao on 2014-11-04.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plot.

5150MHz-5250MHz:

Channel	Frequency MHz	PSD dBm/MHz	Limit dBm/MHz	Result
Low	5180	-4.24	17	PASS
Middle	5200	-4.29	17	PASS
High	5240	-4.76	17	PASS


Note: the duty cycle is 100%.

Power Spectral Density, Low Channel

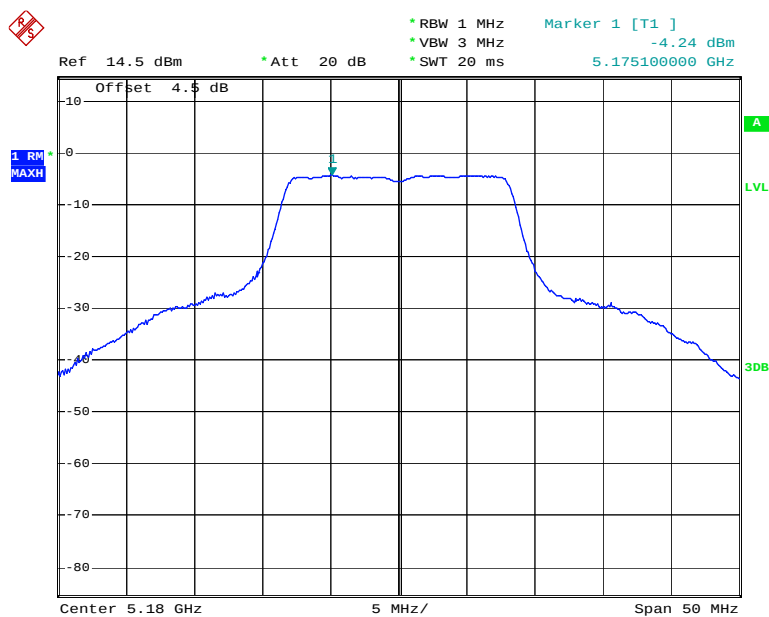


Date: 4.NOV.2014 16:39:58

Power Spectral Density, Middle Channel

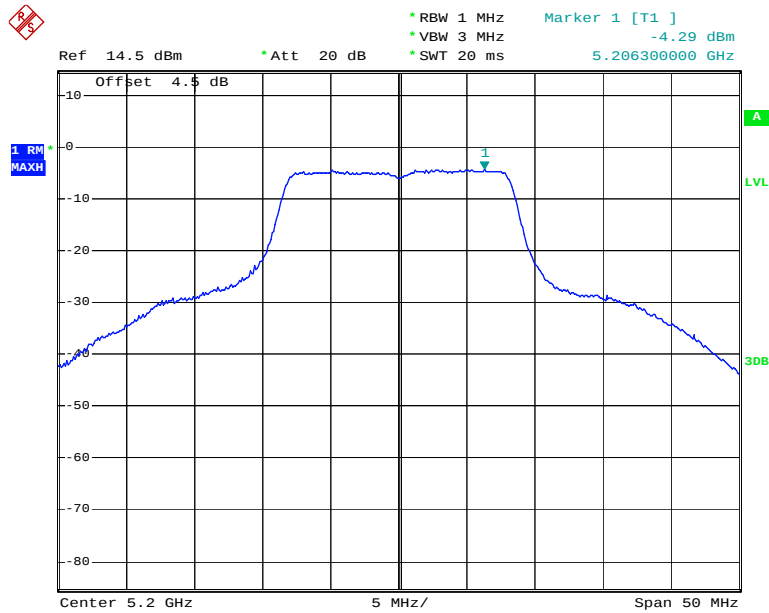

Date: 4.NOV.2014 16:41:31

Power Spectral Density, High Channel

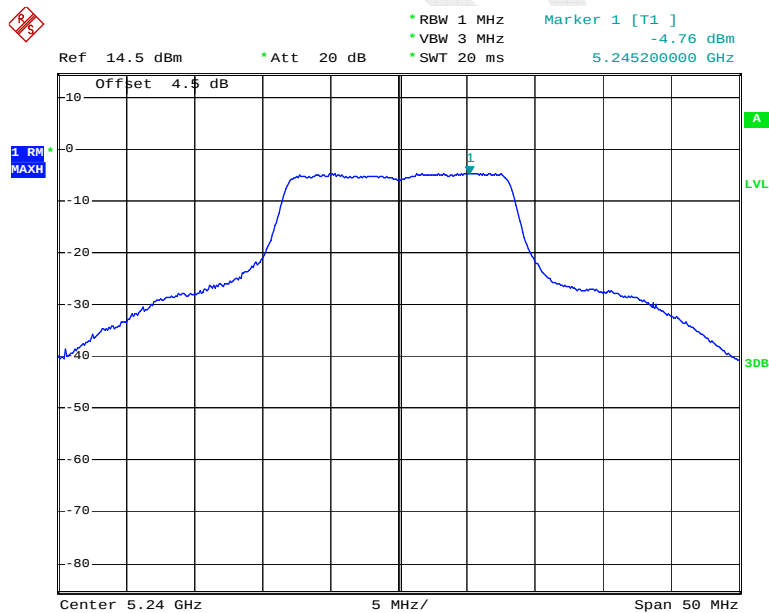

Date: 4.NOV.2014 16:42:52

***** END OF REPORT *****