

ATTACHMENT O – SAR TEST PLOTS

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : in / Channel : 1013(BODY)

Liquid Temperature : 21.4 °C

Date Tested : February 16, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.975 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 1013/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.523 mW/g


CDMA Body 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.0 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

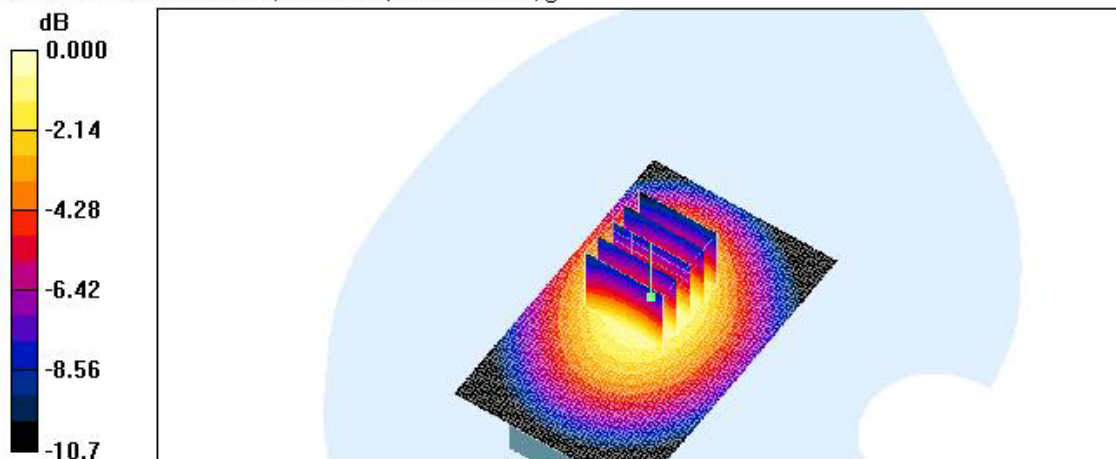

0 dB = 0.528mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : out / Channel : 1013(BODY)

Liquid Temperature : 21.4 °C

Date Tested : February 16, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.975 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 1013/Area Scan (51x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.00 mW/g


CDMA Body 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.5 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.650 mW/g

Maximum value of SAR (measured) = 0.972 mW/g

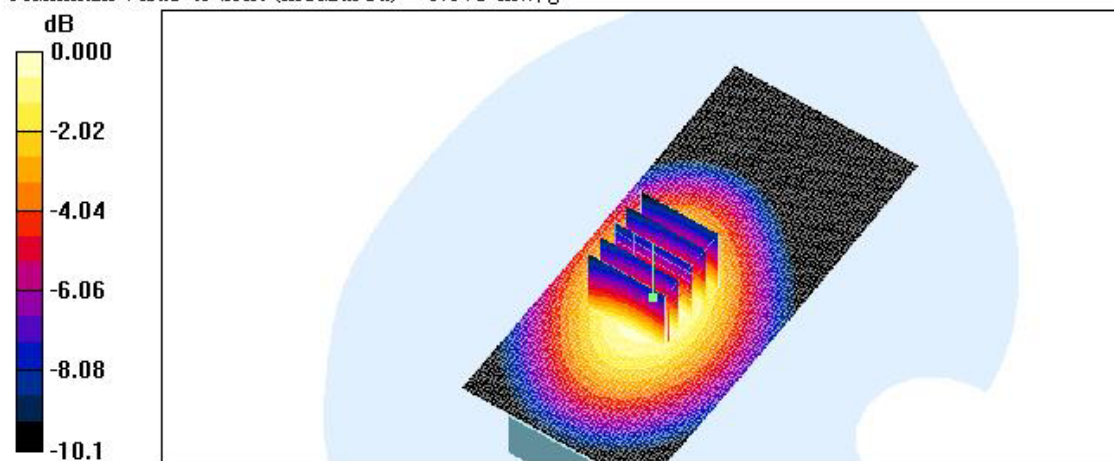

0 dB = 0.972mW/g

Test Laboratory: HCT

Company: PANTECH&CURITEL COMMUNICATIONS, INC.
Mode: CDMA835 / Antenna: in / Channel: 363(BODY)
Liquid Temperature: 21.4 °C
Date Tested: February 16, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89 \text{ MHz}$; $\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.501 mW/g

CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 22.1 V/m; Power Drift = 0.161 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.314 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.483 mW/g

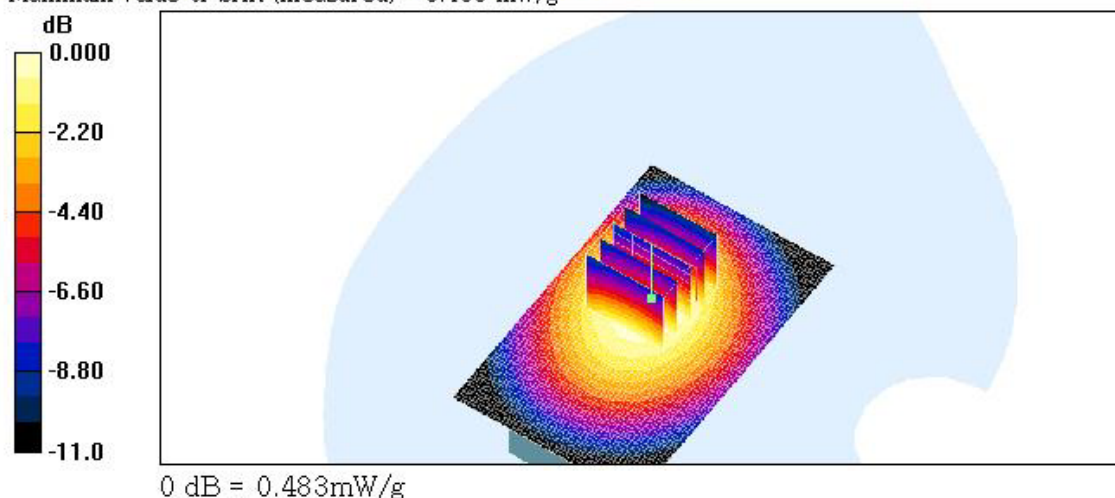

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : out / Channel : 363(BODY)

Liquid Temperature : 21.4 °C

Date Tested : February 16, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.03 mW/g

CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 31.4 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.937 mW/g; SAR(10 g) = 0.652 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.000 mW/g

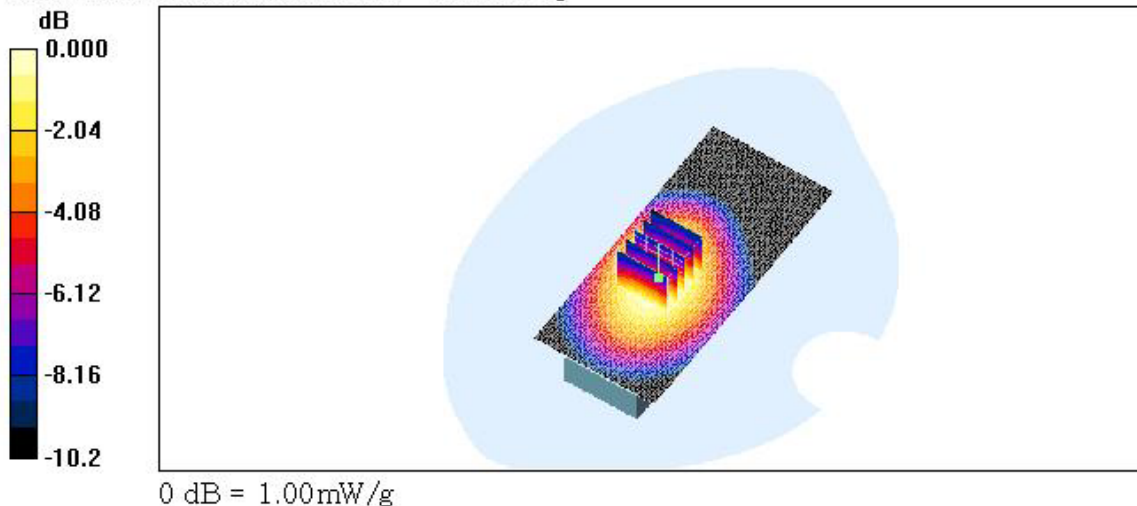

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : in / Channel : 777(BODY)

Liquid Temperature : 21.4 °C

Date Tested : February 16, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 777/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.487 mW/g

CDMA Body 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.7 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.320 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.493 mW/g

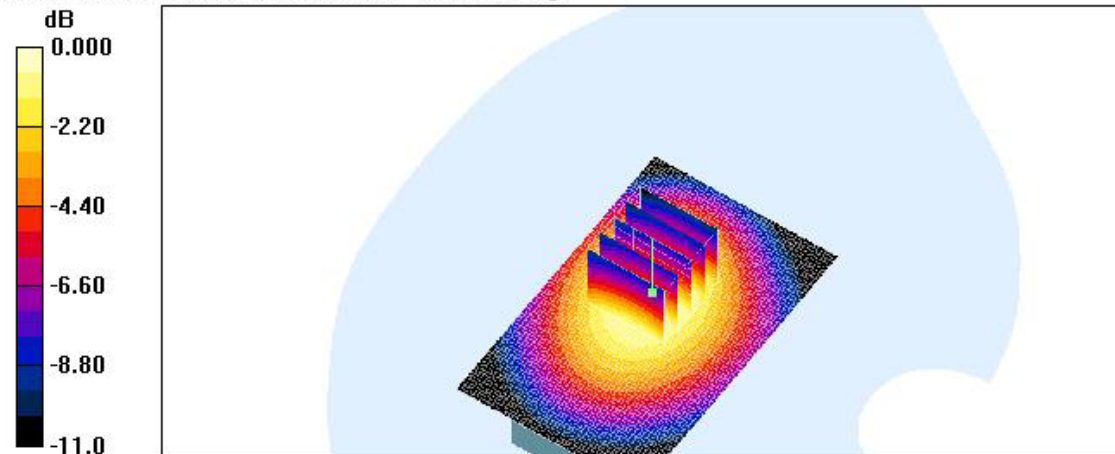

0 dB = 0.493mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : out / Channel : 777(BODY)

Liquid Temperature : 21.4 °C

Date Tested : February 16, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 777/Area Scan (51x111x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.844 mW/g

CDMA Body 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 28.8 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.800 mW/g; SAR(10 g) = 0.553 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.846 mW/g

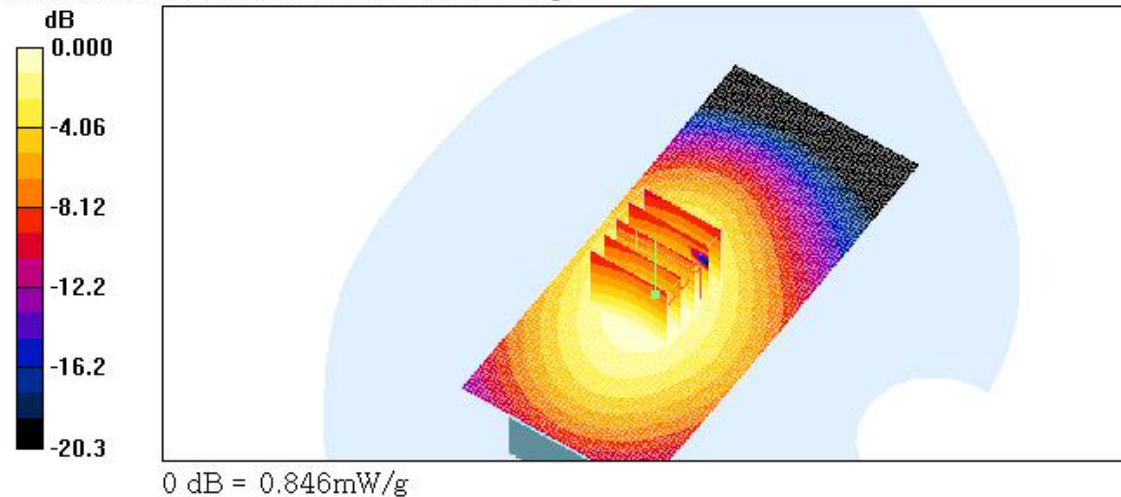

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : in / Channel : 25(BODY)

Liquid Temperature : 21.7 °C

Date Tested : February 17, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 25/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.629 mW/g

PCS Body 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.2 V/m; Power Drift = -0.201 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.350 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.609 mW/g

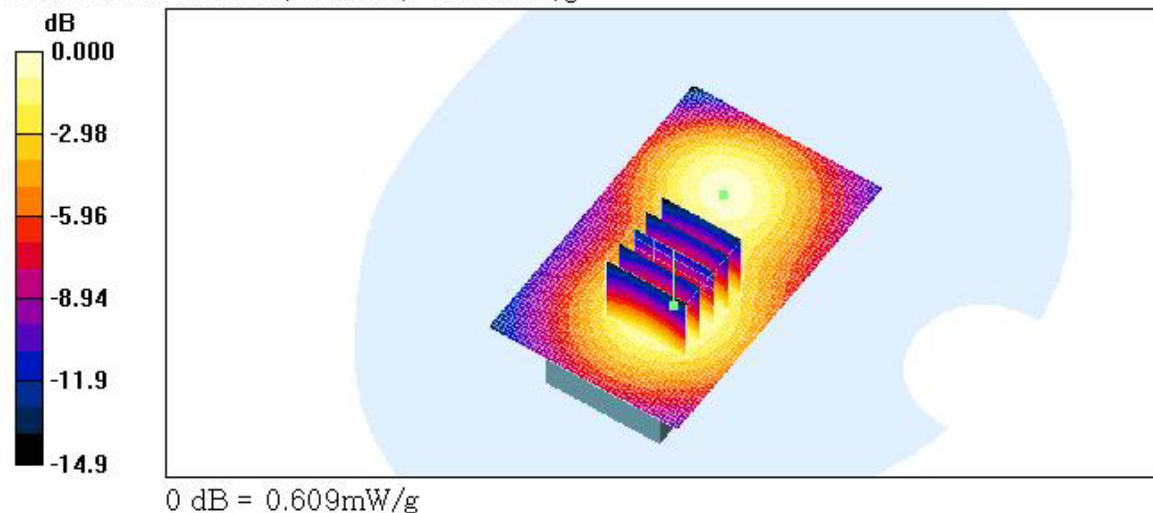

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : out / Channel : 25(BODY)
Liquid Temperature : 21.7 °C
Date Tested : February 17, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 25/Area Scan (51x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.21 mW/g

PCS Body 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 14.6 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.659 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.20 mW/g

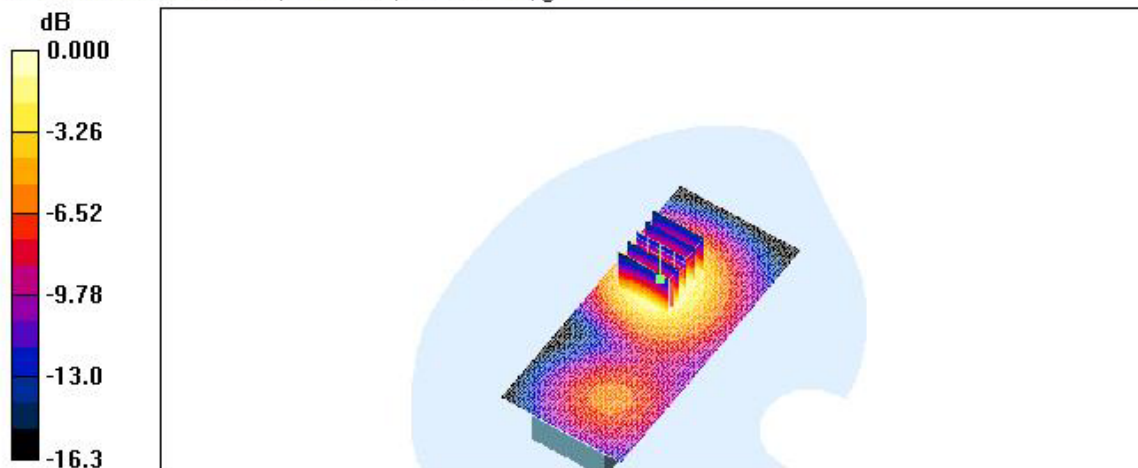

0 dB = 1.20mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : in / Channel : 600(BODY)

Liquid Temperature : 21.7 °C

Date Tested : February 17, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.513 mW/g


PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 18.1 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 0.499 mW/g

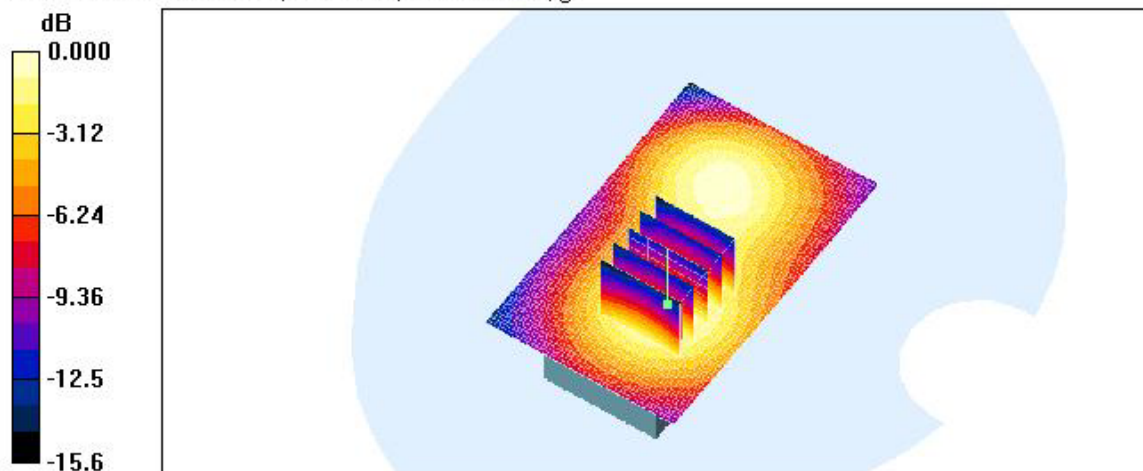

0 dB = 0.499mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : out / Channel : 600(BODY)
Liquid Temperature : 21.7 °C
Date Tested : February 17, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 1.17 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 13.2 V/m; Power Drift = -0.063 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.623 mW/g
Maximum value of SAR (measured) = 1.14 mW/g

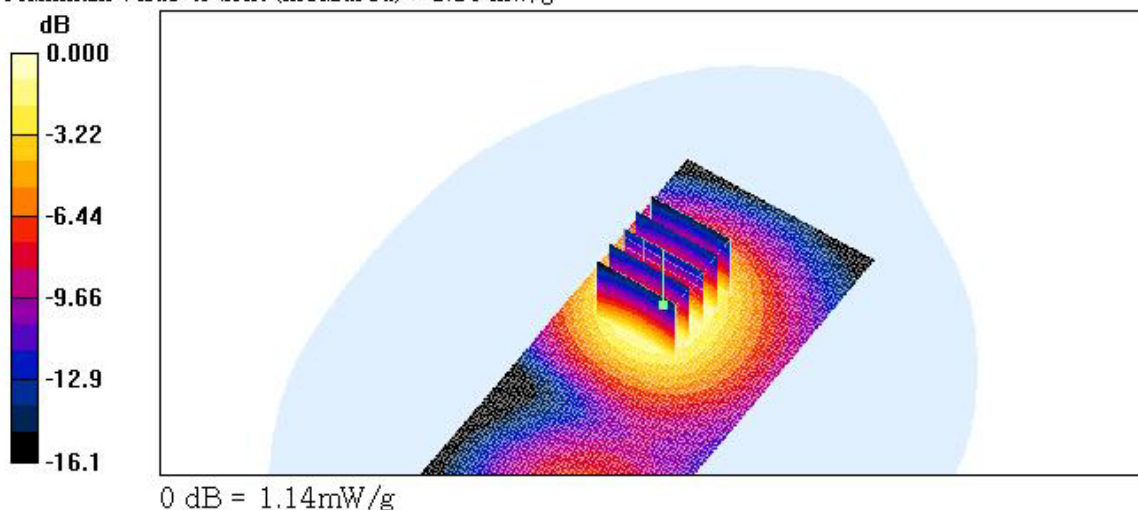

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : in / Channel : 1175(BODY)

Liquid Temperature : 21.7 °C

Date Tested : February 17, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 1175/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.524 mW/g

PCS Body 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 16.6 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.332 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.594 mW/g

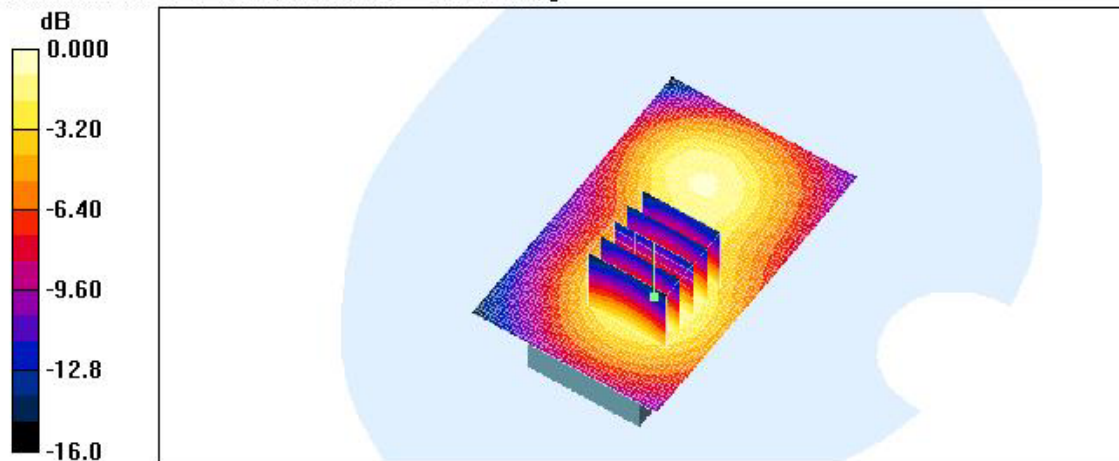

0 dB = 0.594mW/g

Test Laboratory: HCT

Company: PANTECH&CURITEL COMMUNICATIONS, INC.

Mode: PCS1900 / Antenna: out / Channel: 1175(BODY)

Liquid Temperature: 21.7 °C

Date Tested: February 17, 2006

DUT: PN-315-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 1175/Area Scan (51x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.22 mW/g

PCS Body 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.0 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.614 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.15 mW/g

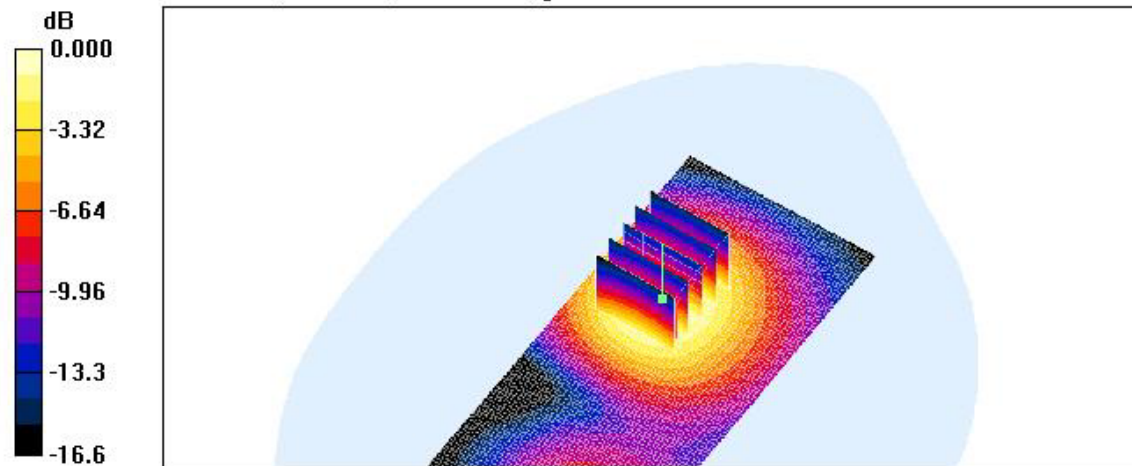

0 dB = 1.15mW/g

DUT: PN-315; Type: Folder; Serial: #1
Program Name: PN-315

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.874 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21


- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Z Scan (1x1x41): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$
Maximum value of SAR (interpolated) = 1.08 mW/g

0.080, -0.038

Interpolated SAR(x,y,z,f0)

SAR, Z Scan: Value Along Z, X=0, Y=0

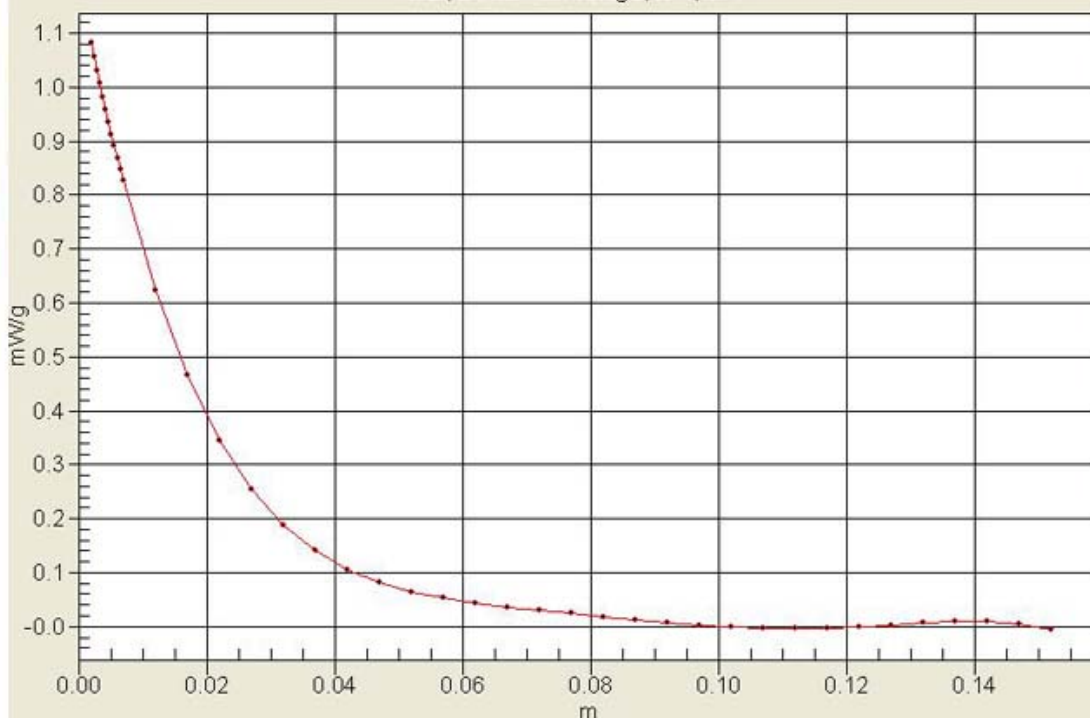

DUT: PN-315; Type: Folder; Serial: #1
Program Name: PN-315

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 25/Z Scan (1x1x41): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.13 mW/g

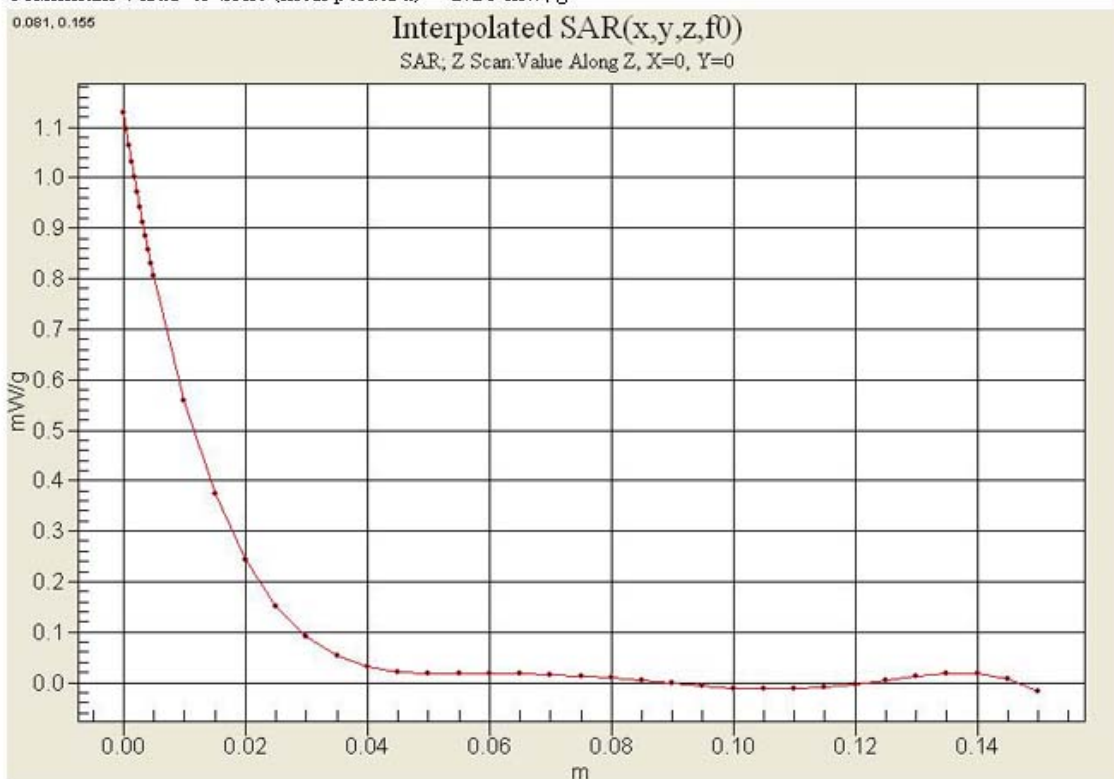

DUT: PN-315-Body; Type: Folder; Serial: #1
Program Name: PN-315

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Z Scan (1x1x41): Measurement grid: $\Delta x = 20$ mm, $\Delta y = 20$ mm, $\Delta z = 5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.866 mW/g

0.050, 0.893

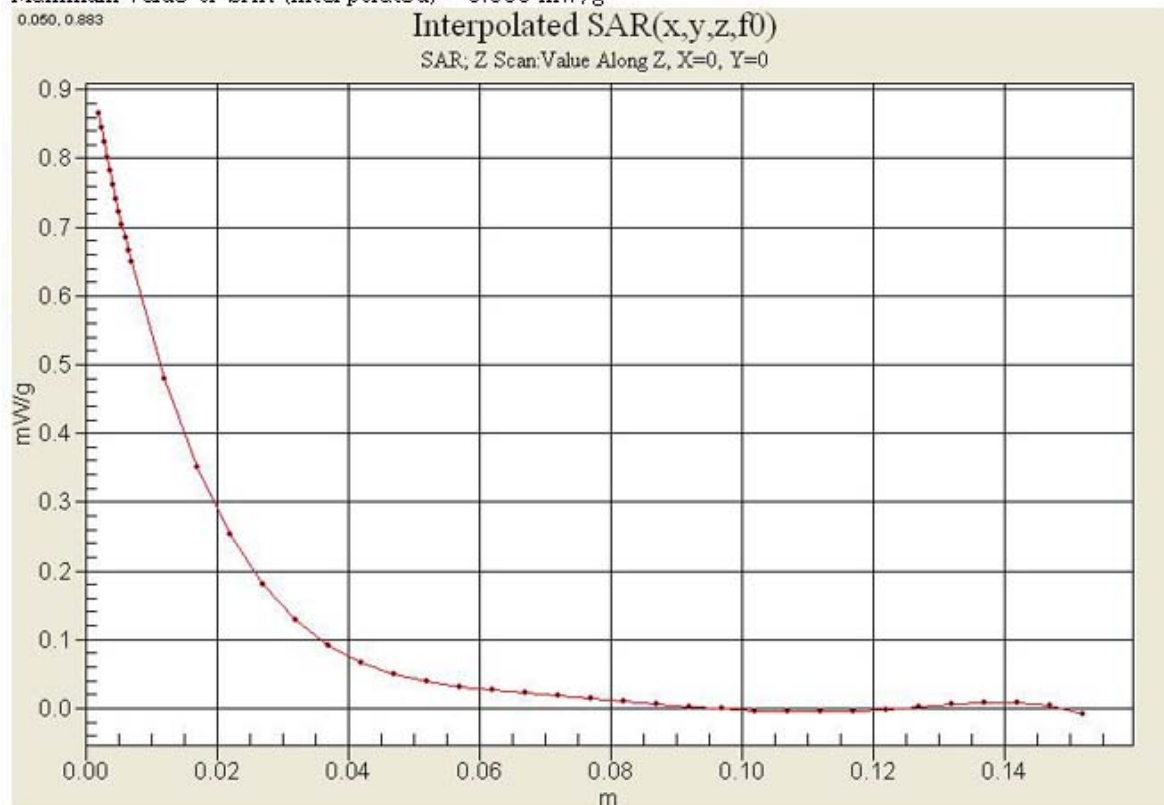

DUT: PN-315-Body; Type: Folder; Serial: #1
Program Name: PN-315

Communication System: PCS1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 25/Z Scan (1x1x41): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.817 mW/g

