

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-9100

Telefax: -9075

RSC11

issue test report consist of 149 Pages

Page 1 (149)

Recognized by the
Federal Communications Commission
FCC–Identification Number: 90462
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR–Registration Number
TTI-P-G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2_3302-01-01/03

FCC Part 24/22/15

RH-50

FCC ID: PPIRH-50

IC: 661U-RH50

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 9075

Table of Contents

1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards

2 Technical test

- 2.1 Summary of test results
- 2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-166/98

Listed by : Federal Communications Commission (FCC)

Identification/Registration No : 90462

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Nokia Corp. / TCC Salo
Street : P.O. Box 86 (Joensuunkatu 7 E)
City : FIN-24101 Salo
Country : Finland
Telephone : +358 (0) 50 3687 123
Telefax : +358 (0) 7180 45220
Contact : Mr. Jarkko Luoma
Telephone : +358 (0) 7180 42913
e-mail : Jarkko.Luoma@nokia.com

1.4 Application details

Date of receipt of application : 2003-06-18
Date of receipt of test item : 2003-07-18
Date of test : 2003-07-21/22/23
re-issue : 2003-09-12

1.5 Test item

Type of equipment : Triple Band GSM Mobile Phone (PCS 850/1800/1900 MHz)
Type designation : RH-50
Manufacturer : Nokia Corporation
Street : Keilalahdentie 4
City : 02150 Espoo
Country : Finland
Serial numbers : IMEI : 004400.22.167319.5; 004400.22.167316.1;
004400.22.167310.4

Additional information:

Frequency : 1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz
Type of modulation : 300KGXW / 300KG7W
Number of channels : 300 (PCS1900) and 125 (PCS850)
Antenna : Integral antenna
Power supply : 3,7V DC Li-ion Battery
Output power GSM 850 : cond.: 32.45 dBm Peak , ERP: 25.50 dBm (Burst);
EIRP: 27.60 dBm (Burst)
Output power GSM 1900 : cond : 29.78 dBm Peak , ERP: 27.57 dBm (Burst);
EIRP: 29.67 dBm (Burst)
Type of equipment : Temperature range : -30°C - +60°C
FCC – ID : PPIRH-50
IC : 661U-RH50
Hardware : 0571
Software : 1.31

1.6 Test standards:

FCC Part 24, 22
FCC Part 15

2 Technical test

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link).

Remarks:

For this test we used two different types of covers, a Normal cover and a so called “active cover” with some active parts inside.

There were no differences in the RF-behavior between the two covers.

We made additional measurements for unwanted radiated emissions according to Part15 and Part24.

For AC-conducted measurements we used an AC charger ACP-8E.

Test setups :

Radiated measurements : Charger ACP-8E, Deskstand DCV-14, Data cable DKU-5 and Mobile (IMEI: 004400.22.167319.5)

Conducted measurements: Mobile (IMEI : 004400.22.167316.1)

EIRP : Mobile (IMEI: 004400.22.167310.4)

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

Technical responsibility for area of testing :

2003-07-23 RSC 8411 Berg M.

Date

Section

Name

Signature

Technical responsibility for area of testing :

2003-07-23 RSC8412 Hausknecht D.

Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no. : 2_3302-01-01/03

TEST REPORT REFERENCE**LIST OF MEASUREMENTS**

PARAMETER TO BE MEASURED	PAGE
<u>Part PCS 1900</u>	
POWER OUTPUT SUBCLAUSE § 24.232	7
FREQUENCY STABILITY SUBCLAUSE § 24.235	9
AFC FREQ ERROR vs. VOLTAGE	10
AFC FREQ ERROR vs. TEMPERATURE	10
EMISSIONS LIMITS §24.238	12
CONDUCTED SPURIOUS EMISSIONS	27
BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F	36
OCCUPIED BANDWIDTH §2.989	48
CONDUCTED EMISSIONS § 15.107/207	55
<u>PART PCS 850</u>	
POWER OUTPUT SUBCLAUSE § 22.913	59
FREQUENCY STABILITY SUBCLAUSE § 22.355	61
AFC FREQ ERROR vs. VOLTAGE	62
AFC FREQ ERROR vs. TEMPERATURE	62
EMISSIONS LIMITS §22.917	64
CONDUCTED SPURIOUS EMISSIONS	79
OCCUPIED BANDWIDTH §2.989	96
EMISSION LIMITATIONS FOR CELLULAR §22.917(F)	103
ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT PART 15.109	111
CONDUCTED EMISSIONS § 15.107/207	128
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	129
Test site	131
Photographs of the equipment	134

POWER OUTPUT**SUBCLAUSE § 24.232****Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	29.78	29.68
1880.0	0	29.07	28.97
1909.8	0	29.31	29.21
Measurement uncertainty		±0.5 dB	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $P_{in} + 2.1 - P_r$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1 \text{ dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements (Radiated)

Normal Cover

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	29.37	27.27	23.37	21.27
1851.4	0	29.67	27.57	23.67	21.57
1880.0	0	29.37	27.27	23.37	21.27
1908.6	0	29.53	27.43	23.53	21.43
1909.8	0	29.53	27.43	23.53	21.43
Measurement uncertainty		$\pm 3 \text{ dB}$			

Active Cover

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	29.46	27.36	23.46	21.36
1851.4	0	29.67	27.57	23.67	21.57
1880.0	0	29.21	27.11	23.21	21.11
1908.6	0	29.55	27.45	23.55	21.45
1909.8	0	29.59	27.49	23.59	21.49
Measurement uncertainty		$\pm 3 \text{ dB}$			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

FREQUENCY STABILITY**SUBCLAUSE § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.6 V dc.



AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	48	0,00000255	0,0255
3.4	40	0,00000213	0,0213
3.5	59	0,00000314	0,0314
3.6	49	0,00000261	0,0261
3.7	43	0,00000229	0,0229
3.8	52	0,00000277	0,0277
3.9	36	0,00000191	0,0191
4.0	50	0,00000266	0,0266
4.1	35	0,00000186	0,0186
4.2	48	0,00000255	0,0255
4.3	45	0,00000239	0,0239
4.4	48	0,00000255	0,0255

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	75	0,00000399	0,0399
-20	43	0,00000229	0,0229
-10	36	0,00000191	0,0191
±0.0	55	0,00000293	0,0293
+10	48	0,00000255	0,0255
+20	43	0,00000229	0,0229
+30	42	0,00000223	0,0223
+40	55	0,00000293	0,0293
+50	60	0,00000319	0,0319
+60	53	0,00000282	0,0282

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

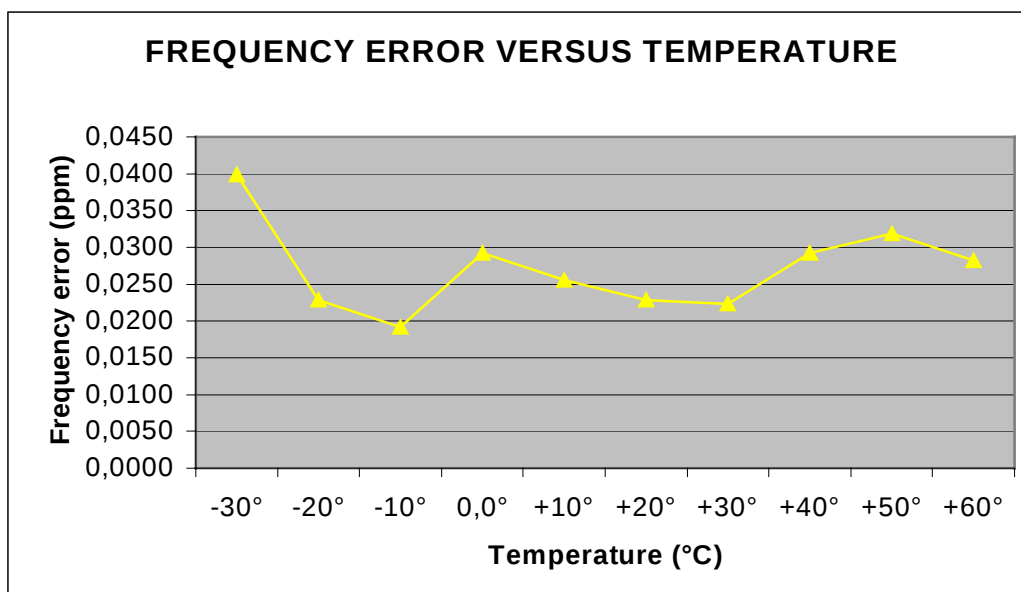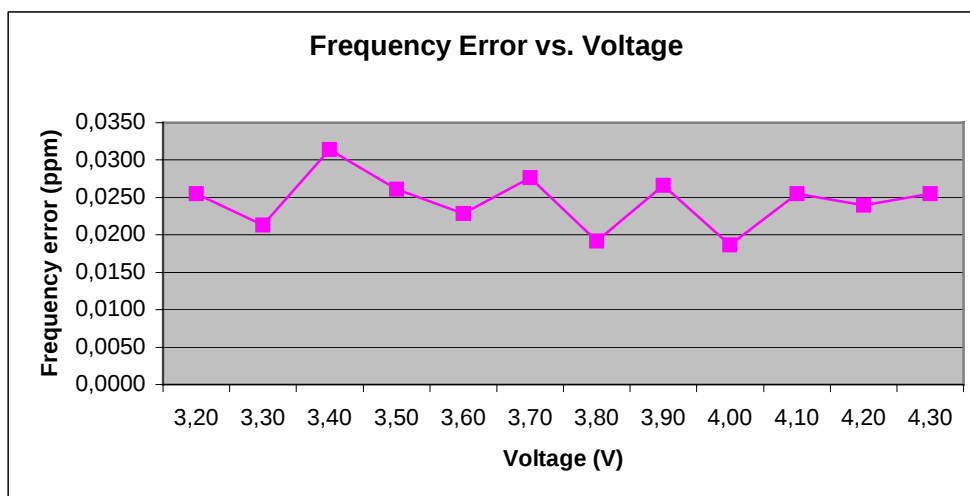

EMISSIONS LIMITS**§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots show the worst case.

As can be seen from this data, the emissions from the test item were within the specification limit.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission EIRP (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		29.46	-13.0 (42.46 dBc)		carrier
no traceable signal found					complies
CH 661					
1880.0		29.37	-13.0 (42.37 dBc)		carrier
5640.0		-52.2		81.57	complies
CH 810					
1909.8		29.59	-13.0 (42.59 dBc)		carrier
5729.4		-46.5		76.09	complies
Measurement uncertainty		± 0.5dB			

Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result			
MHz	dBμV	dBm	dB	dBd	dB	dBm			
1880.0	126.7	24.30	8.4	0.0	3.33	29.37			


$$\text{EIRP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 4 GHz)

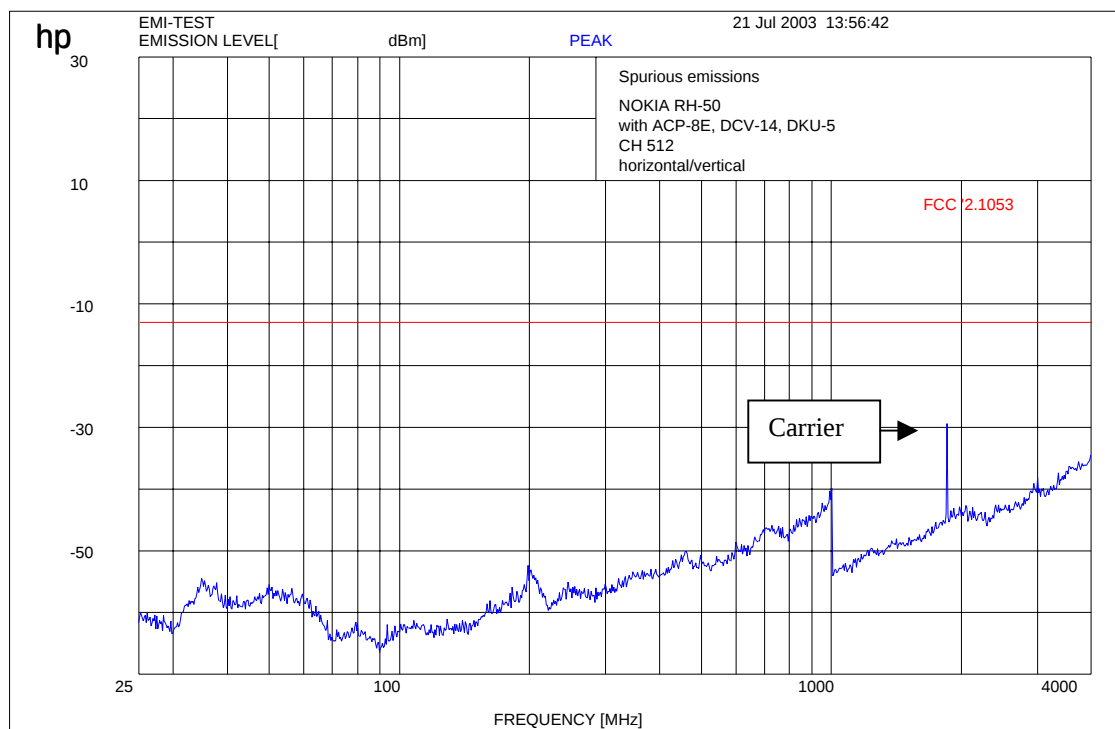

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 12 GHz)

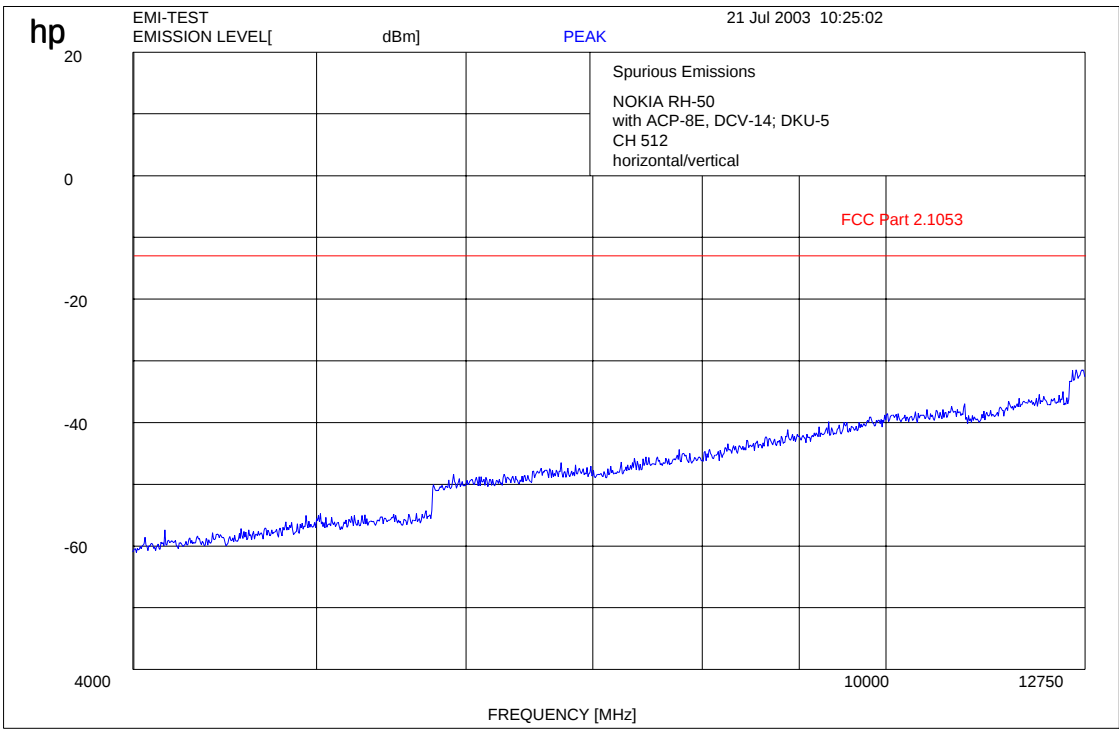

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


17 – 24; 64

Channel 512 :- 25 GHz



Ref Lvl
30 dBm

RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 74 ms Unit dBm

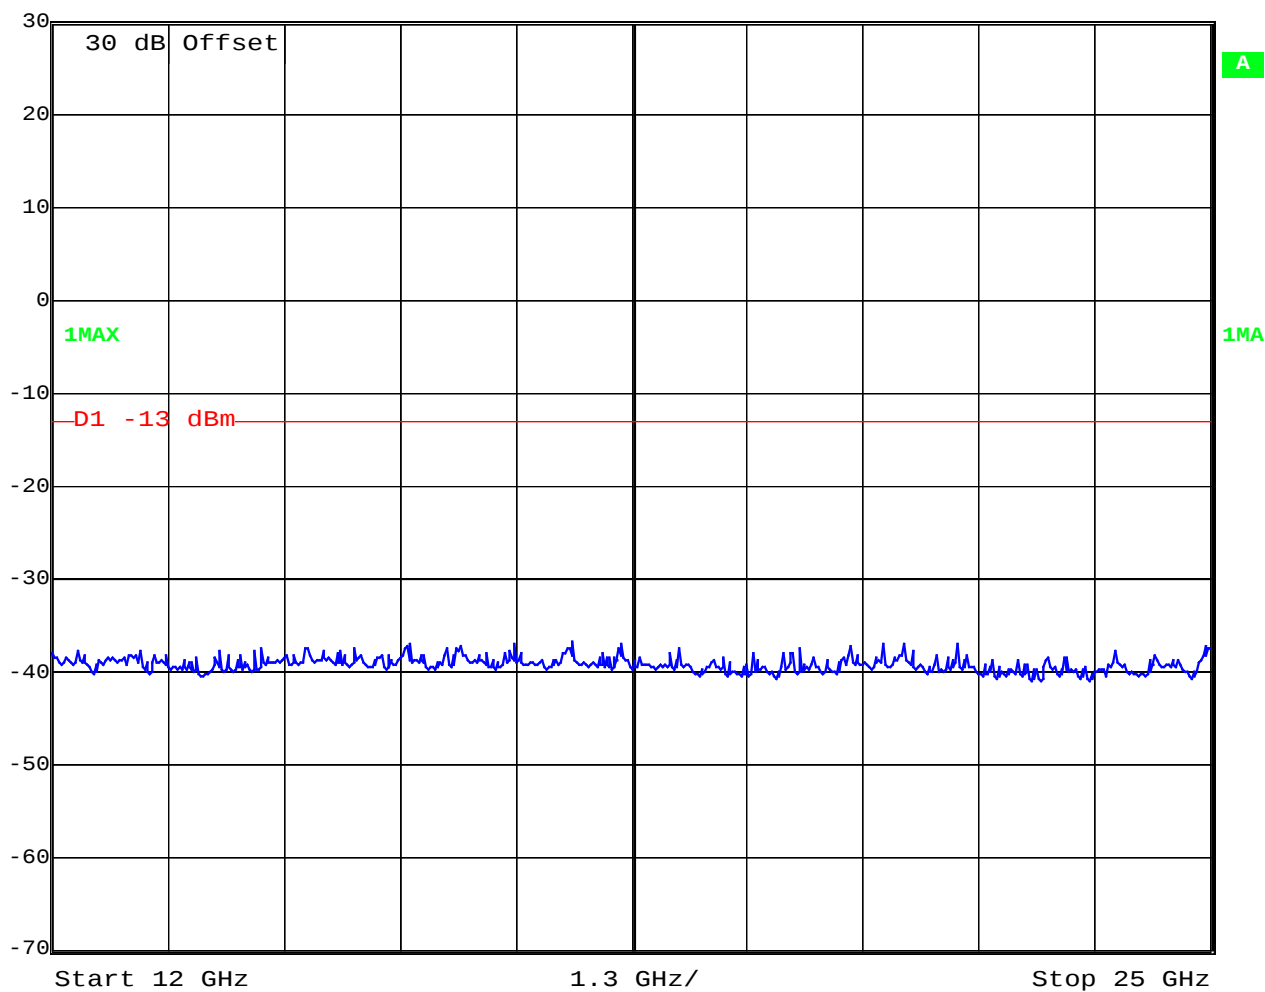


Date: 22. JUL. 2003 07:13:49

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 4 GHz)

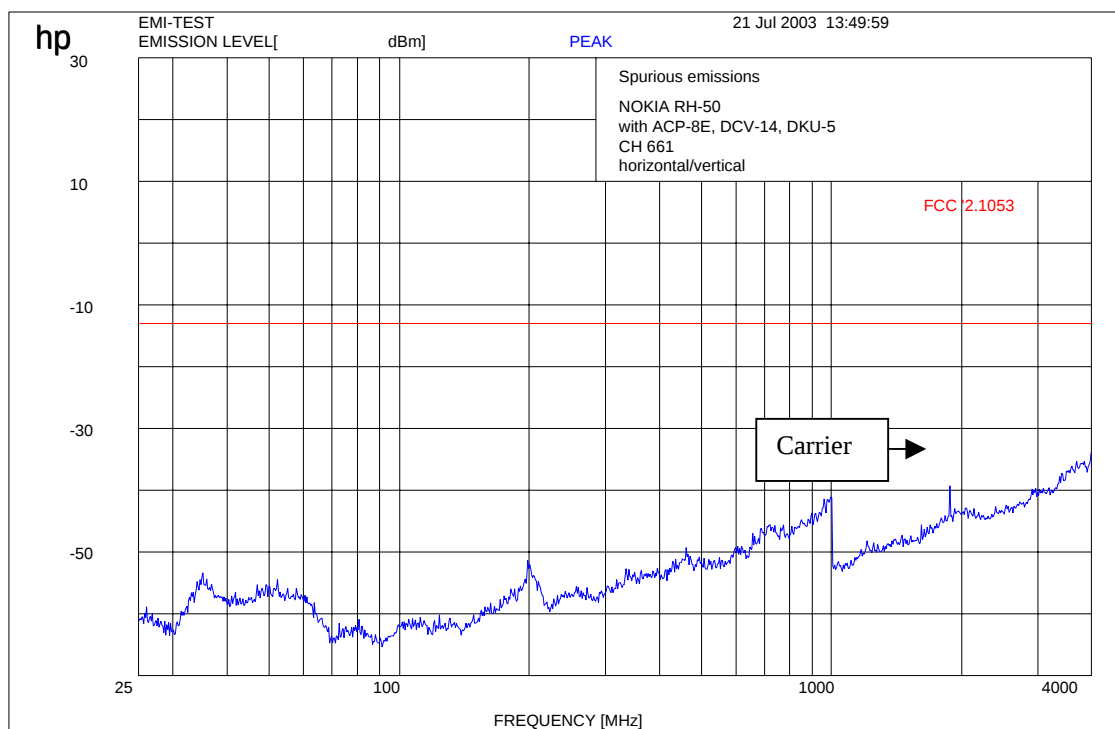

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


Channel 661 (up to 12 GHz)

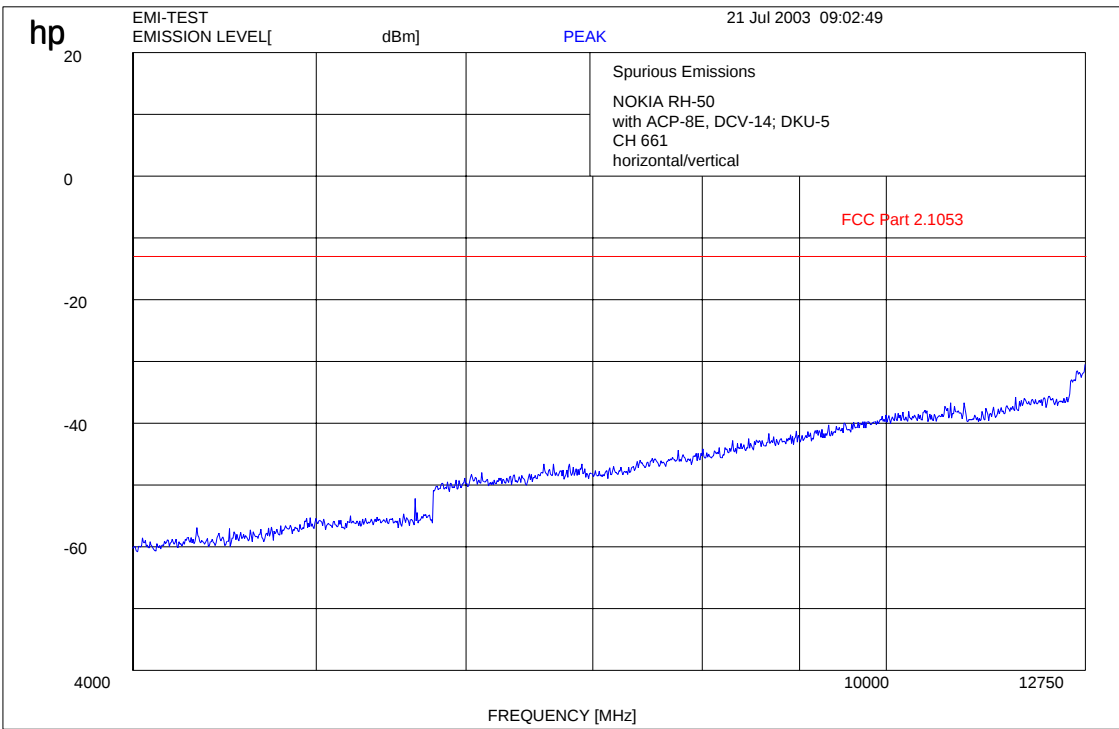

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Channel 661 : -25 GHz

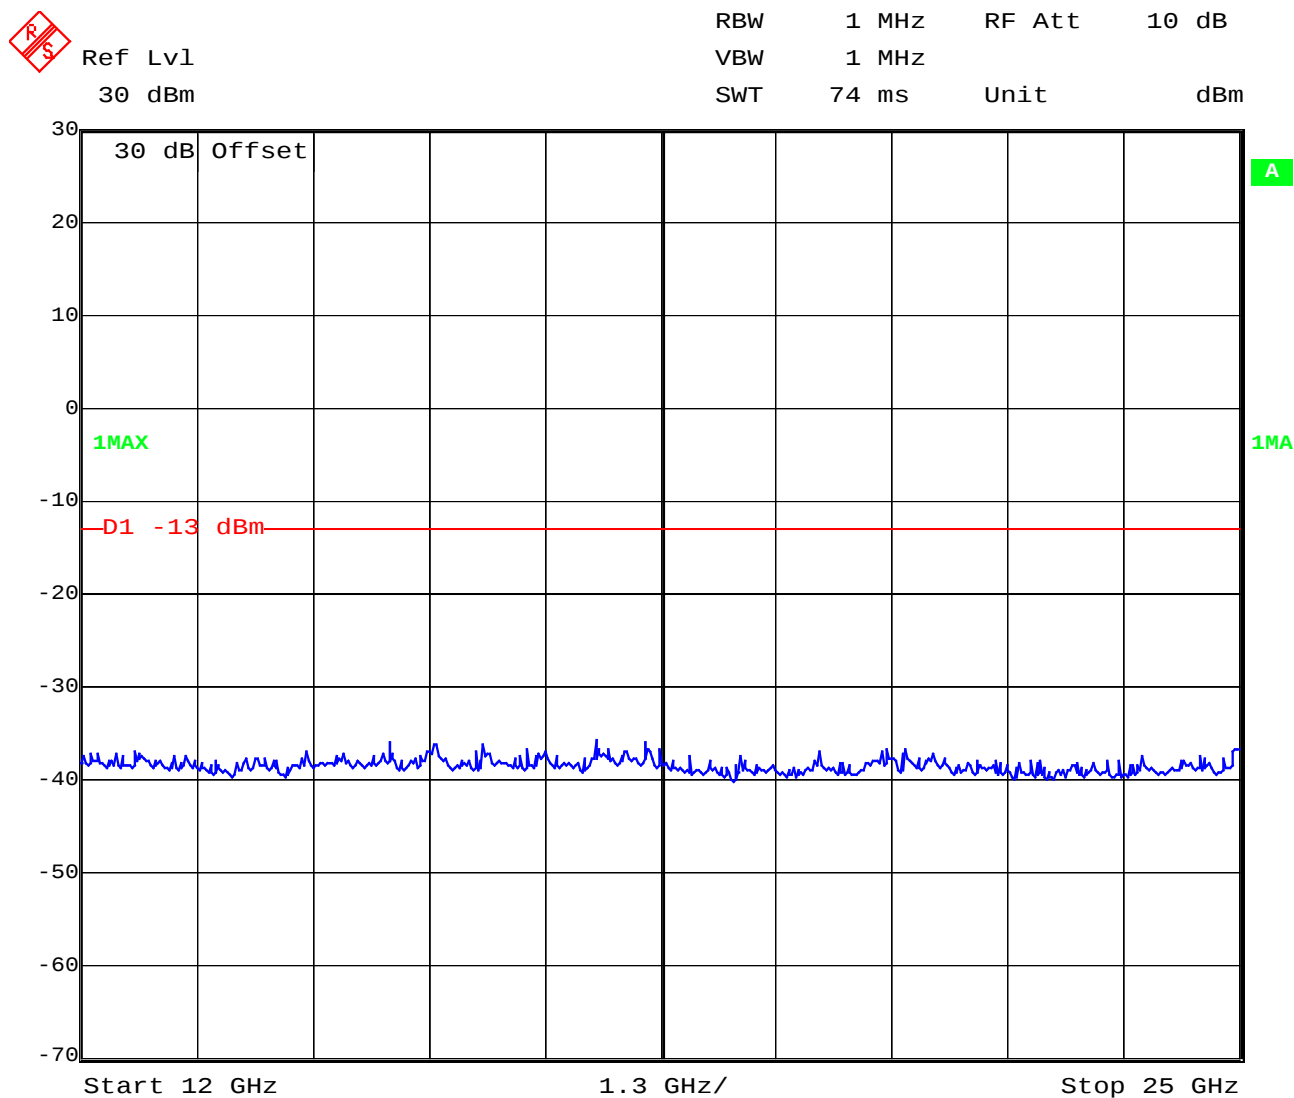

Date: 22. JUL. 2003 07:13:29


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64

Channel 661 with Active and Normal Cover (up to 4 GHz)

Active Cover

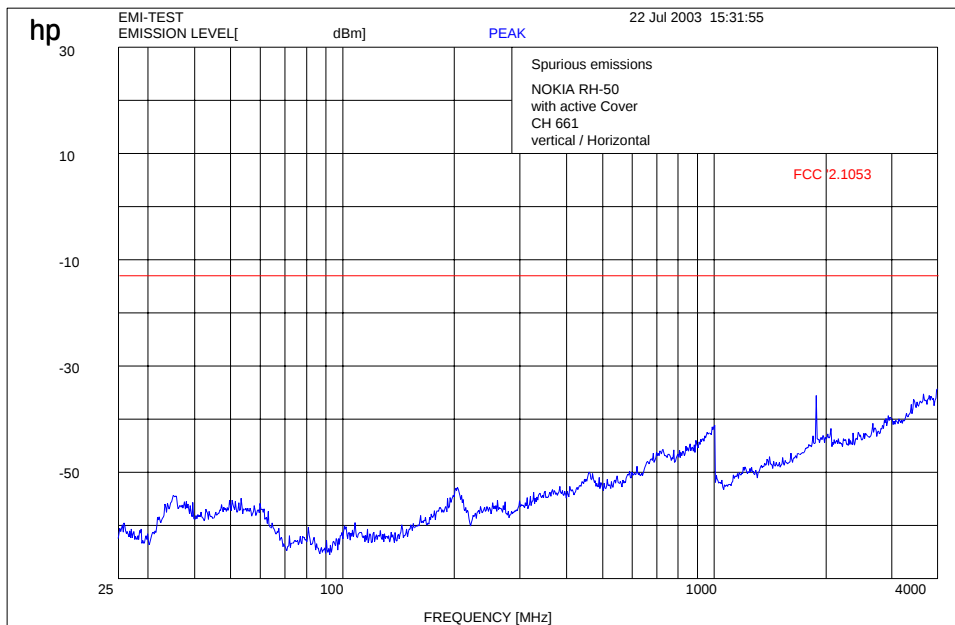

Normal Cover

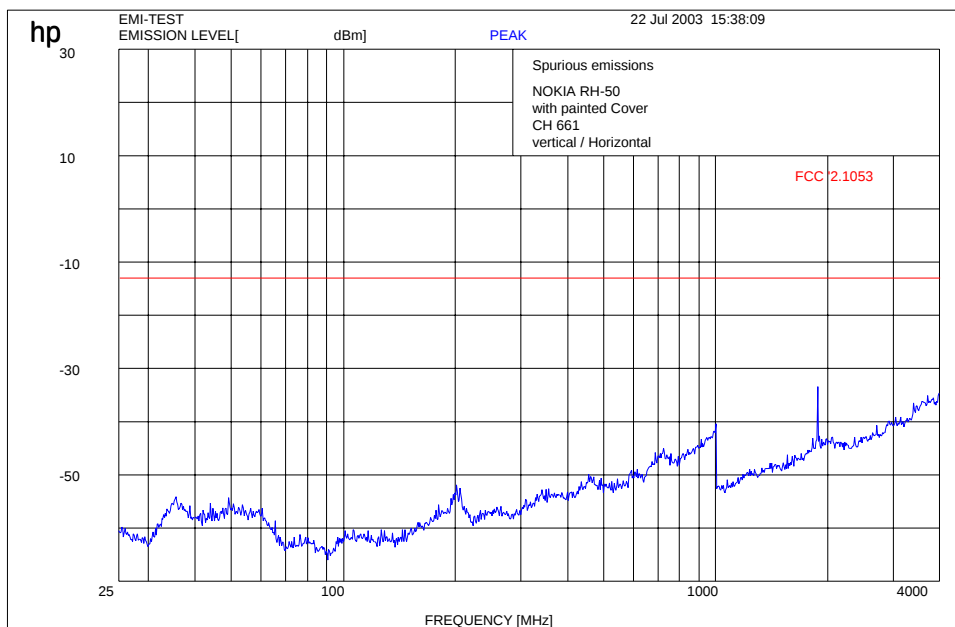


above 4 GHz no difference between Normal and Active Cover

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 810 up to 4 GHz

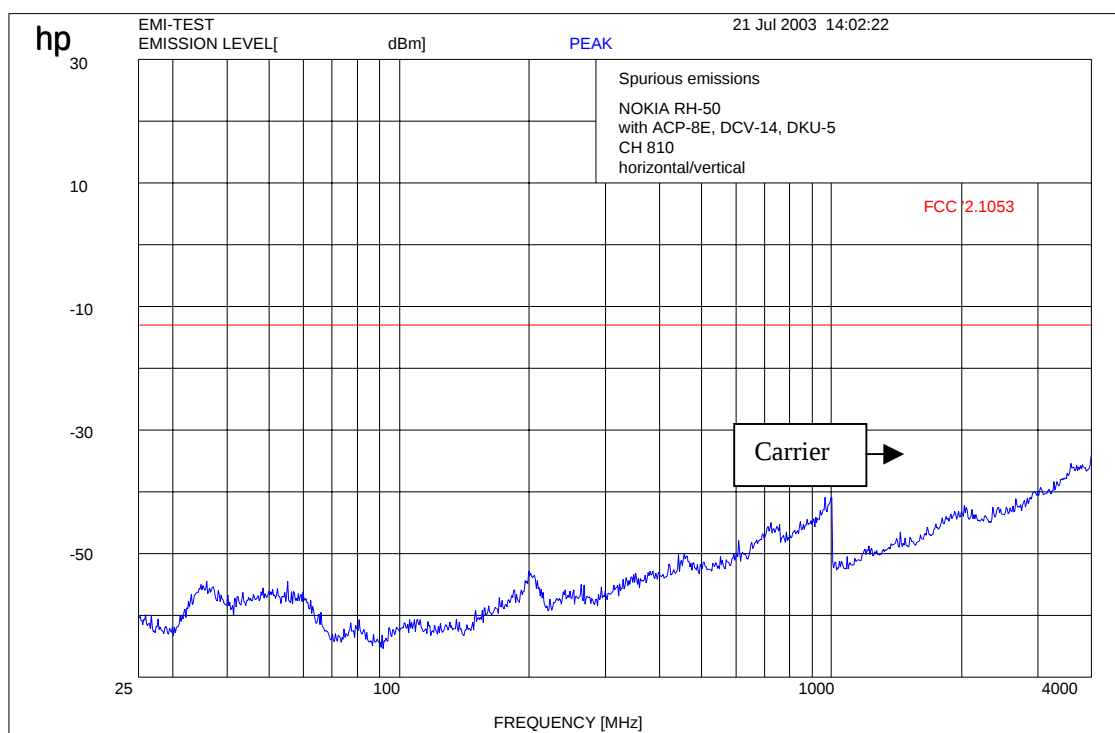

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64


Channel 810 up to 12 GHz

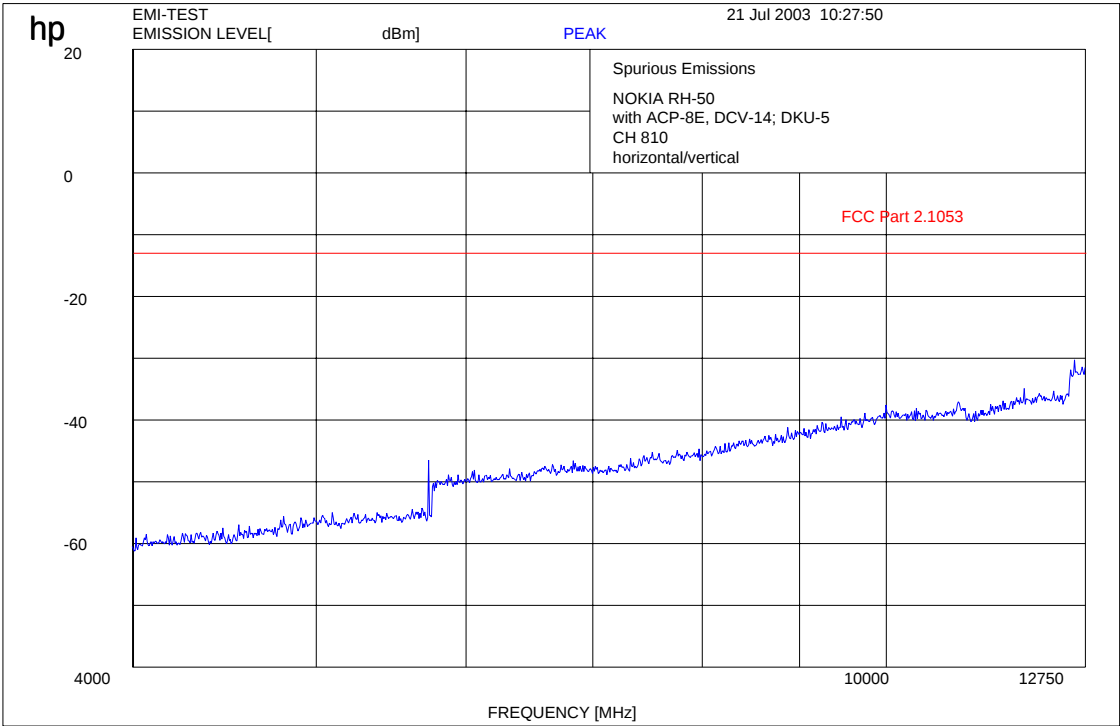

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Channel 810 : -25 GHz

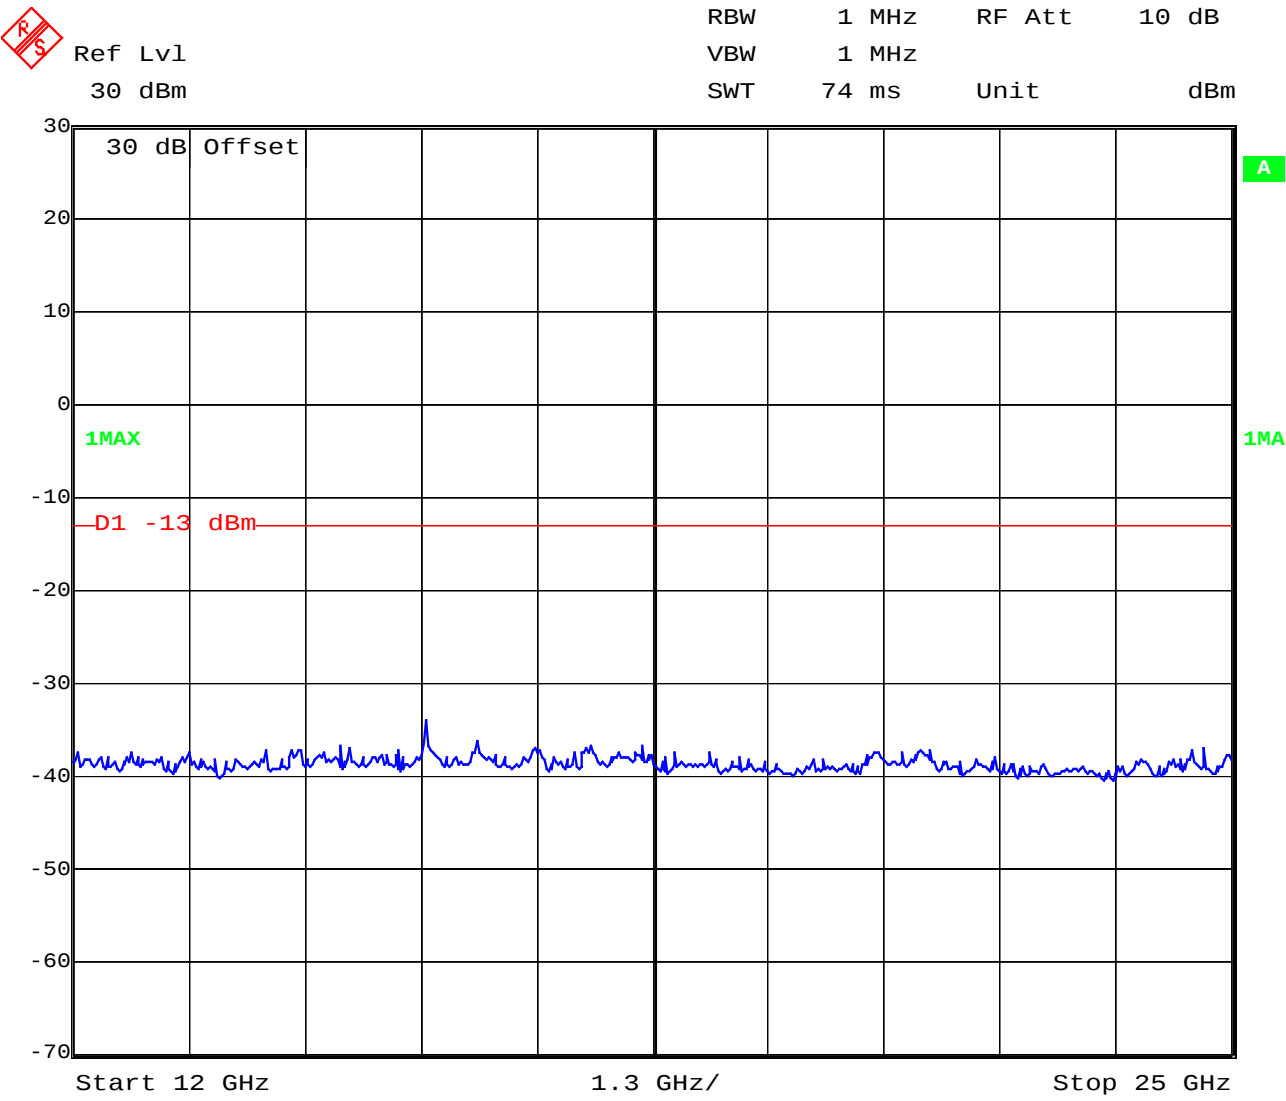


Date: 22. JUL. 2003 07:14:25

Channel 661 (this is valid for all 3 channels and up to 4 GHz)

Idle-Mode

no peak found

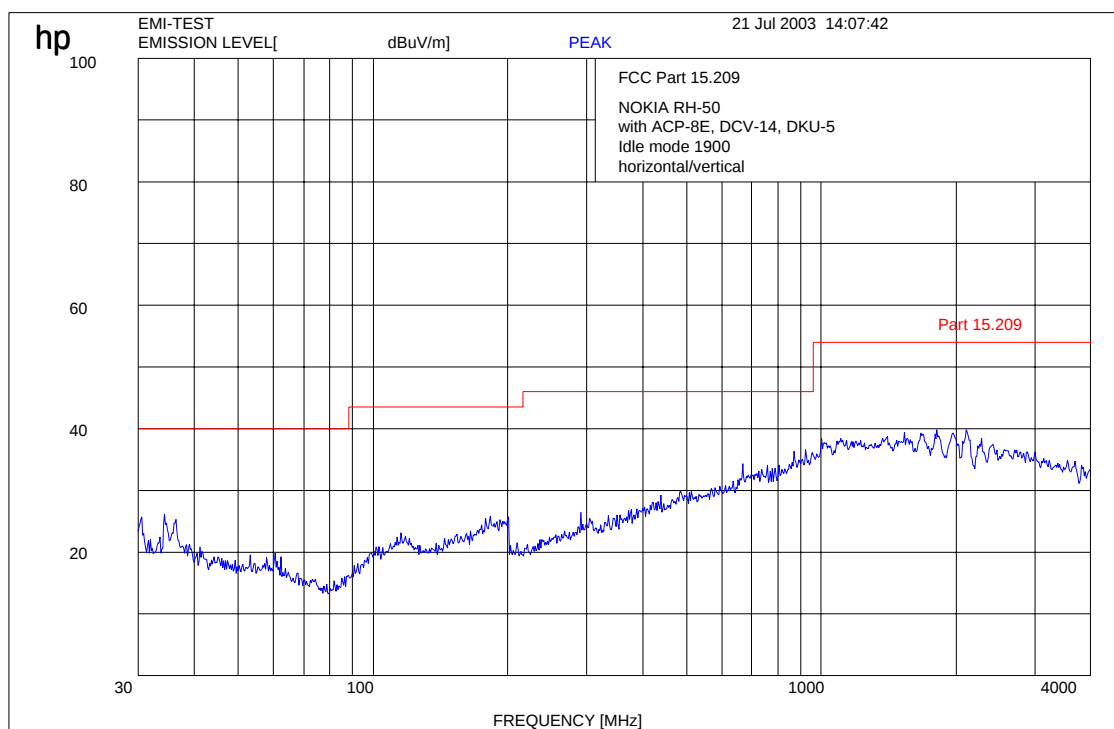

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz


$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 661 (this is valid for all 3 channels and up to 12 GHz)
Idle-Mode

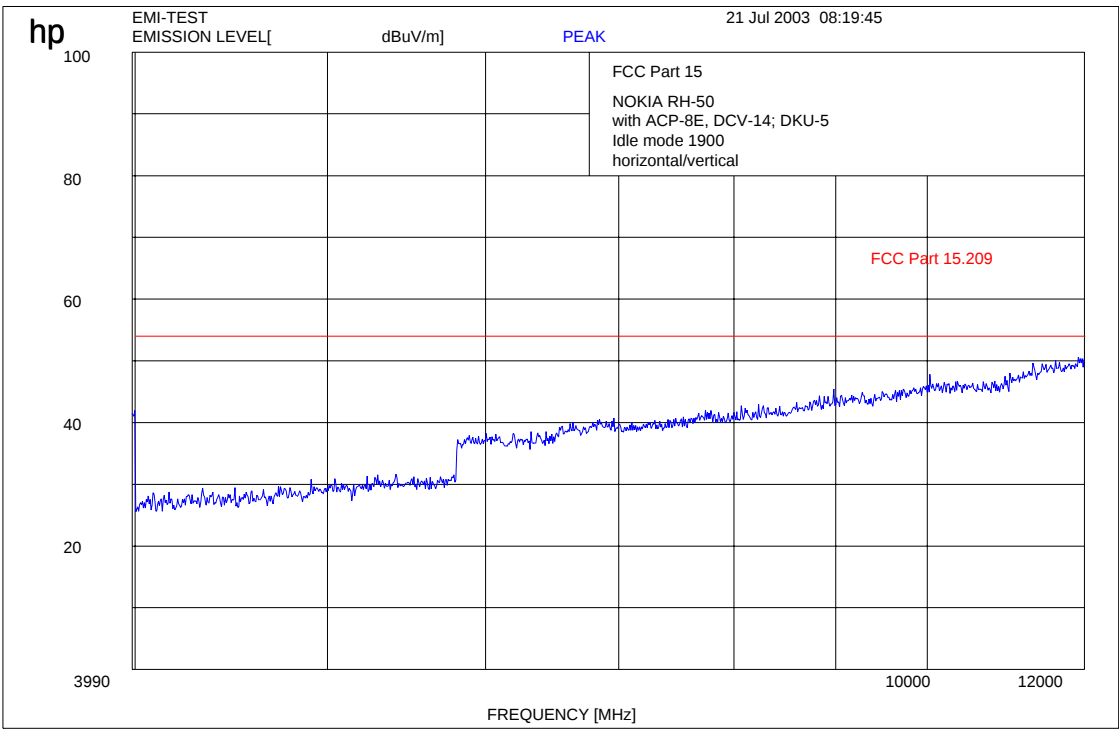


f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24, 64

Channel 661 (this is valid for all 3 channels and up to 25 GHz)

Idle-Mode

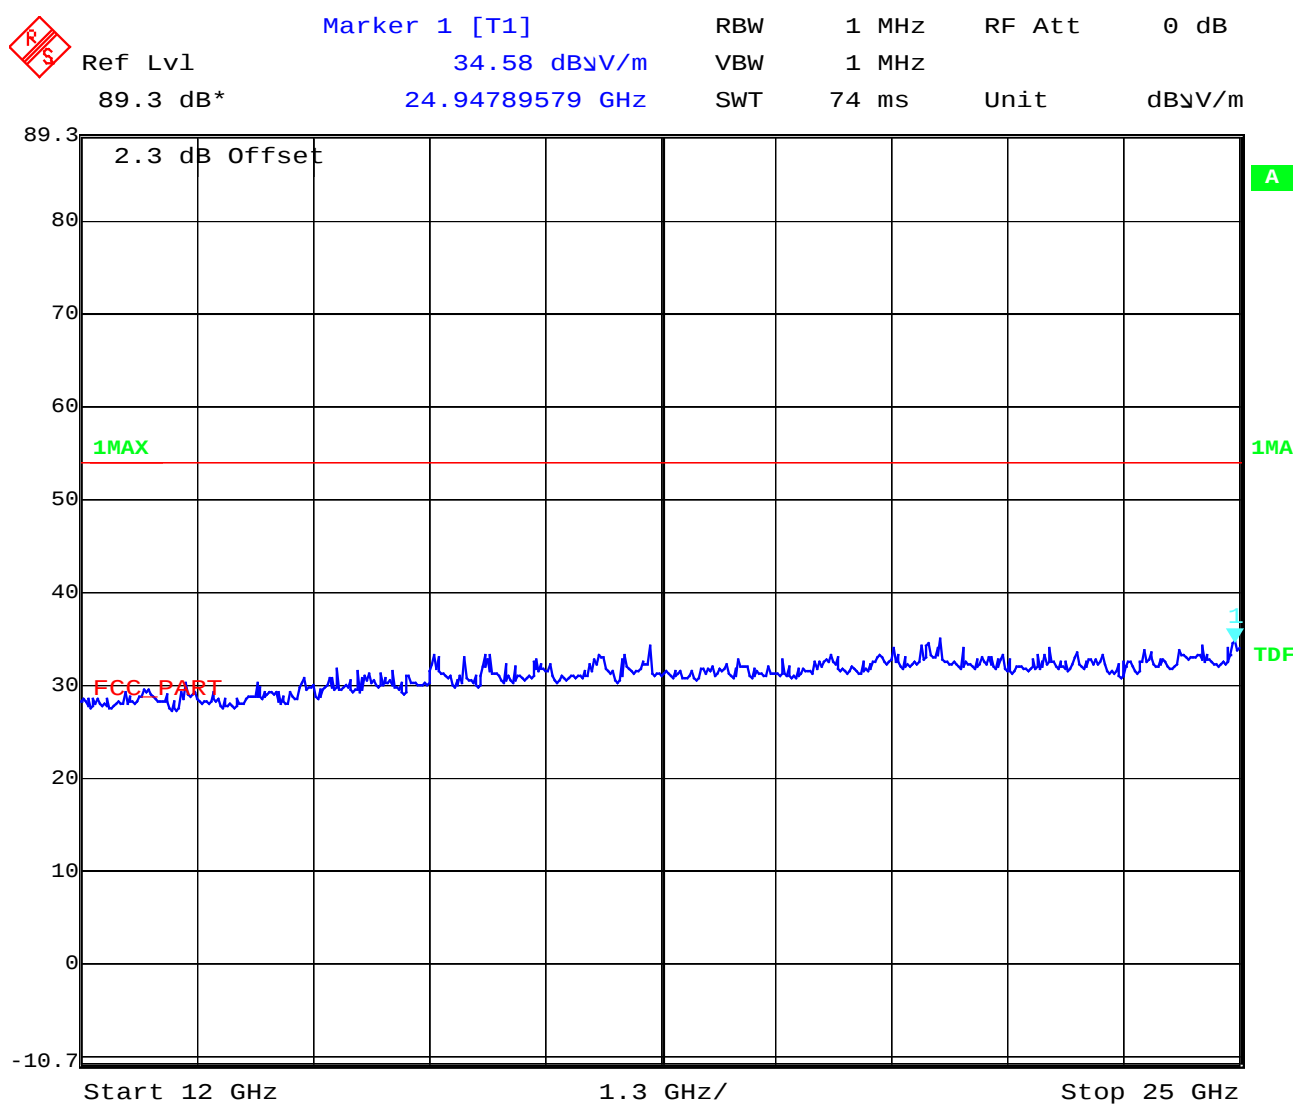

Date: 22. JUL. 2003 07:11:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CONDUCTED SPURIOUS EMISSIONS

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

Measurement Limit:

Sec. 24.238 Emission Limits.


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		29.78	-13.0 (42.78 dBc)		carrier
1849.00		-32.31		62.09	complies
1949.99		-13.83		43.61	complies
3668.54		-46.62		76.40	complies
CH 661					
1880.0		29.07	-13.0 (42.07 dBc)		carrier
1879.0		-28.92		57.99	complies
CH 810					
			-13.0 (42.31 dBc)		
1909.8		29.31			carrier
1908.80		-28.92		58.23	complies
1910.00		-15.64		44.95	complies
5705.18		-42.91		72.22	complies
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Measurements:


Channel: 512

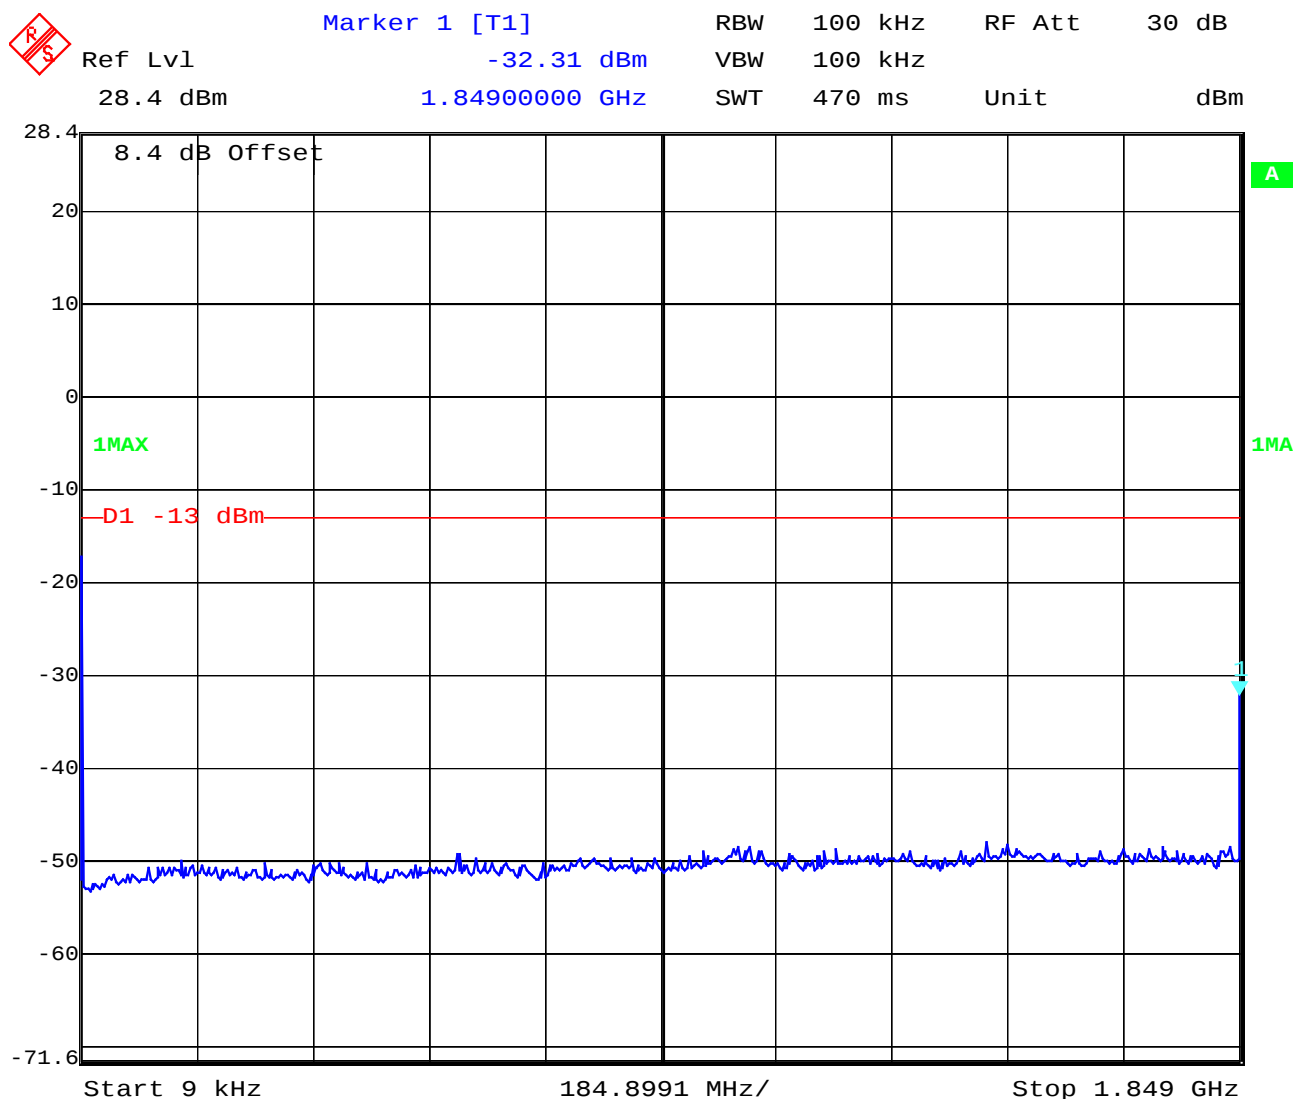

Date: 22.JUL.2003 08:09:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 512

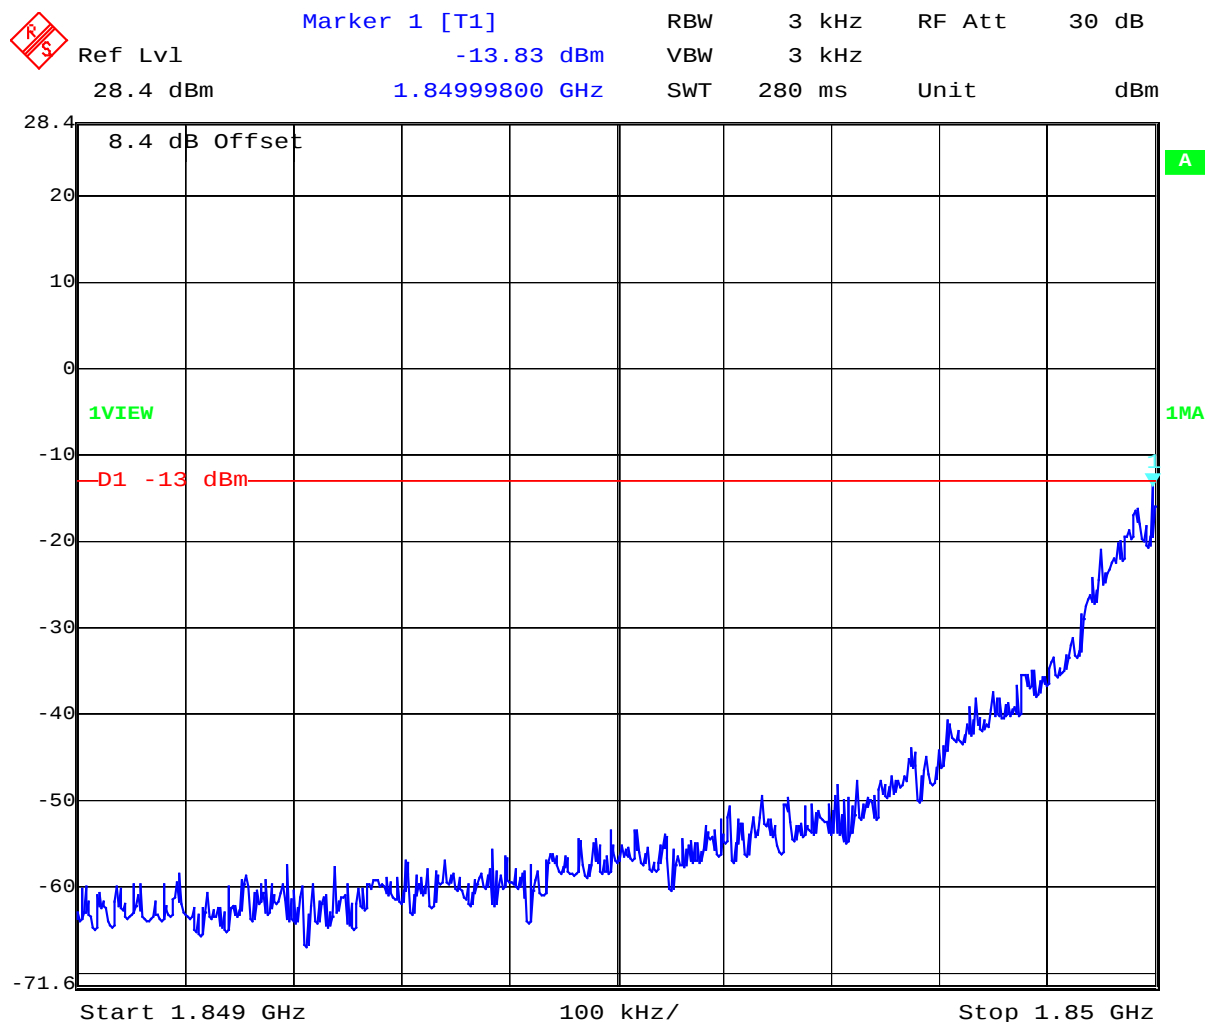


Date: 22.JUL.2003 08:10:22

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 512

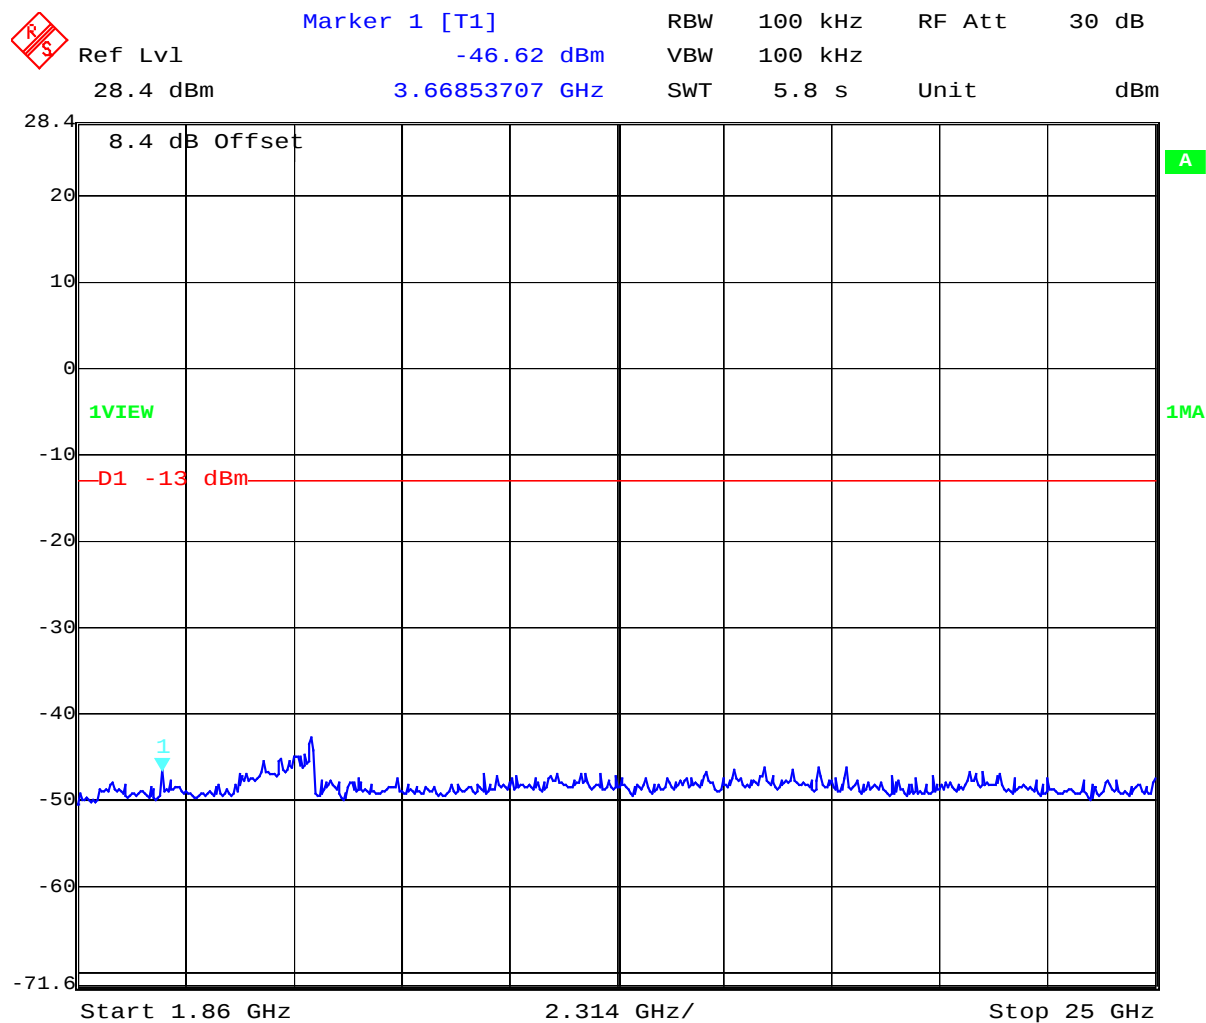


Date: 22.JUL.2003 08:12:56

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 661

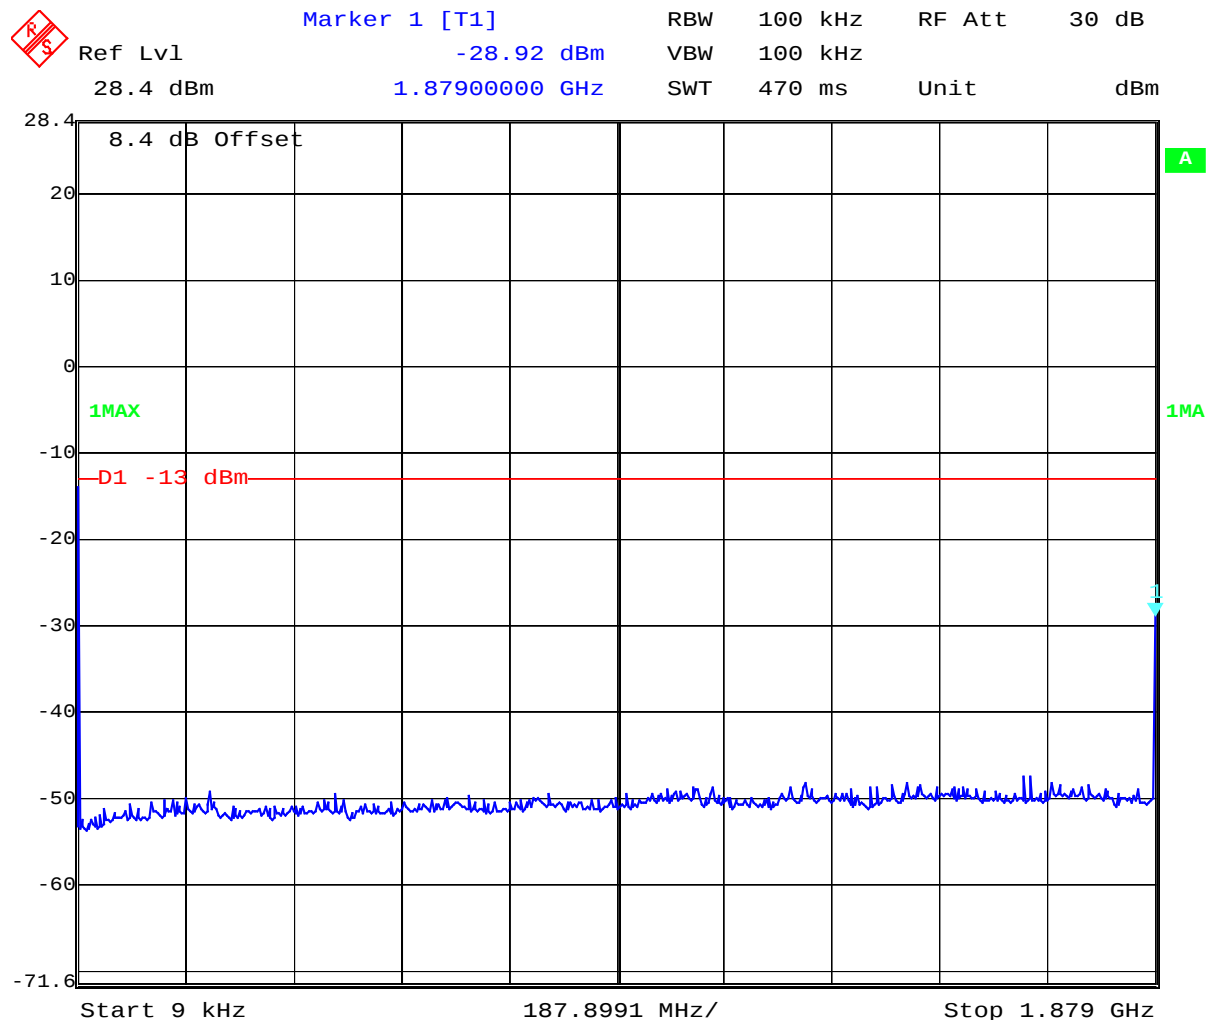


Date: 22.JUL.2003 08:14:31

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 661

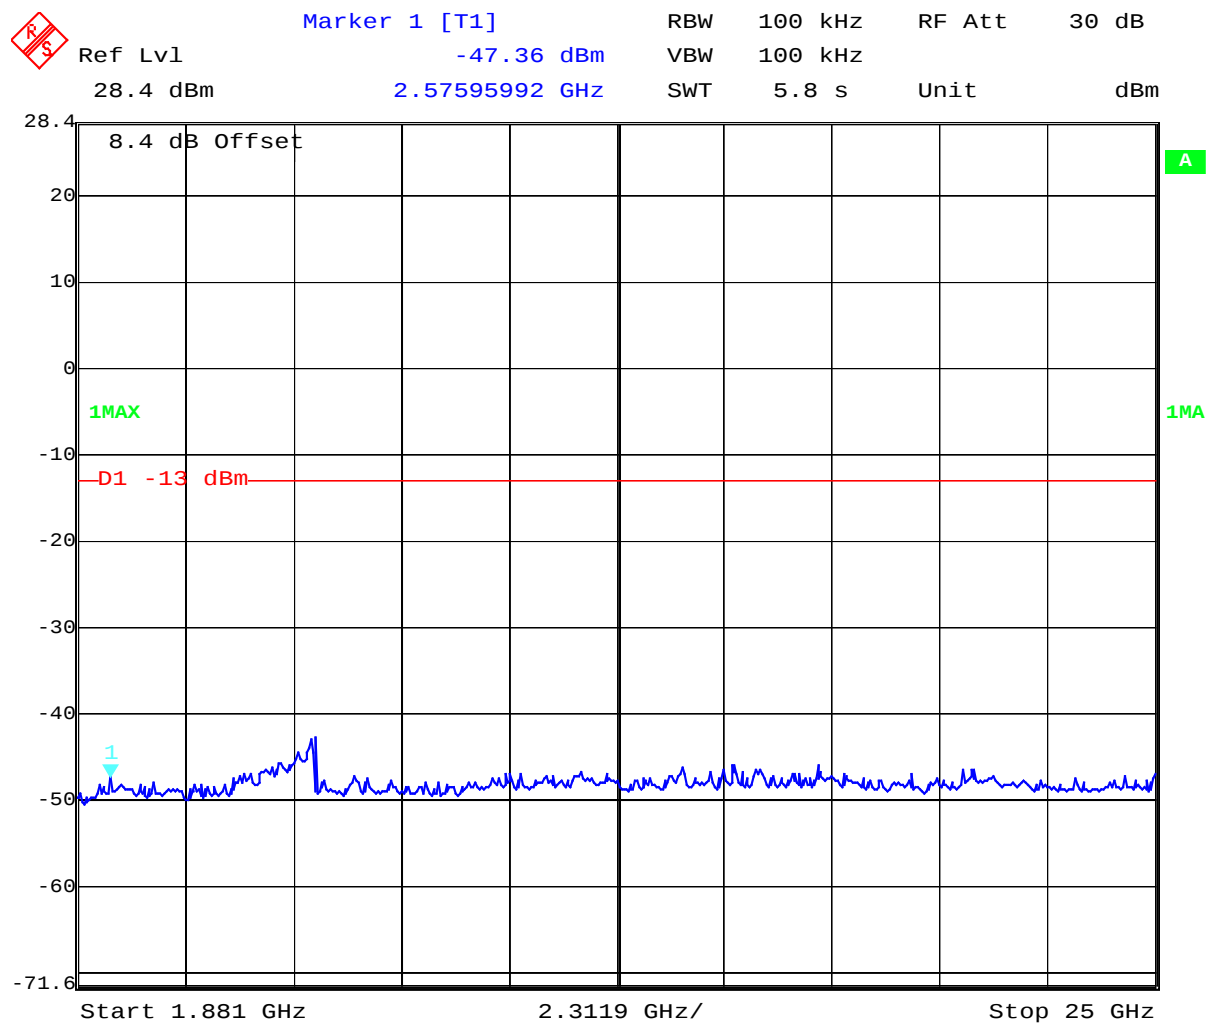


Date: 22.JUL.2003 08:16:11

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 810

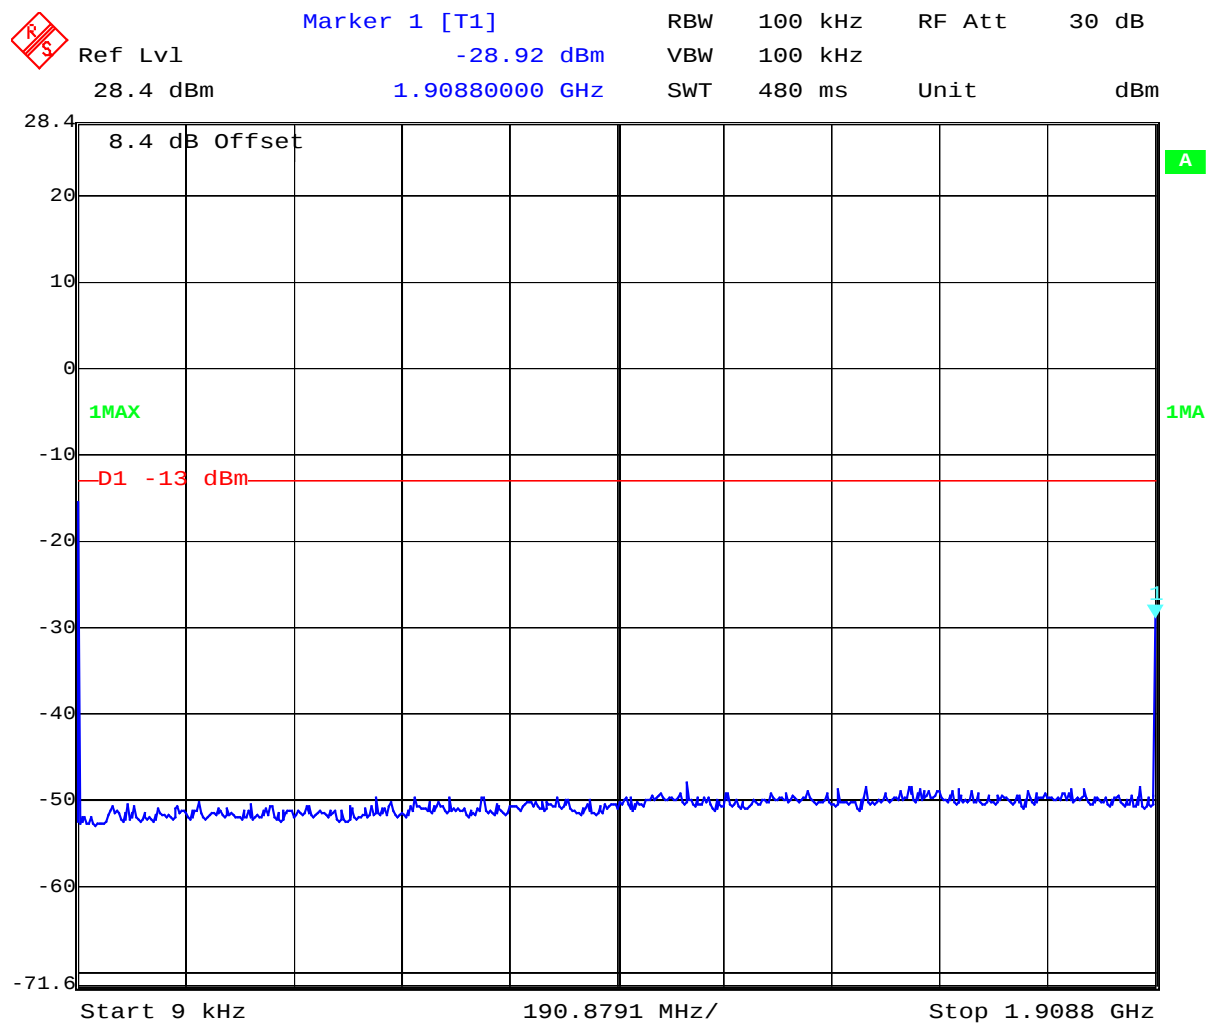


Date: 22.JUL.2003 08:17:44

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 810

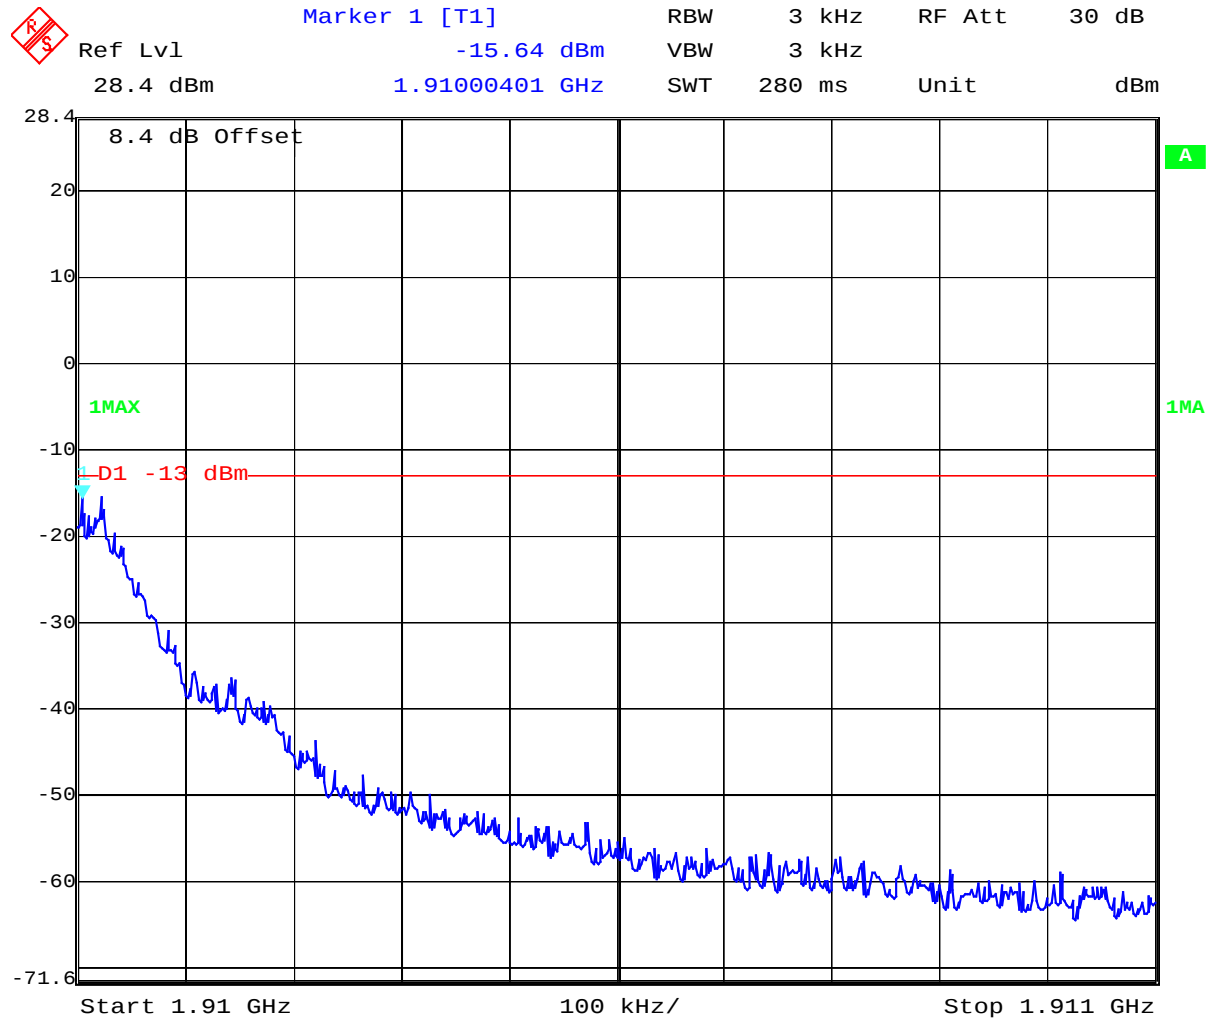


Date: 22.JUL.2003 08:19:28

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 810

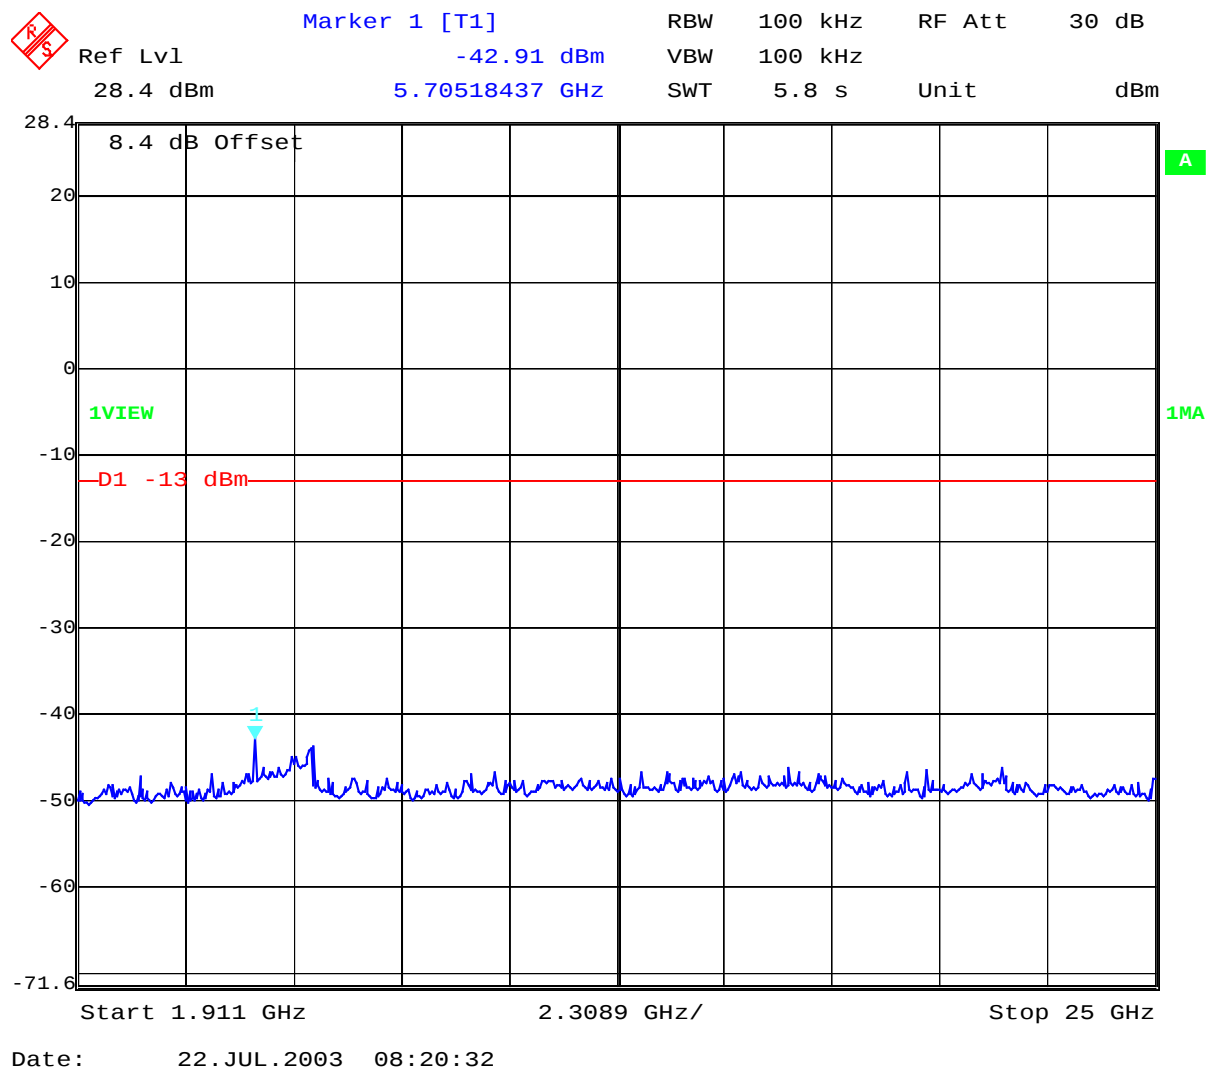


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F**Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

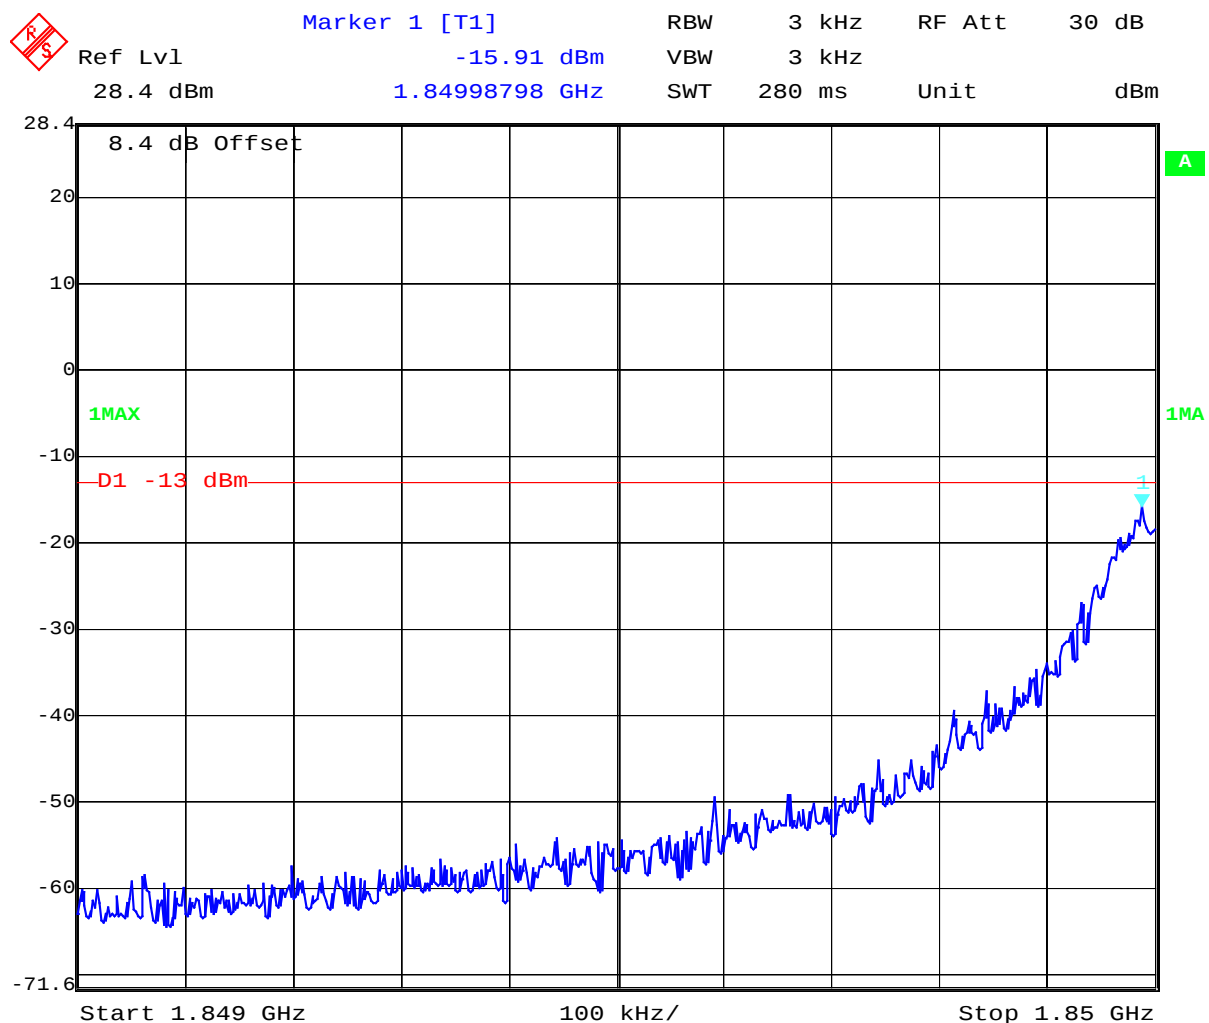
Measurements:**Block A Channel 512**

Date: 22.JUL.2003 08:25:30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block A Channel 585

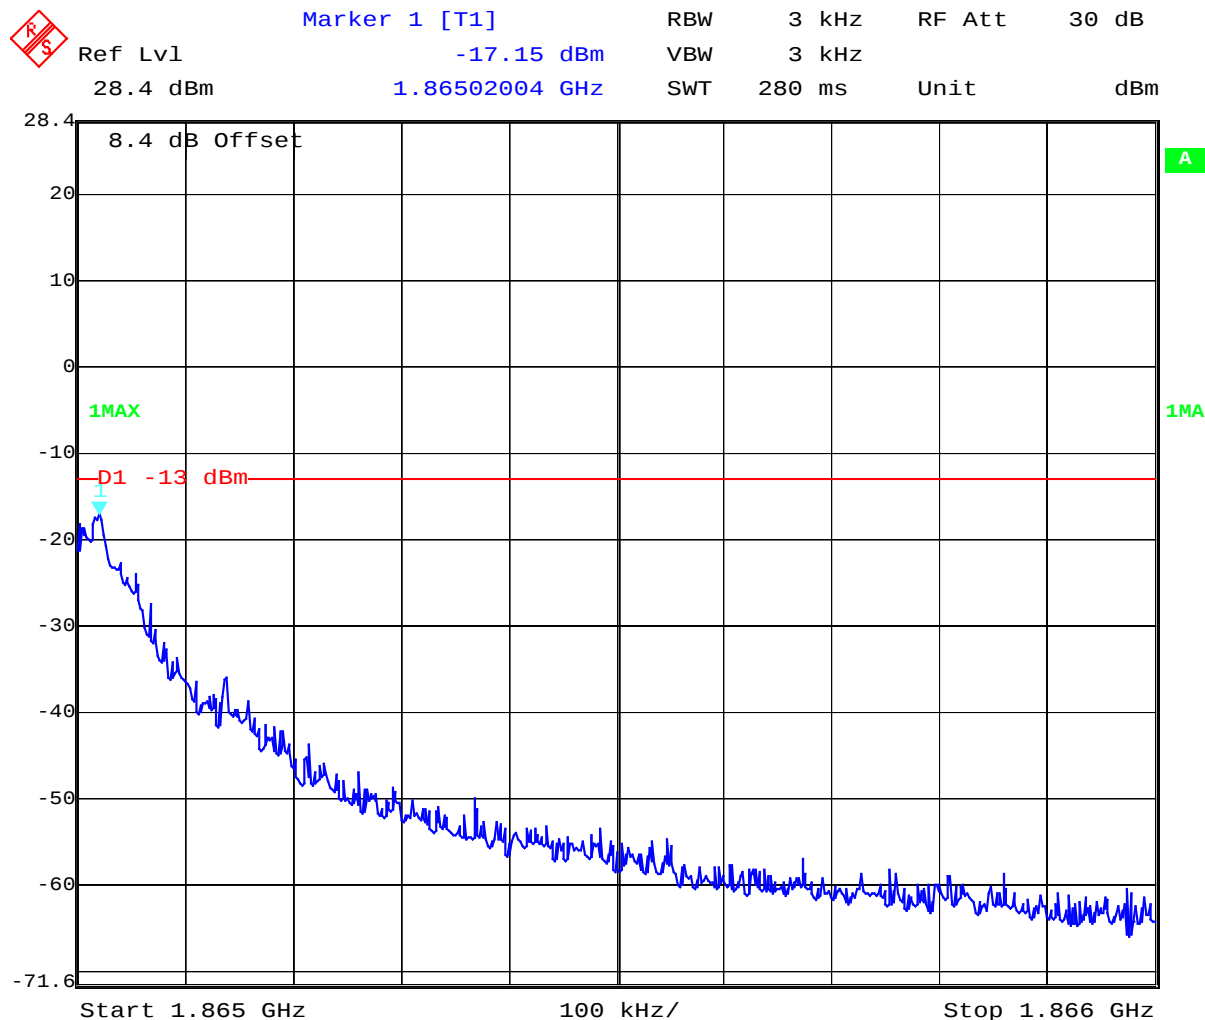


Date: 22.JUL.2003 08:27:12

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block B Channel 612

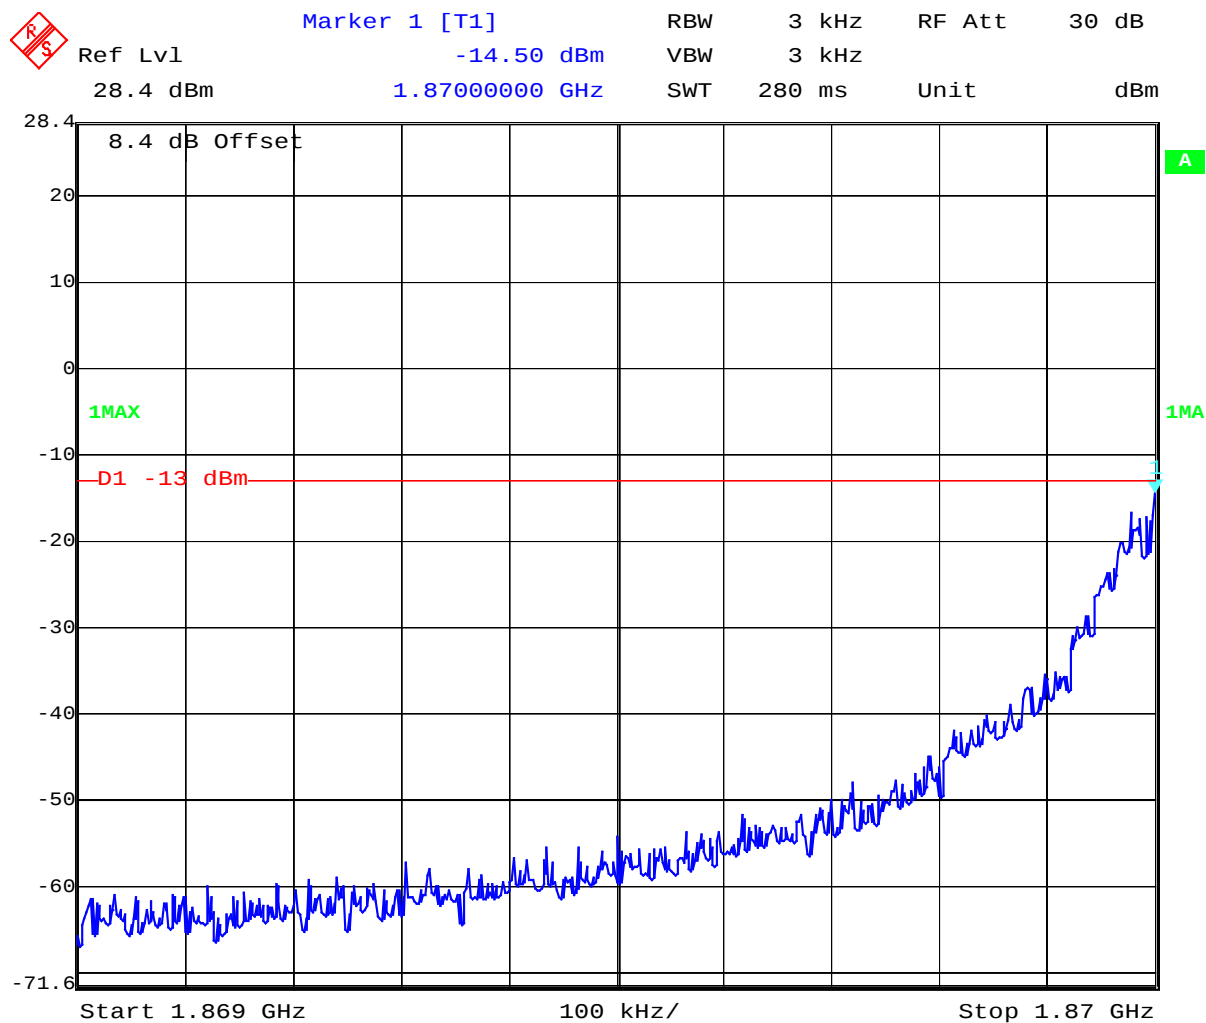


Date: 22.JUL.2003 08:28:20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block B Channel 685

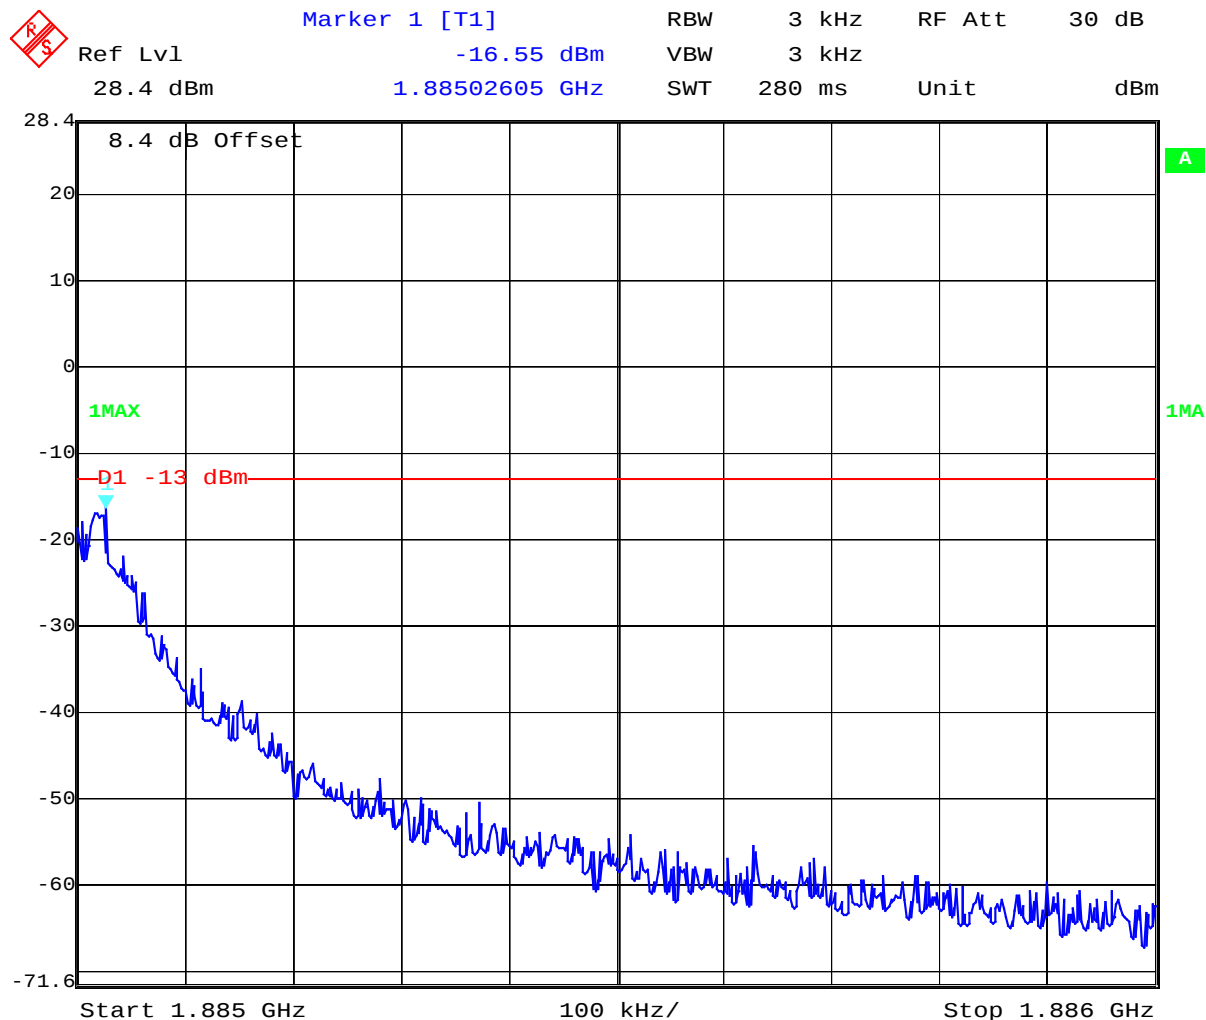


Date: 22. JUL. 2003 08:29:20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block C Channel 737

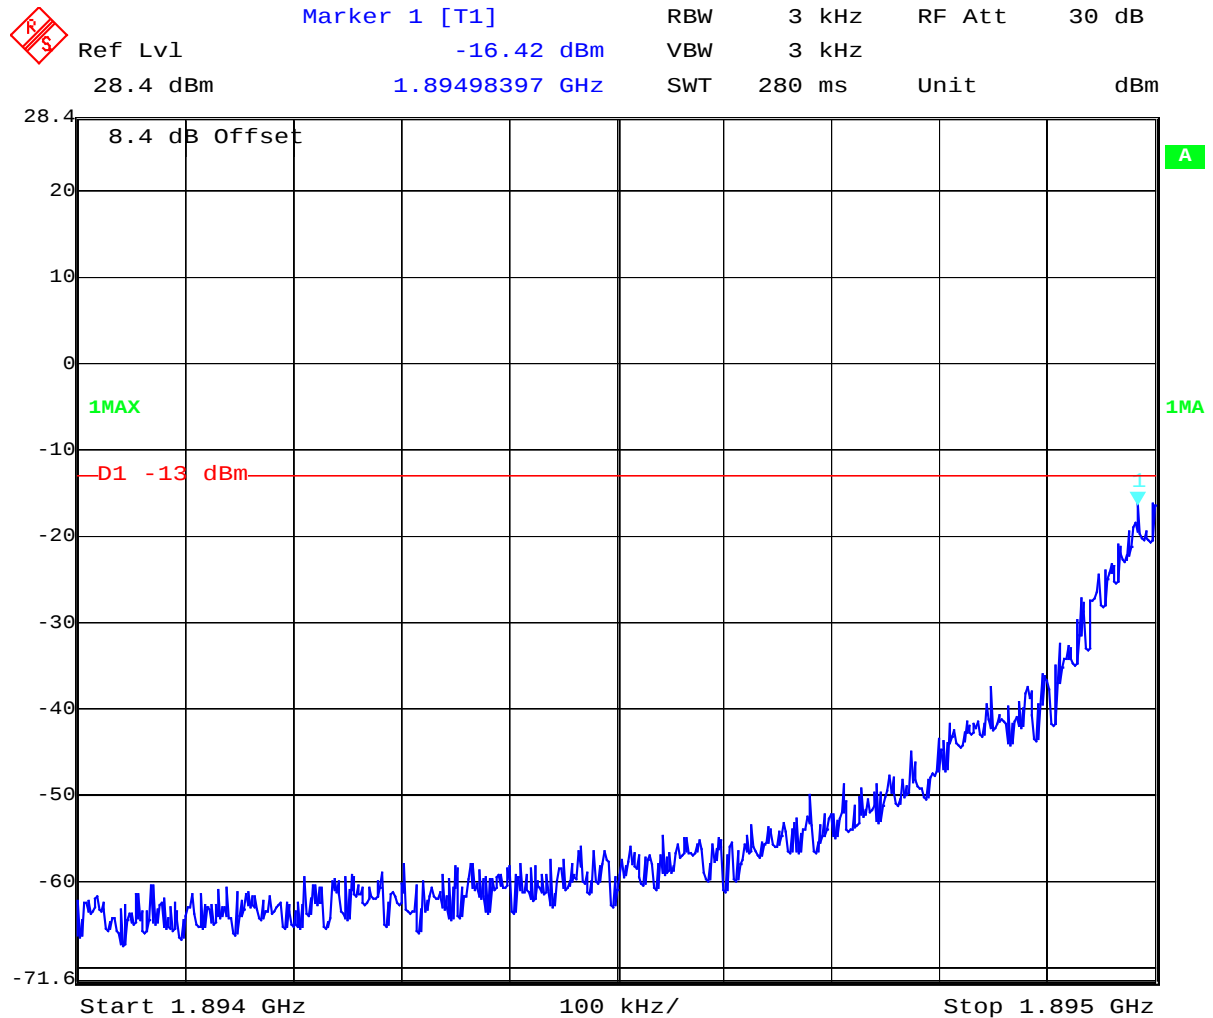


Date: 22.JUL.2003 08:30:45

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block C Channel 810

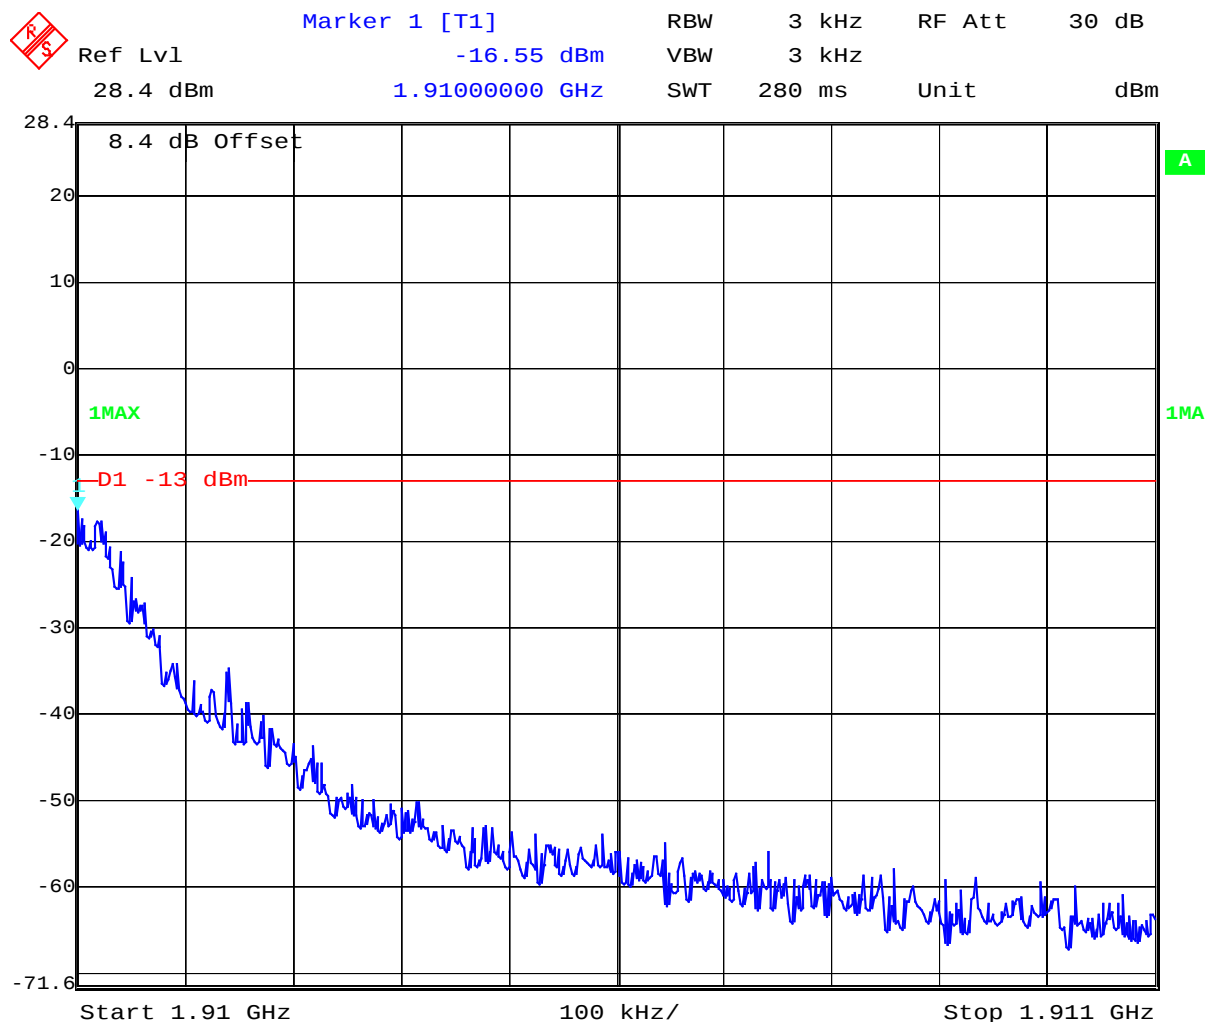


Date: 22.JUL.2003 08:31:29

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block D Channel 587

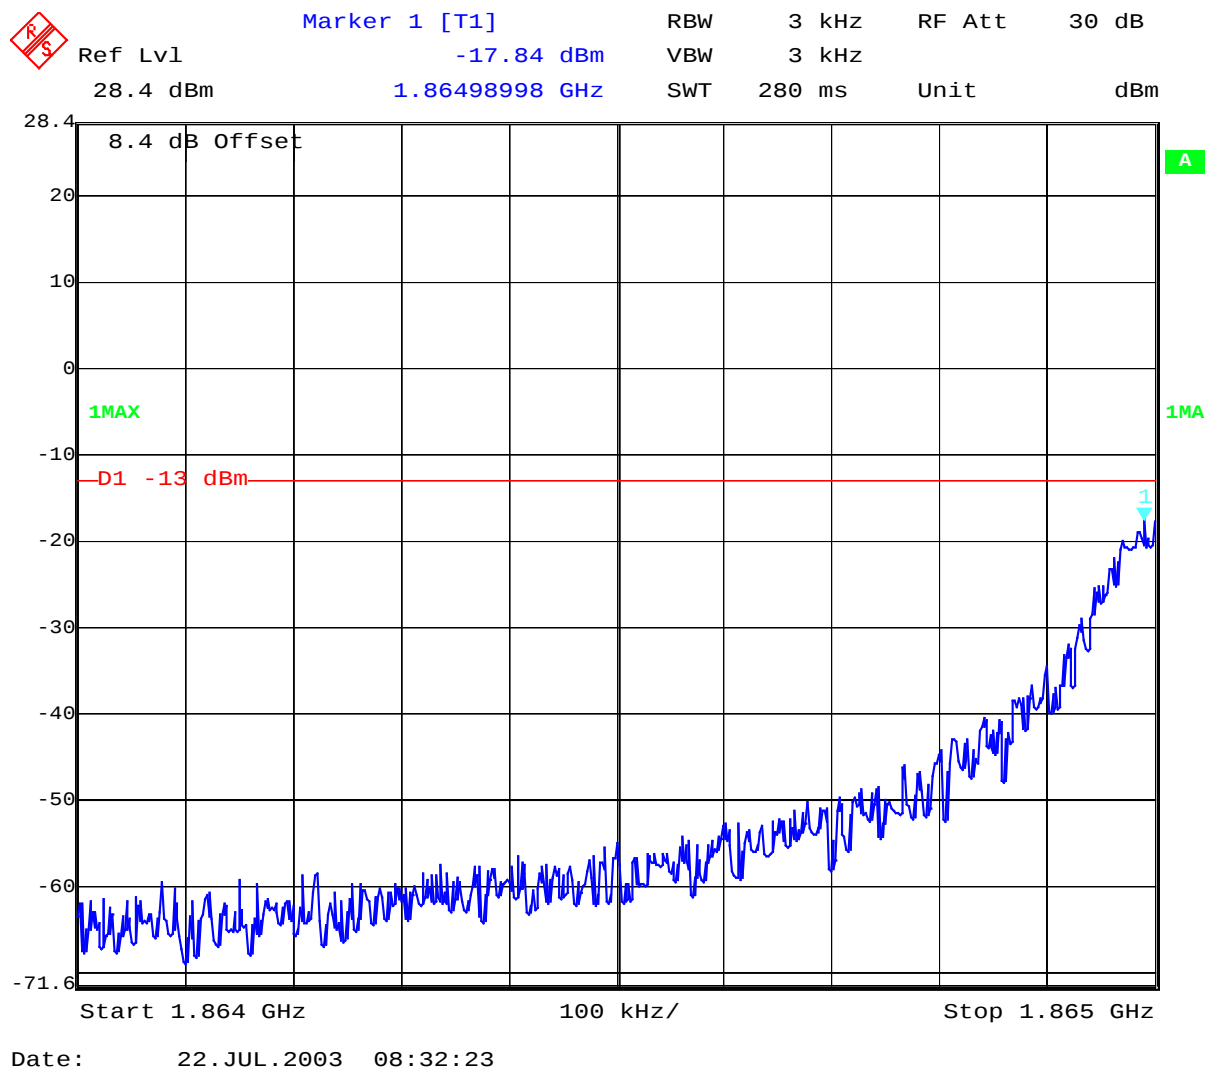

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block D Channel 610




Date: 22.JUL.2003 08:33:17

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block E Channel 687

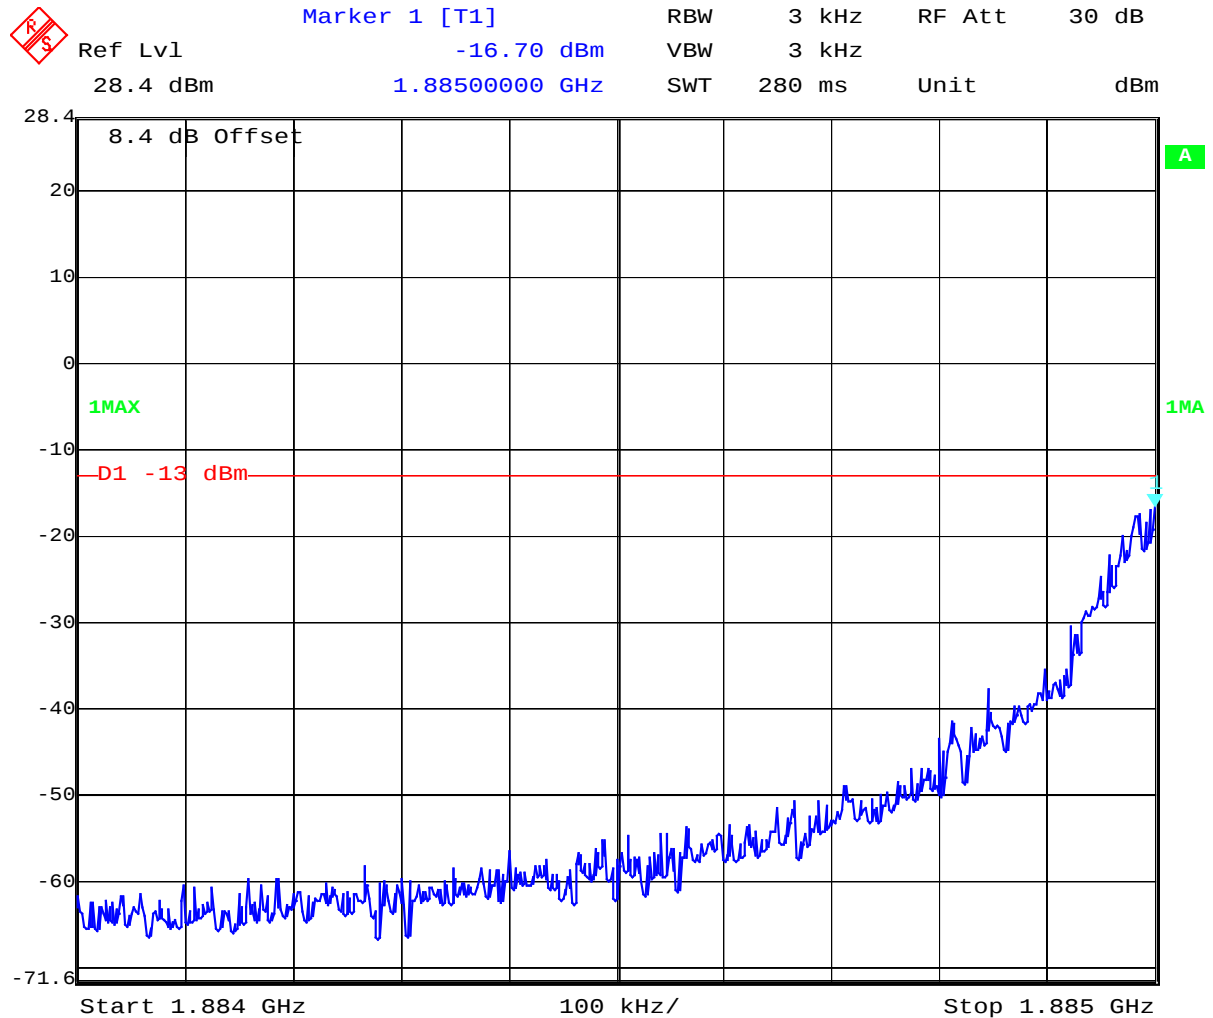

Date: 22.JUL.2003 08:34:01

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block E Channel 710




Date: 22.JUL.2003 08:34:44

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block F Channel 712

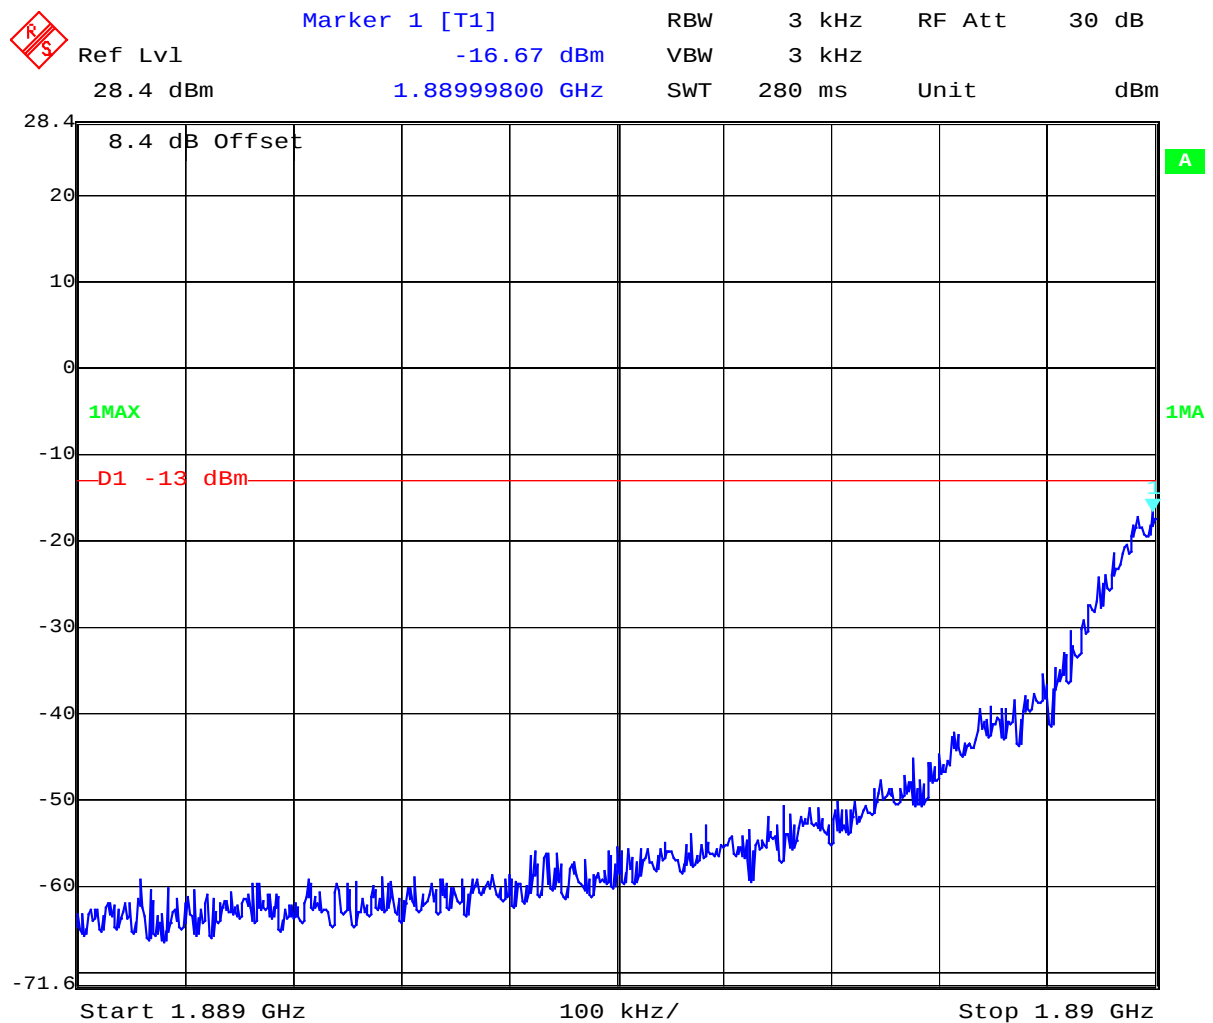


Date: 22.JUL.2003 08:35:44

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block F Channel 735

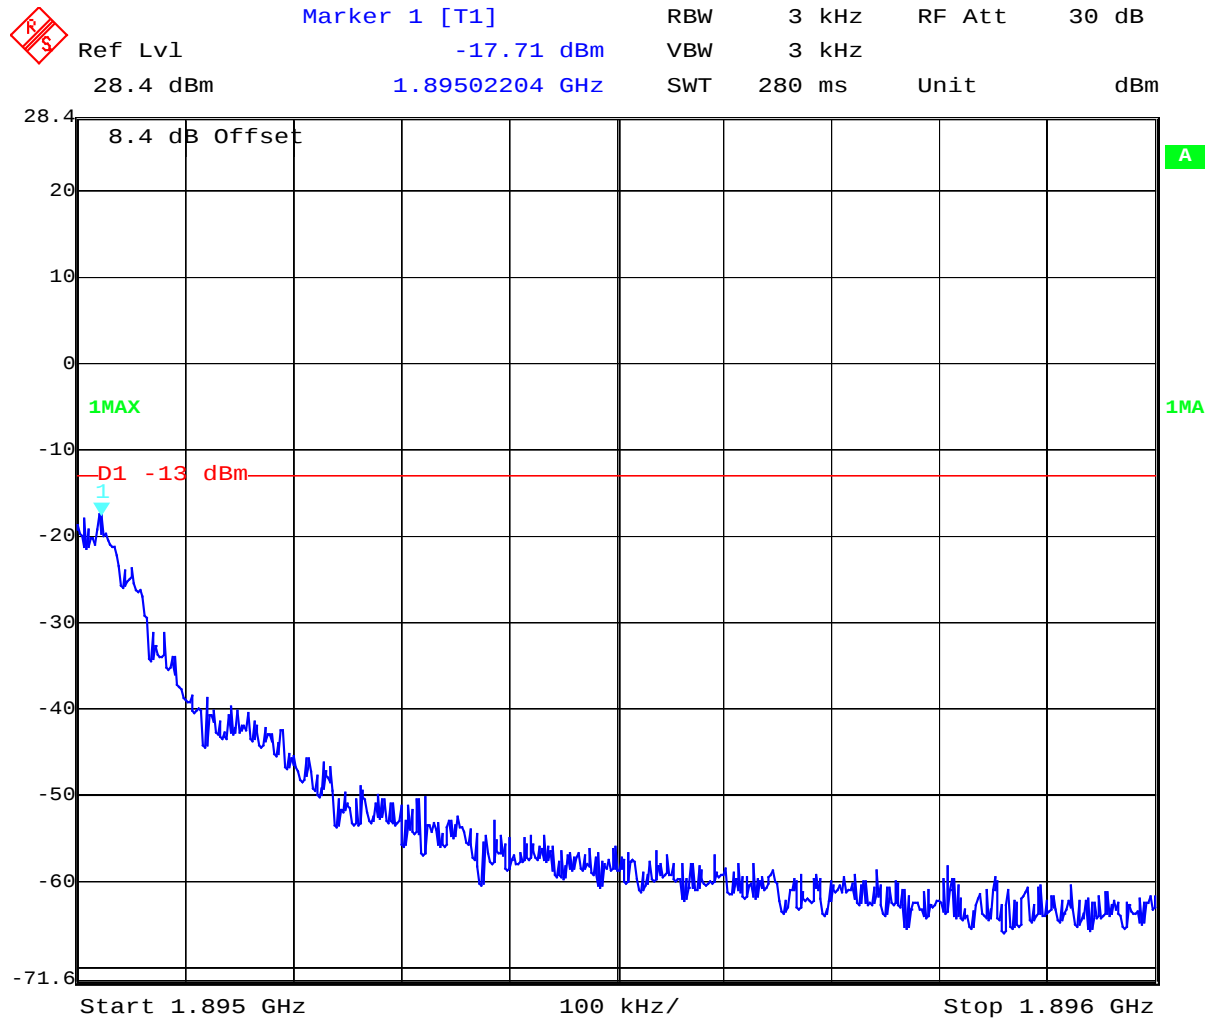

Date: 22.JUL.2003 08:36:33

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

OCCUPIED BANDWIDTH**§2.989****Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	278.557	312.625
1880.0 MHz	276.553	314.629
1909.8 MHz	280.561	312.625

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 281 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

Channel 512


99% Occupied Bandwidth

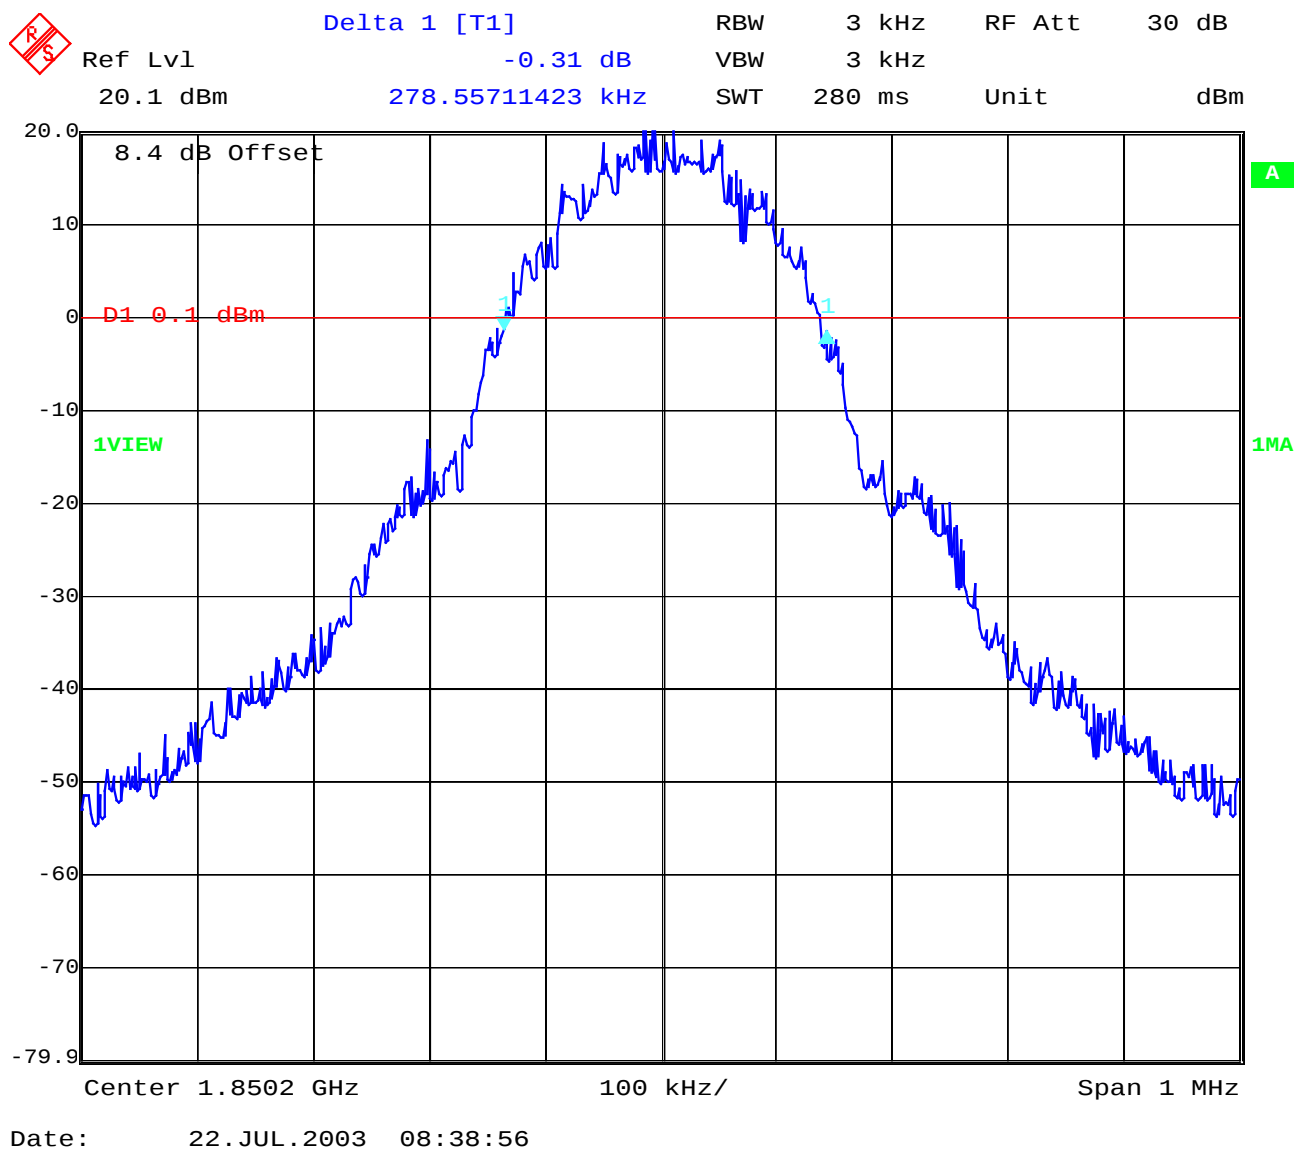

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512


-26 dBc Bandwidth

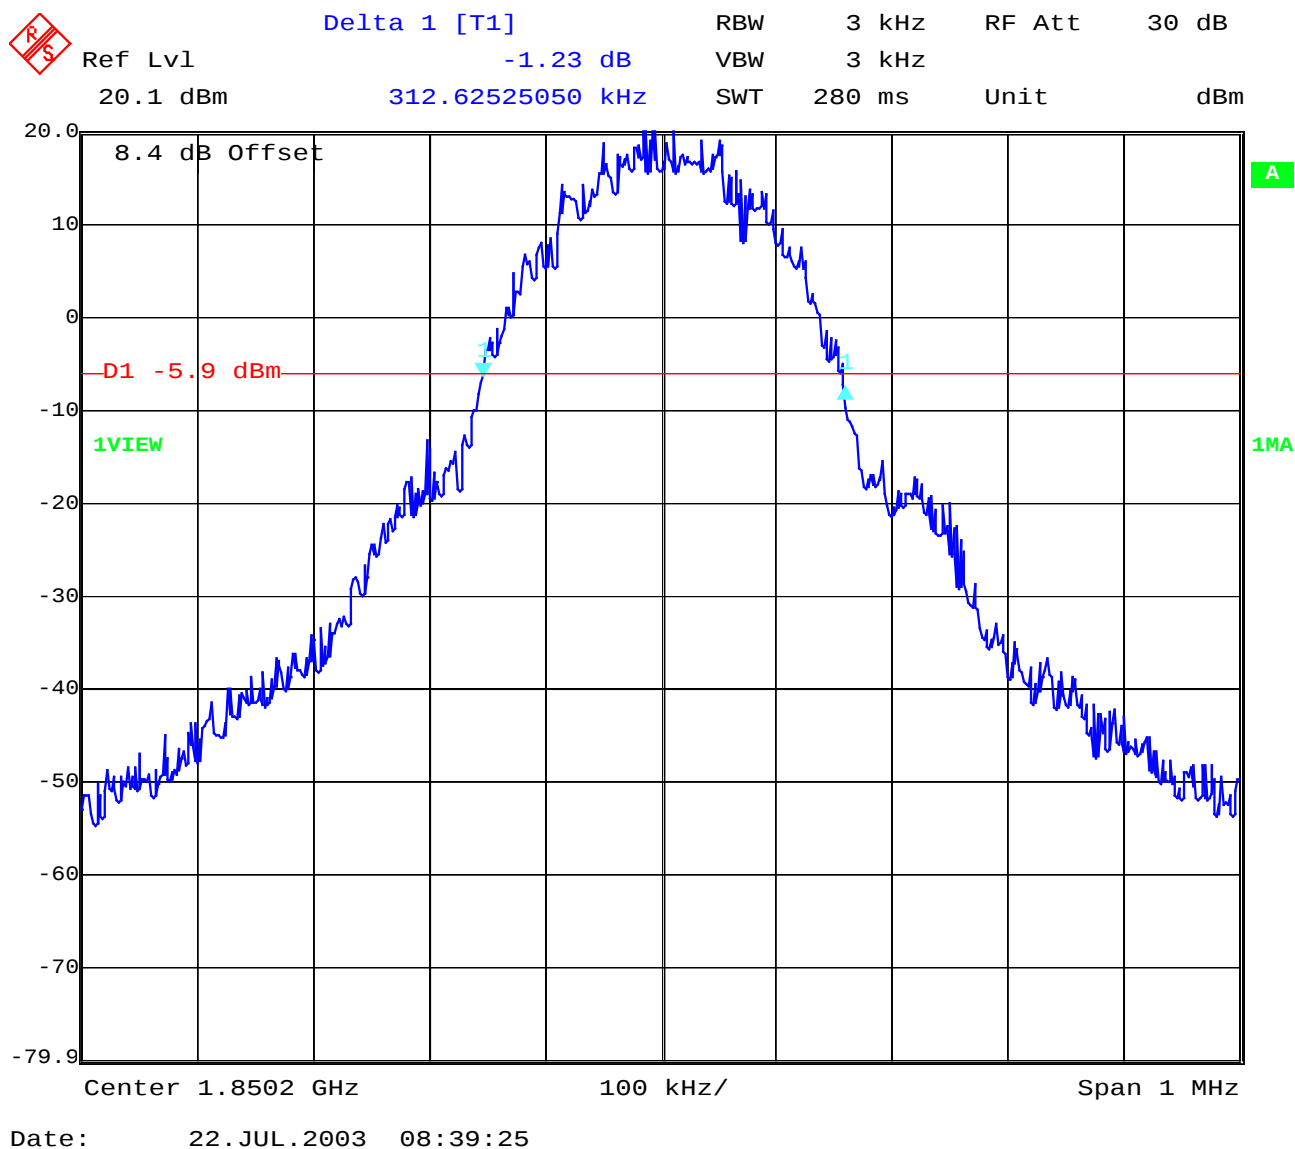

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Channel 661

99% Occupied Bandwidth

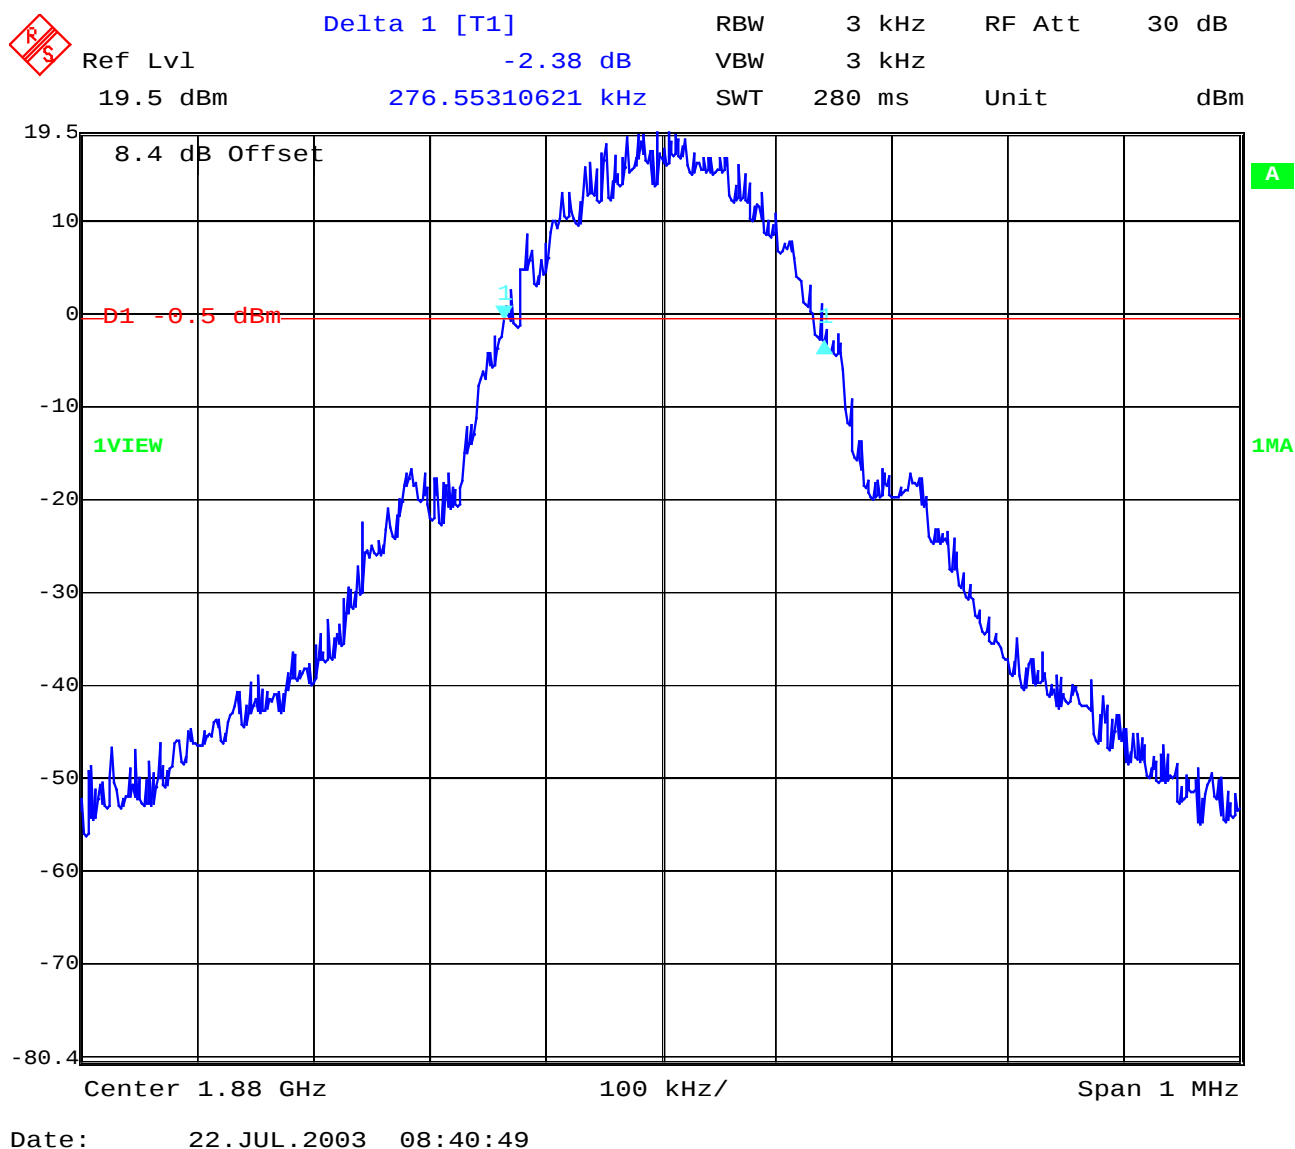

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 -26 dBc Bandwidth

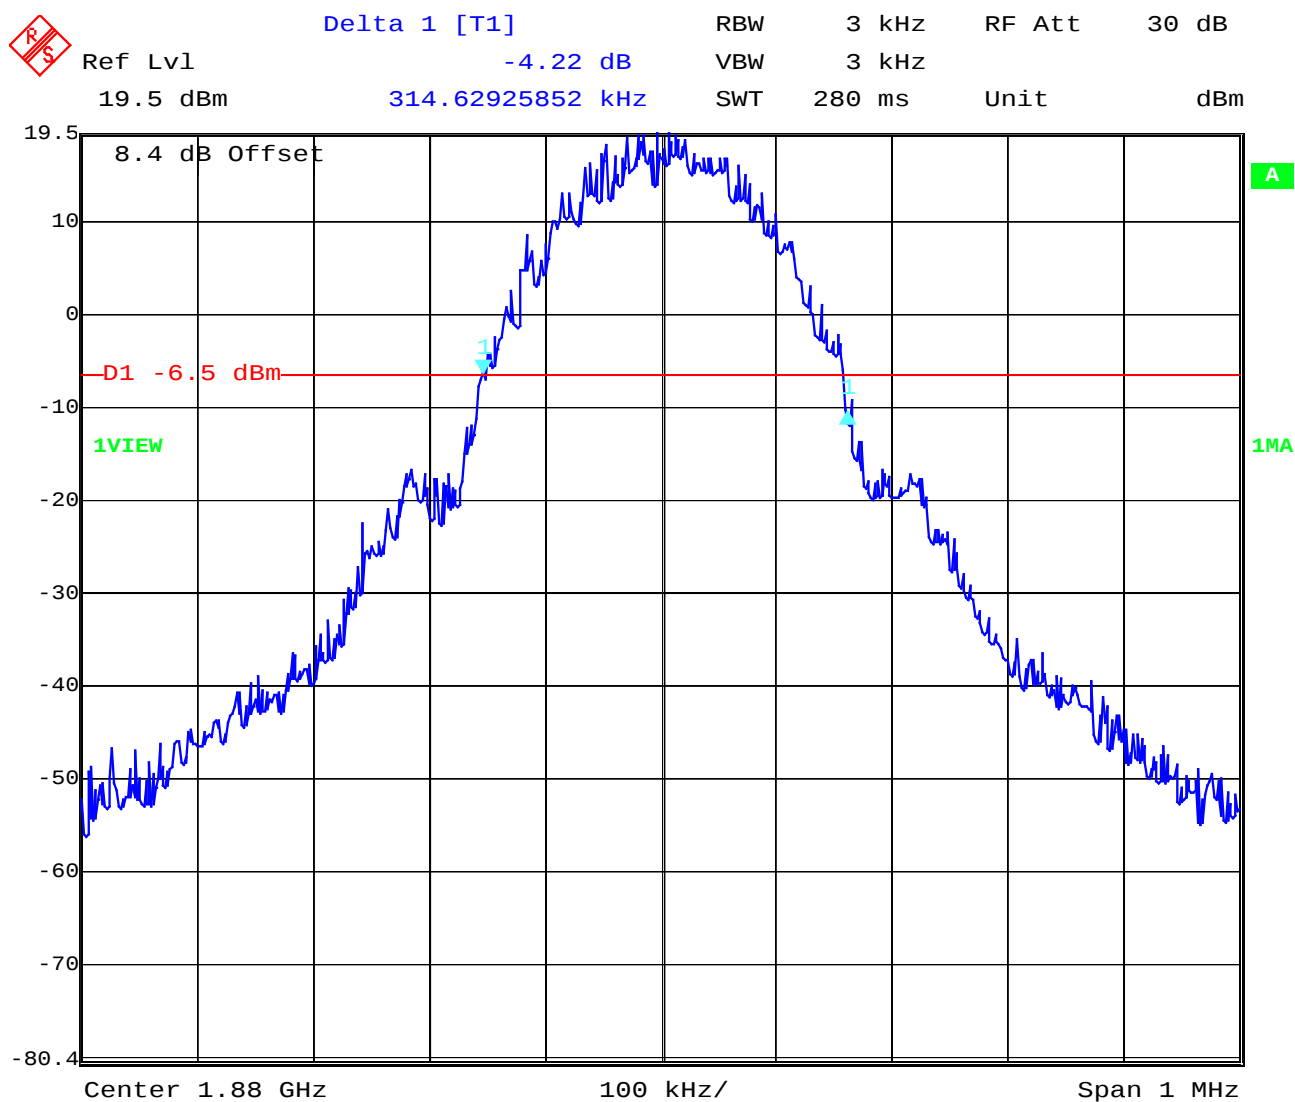


Date: 22. JUL. 2003 08:41:35

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810


99% Occupied Bandwidth

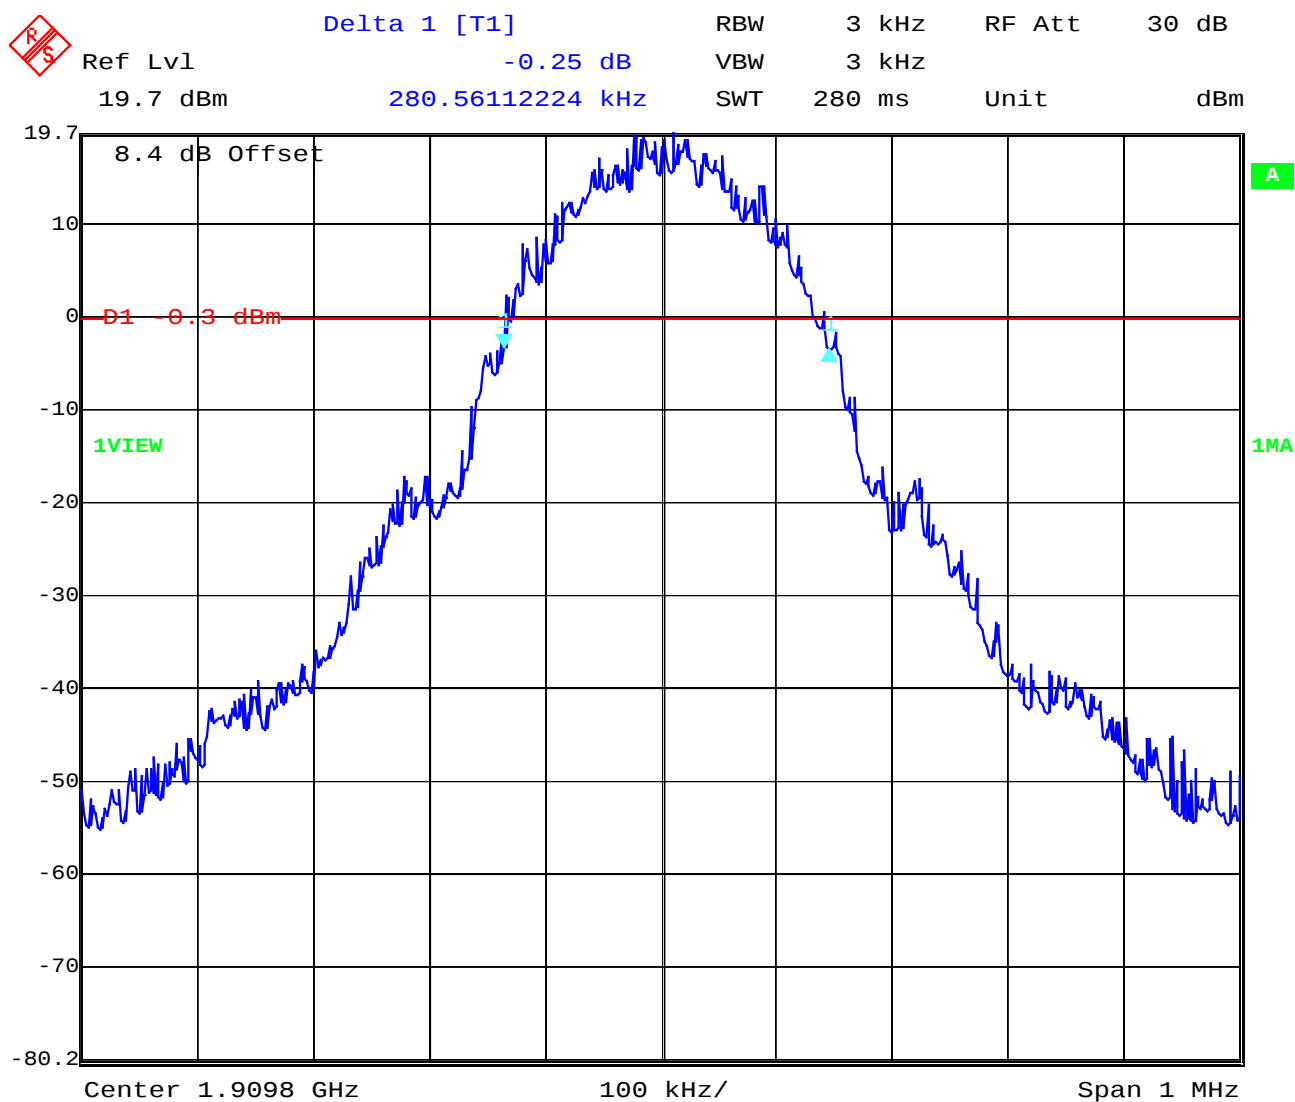

Date: 22. JUL. 2003 08:43:15

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810 -26 dBc Bandwidth

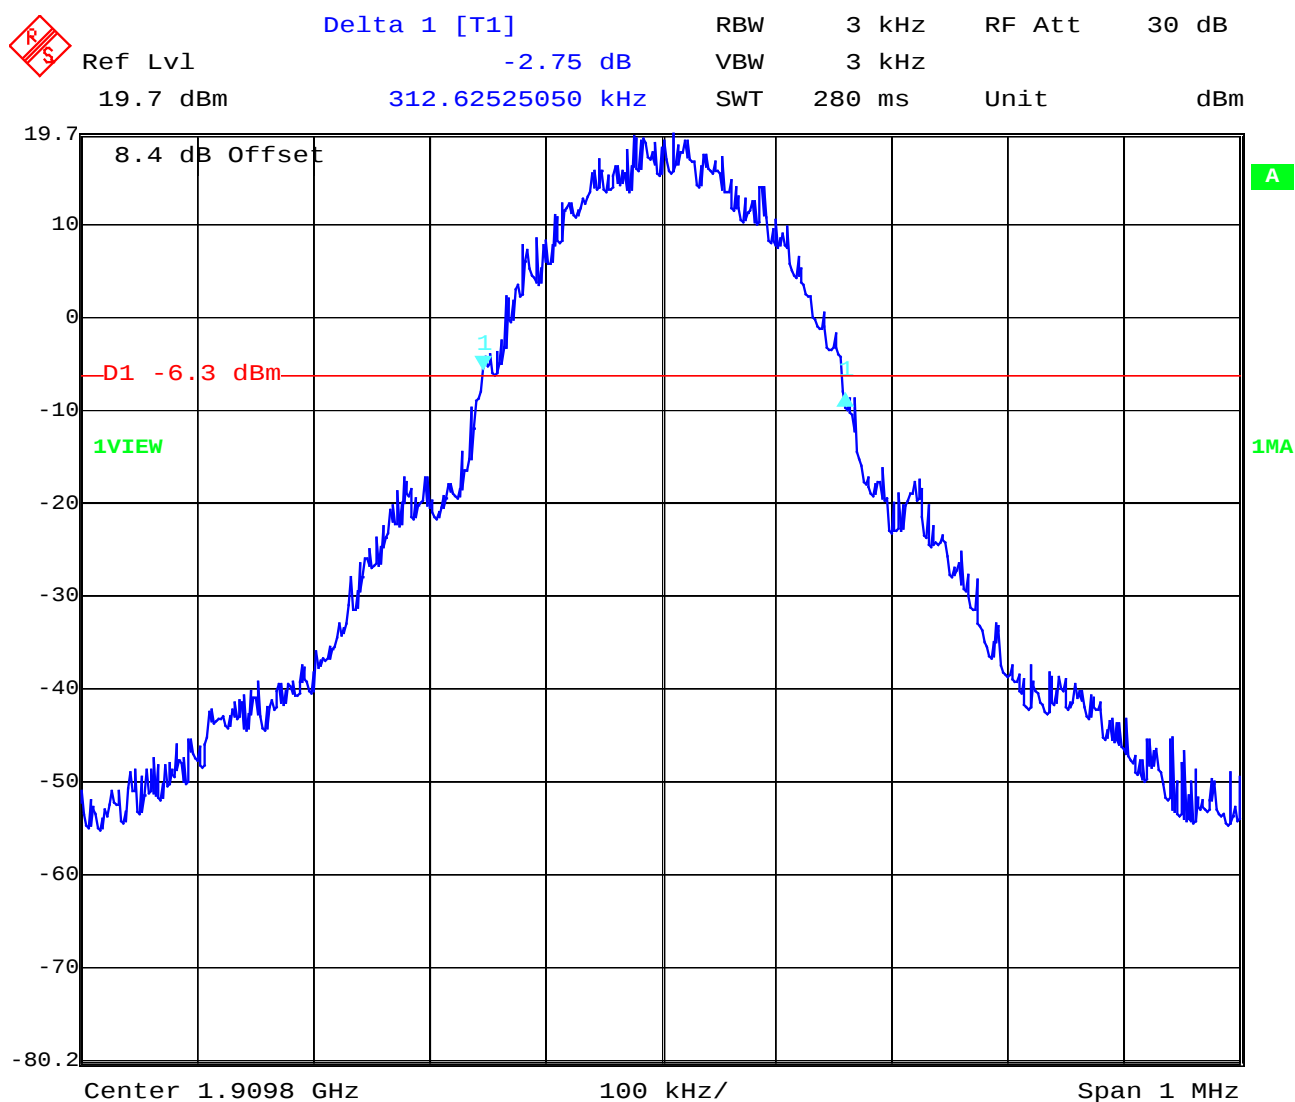

Date: 22. JUL. 2003 08:43:43

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CONDUCTED EMISSIONS


§ 15.107/207

EN 55022 / CISPR 22

EUT: RH-50 with DCV-14, DKU-5, ACP-8E
 Manufacturer: Nokia
 Operating Condition: idle mode 1900
 Test Site: Room 006
 Operator: Berg
 Test Specification: EN 55022 / CISPR 22
 Comment: 110V / 60 Hz
 Start of Test: 24.07.03 / 06:47:41

SCAN TABLE: "EN 55022 V"

Short Description: Voltage Mains 1.60
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458
 Average

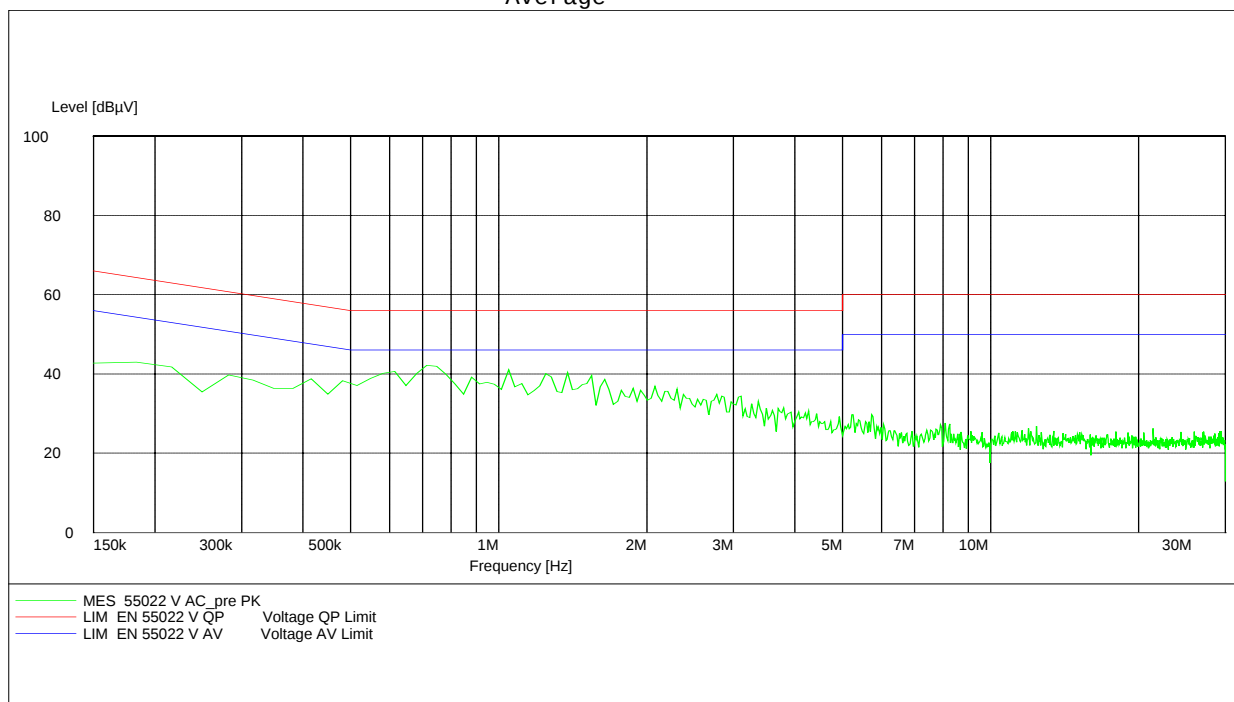

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64

EN 55022 / CISPR 22

EUT: RH-50 with DCV-14, DKU-5, ACP-8E
 Manufacturer: NOKIA
 Operating Condition: idle mode 850
 Test Site: Room 006
 Operator: Berg
 Test Specification: EN 55022 / CISPR 22
 Comment: 110V / 60 Hz
 Start of Test: 24.07.03 / 07:02:17

SCAN TABLE: "EN 55022 V"

Short Description: Voltage Mains 1.60
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458
 Average

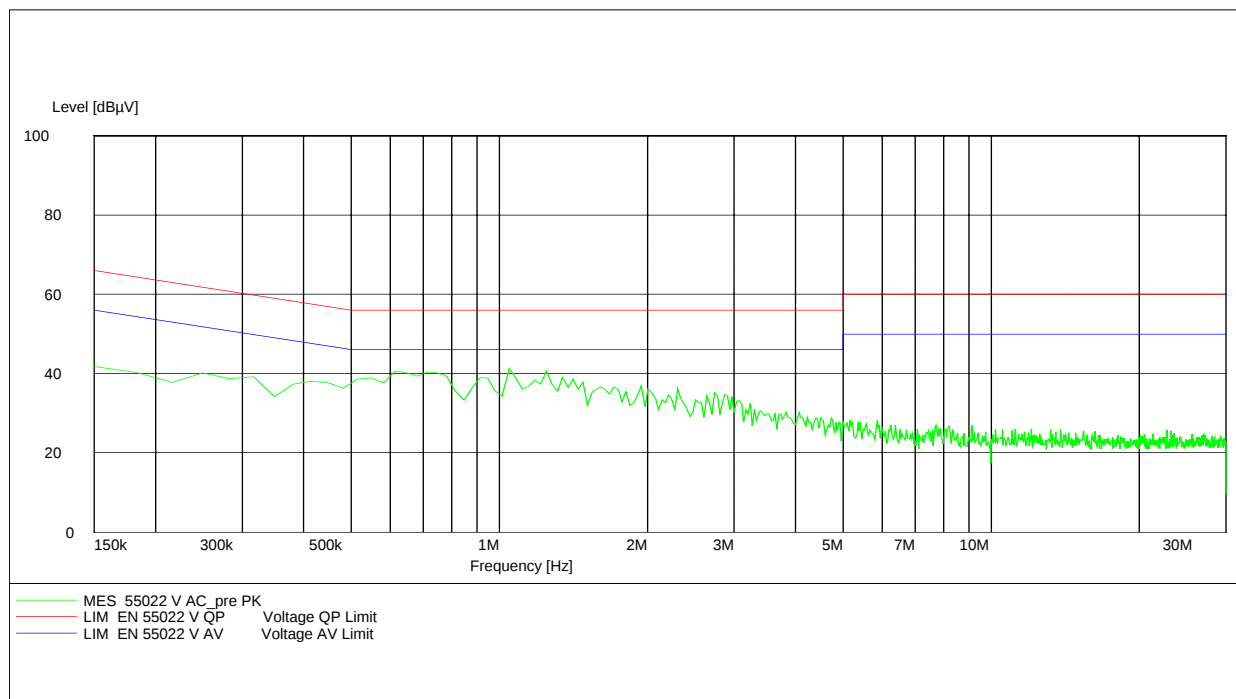

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

EN 55022 / CISPR 22

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24; 64

SCAN TABLE: "EN 55022 V"

EUT: RH-50 with Active Cover, ACP-8E, DCV-14; DKU-5
 Manufacturer: NOKIA
 Operating Condition: Traffic Mode 850
 Test Site: Room 006
 Operator: Berg
 Test Specification: EN 55022 / CISPR 22
 Comment: 110V / 60 Hz
 Start of Test: 24.07.03 / 07:06:26

Short Description: Voltage Mains 1.60
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 7.5 kHz 100.0 ms 10 kHz ESH3-Z5 L1 1458
 Average

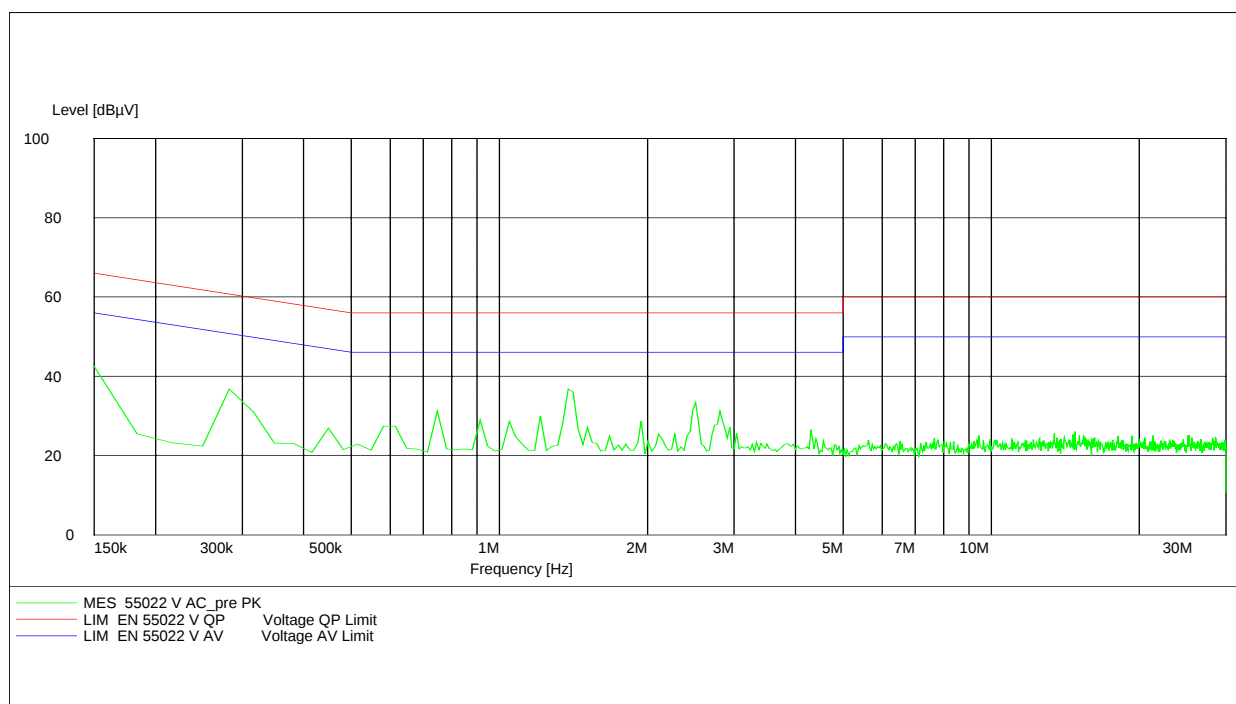

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64

EN 55022 / CISPR 22

EUT: RH-50 with ACP-8E, DKU-5
 Manufacturer: NOKIA
 Operating Condition: traffic mode 1900
 Test Site: Room 006
 Operator: Berg
 Test Specification: EN 55022/ CISPR22
 Comment: 110V / 60 Hz
 Start of Test: 24.07.03 / 06:54:47

SCAN TABLE: "EN 55022 V"

Short Description: Voltage Mains 1.60
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 7.5 kHz 100.0 ms 10 kHz ESH3-Z5 L1 1458
 MaxPeak Average

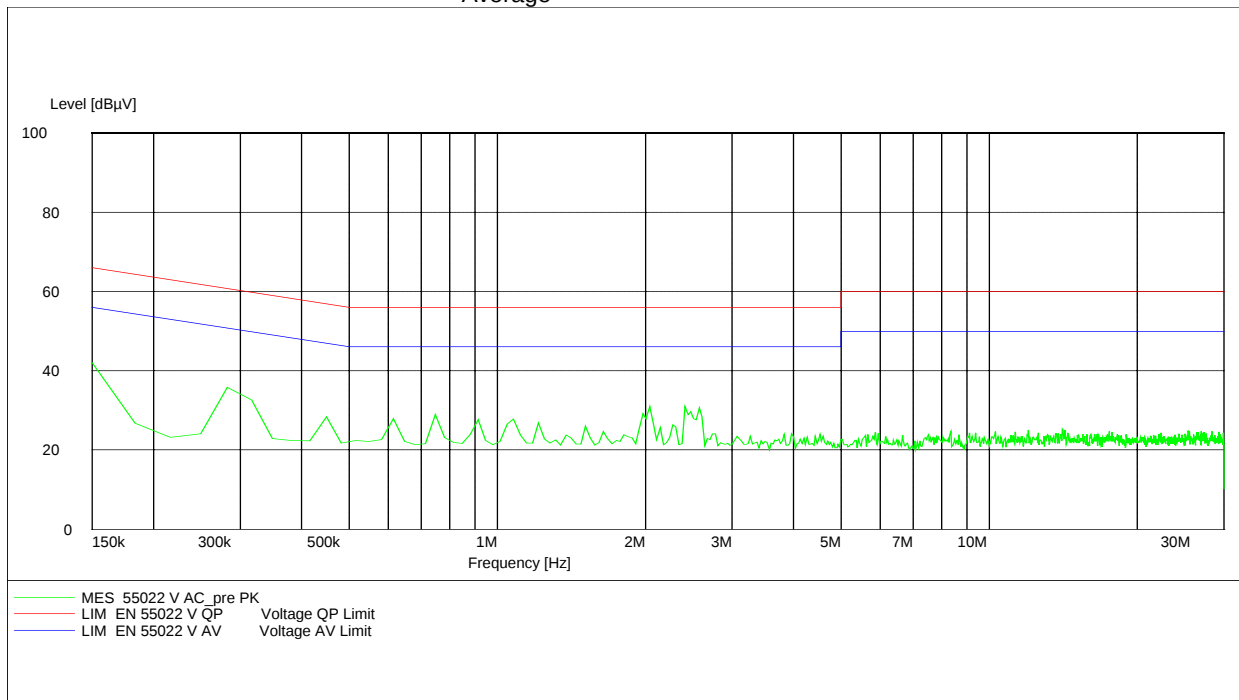

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

PART PCS850

POWER OUTPUT

SUBCLAUSE § 22.913

Summery:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	± 2

Power Measurements:

Conducted:

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5	32.45	32.35
836.4	5	32.43	32.33
848.8	5	32.22	32.12
Measurement uncertainty		±0.5 dB	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $Pin + 2.1 - Pr$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 5).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 22.913 (a). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1\text{dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements (Radiated)

Normal Cover

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
824.2	5	27.40	25.30	21.40	19.30
825.0	5	27.40	25.30	21.40	19.30
836.2	5	27.60	25.50	21.60	19.50
836.6	5	27.60	25.50	21.60	19.50
848.0	5	27.30	25.20	21.30	19.20
848.8	5	27.00	24.90	21.00	18.90
Measurement uncertainty		±3 dB			

Active Cover

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
824.2	5	27.30	25.20	21.30	19.20
825.0	5	27.40	25.30	21.40	19.30
836.2	5	27.60	25.50	21.60	19.50
836.6	5	27.60	25.50	21.60	19.50
848.0	5	27.20	25.10	21.20	19.10
848.8	5	27.10	25.00	21.10	19.00
Measurement uncertainty		±3 dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24, 64

FREQUENCY STABILITY**SUBCLAUSE § 22.355****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.

AFC FREQ ERROR vs. VOLTAGE



Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	20	0,00000106	0,0106
3.4	20	0,00000106	0,0106
3.5	28	0,00000149	0,0149
3.6	23	0,00000122	0,0122
3.7	19	0,00000101	0,0101
3.8	20	0,00000106	0,0106
3.9	28	0,00000149	0,0149
4.0	22	0,00000117	0,0117
4.1	21	0,00000112	0,0112
4.2	29	0,00000154	0,0154
4.3	24	0,00000128	0,0128
4.4	23	0,00000122	0,0122

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	23	0,00000122	0,0122
-20	22	0,00000117	0,0117
-10	20	0,00000106	0,0106
±0.0	24	0,00000128	0,0128
+10	21	0,00000112	0,0112
+20	19	0,00000101	0,0101
+30	26	0,00000138	0,0138
+40	30	0,00000160	0,0160
+50	34	0,00000181	0,0181
+60	40	0,00000213	0,0213

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24, 64

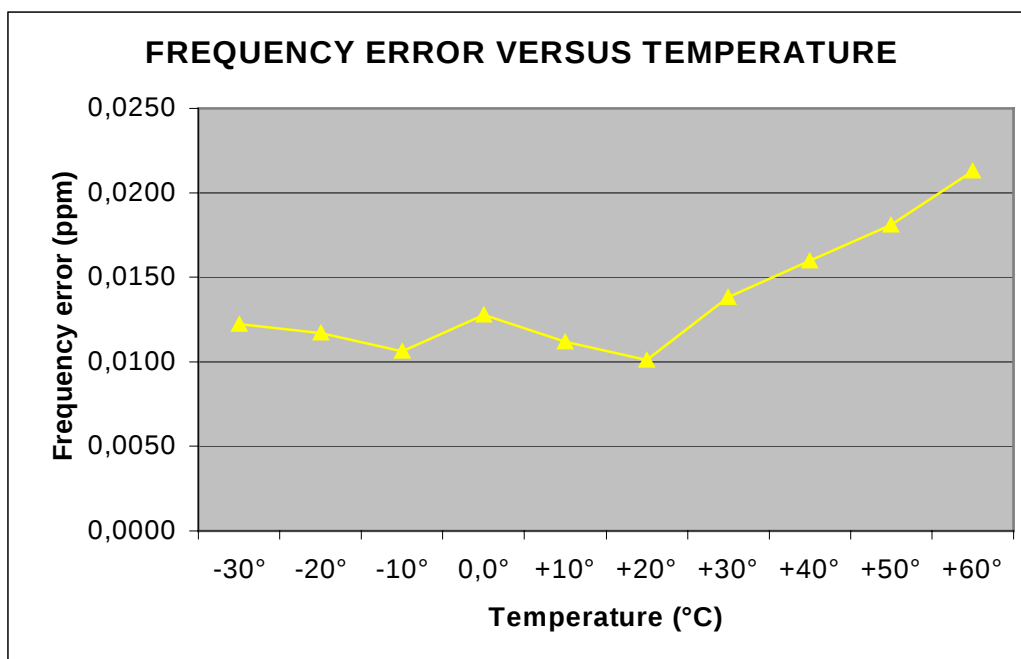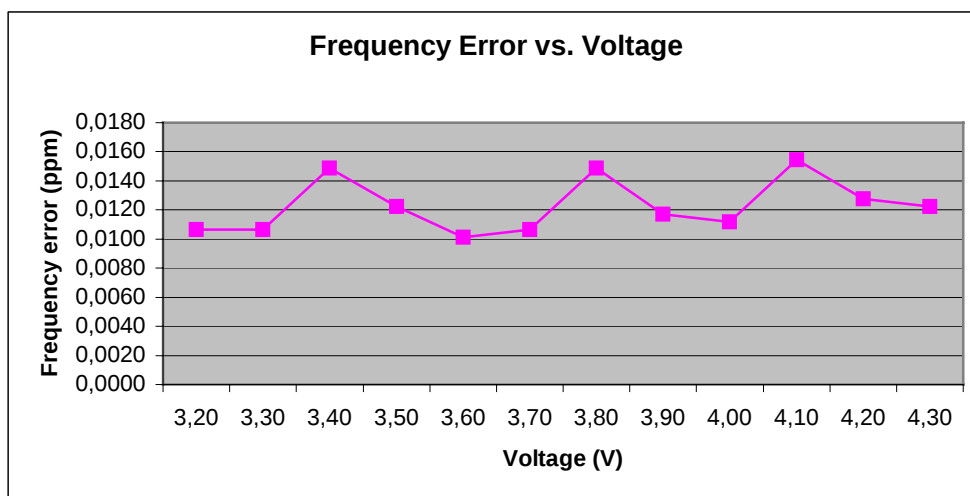

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

EMISSIONS LIMITS**§22.917****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

Measurement Limit:

Sec. 22.917 Emission Limits.

- (a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

As can be seen from this data, the emissions from the test item were within the specification limit.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission ERP (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 128					
824,2		25.30	-13.0 (38.30 dBc)		carrier
1648.4		-36.10		61.40	complies
CH 189					
836,4		25.50	-13.0 (38.50 dBc)		carrier
1672.8		-36.20		61.70	complies
CH 251					
848,8		25.00	-13.0 (38.00 dBc)		carrier
1697.6		-36.00		61.00	complies
Measurement uncertainty		± 0.5dB			

Sample calculation:

Freg	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result	ERP	Substitution Antenna
MHz	dBμV	dBm	dB	dBd	dB	dBm	dBm	
836.4		37.67		-10.50	1.67	25.50		UHAP chwarzbeck S/N 460
1672.8		-39.4	8.4		3.10	-34.10	-36.20*	EMCO 3115 S/N 3088


ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

*ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 128 (up to 4 GHz)

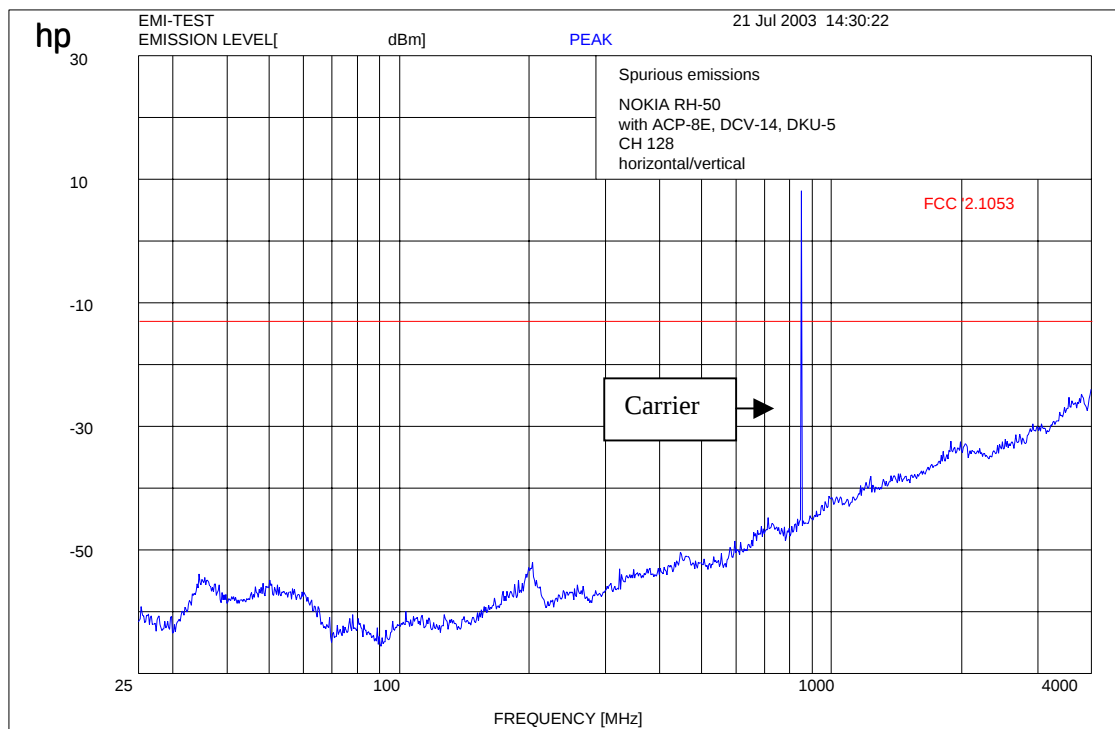


$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

Channel 128 (up to 12 GHz)

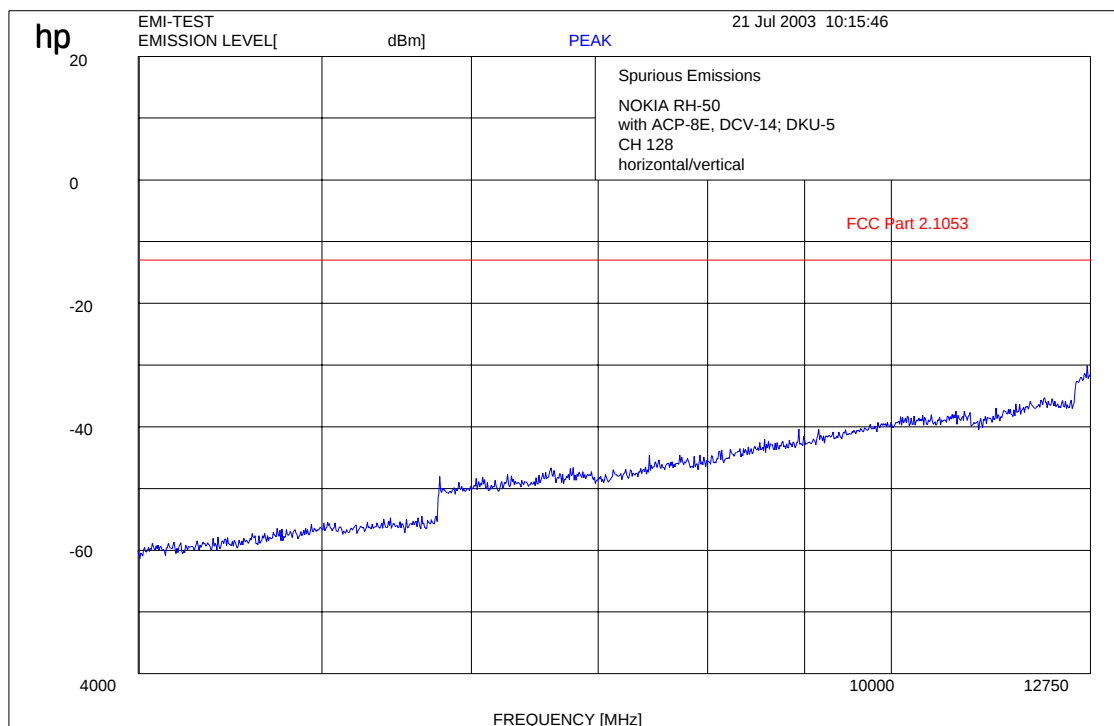

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 128 :- 25 GHz



Ref Lvl

30 dBm

RBW

1 MHz

RF Att

10 dB

VBW


1 MHz

SWT

74 ms

Unit


dBm

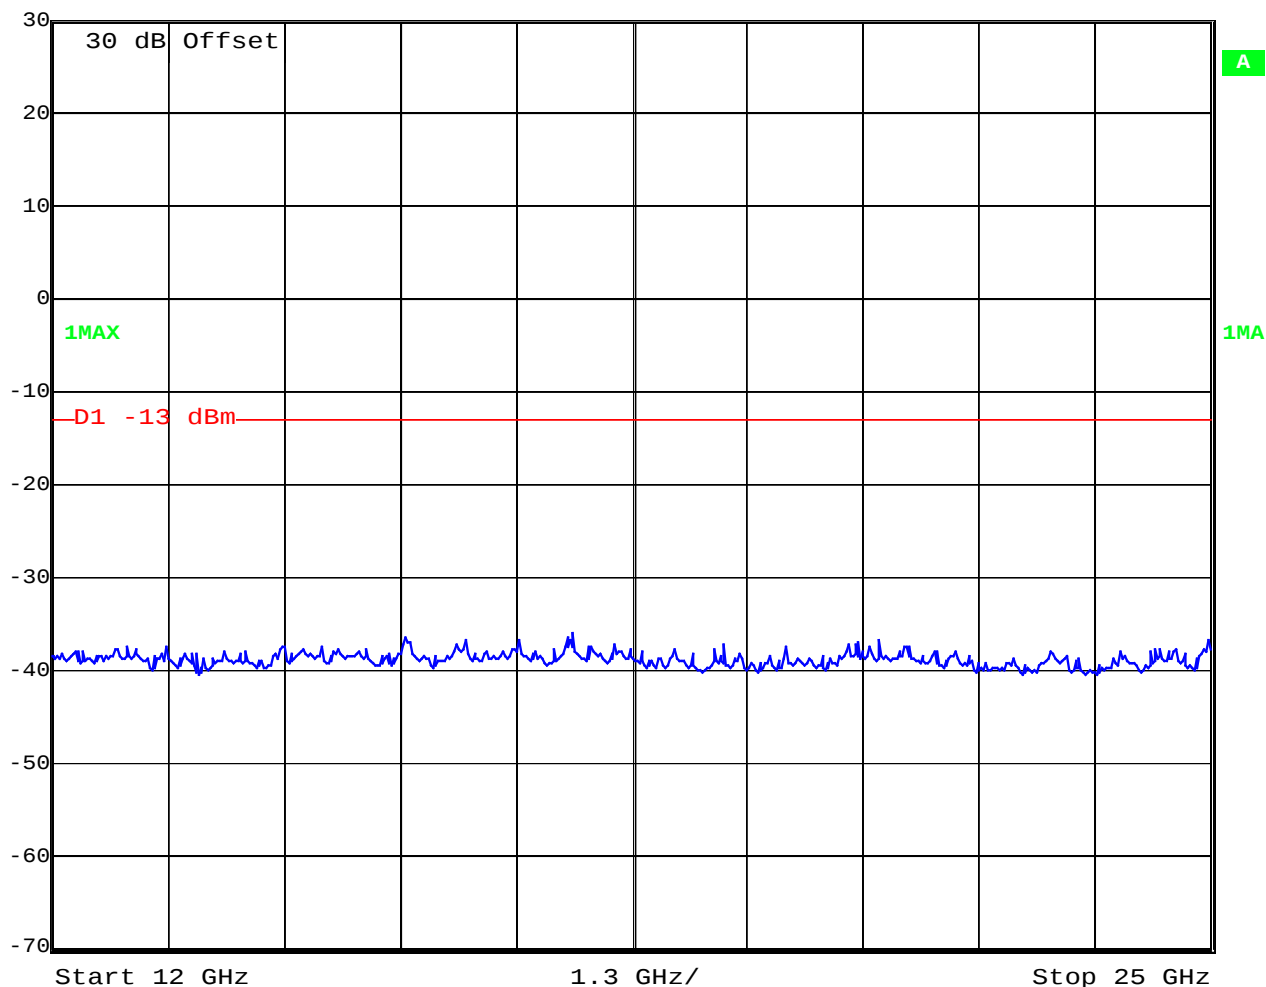

Date: 22. JUL. 2003 07:17:52

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 189 (up to 4 GHz)

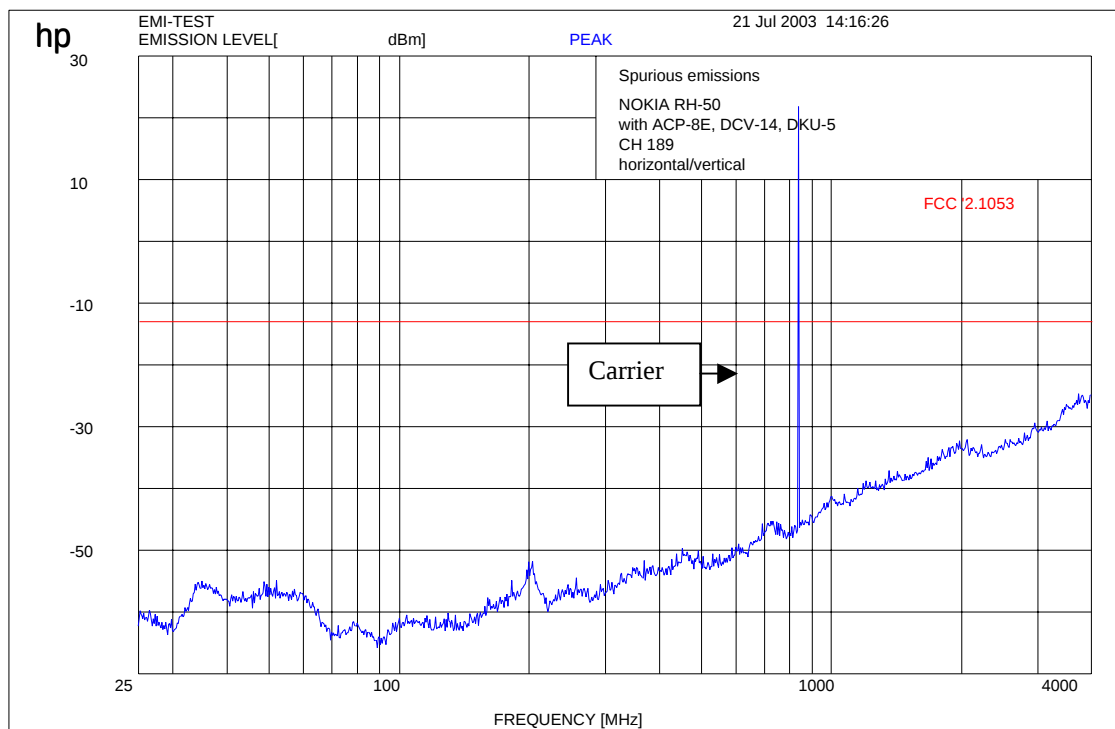


$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

Channel 189 (up to 12 GHz)

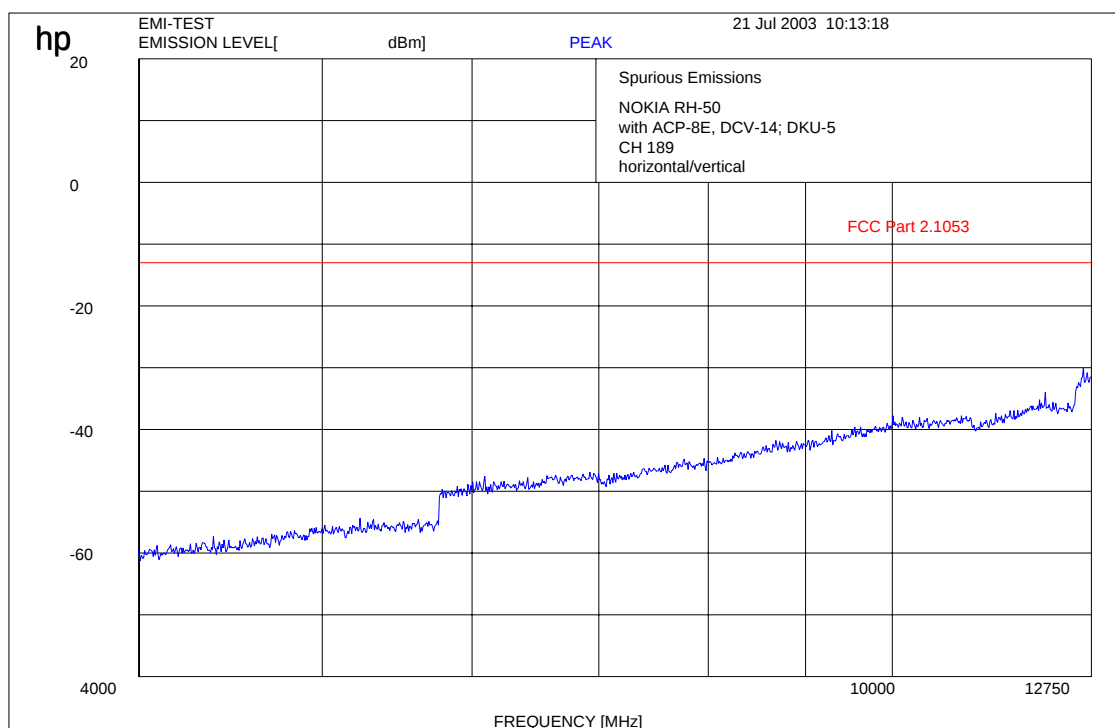


$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 189 : -25 GHz

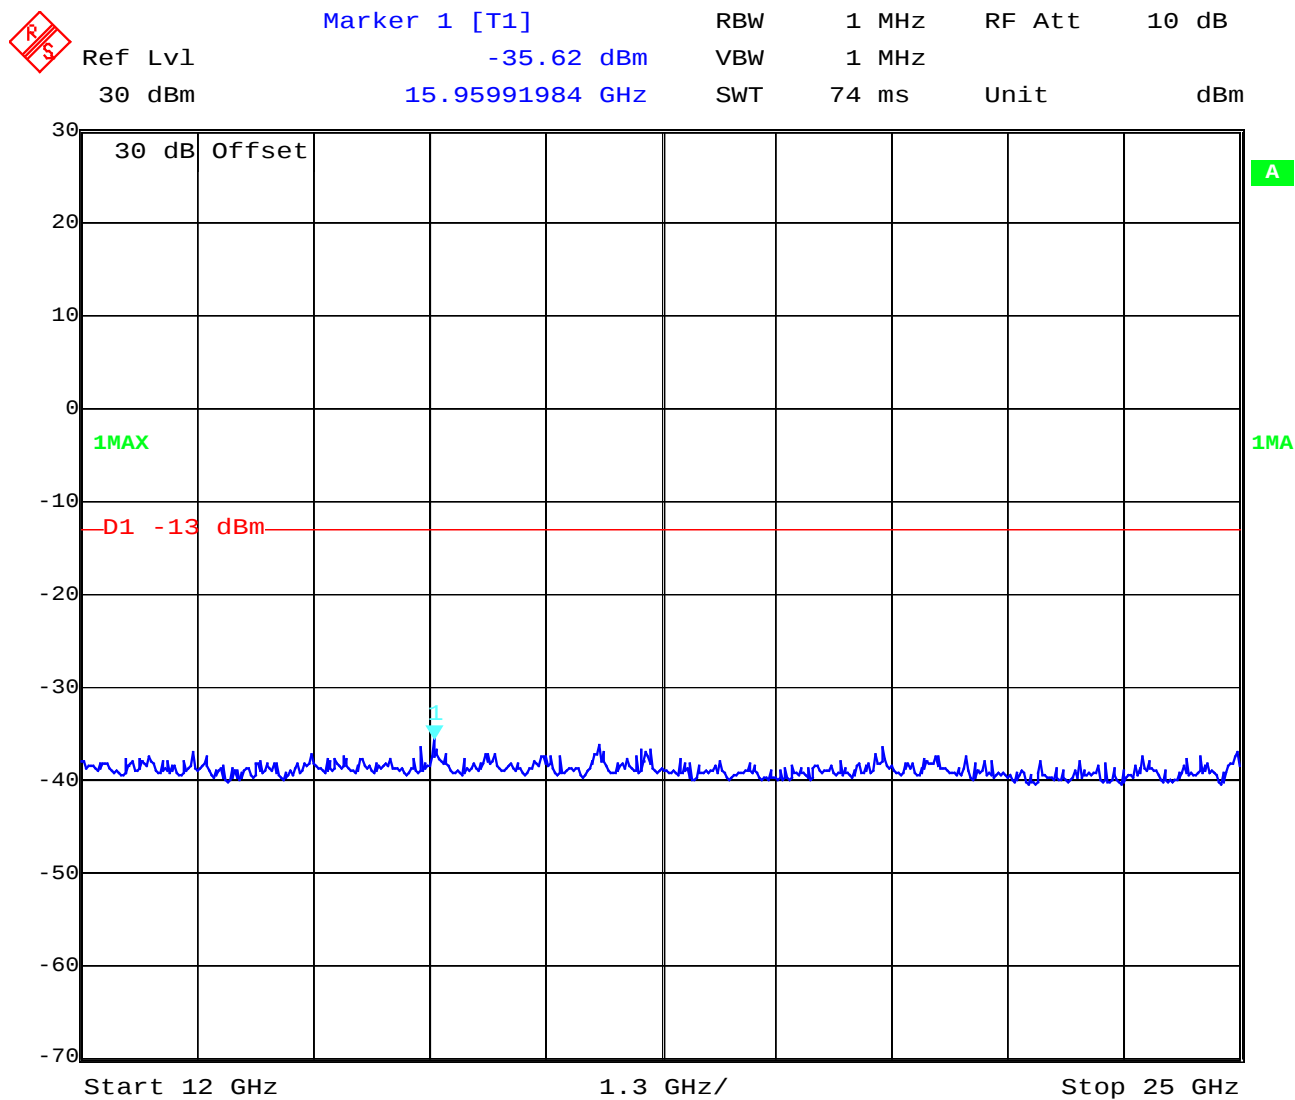


Date: 22. JUL. 2003 07:18:16


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 189 with Active and Normal Cover (up to 4 GHz)

Active Cover

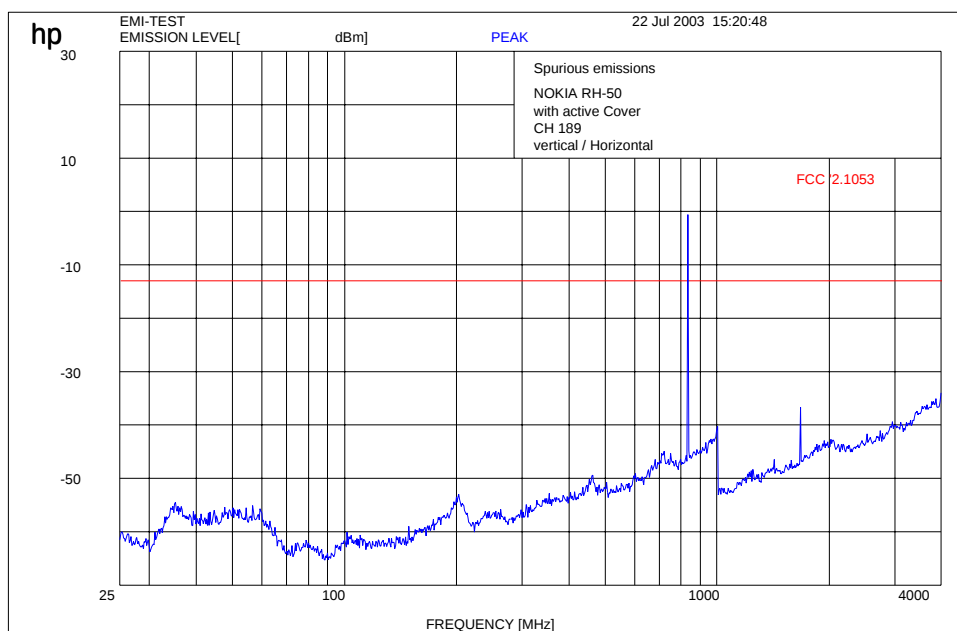

Normal Cover

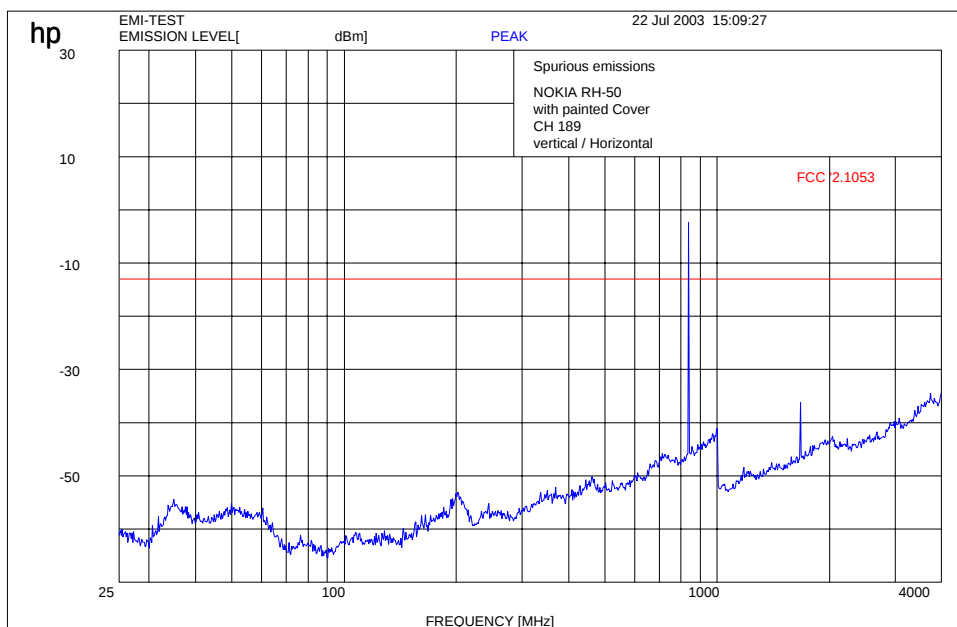

above 4 GHz no difference between Normal and Active Cover


(in the 1-4 GHz ,these measurements were done without a 10 dB attenuator to show the difference of the harmonics)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24

Channel 251 up to 4 GHz

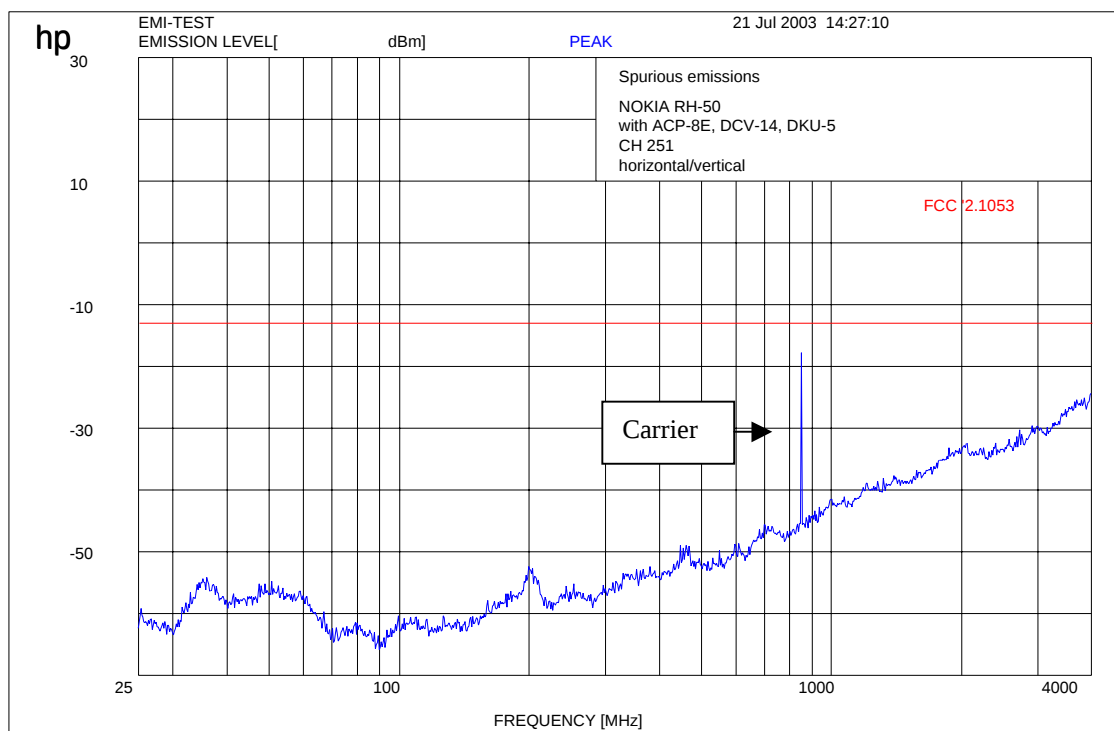


$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 251 up to 12 GHz

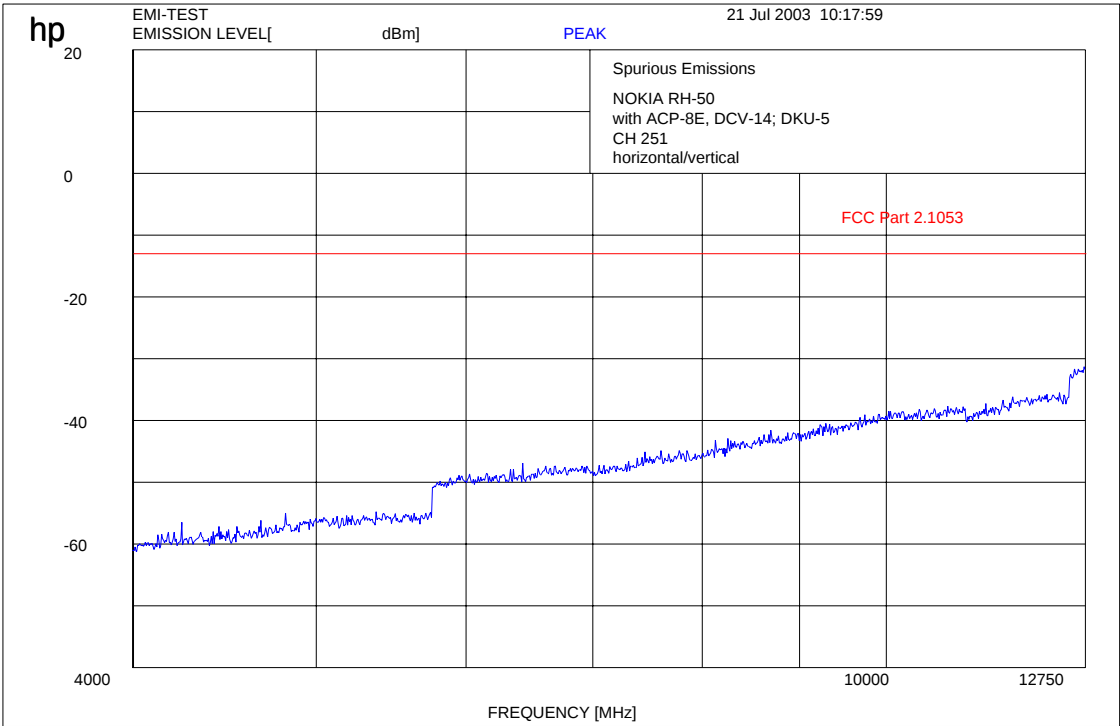

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz
Carrier suppressed with a rejection filter

Channel 251 : -25 GHz

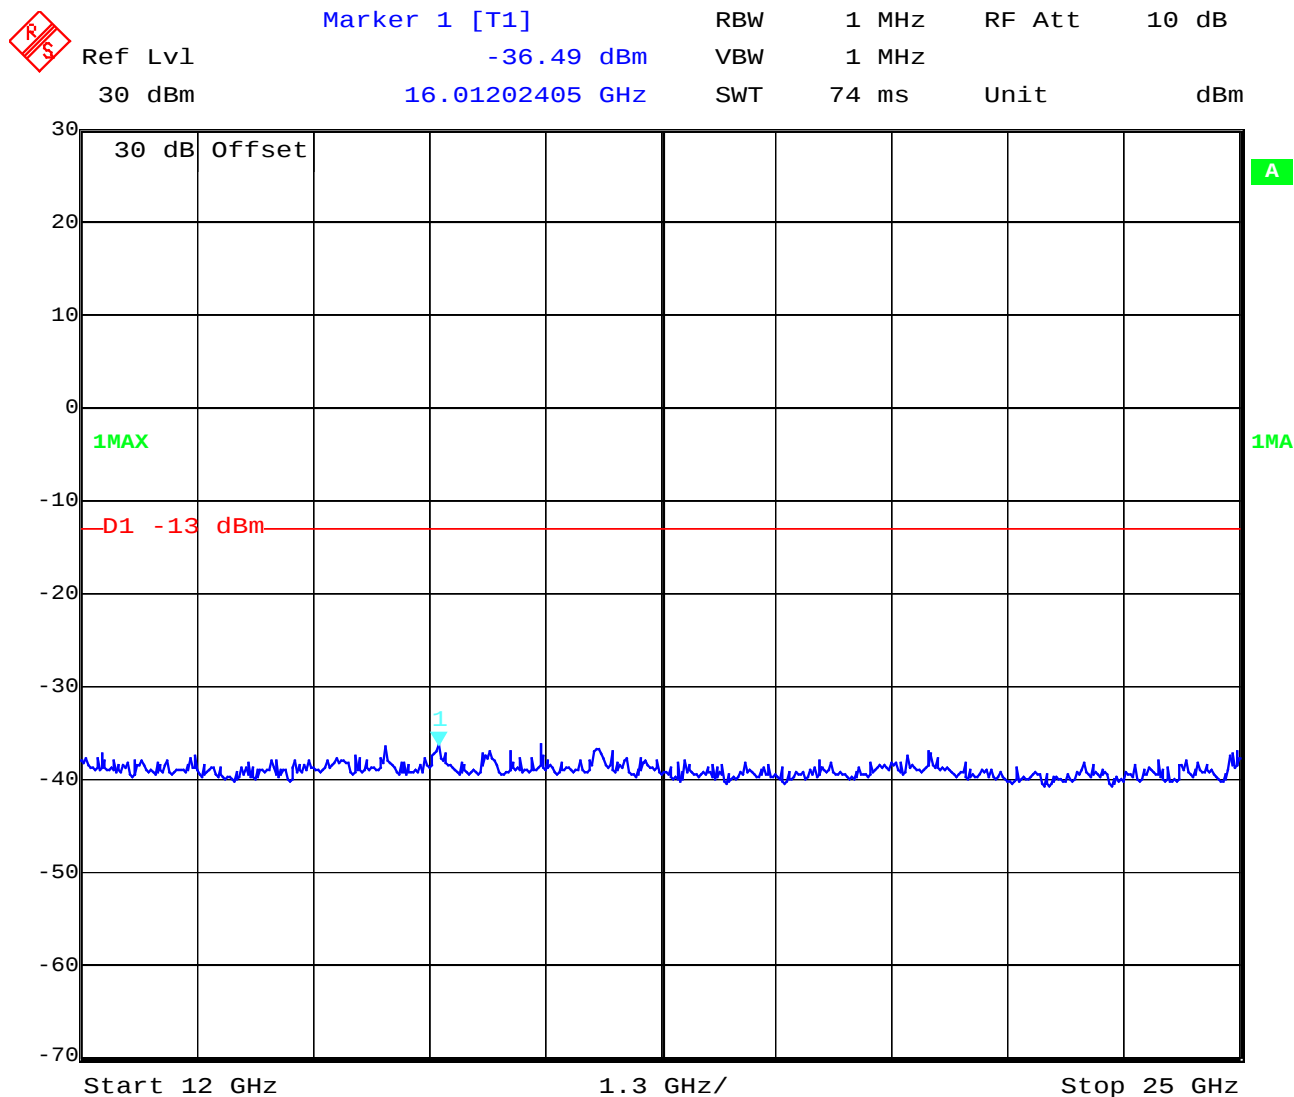


Date: 22. JUL. 2003 07:18:47

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 189 (this is valid for all 3 channels and up to 4 GHz)

Idle-Mode

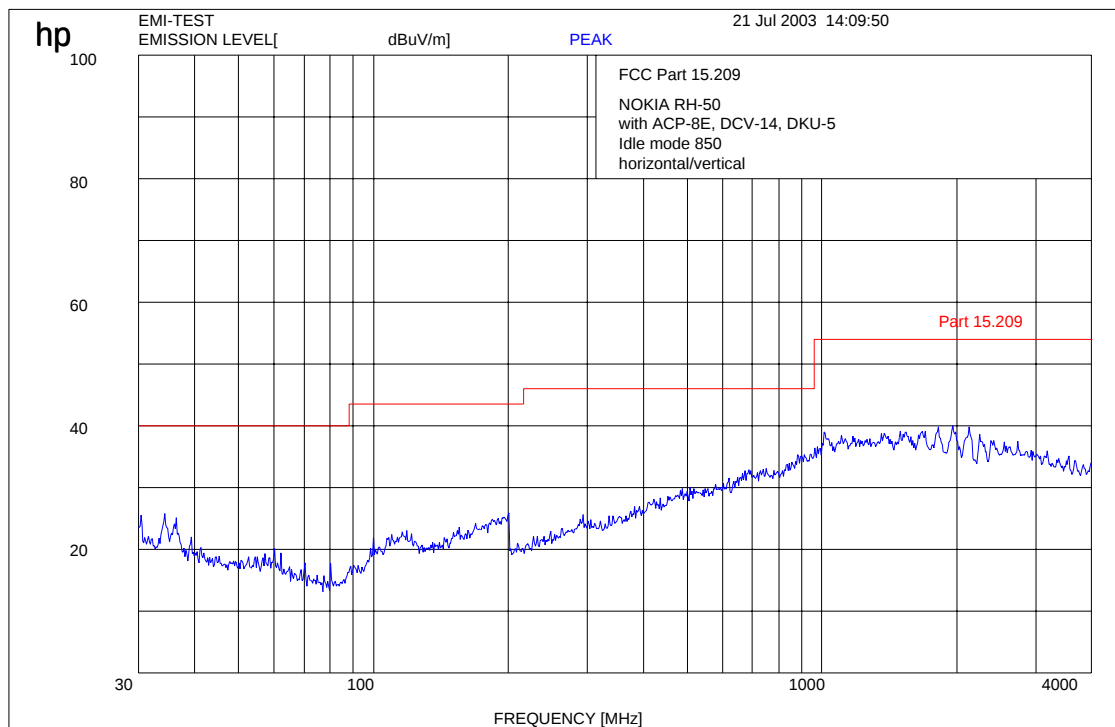

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz


$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64


Channel 189 (this is valid for all 3 channels and up to 12 GHz)
Idle-Mode

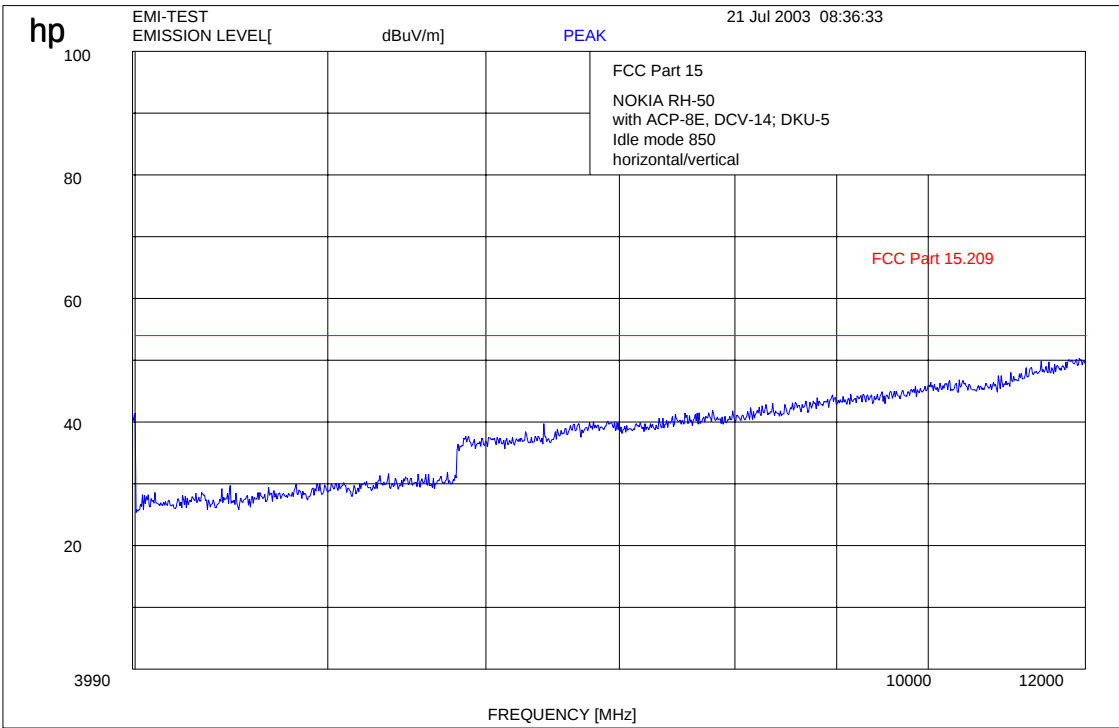

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Channel 189 (this is valid for all 3 channels and up to 25 GHz)

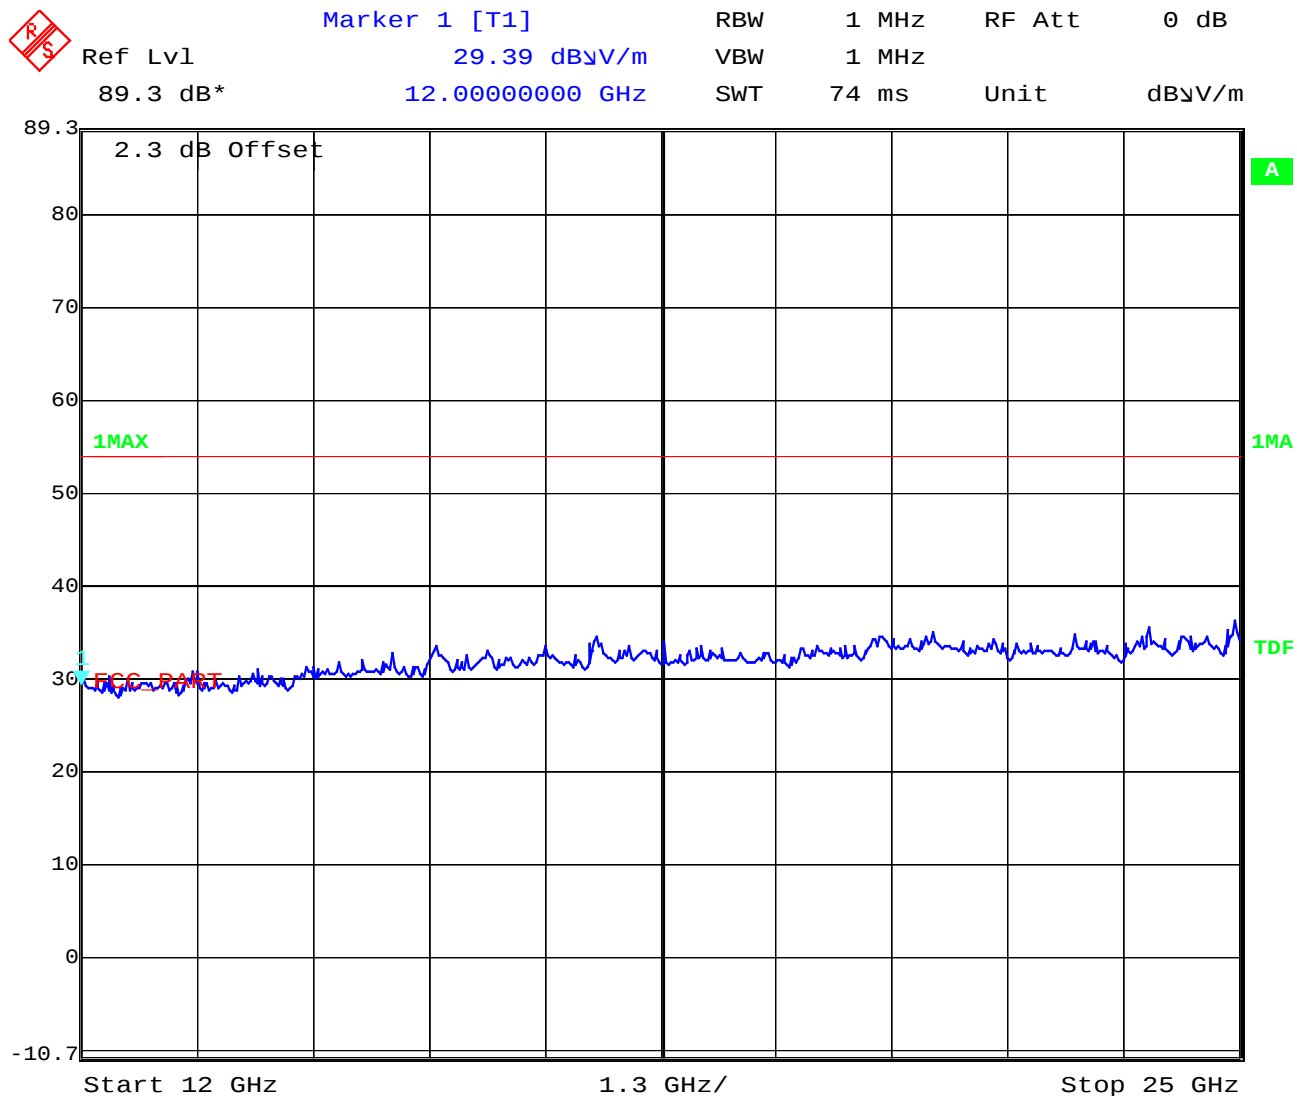

Date: 22.JUL.2003 06:58:37

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CONDUCTED SPURIOUS EMISSIONS

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

Measurement Limit:


Sec. 22.917 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 128					
824,2		32.45	-13.0 (45.45 dBc)		carrier
823.00		-27.62		60.07	complies
823.991		-15.80		48.25	complies
2472.19		-27.17		59.62	complies
CH 189					
836,4		32.43	-13.0 (45.43 dBc)		carrier
835.00		-33.34		65.77	complies
1660.18		-35.94		68.37	complies
2483.38		-31.35		63.78	complies
CH 251					
848,8		32.22	-13.0 (45.22 dBc)		carrier
842.25		-37.96		70.18	complies
849.00		-13.32		45.54	complies
1672.75		-39.55		71.77	complies
Measurement uncertainty		± 0.5dB			

Measurements:

Channel: 128

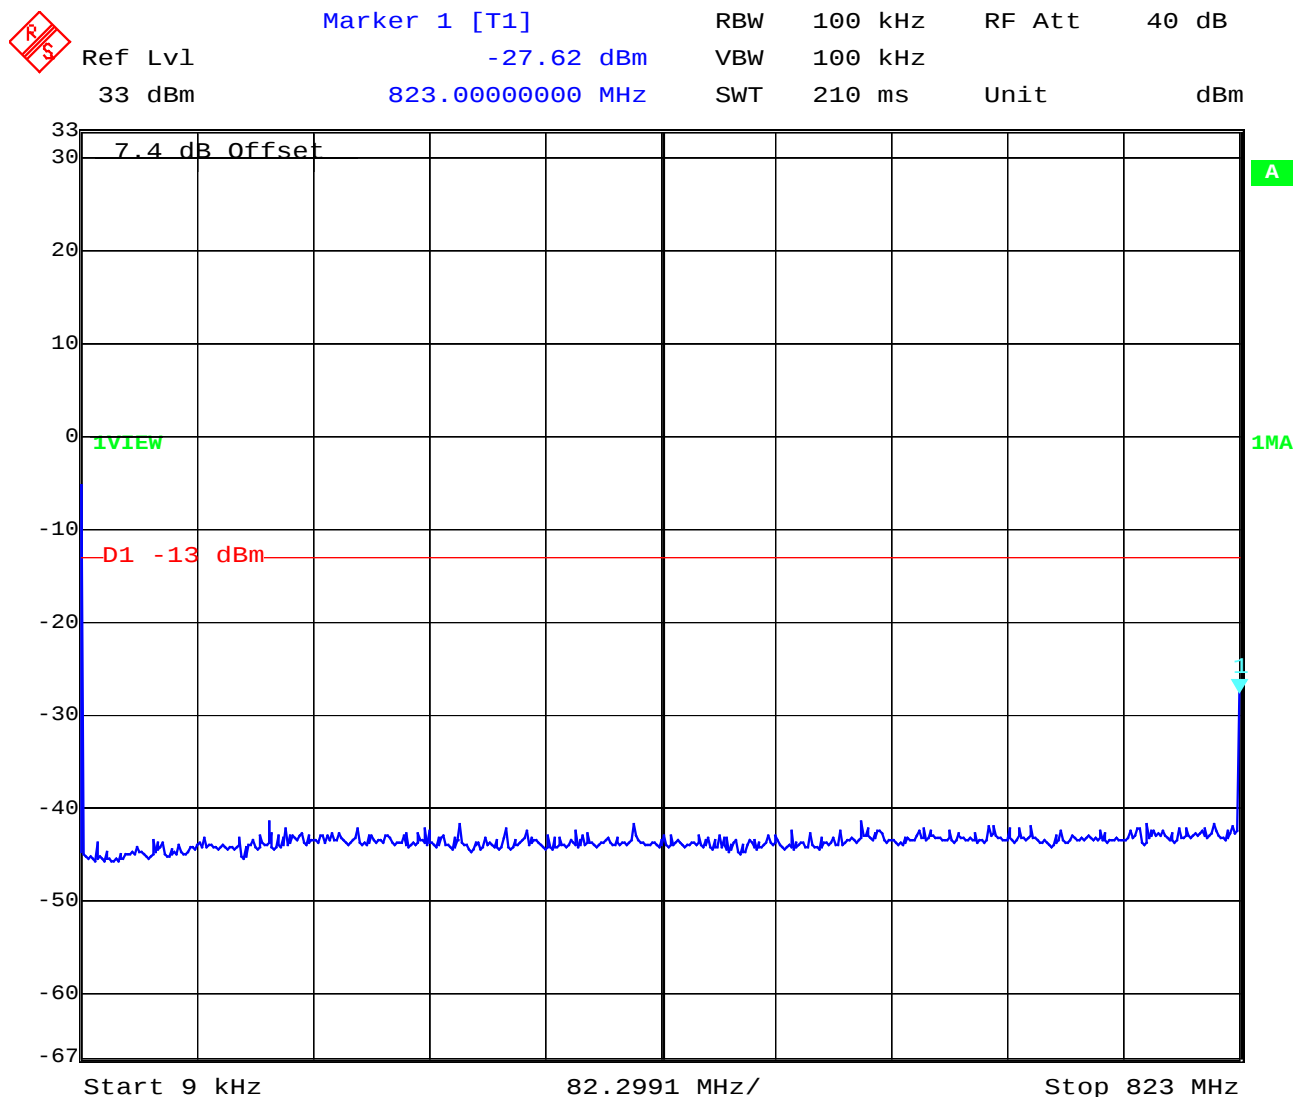


Date: 22. JUL. 2003 08:54:29

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 128



Ref Lvl 33 dBm
 Marker 1 [T1] 823.99198397 MHz
 RBW 3 kHz
 VBW 3 kHz
 RF Att 40 dB
 SWT 280 ms
 Unit dBm

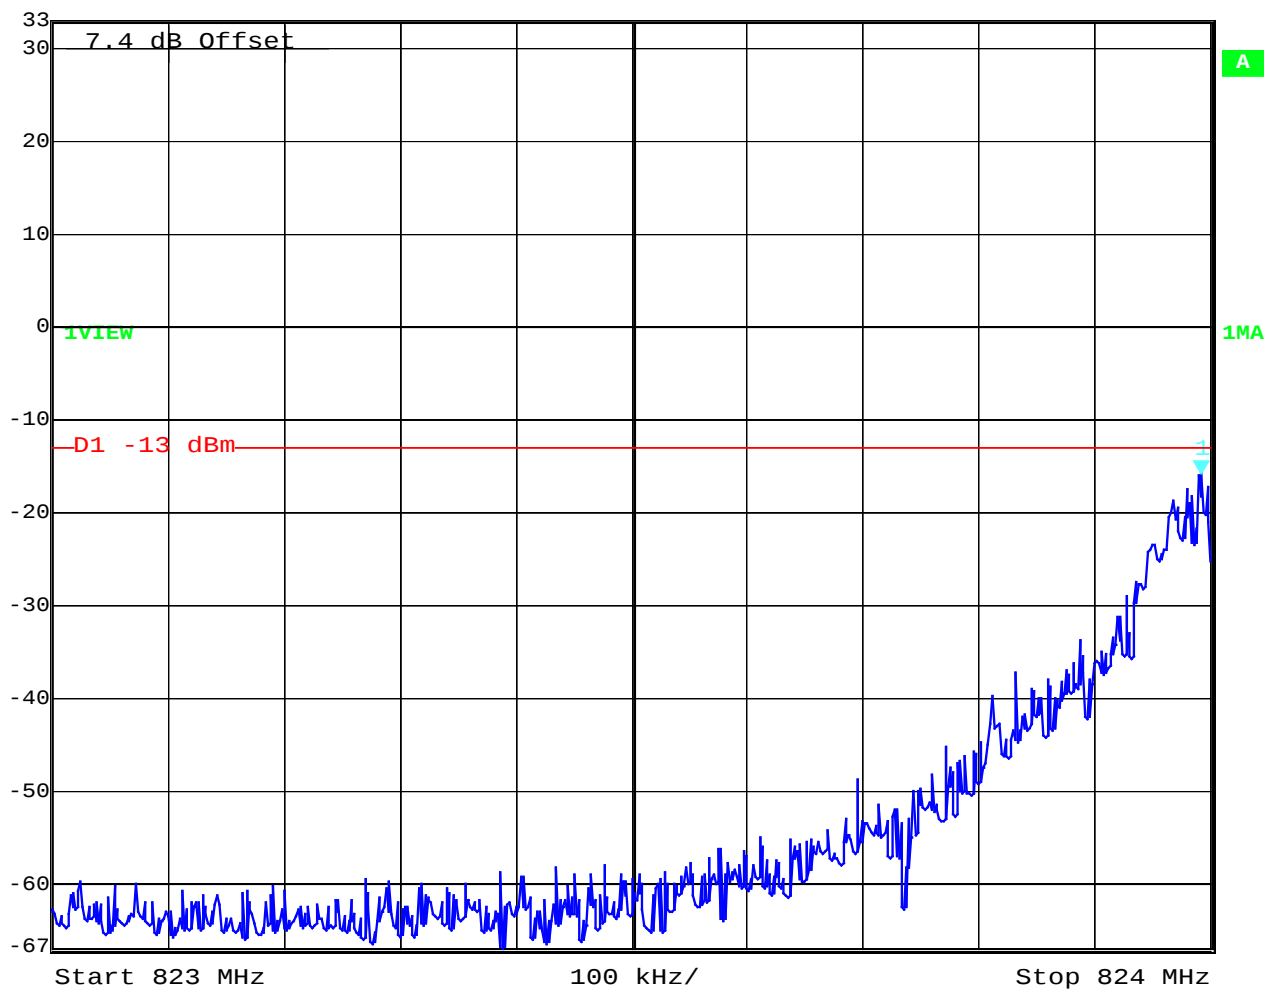

Date: 22. JUL. 2003 09:12:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 128



Ref Lvl
33 dBm

Marker 1 [T1]

-27.17 dBm

2.47219439 GHz

RBW 100 kHz

VBW 100 kHz


SWT 6.2 s

RF Att

40 dB

Unit

dBm

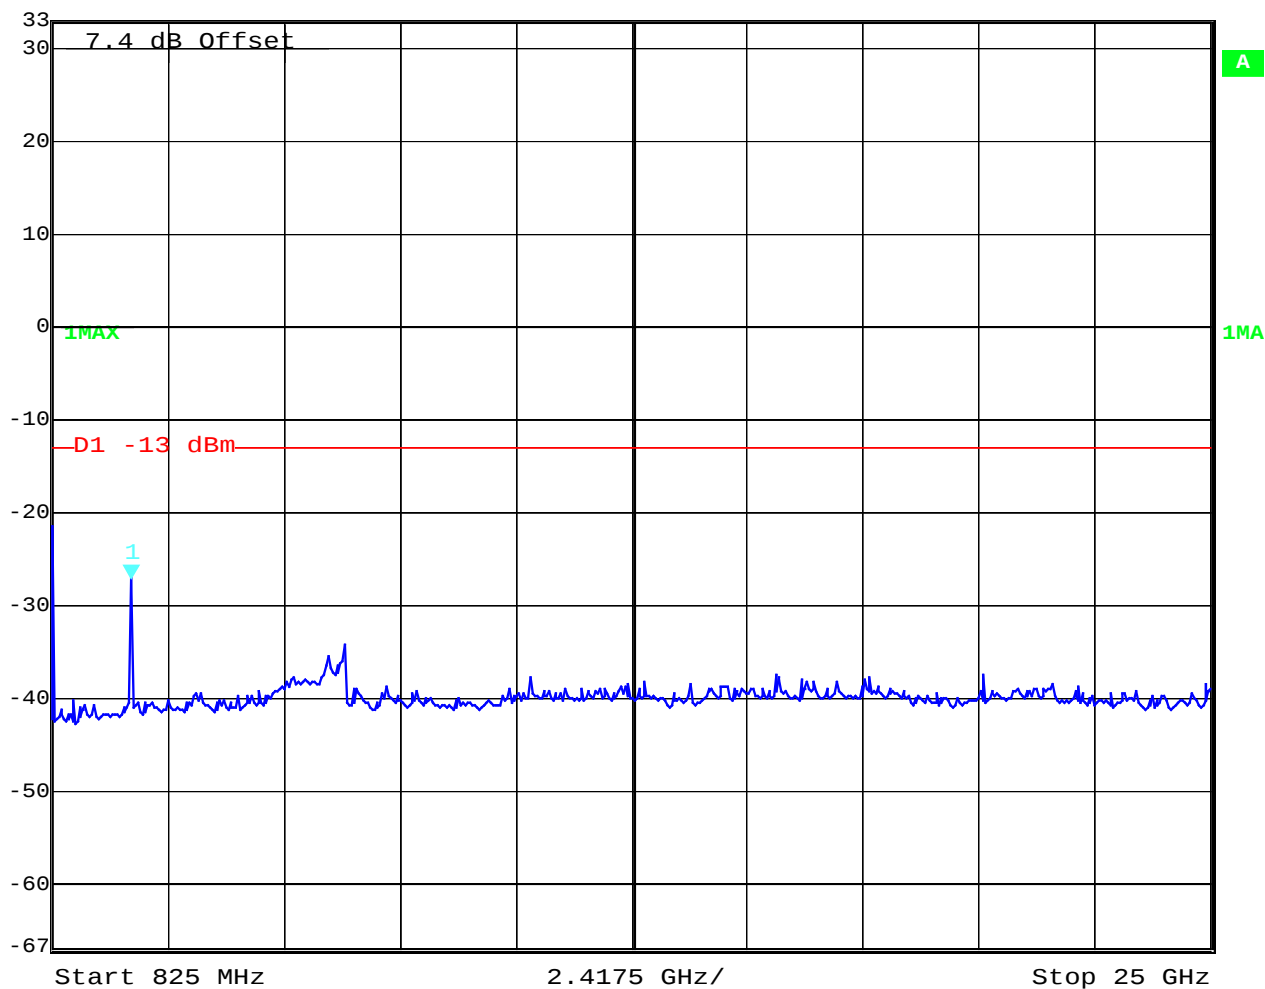

Date: 22. JUL. 2003 09:13:55

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

Channel 189



Ref Lvl 33 dBm
 Marker 1 [T1] -33.34 dBm
 835.00000000 MHz
 RBW 100 kHz
 VBW 100 kHz
 RF Att 40 dB
 SWT 210 ms
 Unit dBm

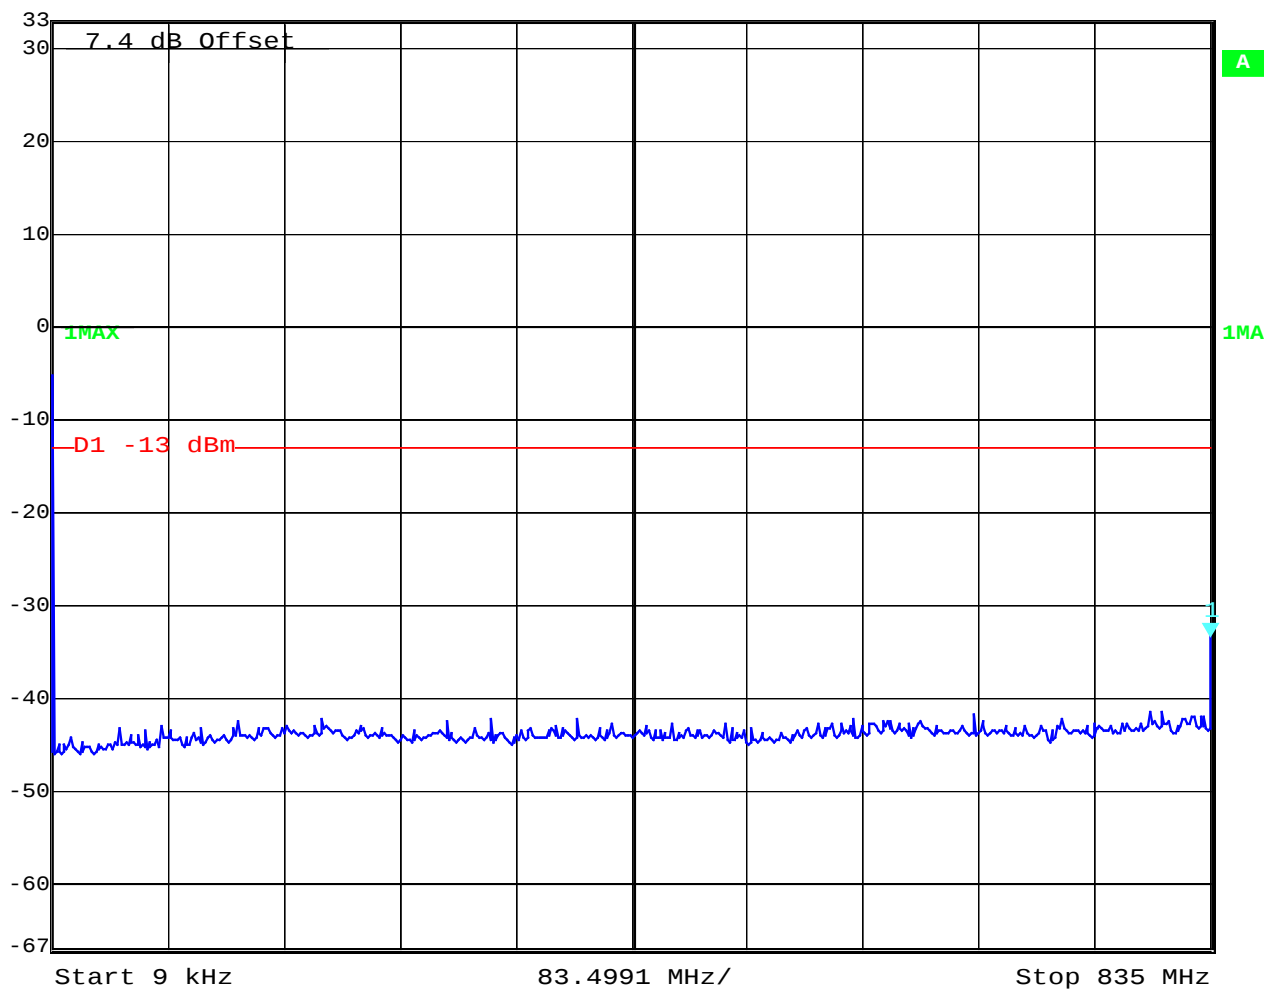


Date: 22. JUL. 2003 09:16:20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

Channel 189

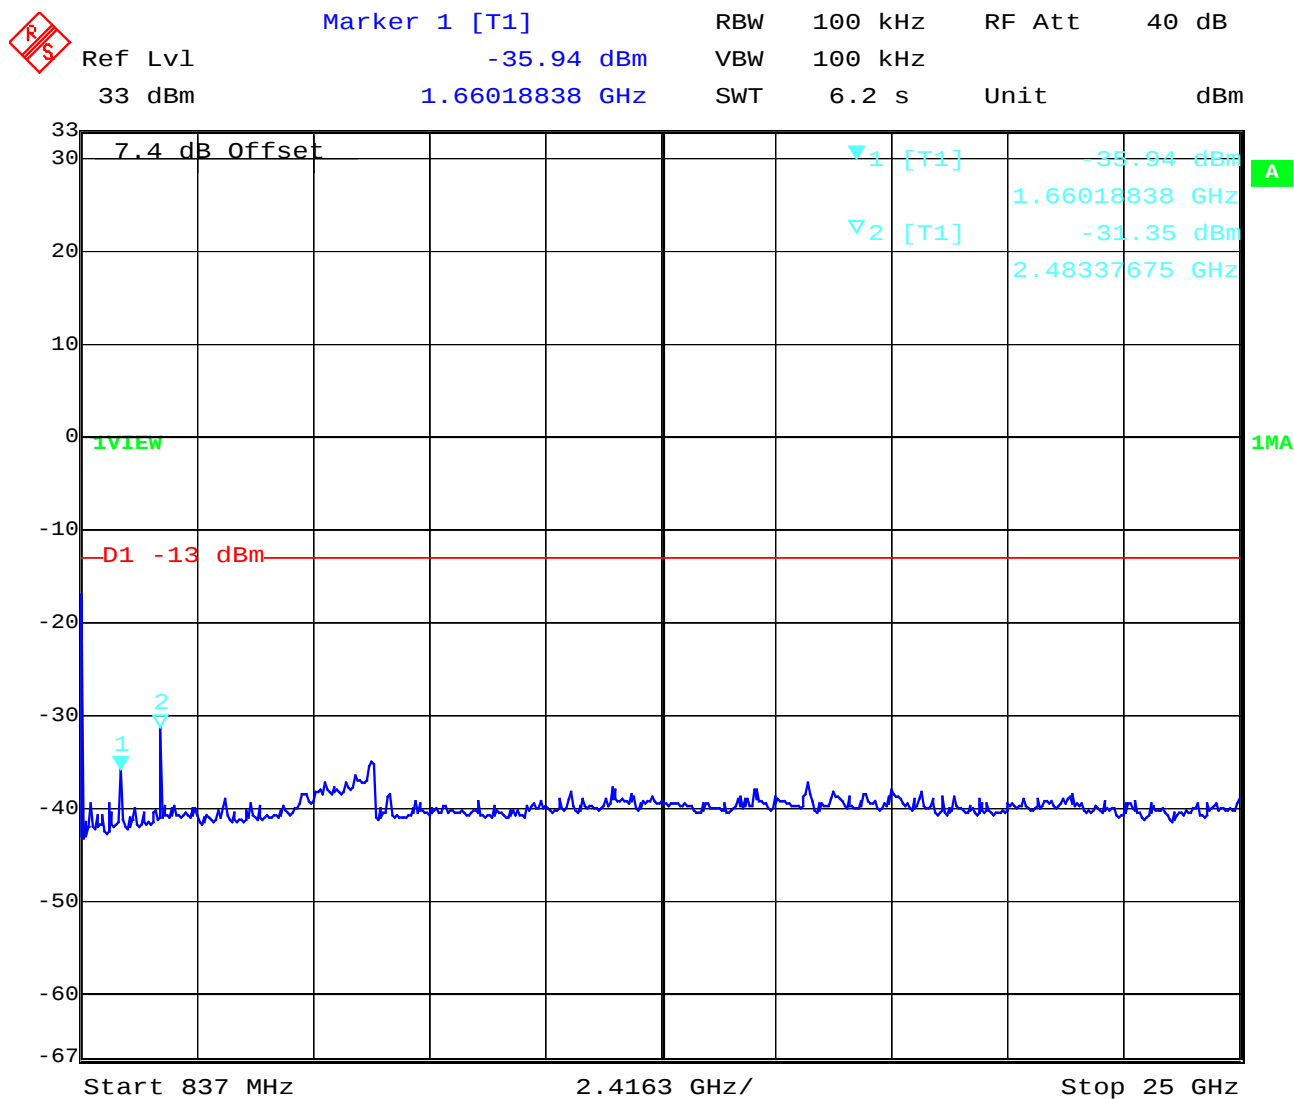

Date: 22. JUL. 2003 09:18:26

Channel 251

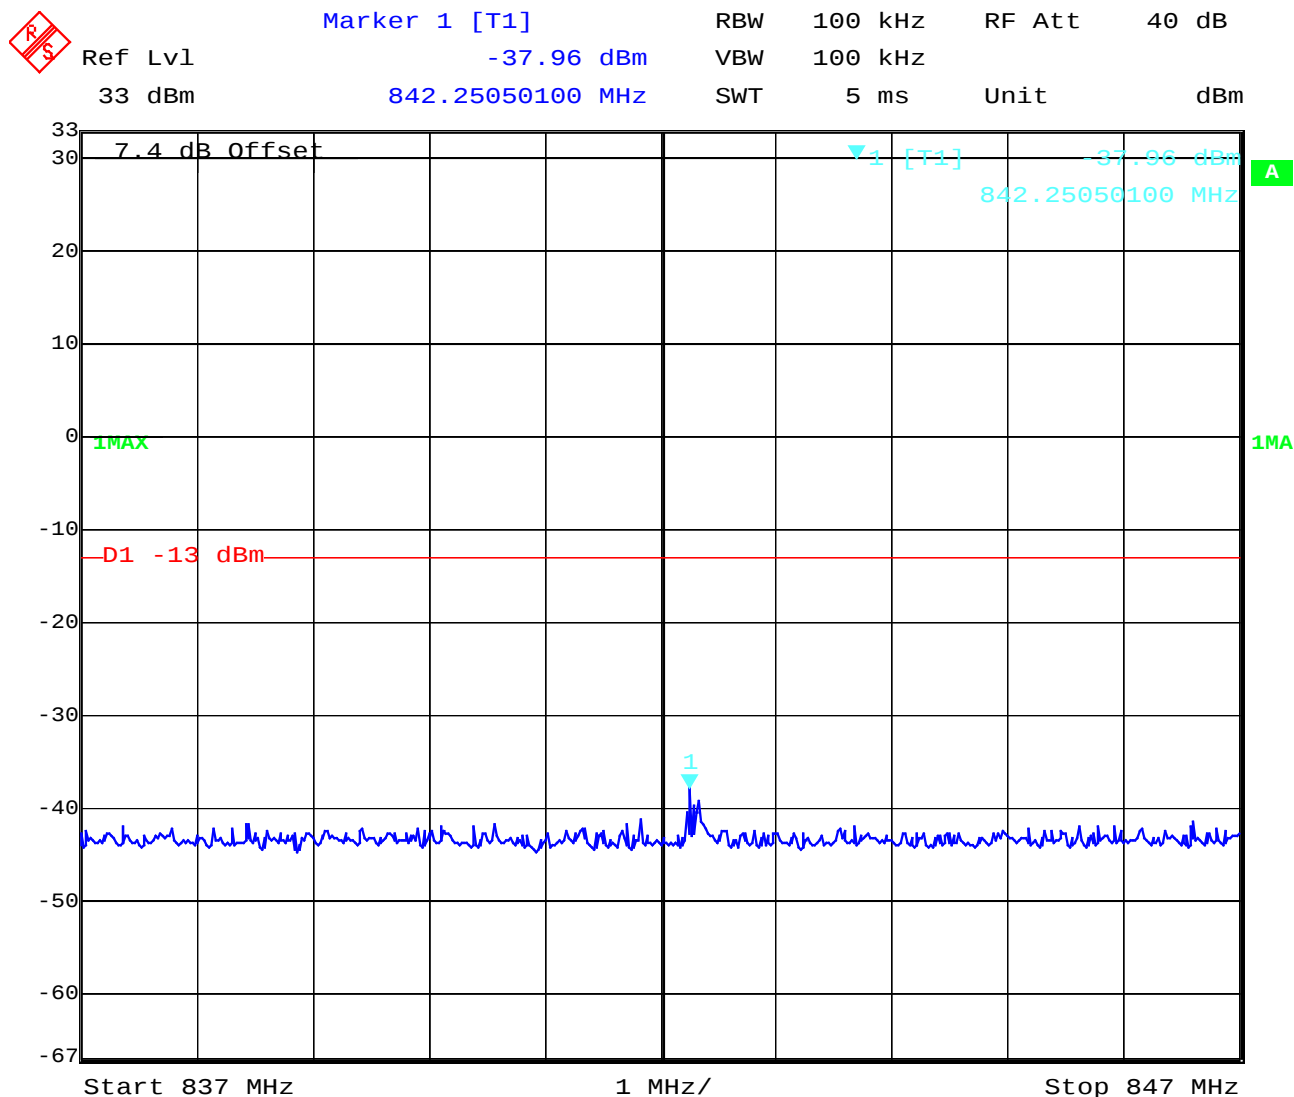


Date: 22.JUL.2003 09:21:08

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 251

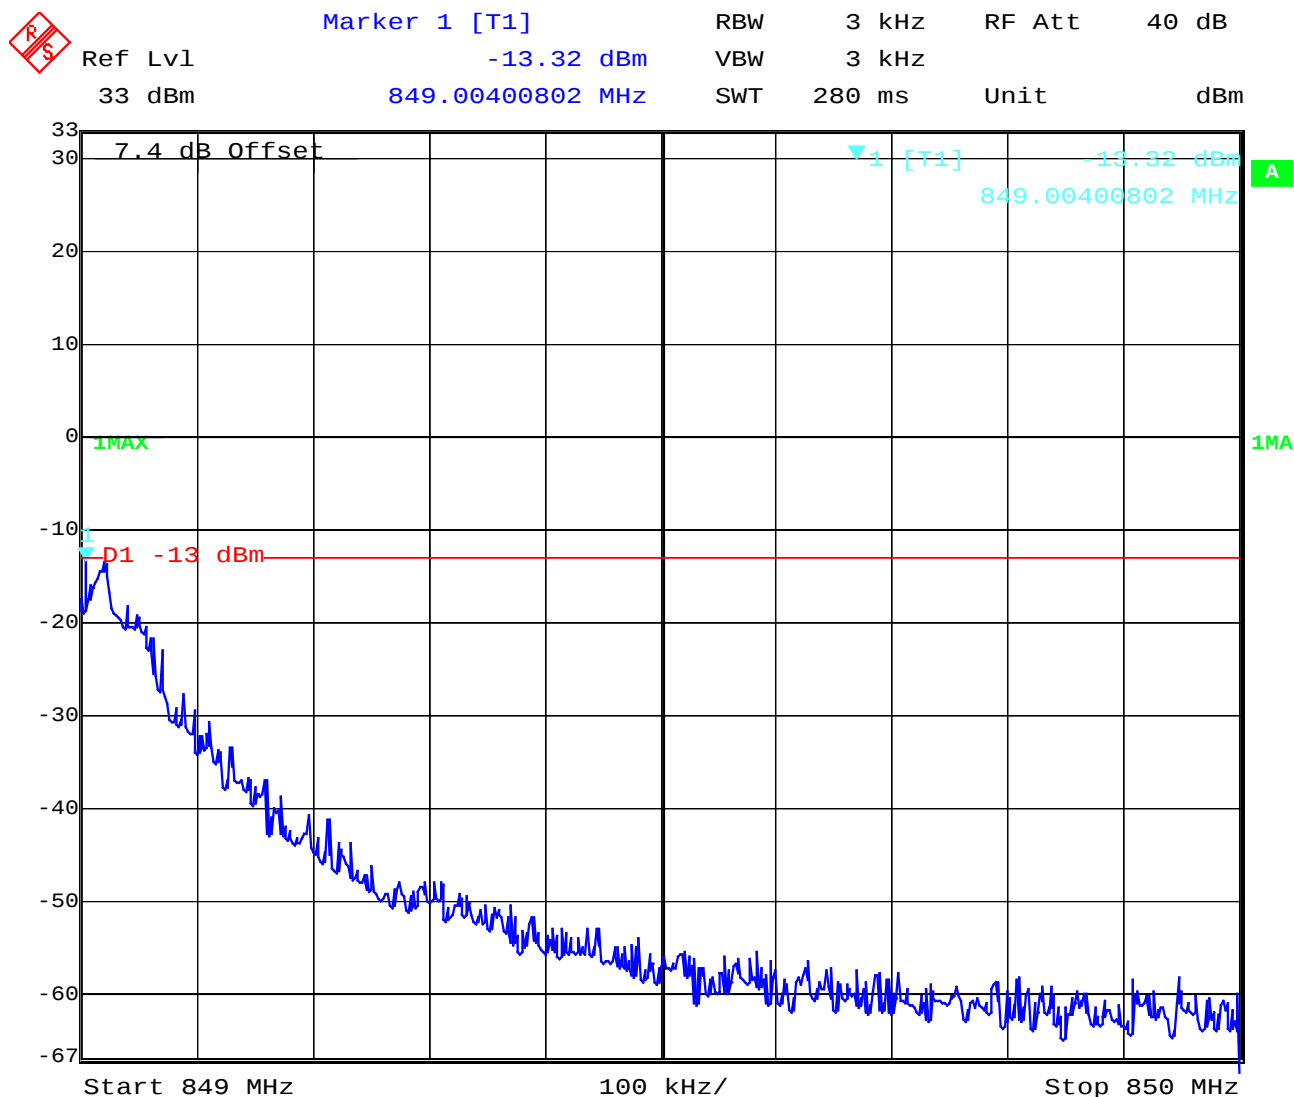


Date: 22. JUL. 2003 09:22:06

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 251

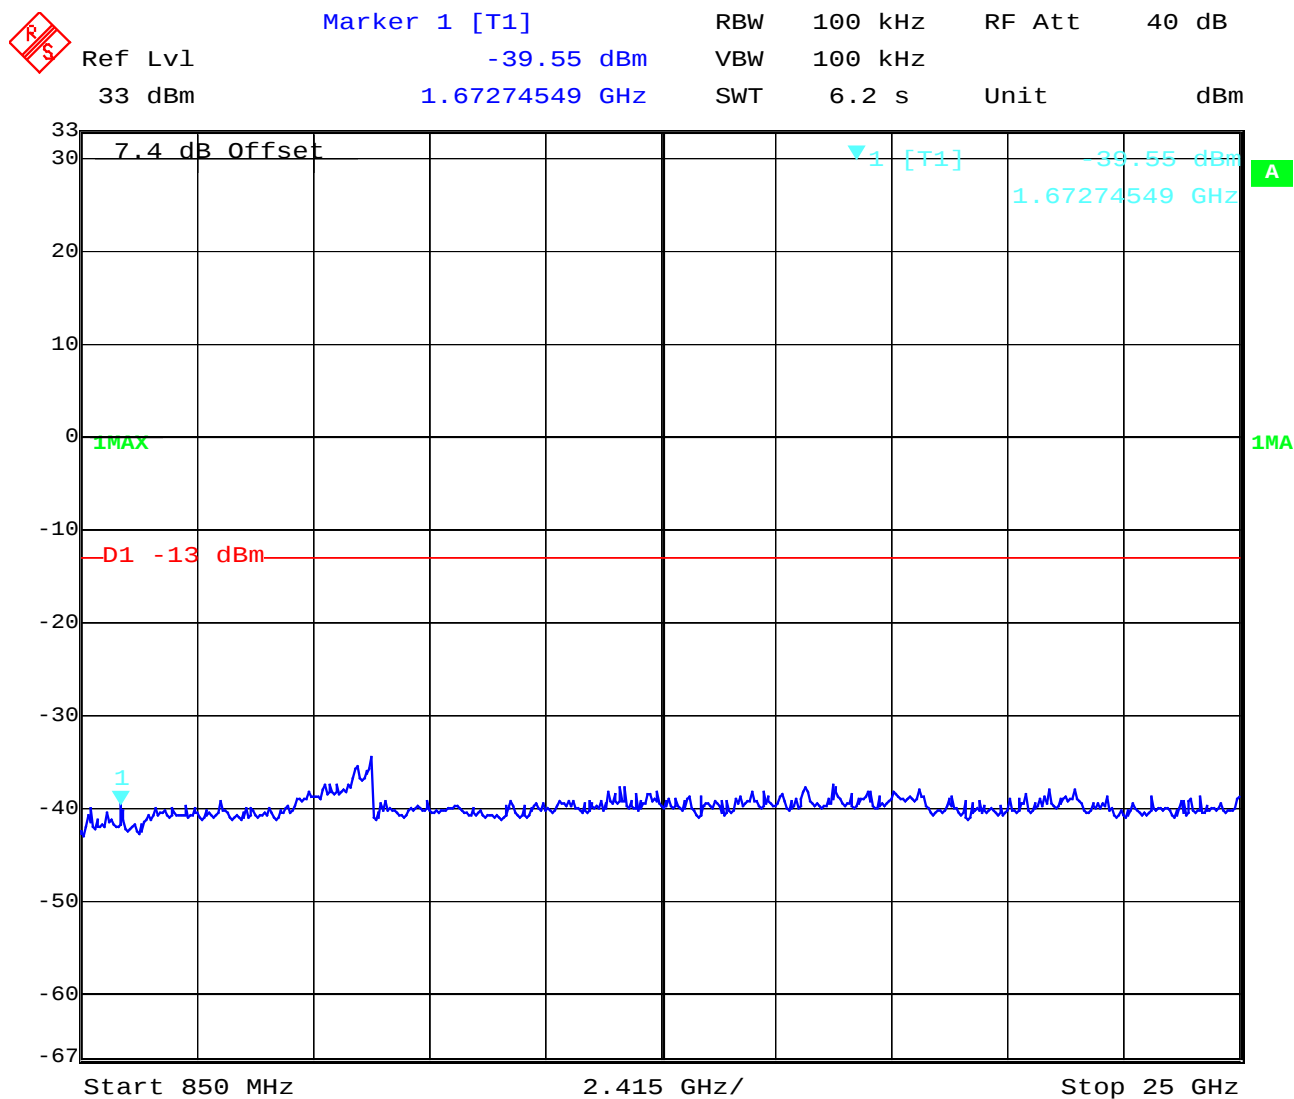

Date: 22. JUL. 2003 09:24:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

BLOCK EDGE REQUIREMENTS FOR BLOCK 1 TO BLOCK 4


Measurement Limit:

Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Measurements:

Block 1 Channel 128

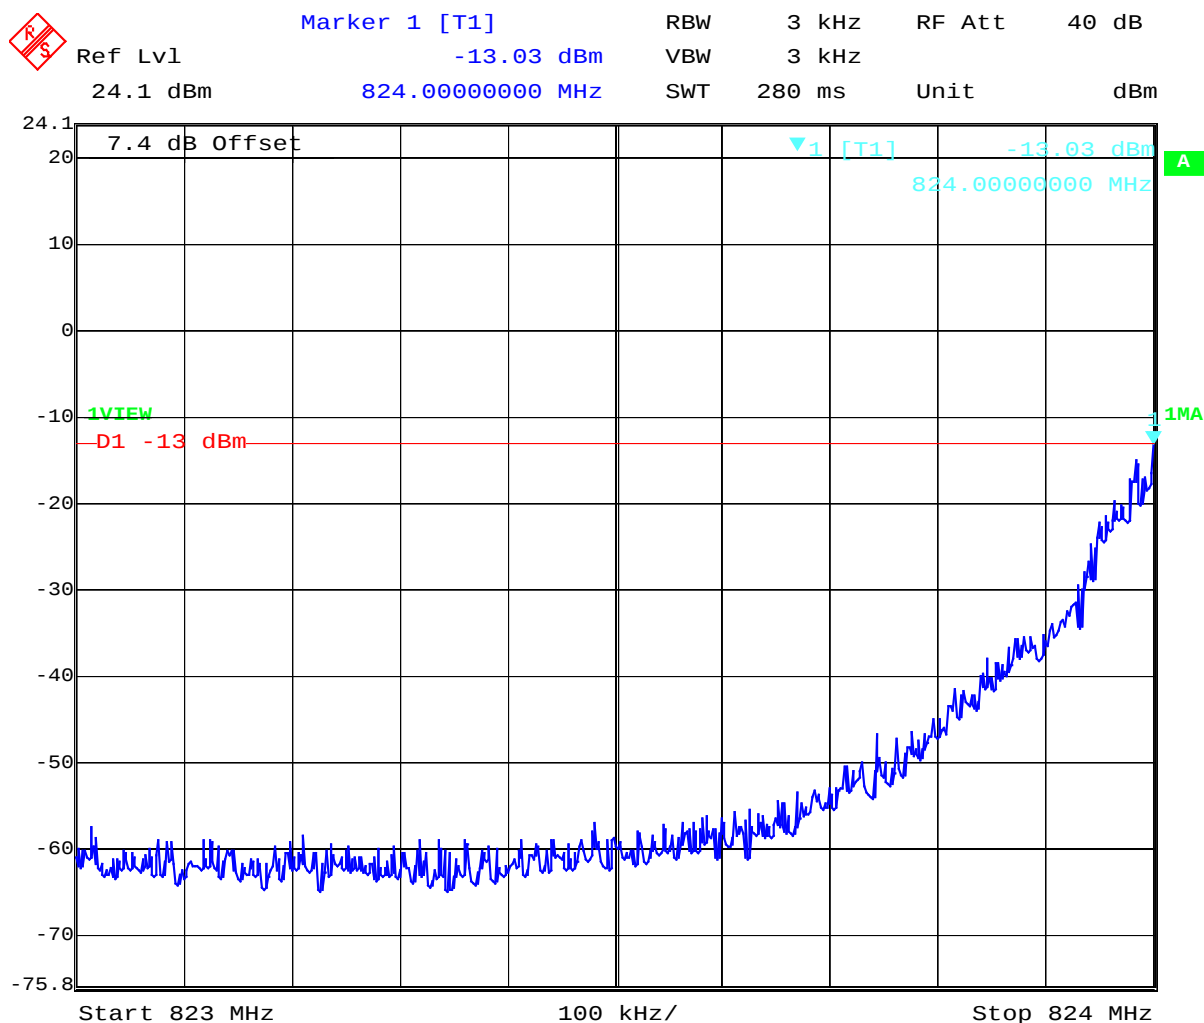


Date: 22.JUL.2003 09:35:02

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

Block 1 Channel 181

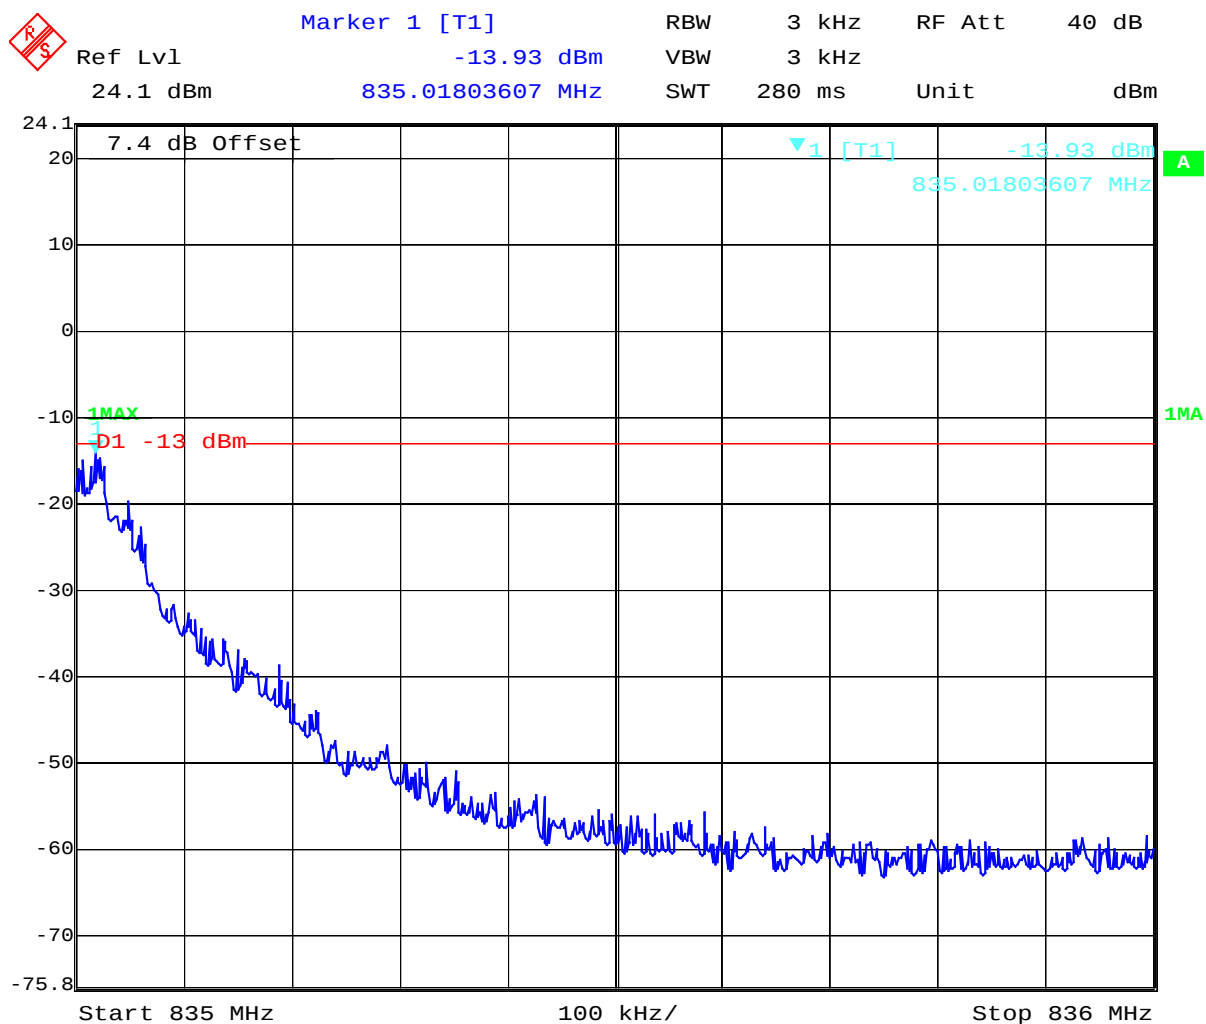


Date: 22.JUL.2003 09:37:15

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Block 2 Channel 183

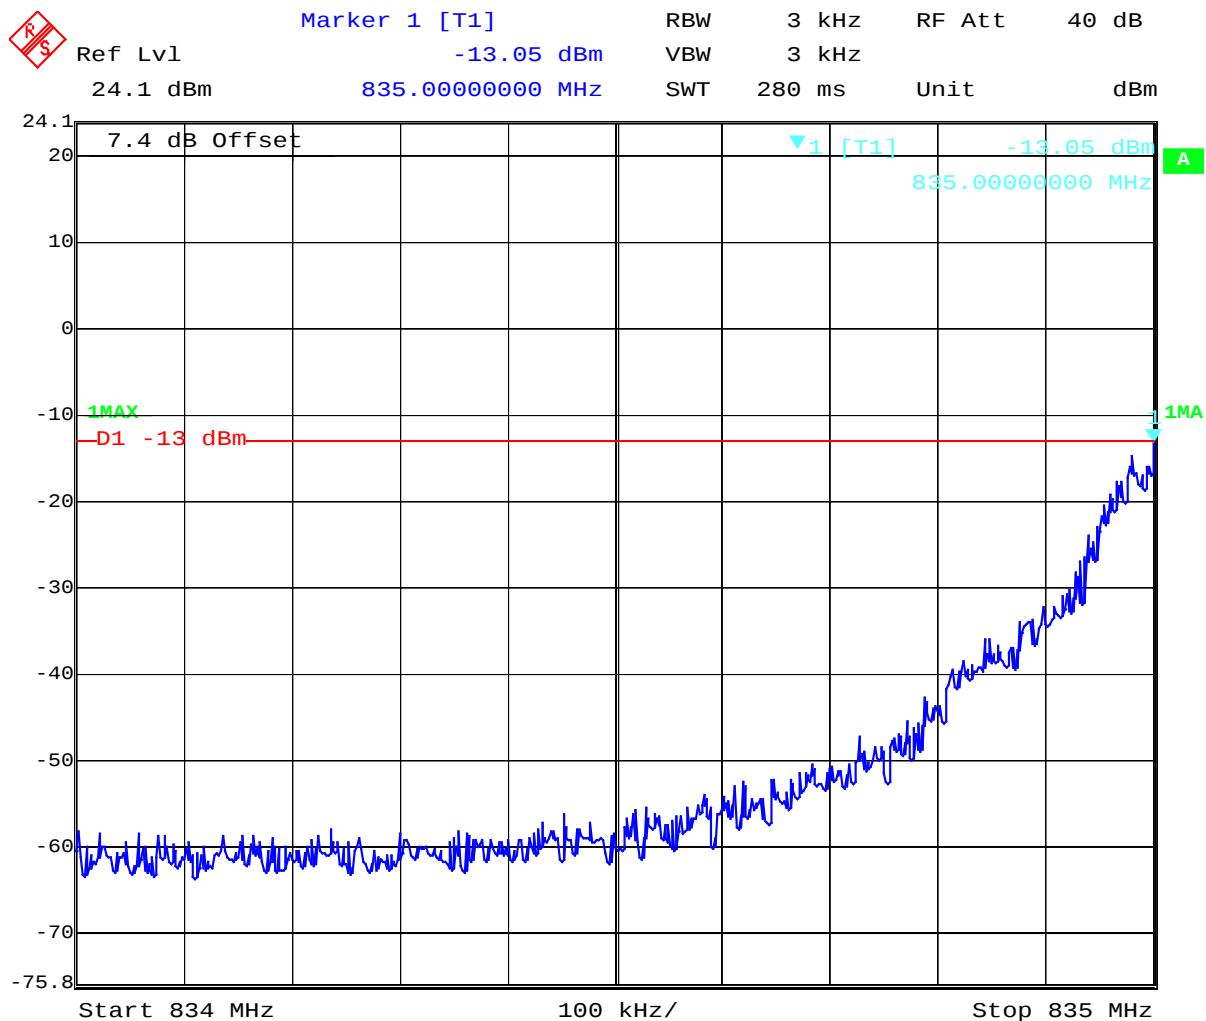


Date: 22.JUL.2003 09:39:04

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Block 2 Channel 231

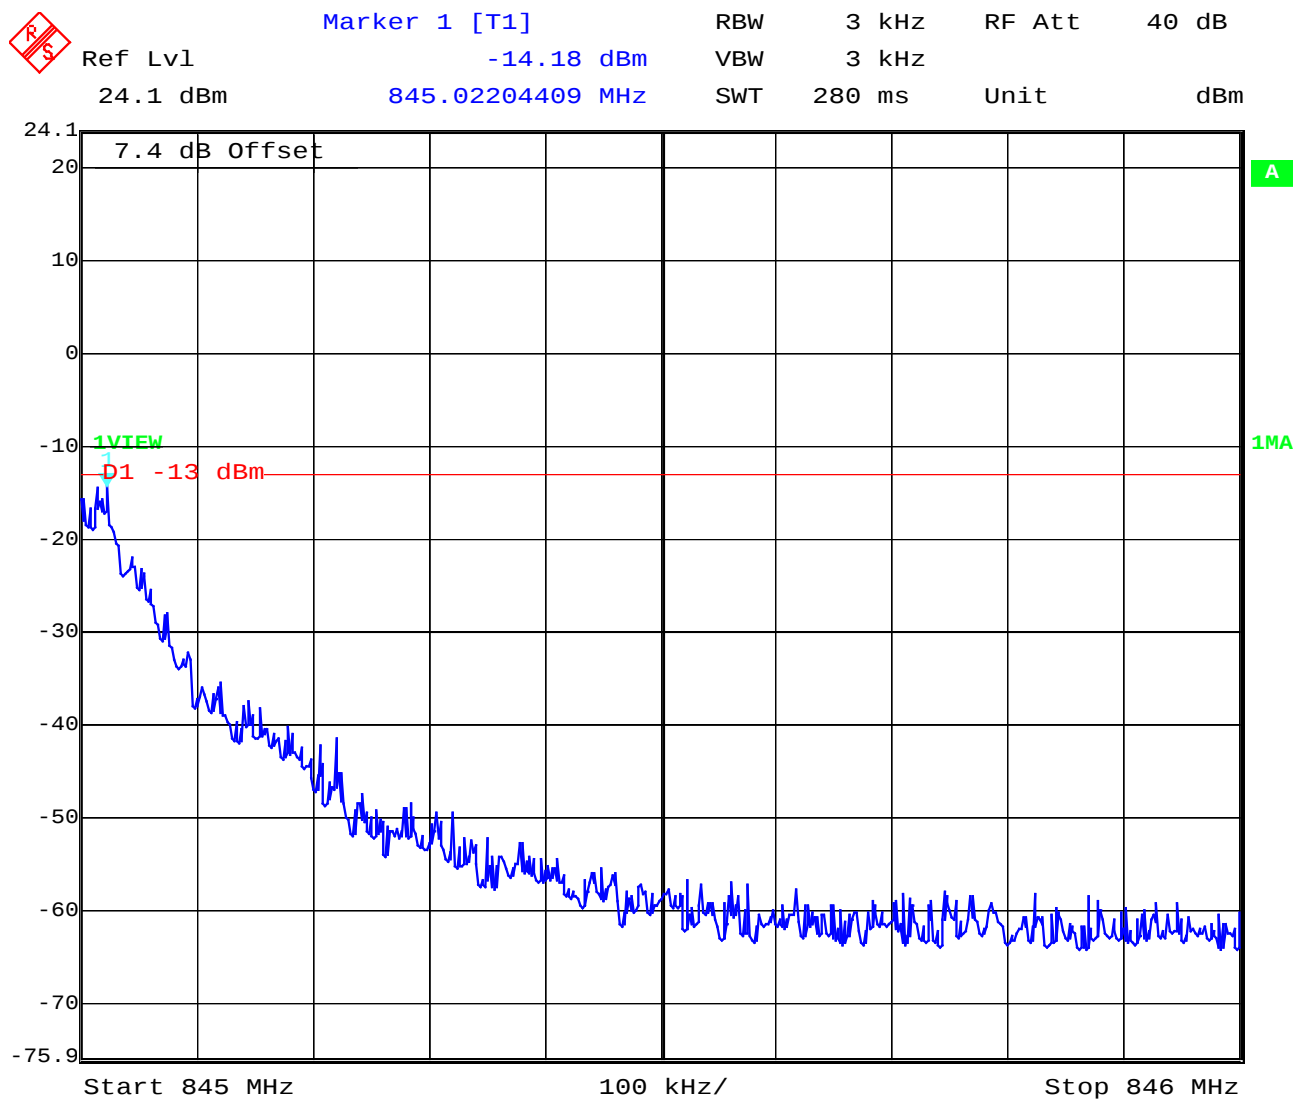


Date: 23. JUL. 2003 09:35:08

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Block 3 Channel 233

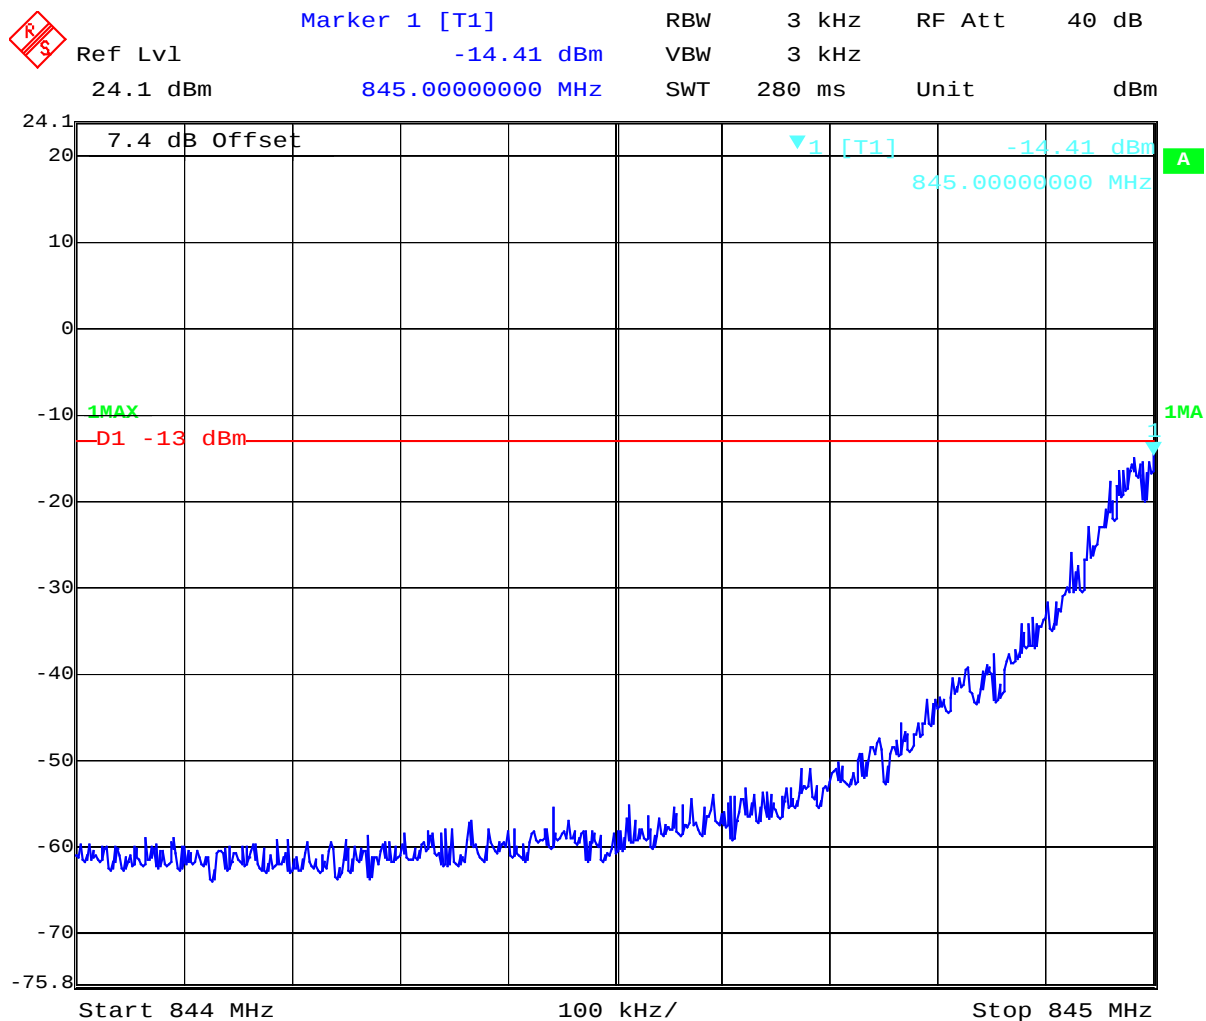


Date: 22.JUL.2003 09:44:34

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Block 3 Channel 238

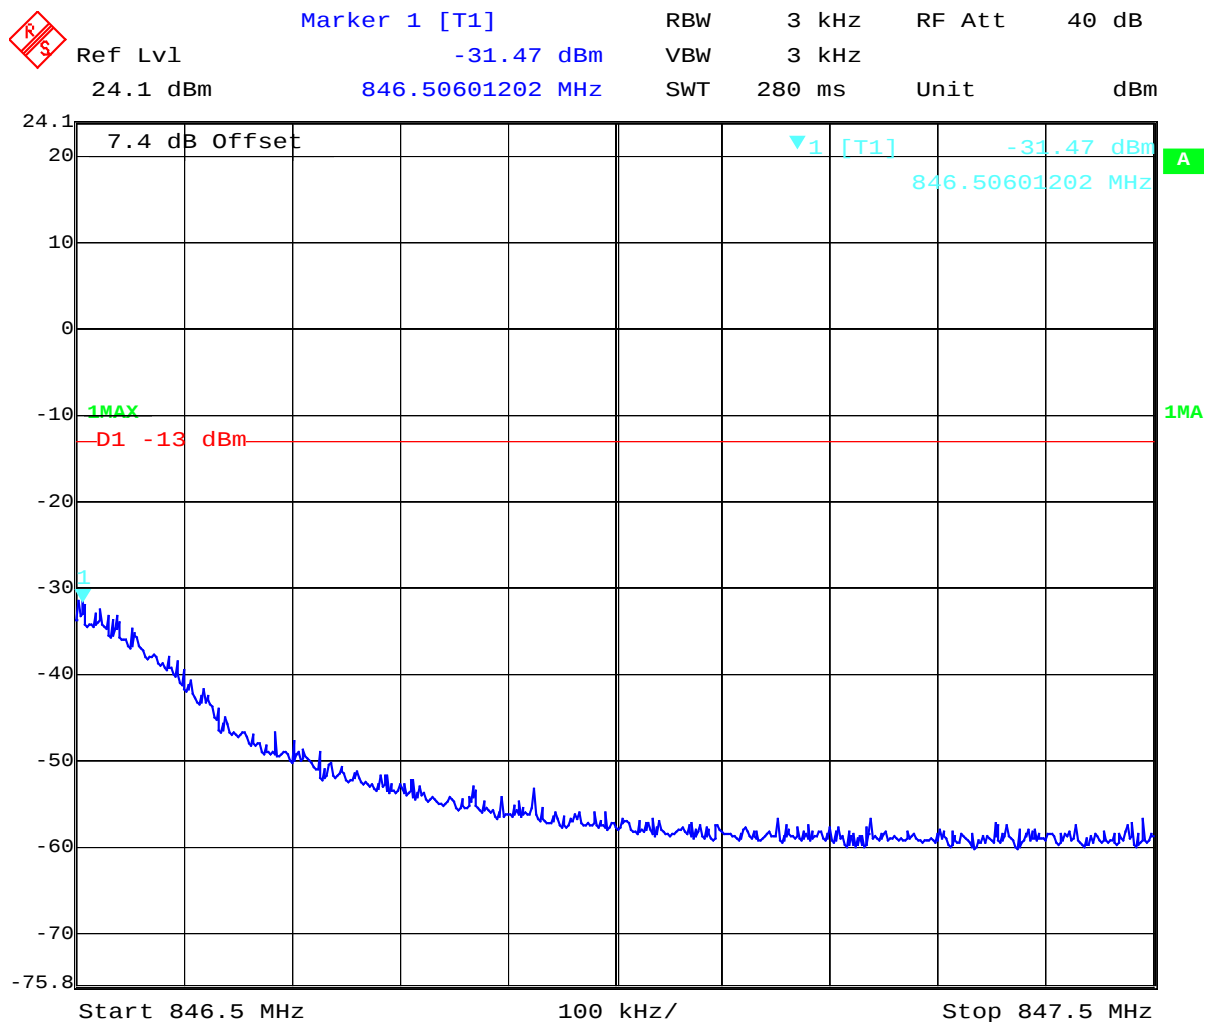


Date: 22.JUL.2003 09:55:50

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Block 4 Channel 241

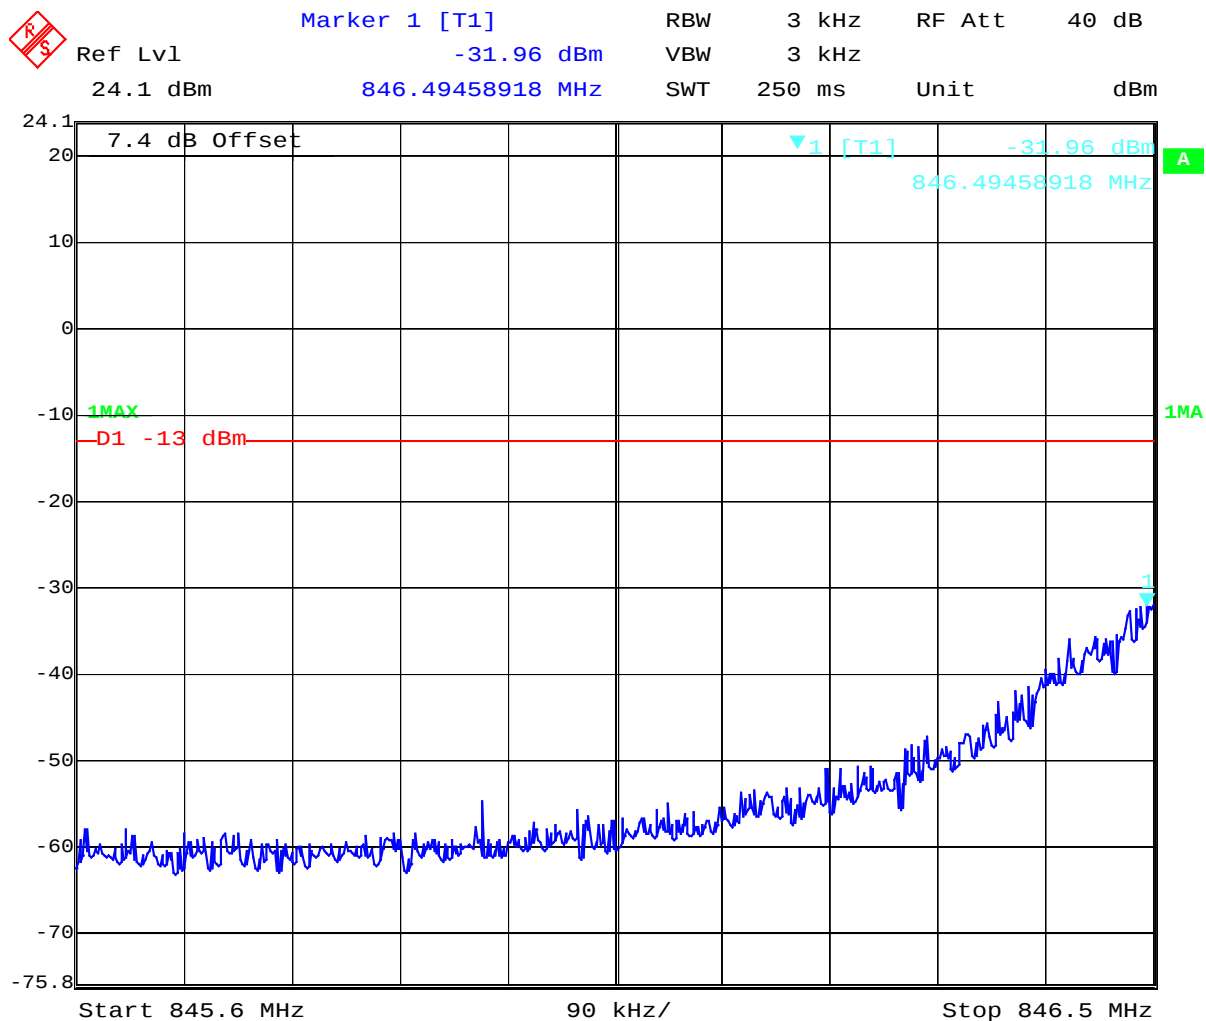


Date: 22.JUL.2003 09:58:01

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Block 4 Channel 251

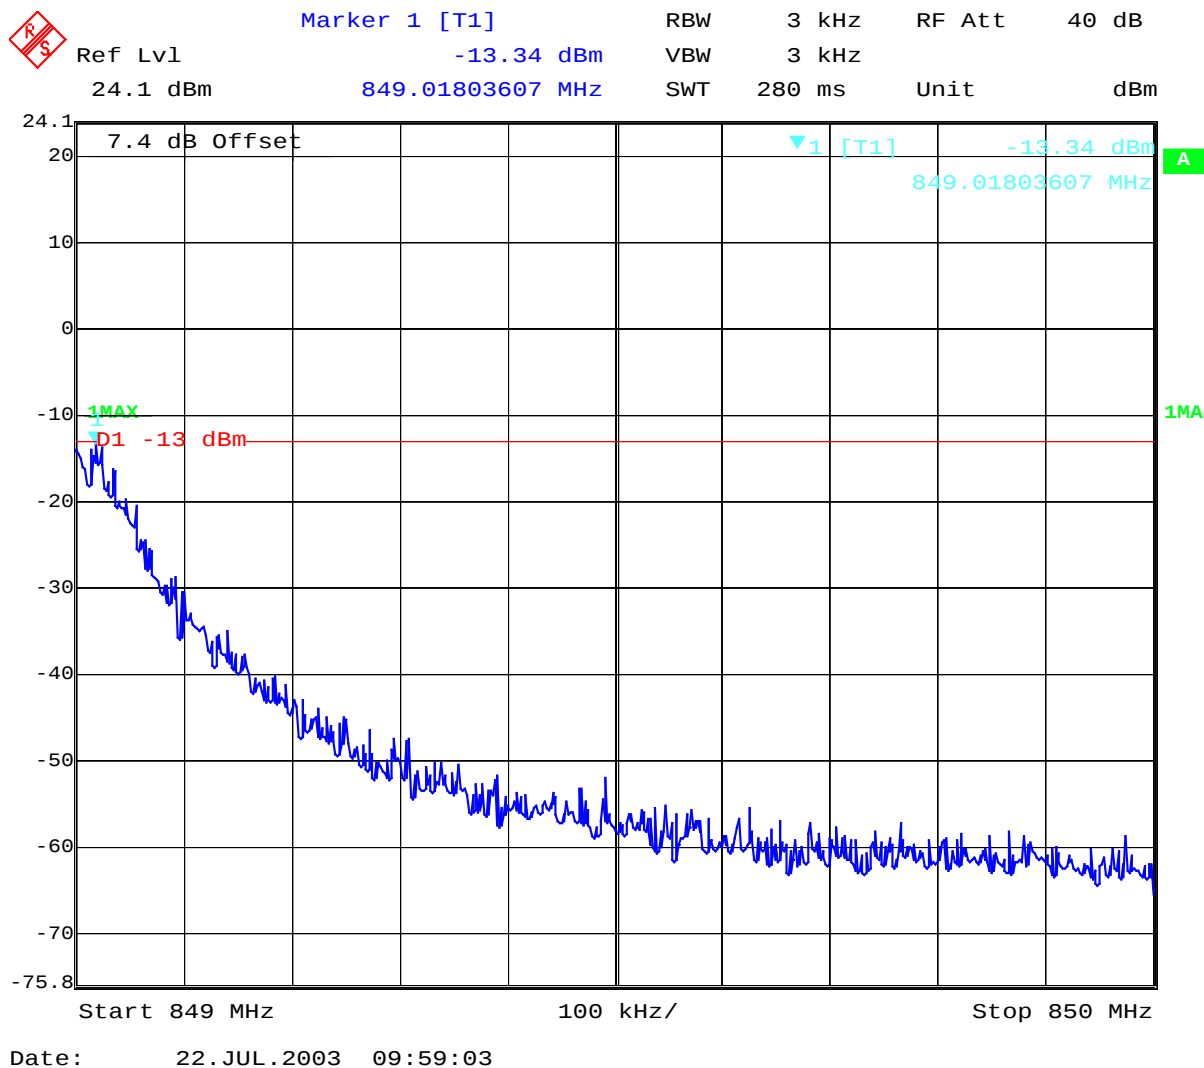

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64


OCCUPIED BANDWIDTH**§2.989****Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
824.2 MHz	266.533	306.613
836.4 MHz	278.557	310.321
848.8 MHz	260.521	306.613

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 279 kHz, this equates to a resolution bandwidth of at least 2.8 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.


Channel 128
99% Occupied Bandwidth

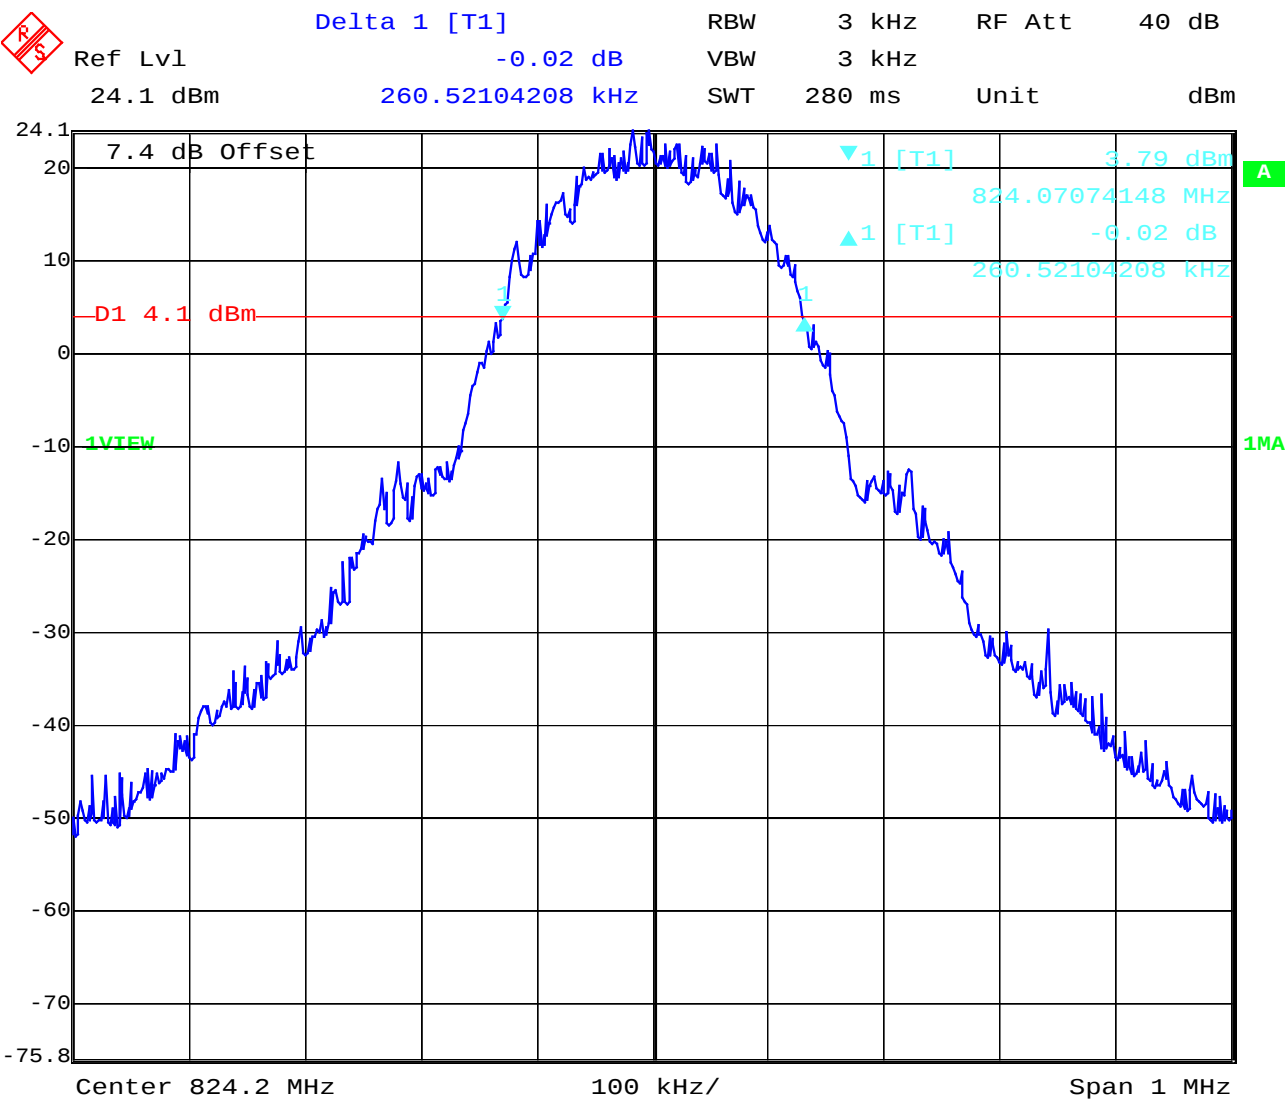

Date: 22. JUL. 2003 09:31:39

Channel 128


-26 dBc Bandwidth

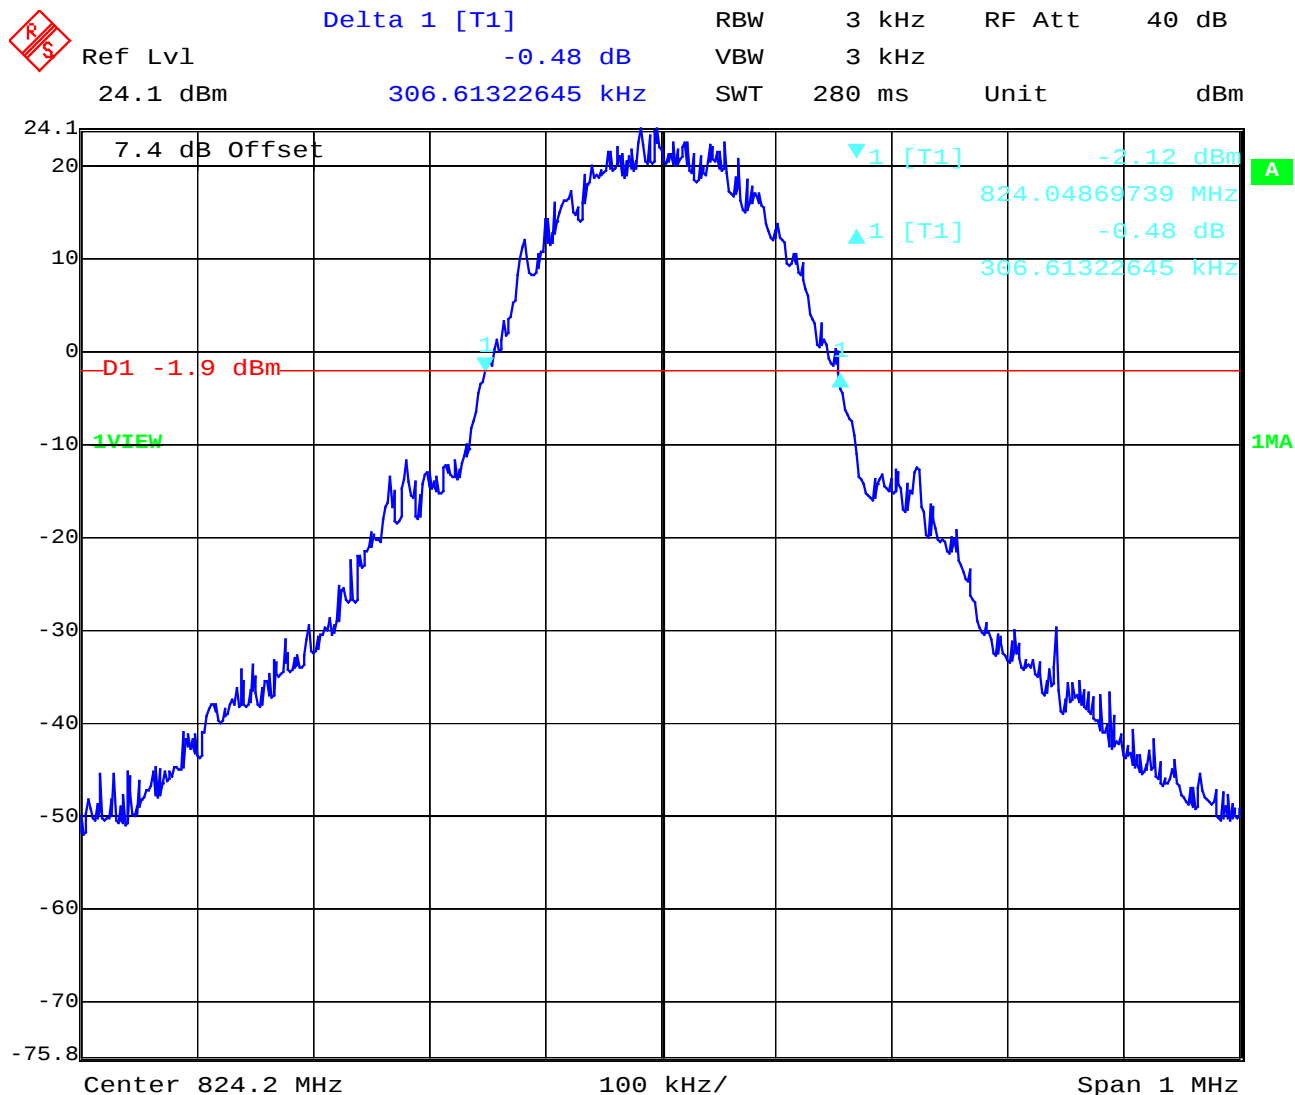

Date: 22. JUL. 2003 09:32:11

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Channel 189
99% Occupied Bandwidth

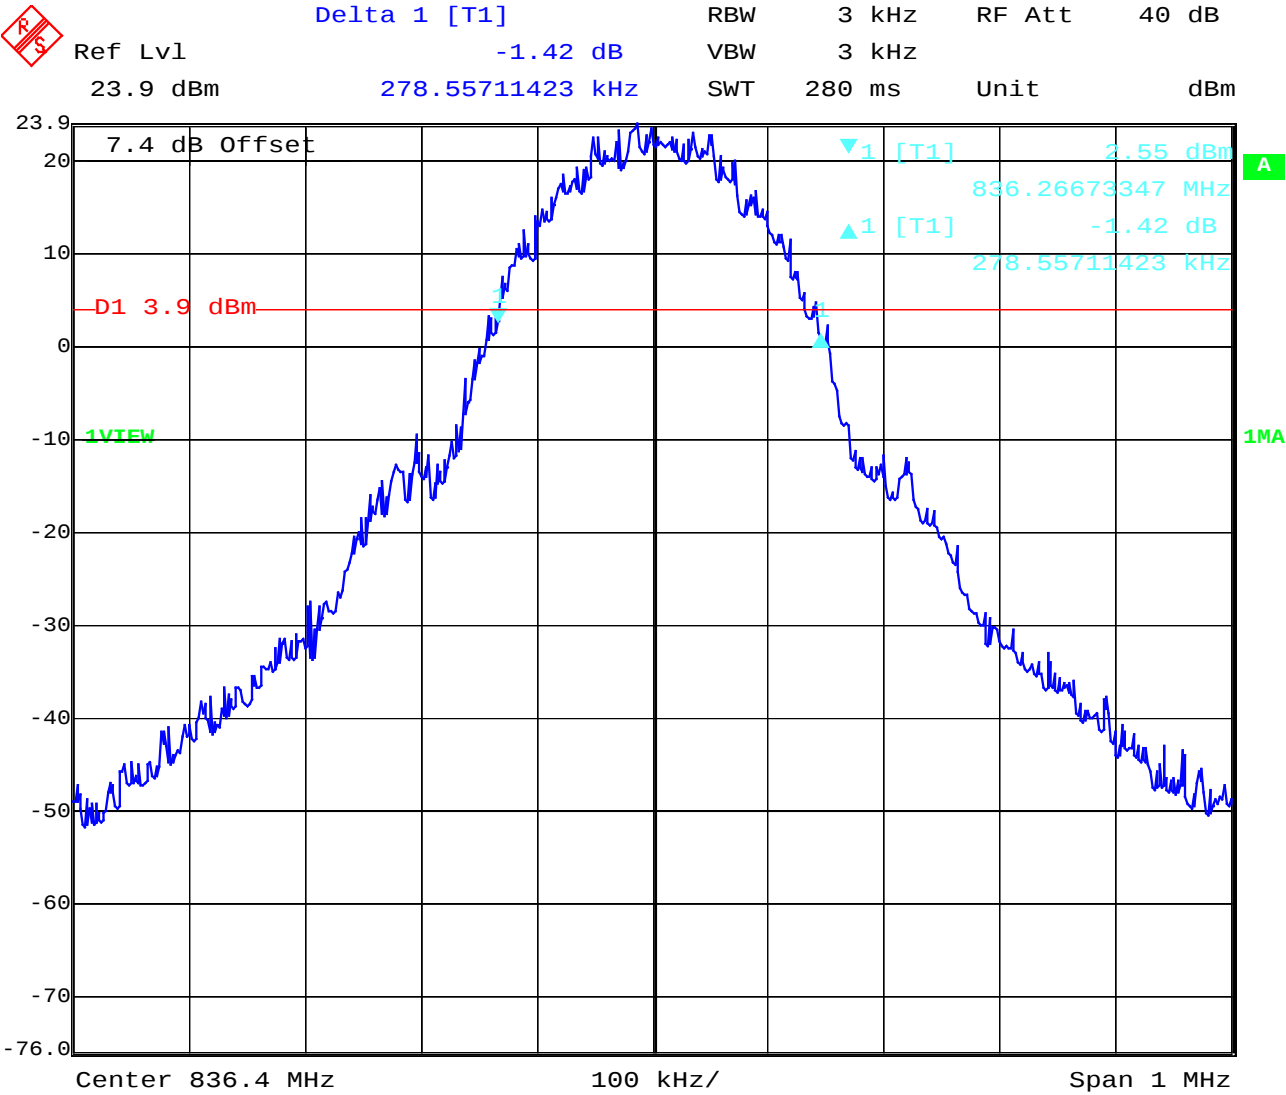

Date: 22. JUL. 2003 09:29:21

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 189 -26 dBc Bandwidth

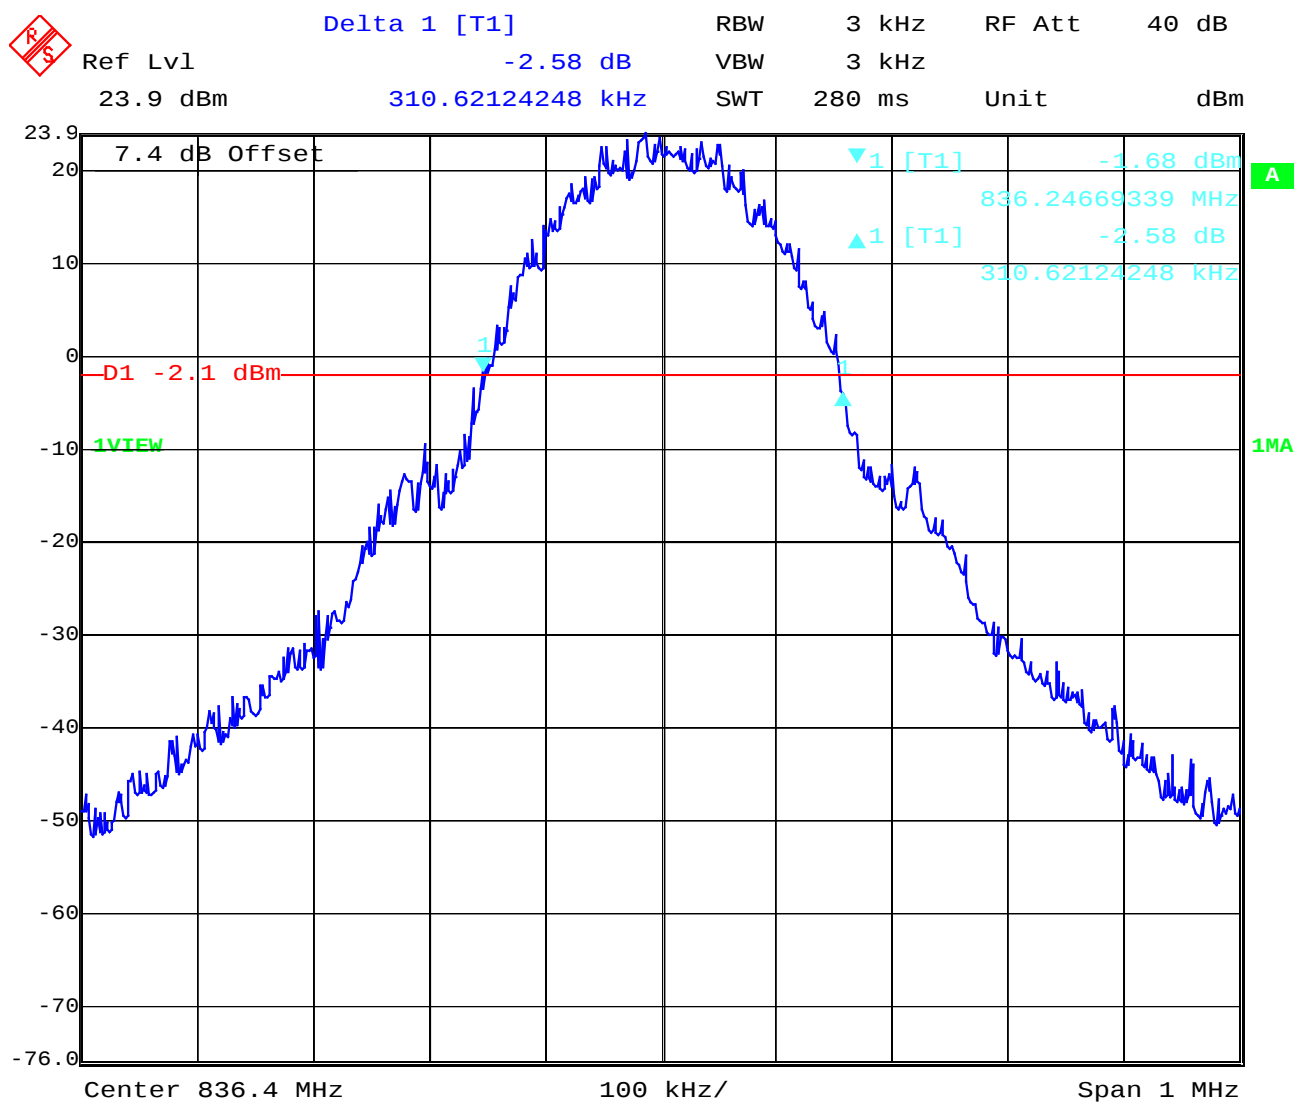


Date: 22. JUL. 2003 09:30:01

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 251


99% Occupied Bandwidth

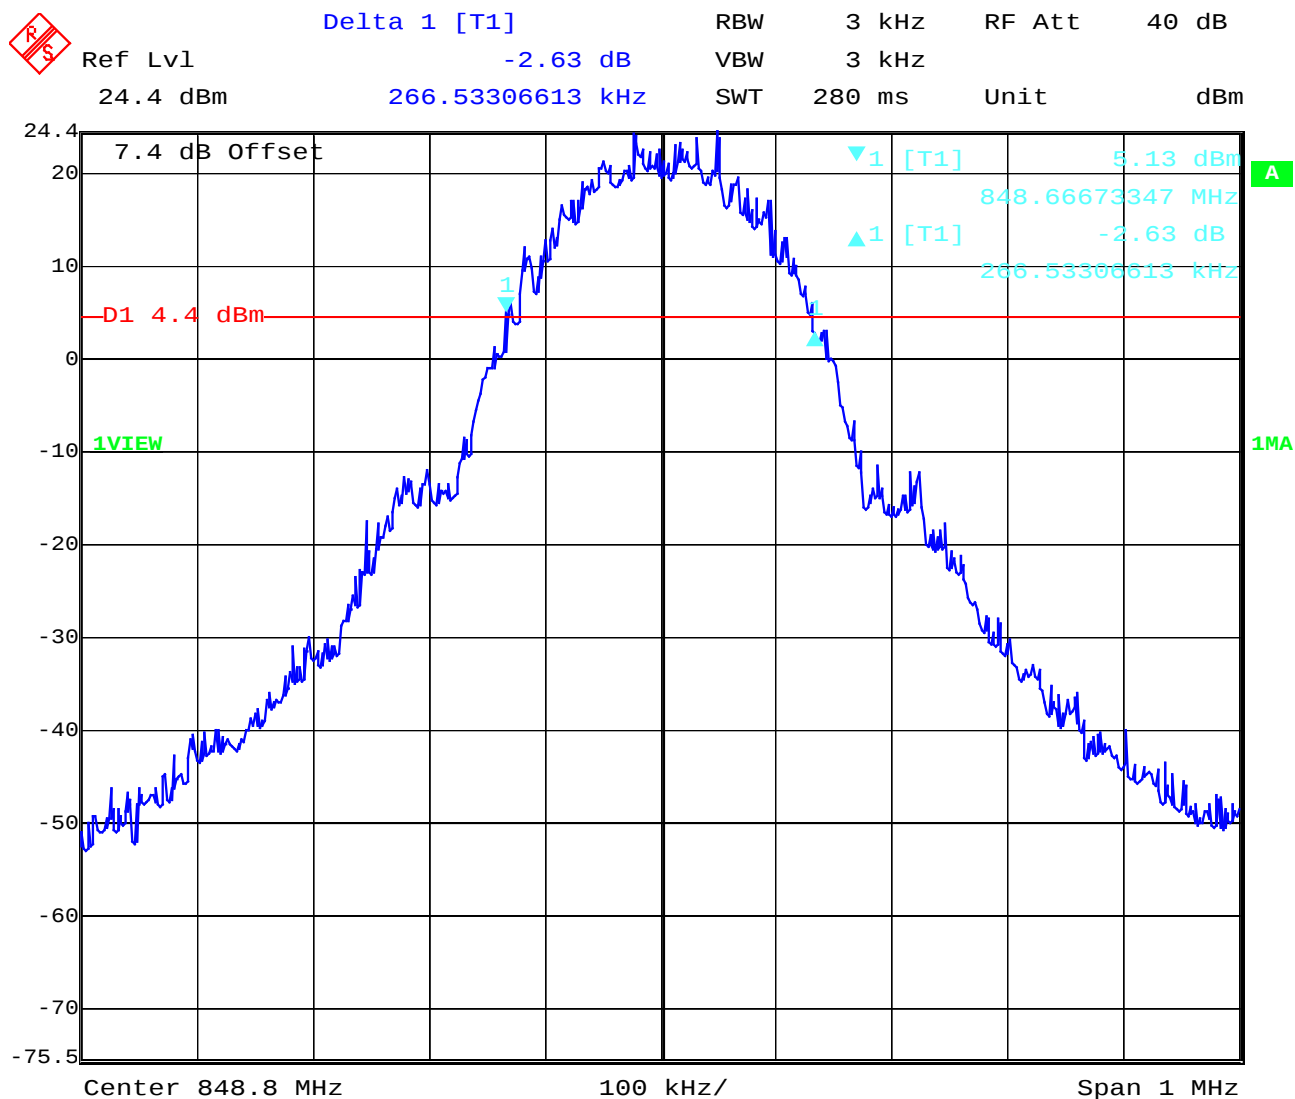

Date: 22. JUL. 2003 09:27:04

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 251 -26 dBc Bandwidth

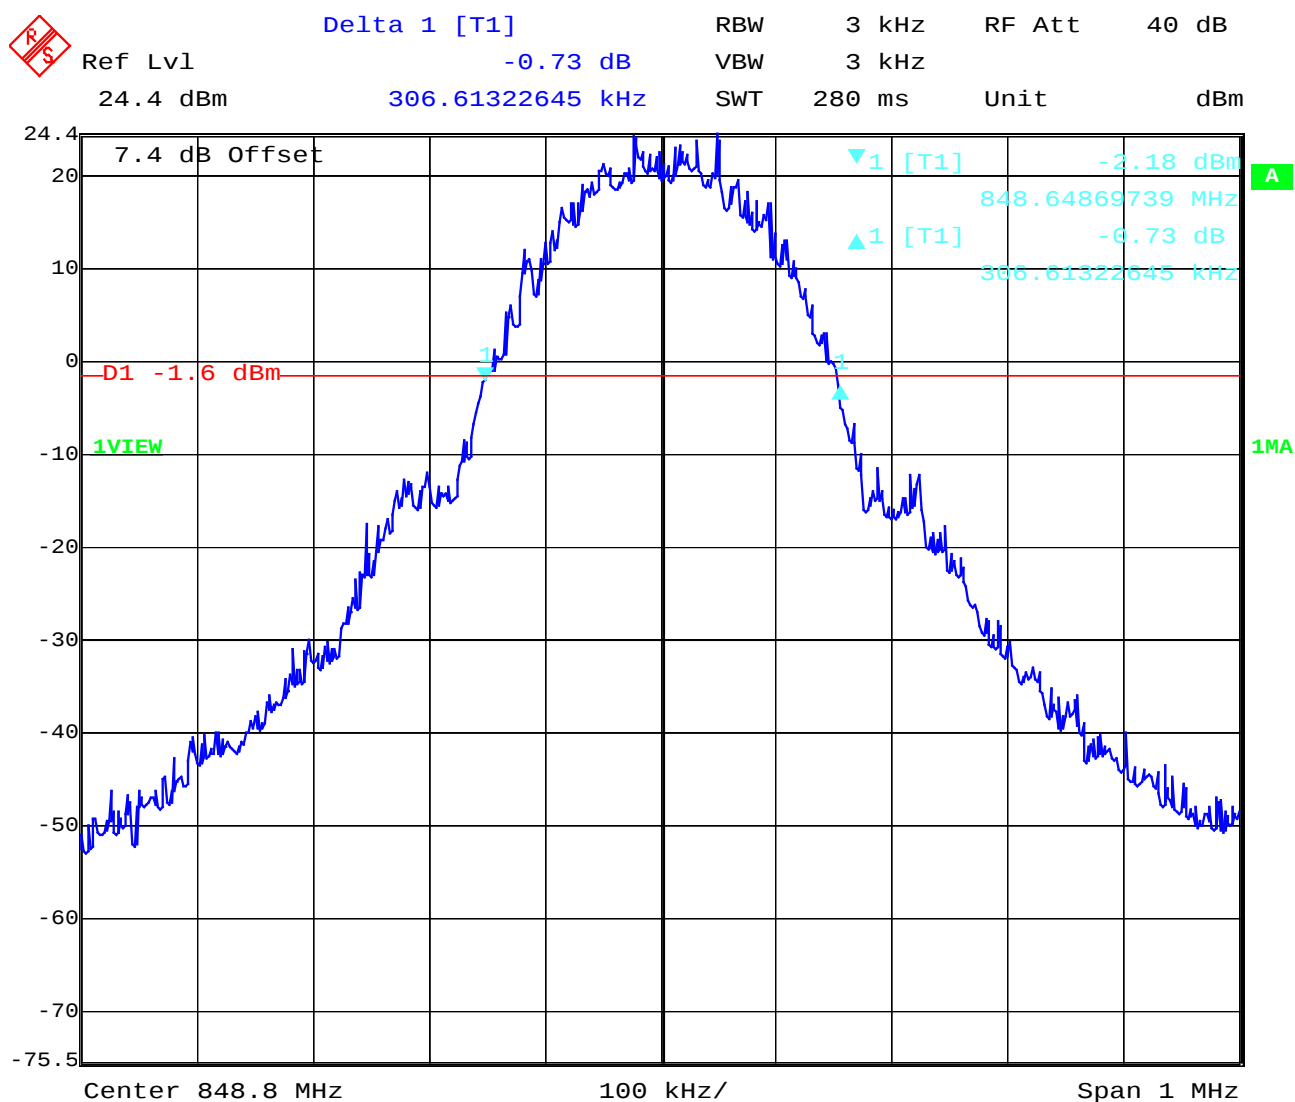

Date: 22. JUL. 2003 09:27:36


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

EMISSION LIMITATIONS FOR CELLULAR §22.917(F)

Mobile emissions in the base frequency range

As you can see in the following plots, all peaks are below –80 dBm in the base frequency range.

Idle Mode base station frequency range A

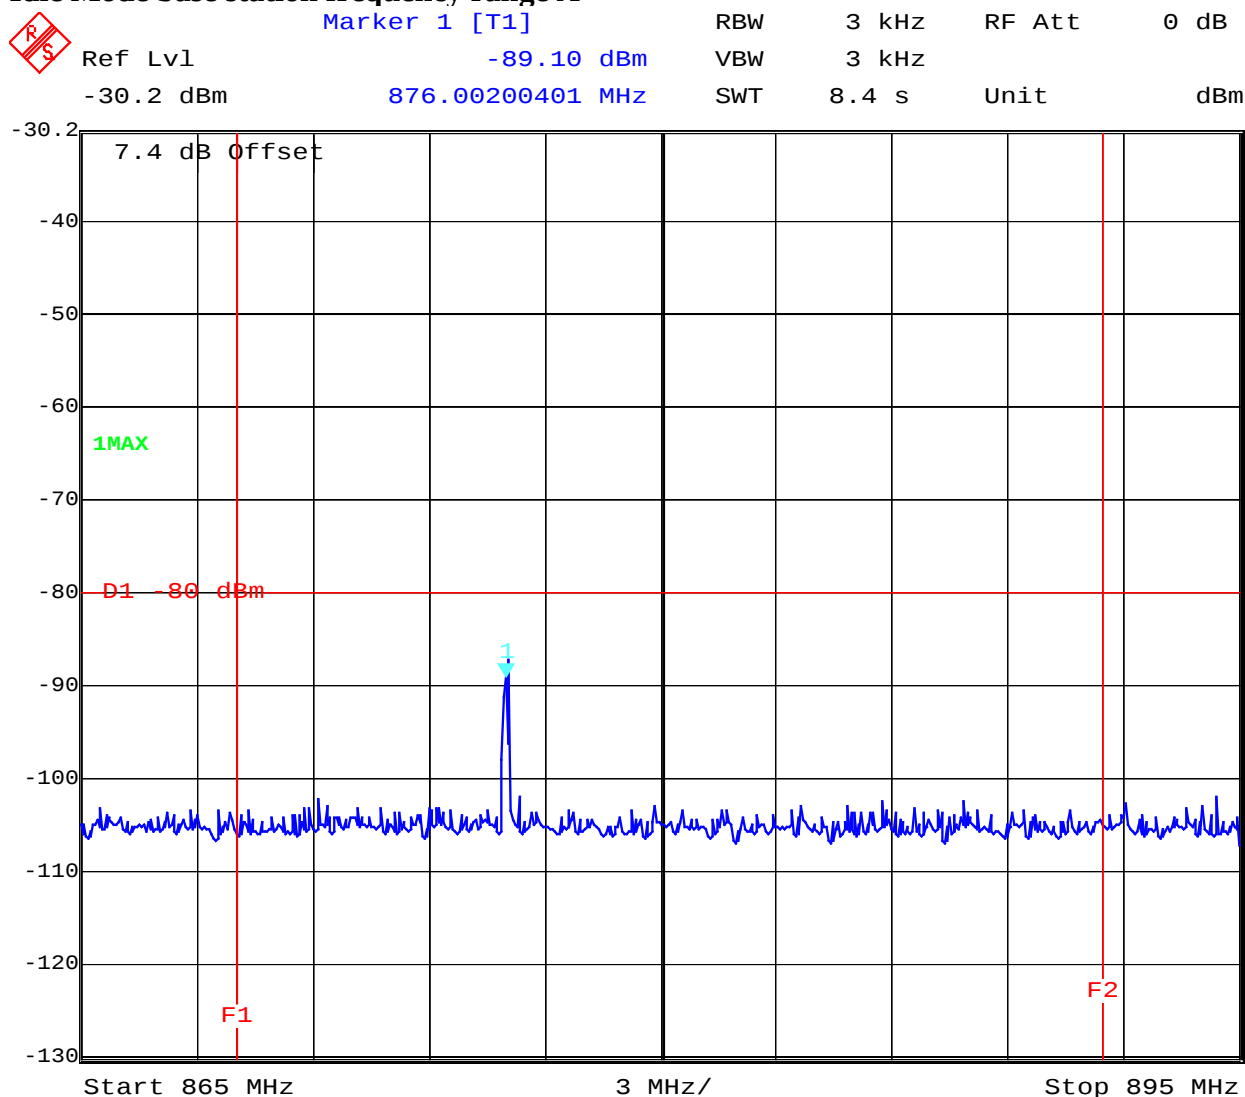

Date: 22. JUL. 2003 10:20:15

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed –80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

Idle Mode base station frequency range B

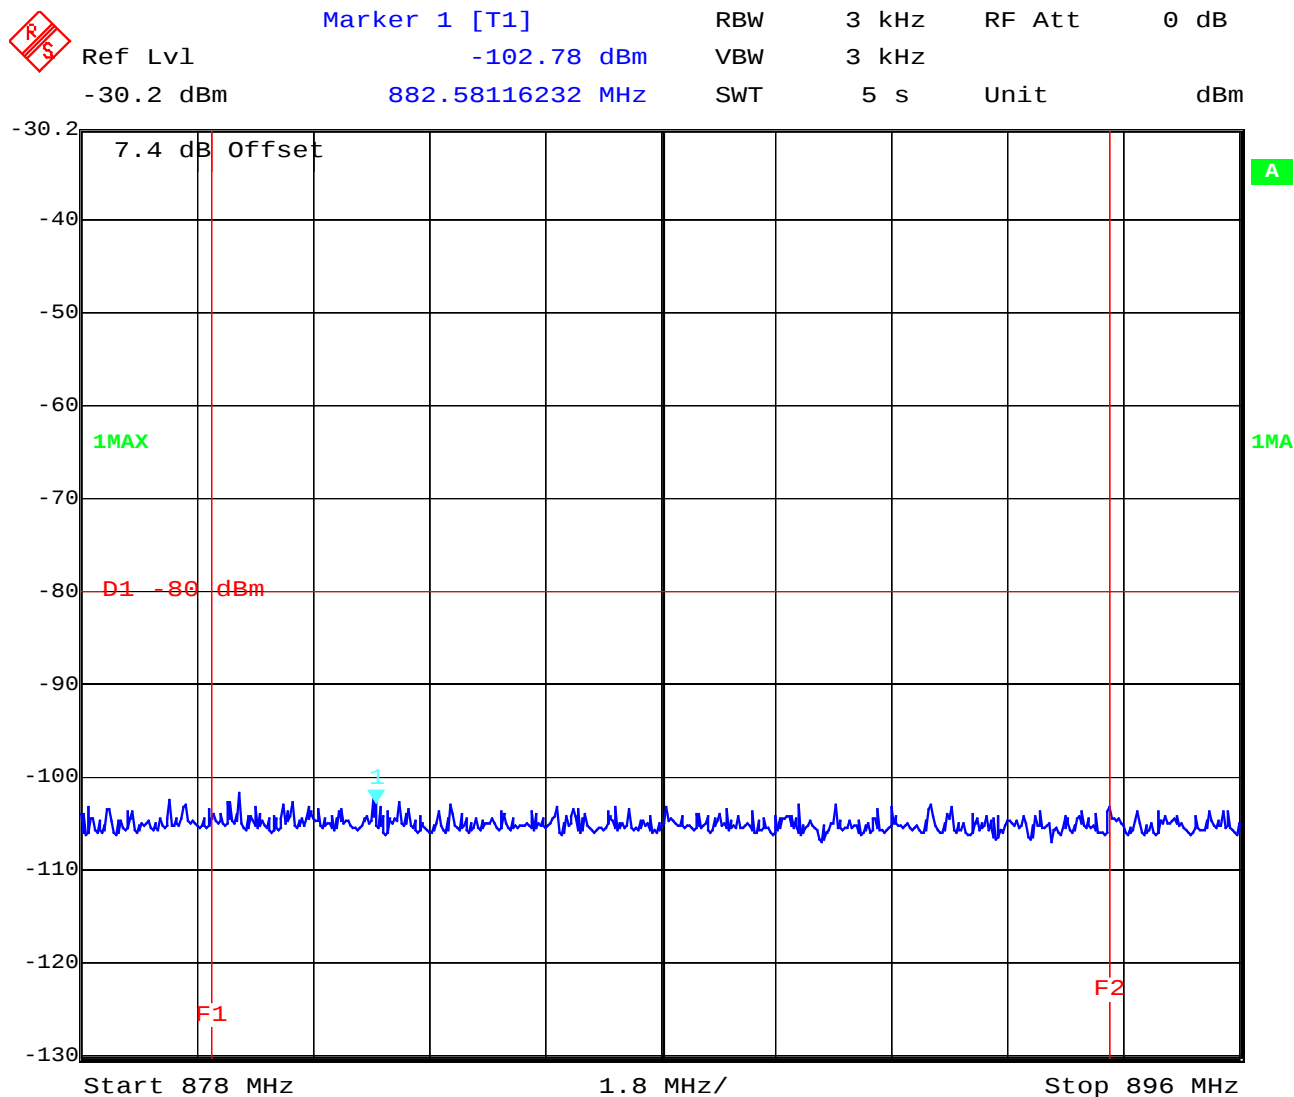

Date: 22.JUL.2003 10:19:08

LIMITS

§22.917(f)


The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 128 base station frequency range A


 Ref Lvl Marker 1 [T1] RBW 3 kHz RF Att 0 dB
-30.2 dBm -87.97 dBm VBW 3 kHz
876.24248497 MHz SWT 8.4 s Unit dBm

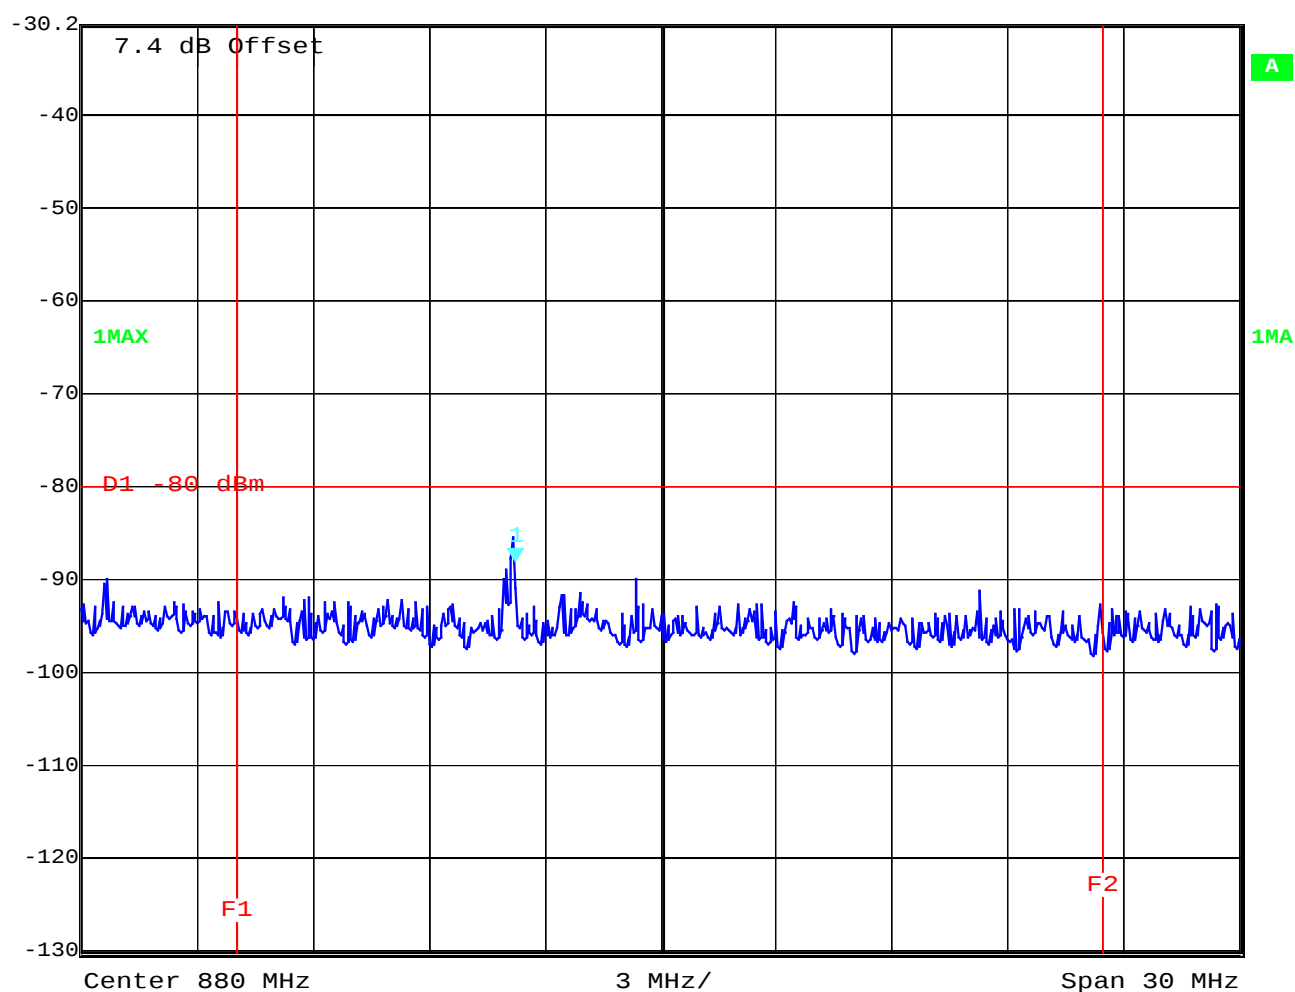

Date: 22. JUL. 2003 10:07:18

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range
TX Mode CH 189 base station frequency range A

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-30.2 dBm	-84.71 dBm	VBW	3 kHz		
	888.32665331 MHz	SWT	8.4 s	Unit	dBm	

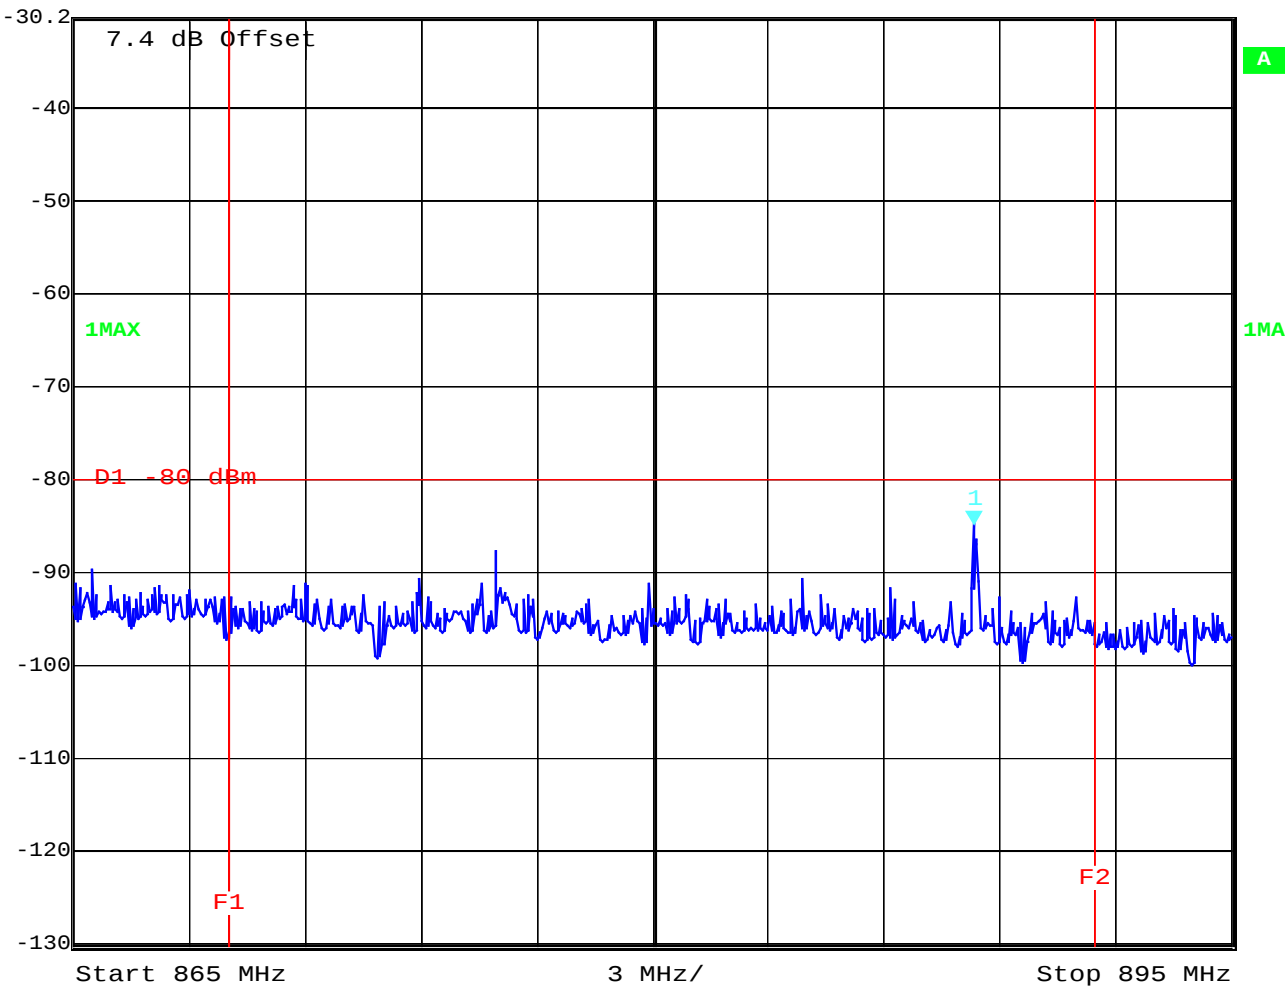

Date: 22. JUL. 2003 10:12:15

LIMITS

§22.917(f)


The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 251 base station frequency range A


 Ref Lvl Marker 1 [T1] RBW 3 kHz RF Att 0 dB
-30.2 dBm -84.55 dBm VBW 3 kHz
871.31262525 MHz SWT 8.4 s Unit dBm

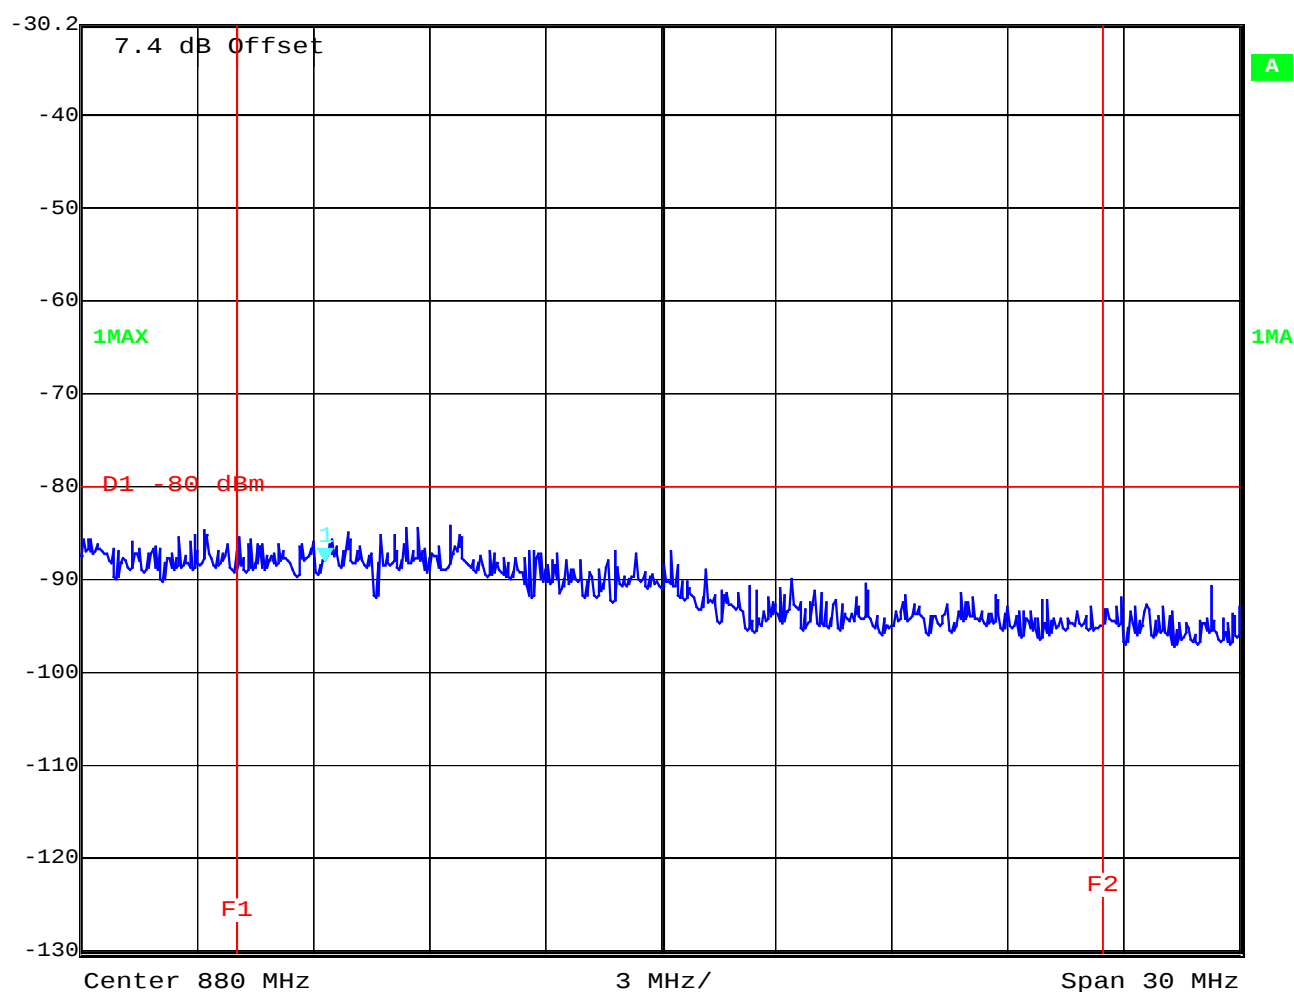

Date: 22. JUL. 2003 10:14:05


LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range
TX Mode CH 128 base station frequency range B

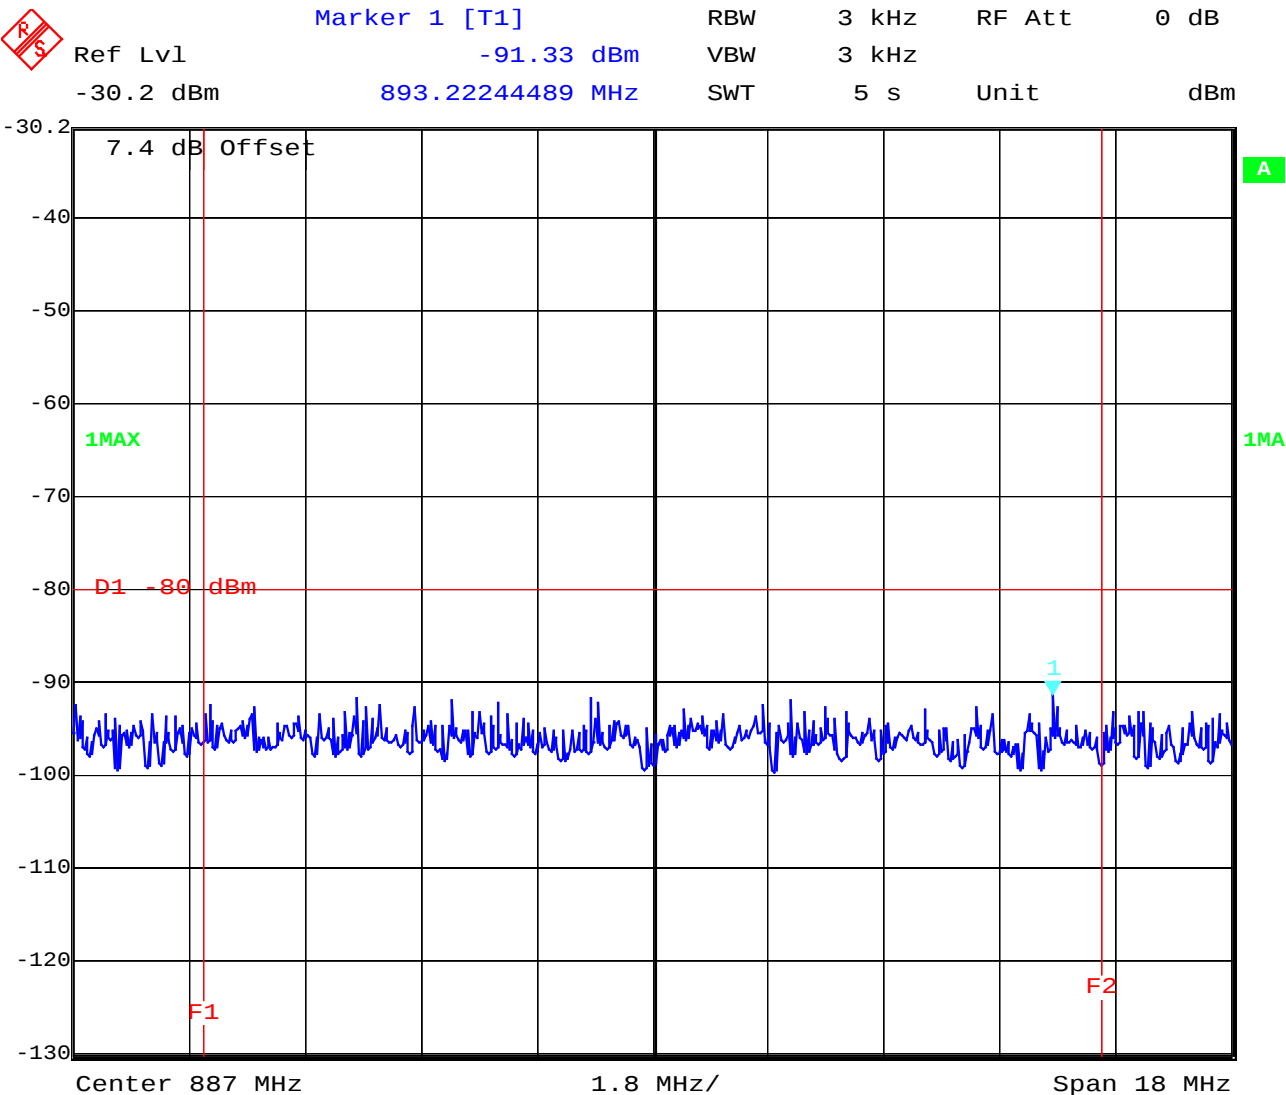

Date: 22. JUL. 2003 10:10:01

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 189 base station frequency range B

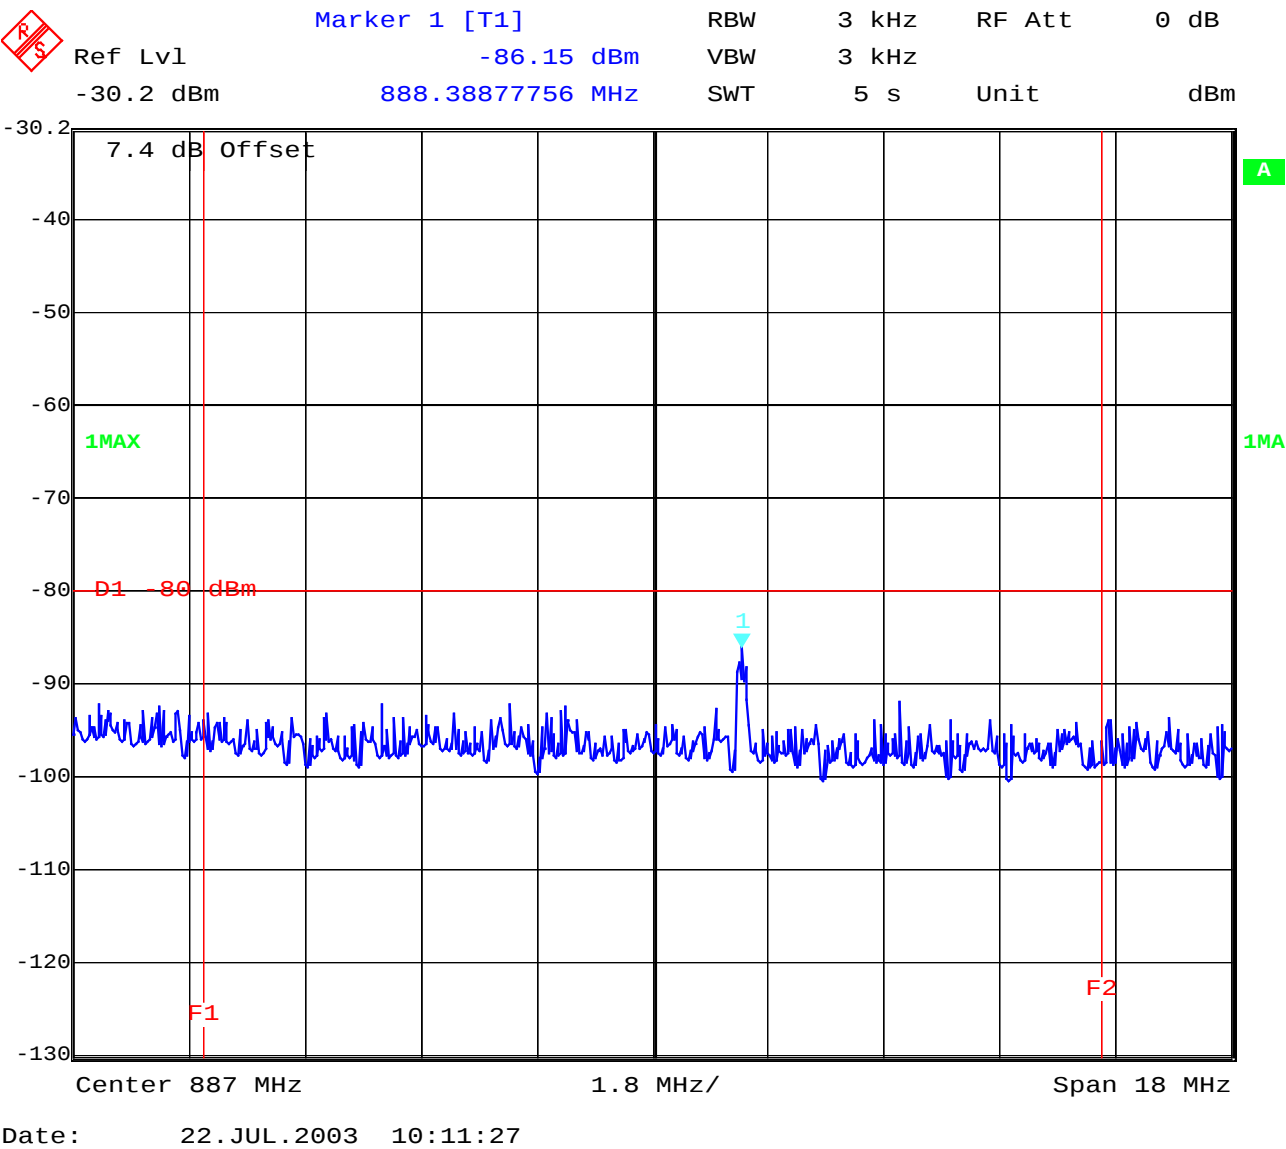

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 251 base station frequency range B

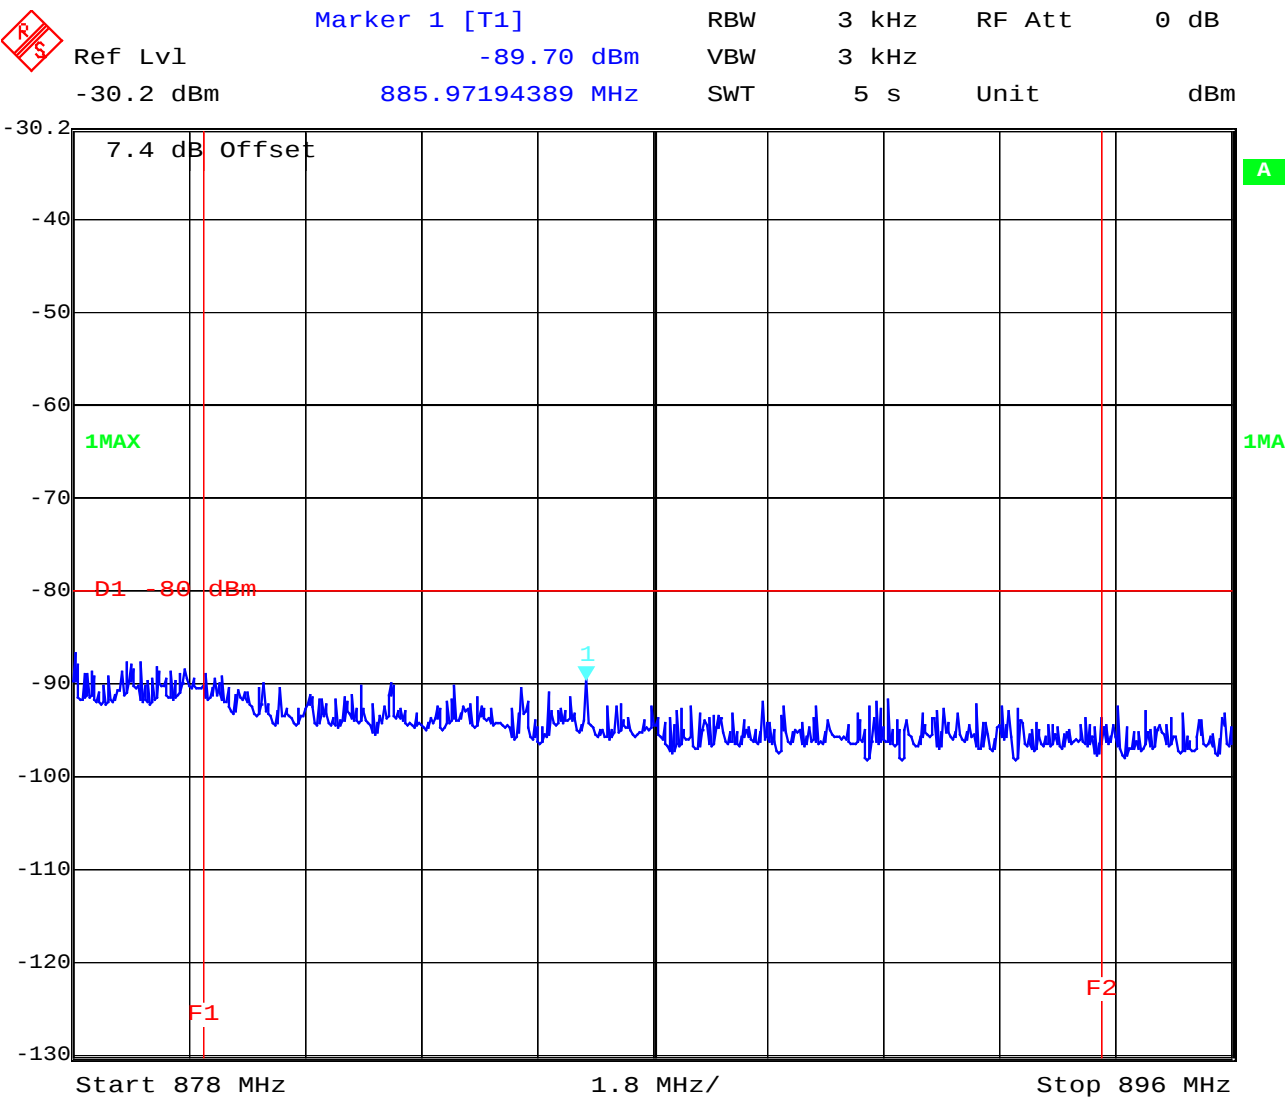

Date: 22. JUL. 2003 10:17:18

LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT **PART 15.109**

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

Ancillary equipment : AC/DC Adapter/Charger Model : ACP-8E; Deskstand DCV-14,
Data cable DKU-5

Spurious Emissions

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
CH 189			CH 661			Idle mode(850/1900)		
f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)
1672.8	PK	158.5	5640.0	PK	127.4			
5856.2	PK	98.9				no traceable peak found		
Measurement uncertainty			$\pm 3 \text{ dB}$					

 $f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$
 $f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

Measurement distance see table

Limits
SUBCLAUSE § 15.109

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30
30 - 88	100 / 40 dB $\mu\text{V/m}$	3
88 - 216	150 / 43.5 dB $\mu\text{V/m}$	3
216 - 960	200 / 46 dB $\mu\text{V/m}$	3
above 960	500 / 54 dB $\mu\text{V/m}$	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

EUT: RH-50 with ACP-8E, DCV-14, DKU-5, normal Cover
 Manufacturer: NOKIA
 Operating Condition: Traffic mode 1900
 Test Site: Cetecom, Room 6
 Operator: Berg
 Test Specification:
 Comment: 110V / 60 Hz
 Start of Test: 23.07.03 / 11:43:43

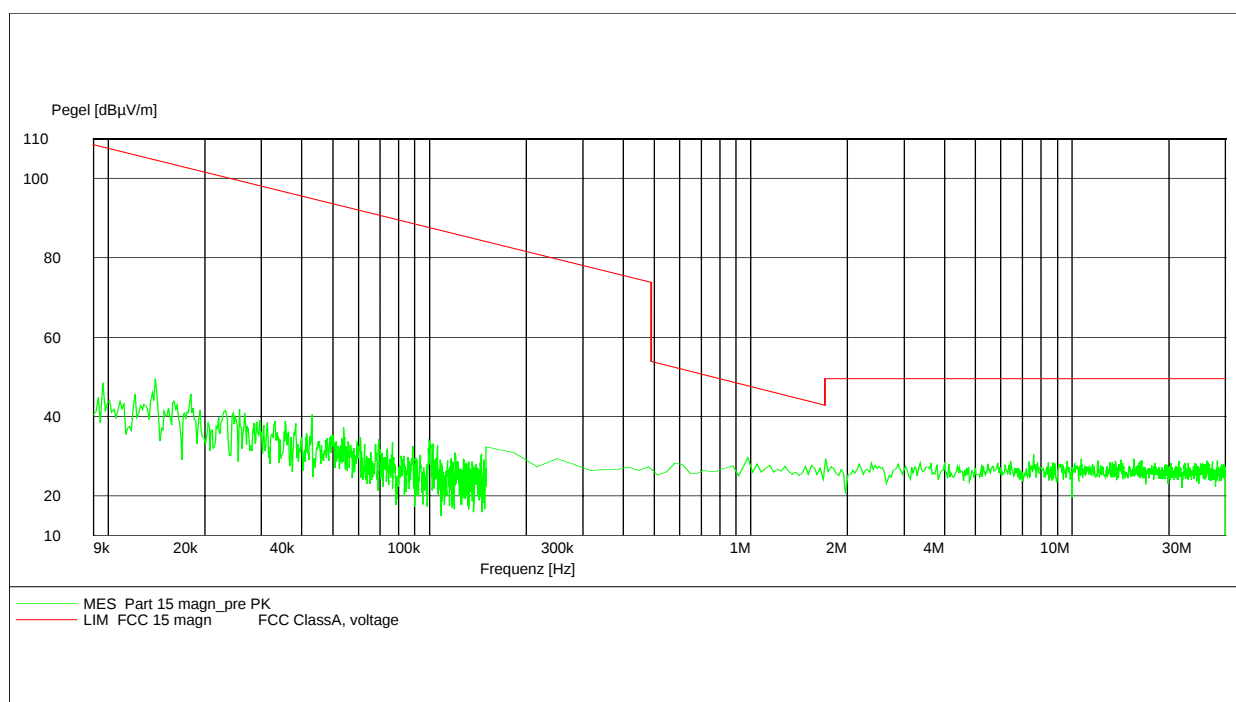

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 189 up to 4 GHz

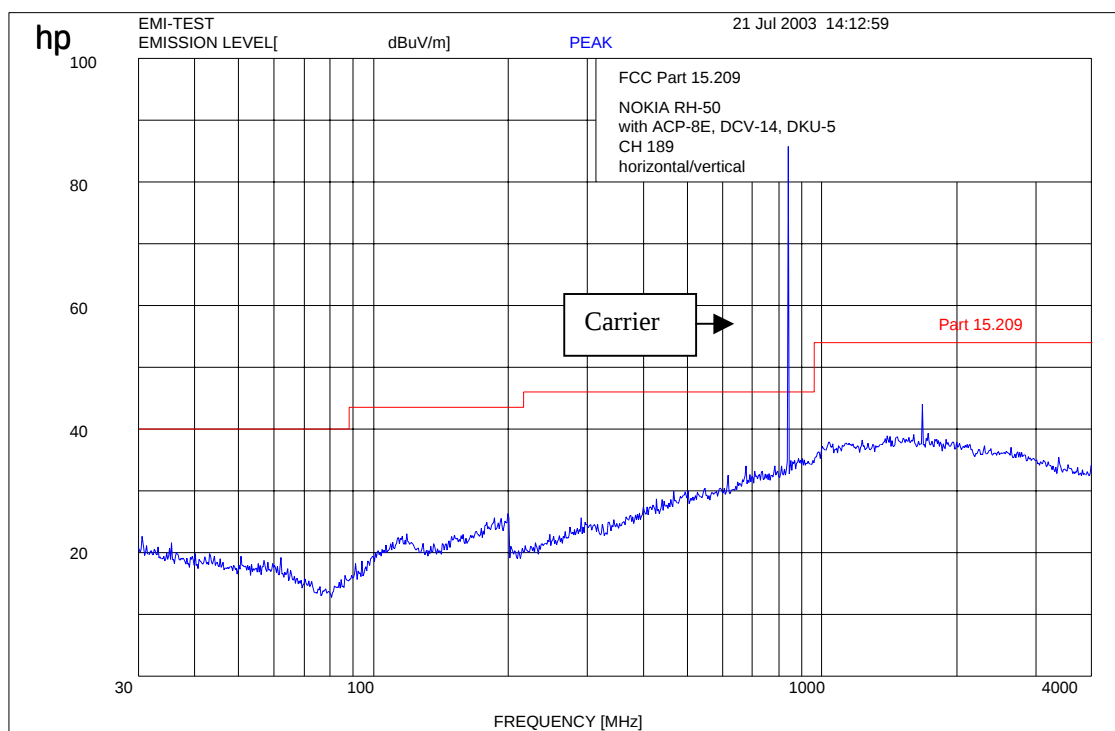

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 189 up to 12 GHz

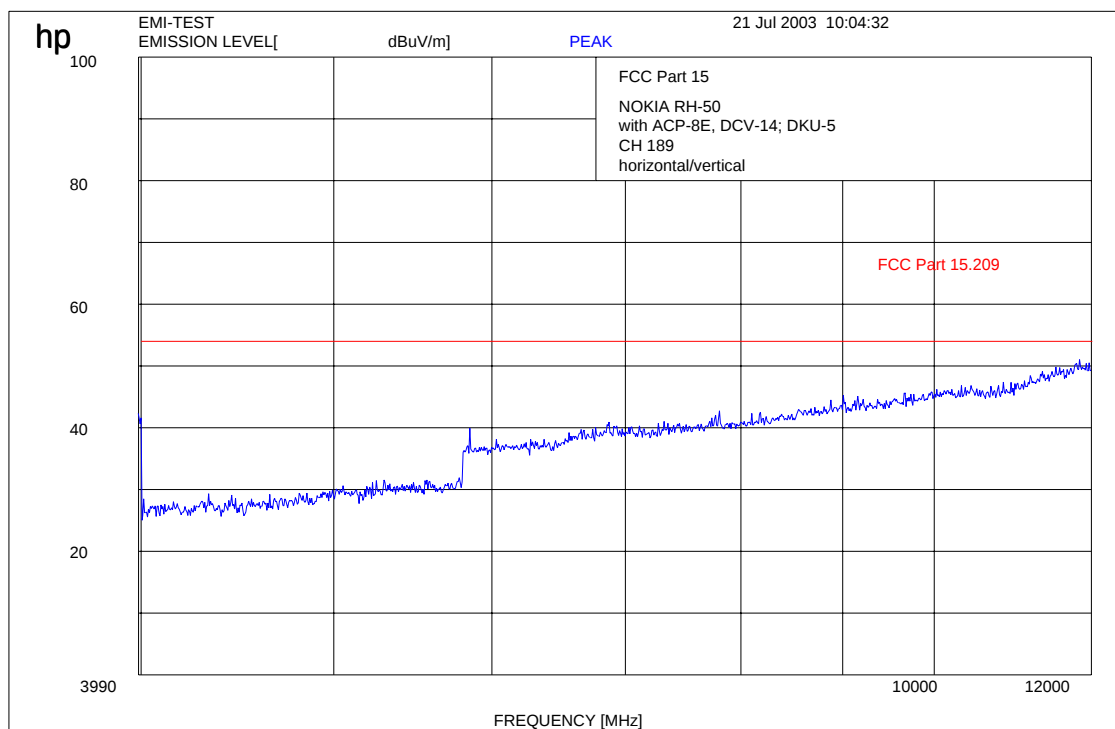

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 189 up to 25 GHz

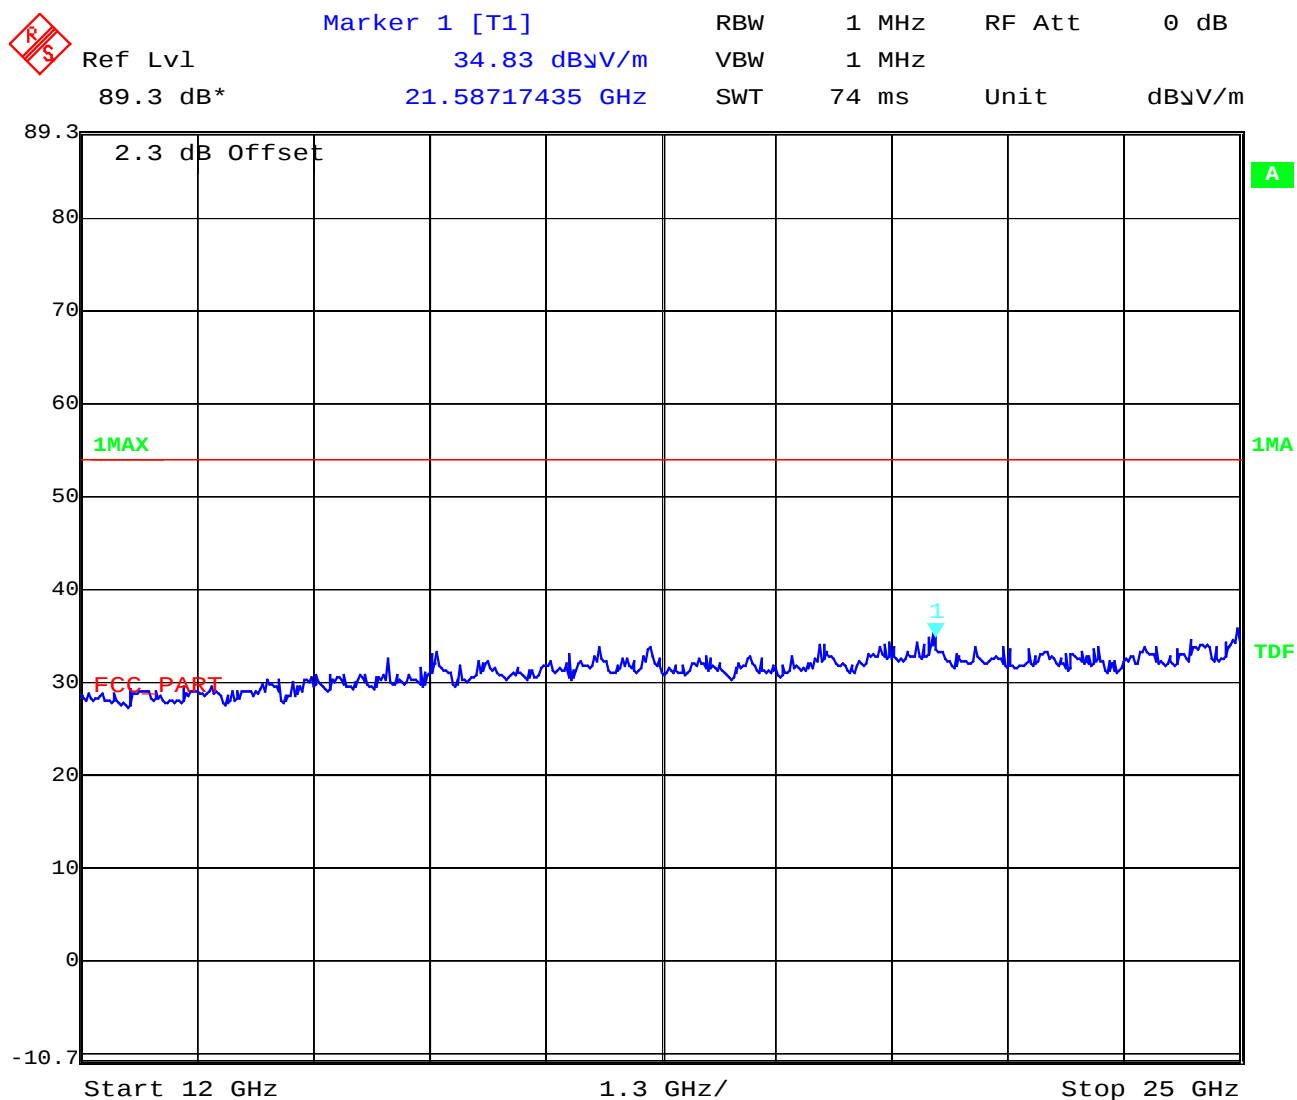

Date: 22. JUL. 2003 06:59:09

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

EUT: RH-50 with ACP-8E, DCV-14, DKU-5
 Manufacturer: Nokia
 Operating Condition: traffic mode 850
 Test Site: Cetecom, Room 6
 Operator: Berg
 Test Specification:
 Comment: 110V / 60 Hz
 Start of Test: 23.07.03 / 11:50:25

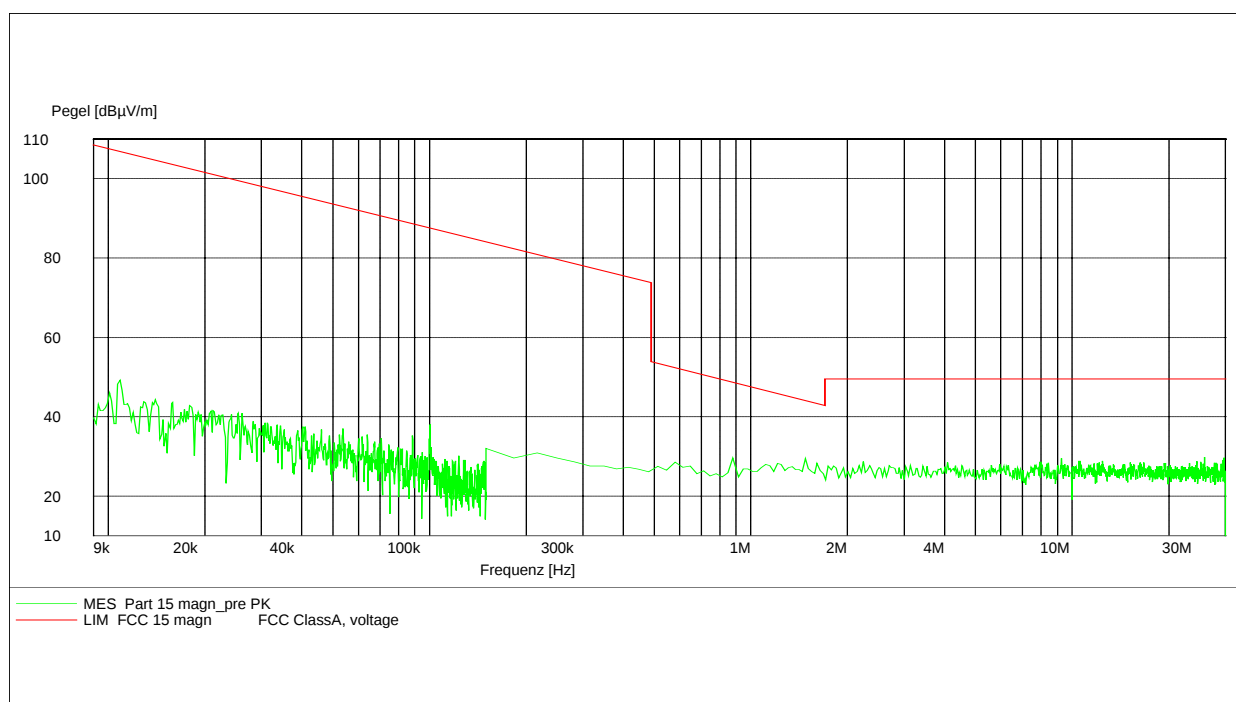

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 661 up to 4 GHz

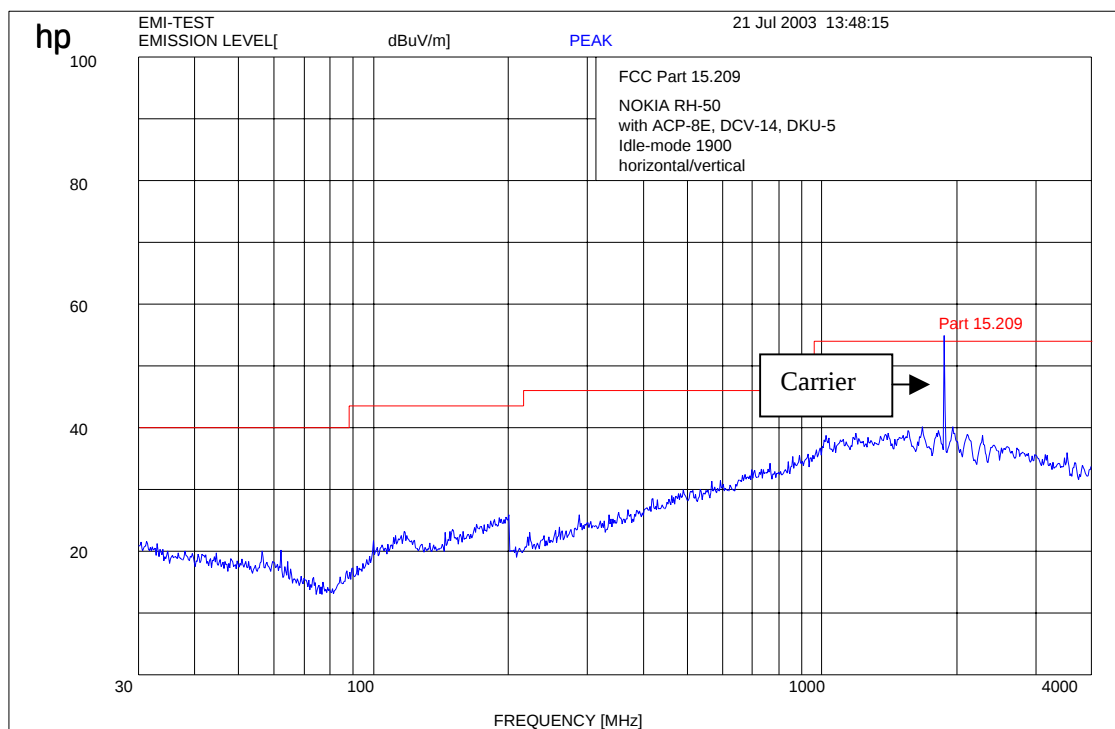

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

§ 15.109

EMI-TEST EMISSION LEVEL[

PEAK

21 Jul 2003 08:45:21

hp

100

80

60

55

40

20

3990

10000

12000

FREQUENCY [MHz]

FCC Part 15

NOKIA RH-50

with ACP-8E, DCV-14; DKU-5

CH 661

horizontal/vertical

FCC Part 15.209


Carrier suppressed with a rejection filter

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 661 up to 25 GHz

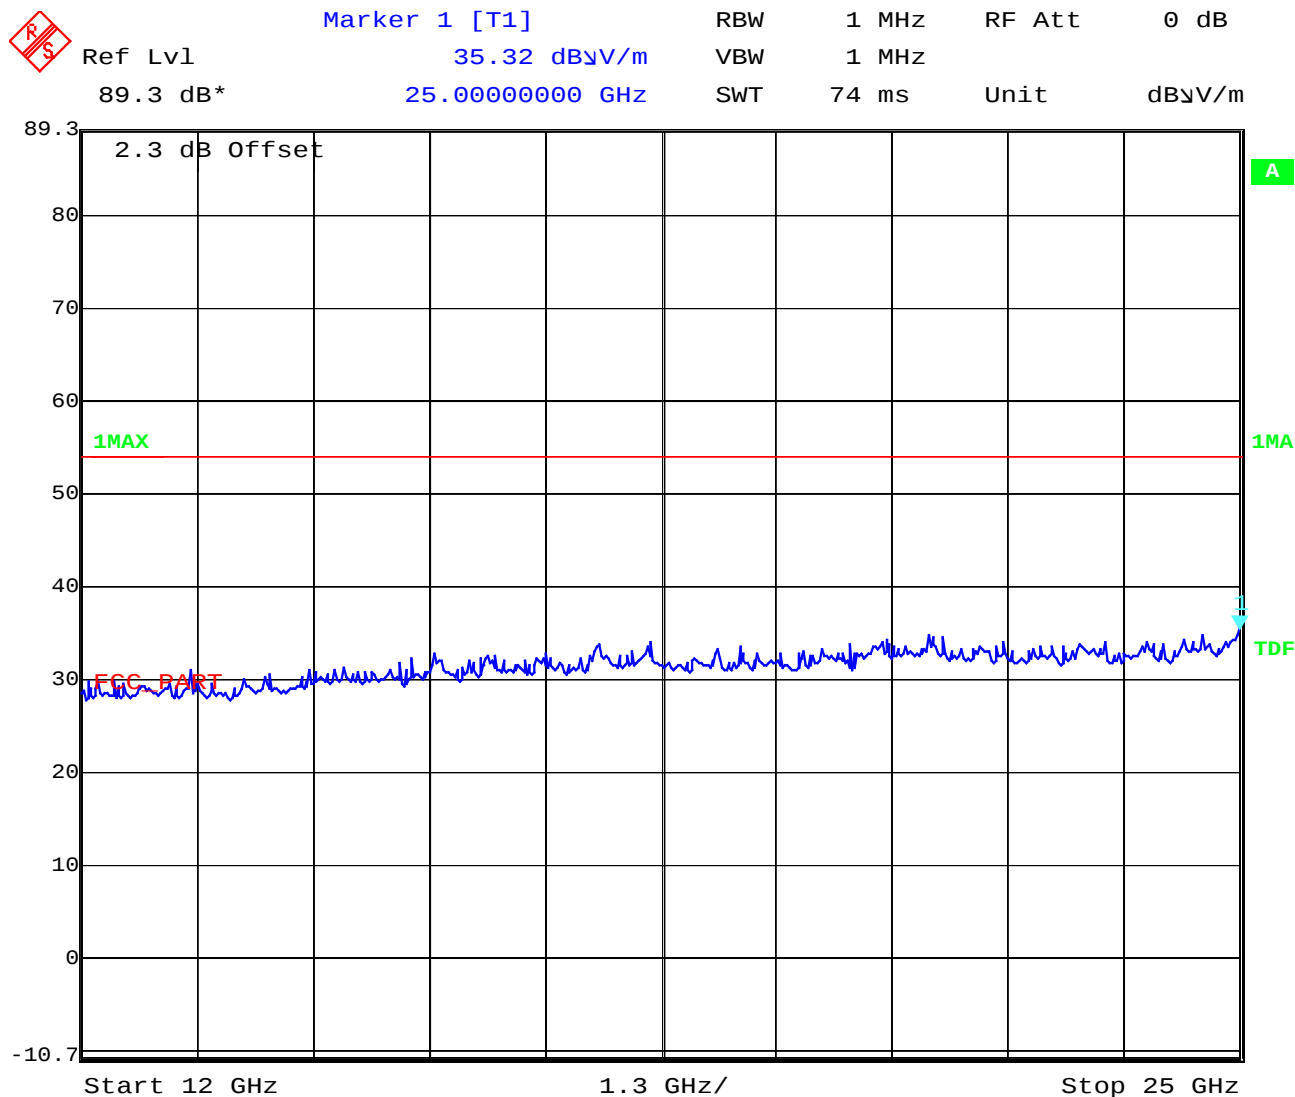

Date: 22. JUL. 2003 07:11:36


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

Idle mode up to 30 MHz (valid for Idle 850 and 1900 MHz)

EUT: RH-50 with ACP-8E, DCV-14; DKU-5
 Manufacturer: Nokia
 Operating Condition: Idle mode
 Test Site: Cetecom, Room 6
 Operator: Berg
 Test Specification:
 Comment: 110V / 60 Hz
 Start of Test: 23.07.03 / 11:37:27

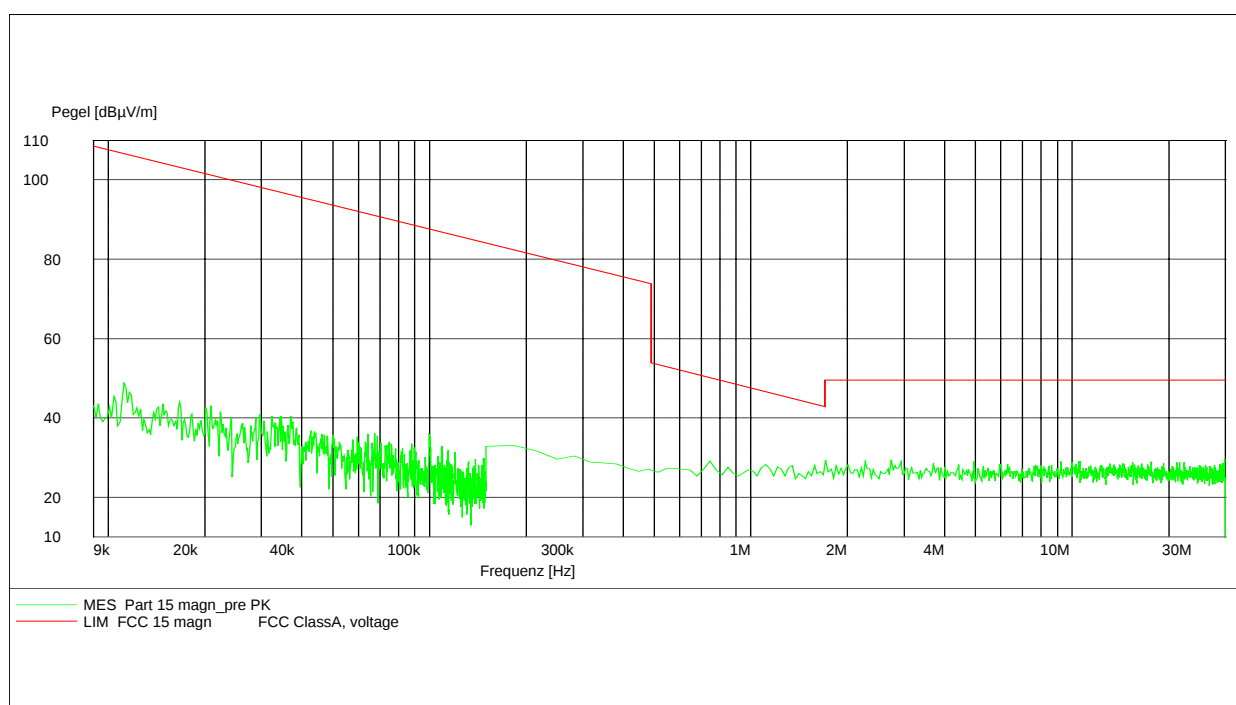

Limits

SUBCLAUSE § 15.109



Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

Idle mode up to 4 GHz

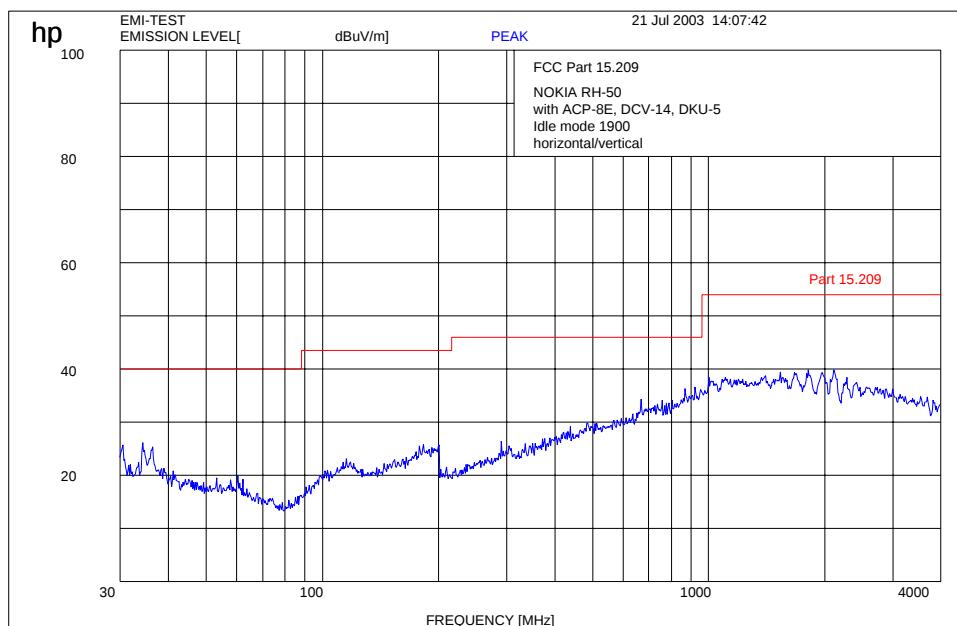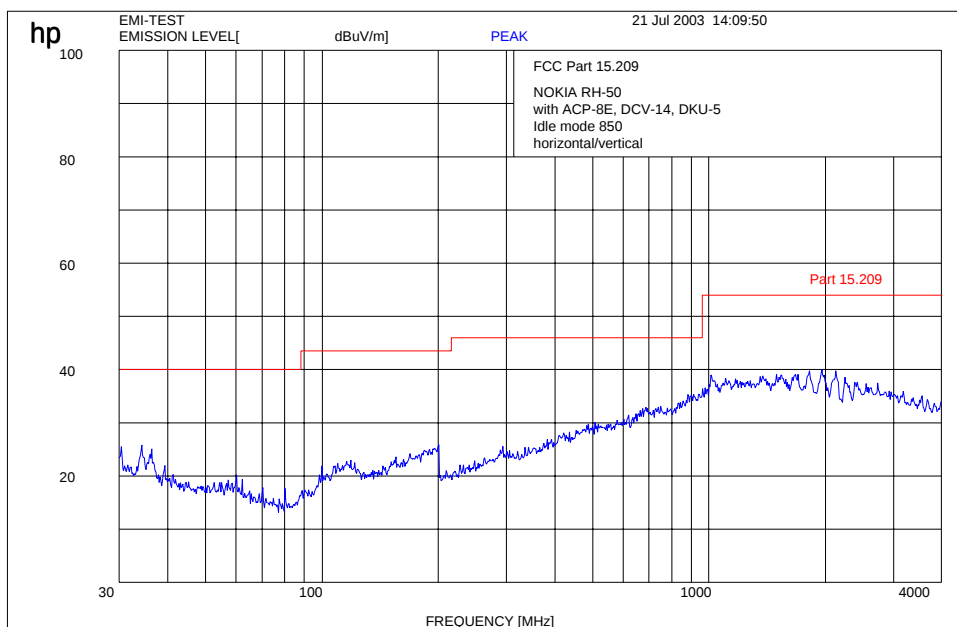

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz



$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

Idle mode up to 12 GHz

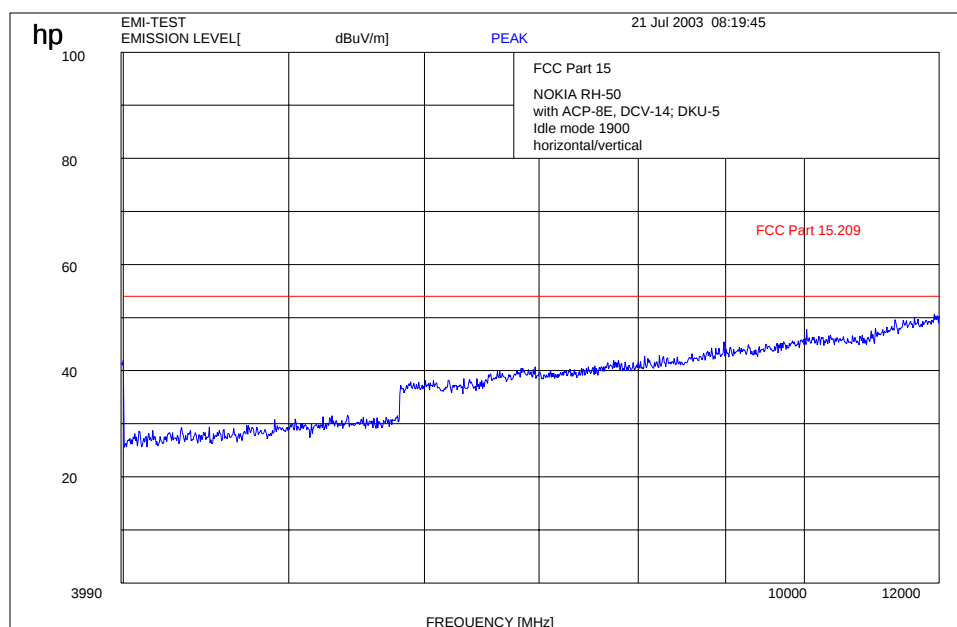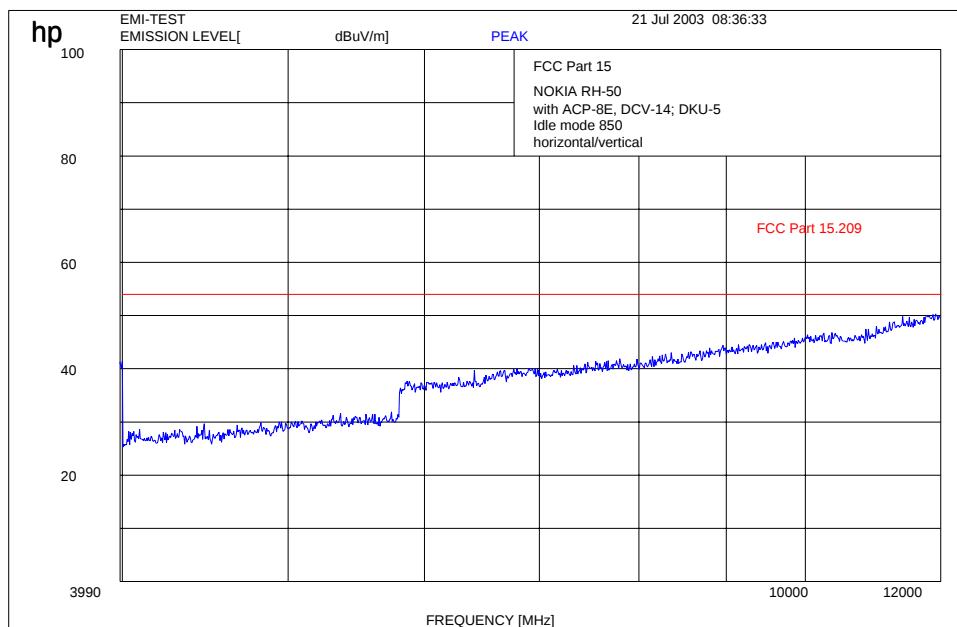

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz


$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

Idle mode up to 25 GHz (850 MHz)

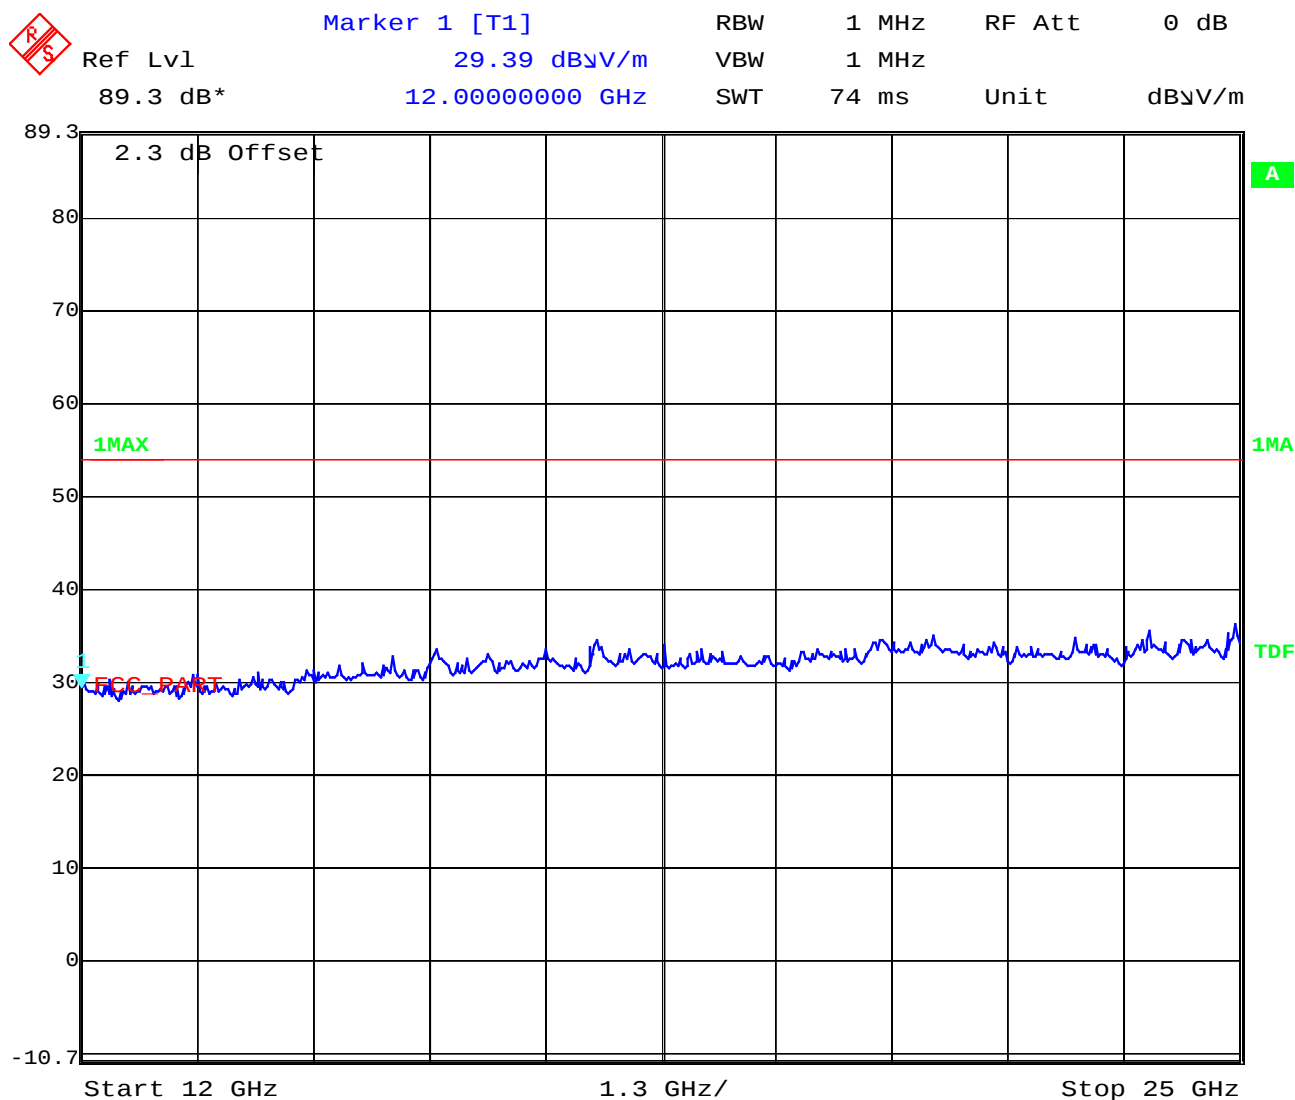

Date: 22. JUL. 2003 06:58:37


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 - 24

SPURIOUS RADIATION

§ 15.109

Idle mode up to 25 GHz (1900 MHz)

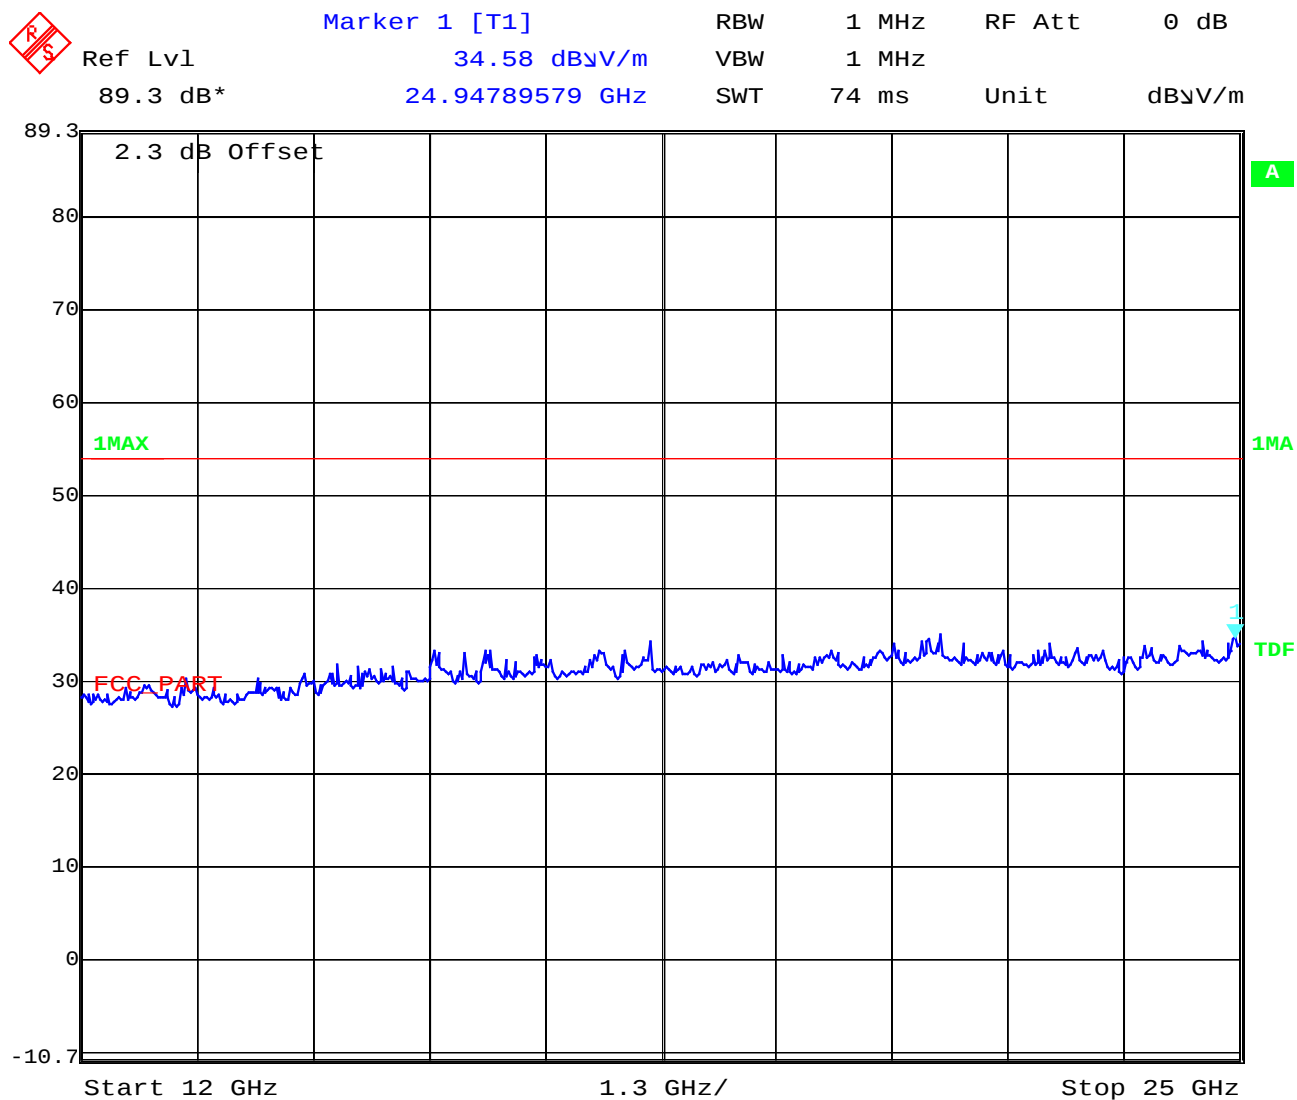


Date: 22. JUL. 2003 07:11:14


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Idle mode up to 4 GHz with Normal and Active Cover (850 MHz)

Active Cover

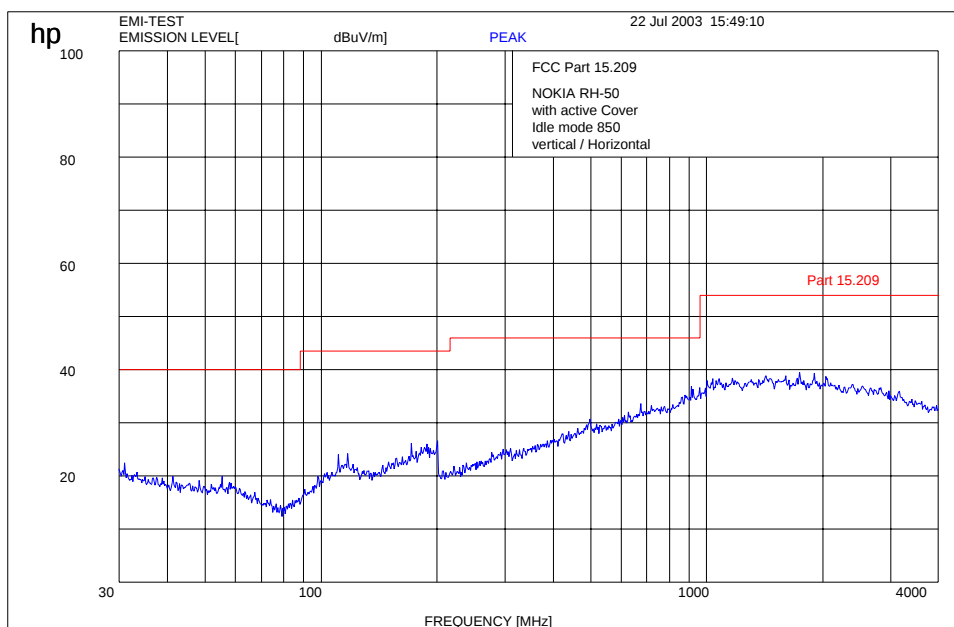

Normal Cover

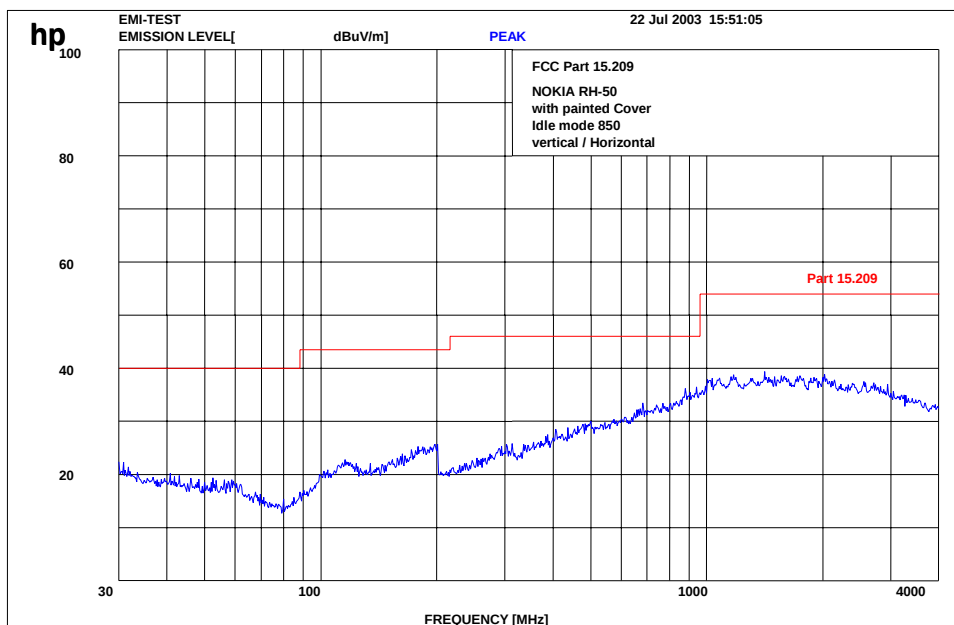


above 4 GHz no traceable peak found

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


17 - 24

Idle mode up to 4 GHz with Normal and Active Cover (1900 MHz)

Active Cover

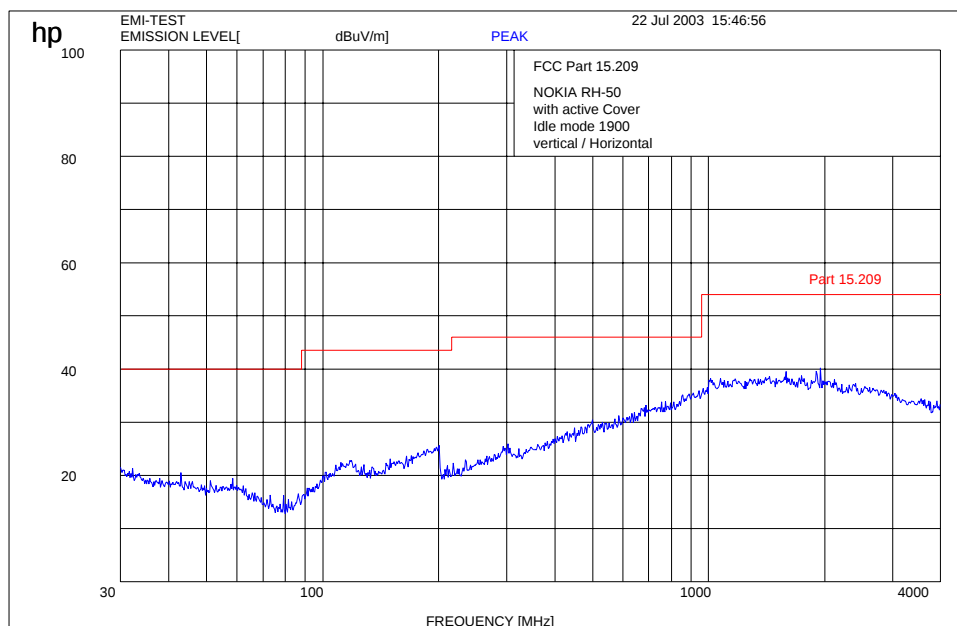

Normal Cover

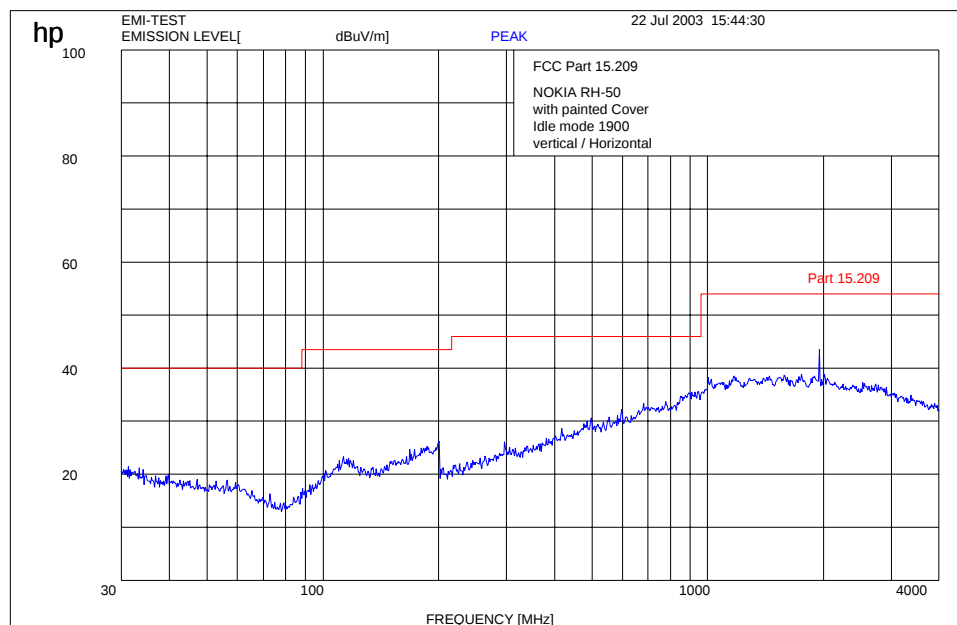

above 4 GHz no traceable peak found

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CONDUCTED EMISSIONS

§ 15.107/207

see pages 55

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Calibrated
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257	Yes
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860	Yes
03	Oscilloscope	7633	Tektronix	230054	Yes
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010	Yes
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027	Yes
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867	Yes
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012	Yes
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032	Yes
09	Regulating Transformer	MPL	Erft	91350	n.a.
10	LISN	NNLA 8120	Schwarzbeck	8120331	Yes
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020	Yes
12	Power-Meter	436 A	Hewlett-Packard	2101A12378	Yes
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156	Yes
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616	Yes
15	Modulation Meter	9008	Racal-Dana	2647	Yes
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899	Yes
17	Anechoic Chamber	---	MWB	87400/002	Yes
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306	Yes
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541	Yes
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131	Yes
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768	Yes
22	Biconical Antenna	3104	Emco	3758	Yes
23	Log. Per. Antenna	3146	Emco	2130	Yes
24	Double Ridged Horn	3115	Emco	3088	Yes
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013	Yes
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008	Yes
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013	Yes
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002	Yes
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002	Yes
30	Highpass	HM985955	FSY Microwave	001	n.a.
31	Amplifier	P42-GA29	Tron-Tech	B 23602	Yes
32	Anechoic Chamber		Frankonia		Yes
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004	Yes
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010	Yes
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010	Yes

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Calibrated
36	Control Computer	HD 100	Deisel	100/322/93	n.a.
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003	Yes
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008	Yes
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001	Yes
40	Power Supply	6032A	Hewlett Packard	2846A04063	Yes
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006	n.a.
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002	Yes
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005	Yes
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011	Yes
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010	Yes
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461	Yes
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002	Yes
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002	Yes
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696	Yes
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105	Yes
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04	Yes
52	Controler	PSM 7	Rohde & Schwarz	883 086/026	Yes
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005	Yes
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012	Yes
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014	Yes
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019	Yes
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007	Yes
58	Power Supply	6032A	Rohde & Schwarz	2933A05441	Yes
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021	Yes
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026	n.a.
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002	Yes
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029	Yes
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007	Yes
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27	Yes
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773	Yes
68					

Test site

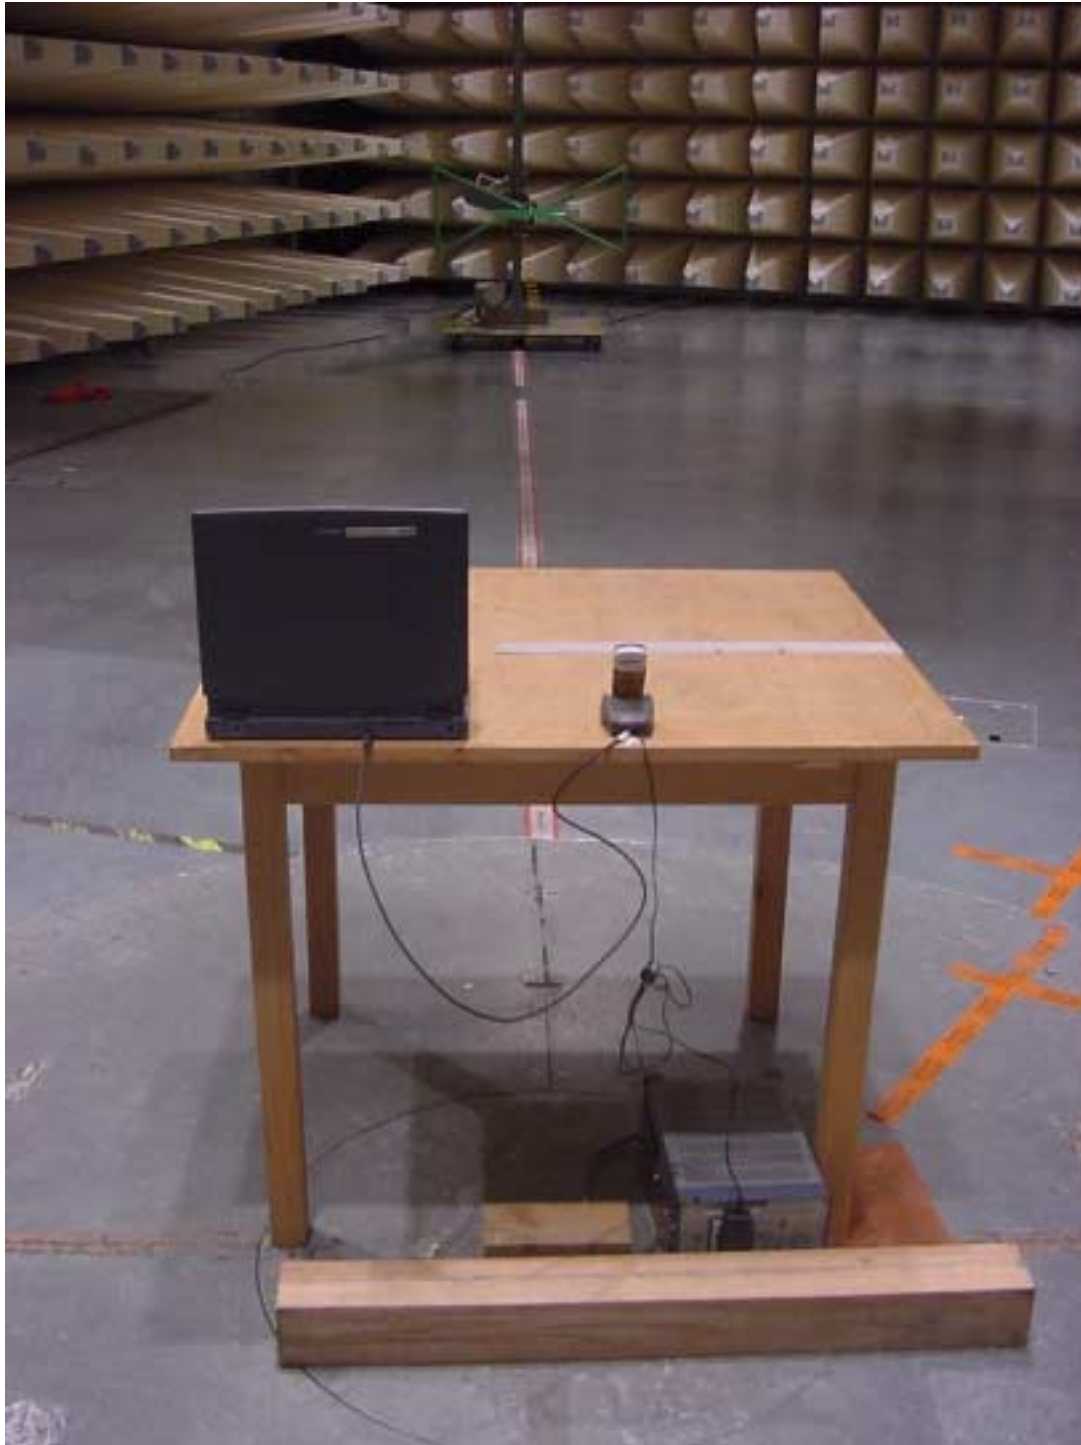

Test site



Test site



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment

RH-50 with Active Cover



Photographs of the equipment

RH-50 with Active Cover




Photographs of the equipment



Photographs of the equipment



Photographs of the equipment

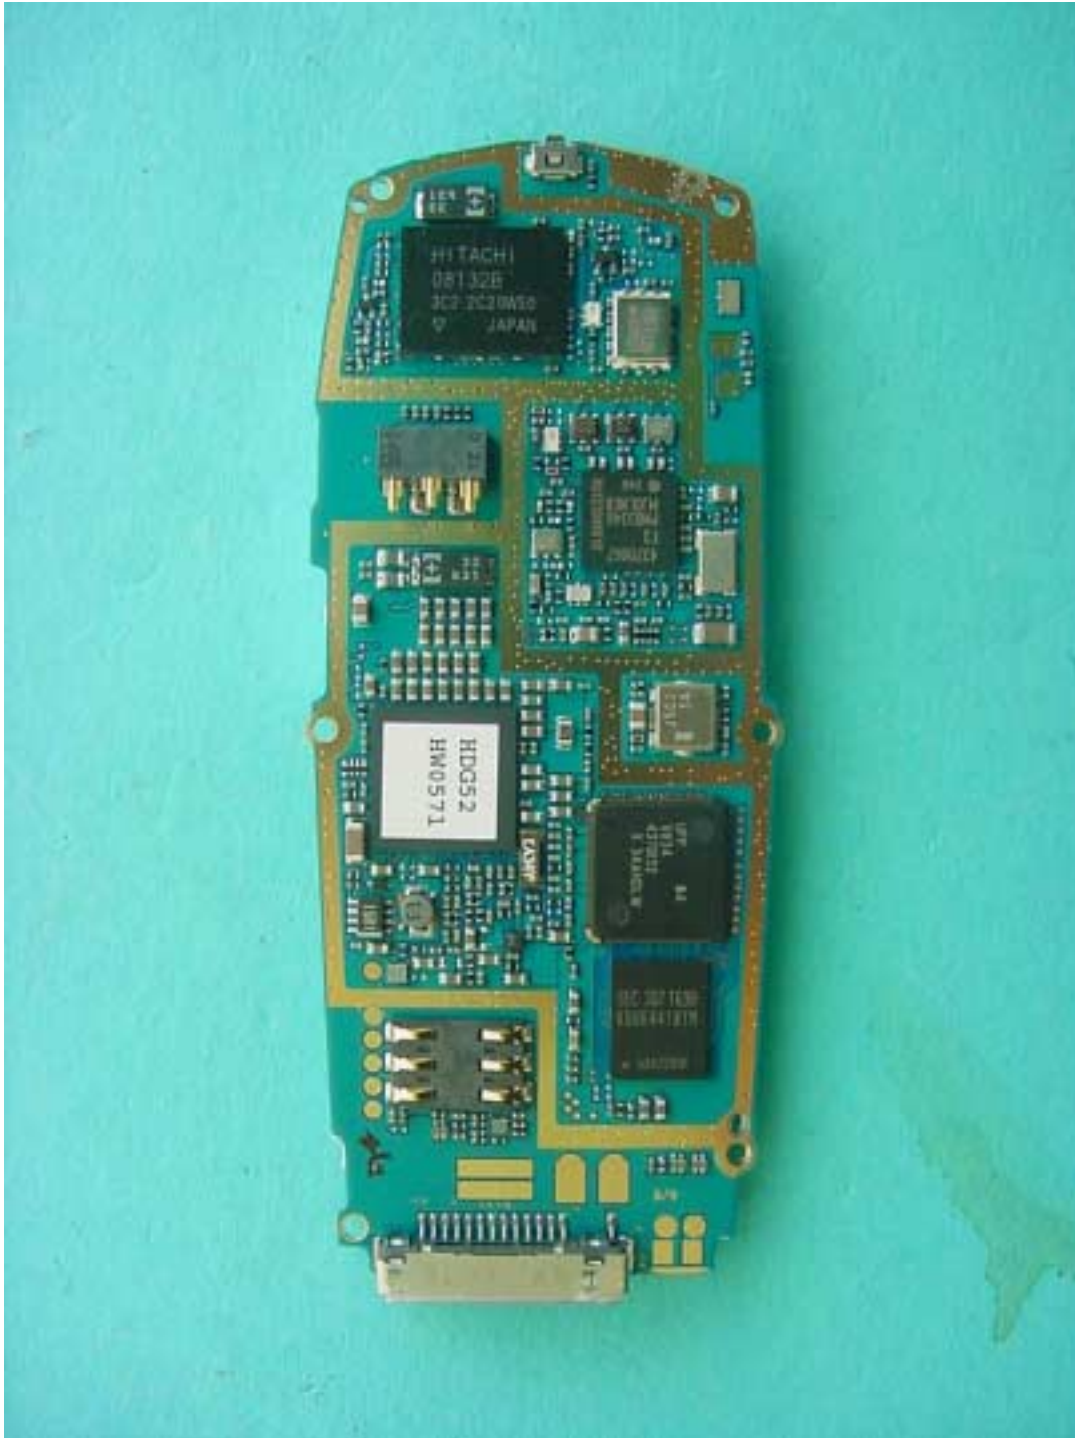

Photographs of the equipment



Photographs of the equipment

DCV-14



Photographs of the equipment

DKU-5



Photographs of the equipment

ACP-8E

