

FCC Part 22/24 Compliance Test Report

Test Report no.:	Tre_FCC_0630_07.doc	Date of Report:	9.8.2006
Number of pages:	17	Customer's Contact person:	Thomas Reitmayer
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Phone RM-147 / Battery BL-5B, Headset HS-47, AC-Charger AC-3		
FCC ID:	PPIRM-147	IC:	661U-RM-147
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	27.07.2006
Testing completed	7.8.2006
The customer's contact person	Thomas Reitmayer
Test Plan referred to	T:\Projects\RM-147\TestPlan_RS\RS_Test_plan_RM-147_2nd.xls
Notes	-
Document name	T:\Projects\RM-147\EMC\Results\FCC\Tre_FCC_0630_07.doc

1.1. EUT and Accessory Information

The EUT is a triple band (GSM850/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-147	004400911605572	0419	-	-	40761
Battery	BL-5B	0670528417535N131H10111989	-	-	-	40795
Headset	HS-47	-	4.1	3.0	-	40719
AC-Charger	AC-3E	-	-	-	-	40733

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	-
§22.913(a)	4.6, 4.4	Radiated RF output power	Passed
§2.1049(h)	4.4.1	99 % occupied bandwidth	-
§22.917(a)	4.7, 4.5	Band edge compliance	Passed
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	-
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	-
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	-
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	-

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	-
§24.232(b)	6.2	Radiated RF output power	Passed
§2.1049(h)	5.6	99 % occupied bandwidth	-
§24.238(a)	6.3	Band edge compliance	Passed
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	-
§24.238(a), §2.1053	6.3	Spurious radiated emissions	-
§2.1055(a)	7	Frequency stability, temperature variation	-
§2.1055(d)	7	Frequency stability, voltage variation	-

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results, Flip Closed	5
2.4. GSM 1900 Test results, Flip Closed	6
2.5. GSM 850 Test results, Flip Open	6
2.6. GSM 1900 Test results, Flip Open	7
3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	8
3.1. Test setup	8
3.2. Test method and limit	8
3.3. GSM 850 Test results, Flip Closed	9
3.4. GSM 1900 Test results, Flip Closed	11
3.5. GSM 850 Test results, Flip Open	13
3.6. GSM 1900 Test results, Flip Open	15
4. Test Equipment	17
4.1. Conducted measurements	17
4.2. Radiated measurements	17

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)

EUT with DUT number	RM-147 #40761
Accessories with DUT numbers	BL-5B #40795, HS-47 #40719, AC-3E #40733
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-23 / 43-45 / 101.0-101.4
Date of measurements	4-7.8.2006
Measured by	Jari Jantunen

2.1. Test setup

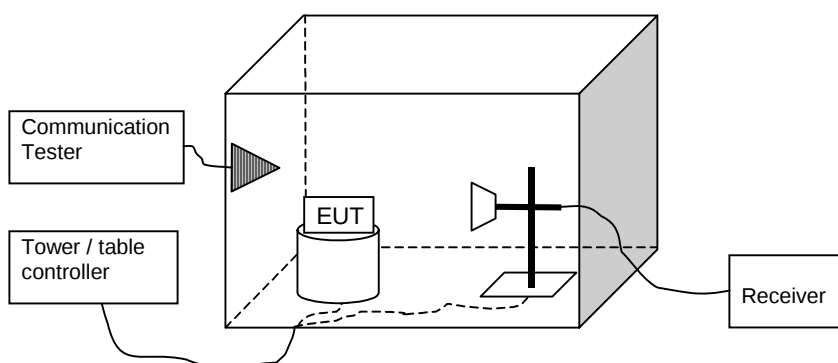

2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5
1850 - 1910	2	33

2.3. GSM 850 Test results, Flip Closed

GSM mode

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	31.80	1.514	- 0.50	32.30	HORIZONTAL	Passed
190 / 836.6	31.60	1.445	- 1.30	32.90	HORIZONTAL	Passed
251 / 848.8	31.10	1.288	- 1.90	33.00	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	28.30	0.676	- 4.00	32.30	HORIZONTAL	Passed
190 / 836.6	28.10	0.646	- 4.80	32.90	HORIZONTAL	Passed
251 / 848.8	30.40	1.096	- 2.60	33.00	HORIZONTAL	Passed

EGPRS mode, 1 TX Slot

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	26.20	0.417	- 6.10	32.30	HORIZONTAL	Passed
190 / 836.6	26.50	0.447	- 6.40	32.90	HORIZONTAL	Passed
251 / 848.8	28.90	0.776	- 4.10	33.00	HORIZONTAL	Passed

T

2.4. GSM 1900 Test results, Flip Closed

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	30.00	1.000	- 12.10	42.10	HORIZONTAL	Passed
661 / 1880.0	30.90	1.230	- 11.70	42.60	HORIZONTAL	Passed
810 / 1909.8	29.00	0.794	- 12.20	41.20	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	27.00	0.501	- 15.10	42.10	HORIZONTAL	Passed
661 / 1880.0	27.80	0.603	- 14.80	42.60	HORIZONTAL	Passed
810 / 1909.8	26.10	0.407	- 15.10	41.20	HORIZONTAL	Passed

EGPRS mode, 1 TX Slot

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	26.90	0.490	- 15.20	42.10	HORIZONTAL	Passed
661 / 1880.0	27.30	0.537	- 15.30	42.60	HORIZONTAL	Passed
810 / 1909.8	22.00	0.158	- 19.20	41.20	HORIZONTAL	Passed

2.5. GSM 850 Test results, Flip Open

GSM mode

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	30.50	1.122	- 1.80	32.30	HORIZONTAL	Passed
190 / 836.6	31.70	1.479	- 1.20	32.90	HORIZONTAL	Passed
251 / 848.8	33.10	2.042	0.10	33.00	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	26.90	0.490	- 5.40	32.30	HORIZONTAL	Passed
190 / 836.6	28.20	0.661	- 4.70	32.90	HORIZONTAL	Passed
251 / 848.8	29.70	0.933	- 3.30	33.00	HORIZONTAL	Passed

EGPRS mode, 1 TX Slot

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	24.70	0.295	- 7.60	32.30	HORIZONTAL	Passed
190 / 836.6	26.50	0.447	- 6.40	32.90	HORIZONTAL	Passed
251 / 848.8	26.40	0.437	- 6.60	33.00	HORIZONTAL	Passed

2.6. GSM 1900 Test results, Flip Open

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	30.30	1.072	- 11.80	42.10	HORIZONTAL	Passed
661 / 1880.0	31.20	1.318	- 11.40	42.60	HORIZONTAL	Passed
810 / 1909.8	29.60	0.912	- 11.60	41.20	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	27.40	0.550	- 14.70	42.10	HORIZONTAL	Passed
661 / 1880.0	28.00	0.631	- 14.60	42.60	HORIZONTAL	Passed
810 / 1909.8	26.60	0.457	- 14.60	41.20	HORIZONTAL	Passed

EGPRS mode, 1 TX Slot


Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	27.20	0.525	- 14.90	42.10	HORIZONTAL	Passed
661 / 1880.0	28.00	0.631	- 14.60	42.60	HORIZONTAL	Passed
810 / 1909.8	26.70	0.468	- 14.50	41.20	HORIZONTAL	Passed

3. Band edge compliance

(FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-147 #40761
Accessories with DUT numbers	BL-5B #40795, HS-47 #40719, AC-3E #40733
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-23 / 43-45 / 101.0-101.4
Date of measurements	4-7.08.2006
Measured by	Jari Jantunen

3.1. Test setup

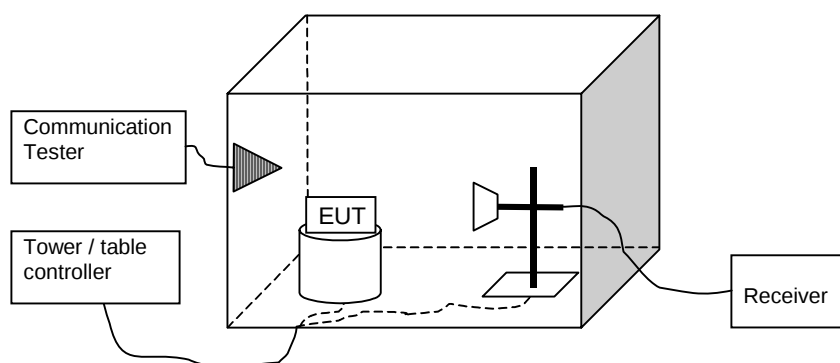

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133.


Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13


3.3. GSM 850 Test results, Flip Closed

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	128 / 824.2	-18.15
GSM	251 / 848.8	-13.94
EGPRS	128 / 824.2	-26.15
EGPRS	251 / 848.8	-22.94


GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

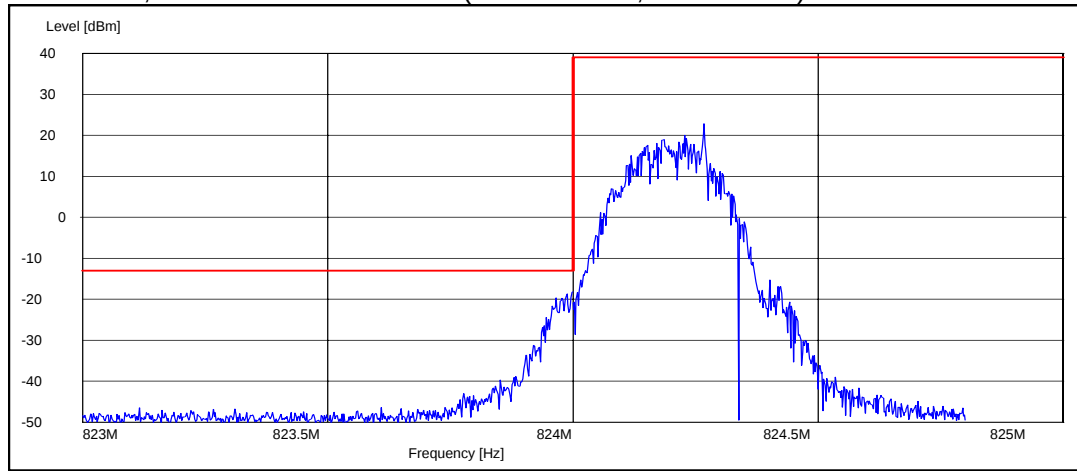


GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

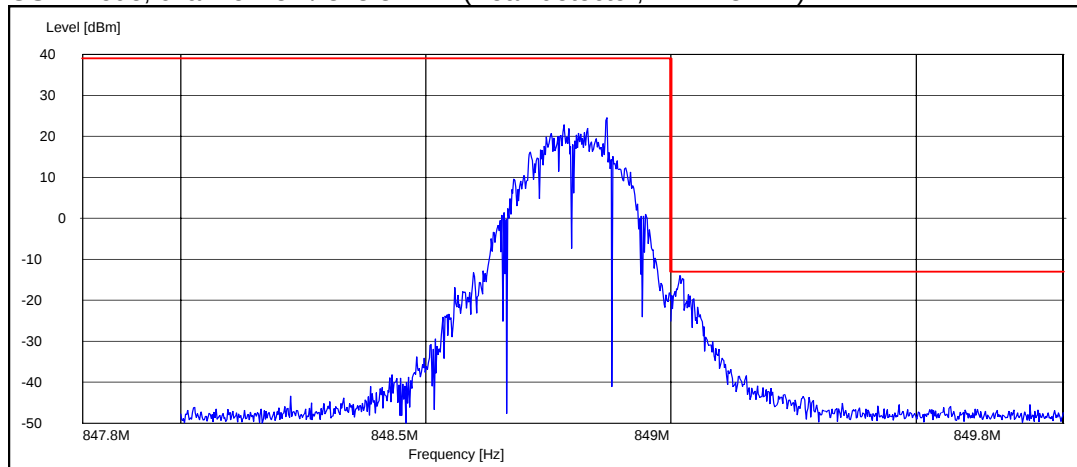

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

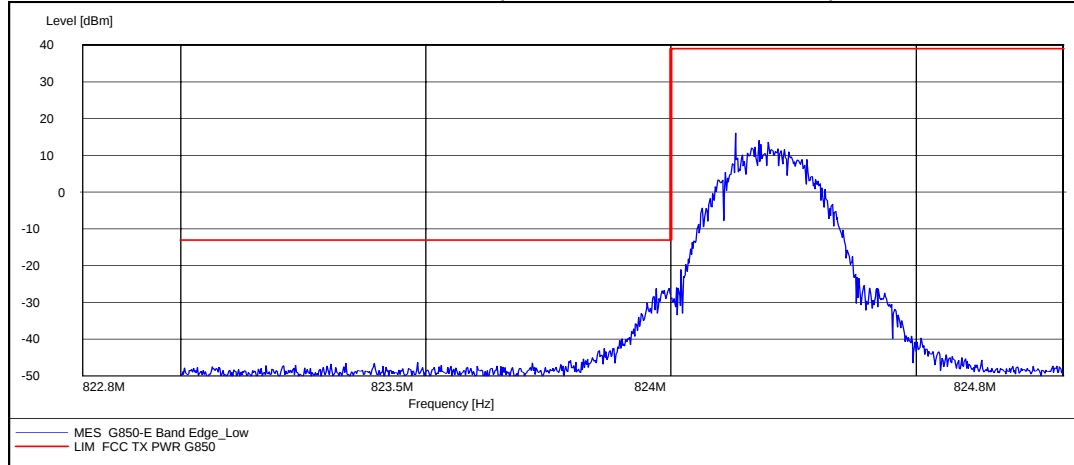


EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

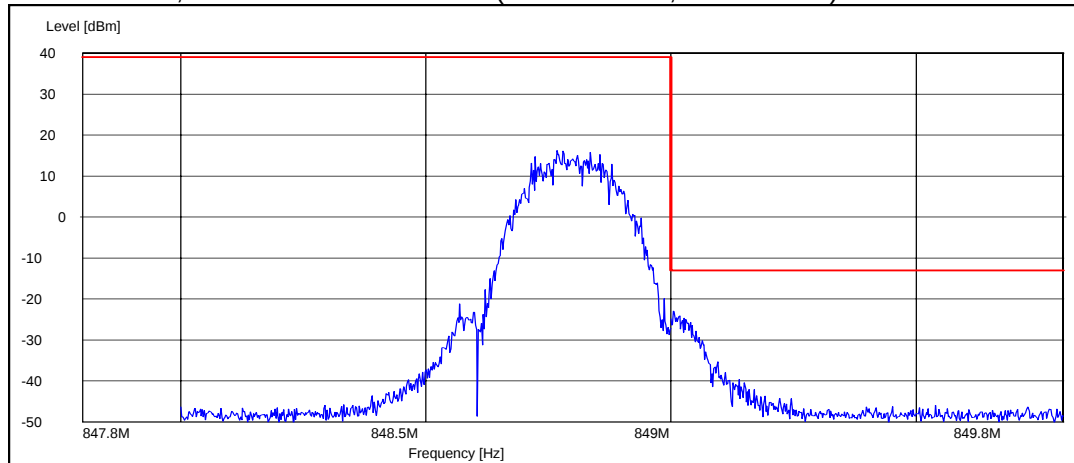


3.4. GSM 1900 Test results, Flip Closed

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-16.23
GSM	810 / 1909.8	-14.45
EGPRS	512 / 1850.2	-23.63
EGPRS	810 / 1909.8	-24.57


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

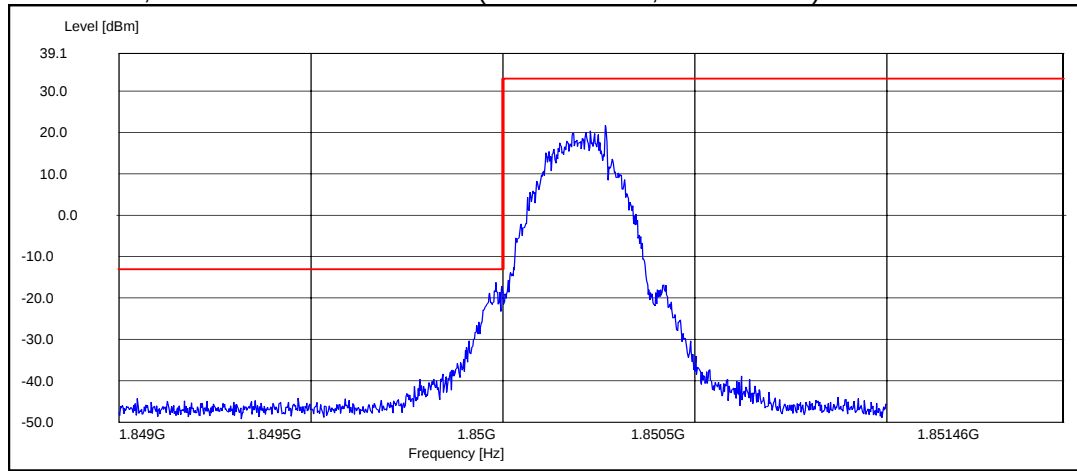


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

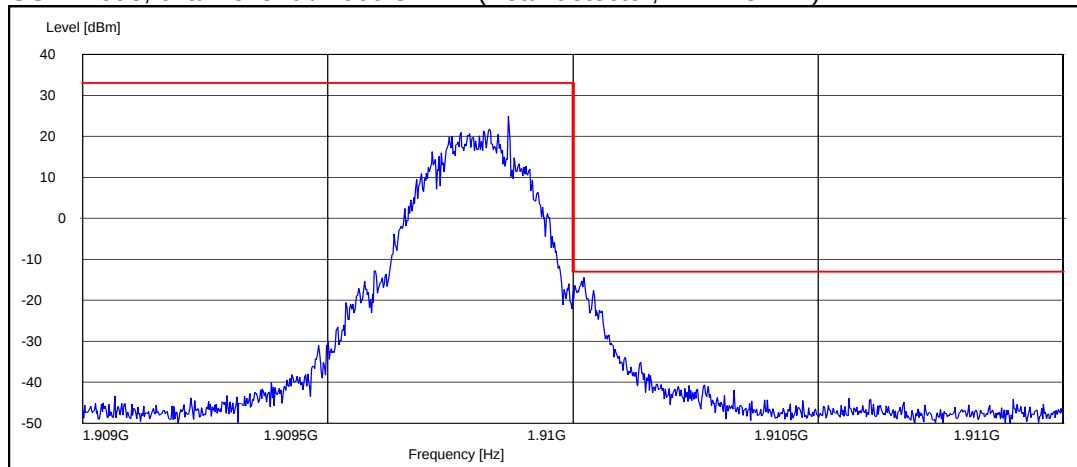

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

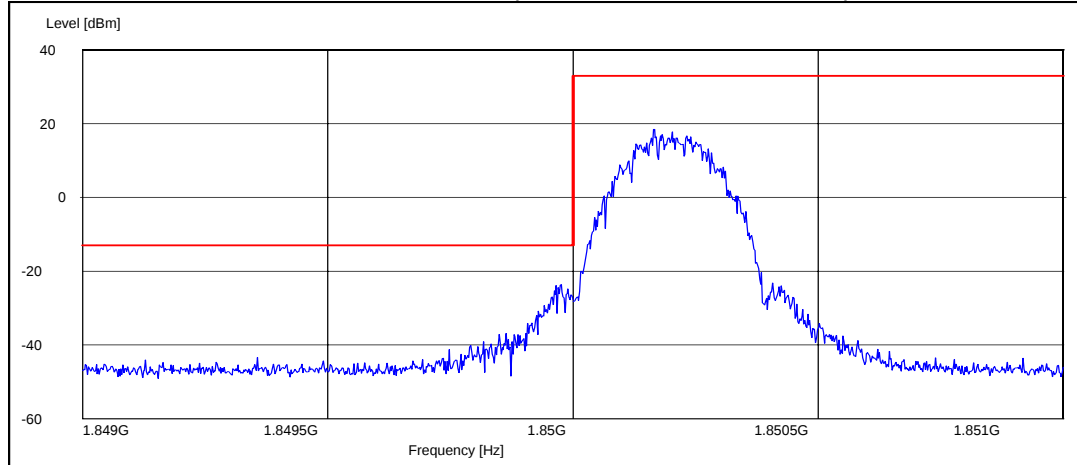


EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

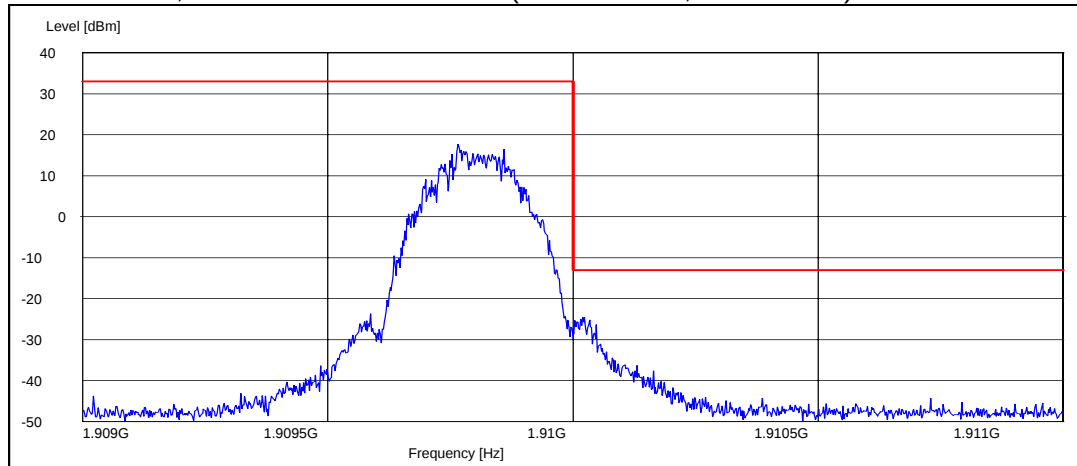


3.5. GSM 850 Test results, Flip Open

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	128 / 824.2	-14.12
GSM	251 / 848.8	-13.94
EGPRS	128 / 824.2	-26.15
EGPRS	251 / 848.8	-22.94


GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

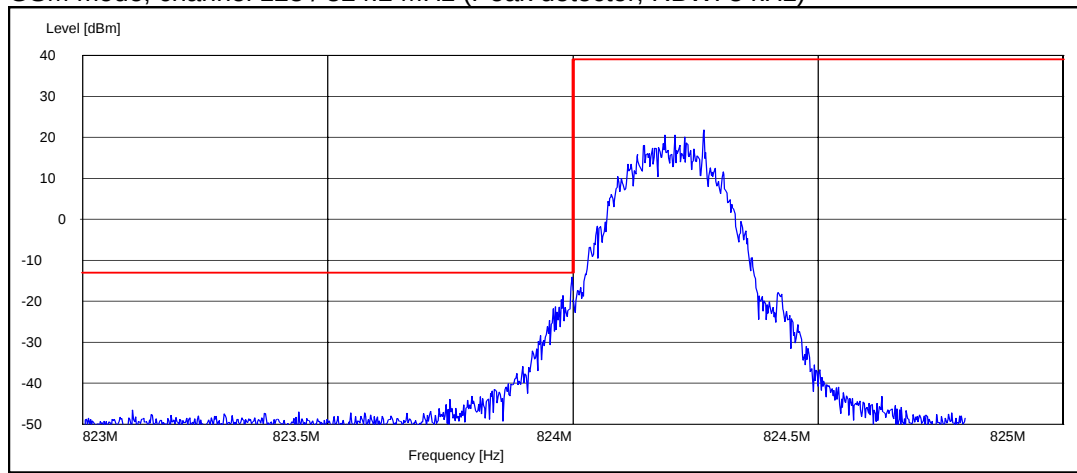


GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

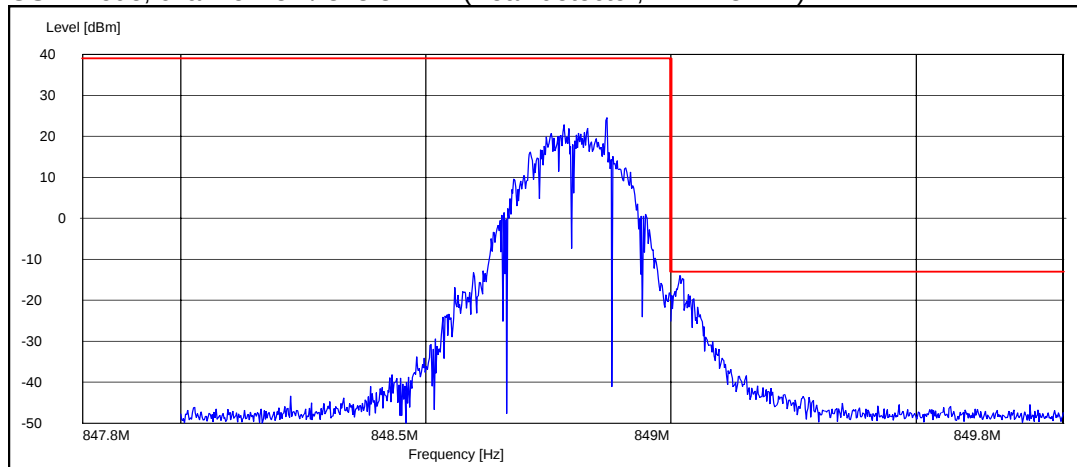

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

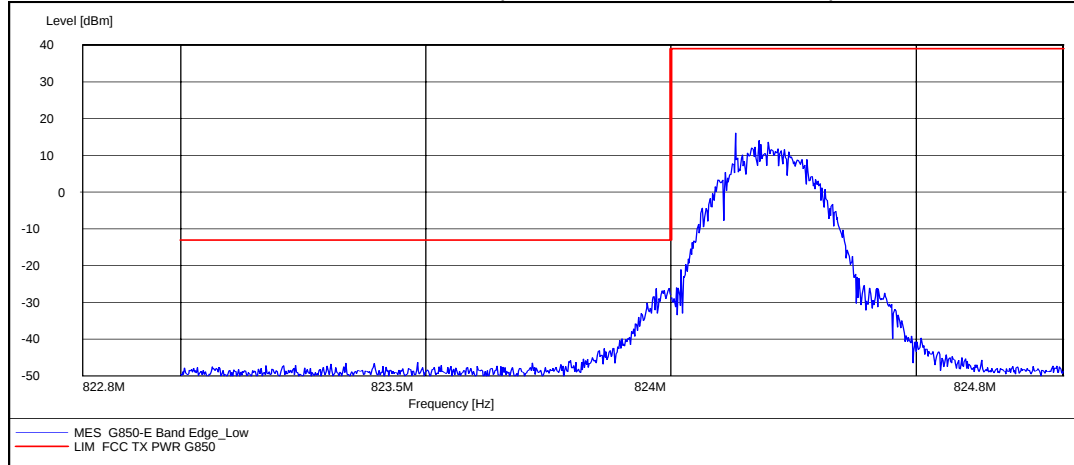


EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

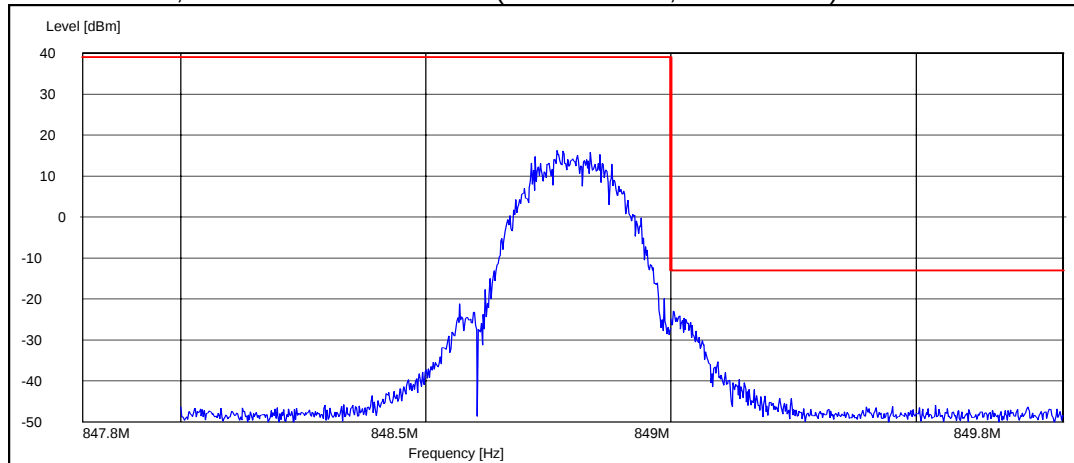


3.6. GSM 1900 Test results, Flip Open

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-13.89
GSM	810 / 1909.8	-14.45
EGPRS	512 / 1850.2	-23.63
EGPRS	810 / 1909.8	-24.57


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

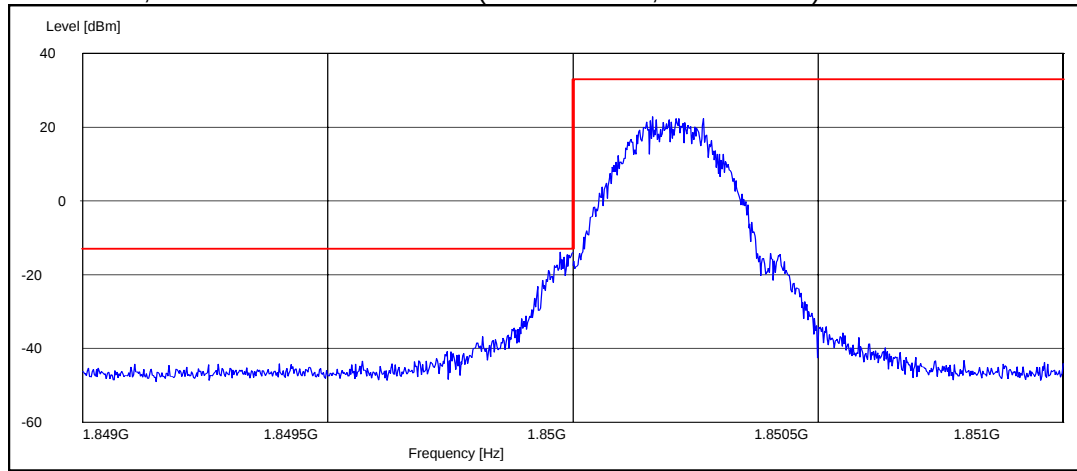


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

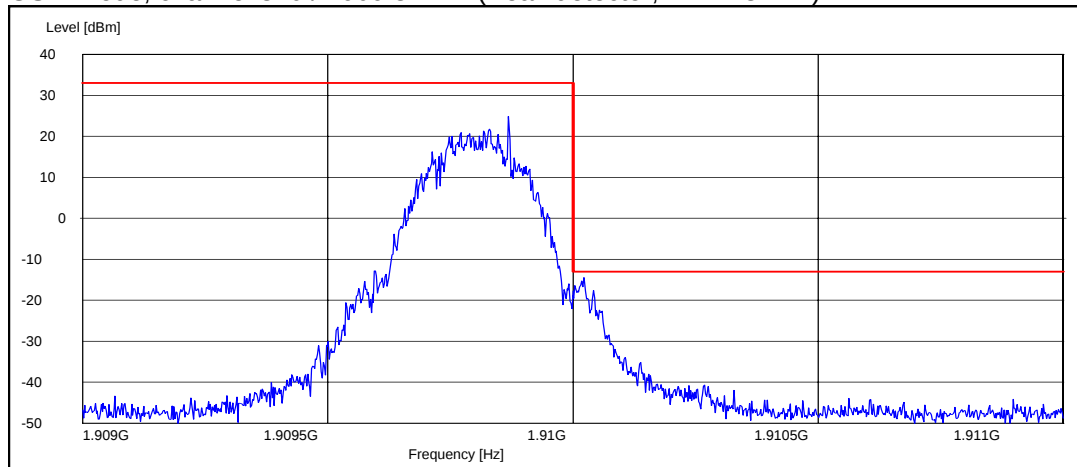

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

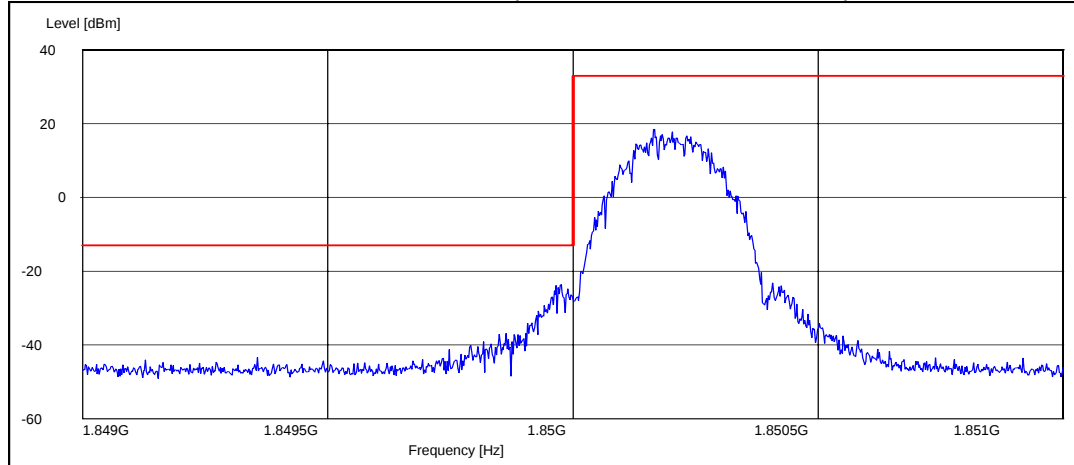

EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

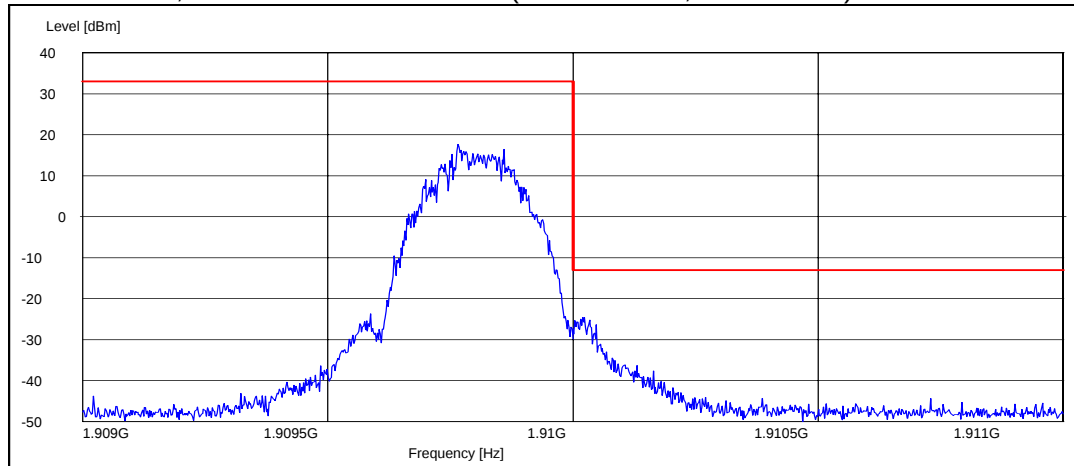

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	15C,22/24
TM37678	Radio communication tester	CMU-200	R&S	15C,22/24
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	15C,22/24
TM22901	Step attenuator 110dB	8496A	Agilent	15C,22/24
TM37499	Power splitter	11667A	Agilent	15C,22/24
	Temperature chamber	VT4002	Vötsch	15C,22/24
TM38112	DC power supply	6632A	Agilent	15C,22/24
TM38111	Multimeter	34401A	Agilent	15C,22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C
TM37773	Radio communication tester	CMU-200	R&S	15B,15C
TM38631	Signal generator	83640L	Agilent	15B,15C
TM38114	DC power supply	6632A	Agilent	15B,15C
TM22835	Multimeter	87	Fluke	15B,15C
TM30600	Pulse Limiter	ESH3-Z2	R&S	15B,15C
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15B,15C
TM30636	LISN 50 µH	L2-16/	PMM	15B,15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	15B,15C, 22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C, 22/24
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	15B,15C, 22/24
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	15B,15C, 22/24
TM37516	Biconilog antenna	HL562	R&S	15B,15C, 22/24
TM26496	Double ridged waveguide antenna	3115	EMCO	15B,15C, 22/24
TM39158	Horn antenna	3116	EMCO	15B,15C, 22/24
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	15B,15C, 22/24
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	15B,15C, 22/24
TM38631	Signal generator	83640L	Agilent	15B,15C, 22/24
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	15B,15C, 22/24
	High pass filter	WHK2010-10SS	Trilithic	15B,15C, 22/24
	Low pass filter	WLK1750-10SS	Trilithic	15B,15C, 22/24
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	15B,15C, 22/24
TM26500	Turntable	DS412	Deisel	15B,15C, 22/24
TM38842	Antenna mast controller	2090	EMCO	15B,15C, 22/24
TM38843	Antenna mast	2075	EMCO	15B,15C, 22/24
TM38114	DC power supply	6632A	Agilent	15B,15C, 22/24
TM22835	Multimeter	87	Fluke	15B,15C, 22/24