



**Test Mode**      **Mode 1, Band 3**


Test Mode : 1TX 11a CH100 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.93          | 45.38          | 54.00          | -8.62       | Average  | 103         | 209           | P   |
| 2   | 5460.00         | -0.55       | 58.54          | 57.99          | 74.00          | -16.01      | Peak     | 103         | 209           | P   |
| 3   | 5470.00         | -0.51       | 60.43          | 59.92          | 68.20          | -8.28       | Peak     | 103         | 209           | P   |
| 4   | 5500.00         | -0.39       | 89.89          | 89.50          | 200.00         | -110.50     | Average  | 103         | 209           | P   |
| 5   | 5500.00         | -0.39       | 99.47          | 99.08          | 200.00         | -100.92     | Peak     | 103         | 209           | P   |
| 6   | 11000.00        | 4.81        | 36.39          | 41.20          | 54.00          | -12.80      | Average  | 100         | 104           | P   |
| 7   | 11000.00        | 4.81        | 47.11          | 51.92          | 74.00          | -22.08      | Peak     | 100         | 104           | P   |
| 8   | 16500.00        | 6.78        | 46.55          | 53.33          | 68.20          | -14.87      | Peak     | 100         | 305           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH120 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

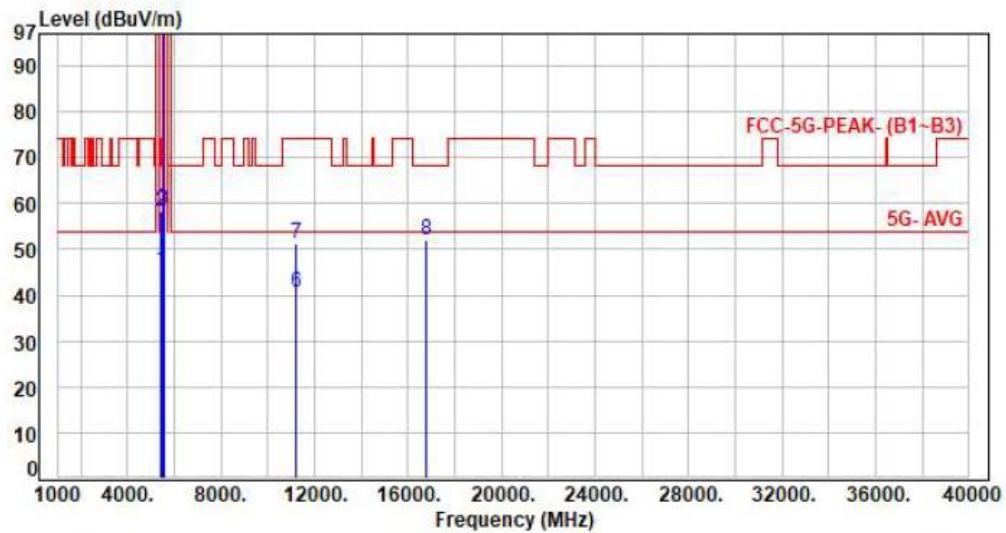

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.93          | 45.38          | 54.00          | -8.62       | Average  | 100         | 313           | P   |
| 2   | 5460.00         | -0.55       | 58.88          | 58.33          | 74.00          | -15.67      | Peak     | 100         | 313           | P   |
| 3   | 5470.00         | -0.51       | 58.98          | 58.47          | 68.20          | -9.73       | Peak     | 100         | 313           | P   |
| 4   | 5600.00         | 0.01        | 96.09          | 96.10          | 200.00         | -103.90     | Average  | 100         | 313           | P   |
| 5   | 5600.00         | 0.01        | 105.95         | 105.96         | 200.00         | -94.04      | Peak     | 100         | 313           | P   |
| 6   | 11200.00        | 5.07        | 35.58          | 40.65          | 54.00          | -13.35      | Average  | 100         | 256           | P   |
| 7   | 11200.00        | 5.07        | 46.01          | 51.08          | 74.00          | -22.92      | Peak     | 100         | 256           | P   |
| 8   | 16800.00        | 5.89        | 46.29          | 52.18          | 68.20          | -16.02      | Peak     | 100         | 154           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH120 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

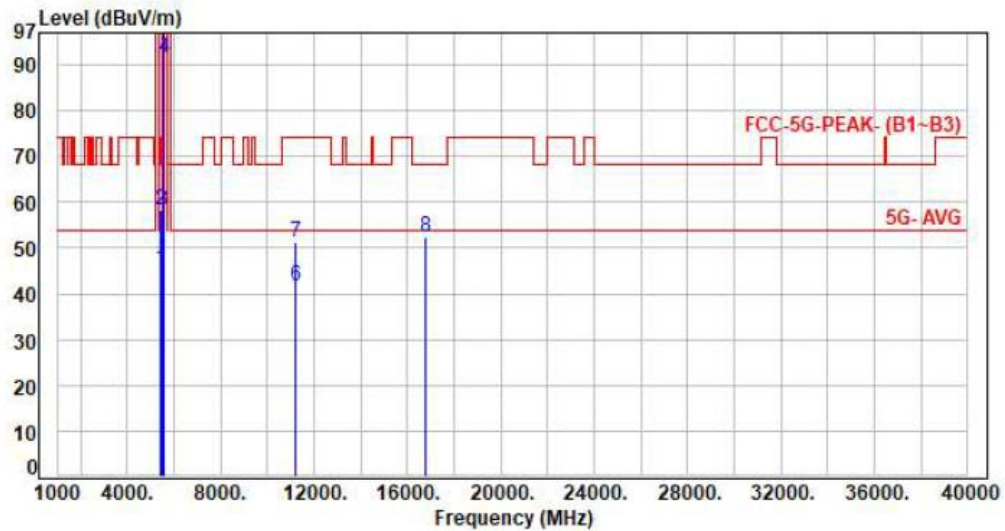

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.75          | 45.20          | 54.00          | -8.80       | Average  | 165         | 171           | P   |
| 2   | 5460.00         | -0.55       | 58.86          | 58.31          | 74.00          | -15.69      | Peak     | 165         | 171           | P   |
| 3   | 5470.00         | -0.51       | 58.76          | 58.25          | 68.20          | -9.95       | Peak     | 165         | 171           | P   |
| 4   | 5600.00         | 0.01        | 91.37          | 91.38          | 200.00         | -108.62     | Average  | 165         | 171           | P   |
| 5   | 5600.00         | 0.01        | 101.94         | 101.95         | 200.00         | -98.05      | Peak     | 165         | 171           | P   |
| 6   | 11200.00        | 5.07        | 36.76          | 41.83          | 54.00          | -12.17      | Average  | 100         | 107           | P   |
| 7   | 11200.00        | 5.07        | 46.13          | 51.20          | 74.00          | -22.80      | Peak     | 100         | 107           | P   |
| 8   | 16800.00        | 5.89        | 46.54          | 52.43          | 68.20          | -15.77      | Peak     | 100         | 305           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH140 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

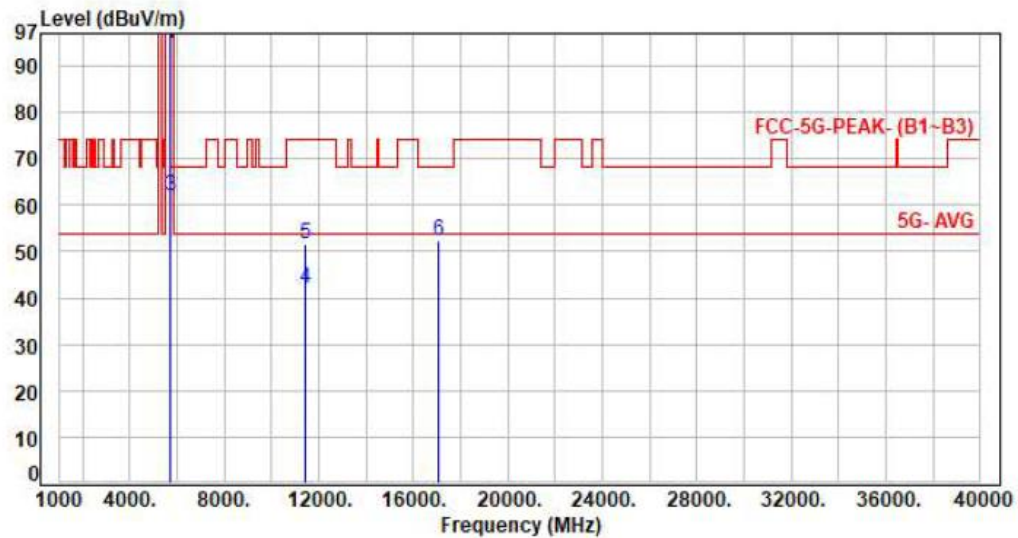


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 0.61        | 94.11          | 94.72          | 200.00         | -105.28     | Average  | 104         | 316           | P   |
| 2   | 5700.00         | 0.61        | 104.08         | 104.69         | 200.00         | -95.31      | Peak     | 104         | 316           | P   |
| 3   | 5725.00         | 0.66        | 61.36          | 62.02          | 68.20          | -6.18       | Peak     | 104         | 316           | P   |
| 4   | 11400.00        | 5.31        | 36.86          | 42.17          | 54.00          | -11.83      | Average  | 100         | 105           | P   |
| 5   | 11400.00        | 5.31        | 46.30          | 51.61          | 74.00          | -22.39      | Peak     | 100         | 105           | P   |
| 6   | 17100.00        | 5.81        | 46.69          | 52.50          | 68.20          | -15.70      | Peak     | 100         | 302           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH140 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

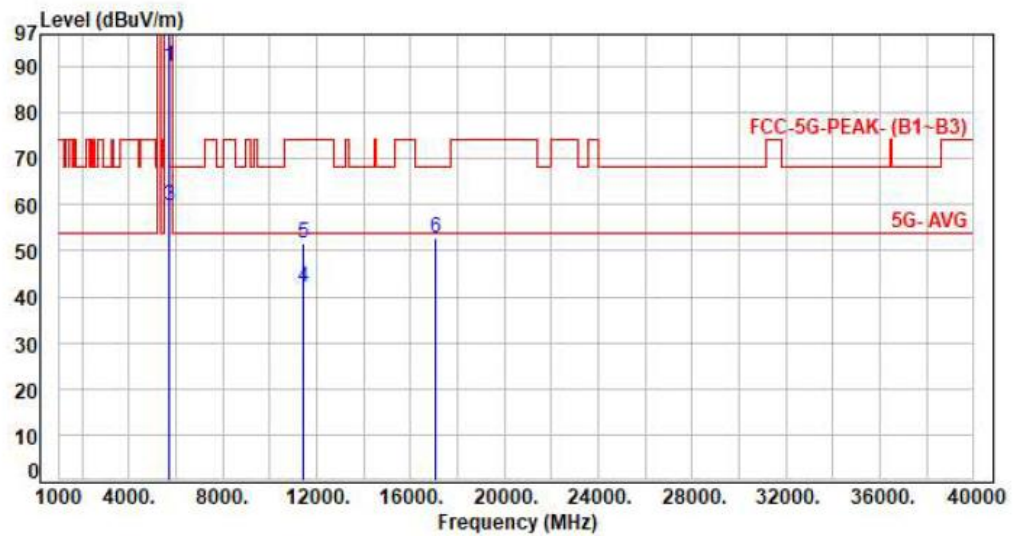

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 0.61        | 89.23          | 89.84          | 200.00         | -110.16     | Average  | 155         | 187           | P   |
| 2   | 5700.00         | 0.61        | 98.74          | 99.35          | 200.00         | -100.65     | Peak     | 155         | 187           | P   |
| 3   | 5725.00         | 0.66        | 58.94          | 59.60          | 68.20          | -8.60       | Peak     | 155         | 187           | P   |
| 4   | 11400.00        | 5.31        | 36.59          | 41.90          | 54.00          | -12.10      | Average  | 100         | 251           | P   |
| 5   | 11400.00        | 5.31        | 46.36          | 51.67          | 74.00          | -22.33      | Peak     | 100         | 251           | P   |
| 6   | 17100.00        | 5.81        | 46.86          | 52.67          | 68.20          | -15.53      | Peak     | 100         | 152           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH100 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

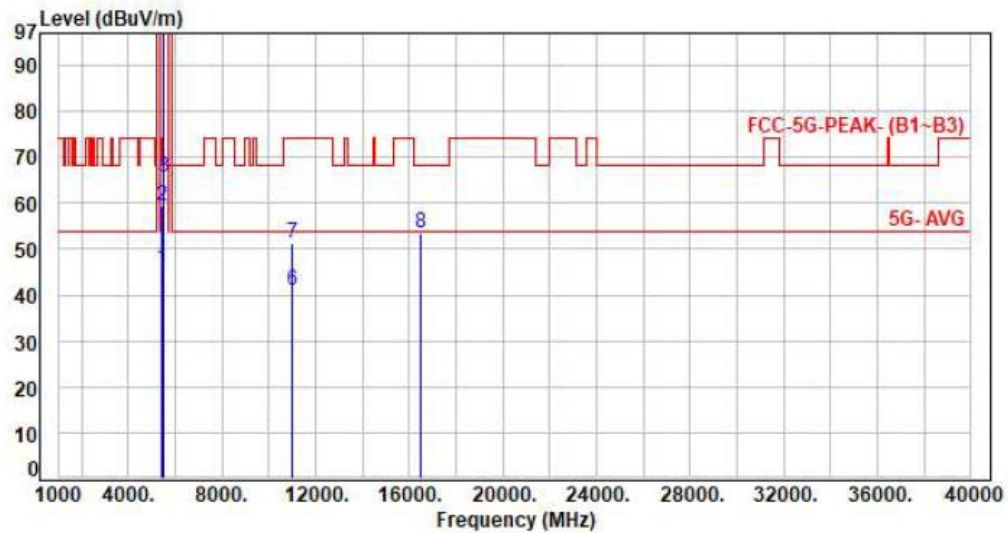

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.37          | 45.82          | 54.00          | -8.18       | Average  | 115         | 298           | P   |
| 2   | 5460.00         | -0.55       | 59.85          | 59.30          | 74.00          | -14.70      | Peak     | 115         | 298           | P   |
| 3   | 5470.00         | -0.51       | 66.07          | 65.56          | 68.20          | -2.64       | Peak     | 115         | 298           | P   |
| 4   | 5500.00         | -0.39       | 96.45          | 96.06          | 200.00         | -103.94     | Average  | 115         | 298           | P   |
| 5   | 5500.00         | -0.39       | 107.67         | 107.28         | 200.00         | -92.72      | Peak     | 115         | 298           | P   |
| 6   | 11000.00        | 4.81        | 36.29          | 41.10          | 54.00          | -12.90      | Average  | 100         | 256           | P   |
| 7   | 11000.00        | 4.81        | 46.58          | 51.39          | 74.00          | -22.61      | Peak     | 100         | 256           | P   |
| 8   | 16500.00        | 6.78        | 46.54          | 53.32          | 68.20          | -14.88      | Peak     | 100         | 158           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH100 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

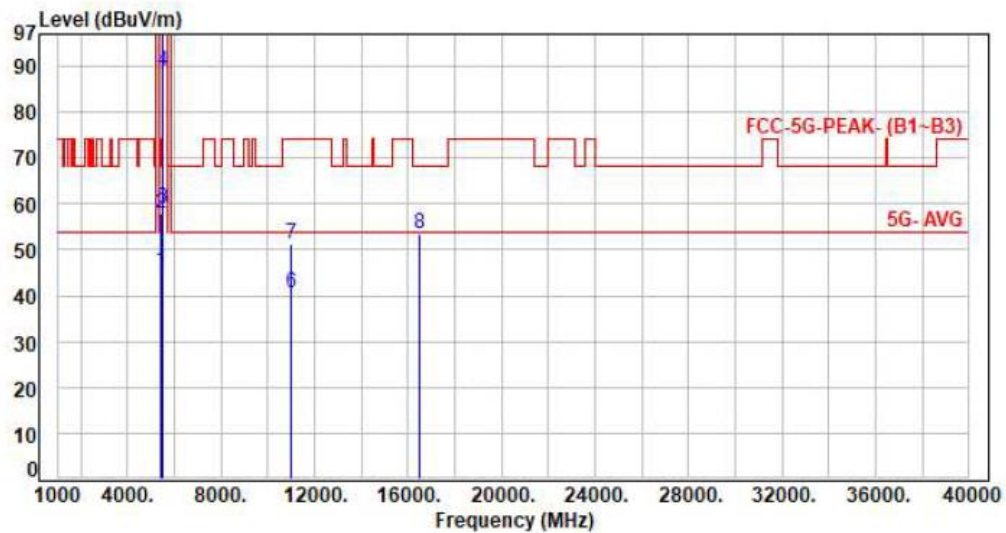

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.98          | 45.43          | 54.00          | -8.57       | Average  | 106         | 209           | P   |
| 2   | 5460.00         | -0.55       | 58.47          | 57.92          | 74.00          | -16.08      | Peak     | 106         | 209           | P   |
| 3   | 5470.00         | -0.51       | 59.39          | 58.88          | 68.20          | -9.32       | Peak     | 106         | 209           | P   |
| 4   | 5500.00         | -0.39       | 89.18          | 88.79          | 200.00         | -111.21     | Average  | 106         | 209           | P   |
| 5   | 5500.00         | -0.39       | 99.03          | 98.64          | 200.00         | -101.36     | Peak     | 106         | 209           | P   |
| 6   | 11000.00        | 4.81        | 35.64          | 40.45          | 54.00          | -13.55      | Average  | 100         | 110           | P   |
| 7   | 11000.00        | 4.81        | 46.35          | 51.16          | 74.00          | -22.84      | Peak     | 100         | 110           | P   |
| 8   | 16500.00        | 6.78        | 46.52          | 53.30          | 68.20          | -14.90      | Peak     | 100         | 307           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH120 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

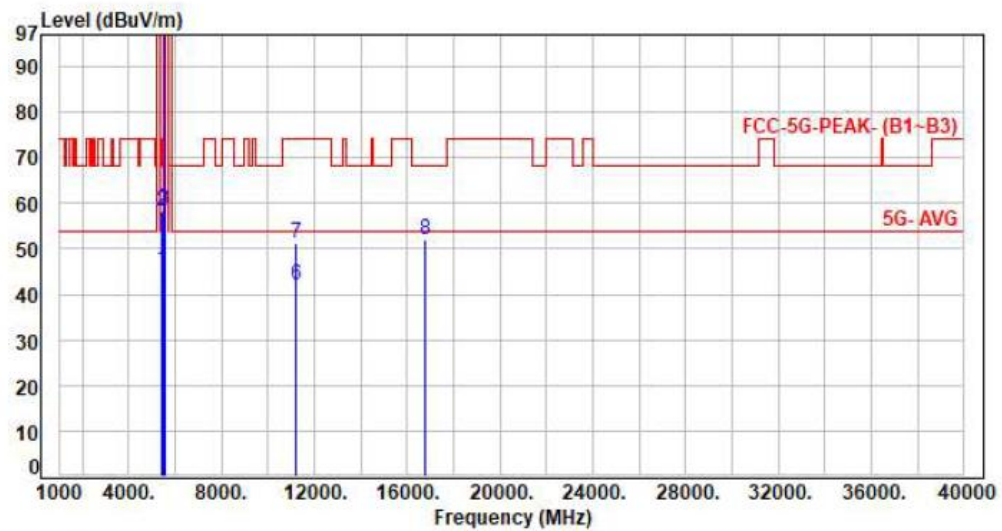

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.90          | 45.35          | 54.00          | -8.65       | Average  | 100         | 313           | P   |
| 2   | 5460.00         | -0.55       | 58.81          | 58.26          | 74.00          | -15.74      | Peak     | 100         | 313           | P   |
| 3   | 5470.00         | -0.51       | 59.29          | 58.78          | 68.20          | -9.42       | Peak     | 100         | 313           | P   |
| 4   | 5600.00         | 0.01        | 95.65          | 95.66          | 200.00         | -104.34     | Average  | 100         | 313           | P   |
| 5   | 5600.00         | 0.01        | 106.24         | 106.25         | 200.00         | -93.75      | Peak     | 100         | 313           | P   |
| 6   | 11200.00        | 5.07        | 36.84          | 41.91          | 54.00          | -12.09      | Average  | 100         | 256           | P   |
| 7   | 11200.00        | 5.07        | 46.06          | 51.13          | 74.00          | -22.87      | Peak     | 100         | 256           | P   |
| 8   | 16800.00        | 5.89        | 46.11          | 52.00          | 68.20          | -16.20      | Peak     | 100         | 153           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH120 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

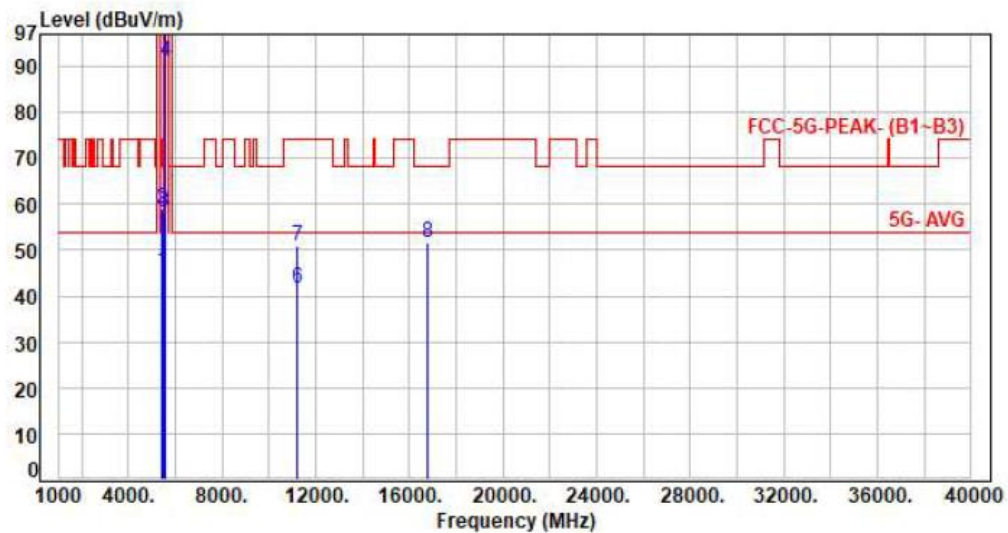

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.98          | 45.43          | 54.00          | -8.57       | Average  | 144         | 171           | P   |
| 2   | 5460.00         | -0.55       | 59.53          | 58.98          | 74.00          | -15.02      | Peak     | 144         | 171           | P   |
| 3   | 5470.00         | -0.51       | 58.88          | 58.37          | 68.20          | -9.83       | Peak     | 144         | 171           | P   |
| 4   | 5600.00         | 0.01        | 91.18          | 91.19          | 200.00         | -108.81     | Average  | 144         | 171           | P   |
| 5   | 5600.00         | 0.01        | 101.92         | 101.93         | 200.00         | -98.07      | Peak     | 144         | 171           | P   |
| 6   | 11200.00        | 5.07        | 36.52          | 41.59          | 54.00          | -12.41      | Average  | 100         | 105           | P   |
| 7   | 11200.00        | 5.07        | 45.74          | 50.81          | 74.00          | -23.19      | Peak     | 100         | 105           | P   |
| 8   | 16800.00        | 5.89        | 45.84          | 51.73          | 68.20          | -16.47      | Peak     | 100         | 302           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH140 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

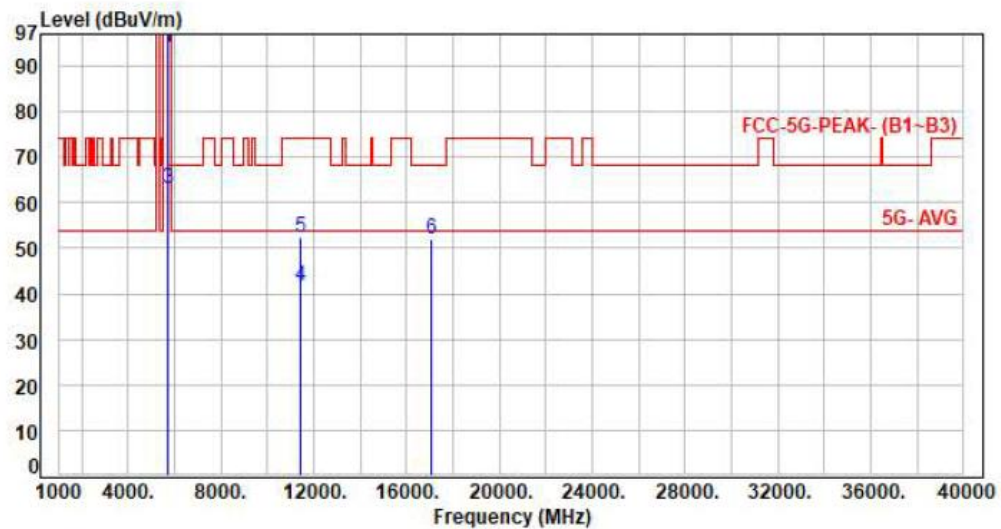

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 0.61        | 93.61          | 94.22          | 200.00         | -105.78     | Average  | 103         | 316           | P   |
| 2   | 5700.00         | 0.61        | 104.01         | 104.62         | 200.00         | -95.38      | Peak     | 103         | 316           | P   |
| 3   | 5725.00         | 0.66        | 62.57          | 63.23          | 68.20          | -4.97       | Peak     | 103         | 316           | P   |
| 4   | 11400.00        | 5.31        | 36.34          | 41.65          | 54.00          | -12.35      | Average  | 100         | 253           | P   |
| 5   | 11400.00        | 5.31        | 46.95          | 52.26          | 74.00          | -21.74      | Peak     | 100         | 253           | P   |
| 6   | 17100.00        | 5.81        | 46.21          | 52.02          | 68.20          | -16.18      | Peak     | 100         | 156           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH140 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

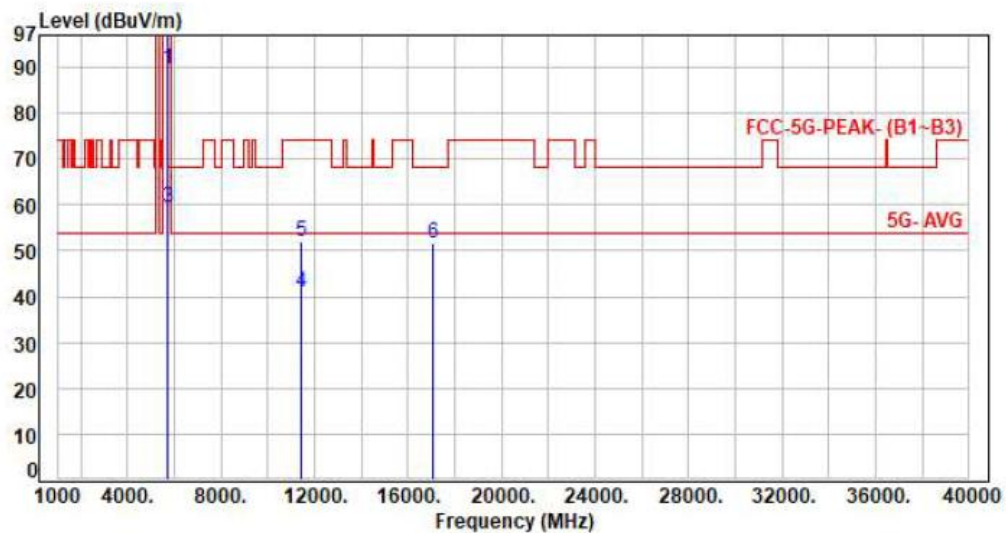

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 0.61        | 89.17          | 89.78          | 200.00         | -110.22     | Average  | 103         | 187           | P   |
| 2   | 5700.00         | 0.61        | 99.18          | 99.79          | 200.00         | -100.21     | Peak     | 103         | 187           | P   |
| 3   | 5725.00         | 0.66        | 58.68          | 59.34          | 68.20          | -8.86       | Peak     | 103         | 187           | P   |
| 4   | 11400.00        | 5.31        | 35.80          | 41.11          | 54.00          | -12.89      | Average  | 100         | 106           | P   |
| 5   | 11400.00        | 5.31        | 46.53          | 51.84          | 74.00          | -22.16      | Peak     | 100         | 106           | P   |
| 6   | 17100.00        | 5.81        | 45.79          | 51.60          | 68.20          | -16.60      | Peak     | 100         | 301           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH102 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

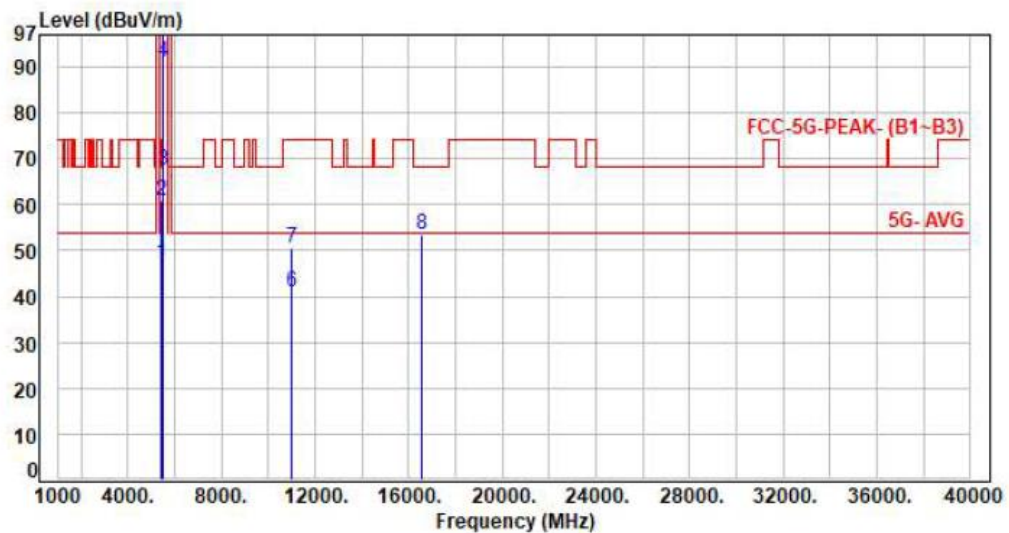

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 47.73          | 47.18          | 54.00          | -6.82       | Average  | 104         | 298           | P   |
| 2   | 5460.00         | -0.55       | 61.55          | 61.00          | 74.00          | -13.00      | Peak     | 104         | 298           | P   |
| 3   | 5470.00         | -0.51       | 67.92          | 67.41          | 68.20          | -0.79       | Peak     | 104         | 298           | P   |
| 4   | 5510.00         | -0.35       | 91.48          | 91.13          | 200.00         | -108.87     | Average  | 104         | 298           | P   |
| 5   | 5510.00         | -0.35       | 101.36         | 101.01         | 200.00         | -98.99      | Peak     | 104         | 298           | P   |
| 6   | 11020.00        | 4.91        | 36.04          | 40.95          | 54.00          | -13.05      | Average  | 100         | 254           | P   |
| 7   | 11020.00        | 4.91        | 45.62          | 50.53          | 74.00          | -23.47      | Peak     | 100         | 254           | P   |
| 8   | 16530.00        | 6.82        | 46.54          | 53.36          | 68.20          | -14.84      | Peak     | 100         | 156           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH102 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

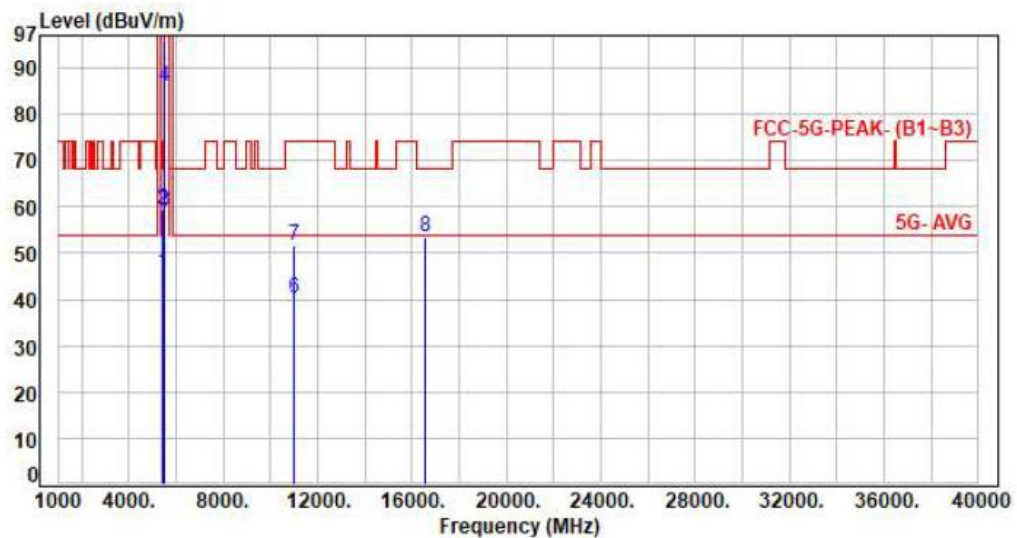

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.25          | 45.70          | 54.00          | -8.30       | Average  | 235         | 174           | P   |
| 2   | 5460.00         | -0.55       | 59.85          | 59.30          | 74.00          | -14.70      | Peak     | 235         | 174           | P   |
| 3   | 5470.00         | -0.51       | 59.49          | 58.98          | 68.20          | -9.22       | Peak     | 235         | 174           | P   |
| 4   | 5510.00         | -0.35       | 86.38          | 86.03          | 200.00         | -113.97     | Average  | 235         | 174           | P   |
| 5   | 5510.00         | -0.35       | 96.27          | 95.92          | 200.00         | -104.08     | Peak     | 235         | 174           | P   |
| 6   | 11020.00        | 4.91        | 35.25          | 40.16          | 54.00          | -13.84      | Average  | 100         | 107           | P   |
| 7   | 11020.00        | 4.91        | 46.57          | 51.48          | 74.00          | -22.52      | Peak     | 100         | 107           | P   |
| 8   | 16530.00        | 6.82        | 46.50          | 53.32          | 68.20          | -14.88      | Peak     | 100         | 302           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH118 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

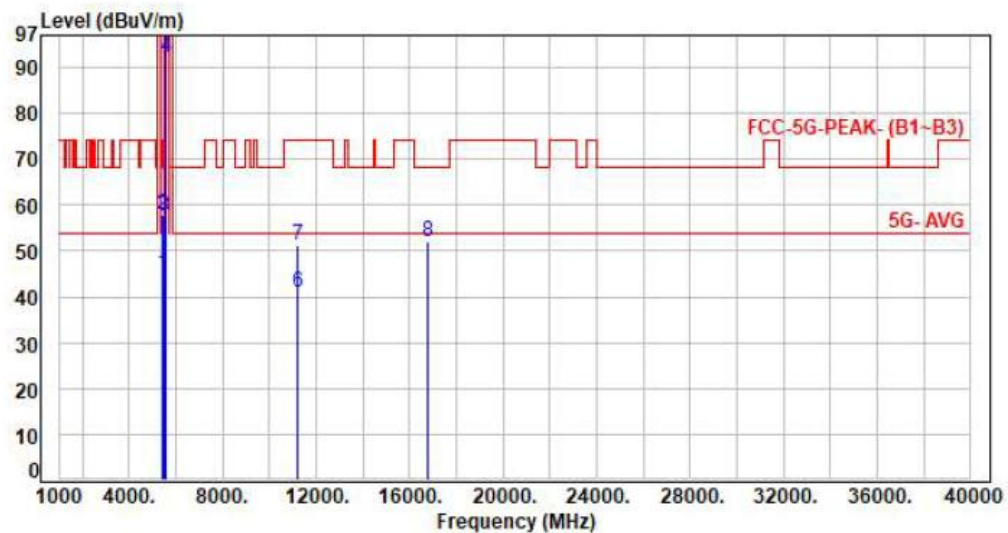

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.71          | 45.16          | 54.00          | -8.84       | Average  | 110         | 312           | P   |
| 2   | 5460.00         | -0.55       | 58.29          | 57.74          | 74.00          | -16.26      | Peak     | 110         | 312           | P   |
| 3   | 5470.00         | -0.51       | 58.07          | 57.56          | 68.20          | -10.64      | Peak     | 110         | 312           | P   |
| 4   | 5590.00         | -0.03       | 92.10          | 92.07          | 200.00         | -107.93     | Average  | 110         | 312           | P   |
| 5   | 5590.00         | -0.03       | 102.13         | 102.10         | 200.00         | -97.90      | Peak     | 110         | 312           | P   |
| 6   | 11180.00        | 5.07        | 35.97          | 41.04          | 54.00          | -12.96      | Average  | 100         | 259           | P   |
| 7   | 11180.00        | 5.07        | 46.34          | 51.41          | 74.00          | -22.59      | Peak     | 100         | 259           | P   |
| 8   | 16770.00        | 6.00        | 45.83          | 51.83          | 68.20          | -16.37      | Peak     | 100         | 152           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH118 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

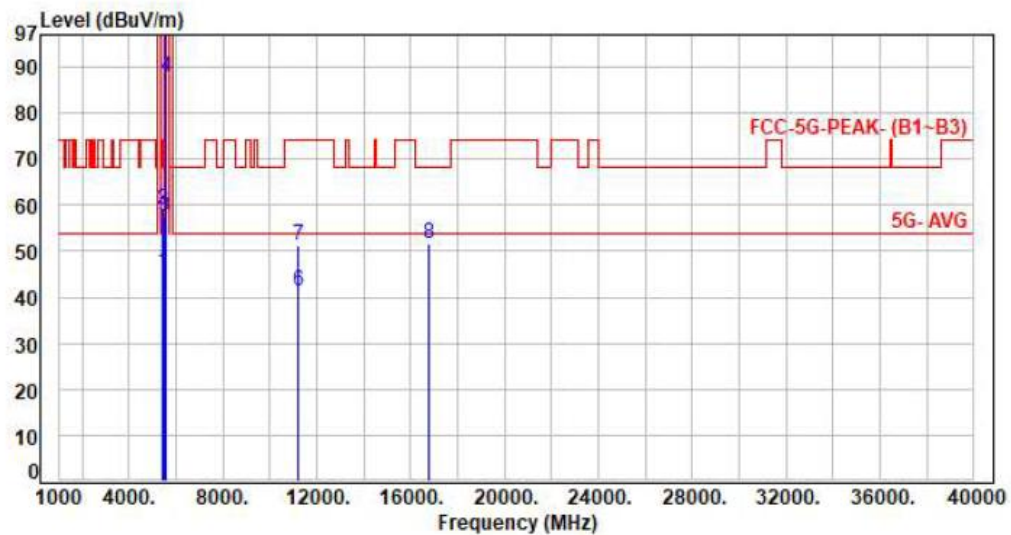

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.94          | 45.39          | 54.00          | -8.61       | Average  | 218         | 174           | P   |
| 2   | 5460.00         | -0.55       | 59.68          | 59.13          | 74.00          | -14.87      | Peak     | 218         | 174           | P   |
| 3   | 5470.00         | -0.51       | 58.14          | 57.63          | 68.20          | -10.57      | Peak     | 218         | 174           | P   |
| 4   | 5590.00         | -0.03       | 87.83          | 87.80          | 200.00         | -112.20     | Average  | 218         | 174           | P   |
| 5   | 5590.00         | -0.03       | 97.41          | 97.38          | 200.00         | -102.62     | Peak     | 218         | 174           | P   |
| 6   | 11180.00        | 5.07        | 36.41          | 41.48          | 54.00          | -12.52      | Average  | 100         | 106           | P   |
| 7   | 11180.00        | 5.07        | 46.37          | 51.44          | 74.00          | -22.56      | Peak     | 100         | 106           | P   |
| 8   | 16770.00        | 6.00        | 45.61          | 51.61          | 68.20          | -16.59      | Peak     | 100         | 300           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH134 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

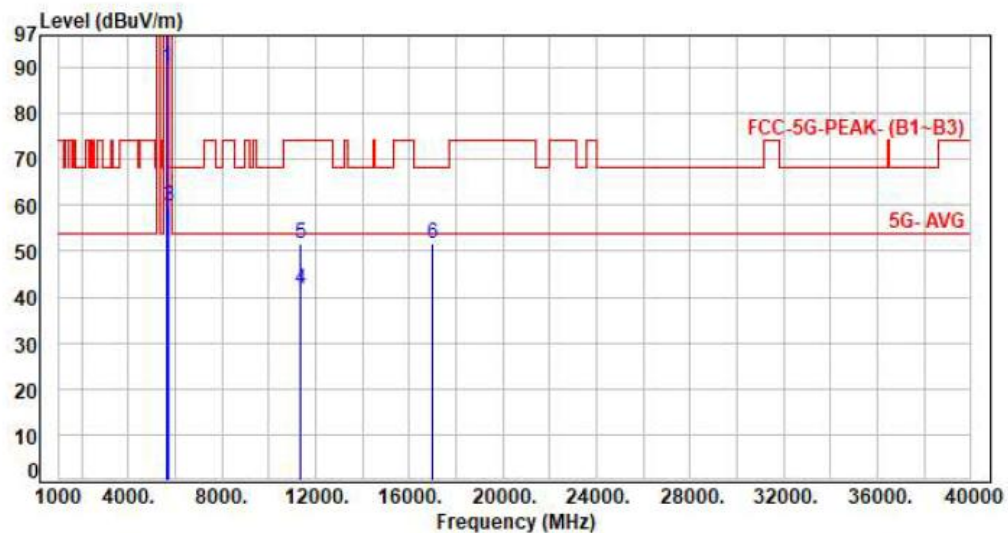


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5670.00         | 0.42        | 89.55          | 89.97          | 200.00         | -110.03     | Average  | 112         | 314           | P   |
| 2   | 5670.00         | 0.42        | 99.71          | 100.13         | 200.00         | -99.87      | Peak     | 112         | 314           | P   |
| 3   | 5725.00         | 0.66        | 59.08          | 59.74          | 68.20          | -8.46       | Peak     | 112         | 314           | P   |
| 4   | 11340.00        | 5.26        | 36.46          | 41.72          | 54.00          | -12.28      | Average  | 100         | 251           | P   |
| 5   | 11340.00        | 5.26        | 46.42          | 51.68          | 74.00          | -22.32      | Peak     | 100         | 251           | P   |
| 6   | 17010.00        | 5.51        | 46.05          | 51.56          | 68.20          | -16.64      | Peak     | 100         | 157           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

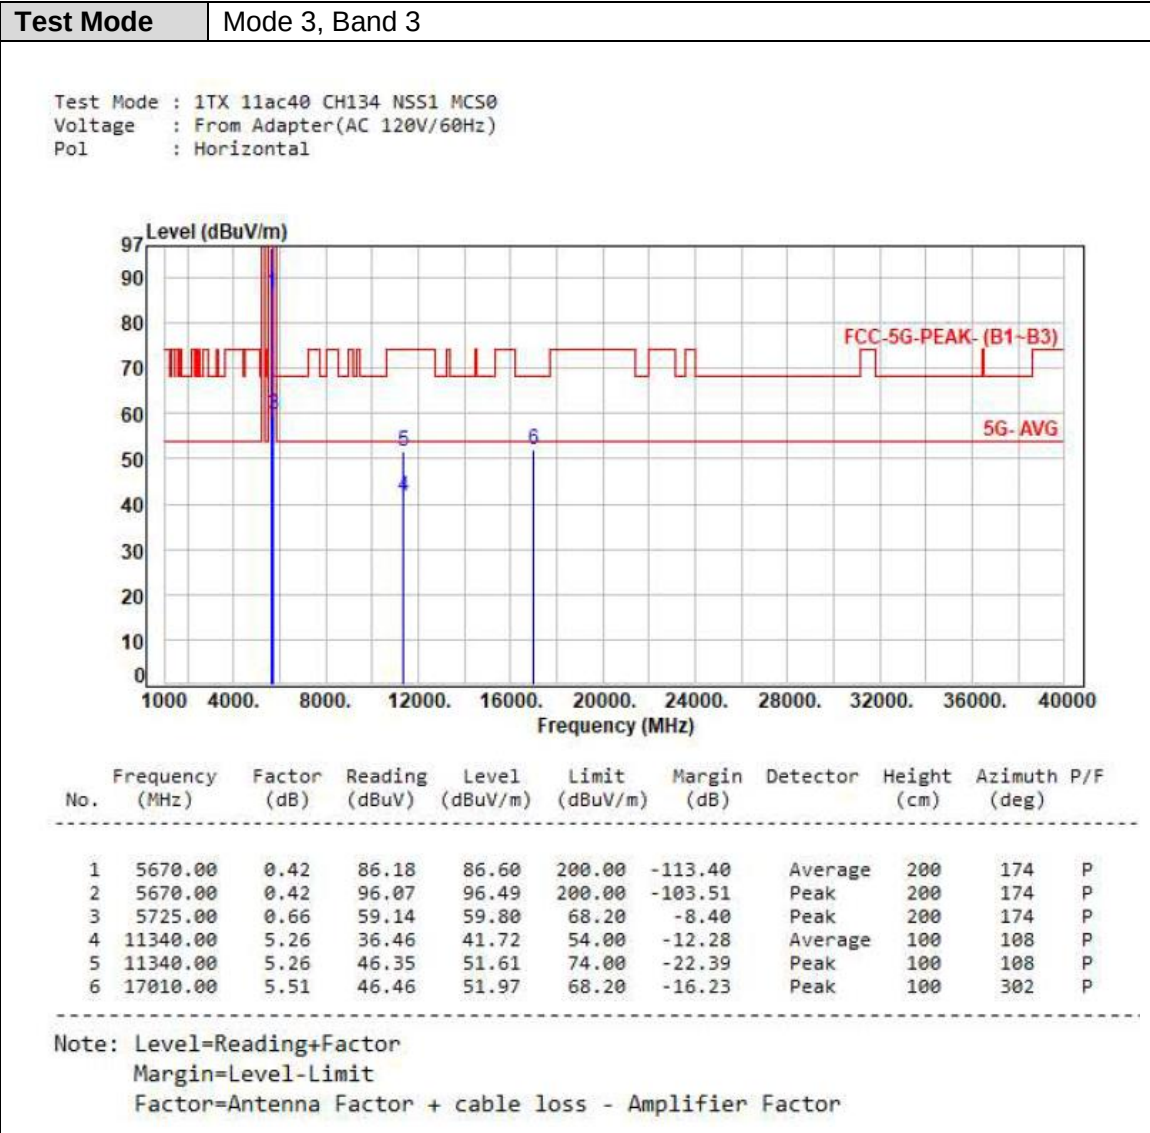

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

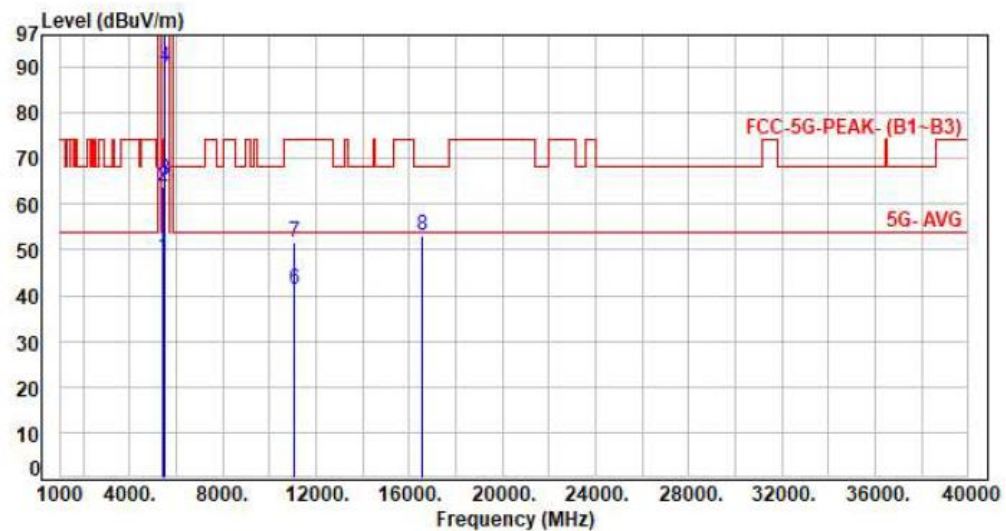

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 48.87          | 48.32          | 54.00          | -5.68       | Average  | 112         | 313           | P   |
| 2   | 5460.00         | -0.55       | 64.35          | 63.80          | 74.00          | -10.20      | Peak     | 112         | 313           | P   |
| 3   | 5470.00         | -0.51       | 65.65          | 65.14          | 68.20          | -3.06       | Peak     | 112         | 313           | P   |
| 4   | 5530.00         | -0.28       | 90.27          | 89.99          | 200.00         | -110.01     | Average  | 112         | 313           | P   |
| 5   | 5530.00         | -0.28       | 99.04          | 98.76          | 200.00         | -101.24     | Peak     | 112         | 313           | P   |
| 6   | 11060.00        | 5.06        | 36.35          | 41.41          | 54.00          | -12.59      | Average  | 100         | 256           | P   |
| 7   | 11060.00        | 5.06        | 46.45          | 51.51          | 74.00          | -22.49      | Peak     | 100         | 256           | P   |
| 8   | 16590.00        | 6.74        | 46.27          | 53.01          | 68.20          | -15.19      | Peak     | 100         | 155           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

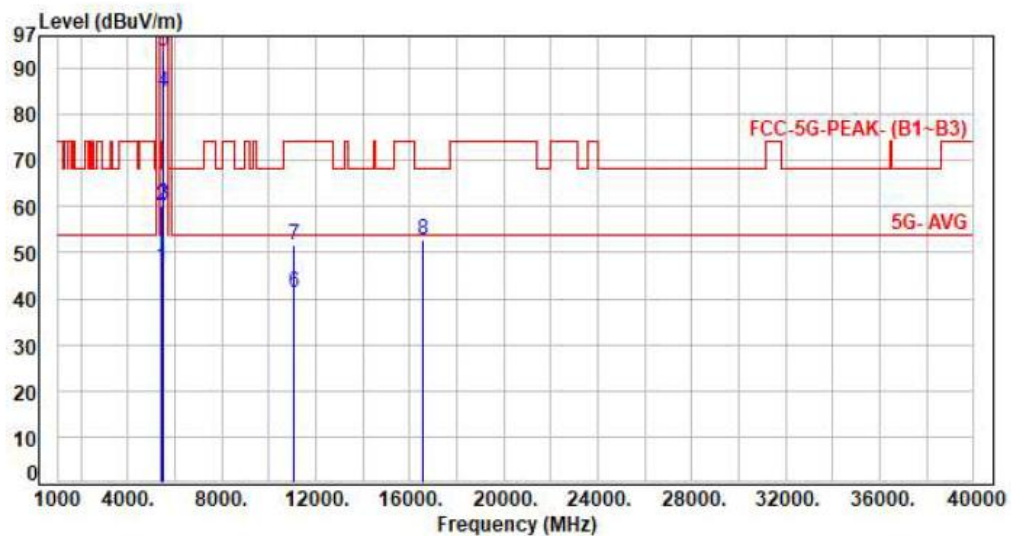


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 47.54          | 46.99          | 54.00          | -7.01       | Average  | 397         | 175           | P   |
| 2   | 5460.00         | -0.55       | 60.78          | 60.23          | 74.00          | -13.77      | Peak     | 397         | 175           | P   |
| 3   | 5470.00         | -0.51       | 61.07          | 60.56          | 68.20          | -7.64       | Peak     | 397         | 175           | P   |
| 4   | 5530.00         | -0.28       | 85.17          | 84.89          | 200.00         | -115.11     | Average  | 397         | 175           | P   |
| 5   | 5530.00         | -0.28       | 93.98          | 93.70          | 200.00         | -106.30     | Peak     | 397         | 175           | P   |
| 6   | 11060.00        | 5.06        | 36.17          | 41.23          | 54.00          | -12.77      | Average  | 100         | 104           | P   |
| 7   | 11060.00        | 5.06        | 46.73          | 51.79          | 74.00          | -22.21      | Peak     | 100         | 104           | P   |
| 8   | 16590.00        | 6.74        | 45.99          | 52.73          | 68.20          | -15.47      | Peak     | 100         | 305           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH122 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

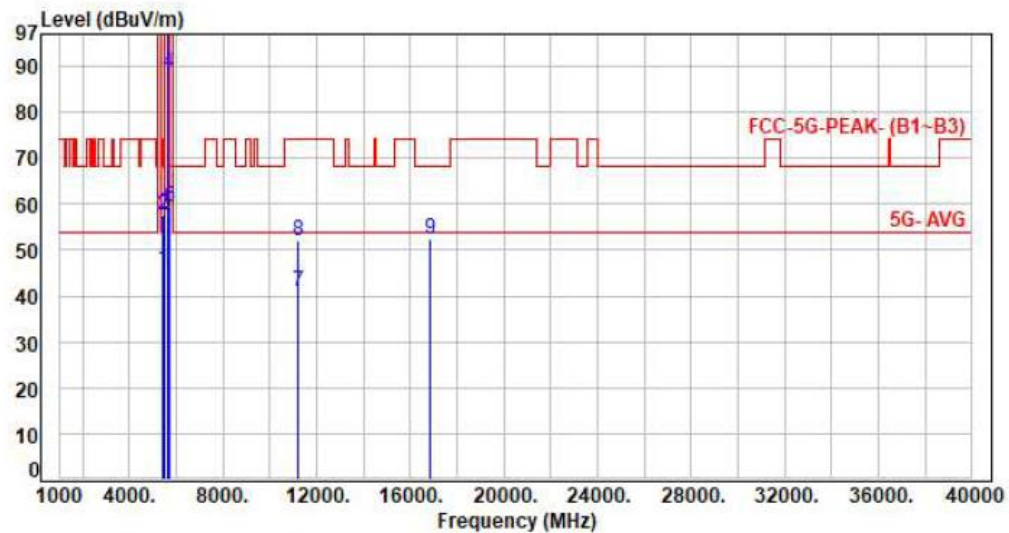

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.17          | 45.62          | 54.00          | -8.38       | Average  | 111         | 312           | P   |
| 2   | 5460.00         | -0.55       | 58.23          | 57.68          | 74.00          | -16.32      | Peak     | 111         | 312           | P   |
| 3   | 5470.00         | -0.51       | 58.40          | 57.89          | 68.20          | -10.31      | Peak     | 111         | 312           | P   |
| 4   | 5610.00         | 0.07        | 88.54          | 88.61          | 200.00         | -111.39     | Average  | 111         | 312           | P   |
| 5   | 5610.00         | 0.07        | 97.25          | 97.32          | 200.00         | -102.68     | Peak     | 111         | 312           | P   |
| 6   | 5725.00         | 0.66        | 58.64          | 59.30          | 68.20          | -8.90       | Peak     | 111         | 312           | P   |
| 7   | 11220.00        | 5.12        | 35.89          | 41.01          | 54.00          | -12.99      | Average  | 100         | 253           | P   |
| 8   | 11220.00        | 5.12        | 46.80          | 51.92          | 74.00          | -22.08      | Peak     | 100         | 253           | P   |
| 9   | 16830.00        | 6.03        | 46.44          | 52.47          | 68.20          | -15.73      | Peak     | 100         | 151           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH122 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

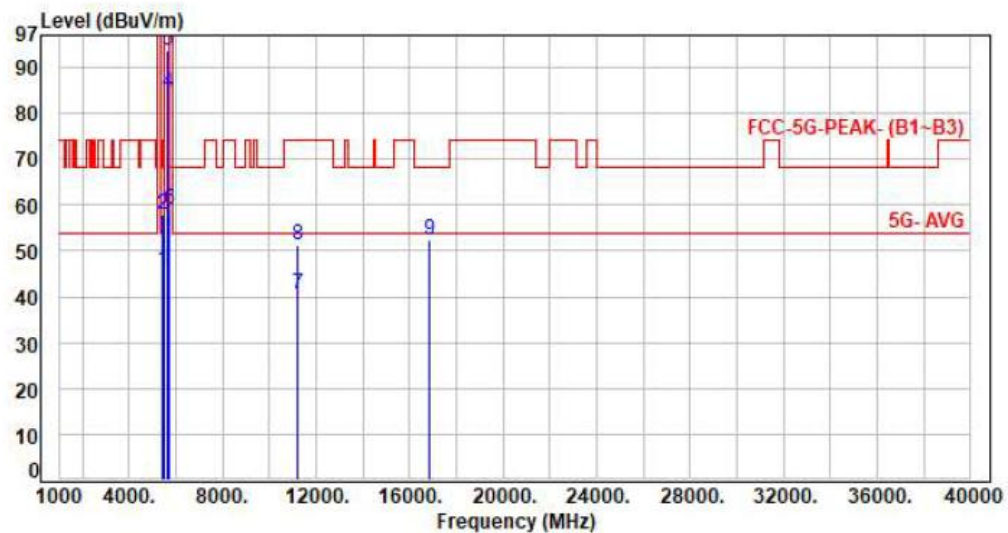

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.30          | 45.75          | 54.00          | -8.25       | Average  | 391         | 175           | P   |
| 2   | 5460.00         | -0.55       | 58.61          | 58.06          | 74.00          | -15.94      | Peak     | 391         | 175           | P   |
| 3   | 5470.00         | -0.51       | 58.36          | 57.85          | 68.20          | -10.35      | Peak     | 391         | 175           | P   |
| 4   | 5610.00         | 0.07        | 84.47          | 84.54          | 200.00         | -115.46     | Average  | 391         | 175           | P   |
| 5   | 5610.00         | 0.07        | 93.69          | 93.76          | 200.00         | -106.24     | Peak     | 391         | 175           | P   |
| 6   | 5725.00         | 0.66        | 58.44          | 59.10          | 68.20          | -9.10       | Peak     | 391         | 175           | P   |
| 7   | 11220.00        | 5.12        | 35.56          | 40.68          | 54.00          | -13.32      | Average  | 100         | 106           | P   |
| 8   | 11220.00        | 5.12        | 46.16          | 51.28          | 74.00          | -22.72      | Peak     | 100         | 106           | P   |
| 9   | 16830.00        | 6.03        | 46.47          | 52.50          | 68.20          | -15.70      | Peak     | 100         | 300           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3: Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

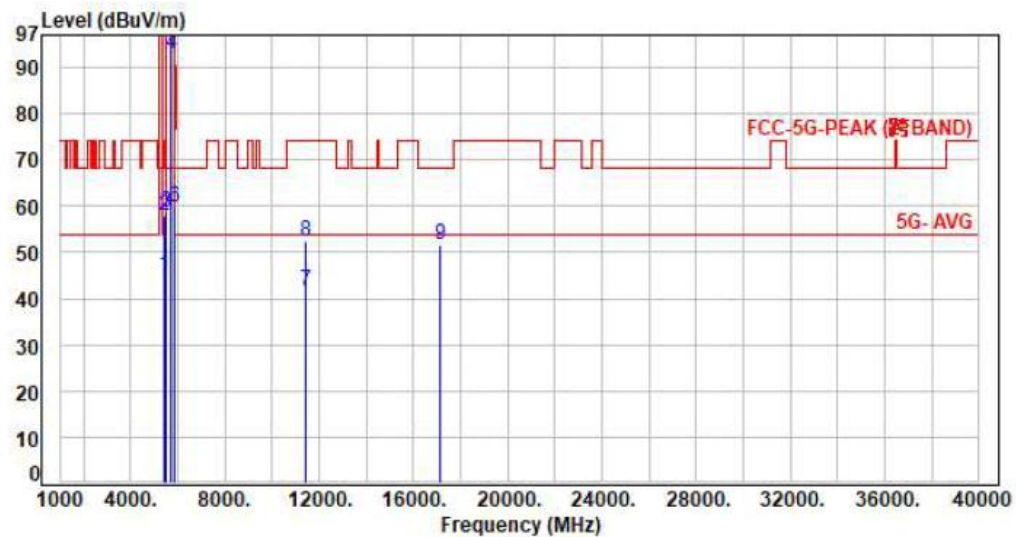

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.46          | 44.91          | 54.00          | -9.09       | Average  | 117         | 317           | P   |
| 2   | 5460.00         | -0.55       | 58.49          | 57.94          | 74.00          | -16.06      | Peak     | 117         | 317           | P   |
| 3   | 5470.00         | -0.51       | 59.33          | 58.82          | 68.20          | -9.38       | Peak     | 117         | 317           | P   |
| 4   | 5720.00         | 0.64        | 92.25          | 92.89          | 200.00         | -107.11     | Average  | 117         | 317           | P   |
| 5   | 5720.00         | 0.64        | 102.62         | 103.26         | 200.00         | -96.74      | Peak     | 117         | 317           | P   |
| 6   | 5850.00         | 0.80        | 58.98          | 59.78          | 68.20          | -8.42       | Peak     | 117         | 317           | P   |
| 7   | 11440.00        | 5.32        | 36.48          | 41.80          | 54.00          | -12.20      | Average  | 100         | 251           | P   |
| 8   | 11440.00        | 5.32        | 46.99          | 52.31          | 74.00          | -21.69      | Peak     | 100         | 251           | P   |
| 9   | 17160.00        | 5.40        | 46.10          | 51.50          | 68.20          | -16.70      | Peak     | 100         | 156           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3: Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

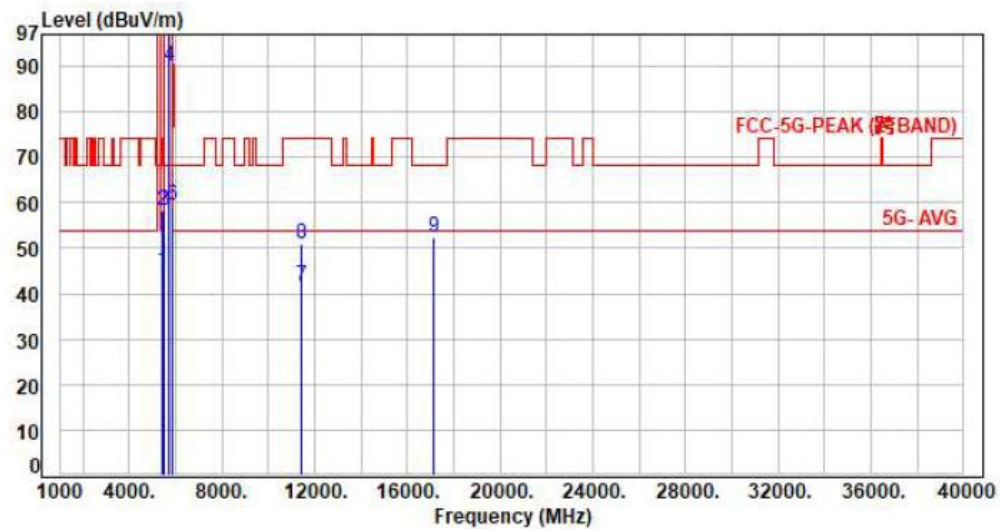


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.55          | 45.00          | 54.00          | -9.00       | Average  | 208         | 174           | P   |
| 2   | 5460.00         | -0.55       | 58.68          | 58.13          | 74.00          | -15.87      | Peak     | 208         | 174           | P   |
| 3   | 5470.00         | -0.51       | 58.66          | 58.15          | 68.20          | -10.05      | Peak     | 208         | 174           | P   |
| 4   | 5720.00         | 0.64        | 89.21          | 89.85          | 200.00         | -110.15     | Average  | 208         | 174           | P   |
| 5   | 5720.00         | 0.64        | 99.07          | 99.71          | 200.00         | -100.29     | Peak     | 208         | 174           | P   |
| 6   | 5850.00         | 0.80        | 58.71          | 59.51          | 68.20          | -8.69       | Peak     | 208         | 174           | P   |
| 7   | 11440.00        | 5.32        | 36.50          | 41.82          | 54.00          | -12.18      | Average  | 100         | 108           | P   |
| 8   | 11440.00        | 5.32        | 45.66          | 50.98          | 74.00          | -23.02      | Peak     | 100         | 108           | P   |
| 9   | 17160.00        | 5.40        | 46.98          | 52.38          | 68.20          | -15.82      | Peak     | 100         | 302           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3: Straddle Channel

Test Mode : 1TX 11ac20 CH144 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

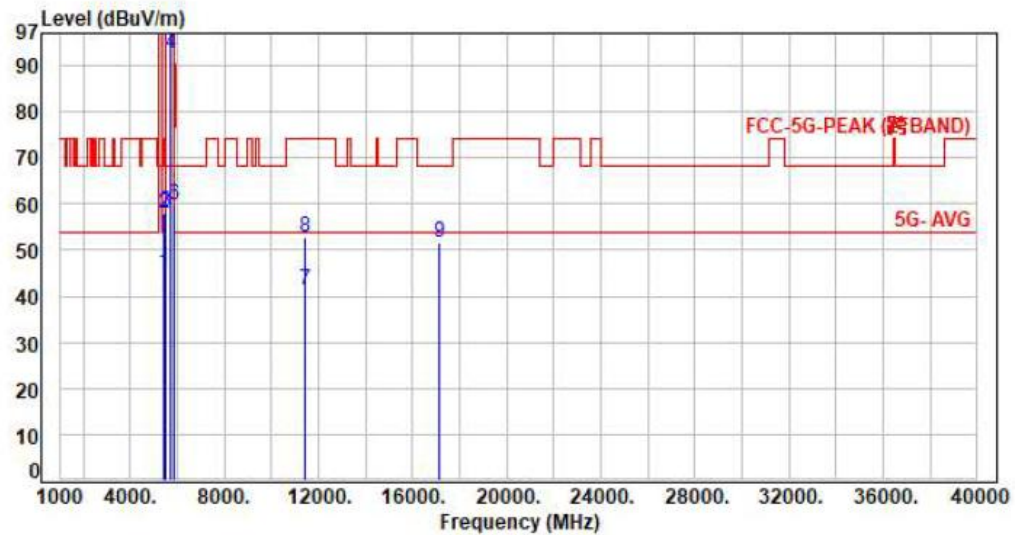

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.52          | 44.97          | 54.00          | -9.03       | Average  | 105         | 318           | P   |
| 2   | 5460.00         | -0.55       | 58.42          | 57.87          | 74.00          | -16.13      | Peak     | 105         | 318           | P   |
| 3   | 5470.00         | -0.51       | 58.64          | 58.13          | 68.20          | -10.07      | Peak     | 105         | 318           | P   |
| 4   | 5720.00         | 0.64        | 92.02          | 92.66          | 200.00         | -107.34     | Average  | 105         | 318           | P   |
| 5   | 5720.00         | 0.64        | 101.82         | 102.46         | 200.00         | -97.54      | Peak     | 105         | 318           | P   |
| 6   | 5850.00         | 0.80        | 59.11          | 59.91          | 68.20          | -8.29       | Peak     | 105         | 318           | P   |
| 7   | 11440.00        | 5.32        | 36.12          | 41.44          | 54.00          | -12.56      | Average  | 100         | 248           | P   |
| 8   | 11440.00        | 5.32        | 47.38          | 52.70          | 74.00          | -21.30      | Peak     | 100         | 248           | P   |
| 9   | 17160.00        | 5.40        | 46.11          | 51.51          | 68.20          | -16.69      | Peak     | 100         | 156           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3: Straddle Channel

Test Mode : 1TX 11ac20 CH144 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

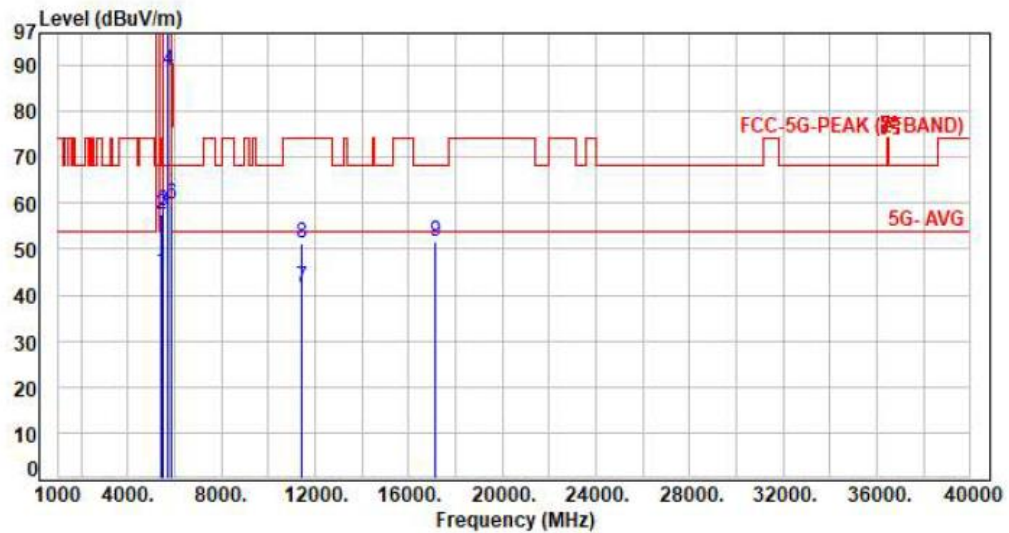

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.45          | 44.90          | 54.00          | -9.10       | Average  | 209         | 175           | P   |
| 2   | 5460.00         | -0.55       | 58.21          | 57.66          | 74.00          | -16.34      | Peak     | 209         | 175           | P   |
| 3   | 5470.00         | -0.51       | 58.91          | 58.40          | 68.20          | -9.80       | Peak     | 209         | 175           | P   |
| 4   | 5720.00         | 0.64        | 88.33          | 88.97          | 200.00         | -111.03     | Average  | 209         | 175           | P   |
| 5   | 5720.00         | 0.64        | 98.49          | 99.13          | 200.00         | -100.87     | Peak     | 209         | 175           | P   |
| 6   | 5850.00         | 0.80        | 58.87          | 59.67          | 68.20          | -8.53       | Peak     | 209         | 175           | P   |
| 7   | 11440.00        | 5.32        | 36.38          | 41.70          | 54.00          | -12.30      | Average  | 100         | 102           | P   |
| 8   | 11440.00        | 5.32        | 45.87          | 51.19          | 74.00          | -22.81      | Peak     | 100         | 102           | P   |
| 9   | 17160.00        | 5.40        | 46.22          | 51.62          | 68.20          | -16.58      | Peak     | 100         | 306           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3: Straddle Channel

Test Mode : 1TX 11ac40 CH142 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

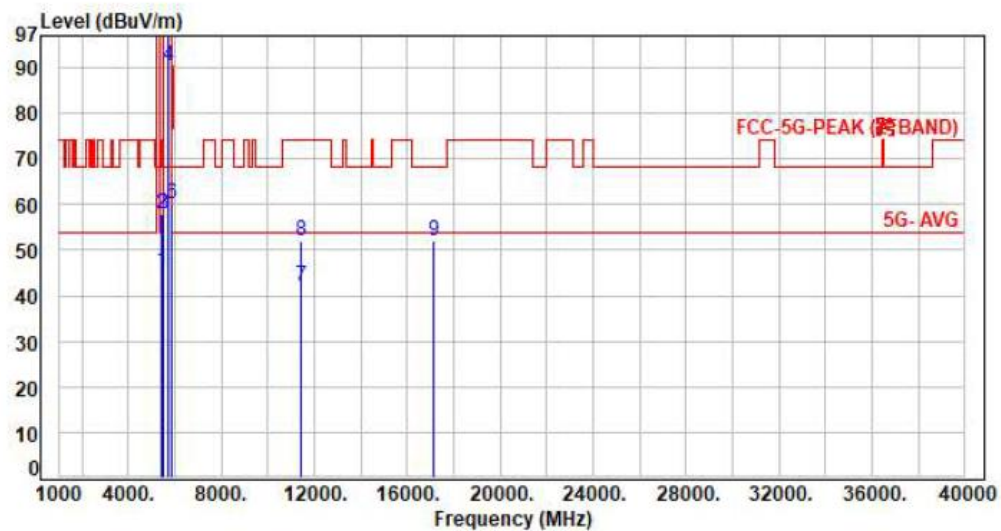

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 45.91          | 45.36          | 54.00          | -8.64       | Average  | 107         | 318           | P   |
| 2   | 5460.00         | -0.55       | 58.29          | 57.74          | 74.00          | -16.26      | Peak     | 107         | 318           | P   |
| 3   | 5470.00         | -0.51       | 58.49          | 57.98          | 68.20          | -10.22      | Peak     | 107         | 318           | P   |
| 4   | 5710.00         | 0.62        | 89.59          | 90.21          | 200.00         | -109.79     | Average  | 107         | 318           | P   |
| 5   | 5710.00         | 0.62        | 99.90          | 100.52         | 200.00         | -99.48      | Peak     | 107         | 318           | P   |
| 6   | 5850.00         | 0.80        | 59.15          | 59.95          | 68.20          | -8.25       | Peak     | 107         | 318           | P   |
| 7   | 11420.00        | 5.31        | 36.75          | 42.06          | 54.00          | -11.94      | Average  | 100         | 252           | P   |
| 8   | 11420.00        | 5.31        | 46.63          | 51.94          | 74.00          | -22.06      | Peak     | 100         | 252           | P   |
| 9   | 17130.00        | 5.59        | 46.27          | 51.86          | 68.20          | -16.34      | Peak     | 100         | 153           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3: Straddle Channel

Test Mode : 1TX 11ac40 CH142 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

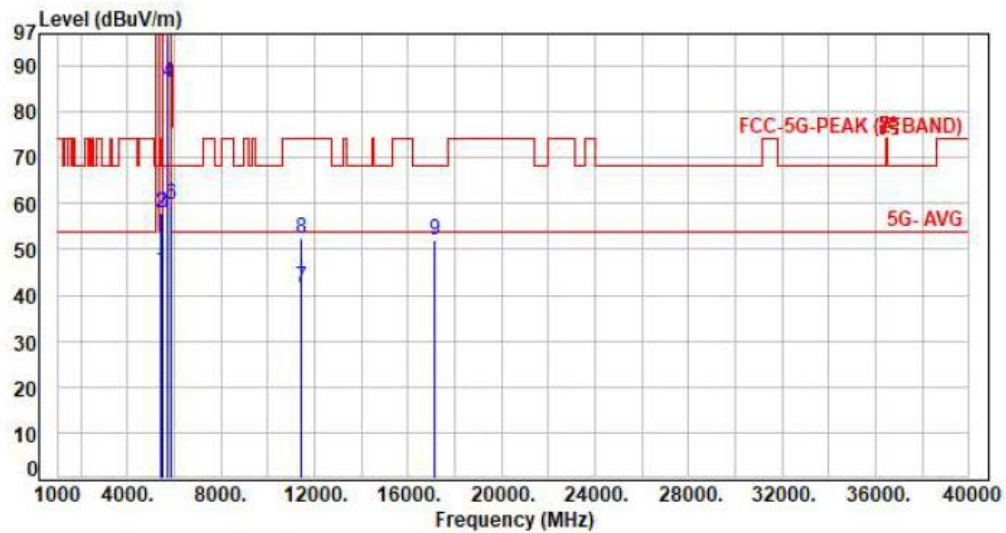

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.04          | 45.49          | 54.00          | -8.51       | Average  | 375         | 175           | P   |
| 2   | 5460.00         | -0.55       | 58.46          | 57.91          | 74.00          | -16.09      | Peak     | 375         | 175           | P   |
| 3   | 5470.00         | -0.51       | 58.29          | 57.78          | 68.20          | -10.42      | Peak     | 375         | 175           | P   |
| 4   | 5710.00         | 0.62        | 85.58          | 86.20          | 200.00         | -113.80     | Average  | 375         | 175           | P   |
| 5   | 5710.00         | 0.62        | 95.21          | 95.83          | 200.00         | -104.17     | Peak     | 375         | 175           | P   |
| 6   | 5850.00         | 0.80        | 58.96          | 59.76          | 68.20          | -8.44       | Peak     | 375         | 175           | P   |
| 7   | 11420.00        | 5.31        | 36.23          | 41.54          | 54.00          | -12.46      | Average  | 100         | 100           | P   |
| 8   | 11420.00        | 5.31        | 47.18          | 52.49          | 74.00          | -21.51      | Peak     | 100         | 100           | P   |
| 9   | 17130.00        | 5.59        | 46.42          | 52.01          | 68.20          | -16.19      | Peak     | 100         | 307           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3: Straddle Channel

Test Mode : 1TX 11ac80 CH138 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

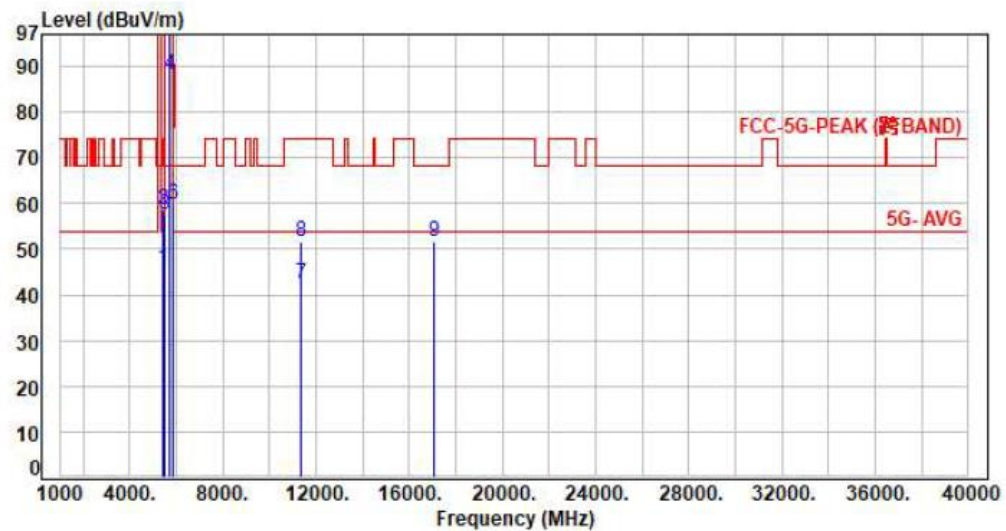

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.34          | 45.79          | 54.00          | -8.21       | Average  | 116         | 317           | P   |
| 2   | 5460.00         | -0.55       | 59.26          | 58.71          | 74.00          | -15.29      | Peak     | 116         | 317           | P   |
| 3   | 5470.00         | -0.51       | 58.07          | 57.56          | 68.20          | -10.64      | Peak     | 116         | 317           | P   |
| 4   | 5690.00         | 0.54        | 87.51          | 88.05          | 200.00         | -111.95     | Average  | 116         | 317           | P   |
| 5   | 5690.00         | 0.54        | 97.21          | 97.75          | 200.00         | -102.25     | Peak     | 116         | 317           | P   |
| 6   | 5850.00         | 0.80        | 58.81          | 59.61          | 68.20          | -8.59       | Peak     | 116         | 317           | P   |
| 7   | 11380.00        | 5.30        | 37.01          | 42.31          | 54.00          | -11.69      | Average  | 100         | 252           | P   |
| 8   | 11380.00        | 5.30        | 46.51          | 51.81          | 74.00          | -22.19      | Peak     | 100         | 252           | P   |
| 9   | 17070.00        | 5.71        | 46.06          | 51.77          | 68.20          | -16.43      | Peak     | 100         | 149           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3: Straddle Channel

Test Mode : 1TX 11ac80 CH138 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

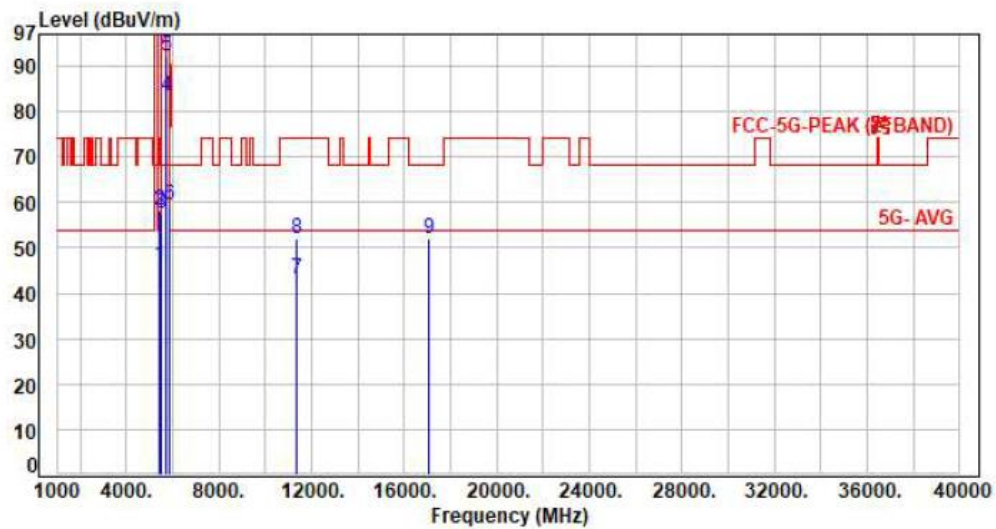

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | -0.55       | 46.55          | 46.00          | 54.00          | -8.00       | Average  | 200         | 175           | P   |
| 2   | 5460.00         | -0.55       | 58.64          | 58.09          | 74.00          | -15.91      | Peak     | 200         | 175           | P   |
| 3   | 5470.00         | -0.51       | 58.18          | 57.67          | 68.20          | -10.53      | Peak     | 200         | 175           | P   |
| 4   | 5690.00         | 0.54        | 82.71          | 83.25          | 200.00         | -116.75     | Average  | 200         | 175           | P   |
| 5   | 5690.00         | 0.54        | 91.65          | 92.19          | 200.00         | -107.81     | Peak     | 200         | 175           | P   |
| 6   | 5850.00         | 0.80        | 58.75          | 59.55          | 68.20          | -8.65       | Peak     | 200         | 175           | P   |
| 7   | 11380.00        | 5.30        | 37.70          | 43.00          | 54.00          | -11.00      | Average  | 100         | 104           | P   |
| 8   | 11380.00        | 5.30        | 46.54          | 51.84          | 74.00          | -22.16      | Peak     | 100         | 104           | P   |
| 9   | 17070.00        | 5.71        | 46.41          | 52.12          | 68.20          | -16.08      | Peak     | 100         | 298           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH149 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

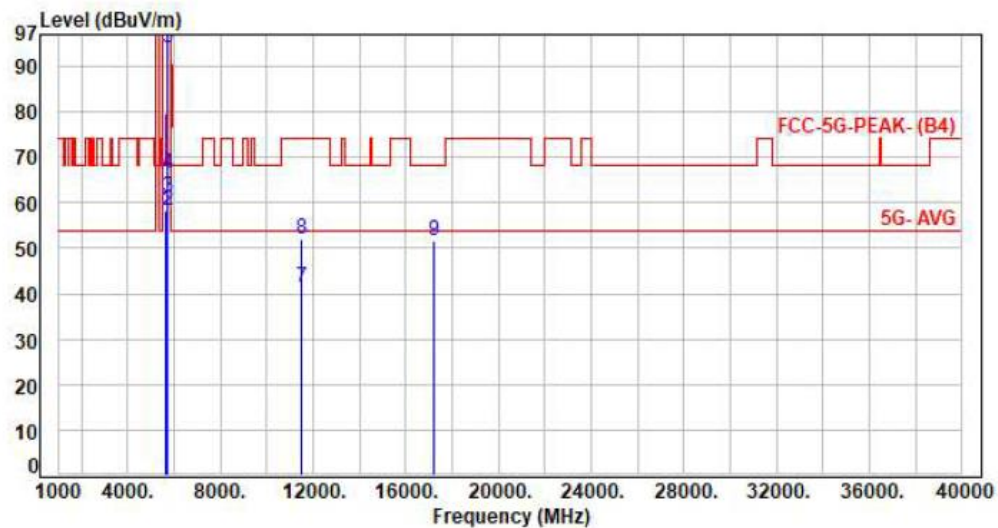

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 57.89          | 58.20          | 68.20          | -10.00      | Peak     | 124         | 316           | P   |
| 2   | 5700.00         | 0.61        | 57.78          | 58.39          | 105.20         | -46.81      | Peak     | 124         | 316           | P   |
| 3   | 5720.00         | 0.64        | 60.66          | 61.30          | 110.80         | -49.50      | Peak     | 124         | 316           | P   |
| 4   | 5725.00         | 0.66        | 65.60          | 66.26          | 122.20         | -55.94      | Peak     | 124         | 316           | P   |
| 5   | 5745.00         | 0.69        | 93.45          | 94.14          | 200.00         | -105.86     | Average  | 124         | 316           | P   |
| 6   | 5745.00         | 0.69        | 103.28         | 103.97         | 200.00         | -96.03      | Peak     | 124         | 316           | P   |
| 7   | 11490.00        | 5.32        | 36.05          | 41.37          | 54.00          | -12.63      | Average  | 100         | 257           | P   |
| 8   | 11490.00        | 5.32        | 46.58          | 51.90          | 74.00          | -22.10      | Peak     | 100         | 257           | P   |
| 9   | 17235.00        | 5.35        | 46.46          | 51.81          | 68.20          | -16.39      | Peak     | 100         | 148           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH149 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

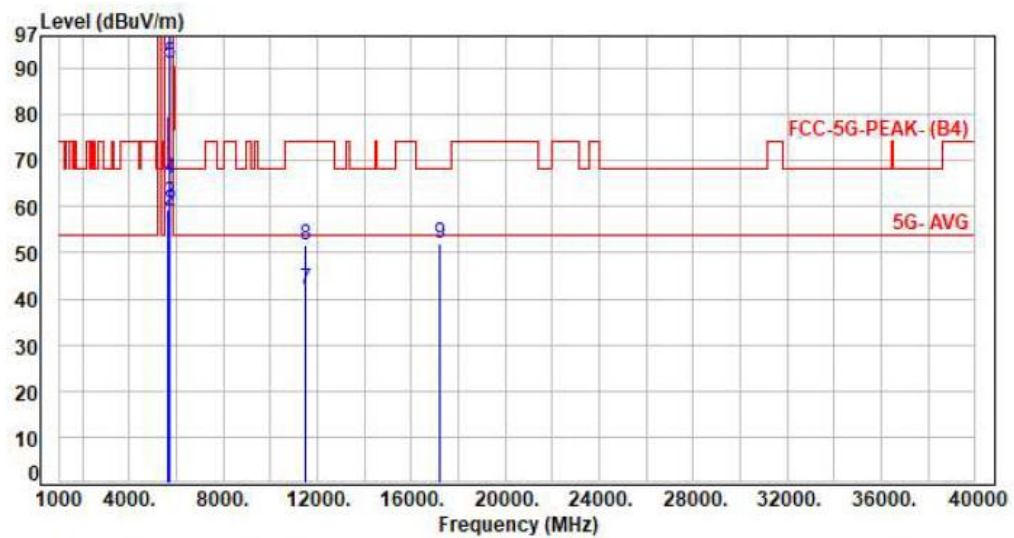


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 59.09          | 59.40          | 68.20          | -8.80       | Peak     | 198         | 173           | P   |
| 2   | 5700.00         | 0.61        | 58.34          | 58.95          | 105.20         | -46.25      | Peak     | 198         | 173           | P   |
| 3   | 5720.00         | 0.64        | 60.12          | 60.76          | 110.80         | -50.04      | Peak     | 198         | 173           | P   |
| 4   | 5725.00         | 0.66        | 65.53          | 66.19          | 122.20         | -56.01      | Peak     | 198         | 173           | P   |
| 5   | 5745.00         | 0.69        | 90.28          | 90.97          | 200.00         | -109.03     | Average  | 198         | 173           | P   |
| 6   | 5745.00         | 0.69        | 100.42         | 101.11         | 200.00         | -98.89      | Peak     | 198         | 173           | P   |
| 7   | 11490.00        | 5.32        | 36.57          | 41.89          | 54.00          | -12.11      | Average  | 100         | 108           | P   |
| 8   | 11490.00        | 5.32        | 46.14          | 51.46          | 74.00          | -22.54      | Peak     | 100         | 108           | P   |
| 9   | 17235.00        | 5.35        | 46.52          | 51.87          | 68.20          | -16.33      | Peak     | 100         | 302           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** | Mode 1, Band 4

Test Mode : 1TX 11a CH157 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

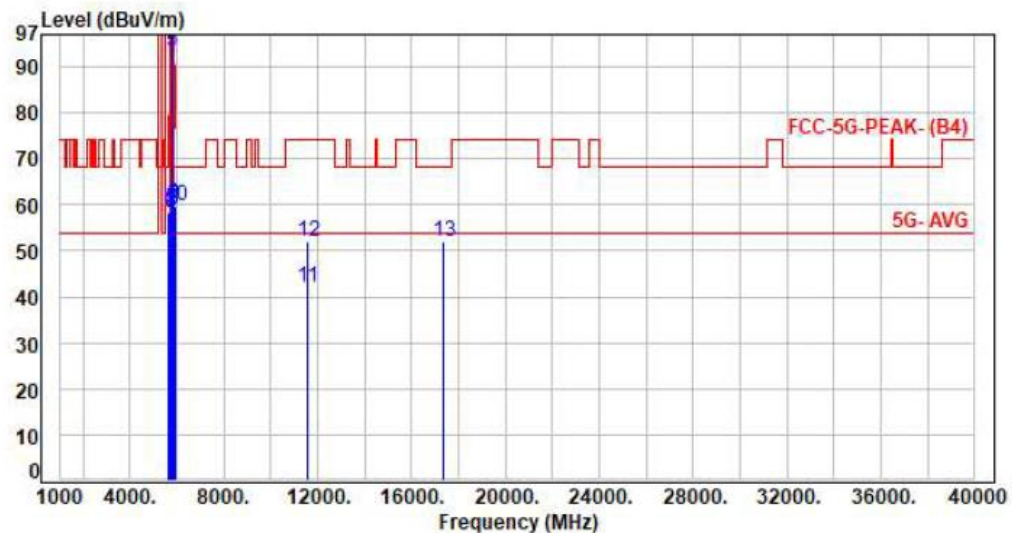

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 57.92          | 58.23          | 68.20          | -9.97       | Peak     | 114         | 317           | P   |
| 2   | 5700.00         | 0.61        | 58.17          | 58.78          | 105.20         | -46.42      | Peak     | 114         | 317           | P   |
| 3   | 5720.00         | 0.64        | 57.64          | 58.28          | 110.80         | -52.52      | Peak     | 114         | 317           | P   |
| 4   | 5725.00         | 0.66        | 57.81          | 58.47          | 122.20         | -63.73      | Peak     | 114         | 317           | P   |
| 5   | 5785.00         | 0.70        | 92.71          | 93.41          | 200.00         | -106.59     | Average  | 114         | 317           | P   |
| 6   | 5785.00         | 0.70        | 103.33         | 104.03         | 200.00         | -95.97      | Peak     | 114         | 317           | P   |
| 7   | 5850.00         | 0.80        | 59.06          | 59.86          | 122.20         | -62.34      | Peak     | 114         | 317           | P   |
| 8   | 5855.00         | 0.79        | 58.39          | 59.18          | 110.80         | -51.62      | Peak     | 114         | 317           | P   |
| 9   | 5875.00         | 0.80        | 59.29          | 60.09          | 105.20         | -45.11      | Peak     | 114         | 317           | P   |
| 10  | 5925.00         | 0.80        | 58.77          | 59.57          | 68.20          | -8.63       | Peak     | 114         | 317           | P   |
| 11  | 11570.00        | 5.45        | 36.50          | 41.95          | 54.00          | -12.05      | Average  | 100         | 252           | P   |
| 12  | 11570.00        | 5.45        | 46.39          | 51.84          | 74.00          | -22.16      | Peak     | 100         | 252           | P   |
| 13  | 17355.00        | 5.46        | 46.64          | 52.10          | 68.20          | -16.10      | Peak     | 100         | 154           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH157 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

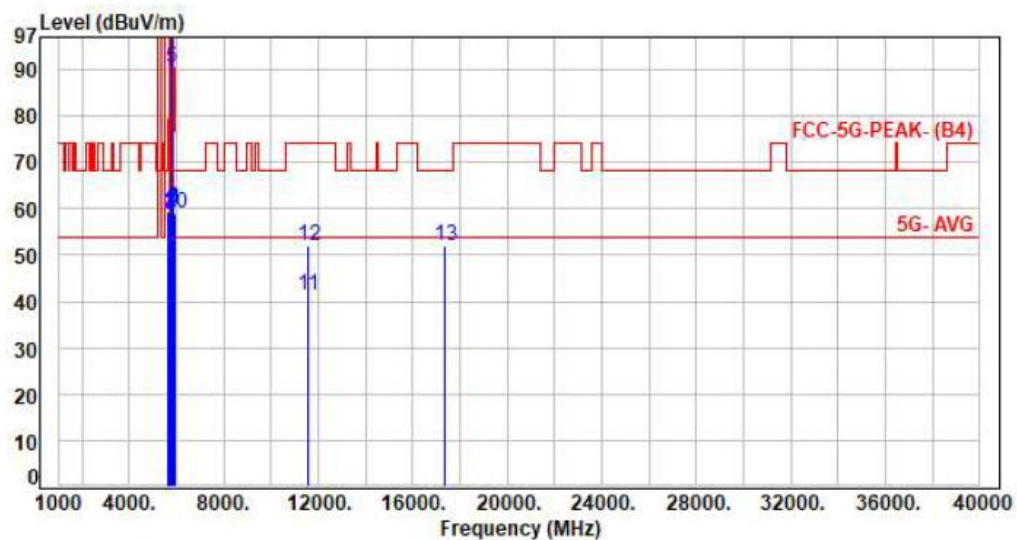


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 58.89          | 59.20          | 68.20          | -9.00       | Peak     | 382         | 175           | P   |
| 2   | 5700.00         | 0.61        | 58.53          | 59.14          | 105.20         | -46.06      | Peak     | 382         | 175           | P   |
| 3   | 5720.00         | 0.64        | 57.89          | 58.53          | 110.80         | -52.27      | Peak     | 382         | 175           | P   |
| 4   | 5725.00         | 0.66        | 58.08          | 58.74          | 122.20         | -63.46      | Peak     | 382         | 175           | P   |
| 5   | 5785.00         | 0.70        | 89.58          | 90.28          | 200.00         | -109.72     | Average  | 382         | 175           | P   |
| 6   | 5785.00         | 0.70        | 100.47         | 101.17         | 200.00         | -98.83      | Peak     | 382         | 175           | P   |
| 7   | 5850.00         | 0.80        | 58.97          | 59.77          | 122.20         | -62.43      | Peak     | 382         | 175           | P   |
| 8   | 5855.00         | 0.79        | 59.38          | 60.17          | 110.80         | -50.63      | Peak     | 382         | 175           | P   |
| 9   | 5875.00         | 0.80        | 58.62          | 59.42          | 105.20         | -45.78      | Peak     | 382         | 175           | P   |
| 10  | 5925.00         | 0.80        | 58.38          | 59.18          | 68.20          | -9.02       | Peak     | 382         | 175           | P   |
| 11  | 11570.00        | 5.45        | 36.03          | 41.48          | 54.00          | -12.52      | Average  | 100         | 101           | P   |
| 12  | 11570.00        | 5.45        | 46.41          | 51.86          | 74.00          | -22.14      | Peak     | 100         | 101           | P   |
| 13  | 17355.00        | 5.46        | 46.36          | 51.82          | 68.20          | -16.38      | Peak     | 100         | 305           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** | Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

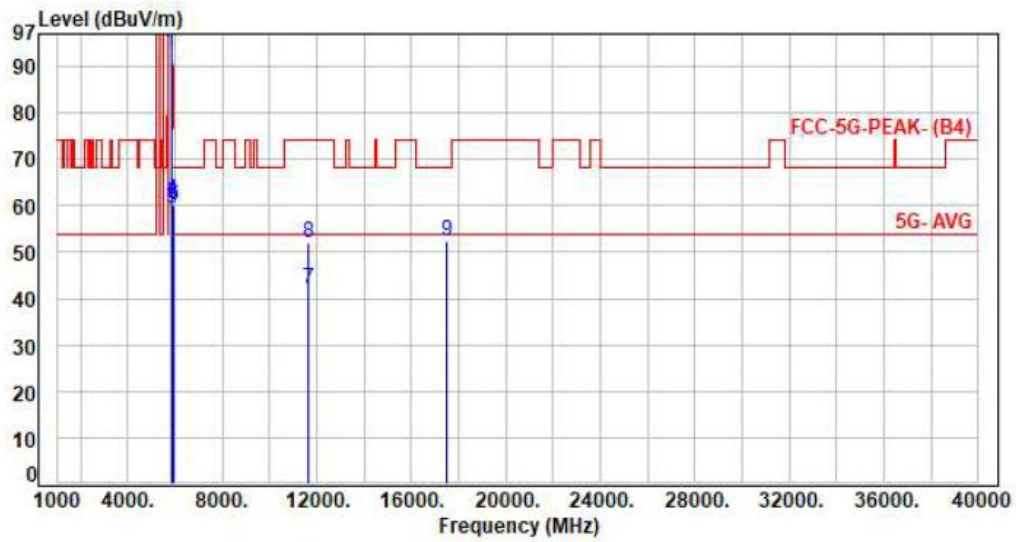


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 0.75        | 92.14          | 92.89          | 200.00         | -107.11     | Average  | 100         | 316           | P   |
| 2   | 5825.00         | 0.75        | 101.87         | 102.62         | 200.00         | -97.38      | Peak     | 100         | 316           | P   |
| 3   | 5850.00         | 0.80        | 59.87          | 60.67          | 122.20         | -61.53      | Peak     | 100         | 316           | P   |
| 4   | 5855.00         | 0.79        | 60.47          | 61.26          | 110.80         | -49.54      | Peak     | 100         | 316           | P   |
| 5   | 5875.00         | 0.80        | 58.59          | 59.39          | 105.20         | -45.81      | Peak     | 100         | 316           | P   |
| 6   | 5925.00         | 0.80        | 59.22          | 60.02          | 68.20          | -8.18       | Peak     | 100         | 316           | P   |
| 7   | 11650.00        | 5.42        | 36.70          | 42.12          | 54.00          | -11.88      | Average  | 100         | 254           | P   |
| 8   | 11650.00        | 5.42        | 46.48          | 51.90          | 74.00          | -22.10      | Peak     | 100         | 254           | P   |
| 9   | 17475.00        | 5.50        | 46.74          | 52.24          | 68.20          | -15.96      | Peak     | 100         | 151           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

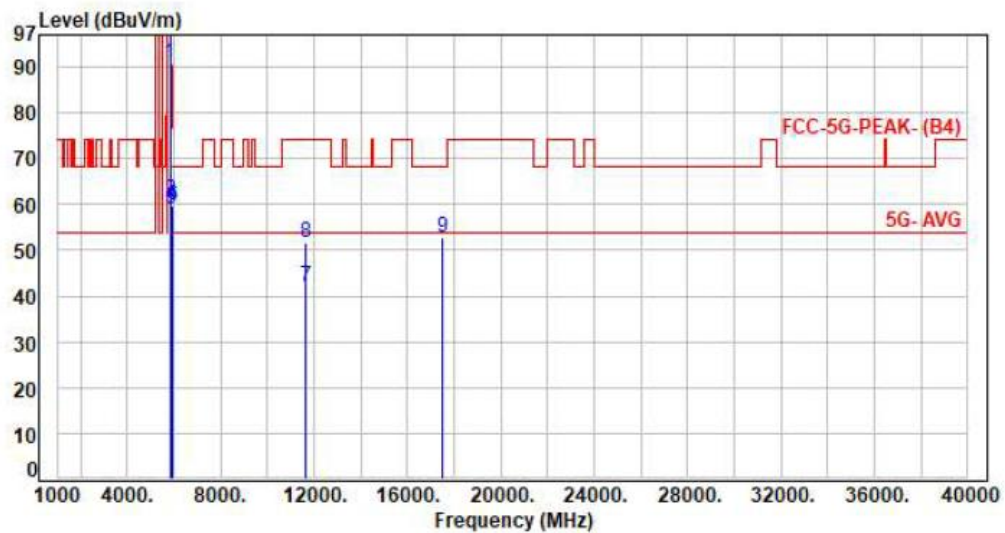

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 0.75        | 90.13          | 90.88          | 200.00         | -109.12     | Average  | 200         | 173           | P   |
| 2   | 5825.00         | 0.75        | 99.65          | 100.40         | 200.00         | -99.60      | Peak     | 200         | 173           | P   |
| 3   | 5850.00         | 0.80        | 59.96          | 60.76          | 122.20         | -61.44      | Peak     | 200         | 173           | P   |
| 4   | 5855.00         | 0.79        | 58.96          | 59.75          | 110.80         | -51.05      | Peak     | 200         | 173           | P   |
| 5   | 5875.00         | 0.80        | 58.13          | 58.93          | 105.20         | -46.27      | Peak     | 200         | 173           | P   |
| 6   | 5925.00         | 0.80        | 58.79          | 59.59          | 68.20          | -8.61       | Peak     | 200         | 173           | P   |
| 7   | 11650.00        | 5.42        | 36.51          | 41.93          | 54.00          | -12.07      | Average  | 100         | 102           | P   |
| 8   | 11650.00        | 5.42        | 46.17          | 51.59          | 74.00          | -22.41      | Peak     | 100         | 102           | P   |
| 9   | 17475.00        | 5.50        | 47.16          | 52.66          | 68.20          | -15.54      | Peak     | 100         | 302           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 1TX 11ac20 CH149 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

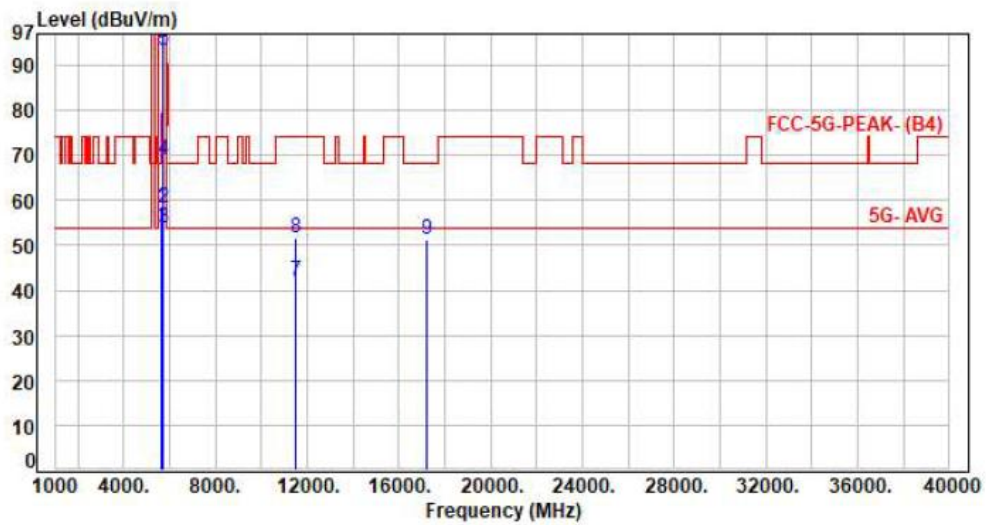

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 57.78          | 58.09          | 68.20          | -10.11      | Peak     | 145         | 318           | P   |
| 2   | 5700.00         | 0.61        | 57.56          | 58.17          | 105.20         | -47.03      | Peak     | 145         | 318           | P   |
| 3   | 5720.00         | 0.64        | 53.10          | 53.74          | 110.80         | -57.06      | Peak     | 145         | 318           | P   |
| 4   | 5725.00         | 0.66        | 68.42          | 69.08          | 122.20         | -53.12      | Peak     | 145         | 318           | P   |
| 5   | 5745.00         | 0.69        | 92.76          | 93.45          | 200.00         | -106.55     | Average  | 145         | 318           | P   |
| 6   | 5745.00         | 0.69        | 103.28         | 103.97         | 200.00         | -96.03      | Peak     | 145         | 318           | P   |
| 7   | 11490.00        | 5.32        | 36.86          | 42.18          | 54.00          | -11.82      | Average  | 100         | 254           | P   |
| 8   | 11490.00        | 5.32        | 46.35          | 51.67          | 74.00          | -22.33      | Peak     | 100         | 254           | P   |
| 9   | 17235.00        | 5.35        | 45.74          | 51.09          | 68.20          | -17.11      | Peak     | 100         | 153           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 1TX 11ac20 CH149 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

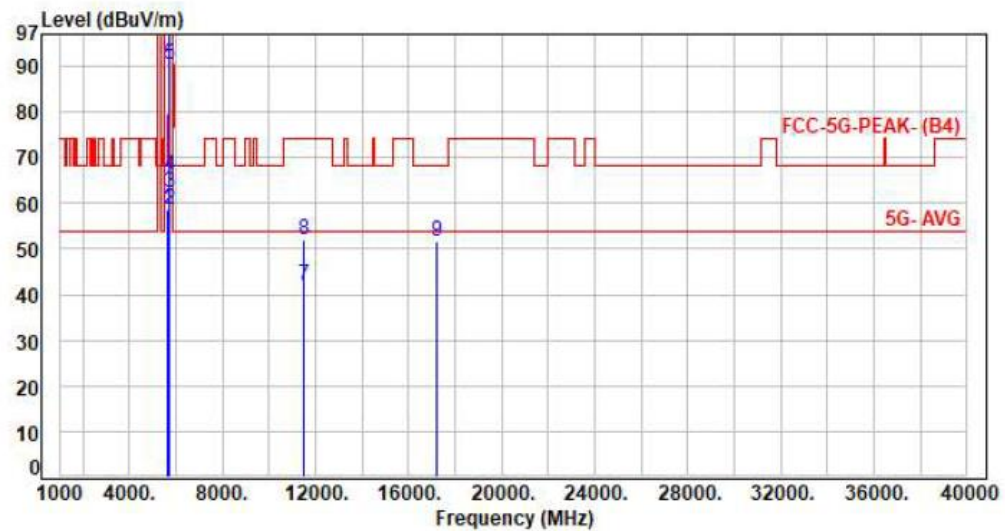

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.51        | 58.12          | 58.63          | 68.20          | -9.57       | Peak     | 196         | 174           | P   |
| 2   | 5700.00         | 0.71        | 57.99          | 58.70          | 105.20         | -46.50      | Peak     | 196         | 174           | P   |
| 3   | 5720.00         | 0.74        | 61.49          | 62.23          | 110.80         | -48.57      | Peak     | 196         | 174           | P   |
| 4   | 5725.00         | 0.76        | 65.29          | 66.05          | 122.20         | -56.15      | Peak     | 196         | 174           | P   |
| 5   | 5745.00         | 0.79        | 89.52          | 90.31          | 200.00         | -109.69     | Average  | 196         | 174           | P   |
| 6   | 5745.00         | 0.79        | 99.67          | 100.46         | 200.00         | -99.54      | Peak     | 196         | 174           | P   |
| 7   | 11490.00        | 5.64        | 36.40          | 42.04          | 54.00          | -11.96      | Average  | 100         | 105           | P   |
| 8   | 11490.00        | 5.64        | 46.35          | 51.99          | 74.00          | -22.01      | Peak     | 100         | 105           | P   |
| 9   | 17235.00        | 5.75        | 46.05          | 51.80          | 68.20          | -16.40      | Peak     | 100         | 309           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 1TX 11ac20 CH157 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

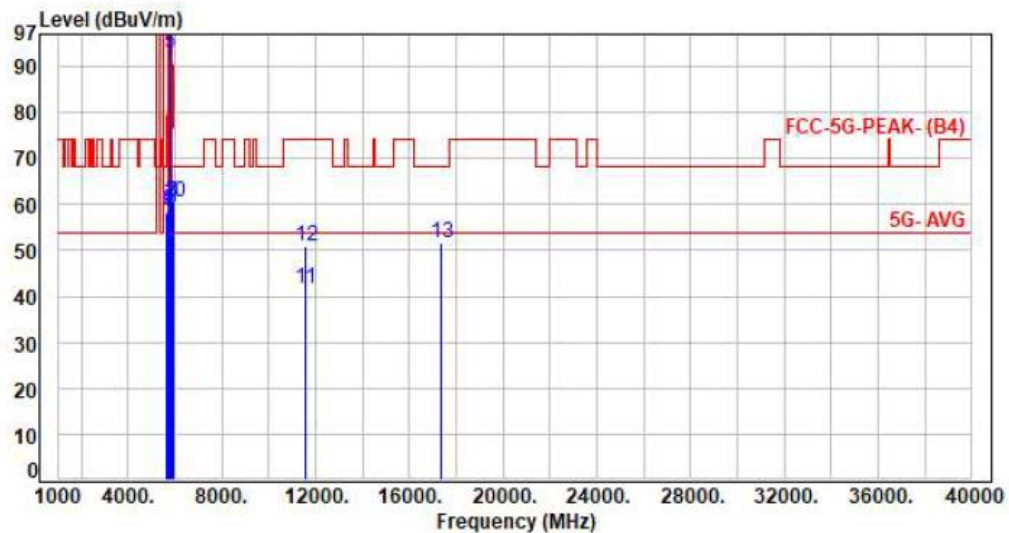

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 57.79          | 58.10          | 68.20          | -10.10      | Peak     | 100         | 317           | P   |
| 2   | 5700.00         | 0.61        | 58.06          | 58.67          | 105.20         | -46.53      | Peak     | 100         | 317           | P   |
| 3   | 5720.00         | 0.64        | 58.02          | 58.66          | 110.80         | -52.14      | Peak     | 100         | 317           | P   |
| 4   | 5725.00         | 0.66        | 58.28          | 58.94          | 122.20         | -63.26      | Peak     | 100         | 317           | P   |
| 5   | 5785.00         | 0.70        | 92.32          | 93.02          | 200.00         | -106.98     | Average  | 100         | 317           | P   |
| 6   | 5785.00         | 0.70        | 103.33         | 104.03         | 200.00         | -95.97      | Peak     | 100         | 317           | P   |
| 7   | 5850.00         | 0.80        | 59.65          | 60.45          | 122.20         | -61.75      | Peak     | 100         | 317           | P   |
| 8   | 5855.00         | 0.79        | 59.86          | 60.65          | 110.80         | -50.15      | Peak     | 100         | 317           | P   |
| 9   | 5875.00         | 0.80        | 58.36          | 59.16          | 105.20         | -46.04      | Peak     | 100         | 317           | P   |
| 10  | 5925.00         | 0.80        | 59.68          | 60.48          | 68.20          | -7.72       | Peak     | 100         | 317           | P   |
| 11  | 11570.00        | 5.45        | 36.38          | 41.83          | 54.00          | -12.17      | Average  | 100         | 252           | P   |
| 12  | 11570.00        | 5.45        | 45.59          | 51.04          | 74.00          | -22.96      | Peak     | 100         | 252           | P   |
| 13  | 17355.00        | 5.46        | 46.17          | 51.63          | 68.20          | -16.57      | Peak     | 100         | 145           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 1TX 11ac20 CH157 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

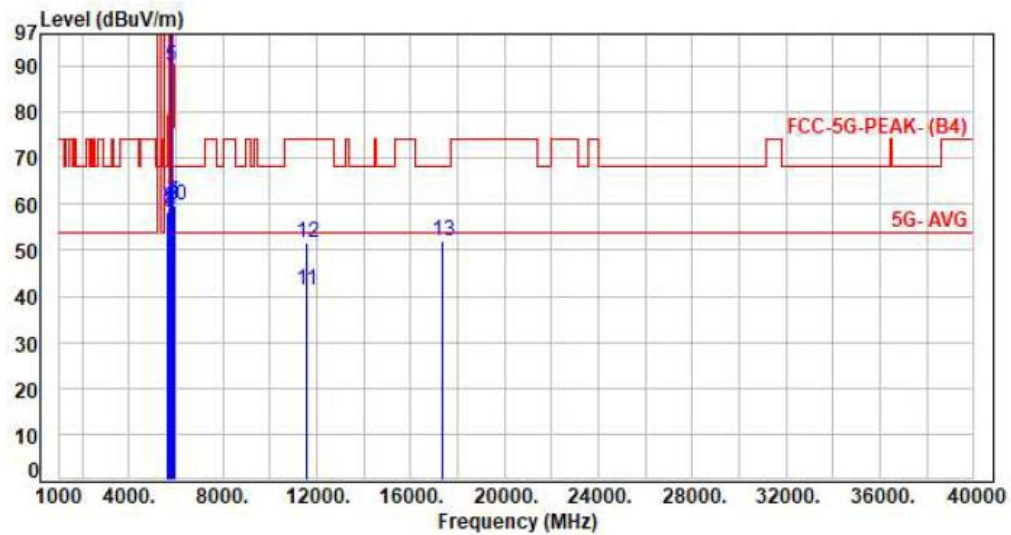

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 57.96          | 58.27          | 68.20          | -9.93       | Peak     | 383         | 174           | P   |
| 2   | 5700.00         | 0.61        | 58.52          | 59.13          | 105.20         | -46.07      | Peak     | 383         | 174           | P   |
| 3   | 5720.00         | 0.64        | 57.74          | 58.38          | 110.80         | -52.42      | Peak     | 383         | 174           | P   |
| 4   | 5725.00         | 0.66        | 57.68          | 58.34          | 122.20         | -63.86      | Peak     | 383         | 174           | P   |
| 5   | 5785.00         | 0.70        | 89.32          | 90.02          | 200.00         | -109.98     | Average  | 383         | 174           | P   |
| 6   | 5785.00         | 0.70        | 99.62          | 100.32         | 200.00         | -99.68      | Peak     | 383         | 174           | P   |
| 7   | 5850.00         | 0.80        | 59.59          | 60.39          | 122.20         | -61.81      | Peak     | 383         | 174           | P   |
| 8   | 5855.00         | 0.79        | 59.12          | 59.91          | 110.80         | -50.89      | Peak     | 383         | 174           | P   |
| 9   | 5875.00         | 0.80        | 58.88          | 59.68          | 105.20         | -45.52      | Peak     | 383         | 174           | P   |
| 10  | 5925.00         | 0.80        | 59.12          | 59.92          | 68.20          | -8.28       | Peak     | 383         | 174           | P   |
| 11  | 11570.00        | 5.45        | 35.83          | 41.28          | 54.00          | -12.72      | Average  | 100         | 108           | P   |
| 12  | 11570.00        | 5.45        | 46.13          | 51.58          | 74.00          | -22.42      | Peak     | 100         | 108           | P   |
| 13  | 17355.00        | 5.46        | 46.52          | 51.98          | 68.20          | -16.22      | Peak     | 100         | 304           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 1TX 11ac20 CH165 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

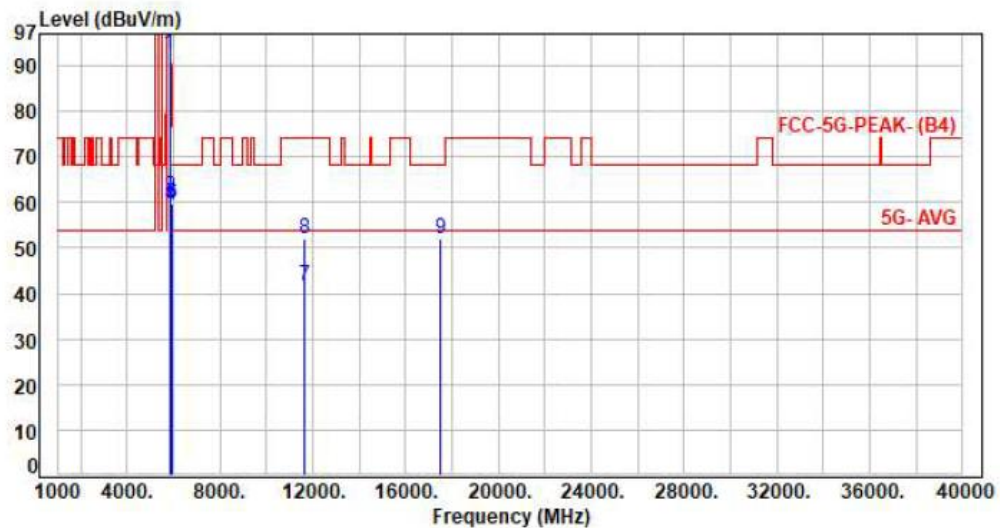

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 0.75        | 91.69          | 92.44          | 200.00         | -107.56     | Average  | 100         | 317           | P   |
| 2   | 5825.00         | 0.75        | 102.28         | 103.03         | 200.00         | -96.97      | Peak     | 100         | 317           | P   |
| 3   | 5850.00         | 0.80        | 60.60          | 61.40          | 122.20         | -60.80      | Peak     | 100         | 317           | P   |
| 4   | 5855.00         | 0.79        | 58.70          | 59.49          | 110.80         | -51.31      | Peak     | 100         | 317           | P   |
| 5   | 5875.00         | 0.80        | 59.04          | 59.84          | 105.20         | -45.36      | Peak     | 100         | 317           | P   |
| 6   | 5925.00         | 0.80        | 58.92          | 59.72          | 68.20          | -8.48       | Peak     | 100         | 317           | P   |
| 7   | 11650.00        | 5.42        | 36.40          | 41.82          | 54.00          | -12.18      | Average  | 100         | 256           | P   |
| 8   | 11650.00        | 5.42        | 46.42          | 51.84          | 74.00          | -22.16      | Peak     | 100         | 256           | P   |
| 9   | 17475.00        | 5.50        | 46.44          | 51.94          | 68.20          | -16.26      | Peak     | 100         | 153           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor