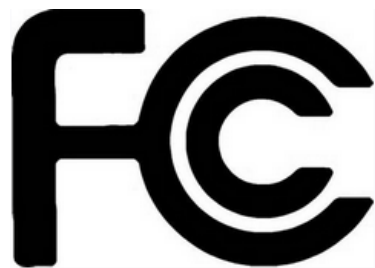


802.11n, Dual Band 2T2R Wireless LAN USB Module**WN4516R**
User Manual

** This document contains confidential proprietary information and is property of LTC. The contents of this document should not be disclosed to unauthorized persons without the written consent of LTC*

CONTENT

FCC WARING STATEMENT	3
IC WARING STATEMENT	4
PRODUCT FEATURES	5
PRODUCT SPECIFICATIONS	6
MAIN CHIPSET	6
FUNCTIONAL SPECIFICATIONS	6
PIN ASSIGMENT	8
USB CONNECTOR SPEC	8
MECHANICAL	9
SHIELDING CASE SPEC	10
ANTENNA SPEC	11
BLOCK DIAGRAM	12
MODULE PHOTO	12
EEPROM INFORMATION	13
ENVIRONMENTAL	13
OPERATING	13
STORAGE	13
PACKING DRAWING	14

FCC WARNING STATEMENT**FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF exposure warning

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment must be installed and operated in accordance with provided instructions and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

FCC RF Radiation Exposure Statement: 1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. 2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: PPQ-WN4516R " and "Contains transmitter module IC: 4491A - WN4516R"

Information for the OEMs and Integrators

The following statement must be included with all versions of this document supplied to an OEM or integrator, but should not be distributed to the end user.

- 1) This device is intended for OEM integrators only.
- 2) Please see the full Grant of Equipment document for other restrictions.

IC WARNING STATEMENT

Canada, Industry Canada (IC) Notices

This Class B digital apparatus complies with Canadian ICES-003 and RSS-210. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Canada, avis d'Industry Canada (IC)

Cet appareil numérique de classe B est conforme aux normes canadiennes ICES-003 et RSS-210.

Son fonctionnement est soumis aux deux conditions suivantes : (1) cet appareil ne doit pas causer d'interférence et (2) cet appareil doit accepter toute interférence, notamment les interférences qui peuvent affecter son fonctionnement.

Radio Frequency (RF) Exposure Information

The radiated output power of the Wireless Device is below the Industry Canada (IC) radio frequency exposure limits. The Wireless Device should be used in such a manner such that the potential for human contact during normal operation is minimized.

This device has also been evaluated and shown compliant with the IC RF Exposure limits under mobile exposure conditions. (antennas are greater than 20cm from a person's body).

Informations concernant l'exposition aux fréquences radio (RF)

La puissance de sortie émise par l'appareil de sans fil est inférieure à la limite d'exposition aux fréquences radio d'Industry Canada (IC). Utilisez l'appareil de sans fil de façon à minimiser les contacts humains lors du fonctionnement normal.

Ce périphérique a également été évalué et démontré conforme aux limites d'exposition aux RF d'IC dans des conditions d'exposition à des appareils mobiles (les antennes se situent à moins de 20 cm du corps d'une personne).

PRODUCT FEATURES

- Operate at ISM frequency Band (2.4 / 5GHz)
- IEEE Standards Support, 802.11a , 802.11b, 802.11g and 802.11n
- Support USB 2.0 host interface
- Enterprise level security supporting: WPA, WPA2, WPS2.0, WAPI
- Two-stream IEEE 802.11n support for 20MHz and 40MHz bandwidth channels provides PHY layer rates up to 300Mbps
- Integrated LNA, PA and T/R switch
- Support Wi-Fi Direct
- RoHS compliance
- Low Halogen compliance

PRODUCT SPECIFICATIONS

MAIN CHIPSET

MAC/ Baseband/ RF: MediaTek MT7600U

FUNCTIONAL SPECIFICATIONS

Wi-Fi Function	
Standard	IEEE802.11a;IEEE802.11b; IEEE 802.11g; IEEE 802.11n
Bus Interface	USB2.0
Data Rate	802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11b: 11, 5.5, 2, 1 Mbps
	802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11n: MCS 0 to 15 for HT20MHz MCS 0 to 15 for HT40MHz
Media Access Control	CSMA/CA with ACK
Modulation Techniques	802.11a: 64QAM, 16QAM, QPSK, BPSK
	802.11b: CCK, DQPSK, DBPSK
	802.11g: 64QAM, 16QAM, QPSK, BPSK
	802.11n: 64QAM, 16QAM, QPSK, BPSK
Network Architecture	Ad-hoc mode (Peer-to-Peer) Infrastructure mode
Operation Channel	2.4GHz 11: (Ch. 1-11) – United States 13: (Ch. 1-13) – Europe 14: (Ch. 1-14) – Japan
	5GHz 21: USA 19: EU 8: Japan
Frequency Range	802.11bg 2.400 ~ 2.4835 GHz
	802.11a 5.15 ~ 5.85 GHz
Transmit Output Power – 2x2 MAX: 16.5dBm (Tolerance: ±1.5dBm)	802.11a: 12 dBm@6Mbps 12 dBm@54Mbps
	802.11b: 15 dBm@1Mbps 15 dBm@11Mbps
	802.11g: 14 dBm@6Mbps

14 dBm@54Mbps

802.11n:
2.4G
20MHz:

13 dBm@MCS0

13 dBm@MCS7

13 dBm@MCS15

40MHz:

13 dBm@MCS0

13 dBm@MCS7

13 dBm@MCS15

5G
20MHz:

11 dBm@MCS0

11 dBm@MCS7

11 dBm@MCS15

40MHz:

11 dBm@MCS0

11 dBm@MCS7

11 dBm@MCS15

Receiver Sensitivity
802.11a:

-86 dBm@6Mbps

-70 dBm@54Mbps

802.11b:

-88 dBm@1Mbps

-82 dBm@11Mbps

802.11g:

-86 dBm@6Mbps

-71 dBm@54Mbps

802.11n:
2.4G/5G
20MHz

-86 dBm@MCS0

-68 dBm@MCS7

-68 dBm@MCS15

40MHz

-83 dBm@MCS0

-65 dBm@MCS7

-65 dBm@MCS15

Security

WPA, WPA2, WPS, WEP 64b&128bit, IEEE 802.1X,
IEEE 802.11i

Operating Voltage

3.3V ± 5% I/O supply voltage

OS Supported

Linux based

Power Consumption	Average	Max
	<i>TX Mode:</i> TBD mA <i>RX Mode:</i> TBD mA <i>Standby Mode:</i> TBD mA <i>Radio Off:</i> TBD mA	1.2A <i>Strongly recommend TV platform has to fulfill output current at least 1A</i>


Antenna Type

Metal antenna


PIN ASSIGNMENT

Pin.	Pin Define	Status
1	+3.3V	YES
2	USB_D-	YES
3	USB_D+	YES
4	GND	YES
5	RESET#	YES
6	GND	YES

USB CONNECTOR SPEC

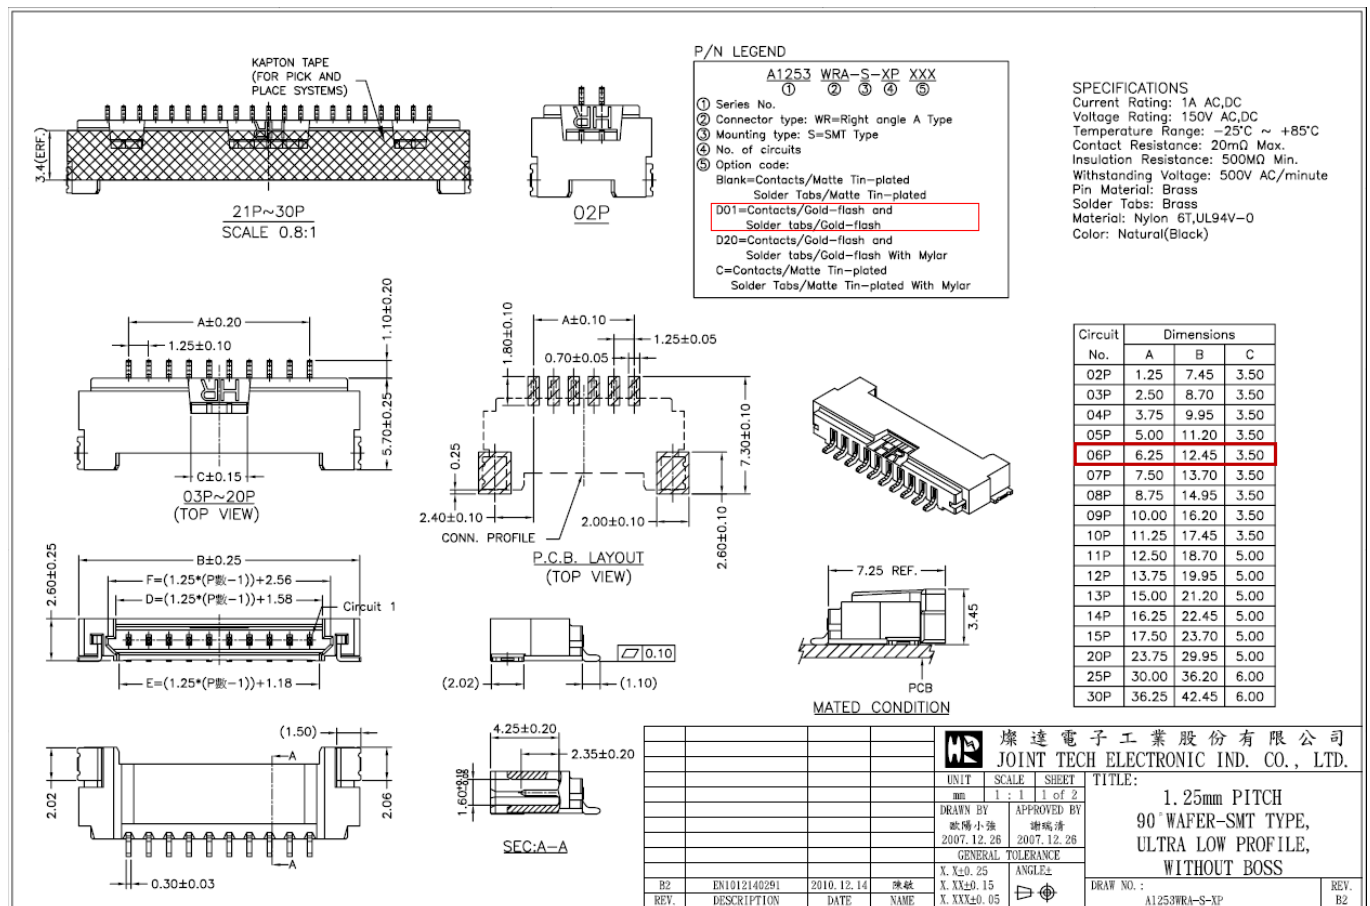

MECHANICAL

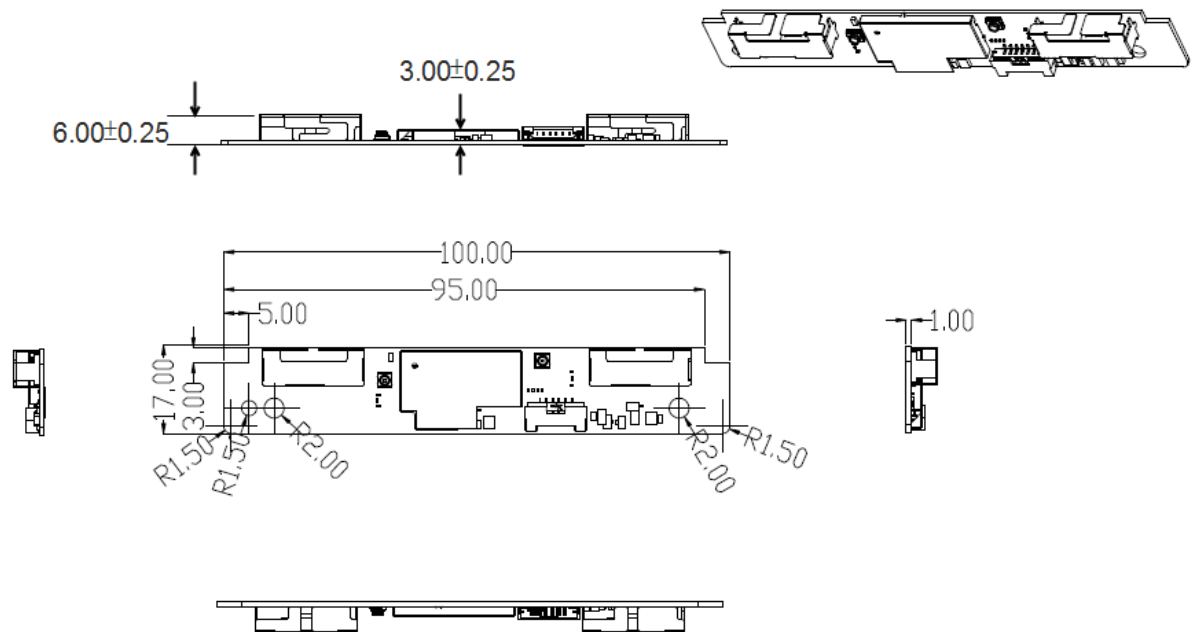


Tolerance: $\pm 0.10\text{mm}$


Unit: mm

SHIELDING CASE SPEC

Manufacture: Hun Pai(宏沛)

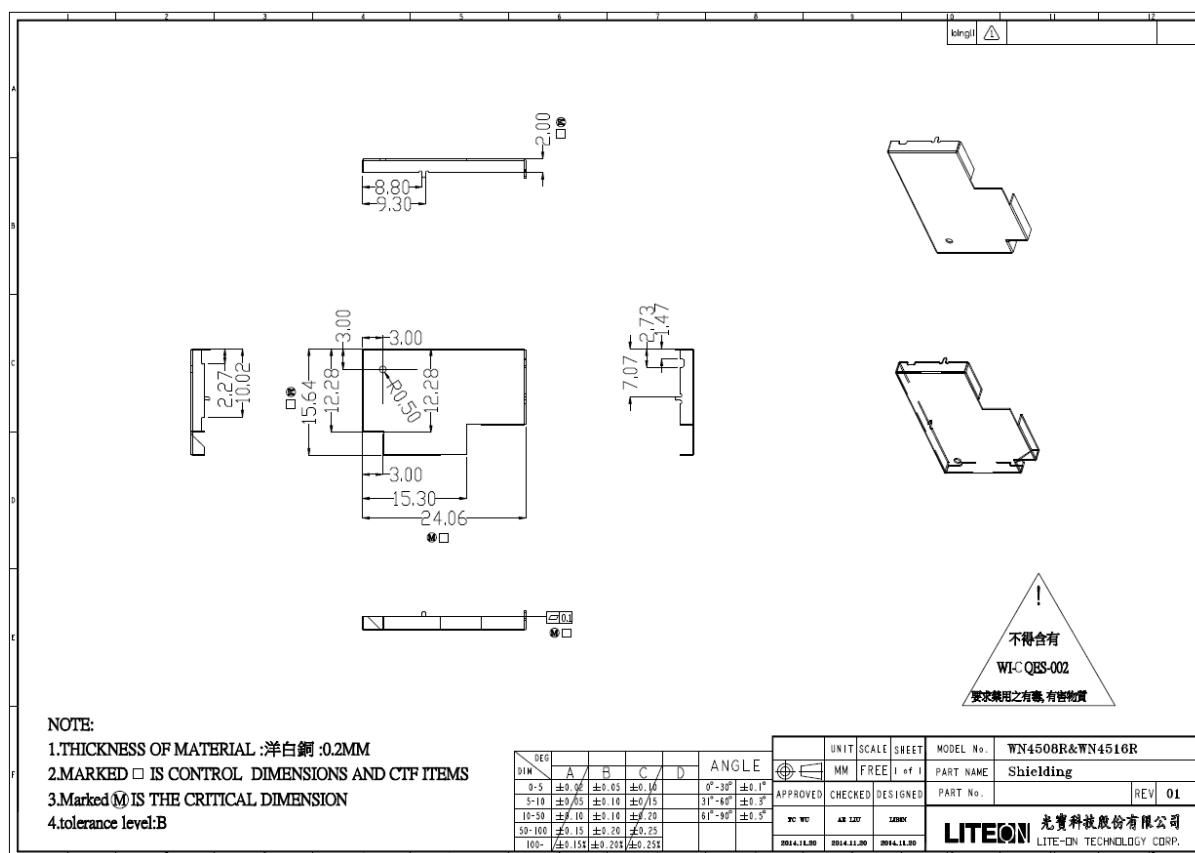

BLOCK DIAGRAM

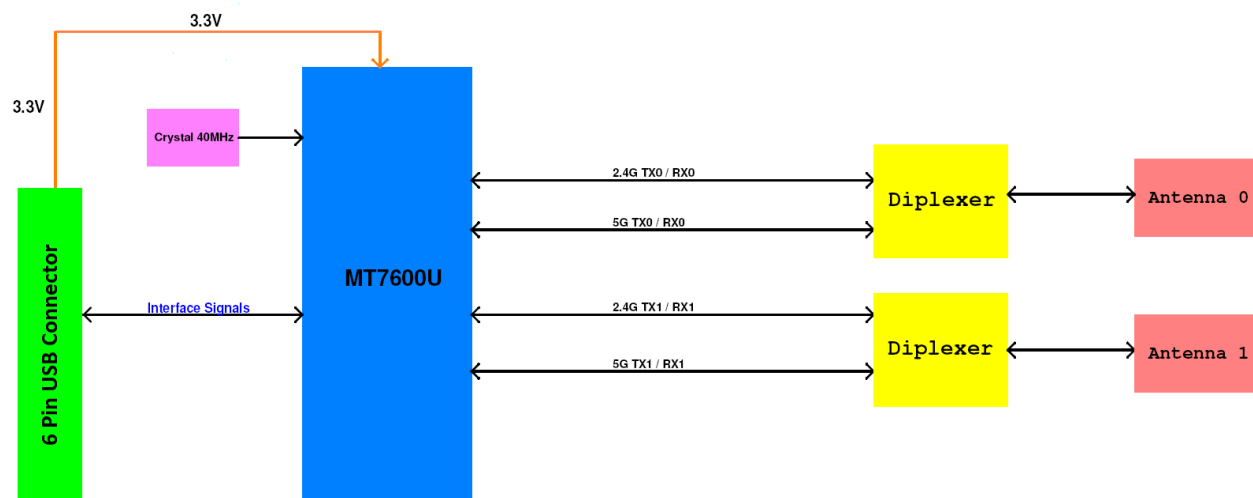

MODULE PHOTO



EEPROM INFORMATION

Reg Domain	World Wide 2.4G/5G Read from registry; Control by driver
	Offset 0x38 for 5G: 0xFF Offset 0x39 for 2.4G: 0xFF
Vendor ID	0x0471
Product ID	0x2126

ENVIRONMENTAL

Operating

Operating Temperature: 0 to 70 °C (32 to 158 °F)

Relative Humidity: 5-90% (non-condensing)


Storage

Temperature: -20 to 70 °C (-4 to 158 °F)

Relative Humidity: 5-95% (non-condensing)

PACKING DRAWING



Tray

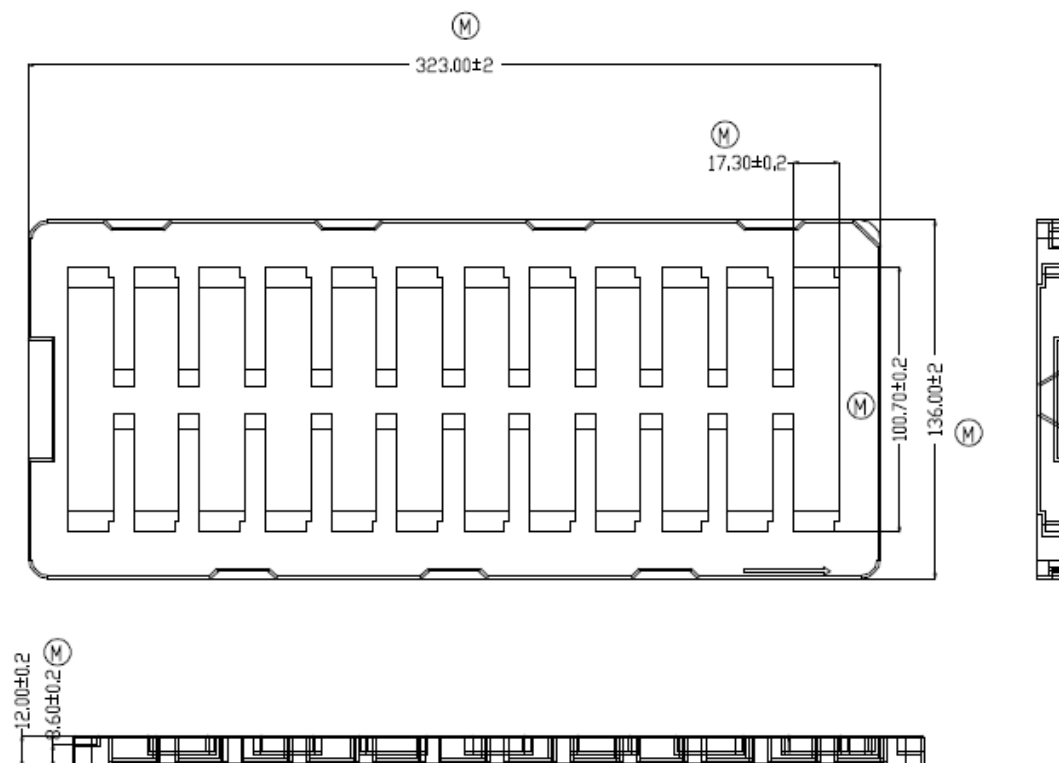

Note:



1. 材質：黑色 PS 1.2mm
2. 未注拔模角度為3度
3. 產品放進去不可以左右移動
4. 靜電阻值 $1 \times 10^4 \sim 1 \times 10^9 \Omega$
5. 鍍面摩擦電壓100V 以下
6. Marked (M) IS THE CRITICAL DIMENSION



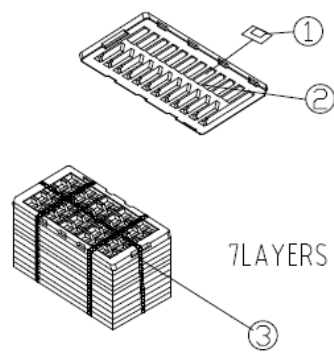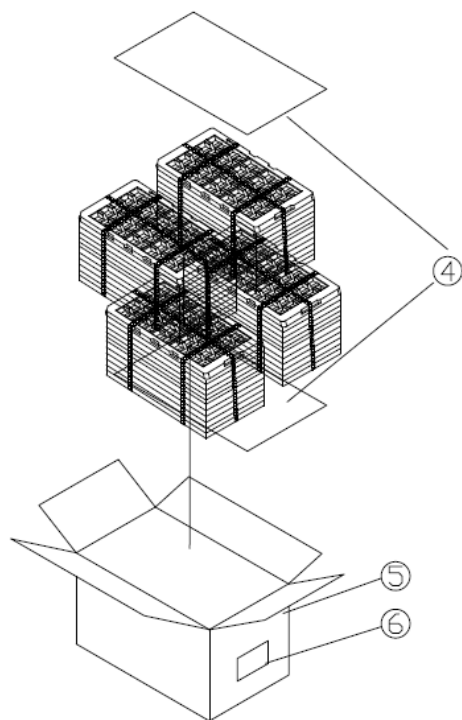

1 carton=7Layer*4=(6*12+1*0)*4=288pcs

ITEM	P/N	DESCRIPTION	QTY
1	xxxxxxx	product	1
2	5230000486ZD/CD	Clamshell	7/72
3	5210000004ZD	Straps	1.73m/72
4	5160000928XD	Carton sheet	2/288
5	5030000231XD	Carton	1/288
6	MM108xxx	Carton Label	1/288

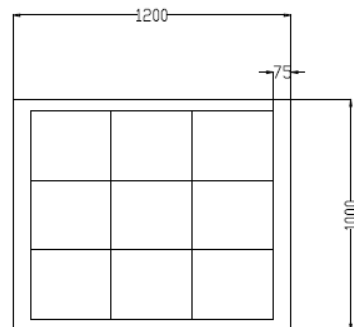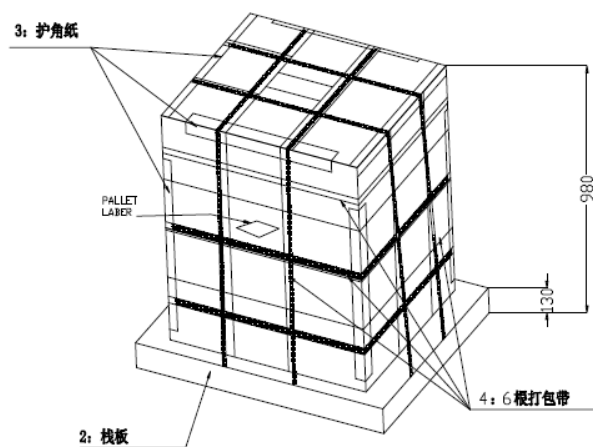

TOP VIEW 1:1

Note:

1.5LAYERS/HIGH=980MM

2.CARTON OUT DIMENSIONS:350*300*170MM 不得含有

3.288 SETS /CARTON

4.9 CARTON/LAYER

5.12960 SETS/PALLET

6.SHIP BY AIR



1	PART NAME	PART NUMBER	DIM	QTY
2	PALLET	5140000035QD	1200*1000*130MM	1/12960
3	PAPER	50400000063D	850*50*50*5MM	8/12960
4	STRAPS	5210000004ZD	W=9MM	??/12960