

# PRODUCT SPECIFICATION

## 802.11b/g/n 2T2R Wireless LAN USB Module

### WN4642R

### MT7603U

Version 1.3

#### Change History

| Revision    | Date       | Author     | Change List                                                                                                        |
|-------------|------------|------------|--------------------------------------------------------------------------------------------------------------------|
| Version 1.0 | 2016/05/23 | Ben J Chen | Preliminary                                                                                                        |
| Version 1.1 | 2016/06/06 | Ben J Chen | Change VID/PID from 0x0E8D/0x7603 to 0x25AA/0x76A3<br>Update Module Photo                                          |
| Version 1.2 | 2016/09/12 | Ben J Chen | Modify Pin Assignment<br>Update Operating Voltage to 5V                                                            |
| Version 1.3 | 2016/10/14 | Ben J Chen | Change connector to right angle type<br>- Update connector Spec<br>- Update Mechanical<br>Update Reset Timing SPEC |

*\* This document contains confidential proprietary information and is property of LTC. The contents of this document should not be disclosed to unauthorized persons without the written consent of LTC*

# **PRODUCT SPECIFICATION**

**802.11b/g/n 2T2R Wireless LAN USB Module**

**WN4642R**

**MT7603U**

Version 1.3

**Networking B.U.**

**Lite-on Technology Corporation**

**4F, No. 90, Chien 1 Rd.,**

**Chung Ho, New Taipei City 235, Taiwan, R.O.C.**

**Customer Approval:** \_\_\_\_\_ (Signature)

\_\_\_\_\_  
(Title)

\_\_\_\_\_  
(Company)

\_\_\_\_\_  
(Date)

(Please Sign Back by FAX. For Confirming the Spec Only, not an Official Agreement for OEM/ODM Business)

## CONTENT

|                                              |           |
|----------------------------------------------|-----------|
| <b>PRODUCT FEATURES .....</b>                | <b>4</b>  |
| <b>PRODUCT SPECIFICATIONS.....</b>           | <b>5</b>  |
| MAIN CHIPSET .....                           | 5         |
| FUNCTIONAL SPECIFICATIONS.....               | 5         |
| <b>RECOMMENDED OPERATION CONDITIONS.....</b> | <b>7</b>  |
| <b>DC CHARACTERISTICS.....</b>               | <b>7</b>  |
| <b>RESET TIMING SPEC.....</b>                | <b>7</b>  |
| <b>PIN ASSIGMENT.....</b>                    | <b>8</b>  |
| <b>USB CONNECTOR SPEC.....</b>               | <b>8</b>  |
| <b>MECHANICAL .....</b>                      | <b>9</b>  |
| <b>ANTENNA SPEC .....</b>                    | <b>10</b> |
| <b>EEPROM INFORMATION .....</b>              | <b>11</b> |
| <b>ENVIRONMENTAL .....</b>                   | <b>11</b> |
| OPERATING .....                              | 11        |
| STORAGE.....                                 | 11        |
| <b>PACKING DRAWING .....</b>                 | <b>12</b> |

## **PRODUCT FEATURES**

- Operate at ISM frequency Band (2.4GHz)
- IEEE Standards Support, 802.11b, 802.11g and 802.11n
- Support USB 2.0 host interface
- Enterprise level security supporting: WPA, WPA2, WPS2.0, WAPI
- Two-stream IEEE 802.11n support for 20MHz and 40MHz bandwidth channels provides PHY layer rates up to 300Mbps
- Integrated LNA, PA and T/R switch
- Support Wi-Fi Direct
- RoHS compliance
- Low Halogen compliance

## PRODUCT SPECIFICATIONS

### MAIN CHIPSET

MAC/ Baseband/ RF: MediaTek MT7603U

### FUNCTIONAL SPECIFICATIONS

| Wi-Fi Function                                                             |                                                                                                      |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Standard                                                                   | IEEE802.11b; IEEE 802.11g; IEEE 802.11n                                                              |
| Bus Interface                                                              | USB2.0                                                                                               |
| Data Rate                                                                  | <b>802.11b:</b><br>11, 5.5, 2, 1 Mbps                                                                |
|                                                                            | <b>802.11g:</b><br>54, 48, 36, 24, 18, 12, 9, 6 Mbps                                                 |
|                                                                            | <b>802.11n:</b><br>MCS 0 to 15 for HT20MHz<br>MCS 0 to 15 for HT40MHz                                |
| Media Access Control                                                       | CSMA/CA with ACK                                                                                     |
| Modulation Techniques                                                      | <b>802.11b:</b><br>CCK, DQPSK, DBPSK                                                                 |
|                                                                            | <b>802.11g:</b><br>64QAM, 16QAM, QPSK, BPSK                                                          |
|                                                                            | <b>802.11n:</b><br>64QAM, 16QAM, QPSK, BPSK                                                          |
| Network Architecture                                                       | Ad-hoc mode (Peer-to-Peer)<br>Infrastructure mode                                                    |
| Operation Channel                                                          | <b>2.4GHz</b><br>11: (Ch. 1-11) – United States<br>13: (Ch. 1-13) – Europe<br>14: (Ch. 1-14) – Japan |
|                                                                            | <b>802.11bg</b><br>2.400 ~ 2.4835 GHz                                                                |
|                                                                            | <b>802.11b:</b><br>16.5dBm@1-11Mbps                                                                  |
|                                                                            | <b>802.11g:</b><br>17dBm@6-54Mbps                                                                    |
| Transmit Output Power –<br>2x2<br>MAX: 19.5dBm<br>(Tolerance: $\pm 2$ dBm) | <b>802.11n(2.4G):</b><br><b>20MHz:</b><br>17.5dBm@MCS0-7<br><b>40MHz:</b><br>17.5dBm@MCS0-7          |
|                                                                            | <b>802.11b:</b><br>-88 dBm@1Mbps<br>-82 dBm@11Mbps                                                   |
|                                                                            | <b>802.11g:</b><br>-86 dBm@6Mbps<br>-71 dBm@54Mbps                                                   |
|                                                                            | <b>802.11n:</b><br><b>20MHz</b><br>-86 dBm@MCS0                                                      |
| Receiver Sensitivity                                                       |                                                                                                      |

|  |                                                              |
|--|--------------------------------------------------------------|
|  | -68 dBm@MCS7<br><b>40MHz</b><br>-83 dBm@MCS0<br>-65 dBm@MCS7 |
|--|--------------------------------------------------------------|

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| <b>Security</b>          | WPA, WPA2, WPS, WEP 64b&128bit, IEEE 802.1X, IEEE 802.11i |
| <b>Operating Voltage</b> | 5V ± 10% I/O supply voltage                               |

|                          |                               |                |             |
|--------------------------|-------------------------------|----------------|-------------|
| <b>OS Supported</b>      | Linux based                   |                |             |
| <b>Power Consumption</b> | <b>Mode</b>                   | <b>Average</b> | <b>Peak</b> |
|                          |                               | <b>2.4G</b>    | <b>2.4G</b> |
|                          | <b>TX</b>                     |                |             |
|                          | <b>RX</b>                     |                |             |
|                          | <b>Standby@<br/>wake mode</b> |                |             |

|                     |               |
|---------------------|---------------|
| <b>Antenna Type</b> | Metal antenna |
|---------------------|---------------|

## RECOMMENDED OPERATION CONDITIONS

For Module

| Symbol | Rating            | Min | Typ | Max | Units |
|--------|-------------------|-----|-----|-----|-------|
| VCC    | 5V Supply Voltage | 4.5 | 5   | 5.5 | V     |


For MT7603U IC

| Symbol | Rating              | Min  | Typ | Max  | Units |
|--------|---------------------|------|-----|------|-------|
| VDD33  | 3.3V Supply Voltage | 2.97 | 3.3 | 3.63 | V     |
| VDD12  | 1.2V Supply Voltage | 1.14 | 1.2 | 1.26 | V     |
| VDD16  | 1.6V Supply Voltage | 1.34 | 1.6 | 1.76 | V     |

## DC CHARACTERISTICS


| Symbol          | Parameter           | Min   | Typ | Max  | Units |
|-----------------|---------------------|-------|-----|------|-------|
| V <sub>IL</sub> | Input Low Voltage   | -0.28 | -   | 0.6  | V     |
| V <sub>IH</sub> | Input High Voltage  | 2.0   | -   | 3.63 | V     |
| V <sub>OL</sub> | Output Low Voltage  | -0.28 | -   | 0.4  |       |
| V <sub>OH</sub> | Output High Voltage | 2.4   | -   | 3.63 | V     |

## RESET TIMING SPEC

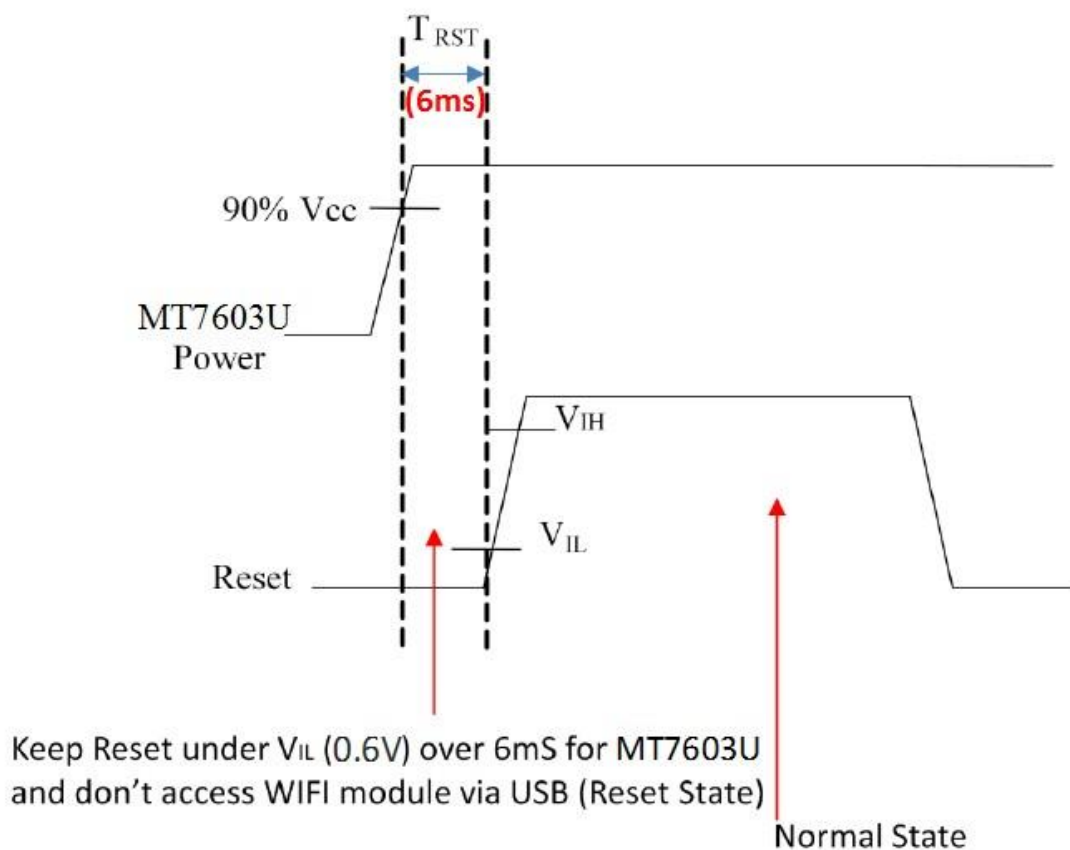



**MECHANICAL**

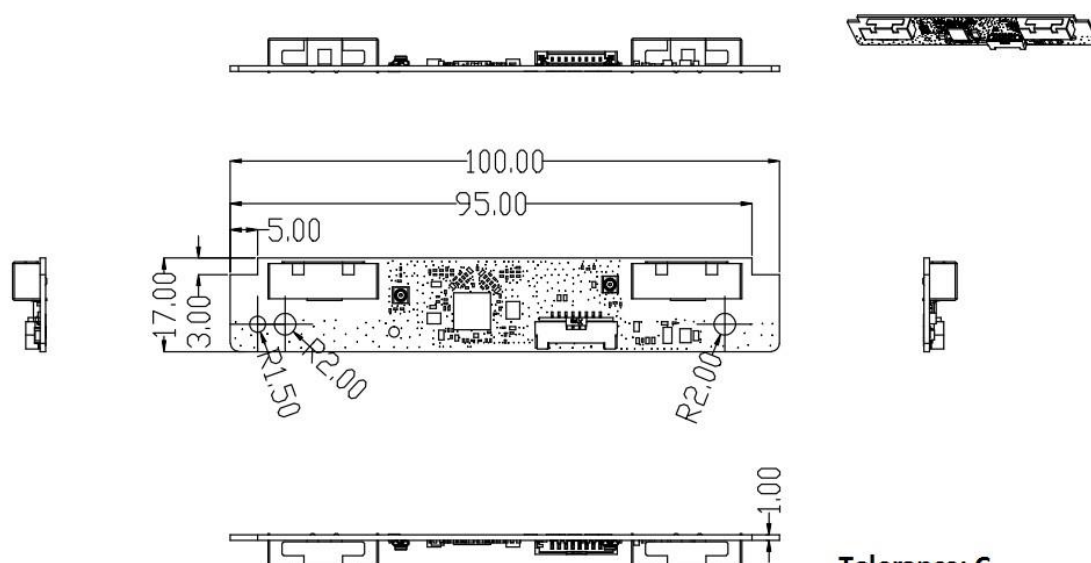

**Tolerance: C**

| DIM    | DEG   | A     | B     | C | D       | ANGLE |
|--------|-------|-------|-------|---|---------|-------|
| 0-5    | ±0.05 | ±0.05 | ±0.10 |   | 0°-30°  | ±0.1° |
| 5-10   | ±0.05 | ±0.10 | ±0.15 |   | 31°-60° | ±0.3° |
| 10-50  | ±0.10 | ±0.15 | ±0.20 |   | 61°-90° | ±0.5° |
| 50-100 | ±0.15 | ±0.20 | ±0.25 |   |         |       |
| 100+   | ±0.15 | ±0.20 | ±0.25 |   |         |       |

**Unit: mm**

# ANTENNA SPEC

## On Board Antenna for WiFi (Q'ty:2pcs)

| ELECTRICAL               |  |  |  | No. | DESCRIPTION | MAT'L          | Finish | Q'TY |
|--------------------------|--|--|--|-----|-------------|----------------|--------|------|
| Frequency : 2.4/5. x GHz |  |  |  | A   | Antenna     | SUS430 T=0.3mm | 先鍍後沖   | 1    |

※標記□記號者, 為重點檢驗尺寸

|                                              |             |            |                |                    |
|----------------------------------------------|-------------|------------|----------------|--------------------|
| 設計 DR.                                       | HWCHAN      | 2015.02.06 | 品名             | 版本 REV.            |
| 核准 APR.                                      |             |            | ARTICLE        | B                  |
| 變更說明: (由先沖後鍍改為先鍍後沖)                          | 2016.05.18  | HWCHAN     | 容許公差 TOLERANCE | RFMTA200700NNLB002 |
| LTR                                          | DESCRIPTION | DATE       | REQ. BY        |                    |
| PSA 華新科技股份有限公司 Walsin Technology Corporation |             |            |                | 單位 UNIT            |
|                                              |             |            |                | 比例 SCALE           |
|                                              |             |            |                | 張數 SHEET           |
|                                              |             |            |                | 1                  |

## EEPROM INFORMATION

|                   |                                                                    |
|-------------------|--------------------------------------------------------------------|
| <b>Reg Domain</b> | World Wide<br><b>2.4G</b><br>Read from registry; Control by driver |
|                   | Offset 0x39 for 2.4G: 0xFF                                         |
| <b>Vendor ID</b>  | 0x25AA                                                             |
| <b>Product ID</b> | 0x76A3                                                             |

## ENVIRONMENTAL

### Operating

Operating Temperature: 0 to 70 °C (32 to 158 °F)

Relative Humidity: 5-90% (non-condensing)


### Storage

Temperature: -20 to 70 °C (-4 to 158 °F)

Relative Humidity: 5-95% (non-condensing)

# PACKING DRAWING



## Tray

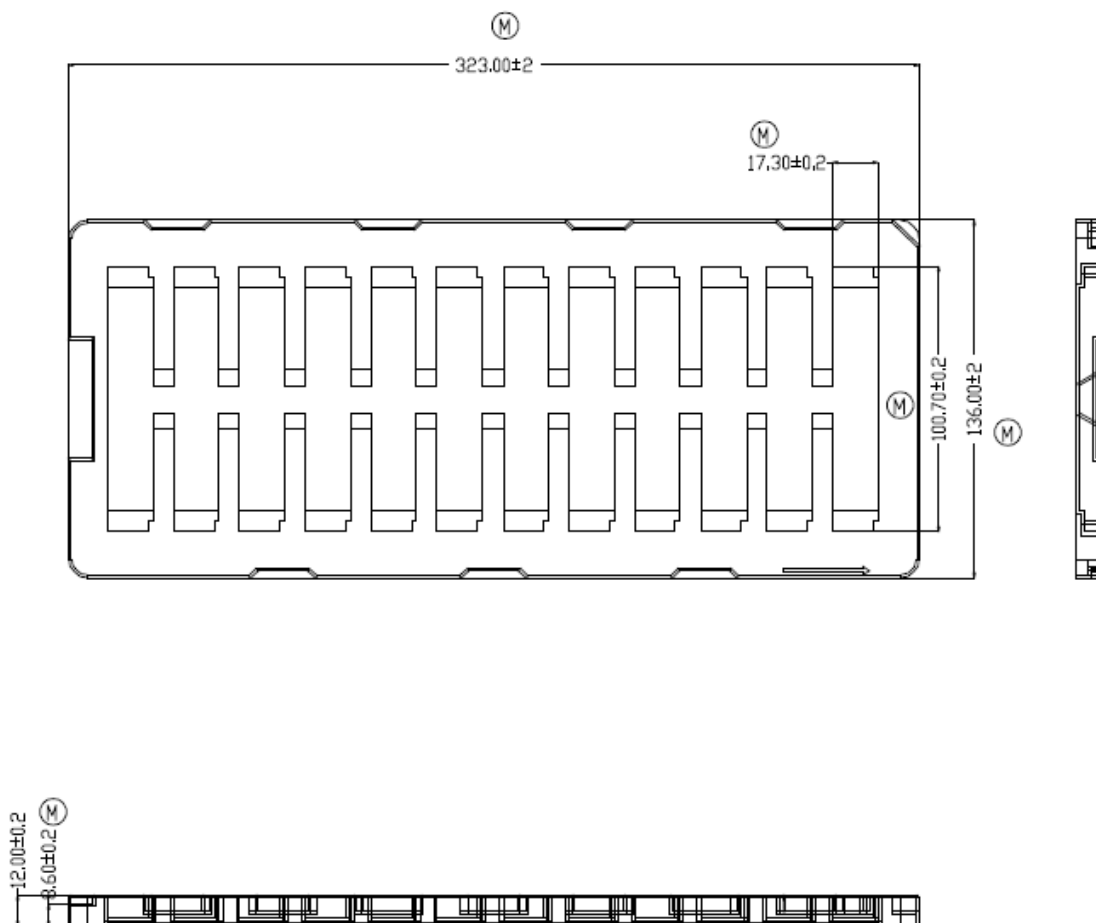

### Note:



- 1.材質：黑色 PS 1.2mm
- 2.未注拔模角度為3度
- 3.產品放進去不可以左右移動
- 4.靜電阻值 $1 \times 10^4 \sim 1 \times 10^9 \Omega$
- 5.鍍面摩擦電壓100V 以下
6. Marked (M) IS THE CRITICAL DIMENSION



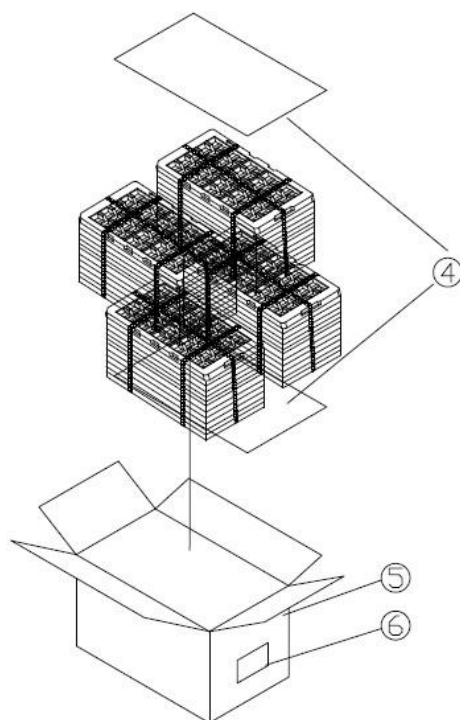

1 carton=7Layer\*4=(6\*12+1\*0)\*4=288pcs

| ITEM | P/N             | DESCRIPTION  | QTY      |
|------|-----------------|--------------|----------|
| 1    | xxxxxxx         | product      | 1        |
| 2    | 5230000486ZD/CD | Clamshell    | 7/72     |
| 3    | 5210000004ZD    | Straps       | 1.73m/72 |
| 4    | 5160000928XD    | Carton sheet | 2/288    |
| 5    | 5030000231XD    | Carton       | 1/288    |
| 6    | MM108xxx        | Carton Label | 1/288    |

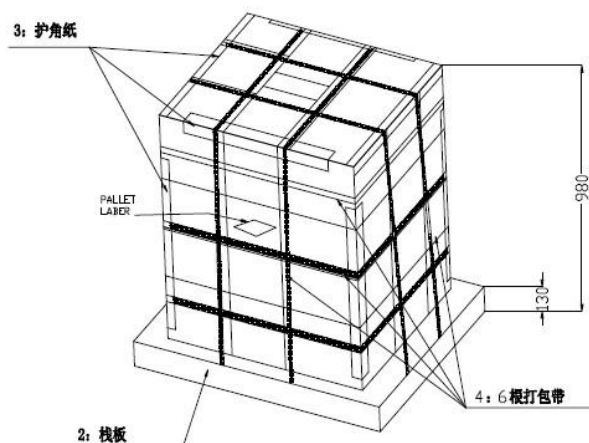

TOP VIEW 1:1

**Note:**

1.5LAYERS/HIGH=980MM

2.CARTON OUT DIMENSIONS:350\*300\*170MM 不得含有

3.288 SETS /CARTON

4.9 CARTON/LAYER

5.12960 SETS/PALLET

6.SHIP BY AIR



| 1 | PART NAME | PART NUMBER  | DIM             | QTY      |
|---|-----------|--------------|-----------------|----------|
| 2 | PALLET    | 5140000035QD | 1200*1000*130MM | 1/12960  |
| 3 | PAPER     | 50400000063D | 850*50*50*5MM   | 8/12960  |
| 4 | STRAPS    | 5210000004ZD | W=9MM           | ??/12960 |

**FCC Statement:****Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated.  
Selection of other channels is not possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi-transmitter product procedures.

**IMPORTANT NOTE:****FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

**IMPORTANT NOTE:**

This module is intended for OEM integrator. The OEM integrator is responsible for the

compliance to all the rules that apply to the product into which this certified RF module is integrated.

Additional testing and certification may be necessary when multiple modules are used.

20 cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

#### USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: PPQ-WN4642R ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

## **OEM Integrator Checklist**

The party below will implement the LITE-ON Module in host systems in accordance with the instructions specified in this document and the documents referenced herein.

1. The OEM integrator will ensure the Module is integrated in a host systems using only the approved antenna model(s) described in this document.

Walsin / RFMTA200700NNLB002 / PIFA Antenna

ANT 1 Gain: 1.53 dBi

ANT 2 Gain: -0.29 dBi

Auden / T-0082 / PIFA Antenna

ANT 1 Gain: 2.70 dBi

ANT 2 Gain: 0.63 dBi

2. The OEM integrator will ensure the antenna placement inside the host system will maintain the required spacing to end user for RF Exposure compliance, as specified in this document.

3. If other radios are integrated inside the host with the LITE-ON Module, the OEM integrator will contact its test lab, TCB or LITE-ON to determine if additional FCC compliance evaluation is required to meet FCC collocation rules.

4. The OEM integrator will ensure end user documentation will contain the specified regulatory wording and ensure the host system and the Module itself are labeled as specified in this document.

5. The OEM integrator will ensure the Module is programmed in the factory with compliant transmit power not exceeding the levels specified in this document.

LITE-ON requests that the OEM integrator acknowledge its receipt of this document and the above instructions. You may contact LITE-ON with any questions concerning this document or the responsibilities of the OEM integrator.