




Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 6, Band 1, 11ax HE40 CH46		:	

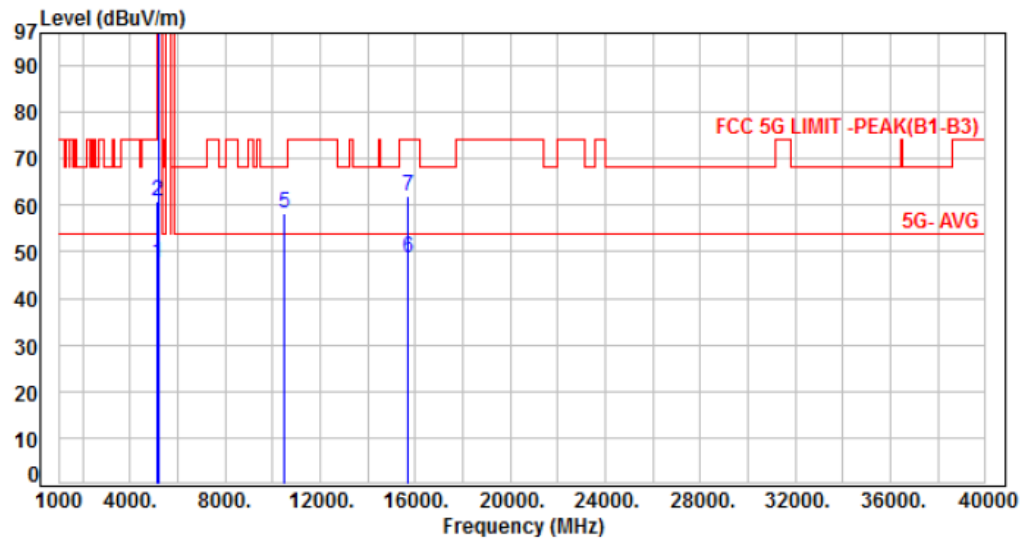

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.83	47.53	54.00	-6.47	Average	178	184	P
2	5150.00	6.70	54.19	60.89	74.00	-13.11	Peak	178	184	P
3	5230.00	6.99	90.18	97.17	200.00	-102.83	Average	178	184	P
4	5230.00	6.99	101.34	108.33	200.00	-91.67	Peak	178	184	P
5	10460.00	15.86	42.30	58.16	68.20	-10.04	Peak	100	176	P
6	15690.00	19.44	29.28	48.72	54.00	-5.28	Average	100	245	P
7	15690.00	19.44	42.69	62.13	74.00	-11.87	Peak	100	245	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 1, 11ax HE40 CH46		

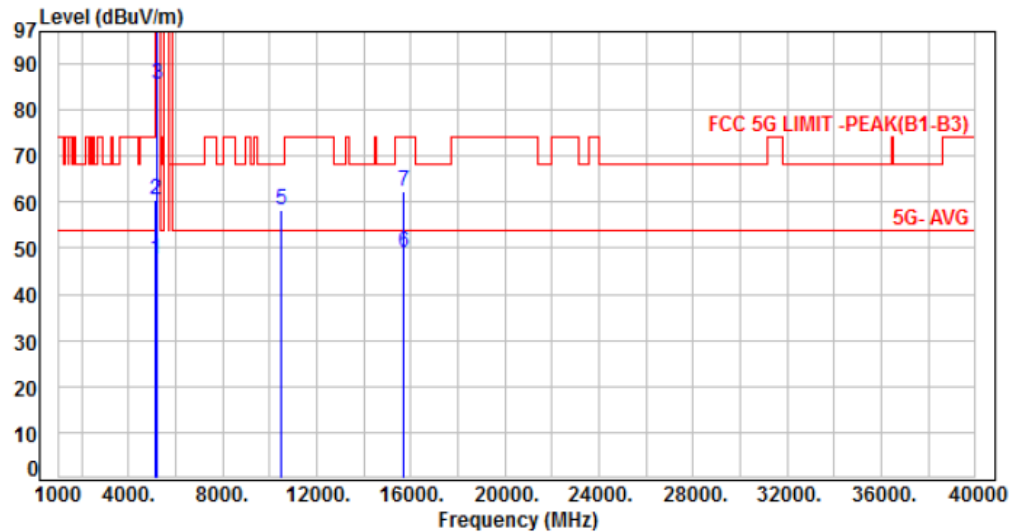

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.79	47.49	54.00	-6.51	Average	125	360	P
2	5150.00	6.70	53.73	60.43	74.00	-13.57	Peak	125	360	P
3	5230.00	6.99	78.66	85.65	200.00	-114.35	Average	125	360	P
4	5230.00	6.99	90.11	97.10	200.00	-102.90	Peak	125	360	P
5	10460.00	15.86	42.26	58.12	68.20	-10.08	Peak	100	315	P
6	15690.00	19.44	29.63	49.07	54.00	-4.93	Average	100	153	P
7	15690.00	19.44	42.76	62.20	74.00	-11.80	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 4, 11ax HE40 CH151		:

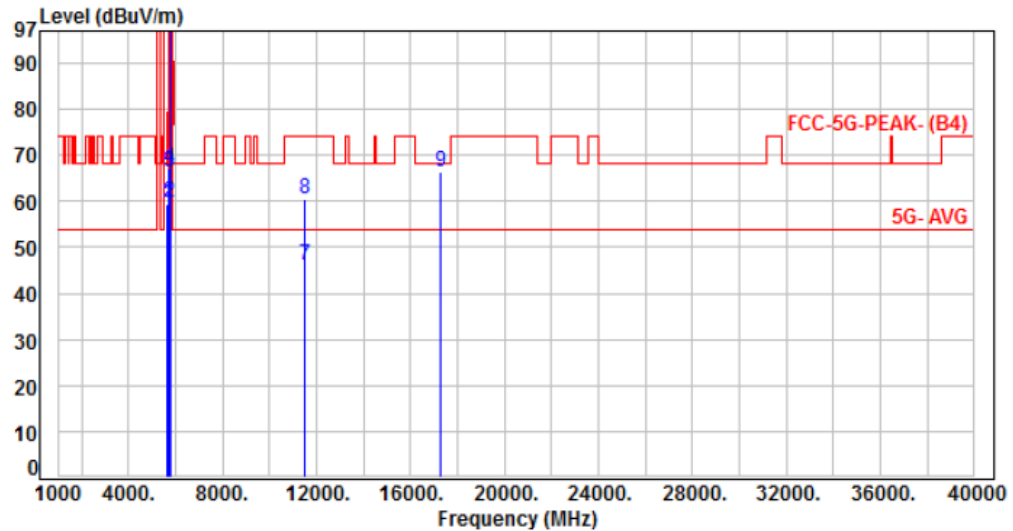

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	52.13	59.48	68.20	-8.72	Peak	117	28	P
2	5700.00	7.37	52.40	59.77	105.20	-45.43	Peak	117	28	P
3	5720.00	7.34	59.19	66.53	110.80	-44.27	Peak	117	28	P
4	5725.00	7.33	59.85	67.18	122.20	-55.02	Peak	117	28	P
5	5755.00	7.30	96.83	104.13	200.00	-95.87	Average	117	28	P
6	5755.00	7.30	109.44	116.74	200.00	-83.26	Peak	117	28	P
7	11510.00	17.79	28.45	46.24	54.00	-7.76	Average	100	227	P
8	11510.00	17.79	42.85	60.64	74.00	-13.36	Peak	100	227	P
9	17265.00	23.86	42.47	66.33	68.20	-1.87	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 4, 11ax HE40 CH151		:

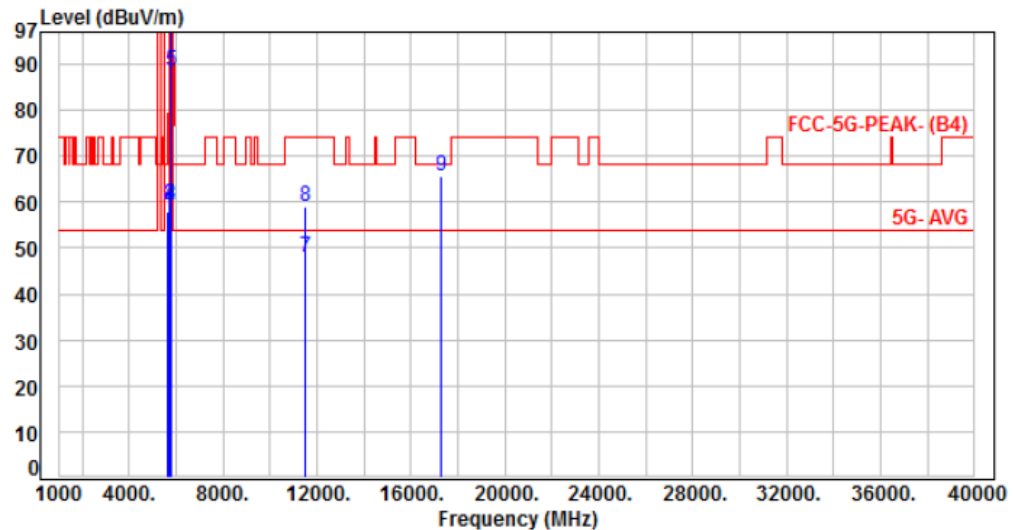

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	50.40	57.75	68.20	-10.45	Peak	100	335	P
2	5700.00	7.37	51.86	59.23	105.20	-45.97	Peak	100	335	P
3	5720.00	7.34	52.06	59.40	110.80	-51.40	Peak	100	335	P
4	5725.00	7.33	52.16	59.49	122.20	-62.71	Peak	100	335	P
5	5755.00	7.30	81.05	88.35	200.00	-111.65	Average	100	335	P
6	5755.00	7.30	91.43	98.73	200.00	-101.27	Peak	100	335	P
7	11510.00	17.79	30.17	47.96	54.00	-6.04	Average	100	223	P
8	11510.00	17.79	41.31	59.10	74.00	-14.90	Peak	100	223	P
9	17265.00	23.86	41.82	65.68	68.20	-2.52	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 6, Band 4, 11ax HE40 CH159		:	

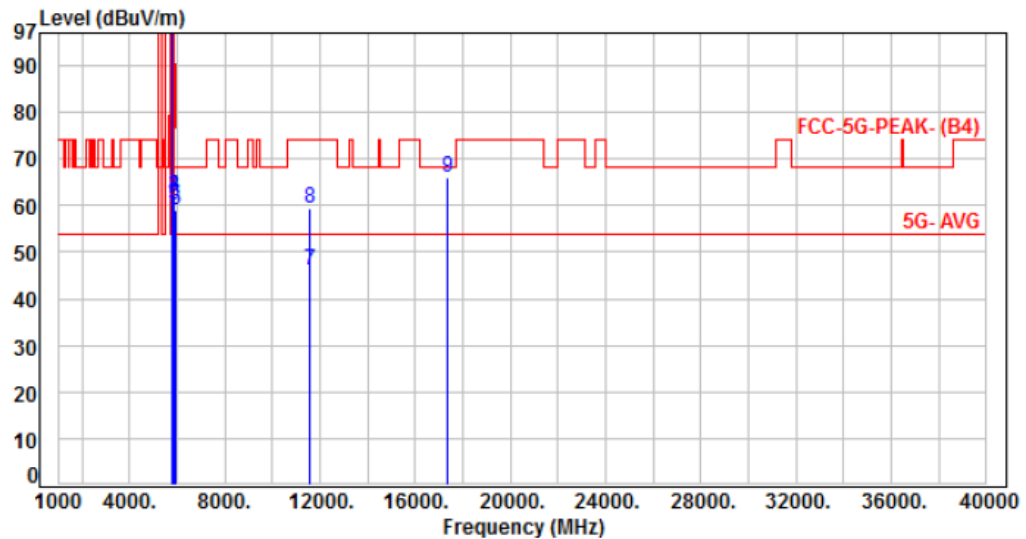

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	91.93	99.32	200.00	-100.68	Average	121	30	P
2	5795.00	7.39	107.99	115.38	200.00	-84.62	Peak	121	30	P
3	5850.00	7.43	54.53	61.96	122.20	-60.24	Peak	121	30	P
4	5855.00	7.45	54.40	61.85	110.80	-48.95	Peak	121	30	P
5	5875.00	7.54	52.55	60.09	105.20	-45.11	Peak	121	30	P
6	5925.00	7.66	51.36	59.02	68.20	-9.18	Peak	121	30	P
7	11590.00	17.95	28.08	46.03	54.00	-7.97	Average	100	237	P
8	11590.00	17.95	41.43	59.38	74.00	-14.62	Peak	100	237	P
9	17385.00	24.58	41.54	66.12	68.20	-2.08	Peak	100	133	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 4, 11ax HE40 CH159		:

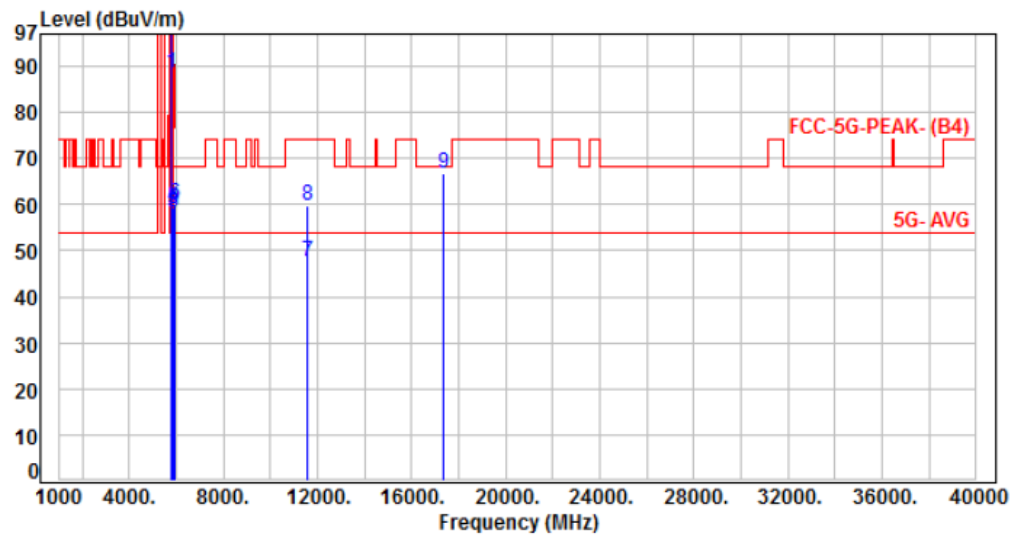

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	81.28	88.67	200.00	-111.33	Average	178	45	P
2	5795.00	7.39	96.44	103.83	200.00	-96.17	Peak	178	45	P
3	5850.00	7.43	50.94	58.37	122.20	-63.83	Peak	178	45	P
4	5855.00	7.45	51.90	59.35	110.80	-51.45	Peak	178	45	P
5	5875.00	7.54	51.57	59.11	105.20	-46.09	Peak	178	45	P
6	5925.00	7.66	52.62	60.28	68.20	-7.92	Peak	178	45	P
7	11590.00	17.95	29.65	47.60	54.00	-6.40	Average	100	236	P
8	11590.00	17.95	41.65	59.60	74.00	-14.40	Peak	100	236	P
9	17385.00	24.58	42.11	66.69	68.20	-1.51	Peak	100	184	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 7, Band 1, 11ax HE80 CH42		:	

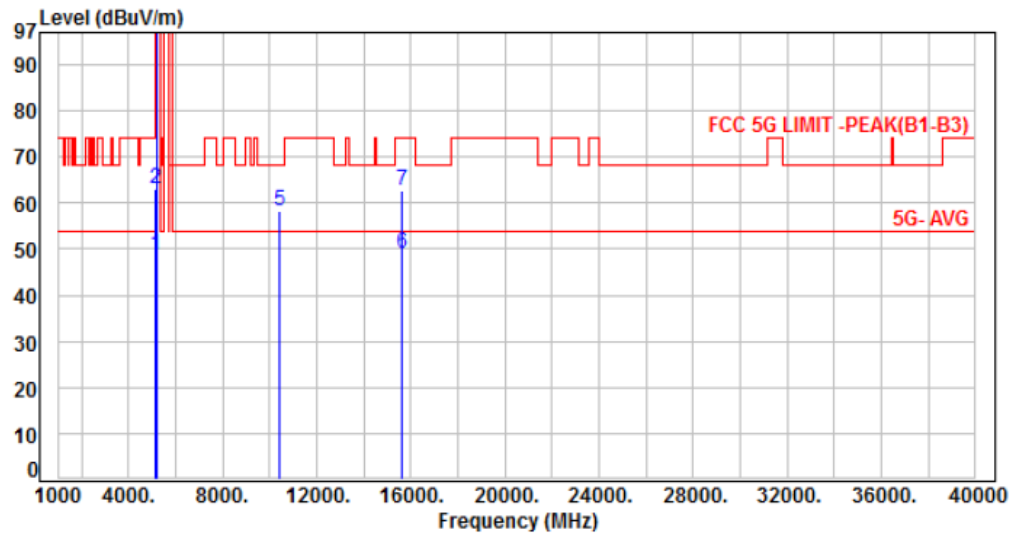

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	42.06	48.76	54.00	-5.24	Average	205	185	P
2	5150.00	6.70	56.55	63.25	74.00	-10.75	Peak	205	185	P
3	5210.00	6.97	91.58	98.55	200.00	-101.45	Average	205	185	P
4	5210.00	6.97	101.56	108.53	200.00	-91.47	Peak	205	185	P
5	10420.00	15.83	42.44	58.27	68.20	-9.93	Peak	100	254	P
6	15630.00	19.57	29.43	49.00	54.00	-5.00	Average	100	153	P
7	15630.00	19.57	43.27	62.84	74.00	-11.16	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 7, Band 1, 11ax HE80 CH42		:	

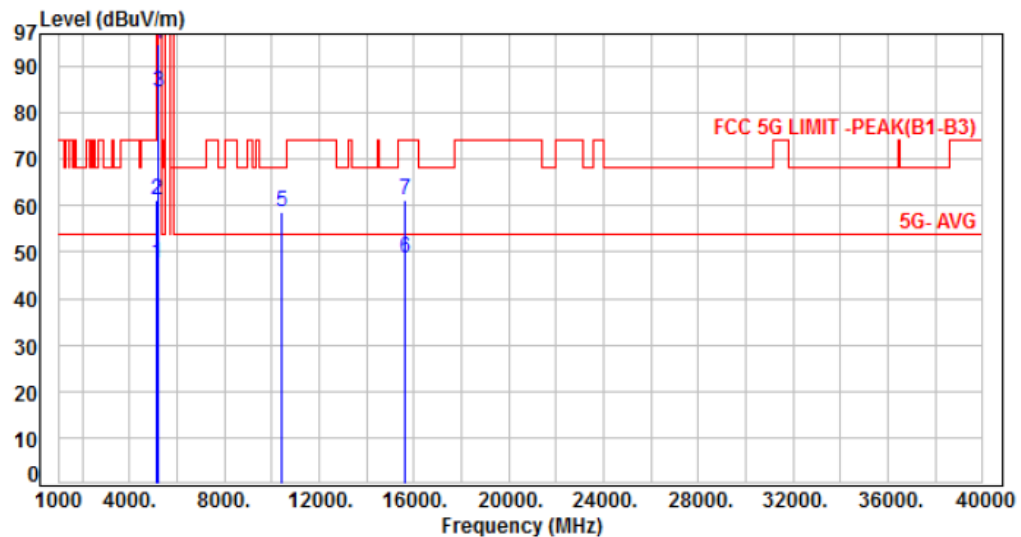

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.90	47.60	54.00	-6.40	Average	177	360	P
2	5150.00	6.70	54.37	61.07	74.00	-12.93	Peak	177	360	P
3	5210.00	6.97	77.48	84.45	200.00	-115.55	Average	177	360	P
4	5210.00	6.97	87.92	94.89	200.00	-105.11	Peak	177	360	P
5	10420.00	15.83	42.72	58.55	68.20	-9.65	Peak	100	158	P
6	15630.00	19.57	29.12	48.69	54.00	-5.31	Average	100	178	P
7	15630.00	19.57	41.82	61.39	74.00	-12.61	Peak	100	178	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 4, 11ax HE80 CH155		:

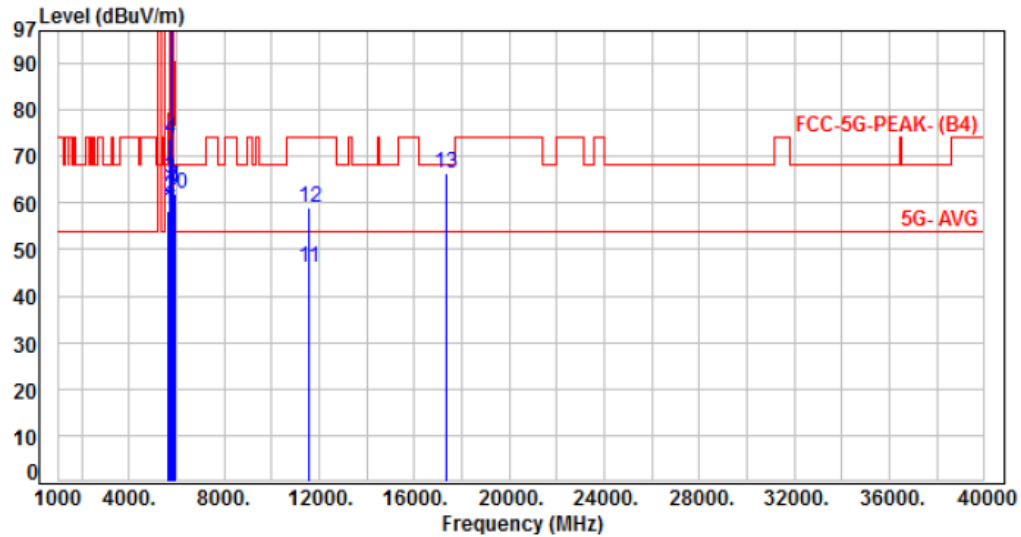


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	50.94	58.29	68.20	-9.91	Peak	123	29	P
2	5700.00	7.37	53.85	61.22	105.20	-43.98	Peak	123	29	P
3	5720.00	7.34	58.11	65.45	110.80	-45.35	Peak	123	29	P
4	5725.00	7.33	66.33	73.66	122.20	-48.54	Peak	123	29	P
5	5775.00	7.35	94.08	101.43	200.00	-98.57	Average	123	29	P
6	5775.00	7.35	103.32	110.67	200.00	-89.33	Peak	123	29	P
7	5850.00	7.43	56.03	63.46	122.20	-58.74	Peak	123	29	P
8	5855.00	7.45	56.05	63.50	110.80	-47.30	Peak	123	29	P
9	5875.00	7.54	55.07	62.61	105.20	-42.59	Peak	123	29	P
10	5925.00	7.66	54.41	62.07	68.20	-6.13	Peak	123	29	P
11	11550.00	17.88	28.14	46.02	54.00	-7.98	Average	100	138	P
12	11550.00	17.88	41.04	58.92	74.00	-15.08	Peak	100	138	P
13	17325.00	24.29	41.93	66.22	68.20	-1.98	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 4, 11ax HE80 CH155		

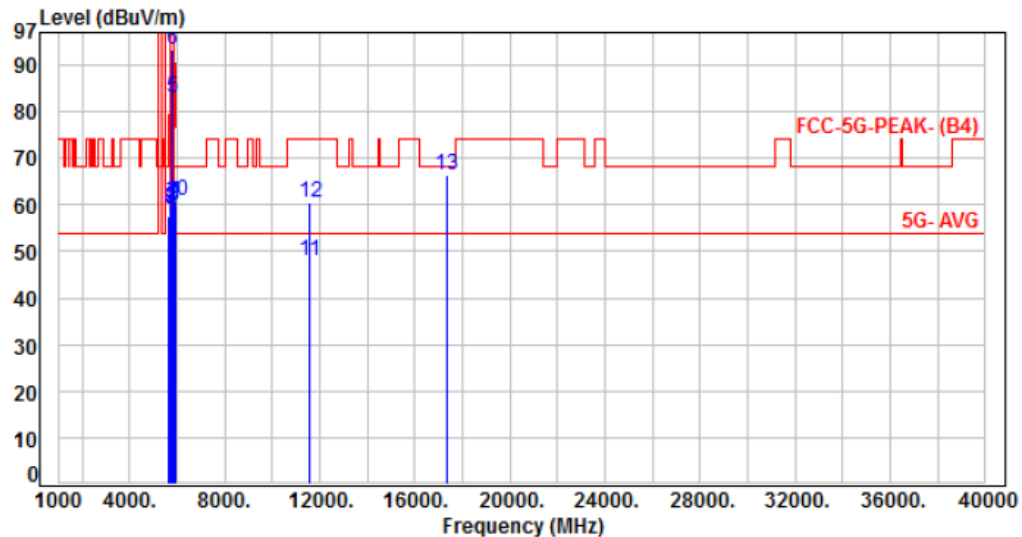

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	50.14	57.49	68.20	-10.71	Peak	100	331	P
2	5700.00	7.37	52.10	59.47	105.20	-45.73	Peak	100	331	P
3	5720.00	7.34	51.84	59.18	110.80	-51.62	Peak	100	331	P
4	5725.00	7.33	52.51	59.84	122.20	-62.36	Peak	100	331	P
5	5775.00	7.35	75.63	82.98	200.00	-117.02	Average	100	331	P
6	5775.00	7.35	85.91	93.26	200.00	-106.74	Peak	100	331	P
7	5850.00	7.43	53.17	60.60	122.20	-61.60	Peak	100	331	P
8	5855.00	7.45	52.17	59.62	110.80	-51.18	Peak	100	331	P
9	5875.00	7.54	52.45	59.99	105.20	-45.21	Peak	100	331	P
10	5925.00	7.66	53.16	60.82	68.20	-7.38	Peak	100	331	P
11	11550.00	17.88	29.98	47.86	54.00	-6.14	Average	100	315	P
12	11550.00	17.88	42.67	60.55	74.00	-13.45	Peak	100	315	P
13	17325.00	24.29	42.08	66.37	68.20	-1.83	Peak	100	269	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 8, Band 1, 11a CH36		:	

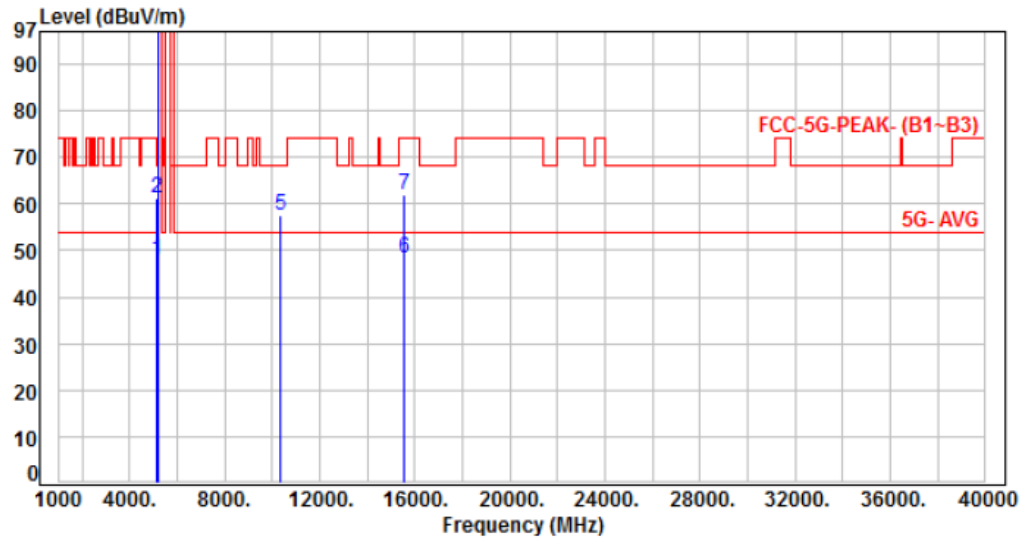

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.32	48.02	54.00	-5.98	Average	151	14	P
2	5150.00	6.70	54.67	61.37	74.00	-12.63	Peak	151	14	P
3	5180.00	6.85	98.53	105.38	200.00	-94.62	Average	151	14	P
4	5180.00	6.85	108.27	115.12	200.00	-84.88	Peak	151	14	P
5	10360.00	15.93	41.59	57.52	68.20	-10.68	Peak	100	166	P
6	15540.00	19.69	28.68	48.37	54.00	-5.63	Average	100	85	P
7	15540.00	19.69	42.35	62.04	74.00	-11.96	Peak	100	85	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 8, Band 1, 11a CH36		:	

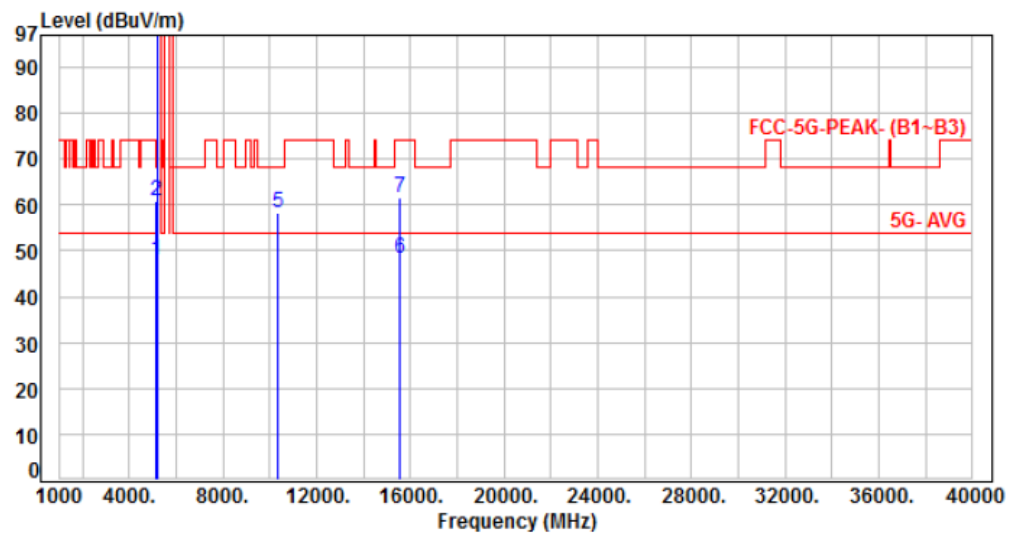

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.10	47.80	54.00	-6.20	Average	100	353	P
2	5150.00	6.70	54.26	60.96	74.00	-13.04	Peak	100	353	P
3	5180.00	6.85	96.18	103.03	200.00	-96.97	Average	100	353	P
4	5180.00	6.85	106.39	113.24	200.00	-86.76	Peak	100	353	P
5	10360.00	15.93	42.18	58.11	68.20	-10.09	Peak	100	46	P
6	15540.00	19.69	28.59	48.28	54.00	-5.72	Average	100	218	P
7	15540.00	19.69	41.95	61.64	74.00	-12.36	Peak	100	218	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 1, 11a CH40		:

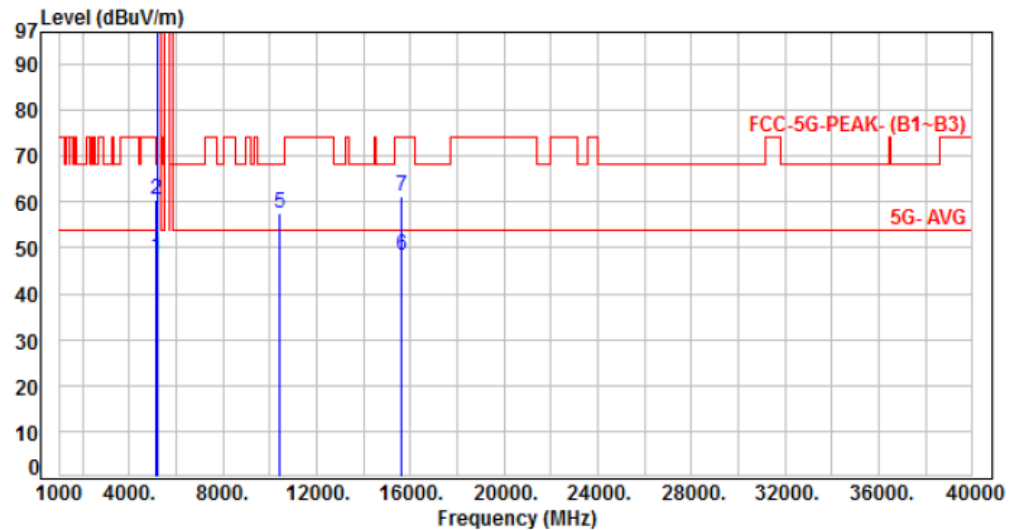

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.07	47.77	54.00	-6.23	Average	145	13	P
2	5150.00	6.70	53.93	60.63	74.00	-13.37	Peak	145	13	P
3	5200.00	6.95	98.29	105.24	200.00	-94.76	Average	145	13	P
4	5200.00	6.95	108.83	115.78	200.00	-84.22	Peak	145	13	P
5	10400.00	15.84	41.63	57.47	68.20	-10.73	Peak	100	166	P
6	15600.00	19.64	28.71	48.35	54.00	-5.65	Average	100	84	P
7	15600.00	19.64	41.58	61.22	74.00	-12.78	Peak	100	84	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 1, 11a CH40		

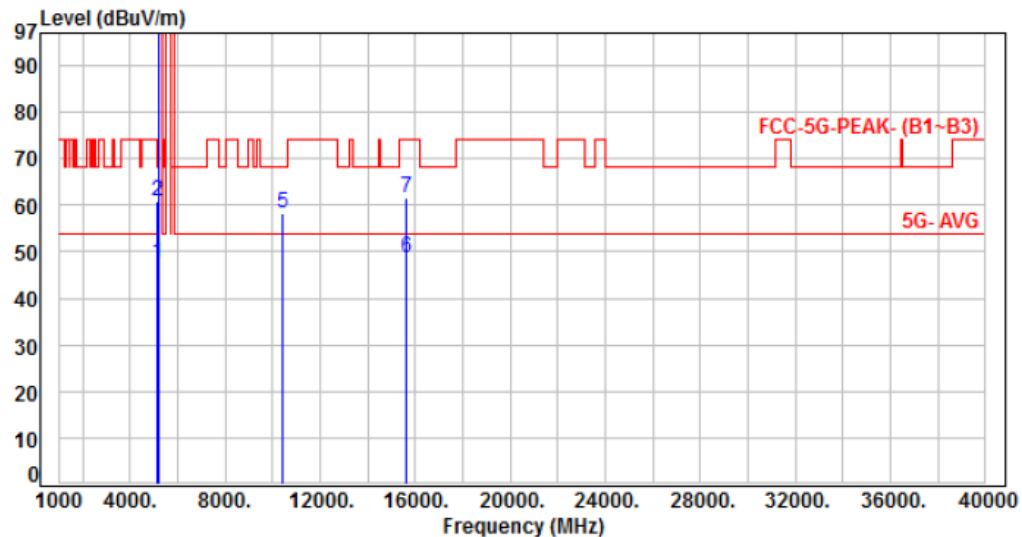

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.98	47.68	54.00	-6.32	Average	101	355	P
2	5150.00	6.70	53.99	60.69	74.00	-13.31	Peak	101	355	P
3	5200.00	6.95	96.80	103.75	200.00	-96.25	Average	101	355	P
4	5200.00	6.95	106.56	113.51	200.00	-86.49	Peak	101	355	P
5	10400.00	15.84	42.38	58.22	68.20	-9.98	Peak	100	42	P
6	15600.00	19.64	28.95	48.59	54.00	-5.41	Average	100	229	P
7	15600.00	19.64	41.87	61.51	74.00	-12.49	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 1, 11a CH48		:

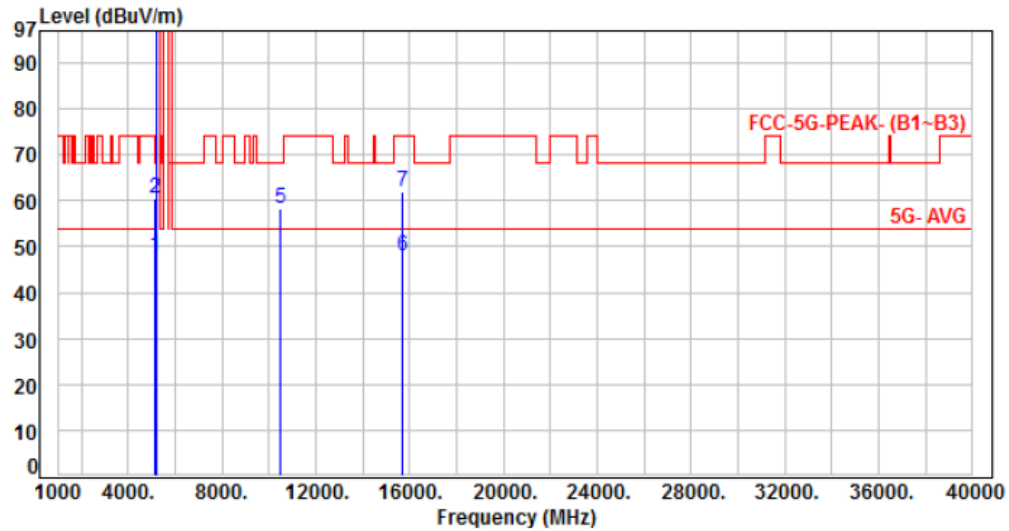

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.10	47.80	54.00	-6.20	Average	162	12	P
2	5150.00	6.70	53.84	60.54	74.00	-13.46	Peak	162	12	P
3	5240.00	7.00	97.44	104.44	200.00	-95.56	Average	162	12	P
4	5240.00	7.00	107.94	114.94	200.00	-85.06	Peak	162	12	P
5	10480.00	15.97	42.21	58.18	68.20	-10.02	Peak	100	163	P
6	15720.00	19.25	28.52	47.77	54.00	-6.23	Average	100	92	P
7	15720.00	19.25	42.66	61.91	74.00	-12.09	Peak	100	92	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 1, 11a CH48		:

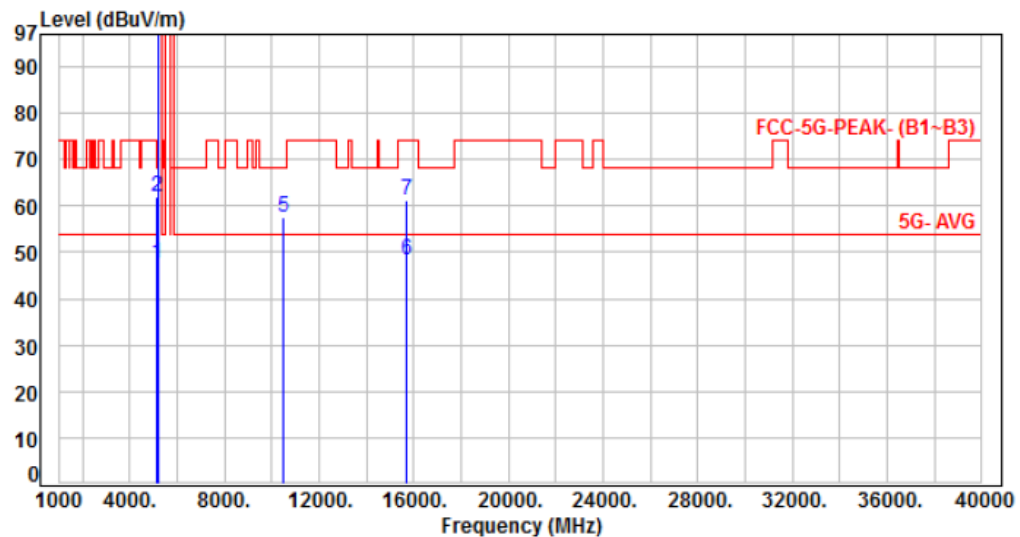

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.83	47.53	54.00	-6.47	Average	106	354	P
2	5150.00	6.70	55.19	61.89	74.00	-12.11	Peak	106	354	P
3	5240.00	7.00	96.09	103.09	200.00	-96.91	Average	106	354	P
4	5240.00	7.00	105.96	112.96	200.00	-87.04	Peak	106	354	P
5	10480.00	15.97	41.60	57.57	68.20	-10.63	Peak	100	52	P
6	15720.00	19.25	29.05	48.30	54.00	-5.70	Average	100	219	P
7	15720.00	19.25	41.93	61.18	74.00	-12.82	Peak	100	219	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 4, 11a CH149		:

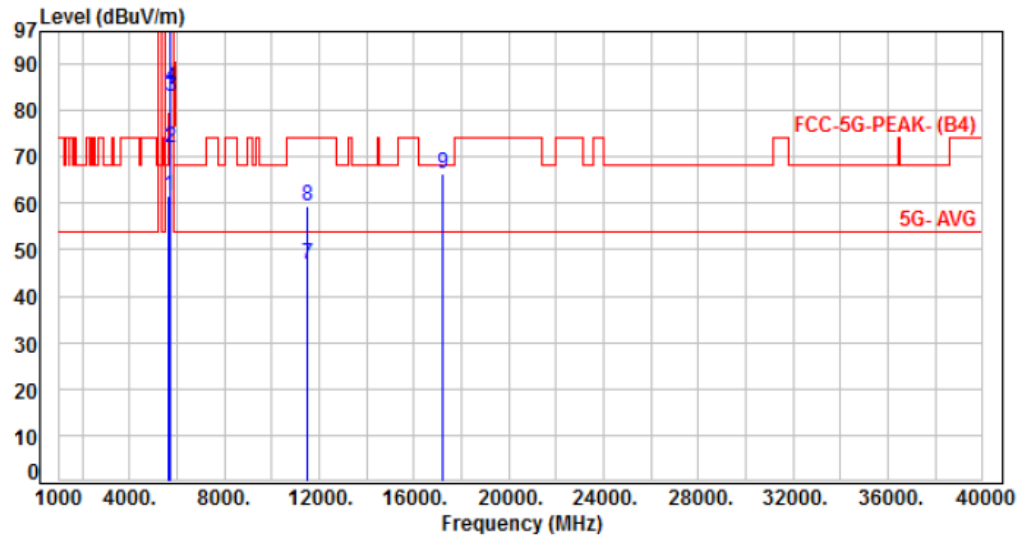

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.07	61.42	68.20	-6.78	Peak	221	19	P
2	5700.00	7.37	64.41	71.78	105.20	-33.42	Peak	221	19	P
3	5720.00	7.34	75.69	83.03	110.80	-27.77	Peak	221	19	P
4	5725.00	7.33	77.63	84.96	122.20	-37.24	Peak	221	19	P
5	5745.00	7.30	104.51	111.81	200.00	-88.19	Average	221	19	P
6	5745.00	7.30	114.66	121.96	200.00	-78.04	Peak	221	19	P
7	11490.00	17.72	29.18	46.90	54.00	-7.10	Average	100	163	P
8	11490.00	17.72	41.65	59.37	74.00	-14.63	Peak	100	163	P
9	17235.00	23.71	42.69	66.40	68.20	-1.80	Peak	100	85	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, 11a CH149		:

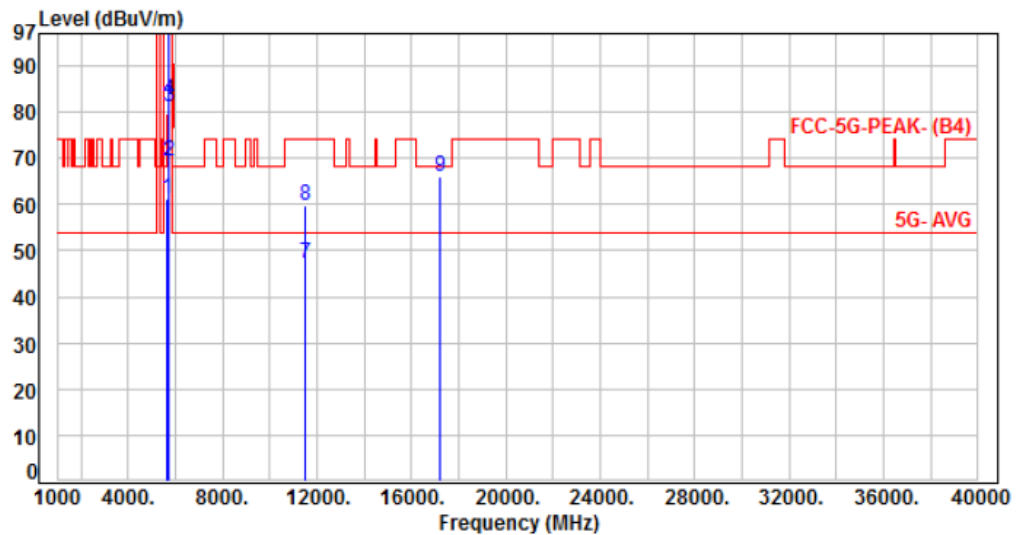


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.03	61.38	68.20	-6.82	Peak	149	351	P
2	5700.00	7.37	61.90	69.27	105.20	-35.93	Peak	149	351	P
3	5720.00	7.34	73.65	80.99	110.80	-29.81	Peak	149	351	P
4	5725.00	7.33	75.23	82.56	122.20	-39.64	Peak	149	351	P
5	5745.00	7.30	103.02	110.32	200.00	-89.68	Average	149	351	P
6	5745.00	7.30	113.02	120.32	200.00	-79.68	Peak	149	351	P
7	11490.00	17.72	29.58	47.30	54.00	-6.70	Average	100	50	P
8	11490.00	17.72	41.87	59.59	74.00	-14.41	Peak	100	50	P
9	17235.00	23.71	42.29	66.00	68.20	-2.20	Peak	100	222	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 4, 11a CH157		:

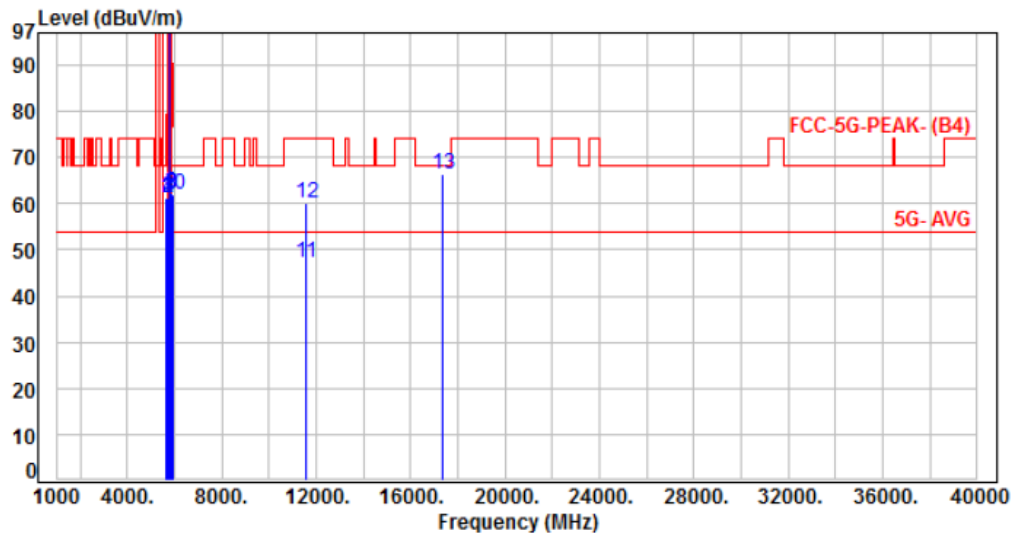

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.71	61.06	68.20	-7.14	Peak	229	21	P
2	5700.00	7.37	53.80	61.17	105.20	-44.03	Peak	229	21	P
3	5720.00	7.34	54.01	61.35	110.80	-49.45	Peak	229	21	P
4	5725.00	7.33	53.73	61.06	122.20	-61.14	Peak	229	21	P
5	5785.00	7.37	102.94	110.31	200.00	-89.69	Average	229	21	P
6	5785.00	7.37	113.47	120.84	200.00	-79.16	Peak	229	21	P
7	5850.00	7.43	54.55	61.98	122.20	-60.22	Peak	229	21	P
8	5855.00	7.45	54.40	61.85	110.80	-48.95	Peak	229	21	P
9	5875.00	7.54	54.67	62.21	105.20	-42.99	Peak	229	21	P
10	5925.00	7.66	54.19	61.85	68.20	-6.35	Peak	229	21	P
11	11570.00	17.92	29.34	47.26	54.00	-6.74	Average	100	162	P
12	11570.00	17.92	42.29	60.21	74.00	-13.79	Peak	100	162	P
13	17355.00	24.51	41.69	66.20	68.20	-2.00	Peak	100	82	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, 11a CH157		

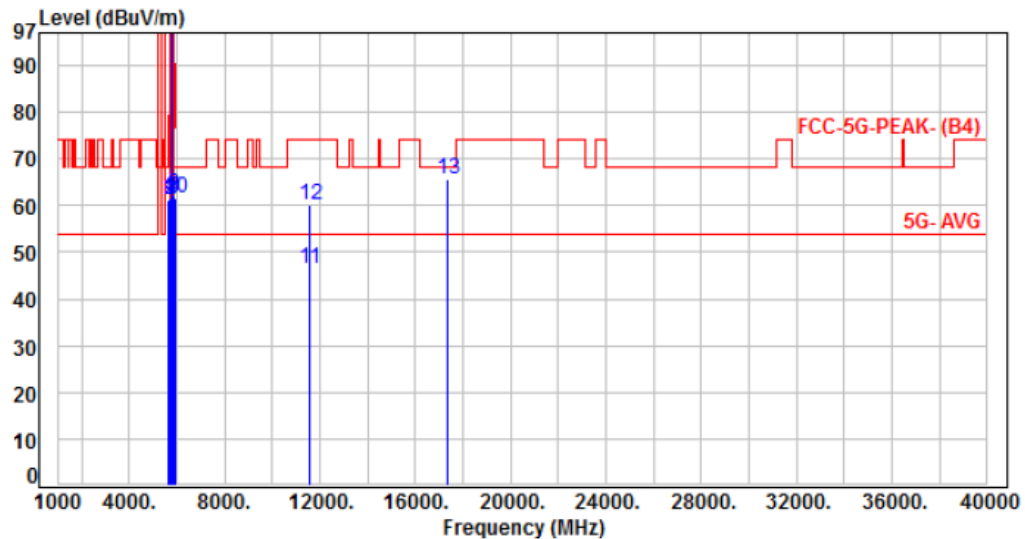

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.77	61.12	68.20	-7.08	Peak	141	356	P
2	5700.00	7.37	53.84	61.21	105.20	-43.99	Peak	141	356	P
3	5720.00	7.34	53.92	61.26	110.80	-49.54	Peak	141	356	P
4	5725.00	7.33	54.31	61.64	122.20	-60.56	Peak	141	356	P
5	5785.00	7.37	101.91	109.28	200.00	-90.72	Average	141	356	P
6	5785.00	7.37	111.81	119.18	200.00	-80.82	Peak	141	356	P
7	5850.00	7.43	54.26	61.69	122.20	-60.51	Peak	141	356	P
8	5855.00	7.45	54.25	61.70	110.80	-49.10	Peak	141	356	P
9	5875.00	7.54	54.74	62.28	105.20	-42.92	Peak	141	356	P
10	5925.00	7.66	54.08	61.74	68.20	-6.46	Peak	141	356	P
11	11570.00	17.92	28.58	46.50	54.00	-7.50	Average	100	46	P
12	11570.00	17.92	42.36	60.28	74.00	-13.72	Peak	100	46	P
13	17355.00	24.51	41.28	65.79	68.20	-2.41	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 8, Band 4, 11a CH165		:	

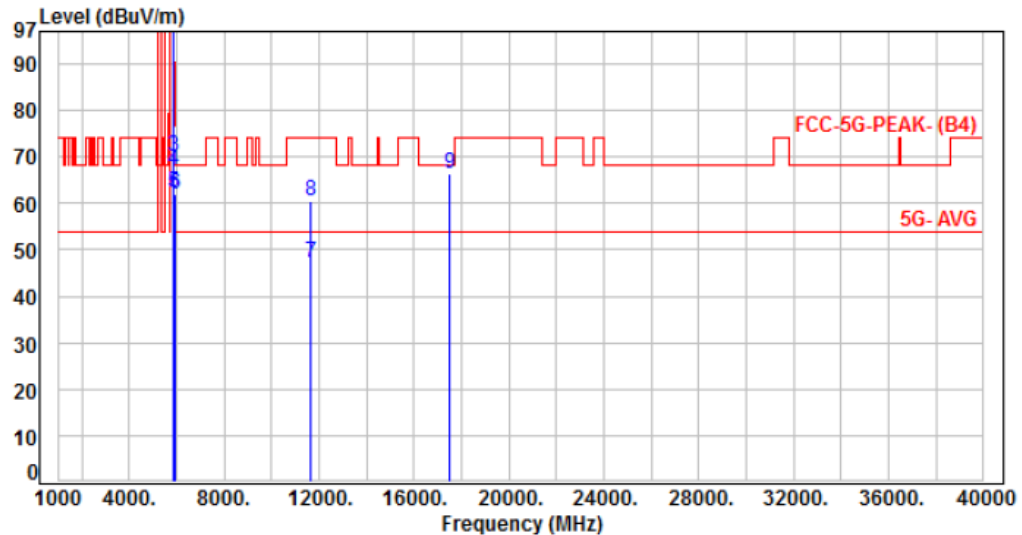

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	102.43	109.85	200.00	-90.15	Average	228	22	P
2	5825.00	7.42	112.20	119.62	200.00	-80.38	Peak	228	22	P
3	5850.00	7.43	62.63	70.06	122.20	-52.14	Peak	228	22	P
4	5855.00	7.45	59.75	67.20	110.80	-43.60	Peak	228	22	P
5	5875.00	7.54	54.71	62.25	105.20	-42.95	Peak	228	22	P
6	5925.00	7.66	54.17	61.83	68.20	-6.37	Peak	228	22	P
7	11650.00	18.08	29.08	47.16	54.00	-6.84	Average	100	170	P
8	11650.00	18.08	42.39	60.47	74.00	-13.53	Peak	100	170	P
9	17475.00	25.09	41.33	66.42	68.20	-1.78	Peak	100	84	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, 11a CH165		

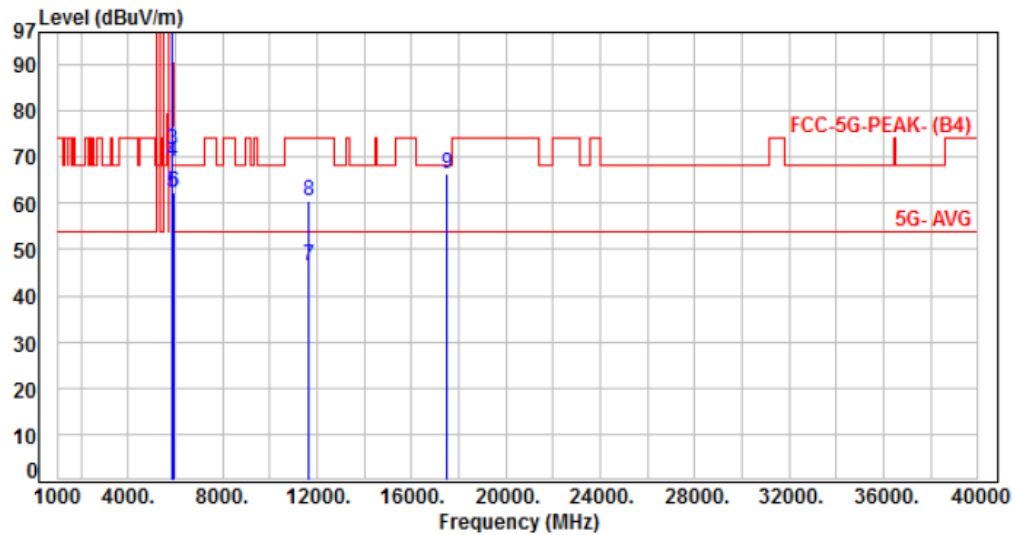


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	101.99	109.41	200.00	-90.59	Average	159	358	P
2	5825.00	7.42	112.24	119.66	200.00	-80.34	Peak	159	358	P
3	5850.00	7.43	64.24	71.67	122.20	-50.53	Peak	159	358	P
4	5855.00	7.45	61.52	68.97	110.80	-41.83	Peak	159	358	P
5	5875.00	7.54	54.96	62.50	105.20	-42.70	Peak	159	358	P
6	5925.00	7.66	54.60	62.26	68.20	-5.94	Peak	159	358	P
7	11650.00	18.08	28.30	46.38	54.00	-7.62	Average	100	51	P
8	11650.00	18.08	42.36	60.44	74.00	-13.56	Peak	100	51	P
9	17475.00	25.09	41.16	66.25	68.20	-1.95	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 1, 11ax HE20 CH36		:

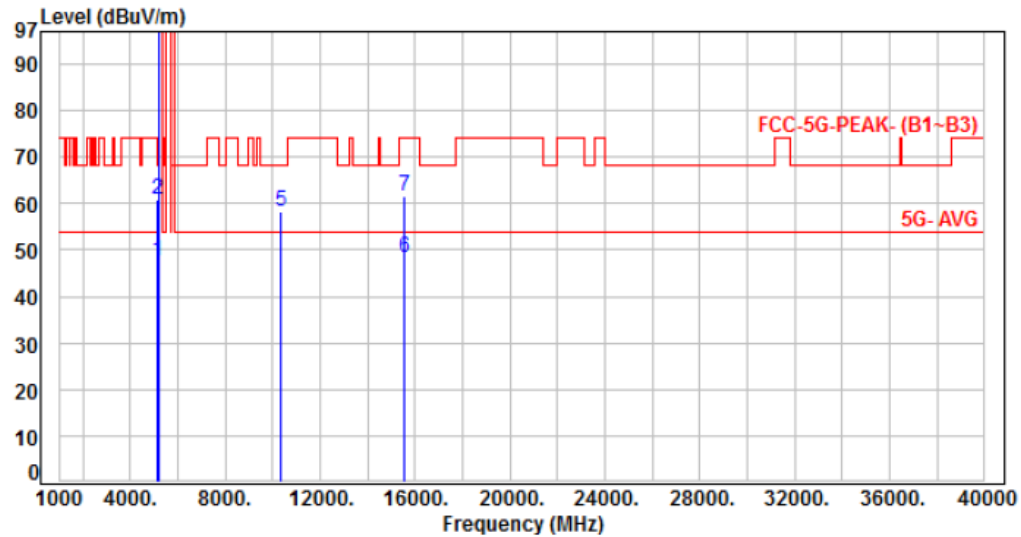

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.87	47.57	54.00	-6.43	Average	136	16	P
2	5150.00	6.70	54.24	60.94	74.00	-13.06	Peak	136	16	P
3	5180.00	6.85	97.39	104.24	200.00	-95.76	Average	136	16	P
4	5180.00	6.85	110.34	117.19	200.00	-82.81	Peak	136	16	P
5	10360.00	15.93	42.49	58.42	68.20	-9.78	Peak	100	165	P
6	15540.00	19.69	28.58	48.27	54.00	-5.73	Average	100	81	P
7	15540.00	19.69	41.75	61.44	74.00	-12.56	Peak	100	81	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 9, Band 1, 11ax HE20 CH36		:	

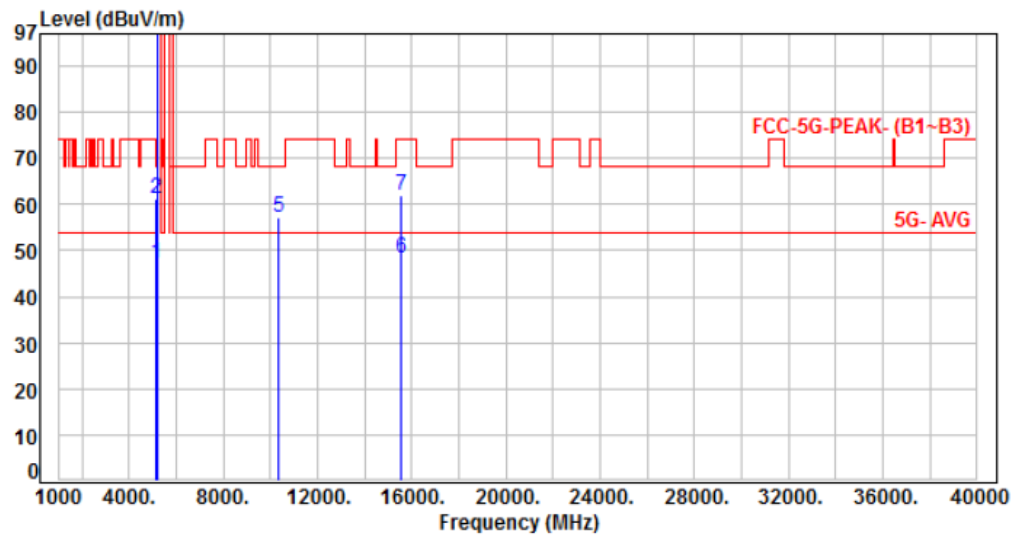

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.49	47.19	54.00	-6.81	Average	100	350	P
2	5150.00	6.70	54.52	61.22	74.00	-12.78	Peak	100	350	P
3	5180.00	6.85	94.99	101.84	200.00	-98.16	Average	100	350	P
4	5180.00	6.85	108.39	115.24	200.00	-84.76	Peak	100	350	P
5	10360.00	15.93	41.26	57.19	68.20	-11.01	Peak	100	44	P
6	15540.00	19.69	28.73	48.42	54.00	-5.58	Average	100	231	P
7	15540.00	19.69	42.17	61.86	74.00	-12.14	Peak	100	231	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 1, 11ax HE20 CH40		:

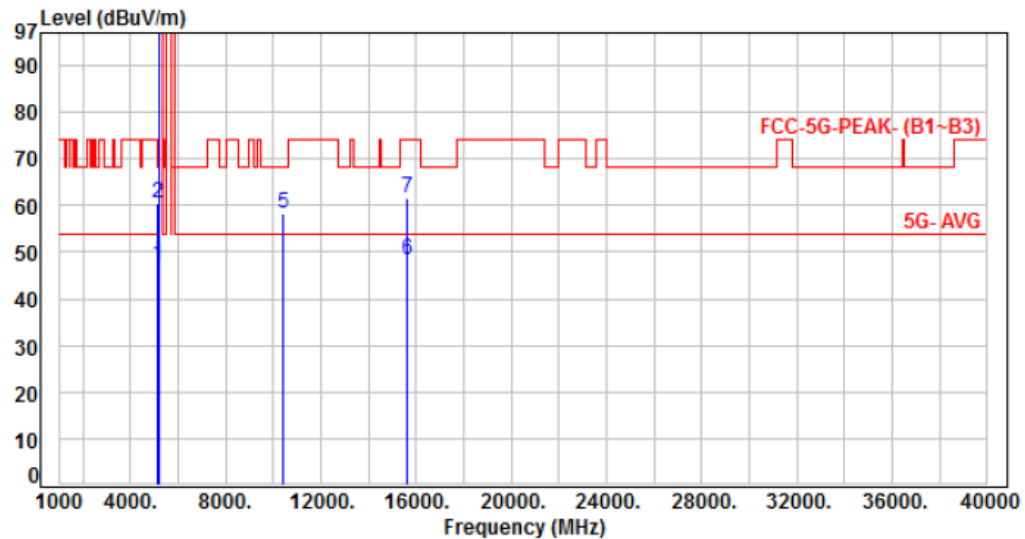

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.48	47.18	54.00	-6.82	Average	145	14	P
2	5150.00	6.70	53.65	60.35	74.00	-13.65	Peak	145	14	P
3	5200.00	6.95	97.09	104.04	200.00	-95.96	Average	145	14	P
4	5200.00	6.95	110.61	117.56	200.00	-82.44	Peak	145	14	P
5	10400.00	15.84	42.49	58.33	68.20	-9.87	Peak	100	168	P
6	15600.00	19.64	28.85	48.49	54.00	-5.51	Average	100	82	P
7	15600.00	19.64	42.07	61.71	74.00	-12.29	Peak	100	82	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 9, Band 1, 11ax HE20 CH40		:	

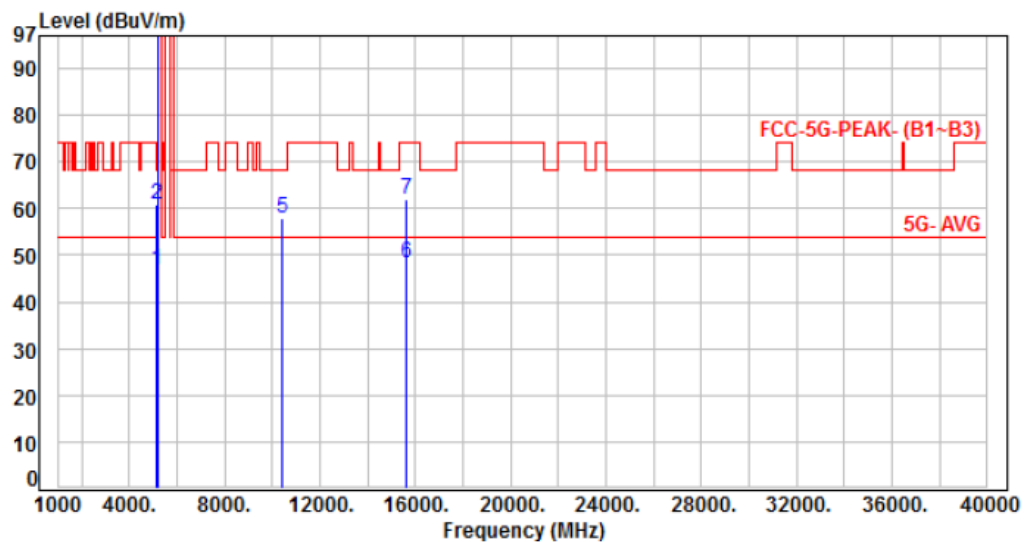

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.24	46.94	54.00	-7.06	Average	100	354	P
2	5150.00	6.70	54.20	60.90	74.00	-13.10	Peak	100	354	P
3	5200.00	6.95	95.54	102.49	200.00	-97.51	Average	100	354	P
4	5200.00	6.95	109.44	116.39	200.00	-83.61	Peak	100	354	P
5	10400.00	15.84	41.93	57.77	68.20	-10.43	Peak	100	49	P
6	15600.00	19.64	28.86	48.50	54.00	-5.50	Average	100	232	P
7	15600.00	19.64	42.38	62.02	74.00	-11.98	Peak	100	232	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 1, 11ax HE20 CH48		:

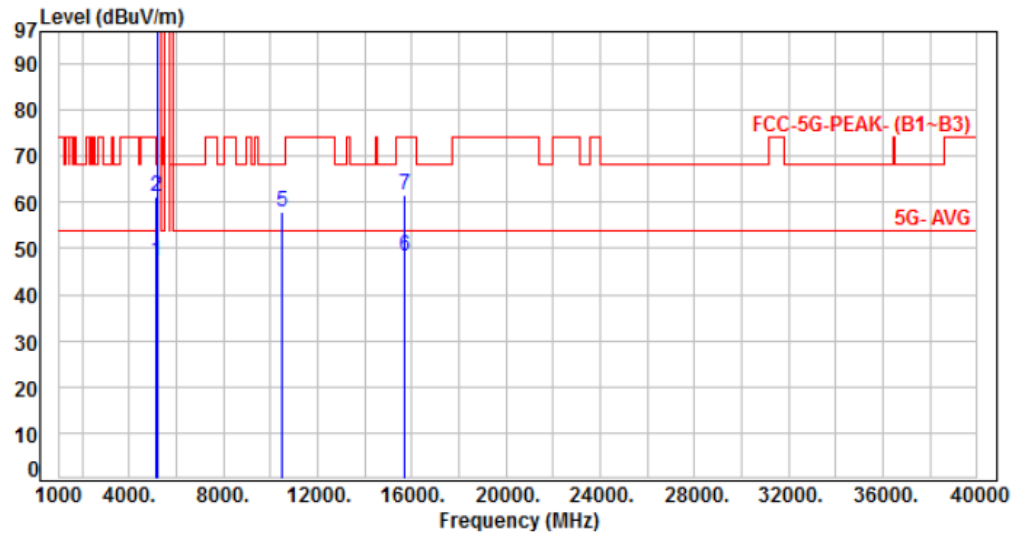

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.33	47.03	54.00	-6.97	Average	159	15	P
2	5150.00	6.70	54.36	61.06	74.00	-12.94	Peak	159	15	P
3	5240.00	7.00	97.01	104.01	200.00	-95.99	Average	159	15	P
4	5240.00	7.00	110.20	117.20	200.00	-82.80	Peak	159	15	P
5	10480.00	15.97	41.89	57.86	68.20	-10.34	Peak	100	160	P
6	15720.00	19.25	29.21	48.46	54.00	-5.54	Average	100	90	P
7	15720.00	19.25	42.33	61.58	74.00	-12.42	Peak	100	90	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 9, Band 1, 11ax HE20 CH48		:	

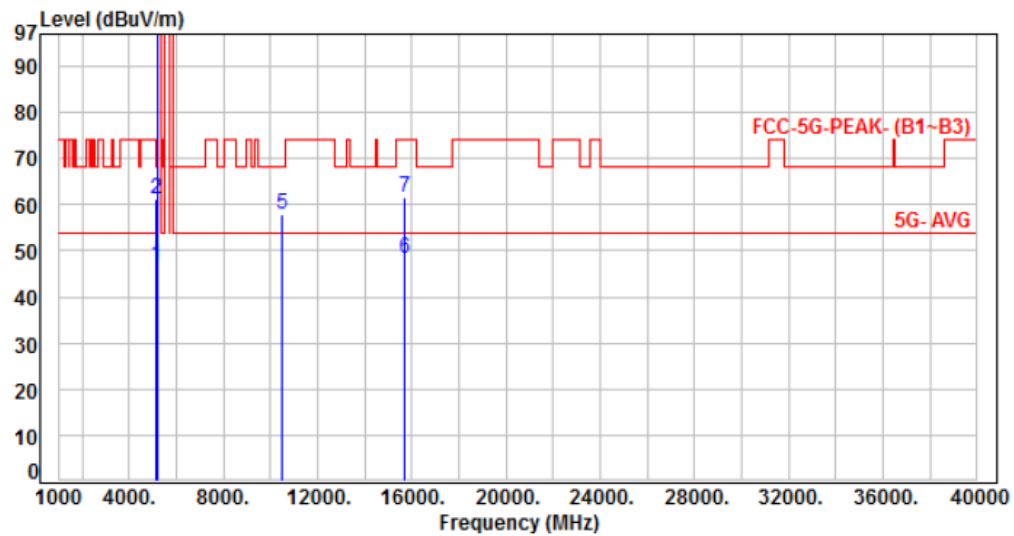

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.21	46.91	54.00	-7.09	Average	100	353	P
2	5150.00	6.70	54.56	61.26	74.00	-12.74	Peak	100	353	P
3	5240.00	7.00	95.74	102.74	200.00	-97.26	Average	100	353	P
4	5240.00	7.00	109.94	116.94	200.00	-83.06	Peak	100	353	P
5	10480.00	15.97	41.86	57.83	68.20	-10.37	Peak	100	50	P
6	15720.00	19.25	29.17	48.42	54.00	-5.58	Average	100	218	P
7	15720.00	19.25	42.42	61.67	74.00	-12.33	Peak	100	218	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 4, 11ax HE20 CH149		:

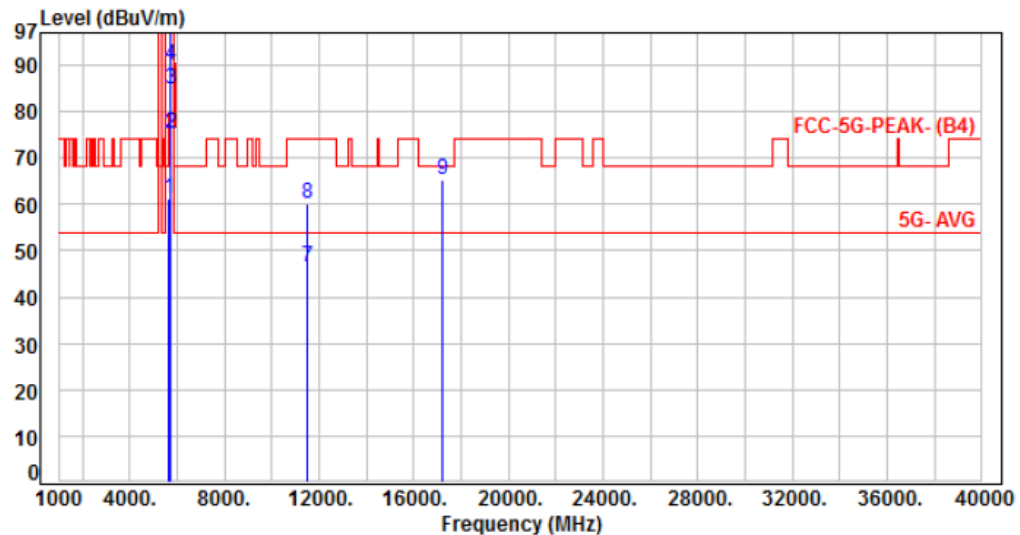

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.99	61.34	68.20	-6.86	Peak	287	21	P
2	5700.00	7.37	68.02	75.39	105.20	-29.81	Peak	287	21	P
3	5720.00	7.34	77.59	84.93	110.80	-25.87	Peak	287	21	P
4	5725.00	7.33	82.73	90.06	122.20	-32.14	Peak	287	21	P
5	5745.00	7.30	103.26	110.56	200.00	-89.44	Average	287	21	P
6	5745.00	7.30	116.83	124.13	200.00	-75.87	Peak	287	21	P
7	11490.00	17.72	28.84	46.56	54.00	-7.44	Average	100	161	P
8	11490.00	17.72	42.52	60.24	74.00	-13.76	Peak	100	161	P
9	17235.00	23.71	41.41	65.12	68.20	-3.08	Peak	100	91	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 9, Band 4, 11ax HE20 CH149		:	

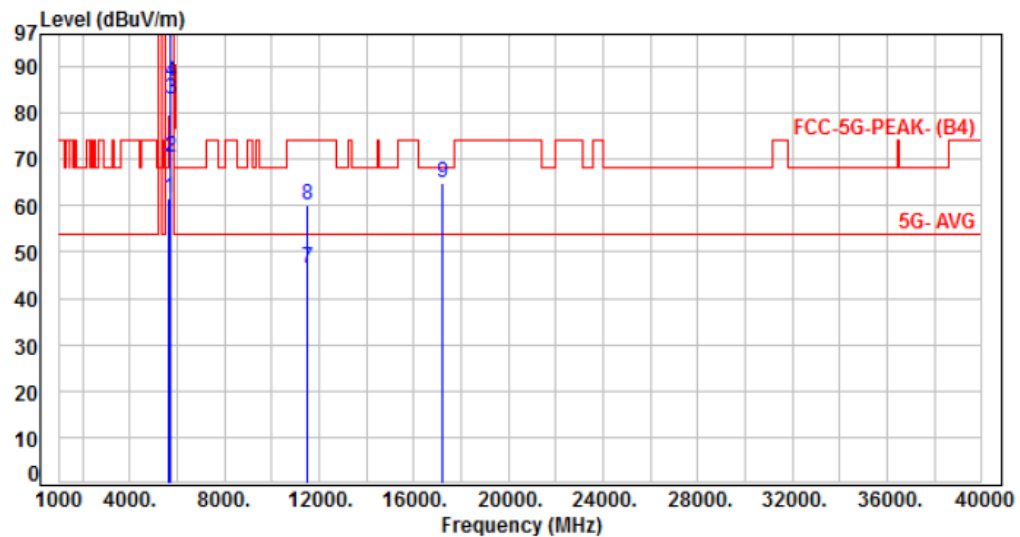

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.36	61.71	68.20	-6.49	Peak	153	355	P
2	5700.00	7.37	63.03	70.40	105.20	-34.80	Peak	153	355	P
3	5720.00	7.34	75.69	83.03	110.80	-27.77	Peak	153	355	P
4	5725.00	7.33	79.51	86.84	122.20	-35.36	Peak	153	355	P
5	5745.00	7.30	102.01	109.31	200.00	-90.69	Average	153	355	P
6	5745.00	7.30	115.90	123.20	200.00	-76.80	Peak	153	355	P
7	11490.00	17.72	28.69	46.41	54.00	-7.59	Average	100	52	P
8	11490.00	17.72	42.55	60.27	74.00	-13.73	Peak	100	52	P
9	17235.00	23.71	41.17	64.88	68.20	-3.32	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 9, Band 4, 11ax HE20 CH157		:	

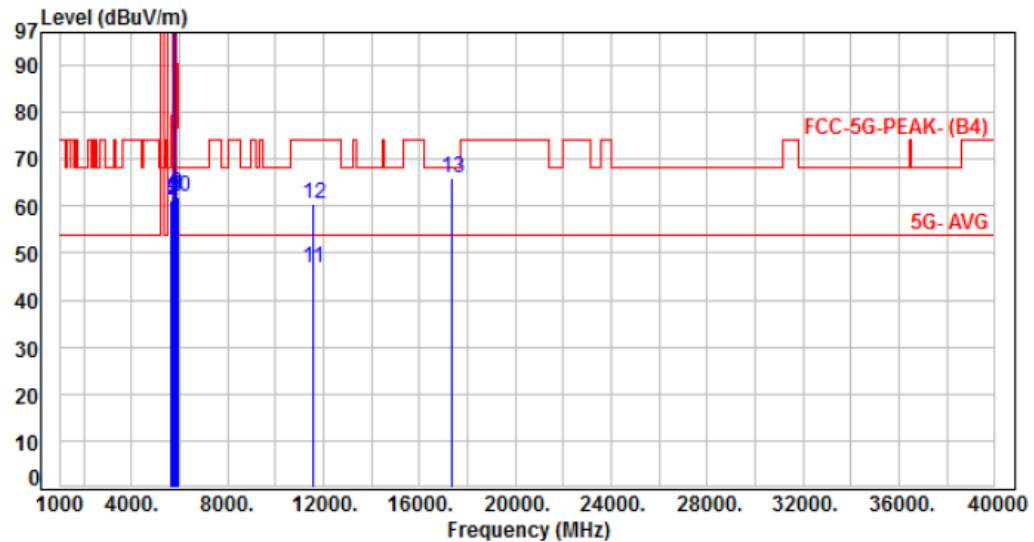

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.76	61.11	68.20	-7.09	Peak	219	20	P
2	5700.00	7.37	53.77	61.14	105.20	-44.06	Peak	219	20	P
3	5720.00	7.34	54.37	61.71	110.80	-49.09	Peak	219	20	P
4	5725.00	7.33	54.62	61.95	122.20	-60.25	Peak	219	20	P
5	5785.00	7.37	103.53	110.90	200.00	-89.10	Average	219	20	P
6	5785.00	7.37	116.69	124.06	200.00	-75.94	Peak	219	20	P
7	5850.00	7.43	54.60	62.03	122.20	-60.17	Peak	219	20	P
8	5855.00	7.45	54.64	62.09	110.80	-48.71	Peak	219	20	P
9	5875.00	7.54	55.26	62.80	105.20	-42.40	Peak	219	20	P
10	5925.00	7.66	54.34	62.00	68.20	-6.20	Peak	219	20	P
11	11570.00	17.92	28.84	46.76	54.00	-7.24	Average	100	162	P
12	11570.00	17.92	42.55	60.47	74.00	-13.53	Peak	100	162	P
13	17355.00	24.51	41.65	66.16	68.20	-2.04	Peak	100	80	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 9, Band 4, 11ax HE20 CH157		:	

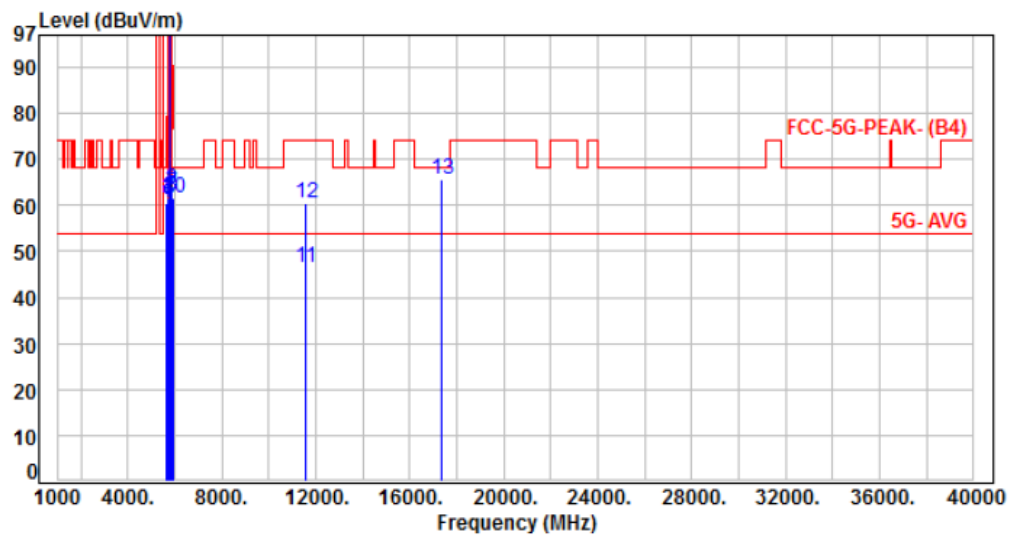

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.13	60.48	68.20	-7.72	Peak	163	357	P
2	5700.00	7.37	54.17	61.54	105.20	-43.66	Peak	163	357	P
3	5720.00	7.34	53.96	61.30	110.80	-49.50	Peak	163	357	P
4	5725.00	7.33	54.36	61.69	122.20	-60.51	Peak	163	357	P
5	5785.00	7.37	101.44	108.81	200.00	-91.19	Average	163	357	P
6	5785.00	7.37	115.48	122.85	200.00	-77.15	Peak	163	357	P
7	5850.00	7.43	55.14	62.57	122.20	-59.63	Peak	163	357	P
8	5855.00	7.45	54.52	61.97	110.80	-48.83	Peak	163	357	P
9	5875.00	7.54	55.77	63.31	105.20	-41.89	Peak	163	357	P
10	5925.00	7.66	53.88	61.54	68.20	-6.66	Peak	163	357	P
11	11570.00	17.92	28.72	46.64	54.00	-7.36	Average	100	55	P
12	11570.00	17.92	42.39	60.31	74.00	-13.69	Peak	100	55	P
13	17355.00	24.51	41.20	65.71	68.20	-2.49	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 9, Band 4, 11ax HE20 CH165		:	

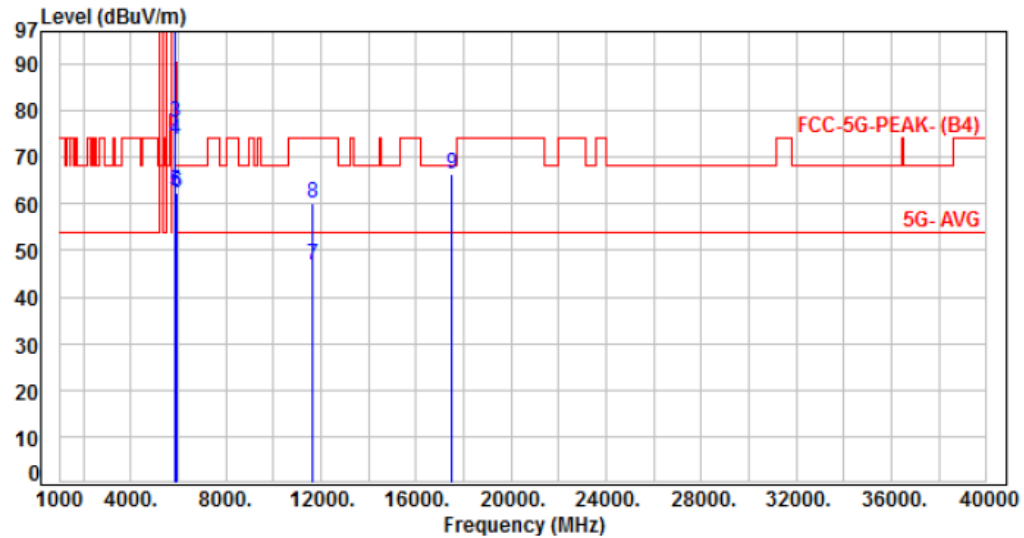

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	102.31	109.73	200.00	-90.27	Average	100	21	P
2	5825.00	7.42	115.68	123.10	200.00	-76.90	Peak	100	21	P
3	5850.00	7.43	69.92	77.35	122.20	-44.85	Peak	100	21	P
4	5855.00	7.45	66.18	73.63	110.80	-37.17	Peak	100	21	P
5	5875.00	7.54	55.31	62.85	105.20	-42.35	Peak	100	21	P
6	5925.00	7.66	54.49	62.15	68.20	-6.05	Peak	100	21	P
7	11650.00	18.08	28.61	46.69	54.00	-7.31	Average	100	161	P
8	11650.00	18.08	42.18	60.26	74.00	-13.74	Peak	100	161	P
9	17475.00	25.09	41.36	66.45	68.20	-1.75	Peak	100	84	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 4, 11ax HE20 CH165		:

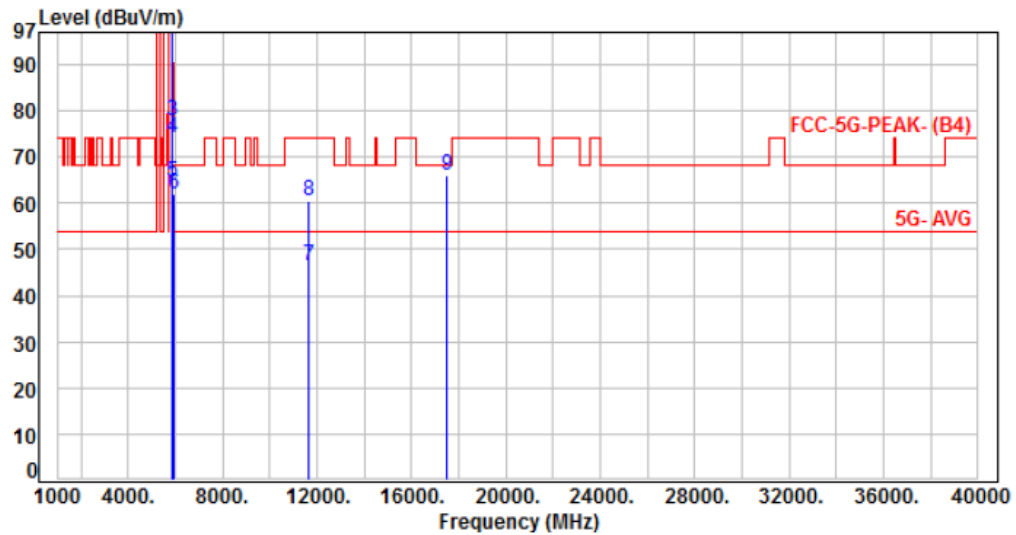


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	101.89	109.31	200.00	-90.69	Average	149	354	P
2	5825.00	7.42	114.98	122.40	200.00	-77.60	Peak	149	354	P
3	5850.00	7.43	70.22	77.65	122.20	-44.55	Peak	149	354	P
4	5855.00	7.45	66.58	74.03	110.80	-36.77	Peak	149	354	P
5	5875.00	7.54	57.06	64.60	105.20	-40.60	Peak	149	354	P
6	5925.00	7.66	54.30	61.96	68.20	-6.24	Peak	149	354	P
7	11650.00	18.08	28.55	46.63	54.00	-7.37	Average	100	50	P
8	11650.00	18.08	42.24	60.32	74.00	-13.68	Peak	100	50	P
9	17475.00	25.09	41.09	66.18	68.20	-2.02	Peak	100	222	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 10, Band 1, 11ax HE40 CH38		:	

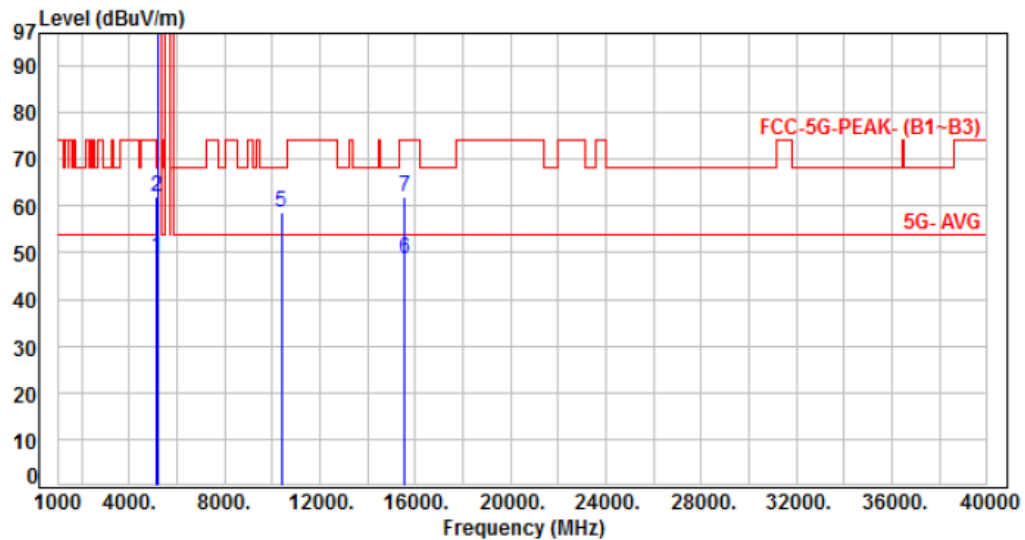

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	42.32	49.02	54.00	-4.98	Average	144	13	P
2	5150.00	6.70	55.38	62.08	74.00	-11.92	Peak	144	13	P
3	5190.00	6.90	94.05	100.95	200.00	-99.05	Average	144	13	P
4	5190.00	6.90	106.61	113.51	200.00	-86.49	Peak	144	13	P
5	10380.00	15.89	42.66	58.55	68.20	-9.65	Peak	10	155	P
6	15570.00	19.65	29.13	48.78	54.00	-5.22	Average	10	91	P
7	15570.00	19.65	42.28	61.93	74.00	-12.07	Peak	10	91	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 10, Band 1, 11ax HE40 CH38		:	

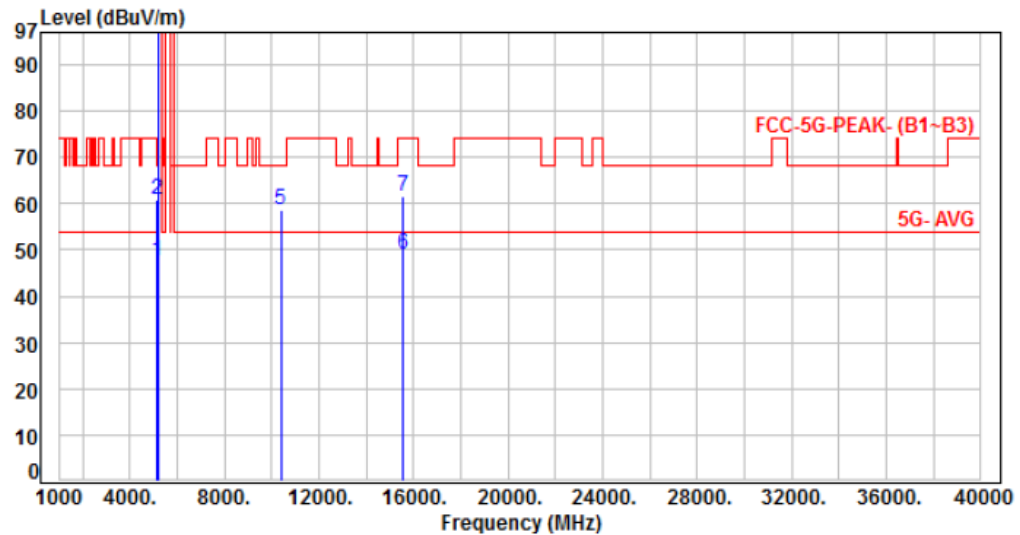

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.98	47.68	54.00	-6.32	Average	100	355	P
2	5150.00	6.70	54.06	60.76	74.00	-13.24	Peak	100	355	P
3	5190.00	6.90	92.32	99.22	200.00	-100.78	Average	100	355	P
4	5190.00	6.90	104.49	111.39	200.00	-88.61	Peak	100	355	P
5	10380.00	15.89	42.74	58.63	68.20	-9.57	Peak	100	42	P
6	15570.00	19.65	29.27	48.92	54.00	-5.08	Average	100	230	P
7	15570.00	19.65	41.81	61.46	74.00	-12.54	Peak	100	230	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 10, Band 1, 11ax HE40 CH46		:	

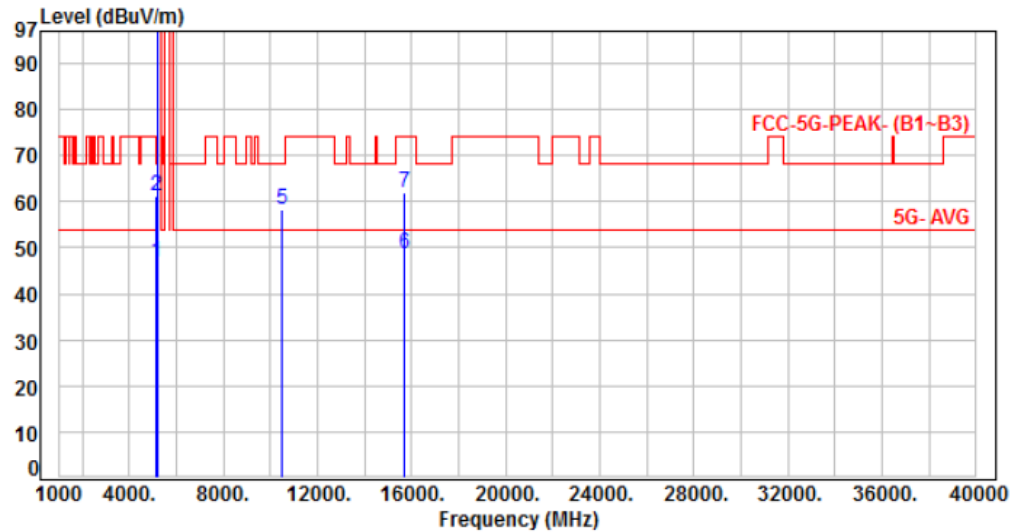

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.31	47.01	54.00	-6.99	Average	186	320	P
2	5150.00	6.70	54.37	61.07	74.00	-12.93	Peak	186	320	P
3	5230.00	6.99	94.86	101.85	200.00	-98.15	Average	186	320	P
4	5230.00	6.99	108.87	115.86	200.00	-84.14	Peak	186	320	P
5	10460.00	15.86	42.39	58.25	68.20	-9.95	Peak	100	162	P
6	15690.00	19.44	29.26	48.70	54.00	-5.30	Average	100	85	P
7	15690.00	19.44	42.57	62.01	74.00	-11.99	Peak	100	85	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 1, 11ax HE40 CH46		

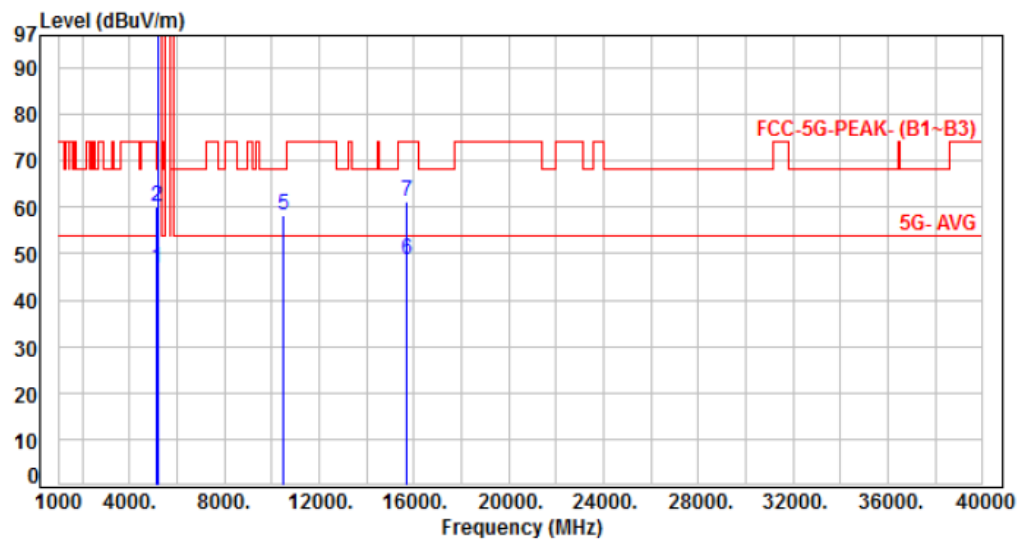


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.28	46.98	54.00	-7.02	Average	111	354	P
2	5150.00	6.70	53.39	60.09	74.00	-13.91	Peak	111	354	P
3	5230.00	6.99	92.96	99.95	200.00	-100.05	Average	111	354	P
4	5230.00	6.99	105.67	112.66	200.00	-87.34	Peak	111	354	P
5	10460.00	15.86	42.35	58.21	68.20	-9.99	Peak	100	47	P
6	15690.00	19.44	29.15	48.59	54.00	-5.41	Average	100	228	P
7	15690.00	19.44	41.81	61.25	74.00	-12.75	Peak	100	228	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Power	:	AC 120V / 60Hz from PoE	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 10, Band 4, 11ax HE40 CH151		:	

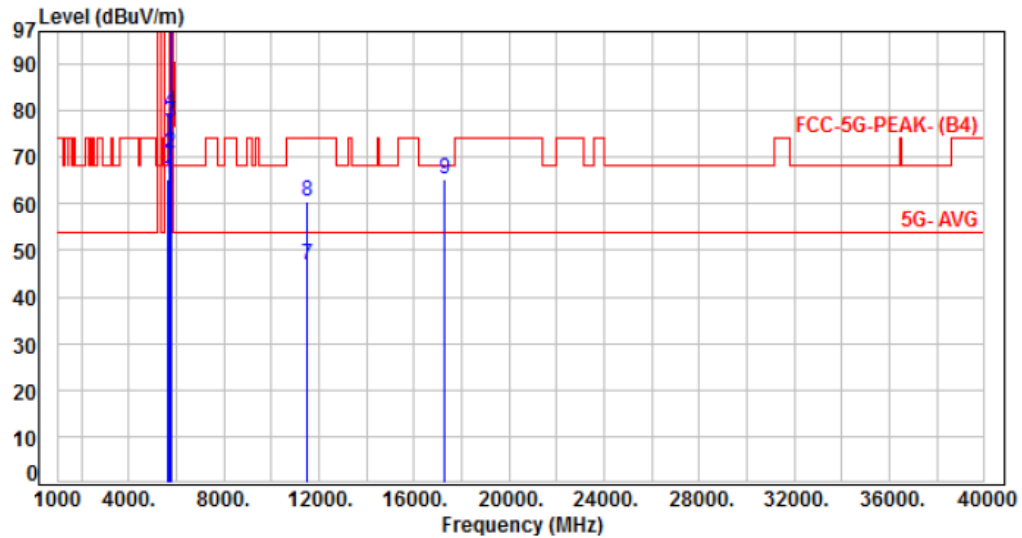


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	58.04	65.39	68.20	-2.81	Peak	245	19	P
2	5700.00	7.37	63.41	70.78	105.20	-34.42	Peak	245	19	P
3	5720.00	7.34	70.05	77.39	110.80	-33.41	Peak	245	19	P
4	5725.00	7.33	72.40	79.73	122.20	-42.47	Peak	245	19	P
5	5755.00	7.30	98.55	105.85	200.00	-94.15	Average	245	19	P
6	5755.00	7.30	111.77	119.07	200.00	-80.93	Peak	245	19	P
7	11510.00	17.79	28.96	46.75	54.00	-7.25	Average	100	168	P
8	11510.00	17.79	42.63	60.42	74.00	-13.58	Peak	100	168	P
9	17265.00	23.86	41.41	65.27	68.20	-2.93	Peak	100	83	P

Note: $Level = Reading + Factor$

$$\text{Margin} = \text{Level} - \text{Limit}$$
$$\text{Factor} = \text{Antenna Factor} + \text{cable loss} - \text{Amplifier Factor}$$



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 4, 11ax HE40 CH151		

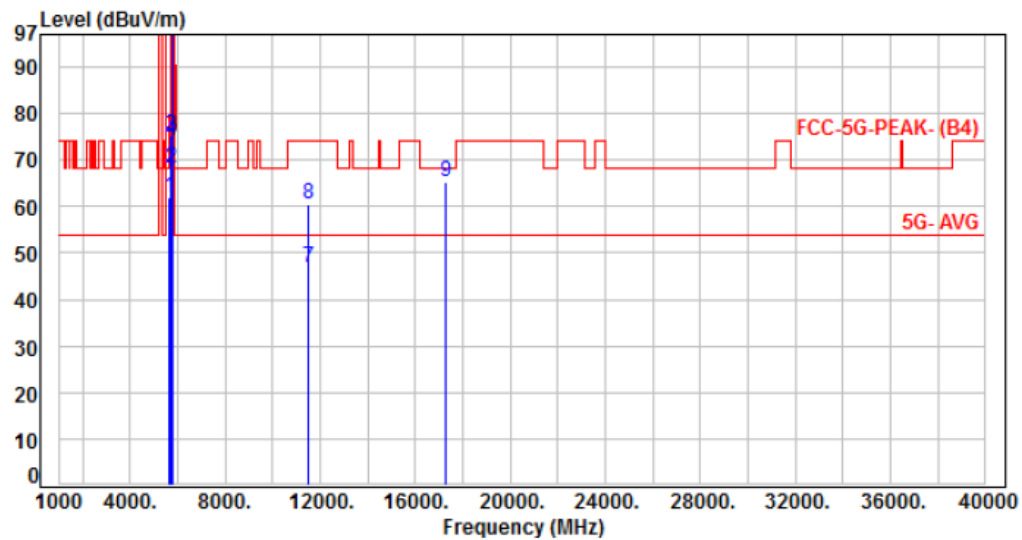

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.54	61.89	68.20	-6.31	Peak	129	357	P
2	5700.00	7.37	60.75	68.12	105.20	-37.08	Peak	129	357	P
3	5720.00	7.34	67.73	75.07	110.80	-35.73	Peak	129	357	P
4	5725.00	7.33	66.88	74.21	122.20	-47.99	Peak	129	357	P
5	5755.00	7.30	97.11	104.41	200.00	-95.59	Average	129	357	P
6	5755.00	7.30	109.86	117.16	200.00	-82.84	Peak	129	357	P
7	11510.00	17.79	28.95	46.74	54.00	-7.26	Average	100	41	P
8	11510.00	17.79	42.57	60.36	74.00	-13.64	Peak	100	41	P
9	17265.00	23.86	41.29	65.15	68.20	-3.05	Peak	100	218	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor