Partial FCC Test Report

(PART 24)

Report No.:	RFBHTZ-WTW-P22080640-2
FCC ID:	PPQ202008EG91NAXD
Test Model:	EG91NAXD
Received Date:	Aug. 18, 2022
Test Date:	Dec. 14 ~ Dec. 15, 2022
Issued Date:	Jan. 13, 2023
Applicant:	LITE-ON Technology Corp.
Address:	Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City 23585, Taiwan (R.O.C.)
Issued By:	Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Lin Kou Laboratories
Lab Address:	No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location:	No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan
FCC Registration / Designation Number:	788550 / TW0003

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/ and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record 3

1 Certificate of Conformity 4

2 Summary of Test Results 5

2.1 Measurement Uncertainty 5
2.2 Test Site and Instruments 6

3 General Information 7

3.1 General Description of EUT 7
3.2 Configuration of System under Test 9
3.2.1 Description of Support Units 9
3.3 Test Mode Applicability and Tested Channel Detail 10
3.4 EUT Operating Conditions 11
3.5 General Description of Applied Standards and references 11

4 Test Types and Results 12

4.1 Output Power Measurement 12
4.1.1 Limits of Output Power Measurement 12
4.1.2 Test Procedures 12
4.1.3 Test Setup 13
4.1.4 Test Results 14
4.2 Radiated Emission Measurement 27
4.2.1 Limits of Radiated Emission Measurement 27
4.2.2 Test Procedure 27
4.2.3 Deviation from Test Standard 27
4.2.4 Test Setup 28
4.2.5 Test Results 29

5 Pictures of Test Arrangements 47

Appendix – Information of the Testing Laboratories 48

Release Control Record

Issue No.	Description	Date Issued
RFBHTZ-WTW-P22080640-2	Original Release	Jan. 13, 2023

1 Certificate of Conformity

Product:	EG91NAXD
Brand:	LITEON
Test Model:	EG91NAXD
Sample Status:	Engineering Sample
Applicant:	LITE-ON Technology Corp.
Test Date:	Dec. 14 ~ Dec. 15, 2022
Standards:	FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , **Date:** Jan. 13, 2023

Lena Wang / Specialist

Approved by : Jeremy Lin , **Date:** Jan. 13, 2023

Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	**Test Item**	**Result**	**Remarks**
2.1046 24.232	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
24.232(d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
24.238	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.91 dB at 3825.00 MHz.

Note:

1. This report is a partial report, only test item of Effective Isotropic Radiated Power & Radiated Emissions were performed for this report. Other testing data please refer to TA Technology (Shanghai) Co., Ltd. report no.: R2006A0379-R2 and R2006A0379-R6.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 200 MHz	2.95 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower &Turn Max-Full	MFA-440H	AT93021705	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Turn Table Controller Max-Full	MG-7802	NA	NA	NA
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Signal Analyzer Agilent	N9010A	MY52220207	Jan. 06, 2022	Jan. 05, 2023
Pre-amplifier EMCI	EMC001340	980201	Sep. 23, 2022	Sep. 22, 2023
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 15, 2022	Jan. 14, 2023
Pre-Ammlifier EMCI	EMC 330H	980112	Oct. 01, 2022	Sep. 30, 2023
Bi_Log Antenna Schwarzbeck	VULB9168	9168-472	Oct. 21, 2022	Oct. 20, 2023
RF Coaxial Cable WORKEN	8D-FB	Cable-Ch10-01	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	Nov. 13, 2022	Nov. 12, 2023
Pre-Amplifier EMCI	EMC 012645	980115	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable EMCI	EMC104-SM-SM- 8000+3000	171005	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable HUBER SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 01, 2022	Sep. 30, 2023
RF FLITER MICRO-TRONICS	BRM50716	060	Jan. 10, 2022	Jan. 09, 2023
RF FLITER MICRO-TRONICS	BRM17690	004	Jan. 10, 2022	Jan. 09, 2023
Boresight antenna tower fixture BV	BAF-02	7	NA	NA
Pre-Ammlifier EMCI	EMC 184045	980116	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9170	148	Nov. 13, 2022	Nov. 12, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 09, 2022	Jul. 08, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM- 3000	150929	Jul. 09, 2022	Jul. 08, 2023
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 25, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HY - 966 chamber 5.

3 General Information

3.1 General Description of EUT

Product	EG91NAXD		
Brand	LITEON		
Test Model	EG91NAXD		
Status of EUT	Engineering Sample		
Power Supply Rating	208- 240Vac		
Modulation Type	WCDMA	QPSK	
	LTE	QPSK, 16QAM	
Frequency Range	WCDMA	1852.4 ~ 1907.6 MHz	
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz	
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz	
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz	
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz	
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz	
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz	
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz	
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz	
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz	
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz	
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz	
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz	
Max. EIRP Power	WCDMA	145.881 mW (21.64dBm)	
		QPSK	16QAM
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	387.258 mW (25.88dBm)	353.183 mW (25.48dBm)
	LTE Band 2 (Channel Bandwidth: 3 MHz)	385.478 mW (25.86dBm)	342.768 mW (25.35dBm)
	LTE Band 2 (Channel Bandwidth: 5 MHz)	376.704 mW (25.76dBm)	336.512 mW (25.27dBm)
	LTE Band 2 (Channel Bandwidth: 10 MHz)	362.243 mW (25.59dBm)	338.065 mW (25.29dBm)
	LTE Band 2 (Channel Bandwidth: 15 MHz)	376.704 mW (25.76dBm)	329.610 mW (25.18dBm)
	LTE Band 2 (Channel Bandwidth: 20 MHz)	399.025 mW (26.01dBm)	301.301 mW (24.79dBm)
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	307.610 mW (24.88dBm)	226.986 mW (23.56dBm)
	LTE Band 25 (Channel Bandwidth: 3 MHz)	316.228 mW (25.00dBm)	228.560 mW (23.59dBm)
	LTE Band 25 (Channel Bandwidth: 5 MHz)	304.089 mW (24.83dBm)	223.357 mW (23.49dBm)
	LTE Band 25 (Channel Bandwidth: 10 MHz)	316.228 mW (25.00dBm)	269.153 mW (24.30dBm)

	LTE Band 25 (Channel Bandwidth: 15 MHz)	319.154 mW (25.04dBm)	294.442 mW (24.69dBm)
	LTE Band 25 (Channel Bandwidth: 20 MHz)	346.737 mW (25.40dBm)	257.632 mW (24.11dBm)
Antenna Type	Monopole Coupling with 3.8 dBi gain		
Accessory Device	N/A		
Data Cable Supplied	N/A		

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to TA Technology (Shanghai) Co., Ltd. report no.: R2006A0379-R2 and R2006A0379-R6. The difference compared with original report are adding end-product and antenna (Brand: Auden / Model: D32788-30). Therefore, only test item of Effective Isotropic Radiated Power & Radiated Emissions were performed for this report. Other testing data please refer to original report.
2. The EUT is authorized for use in specific End-product. Please refer to below for more details. The model of 'EX-1193-M' was chosen for final test.

Brand	Model	LTE	RFID	WIFI	Difference
LITEON	EX-1193-M EX-1193-M-48	FCC ID: PPQ202008EG91NAXD	FCC ID: PPQRYORR2L	FCC ID: PPQLILYW131	The rated current (80A/48A) and the model of the charger


3. The End-product contains following accessory devices.

Product	Brand	Model	Description
holster	Liteon	N/A	-

4. Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test & E.I.R.P. Test >

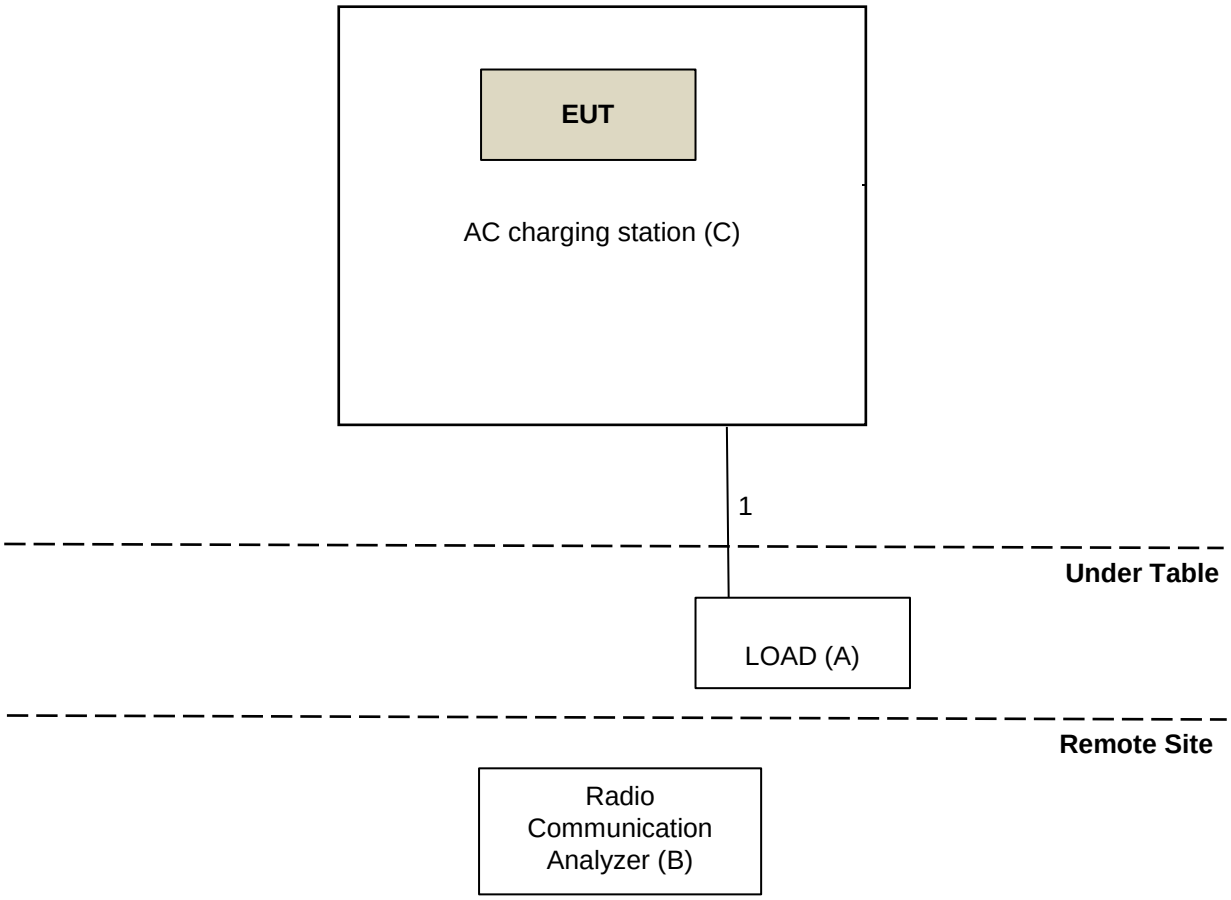

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	LOAD	NA	NA	NA	NA	Provided by Lab
B	Radio Communication Analyzer	Anritsu	MT8820C	6201300640	N/A	Provided by Lab
C	AC charging station	LITEON	EX-1193-M,	NA	NA	Provided by Client

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	**Remarks**
1.	RJ-45 Cable	2	1.8	N	0	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

2. Items B acted as communication partners to transfer data.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.
The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	Z-Axis	Z-Axis
LTE Band 2	Z-Axis	Z-Axis
LTE Band 25	Z-Axis	Z-Axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	22 deg. C, 67 % RH	120 Vac, 60 Hz	Vincent Chen
Radiated Emission	22 deg. C, 68 % RH	120 Vac, 60 Hz	Thomas Cheng

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:
FCC 47 CFR Part 2
FCC 47 CFR Part 24
ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

References Test Guidance:
KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-E 2016

NOTE: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.


4.1.2 Test Procedures

EIRP / ERP Measurement:


a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
d. Following C63.26 section 5.5 and 5.2.7
   - EIRP (dBm) = E (dBμV/m) + 20log(D) - 104.8; where D is the measurement distance (in the far field region) in m.
   - ERP (dBm) = E (dBμV/m) + 20log(D) - 104.8 - 2.15; where D is the measurement distance (in the far field region) in m.

4.1.3 Test Setup

EIRP / ERP Measurement:
<Radiated Emission below or equal 1 GHz>

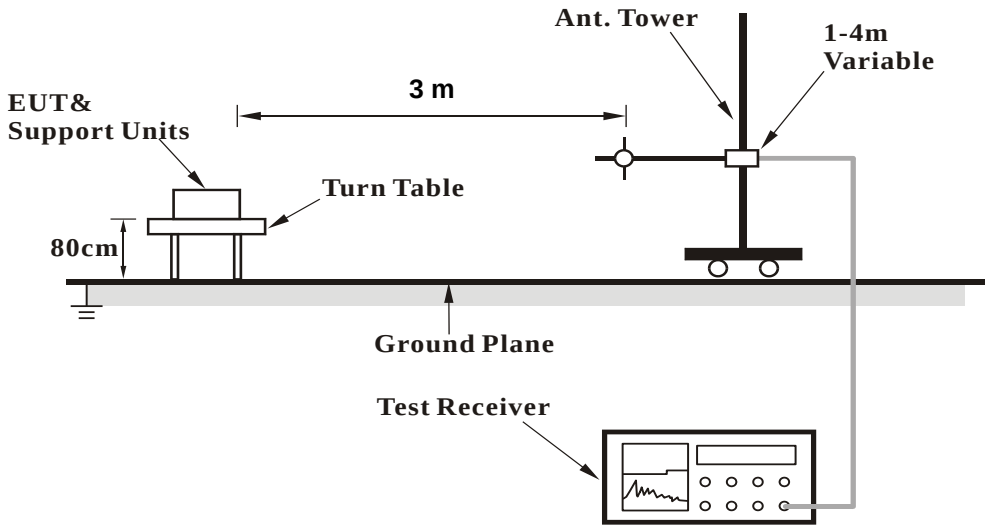

<Radiated Emission above 1 GHz>

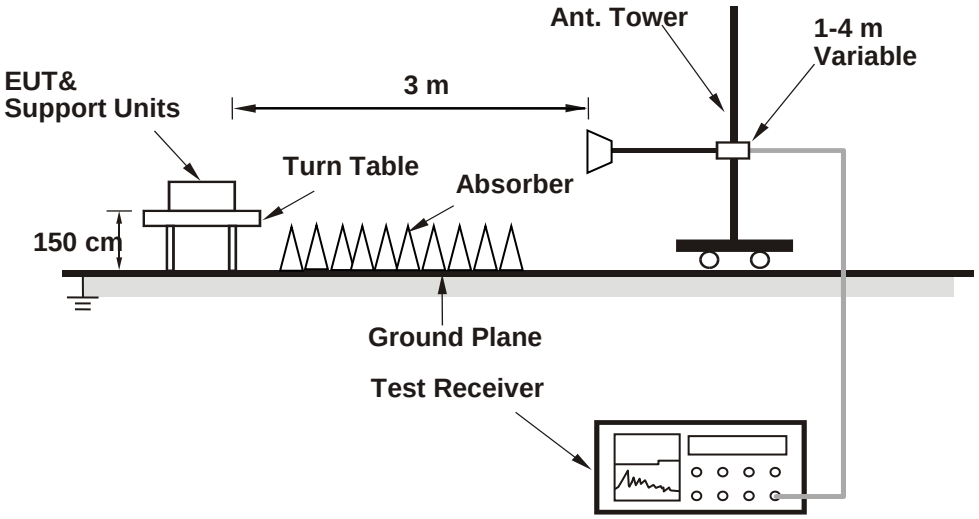

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

EIRP Power (dBm)

WCDMA Band 2

Mode	TX channel 9262, 9400, 9538							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.40	19.24	33.00	-13.76	1.18 H	321	84.10	-64.86
2	1880.00	19.67	33.00	-13.33	1.46 H	319	84.44	-64.77
3	1907.60	19.66	33.00	-13.34	1.05 H	320	84.32	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.40	21.19	33.30	-11.81	1.98 V	289	86.05	-64.86
2	1880.00	21.42	33.00	-11.58	2.13 V	352	86.19	-64.77
3	1907.60	**21.64**	33.00	-11.36	2.25 V	337	86.30	-64.66

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

Modulation Type: QPSK

LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607, 18900, 19193							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	24.28	33.00	-8.72	1.02 H	321	89.14	-64.86
2	1880.00	24.65	33.00	-8.35	1.00 H	322	89.42	-64.77
3	1909.30	24.64	33.00	-8.36	1.10 H	325	89.29	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	25.61	33.00	-7.39	1.98 V	305	90.47	-64.86
2	1880.00	25.86	33.00	-7.14	2.05 V	334	90.63	-64.77
3	1909.30	**25.88**	33.00	-7.12	2.07 V	326	90.53	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 3MHz

Mode	TX channel 18615, 18900, 19185

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	21.27	33.00	-11.73	1.32 H	288	86.12	-64.85
2	1880.00	21.68	33.00	-11.32	1.42 H	318	86.45	-64.77
3	1908.50	21.57	33.00	-11.43	1.38 H	283	86.22	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	25.53	33.00	-7.47	1.96 V	325	90.38	-64.85
2	1880.00	**25.86**	33.00	-7.14	2.04 V	333	90.63	-64.77
3	1908.50	25.77	33.00	-7.23	1.96 V	296	90.42	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625, 18900, 19175							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	23.42	33.00	-9.58	1.04 H	3	88.28	-64.86
2	1880.00	23.59	33.00	-9.41	1.00 H	3	88.36	-64.77
3	1907.50	23.75	33.00	-9.25	1.02 H	5	88.41	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	25.40	33.00	-7.60	2.40 V	338	90.26	-64.86
2	1880.00	**25.76**	33.00	-7.24	2.40 V	339	90.53	-64.77
3	1907.50	25.69	33.00	-7.31	2.40 V	326	90.35	-64.66

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 10MHz

Mode	TX channel 18650, 18900, 19150							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	21.39	33.00	-11.61	1.49 H	325	86.23	-64.84
2	1880.00	21.79	33.00	-11.21	1.46 H	314	86.56	-64.77
3	1905.00	21.65	33.00	-11.35	1.35 H	287	86.32	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	25.43	33.00	-7.57	1.89 V	328	90.27	-64.84
2	1880.00	**25.59**	33.00	-7.41	1.97 V	333	90.36	-64.77
3	1905.00	25.49	33.00	-7.51	1.88 V	321	90.16	-64.67

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 15MHz

Mode	TX channel 18675, 18900, 19125							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	21.68	33.00	-11.32	1.55 H	310	86.52	-64.84
2	1880.00	22.05	33.00	-10.95	1.50 H	314	86.82	-64.77
3	1902.50	21.97	33.00	-11.03	1.43 H	325	86.65	-64.68
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	25.33	33.00	-7.67	1.93 V	325	90.17	-64.84
2	1880.00	25.57	33.00	-7.43	1.89 V	336	90.34	-64.77
3	1902.50	**25.76**	33.00	-7.24	1.96 V	312	90.44	-64.68

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 20MHz

Mode	TX channel 18675, 18900, 19125							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	24.70	33.00	-8.30	1.16 H	326	89.53	-64.83
2	1880.00	24.98	33.00	-8.02	1.18 H	330	89.75	-64.77
3	1900.00	25.16	33.00	-7.84	1.19 H	329	89.86	-64.70
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	25.77	33.00	-7.23	2.05 V	335	90.60	-64.83
2	1880.00	25.87	33.00	-7.13	2.10 V	333	90.64	-64.77
3	1900.00	**26.01**	33.00	-6.99	2.08 V	336	90.71	-64.70

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

Modulation Type: 16QAM

LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607, 18900, 19193							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	23.79	33.00	-9.21	1.12 H	296	88.65	-64.86
2	1880.00	24.19	33.00	-8.81	1.02 H	277	88.96	-64.77
3	1909.30	24.08	33.00	-8.92	1.05 H	316	88.73	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	25.30	33.00	-7.70	1.87 V	286	90.16	-64.86
2	1880.00	25.45	33.00	-7.55	2.12 V	324	90.22	-64.77
3	1909.30	**25.48**	33.00	-7.52	1.96 V	332	90.13	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 3MHz

Mode	TX channel 18615, 18900, 19185							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	20.79	33.00	-12.21	1.28 H	263	85.64	-64.85
2	1880.00	21.19	33.00	-11.81	1.35 H	289	85.96	-64.77
3	1908.50	21.11	33.00	-11.89	1.25 H	275	85.76	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	25.01	33.00	-7.99	1.67 V	326	89.86	-64.85
2	1880.00	**25.35**	33.00	-7.65	1.96 V	298	90.12	-64.77
3	1908.50	25.31	33.00	-7.69	1.86 V	286	89.96	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625, 18900, 19175							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	22.90	33.00	-10.10	1.13 H	23	87.76	-64.86
2	1880.00	23.09	33.00	-9.91	1.04 H	12	87.86	-64.77
3	1907.50	23.30	33.00	-9.70	1.15 H	26	87.96	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	24.87	33.00	-8.13	2.23 V	341	89.73	-64.86
2	1880.00	**25.27**	33.00	-7.73	2.32 V	334	90.04	-64.77
3	1907.50	25.20	33.00	-7.80	2.32 V	305	89.86	-64.66

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 10MHz

Mode	TX channel 18650, 18900, 19150							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	20.88	33.00	-12.12	1.38 H	289	85.72	-64.84
2	1880.00	21.28	33.00	-11.72	1.47 H	299	86.05	-64.77
3	1905.00	21.19	33.00	-11.81	1.25 H	265	85.86	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	24.91	33.00	-8.09	1.78 V	325	89.75	-64.84
2	1880.00	**25.29**	33.00	-7.71	2.03 V	288	90.06	-64.77
3	1905.00	25.19	33.00	-7.81	1.96 V	327	89.86	-64.67

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 15MHz

Mode	TX channel 18675, 18900, 19125							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	21.21	33.00	-11.79	1.48 H	297	86.05	-64.84
2	1880.00	21.58	33.00	-11.42	1.47 H	288	86.35	-64.77
3	1902.50	21.44	33.00	-11.56	1.39 H	299	86.12	-64.68
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	25.03	33.00	-7.97	1.85 V	286	89.87	-64.84
2	1880.00	25.10	33.00	-7.90	1.78 V	354	89.87	-64.77
3	1902.50	**25.18**	33.00	-7.82	1.86 V	299	89.86	-64.68

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 2, Channel Bandwidth 20MHz

Mode	TX channel 18675, 18900, 19125							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	22.20	33.00	-10.80	1.15 H	298	87.03	-64.83
2	1880.00	22.48	33.00	-10.52	1.23 H	327	87.25	-64.77
3	1900.00	22.65	33.00	-10.35	1.24 H	335	87.35	-64.70
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	24.42	33.00	-8.58	1.87 V	245	89.25	-64.83
2	1880.00	**24.79**	33.00	-8.21	1.87 V	289	89.56	-64.77
3	1900.00	24.62	33.00	-8.38	1.96 V	323	89.32	-64.70

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

Modulation Type: QPSK

LTE Band 25, Channel Bandwidth 1.4MHz

Mode		TX channel 26047, 26365, 26683						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	20.68	33.00	-12.32	1.56 H	332	85.54	-64.86
2	1882.50	21.07	33.00	-11.93	1.49 H	318	85.82	-64.75
3	1914.30	21.01	33.00	-11.99	1.35 H	287	85.63	-64.62
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	24.67	33.00	-8.33	1.78 V	323	89.53	-64.86
2	1882.50	**24.88**	33.00	-8.12	1.94 V	335	89.71	-64.75
3	1914.30	24.65	33.00	-8.35	1.87 V	286	89.27	-64.62

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 3MHz

Mode		TX channel 26055, 26365, 26675						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	21.35	33.00	-11.65	1.12 H	278	86.20	-64.85
2	1882.50	21.78	33.00	-11.22	1.27 H	318	86.53	-64.75
3	1913.50	21.69	33.00	-11.31	1.34 H	296	86.32	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	24.70	33.00	-8.30	1.86 V	325	89.55	-64.85
2	1882.50	**25.00**	33.00	-8.00	1.91 V	333	89.75	-64.75
3	1913.50	24.68	33.00	-8.32	2.03 V	310	89.31	-64.63

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 5MHz

Mode	TX channel 26065, 26365, 26665							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	20.78	33.00	-12.22	1.06 H	293	85.64	-64.86
2	1882.50	21.19	33.00	-11.81	1.04 H	325	85.94	-64.75
3	1912.50	21.09	33.00	-11.91	1.15 H	296	85.72	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	24.35	33.00	-8.65	2.35 V	324	89.21	-64.86
2	1882.50	**24.83**	33.00	-8.17	2.39 V	335	89.58	-64.75
3	1912.50	24.61	33.00	-8.39	2.42 V	310	89.24	-64.63

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 10MHz

Mode	TX channel 26090, 26365, 26640							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	20.26	33.00	-12.74	1.29 H	335	85.10	-64.84
2	1882.50	20.71	33.00	-12.29	1.43 H	283	85.46	-64.75
3	1910.00	20.56	33.00	-12.44	1.23 H	287	85.21	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	24.85	33.00	-8.15	1.87 V	345	89.69	-64.84
2	1882.50	24.92	33.00	-8.08	1.92 V	333	89.67	-64.75
3	1910.00	**25.00**	33.00	-8.00	1.98 V	315	89.65	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 15MHz

Mode	TX channel 26115, 26365, 26615							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	21.81	33.00	-11.19	1.34 H	320	86.65	-64.84
2	1882.50	22.20	33.00	-10.80	1.23 H	298	86.95	-64.75
3	1907.50	22.07	33.00	-10.93	1.00 H	298	86.73	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	24.74	33.00	-8.26	2.03 V	298	89.58	-64.84
2	1882.50	24.92	33.00	-8.08	1.82 V	334	89.67	-64.75
3	1907.50	**25.04**	33.00	-7.96	1.69 V	342	89.70	-64.66

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 20MHz

Mode	TX channel 26140, 26365, 26590							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	21.82	33.00	-11.18	1.25 H	341	86.65	-64.83
2	1882.50	22.22	33.00	-10.78	1.12 H	326	86.97	-64.75
3	1905.00	22.05	33.00	-10.95	1.26 H	310	86.72	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	24.51	33.00	-8.49	1.96 V	342	89.34	-64.83
2	1882.50	24.54	33.00	-8.46	2.00 V	332	89.29	-64.75
3	1905.00	**25.40**	33.00	-7.60	2.03 V	296	90.07	-64.67

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

Modulation Type: 16QAM

LTE Band 25, Channel Bandwidth 1.4MHz

Mode	TX channel 26047, 26365, 26683							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	20.16	33.00	-12.84	1.42 H	326	85.02	-64.86
2	1882.50	20.56	33.00	-12.44	1.47 H	296	85.31	-64.75
3	1914.30	20.53	33.00	-12.47	1.29 H	296	85.15	-64.62
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	23.50	33.00	-9.50	1.69 V	315	88.36	-64.86
2	1882.50	23.35	33.00	-9.65	1.78 V	296	88.10	-64.75
3	1914.30	**23.56**	33.00	-9.44	1.96 V	315	88.18	-64.62

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 3MHz

Mode	TX channel 26055, 26365, 26675							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	20.87	33.00	-12.13	1.06 H	257	85.72	-64.85
2	1882.50	21.29	33.00	-11.71	1.18 H	296	86.04	-64.75
3	1913.50	21.24	33.00	-11.76	1.46 H	316	85.87	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	23.53	33.00	-9.47	1.79 V	315	88.38	-64.85
2	1882.50	23.37	33.00	-9.63	1.89 V	322	88.12	-64.75
3	1913.50	**23.59**	33.00	-9.41	1.96 V	314	88.22	-64.63

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 5MHz

Mode	TX channel 26065, 26365, 26665							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	20.26	33.00	-12.74	1.17 H	286	85.12	-64.86
2	1882.50	20.67	33.00	-12.33	1.03 H	298	85.42	-64.75
3	1912.50	20.64	33.00	-12.36	1.25 H	323	85.27	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	23.45	33.00	-9.55	2.22 V	314	88.31	-64.86
2	1882.50	23.30	33.00	-9.70	2.38 V	315	88.05	-64.75
3	1912.50	**23.49**	33.00	-9.51	2.39 V	295	88.12	-64.63

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 10MHz

Mode	TX channel 26090, 26365, 26640							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	19.88	33.00	-13.12	1.15 H	298	84.72	-64.84
2	1882.50	20.18	33.00	-12.82	1.35 H	274	84.93	-64.75
3	1910.00	20.05	33.00	-12.95	1.19 H	236	84.70	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	24.07	33.00	-8.93	1.78 V	354	88.91	-64.84
2	1882.50	**24.30**	33.00	-8.70	1.83 V	342	89.05	-64.75
3	1910.00	24.22	33.00	-8.78	2.06 V	304	88.87	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 15MHz

Mode	TX channel 26115, 26365, 26615							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	21.28	33.00	-11.72	1.29 H	293	86.12	-64.84
2	1882.50	21.67	33.00	-11.33	1.15 H	274	86.42	-64.75
3	1907.50	21.63	33.00	-11.37	1.04 H	316	86.29	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	24.33	33.00	-8.67	1.98 V	256	89.17	-64.84
2	1882.50	24.56	33.00	-8.44	1.68 V	297	89.31	-64.75
3	1907.50	**24.69**	33.00	-8.31	1.57 V	338	89.35	-64.66

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

LTE Band 25, Channel Bandwidth 20MHz

Mode	TX channel 26140, 26365, 26590							
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	21.29	33.00	-11.71	1.36 H	345	86.12	-64.83
2	1882.50	21.67	33.00	-11.33	1.25 H	298	86.42	-64.75
3	1905.00	21.58	33.00	-11.42	1.39 H	287	86.25	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	23.74	33.00	-9.26	1.86 V	335	88.57	-64.83
2	1882.50	**24.11**	33.00	-8.89	2.06 V	297	88.86	-64.75
3	1905.00	23.40	33.00	-9.60	1.95 V	287	88.07	-64.67

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit is equal to -13 dBm.

4.2.2 Test Procedure

a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
d. Following C63.26 section 5.5 and 5.2.7
   EIRP (dBm) = E (dBμV/m) + 20log(D) - 104.8; where D is the measurement distance (in the far field region) in m.
   ERP (dBm) = E (dBμV/m) + 20log(D) - 104.8 - 2.15; where D is the measurement distance (in the far field region) in m.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

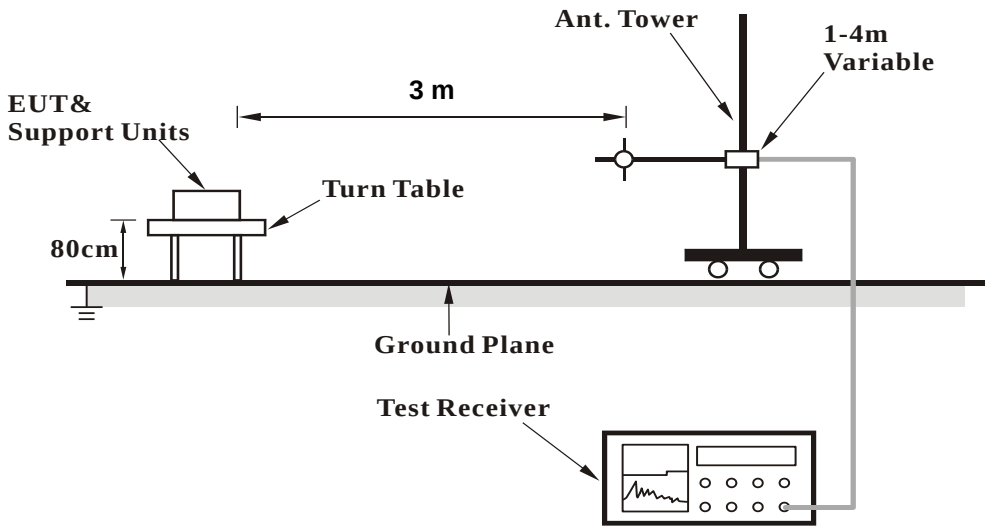

<Radiated Emission above 1 GHz>

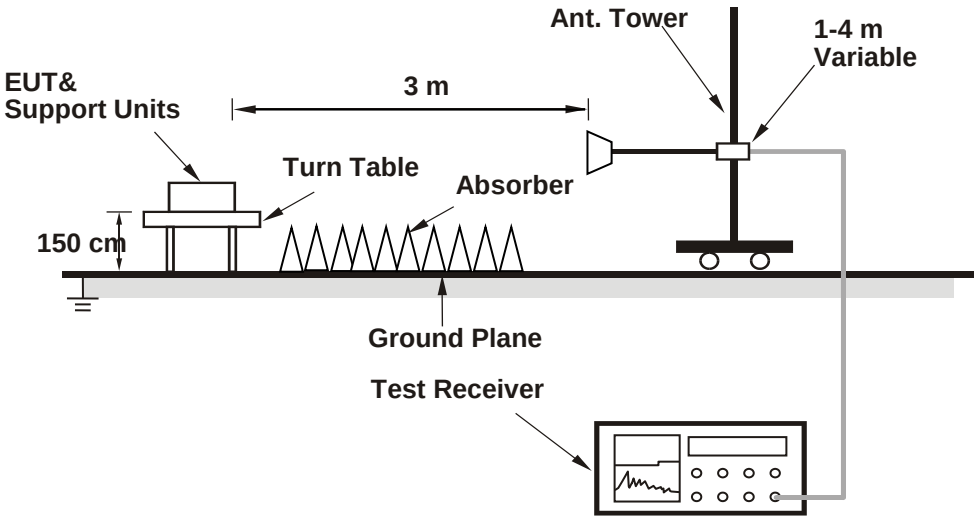

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Below 1GHz


WCDMA

RF Mode	TX WCDMA Band II	**Channel**	CH 9538：1907.6 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	78.50	-47.37	-13.00	-34.37	2.21 H	226	64.31	-111.68
2	130.88	-46.05	-13.00	-33.05	3.81 H	273	62.61	-108.66
3	266.68	-48.17	-13.00	-35.17	2.63 H	106	59.98	-108.15
4	399.57	-51.43	-13.00	-38.43	3.02 H	219	53.36	-104.79
5	450.01	-49.37	-13.00	-36.37	3.69 H	237	53.94	-103.31
6	869.05	-55.25	-13.00	-42.25	1.09 H	152	41.47	-96.72

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

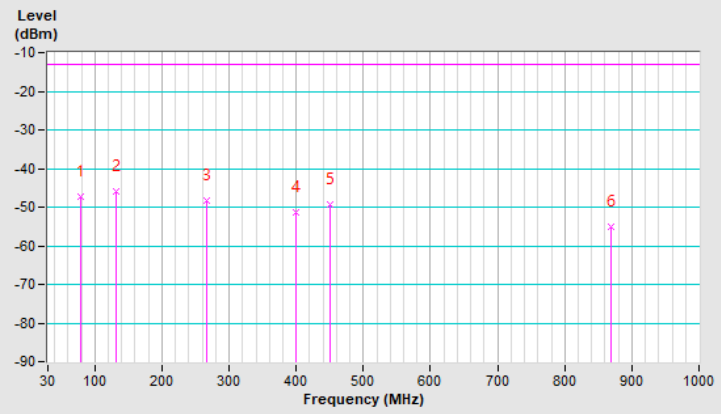


RF Mode	TX WCDMA Band II	Channel	CH 9538：1907.6 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-41.61	-13.00	-28.61	2.54 V	66	66.04	-107.65
2	131.85	-43.43	-13.00	-30.43	3.64 V	2	65.20	-108.63
3	255.04	-43.62	-13.00	-30.62	2.90 V	189	65.08	-108.70
4	399.57	-48.12	-13.00	-35.12	3.07 V	216	56.67	-104.79
5	450.01	-47.77	-13.00	-34.77	2.97 V	156	55.54	-103.31
6	874.87	-55.36	-13.00	-42.36	3.87 V	297	41.25	-96.61

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

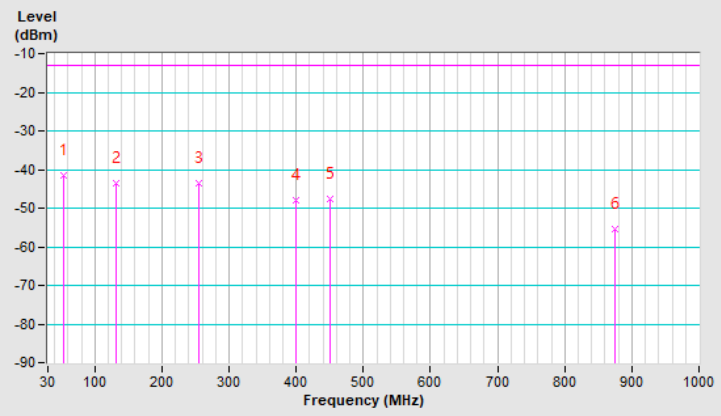


LTE Band 2 (Channel Bandwidth 5MHz)

RF Mode	TX LTE Band II-5MHz	Channel	CH 19175：1907.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-39.98	-13.00	-26.98	2.49 H	28	67.67	-107.65
2	130.88	-43.06	-13.00	-30.06	3.44 H	198	65.60	-108.66
3	257.95	-47.69	-13.00	-34.69	1.16 H	309	60.89	-108.58
4	399.57	-47.80	-13.00	-34.80	2.34 H	220	56.99	-104.79
5	450.01	-47.71	-13.00	-34.71	2.09 H	156	55.60	-103.31
6	925.31	-54.16	-13.00	-41.16	2.83 H	2	41.84	-96.00

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

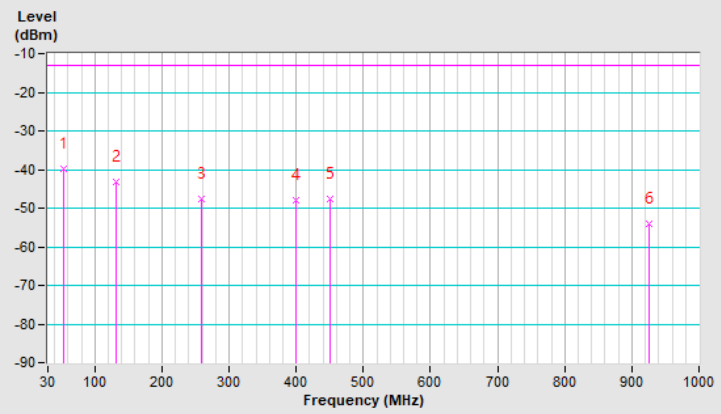


RF Mode	TX LTE Band II-5MHz	Channel	CH 19175：1907.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-40.05	-13.00	-27.05	3.23 V	2	67.60	-107.65
2	130.88	-43.71	-13.00	-30.71	1.47 V	315	64.95	-108.66
3	270.56	-46.34	-13.00	-33.34	2.02 V	163	61.61	-107.95
4	399.57	-47.88	-13.00	-34.88	3.71 V	152	56.91	-104.79
5	450.01	-47.56	-13.00	-34.56	2.31 V	158	55.75	-103.31
6	956.35	-54.11	-13.00	-41.11	1.07 V	316	41.46	-95.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

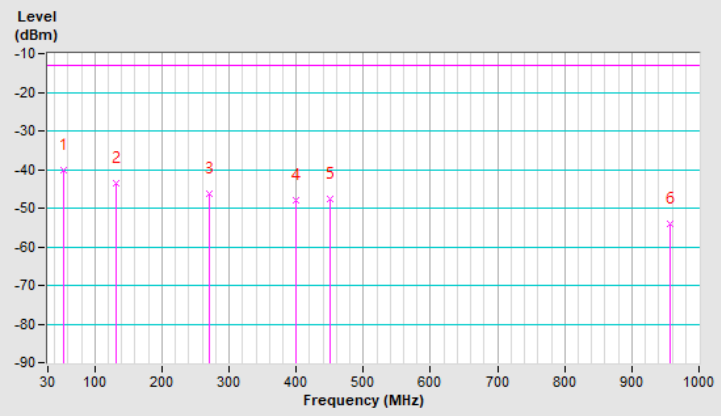


LTE Band 25, Channel Bandwidth: 5MHz

RF Mode	TX LTE Band XXV-5MHz	Channel	CH 26665：1912.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	79.47	-47.85	-13.00	-34.85	3.80 H	261	64.07	-111.92
2	129.91	-45.87	-13.00	-32.87	2.44 H	278	62.80	-108.67
3	250.19	-47.08	-13.00	-34.08	3.55 H	112	61.80	-108.88
4	400.54	-51.59	-13.00	-38.59	1.19 H	217	53.19	-104.78
5	450.01	-49.51	-13.00	-36.51	1.76 H	222	53.80	-103.31
6	876.81	-54.94	-13.00	-41.94	2.66 H	104	41.64	-96.58

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

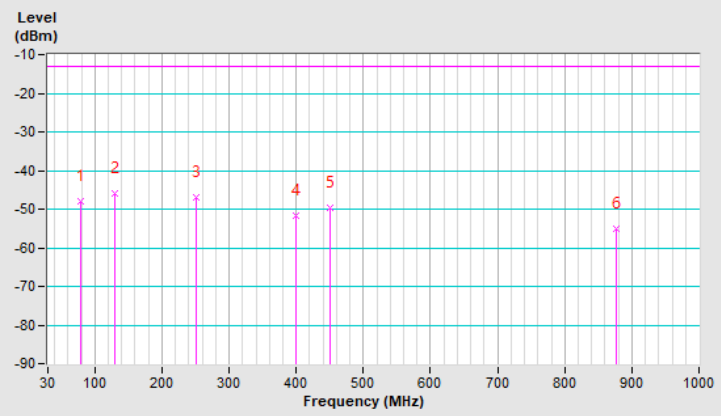


RF Mode	TX LTE Band XXV-5MHz	Channel	CH 26665：1912.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-41.54	-13.00	-28.54	2.19 V	230	66.11	-107.65
2	129.91	-42.95	-13.00	-29.95	3.16 V	12	65.72	-108.67
3	260.86	-49.71	-13.00	-36.71	1.92 V	125	58.73	-108.44
4	399.57	-48.15	-13.00	-35.15	3.13 V	158	56.64	-104.79
5	450.01	-47.51	-13.00	-34.51	1.73 V	156	55.80	-103.31
6	836.07	-55.39	-13.00	-42.39	3.34 V	134	41.34	-96.73

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

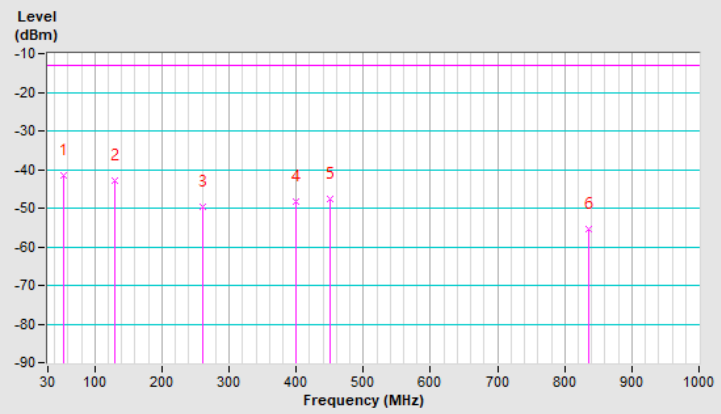

Above 1GHz

WCDMA Band 2

RF Mode	WCDMA Band II	Channel	CH 9262：1852.4 MHz
Frequency Range	1 GHz ~ 18 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-46.25	-13.00	-33.25	1.75 H	58	62.63	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-54.94	-13.00	-41.94	1.75 V	58	53.94	-108.88

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	WCDMA Band II	Channel	CH 9400：1880 MHz
Frequency Range	1 GHz ~ 18 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-46.13	-13.00	-33.13	1.75 H	65	62.86	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.76	-13.00	-41.76	2.12 V	352	54.23	-108.99

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	WCDMA Band II	Channel	CH 9538：1907.6 MHz
Frequency Range	1 GHz ~ 18 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-46.08	-13.00	-33.08	1.80 H	78	62.78	-108.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	3815.20	-54.84	-13.00	-41.84	2.01 V	360	54.02	-108.86

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18607：1850.7 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-41.26	-13.00	-28.26	2.54 H	58	67.62	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-40.28	-13.00	-27.28	1.80 V	116	68.60	-108.88

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18900：1880 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-41.26	-13.00	-28.26	3.56 H	142	67.73	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-40.69	-13.00	-27.69	2.06 V	285	68.30	-108.99

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 19193：1909.3 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-41.12	-13.00	-28.12	3.08 H	303	67.72	-108.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3816.60	-40.47	-13.00	-27.47	1.96 V	90	68.39	-108.86

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18625：1852.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-40.46	-13.00	-27.46	1.28 H	344	68.42	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-40.00	-13.00	-27.00	2.00 V	275	68.88	-108.88

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18900：1880 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-40.83	-13.00	-27.83	1.32 H	174	68.16	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-41.43	-13.00	-28.43	3.27 V	316	67.56	-108.99

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175：1907.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-41.20	-13.00	-28.20	2.10 H	108	67.68	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-39.98	-13.00	-26.98	1.70 V	265	68.90	-108.88

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18700：1860 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-41.60	-13.00	-28.60	2.95 H	168	67.40	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-40.30	-13.00	-27.30	3.92 V	337	68.70	-109.00

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18900：1880 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-41.16	-13.00	-28.16	1.11 H	236	67.83	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-40.60	-13.00	-27.60	1.54 V	98	68.39	-108.99

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 19100：1900 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-41.59	-13.00	-28.59	1.54 H	185	67.41	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-40.23	-13.00	-27.23	2.78 V	41	68.77	-109.00

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 25

RF Mode	LTE Band 25 Channel Bandwidth: 1.4MHz	Channel	CH 26047：1850.7 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-41.13	-13.00	-28.13	2.95 H	41	67.75	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-40.09	-13.00	-27.09	2.12 V	269	68.79	-108.88

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 1.4MHz	Channel	CH 26365：1882.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-41.58	-13.00	-28.58	2.50 H	185	67.42	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-40.44	-13.00	-27.44	3.56 V	158	68.56	-109.00

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 1.4MHz	Channel	CH 26683：1914.3 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-41.46	-13.00	-28.46	1.42 H	276	67.30	-108.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-39.97	-13.00	-26.97	1.05 V	243	68.79	-108.76

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 5MHz	Channel	CH 26055：1851.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-41.30	-13.00	-28.30	3.05 H	150	67.58	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-40.60	-13.00	-27.60	3.05 V	6	68.28	-108.88

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 5MHz	Channel	CH 26365：1882.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-41.58	-13.00	-28.58	1.80 H	204	67.42	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-40.28	-13.00	-27.28	2.41 V	69	68.72	-109.00

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 5MHz	Channel	CH 26665：1912.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-41.34	-13.00	-28.34	1.68 H	356	67.44	-108.78
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	**3825.00**	**-39.91**	**-13.00**	**-26.91**	**1.93 V**	**104**	**68.87**	**-108.78**

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26140：1860 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-41.67	-13.00	-28.67	1.10 H	183	67.26	-108.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-40.40	-13.00	-27.40	2.90 V	270	68.53	-108.93

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26365：1882.5 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-41.79	-13.00	-28.79	2.10 H	239	67.21	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-40.38	-13.00	-27.38	2.71 V	108	68.62	-109.00

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26590：1905 MHz
Frequency Range	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-41.37	-13.00	-28.37	3.31 H	207	67.55	-108.92
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-40.18	-13.00	-27.18	2.23 V	40	68.74	-108.92

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab
Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---