

blink 1-888-998-2546
support@blinknetwork.com

BLINK IQ 200
EV CHARGING STATION

For use with electric vehicles.
Ventilation not required.
Made in Taiwan.

MFG: **LITEON**
MODEL: IQW2-80U-M1-R2-N-25
IN/OUT: 208/240V~, 1Ø, 80A MAX
FREQ: 60HZ MMQ: 1Wh or 1sec.
TEMP: -30°C to 50°C
TYPE: TYPE 3R
REV: A
MFGDT: YYWW
S/N: MM-PPPP-YYWW-SSSSSS

UL LISTED E354962
UL NOM




NOTICE: This device complies with Part 15 of the FCC Rules and with RSS rules of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class B digital apparatus complies with Canadian ICES-003.

AVIS: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

AVISO: Este equipo cumple con la Regla 15 de la FCC y la norma RSS reglas de la industria canadiense. La operación de este equipo esta sujeta a las siguientes condiciones: (1) este dispositivo no debe causar interferencia perjudicial, y (2) este dispositivo debe aceptar cualquier interferencia recibida incluyendo aquella que pudiera afectar su correcta operación. Este aparato digital de Clase B cumple con el ICES-003 canadiense.

Contain

FCC ID: QIPPX58 IC: 7830A-PX58
FCC ID: TFI680CLB IC: 10984A-680CLB
FCC ID: PPQIQW2 IC: 4491A-IQW2

CAUTION: Do not use this product if there is any damage to the EV connector or cable. Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.

ATTENTION: Ne pas utiliser ce produit si vous remarquez d'endommager le connecteur ou le câble. Risque d'électrocution. Ne pas enlever ou tenter d'ouvrir le couvercle de l'appareil. Le dispositif ne contient aucune pièce réparable par l'utilisateur. Reportez-vous des réparations à un personnel qualifié.

PRECAUTION: No utilice este producto si observa daños en el conector o el cable. Riesgo de ser electrocutado. No remover o intentar abrir la cubierta del dispositivo. El dispositivo no contiene partes reparables adentro. Remitir reparaciones al personal de servicio calificado.

WARNING: Risk of explosion. This equipment has arcing or sparking parts that should not be exposed to flammable vapors. This equipment should be located at least 18 inches (460 mm) above the floor. Automatic reset feature is provided. This device is intended only for charging vehicles not requiring ventilation during charging. Refer to the instruction manual before installing this equipment.

ATTENTION: Risque d'explosion. Ce kit contient des pièces qui pourraient créer des étincelles si elles entrent en contact avec des vapeurs inflammables. Cet équipement doit être installé avec un dégagement minimum de 460 mm au-dessus du sol. fonction de réinitialisation automatique est fourni. Cet appareil est conçu uniquement pour la recharge des véhicules ne nécessitant pas de ventilation pendant le chargement. Lisez le manuel d'instruction avant d'installer cet équipement.

ADVERTENCIA: Peligro de explosión. Este equipo contiene partes que pudieran crear chispas si entran en contacto con vapores inflamables. Este equipo debe ser instalado con una separación mínima de 460 mm sobre el nivel del piso. El equipo tiene la funcionalidad de ser reiniciado automáticamente. Este equipo esta diseñado solo para recargar vehículos eléctricos que no requieren ventilación durante la carga. Lea el manual de instrucciones antes de instalar este equipo.

August 31, 2016



Blink IQ 200 Product Labels: IQW2-80U-M1-R2-N-25

COLORS:



CORNER RADIUS: 2.5mm

Note: Before printing, the black background will need to be extended to allow sufficient bleed.

TYPOGRAPHY:

CAUTION, WARNING, and NOTICE headlines must be at least 9pt, which is 3/32" (2.3813mm) in height.

MATERIAL:

Facestock:

1.0 mil (0.0254mm)±10%

Thermal transfer topcoated polyester film that has a special U.V. resistant feature that prolongs fading of the inks.

Adhesive:

0.8 mil (0.0203mm)±10%

Ultra clear pressure sensitive acrylic over laminating adhesive.

Liner:

3.0 mil (0.0762mm)±5%


One-side poly coated natural kraft liner.

Total Construction:

4.8 mil (0.1219mm) Nominal

Temp. Range:

-40°F to 302°F (-40°C to 150°C)

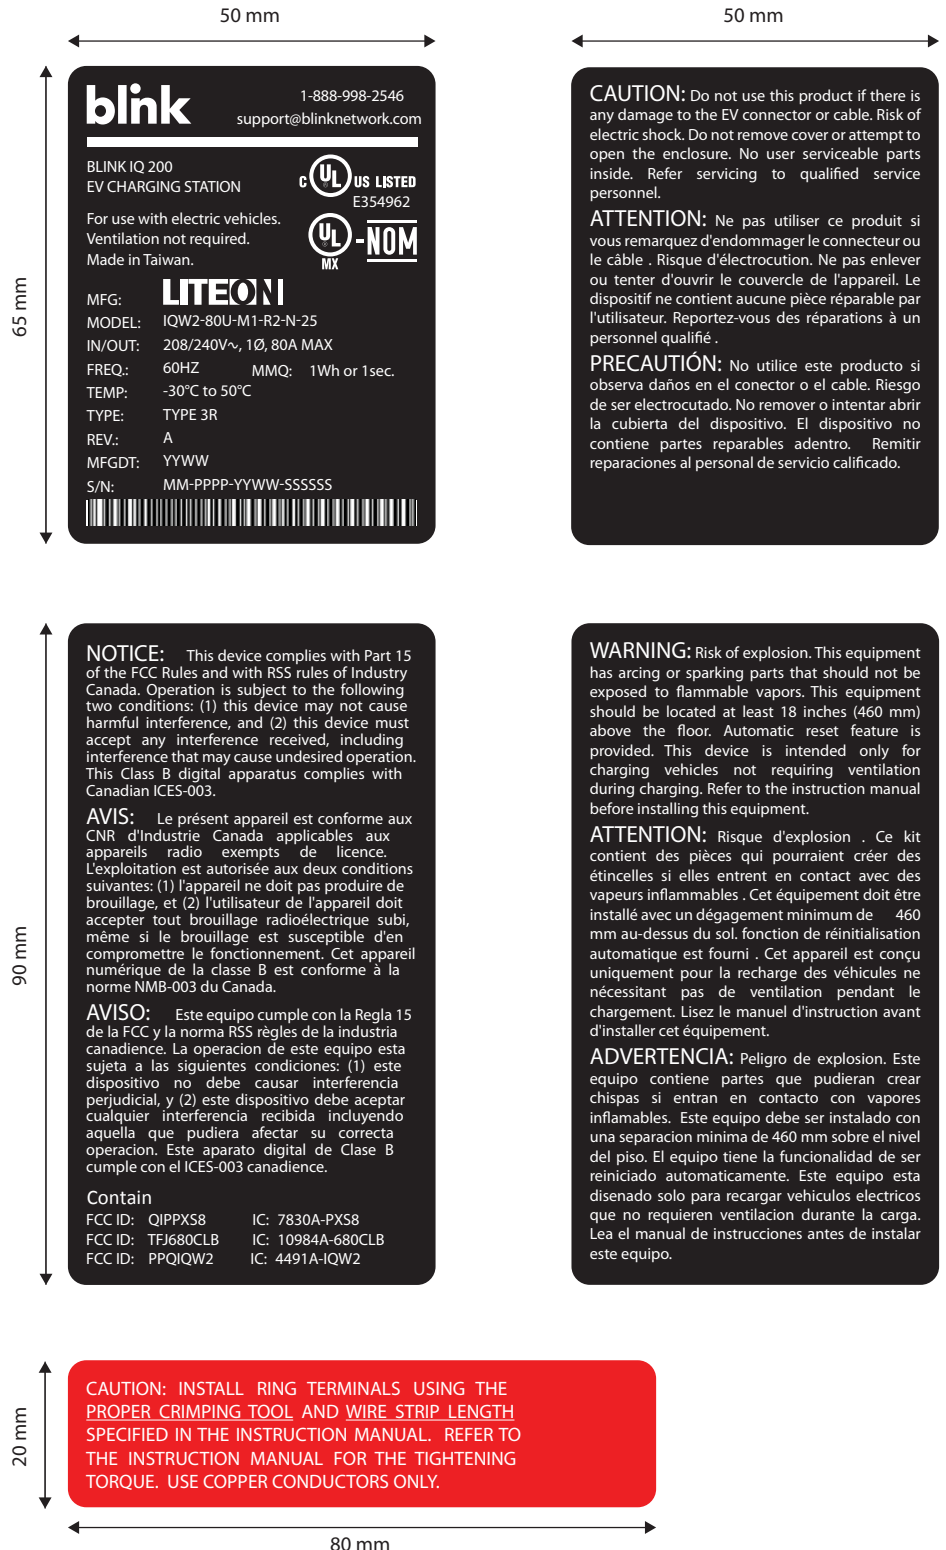

August 31, 2016

blink

Blink IQ 200 Product Labels: IQW2-80U-W1-N1-N-25

COLORS:



CORNER RADIUS: 2.5mm

Note: Before printing, the black background will need to be extended to allow sufficient bleed.

TYPOGRAPHY:

CAUTION, WARNING, and NOTICE headlines must be at least 9pt, which is 3/32" (2.3813mm) in height.

MATERIAL:

Facestock:

1.0 mil (0.0254mm)±10%

Thermal transfer topcoated polyester film that has a special U.V. resistant feature that prolongs fading of the inks.

Adhesive:

0.8 mil (0.0203mm)±10%

Ultra clear pressure sensitive acrylic over laminating adhesive.

Liner:

3.0 mil (0.0762mm)±5%


One-side poly coated natural kraft liner.

Total Construction:

4.8 mil (0.1219mm) Nominal

Temp. Range:

-40°F to 302°F (-40°C to 150°C)

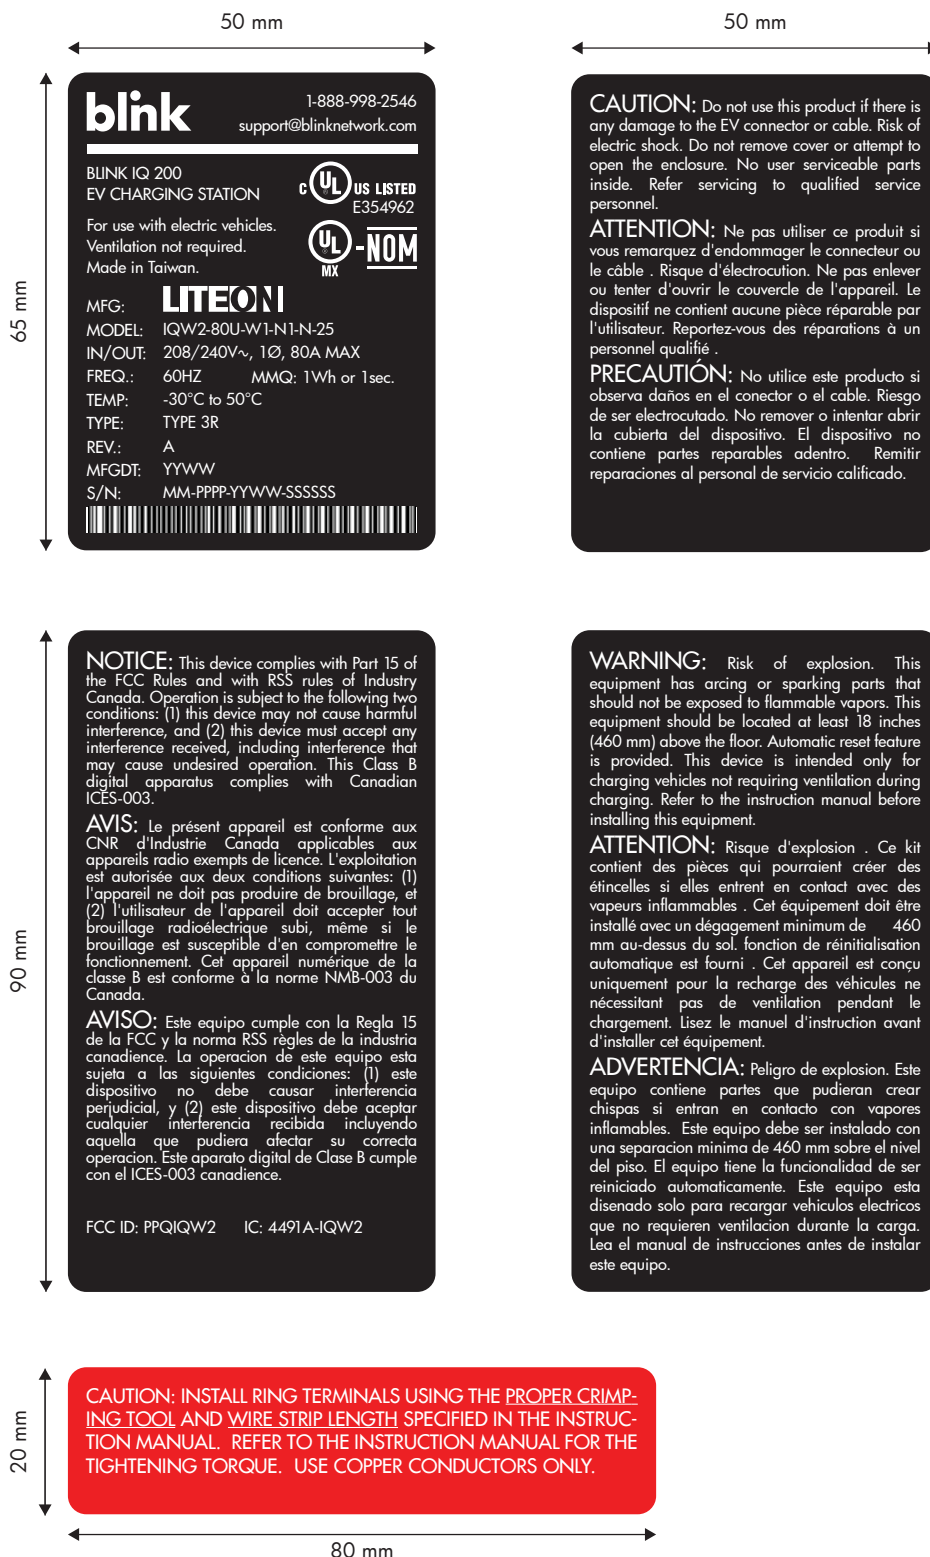

COLORS:



Note: Before printing, the black background will need to be extended to allow sufficient bleed.

TYPOGRAPHY:

CAUTION, WARNING, and NOTICE headlines must be at least 9pt, which is 3/32" (2.3813mm) in height.

MATERIAL:

Facestock:

1.0 mil (0.0254mm)±10%

Thermal transfer topcoated polyester film that has a special U.V. resistant feature that prolongs fading of the inks.

Adhesive:

0.8 mil (0.0203mm)±10%

Ultra clear pressure sensitive acrylic over laminating adhesive.

Liner:

3.0 mil (0.0762mm)±5%

One-side poly coated natural kraft liner.

Total Construction:

4.8 mil (0.1219mm) Nominal

Temp. Range:

-40°F to 302°F (-40°C to 150°C)

50 mm

65 mm

blink

1-888-998-2546
support@blinknetwork.com

BLINK IQ 200
KIOSK

Made in Taiwan.

UL **US LISTED**
E354962

UL **-NOM**
MX

LITEON

MF:	IQW2-00U-M1-R2-N-00
MODEL:	120/208/240V~, 1Ø, 0.22A MAX
INPUT:	60HZ
FREQ:	-30°C to 50°C
TEMP:	TYPE 3R
TYPE:	A
REV.:	YYWW
MFGDT:	MM-PPPP-YYWW-SSSSSS
S/N:	

Barcode

NOTICE: This device complies with Part 15 of the FCC Rules and with RSS rules of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class B digital apparatus complies with Canadian ICES-003.

AVIS: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

AVISO: Este equipo cumple con la Regla 15 de la FCC y la norma RSS reglas de la industria canadiense. La operación de este equipo esta sujeta a las siguientes condiciones: (1) este dispositivo no debe causar interferencia perjudicial, y (2) este dispositivo debe aceptar cualquier interferencia recibida incluyendo aquella que pudiera afectar su correcta operación. Este aparato digital de Clase B cumple con el ICES-003 canadiense.

Contain

FCC ID:	Q1PPXS8	IC:	7830A-PXS8
FCC ID:	TFJ680CLB	IC:	10984A-680CLB
FCC ID:	PPQIQW2	IC:	4491A-IQW2

WARNING: Risk of explosion. This equipment has arcing or sparking parts that should not be exposed to flammable vapors. This equipment should be located at least 18 inches (460 mm) above the floor. Automatic reset feature is provided. Refer to the instruction manual before installing this equipment.

ATTENTION: Risque d'explosion. Ce kit contient des pièces qui pourraient créer des étincelles si elles entrent en contact avec des vapeurs inflammables. Cet équipement doit être installé avec un dégagement minimum de 460 mm au-dessus du sol. fonction de réinitialisation automatique est fourni. Lisez le manuel d'instruction avant d'installer cet équipement.

ADVERTENCIA: Peligro de explosión. Este equipo contiene partes que pudieran crear chispas si entran en contacto con vapores inflamables. Este equipo debe ser instalado con una separación mínima de 460 mm sobre el nivel del piso. El equipo tiene la funcionalidad de ser reiniciado automáticamente. Lea el manual de instrucciones antes de instalar este equipo.

Diagram illustrating the dimensions and caution for the terminal block:

- Vertical dimension: 20 mm
- Horizontal dimension: 80 mm
- Caution: INSTALL RING TERMINALS USING THE PROPER CRIMPING TOOL AND WIRE STRIP LENGTH SPECIFIED IN THE INSTRUCTION MANUAL. REFER TO THE INSTRUCTION MANUAL FOR THE TIGHTENING TORQUE. USE COPPER CONDUCTORS ONLY.

August 31, 2016



Blink IQ 200 Product Labels: IQW2-32U-M1-R2-N-25

COLORS:



CORNER RADIUS: 2.5mm

Note: Before printing, the black background will need to be extended to allow sufficient bleed.

TYPOGRAPHY:

CAUTION, WARNING, and NOTICE headlines must be at least 9pt, which is 3/32" (2.3813mm) in height.

MATERIAL:

Facestock:

1.0 mil (0.0254mm)±10%

Thermal transfer topcoated polyester film that has a special U.V. resistant feature that prolongs fading of the inks.

Adhesive:

0.8 mil (0.0203mm)±10%

Ultra clear pressure sensitive acrylic over laminating adhesive.

Liner:

3.0 mil (0.0762mm)±5%

One-side poly coated natural kraft liner.

Total Construction:

4.8 mil (0.1219mm) Nominal

Temp. Range:

-40°F to 302°F (-40°C to 150°C)

